



# TEST REPORT

## FCC ID:ZHZLHT52

**Report Number**.....: ZKT-2203011243E

**Date of Test**.....: Mar. 01, 2022 to May 28, 2022

**Date of issue**.....: May 28, 2022

**Total number of pages**.....: 35

**Test Result**.....: PASS

**Testing Laboratory**.....: **Shenzhen ZKT Technology Co., Ltd.**

**Address**.....: 1/F, No. 101, Building B, No. 6, Tangwei Community Industrial Avenue, Fuhai Street, Bao'an District, Shenzhen, China

**Applicant's name**.....: **Dragino Technology Co., Limited**

**Address**.....: Room 202, Block B, BCT Incubation Bases, No.8 CaiYunRoad LongCheng Street, LongGang District ; Shenzhen 518116,China

**Manufacturer's name**.....: **Dragino Technology Co., Limited.**

**Address**.....: Room 202, Block B, BCT Incubation Bases, No.8 CaiYunRoad LongCheng Street, LongGang District ; Shenzhen 518116,China

### Test specification:

**Standard**.....: FCC CFR Title 47 Part 15 Subpart C Section 15.247

**Test procedure**.....: /

**Non-standard test method**.....: N/A

**Test Report Form No.**.....: TRF-EL-110\_V0

**Test Report Form(s) Originator**....: ZKT Testing

**Master TRF**.....: Dated: 2020-01-06

This device described above has been tested by ZKT, and the test results show that the equipment under test (EUT) is in compliance with the FCC requirements. And it is applicable only to the tested sample identified in the report.

This report shall not be reproduced except in full, without the written approval of ZKT, this document may be altered or revised by ZKT, personal only, and shall be noted in the revision of the document.

**Product name**.....: **LoRaWAN Temperature & Humidity Sensor**

**Trademark**.....: DRAGINO

**Model/Type reference**.....: LHT52

**Ratings**.....: DC 3V by Battery



**Testing procedure and testing location:**

**Testing Laboratory**.....: **Shenzhen ZKT Technology Co., Ltd.**

**Address** .....: 1/F, No. 101, Building B, No. 6, Tangwei Community  
Industrial Avenue, Fuhai Street, Bao'an District,  
Shenzhen, China

**Tested by (name + signature)** .....: Jim Liu

Jim Liu

**Reviewer (name + signature)** .....: Tom Zou

Tom Zou

**Approved (name + signature)**.....: Lake Xie



**TABLE OF CONTENTS**

Page

<b>1.VERSION</b>	<b>4</b>
<b>2. TEST SUMMARY</b>	<b>5</b>
2.1 TEST FACILITY	6
2.2 MEASUREMENT UNCERTAINTY	6
<b>3. GENERAL INFORMATION</b>	<b>7</b>
3.1 GENERAL DESCRIPTION OF EUT	7
3.2 TEST MODE	9
3.3 TEST SETUP CONFIGURATION	9
3.4 SUPPORT EQUIPMENT	9
3.5 TEST INSTRUMENTS LIST	10
<b>4. EMC EMISSION TEST</b>	<b>11</b>
4.1 CONDUCTED EMISSIONS	11
4.2 CONDUCTED PEAK OUTPUT POWER	12
4.3 20dB EMISSION BANDWIDTH	14
4.4 CARRIER FREQUENCIES SEPARATION	16
4.5 HOPPING CHANNEL NUMBER	18
4.6 DWELL TIME	19
4.7 BAND EDGE	22
<b>5. ANTENNA REQUIREMENT</b>	<b>34</b>
<b>6. TEST SETUP PHOTO</b>	<b>35</b>
<b>7. EUT CONSTRUCTIONAL DETAILS</b>	<b>35</b>



**1.Version**

Report No.	Version	Description	Approved
ZKT-2203011243E	Rev.01	Initial issue of report	May 28, 2022



## 2. Test Summary

Test Item	Section in CFR 47	Result
Antenna Requirement	15.203/15.247 (c)	Pass
AC Power Line Conducted Emission	15.207	N/A
Conducted Peak Output Power	15.247 (b)(1)	Pass
20dB Occupied Bandwidth	15.247 (a)(1)	Pass
Carrier Frequencies Separation	15.247 (a)(1)	Pass
Hopping Channel Number	15.247 (a)(1)	Pass
Dwell Time	15.247 (a)(1)	Pass
Emissions in non-restricted frequency bands	15.247(b)(4)	Pass
Radiated Emission	15.205/15.209	Pass
Band Edge	15.247(d)	Pass

NOTE:

(1)" N/A" denotes test is not applicable in this Test Report



## 2.1 TEST FACILITY

Shenzhen ZKT Technology Co., Ltd.

Add. : 1/F, No. 101, Building B, No. 6, Tangwei Community Industrial Avenue, Fuhai Street,  
Bao'an District, Shenzhen, China

FCC Test Firm Registration Number: 692225

Designation Number: CN1299

IC Registered No.: 27033

## 2.2 MEASUREMENT UNCERTAINTY

The reported uncertainty of measurement  $y \pm U$ , where expanded uncertainty  $U$  is based on a standard uncertainty multiplied by a coverage factor of  $k=2$ , providing a level of confidence of approximately 95 %.

No.	Item	Uncertainty
1	3m chamber Radiated spurious emission(9KHz-30MHz)	U=4.5dB
2	3m chamber Radiated spurious emission(30MHz-1GHz)	U=4.8dB
3	3m chamber Radiated spurious emission(1GHz-6GHz)	U=4.9dB
4	3m chamber Radiated spurious emission(6GHz-40GHz)	U=5.0dB
5	Conducted disturbance	U=3.2dB
6	RF Band Edge	U=1.68dB
7	RF power conducted	U=1.86dB
8	RF conducted Spurious Emission	U=2.2dB
9	RF Occupied Bandwidth	U=1.8dB
10	RF Power Spectral Density	U=1.75dB
11	humidity uncertainty	U=5.3%
12	Temperature uncertainty	U=0.59℃



### 3. General Information

#### 3.1 General Description of EUT

Product Name:	LoRaWAN Temperature & Humidity Sensor
Model No.:	LHT52
Test sample(s) ID:	ZKT-2203011243-1
Sample(s) Status:	Engineer sample
Serial No.:	N/A
Hardware Version:	N/A
Software Version:	N/A
Operation Frequency:	902.3MHz~914.9MHz
Channel numbers:	64 for 125KHz bandwidth
Channel separation:	200KHz for 125KHz bandwidth
Modulation type:	Lora
Antenna Type:	Internal antenna
Antenna gain:	2dBi
Power supply:	Input: DC 3 by Battery



125KHz for FHSS:

Operation Frequency each of channel							
Channel	Frequency (MHz)	Channel	Frequency (MHz)	Channel	Frequency (MHz)	Channel	Frequency (MHz)
1	902.3	21	906.3	41	910.3	61	914.3
2	902.5	22	906.5	42	910.5	62	914.5
3	902.7	23	906.7	43	910.7	63	914.7
4	902.9	24	906.9	44	910.9	64	914.9
.	.	.	.	.	.	.	.
.	.	32	908.5	.	.	.	.
.	.	.	.	.	.	.	.
17	905.5	37	909.5	57	913.5	.	.
18	905.7	38	909.7	58	913.7	.	.
19	905.9	39	909.9	59	913.9	.	.
20	906.1	40	910.1	60	914.1	.	.

Note:

In section 15.31(m), regards to the operating frequency range over 10 MHz, the Lowest frequency, the middle frequency, and the highest frequency of channel were selected to perform the test, and the selected channel see below:

Channel	Frequency(125KHz)
The lowest channel	902.30MHz
The middle channel	908.50MHz
The Highest channel	914.90MHz





### 3.2 Test mode

Transmitting mode	Keep the EUT in continuously transmitting mode.
<i>Remark: During the test, the test voltage was tuned from 85% to 115% of the nominal rated supply voltage, and found that the worst case was under the nominal rated supply condition. So the report just shows that condition's data.</i>	

### 3.3 Test Setup Configuration

#### Conducted Emission

EUT

#### Radiated Emission

EUT

#### Conducted Spurious

EUT

### 3.4 Support Equipment

The EUT has been tested as an independent unit together with other necessary accessories or support units. The following support units or accessories were used to form a representative test configuration during the tests.

Item	Equipment	Mfr/Brand	Model/Type No.	Series No.	Note
E-1	LoRaWAN Temperature & Humidity Sensor	DRAGINO	LHT52	N/A	EUT

Item	Shielded Type	Ferrite Core	Length	Note

#### Note:

- (1) The support equipment was authorized by Declaration of Confirmation.
- (2) For detachable type I/O cable should be specified the length in cm in 『Length』 column.



## 3.5 Test Instruments list

## Radiation Test equipment

Item	Equipment	Manufacturer	Type No.	Serial No.	Last calibration	Calibrated until
1	Spectrum Analyzer (9kHz-26.5GHz)	KEYSIGHT	9020A	MY45109572	Sep. 22, 2021	Sep. 21, 2022
2	Spectrum Analyzer (1GHz-40GHz)	Agilent	E4446A	100363	Sep. 22, 2021	Sep. 21, 2022
3	Test Receiver (9kHz-7GHz)	R&S	ESCI7	101169	Sep. 22, 2021	Sep. 21, 2022
4	Bilog Antenna (30MHz-1400MHz)	Schwarzbeck	VULB9168	00877	Sep. 22, 2021	Sep. 21, 2022
5	Horn Antenna (1GHz-18GHz)	SCHWARZBEC K	BBHA9120D	1541	Sep. 22, 2021	Sep. 21, 2022
6	Horn Antenna (18GHz-40GHz)	A.H. System	SAS-574	588	Sep. 22, 2021	Sep. 21, 2022
7	Amplifier (30-1000MHz)	EM Electronics	EM330 Amplifier	N/A	Sep. 22, 2021	Sep. 21, 2022
8	Amplifier (1GHz-40GHz)	全聚达	DLE-161	097	Sep. 22, 2021	Sep. 21, 2022
9	Loop Antenna (9KHz-30MHz)	SCHWARZBEC K	FMZB1519B	014	Sep. 22, 2021	Sep. 21, 2022
10	RF cables1 (9kHz-30MHz)	N/A	9kHz-30MHz	N/A	Sep. 22, 2021	Sep. 21, 2022
11	RF cables2 (30MHz-1GHz)	N/A	30MHz-1GHz	N/A	Sep. 22, 2021	Sep. 21, 2022
12	RF cables3 (1GHz-40GHz)	N/A	1GHz-40GHz	N/A	Sep. 22, 2021	Sep. 21, 2022
13	CMW500 Test	R&S	CMW500	106504	Sep. 22, 2021	Sep. 21, 2022
14	ESG Signal Generator	Agilent	E4421B	GB40051203	Sep. 22, 2021	Sep. 21, 2022
15	Signal Generator	Agilent	N5182A	MY47420215	Sep. 22, 2021	Sep. 21, 2022
16	D.C. Power Supply	LongWei	TPR-6405D	\	\	\
17	Software	Frad	EZ-EMC	FA-03A2 RE	\	\


## Conduction Test equipment

Item	Kind of Equipment	Manufacturer	Type No.	Serial No.	Last calibration	Calibrated until
1	LISN	R&S	ENV216	101471	Sep. 22, 2021	Sep. 21, 2022
2	LISN	CYBERTEK	EM5040A	E1850400149	Sep. 22, 2021	Sep. 21, 2022
3	Test Cable	N/A	C01	N/A	Sep. 22, 2021	Sep. 21, 2022
4	Test Cable	N/A	C02	N/A	Sep. 22, 2021	Sep. 21, 2022
5	EMI Test Receiver	R&S	ESRP3	101946	Sep. 22, 2021	Sep. 21, 2022
6	Absorbing Clamp	DZ	ZN23201	N/A	Sep. 22, 2021	Sep. 21, 2022




#### 4. EMC EMISSION TEST

##### 4.1 Conducted Emissions

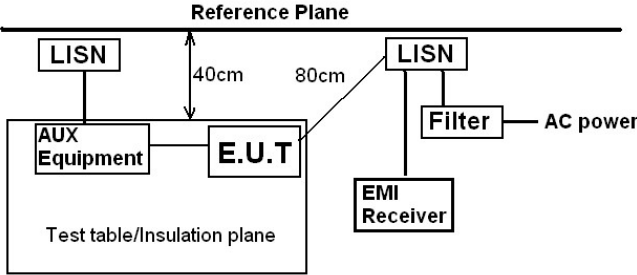Test Requirement:	FCC Part15 C Section 15.207					
Test Method:	ANSI C63.10:2013					
Test Frequency Range:	150KHz to 30MHz					
Class / Severity:	Class B					
Receiver setup:	RBW=9KHz, VBW=30KHz, Sweep time=auto					
Limit:	Frequency range (MHz)		Limit (dBuV)			
			Quasi-peak		Average	
	0.15-0.5		66 to 56*		56 to 46*	
	0.5-5		56		46	
	5-30		60		50	
* Decreases with the logarithm of the frequency.						
Test setup:	<div><p>Reference Plane</p><p>Remark: E.U.T: Equipment Under Test LISN: Line Impedance Stabilization Network Test table height=0.8m</p></div>					
Test procedure:	<div><ol style="list-style-type: none"><li>1. The E.U.T and simulators are connected to the main power through a line impedance stabilization network (L.I.S.N.). This provides a 50ohm/50uH coupling impedance for the measuring equipment.</li><li>2. The peripheral devices are also connected to the main power through a LISN that provides a 50ohm/50uH coupling impedance with 50ohm termination. (Please refer to the block diagram of the test setup and photographs).</li><li>3. Both sides of A.C. line are checked for maximum conducted interference. In order to find the maximum emission, the relative positions of equipment and all of the interface cables must be changed according to ANSI C63.10:2013 on conducted measurement.</li></ol></div>					
Test Instruments:	Refer to section 6.0 for details					
Test mode:	Refer to section 5.2 for details					
Test environment:	Temp.:	25 °C	Humid.:	52%	Press.:	1012mbar
Test voltage:	DC 3V					
Test results:	N/A					



#### 4.2 Conducted Peak Output Power

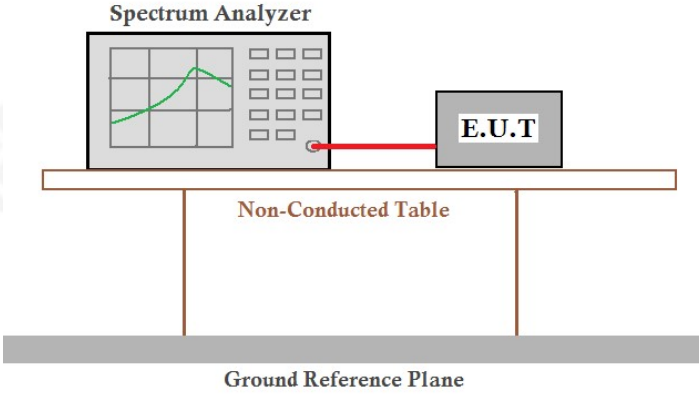Test Requirement:	FCC Part15 C Section 15.247 (b)(3)
Test Method:	ANSI C63.10:2013
Limit:	30dBm
Test setup:	
Test Instruments:	Refer to section 6.0 for details
Test mode:	Refer to section 5.2 for details
Test results:	Pass

#### Measurement Data


Mode	Test channel	Peak Output Power (dBm)	Limit (dBm)	Result
125KHz Bandwidth	Lowest	16.020	30.00	Pass
	Middle	15.810		
	Highest	15.600		




Test plot as follows:

Test mode:


125KHz Bandwidth

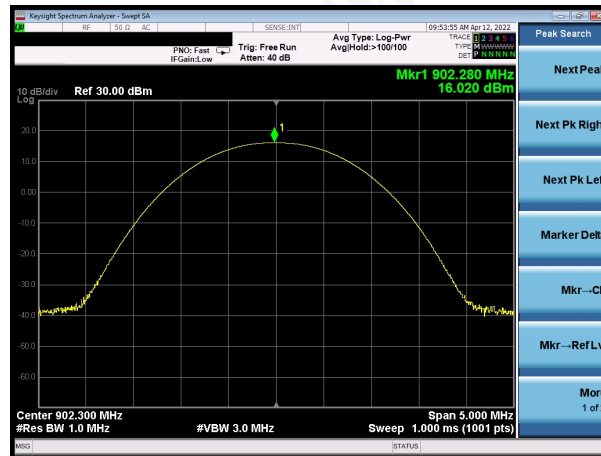

Lowest channel

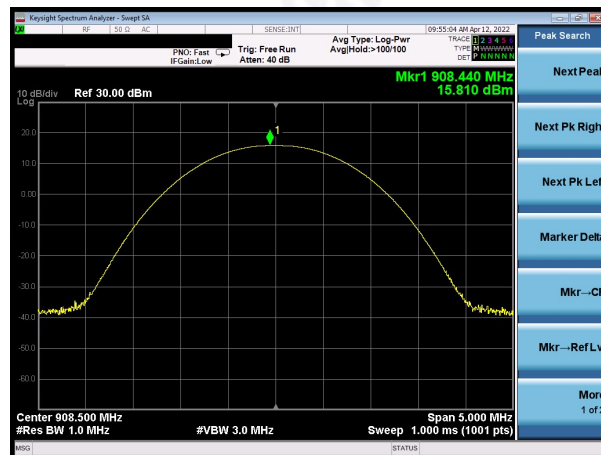


Middle channel

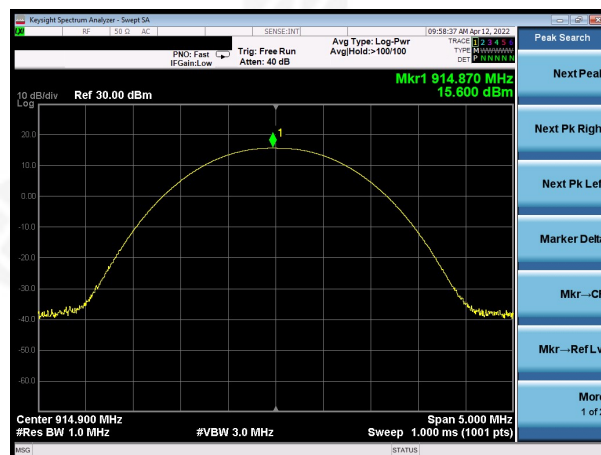

Highest channel



#### 4.3 20dB Emission Bandwidth

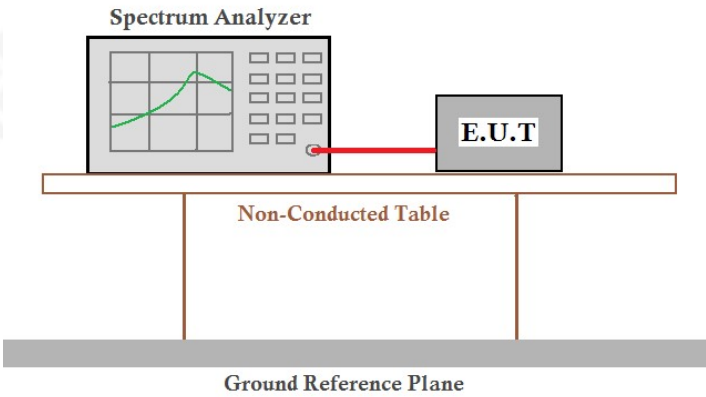Test Requirement:	FCC Part15 C Section 15.247 (a)(2)
Test Method:	ANSI C63.10:2013
Limit:	N/A
Test setup:	
Test Instruments:	Refer to section 6.0 for details
Test mode:	Refer to section 5.2 for details
Test results:	Pass

#### Measurement Data


Mode	Test channel	20dB Emission Bandwidth (KHz)	Result
125KHz Bandwidth	Lowest	138.1	Pass
	Middle	138.3	
	Highest	137.3	




Test plot as follows:

Test mode:


125KHz Bandwidth

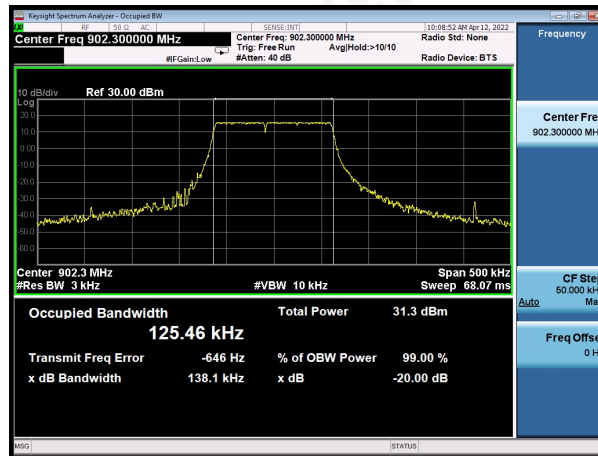

Lowest channel

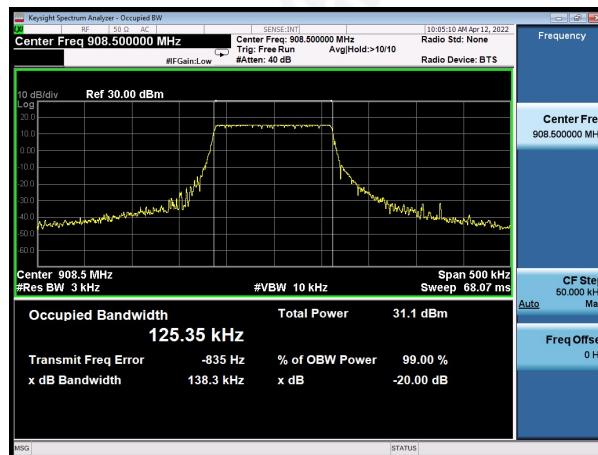

Middle channel

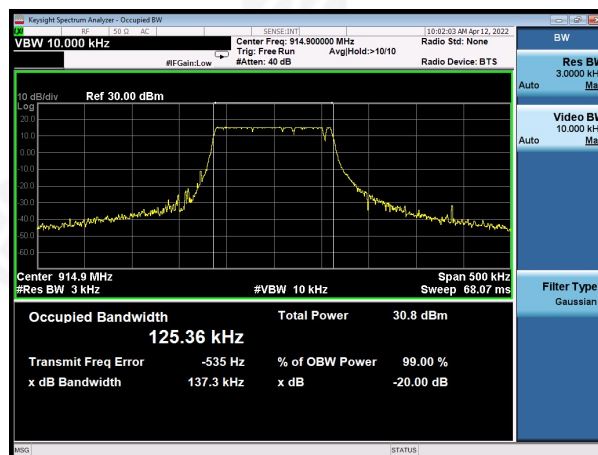


Highest channel





#### 4.4 Carrier Frequencies Separation

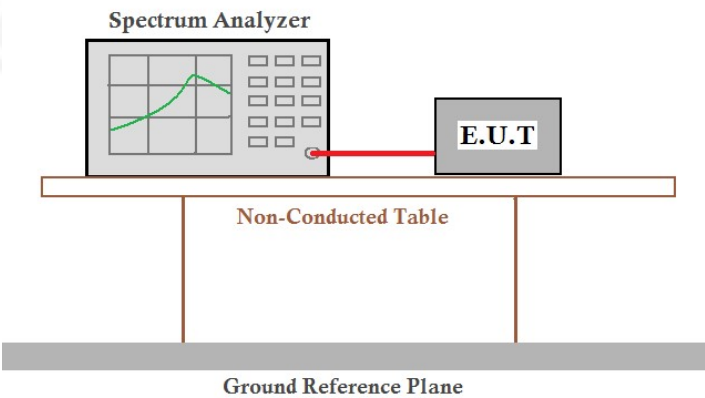Test Requirement:	FCC Part15 C Section 15.247 (a)(1)
Test Method:	ANSI C63.10:2013
Receiver setup:	RBW=100KHz, VBW=300KHz, detector=Peak
Limit:	Frequency hopping systems shall have hopping channel carrier frequencies separated by a minimum of 25 kHz or the 20 dB bandwidth of the hopping channel
Test setup:	
Test Instruments:	Refer to section 6.0 for details
Test mode:	Refer to section 5.2 for details
Test results:	Pass

#### Measurement Data


Mode	Test channel	Carrier Frequencies Separation (kHz)	Limit (kHz)	Result
125KHz Bandwidth	Lowest	200.4	25KHz or 20dB Bandwidth	Pass
	Middle	200.4		Pass
	Highest	200.4		Pass






Test plot as follows:


Modulation mode:	125KHz Bandwidth
------------------	------------------

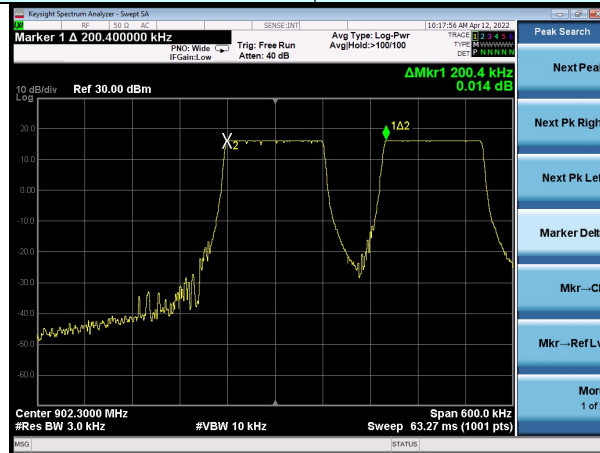

Lowest channel

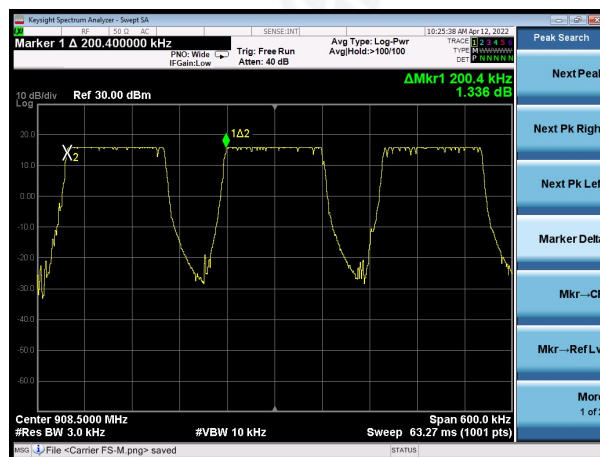


Middle channel

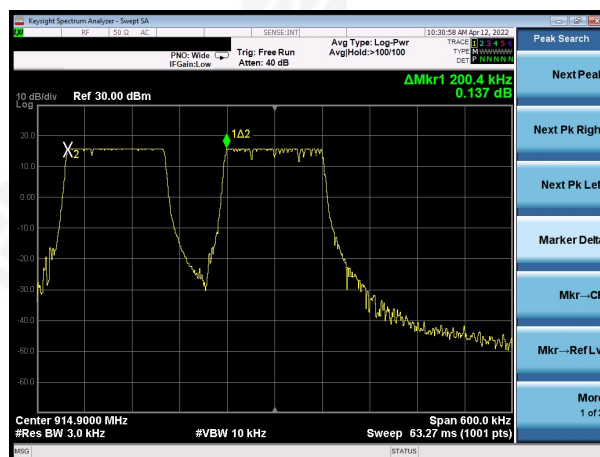

Highest channel




#### 4.5 Hopping Channel Number

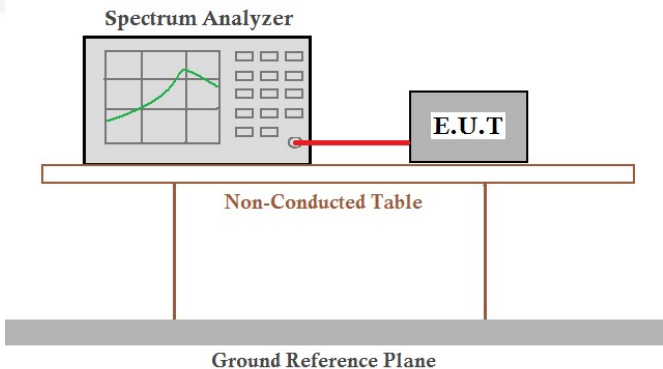Test Requirement:	FCC Part15 C Section 15.247 (a)(1)
Test Method:	ANSI C63.10:2013
Receiver setup:	RBW=100kHz, VBW=300kHz, Frequency range=902-916MHz, Detector=Peak
Limit:	If the 20 dB bandwidth of the hopping channel is less than 250 kHz, the system shall use at least 50 hopping frequencies. If the 20 dB bandwidth of the hopping channel is 250 kHz or greater, the system shall use at least 25 hopping frequencies
Test setup:	
Test Instruments:	Refer to section 6.0 for details
Test mode:	Refer to section 5.2 for details
Test results:	Pass


#### Measurement Data:

Mode	Hopping channel numbers	Limit	Result
125KHz Bandwidth	64	50	Pass

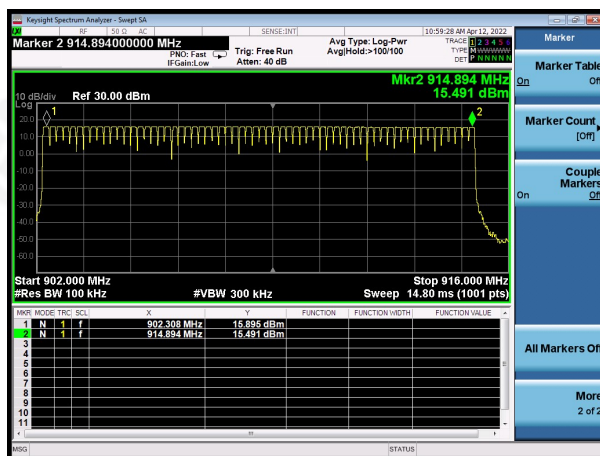



#### 4.6 Dwell Time

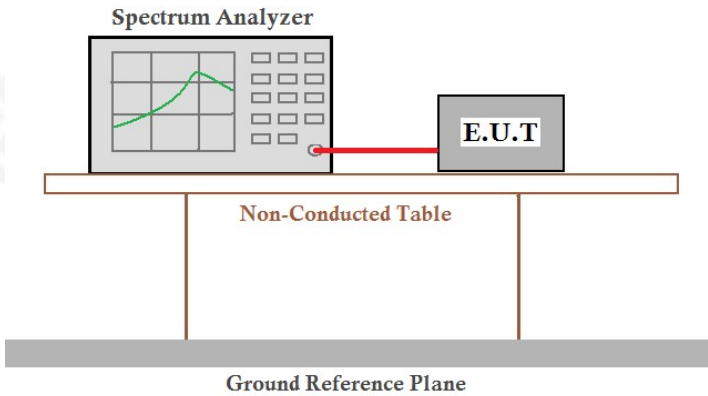Test Requirement:	FCC Part15 C Section 15.247 (a)(1)
Test Method:	ANSI C63.10:2013
Receiver setup:	RBW=10kHz, VBW=30KHz, Span=0Hz, Detector=Peak
Limit:	0.4 Second
Test setup:	
Test Instruments:	Refer to section 6.0 for details
Test mode:	Refer to section 5.2 for details
Test results:	Pass



### Measurement Data

Mode	Ton(ms)	Tcycle(ms)	Dwell time(ms)	Limit(ms)	Result
125KHz Bandwidth	8.4	37.8	84.44	400	Pass

Note: Transmit numbers= Continue TX Time/Tcycle


Dwell time=Transmit numbers\*Ton




Test plot as follows:

Test Mode:

125KHz Bandwidth

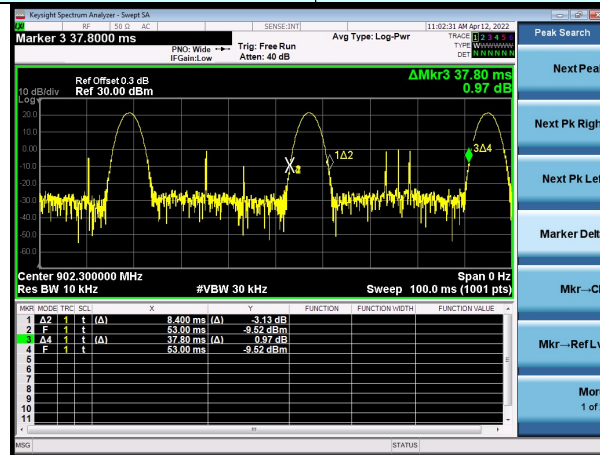


Ton&Tcycle

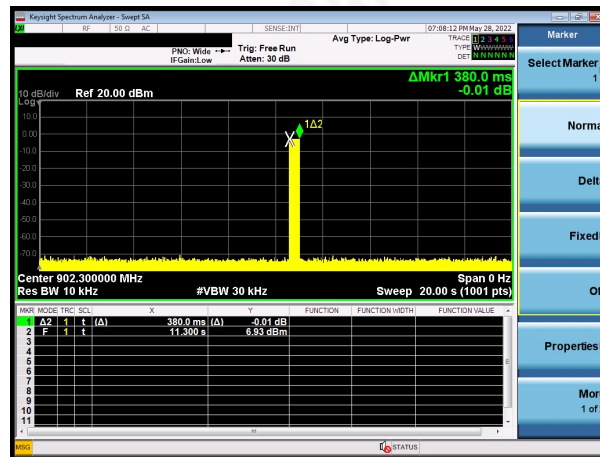

Continue TX Time



#### 4.7 Band Edge

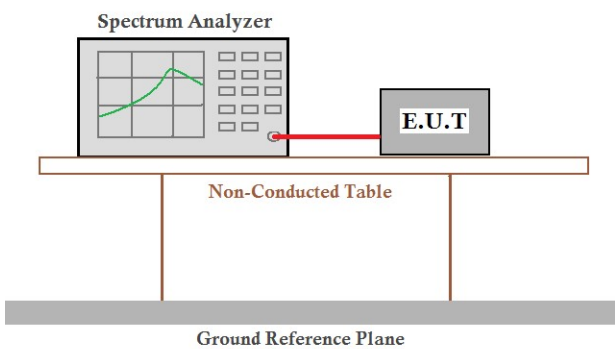
Test Requirement:	FCC Part15 C Section 15.247 (d)
Test Method:	ANSI C63.10:2013
Receiver setup:	RBW=100kHz, VBW=300kHz, Detector=Peak
Limit:	In any 100 kHz bandwidth outside the frequency band in which the spread spectrum intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement.
Test setup:	
Test Instruments:	Refer to section 6.0 for details
Test mode:	Refer to section 5.2 for details
Test results:	Pass




Test plot as follows:  
125KHz Bandwidth:

Test channel:

Lowest channel

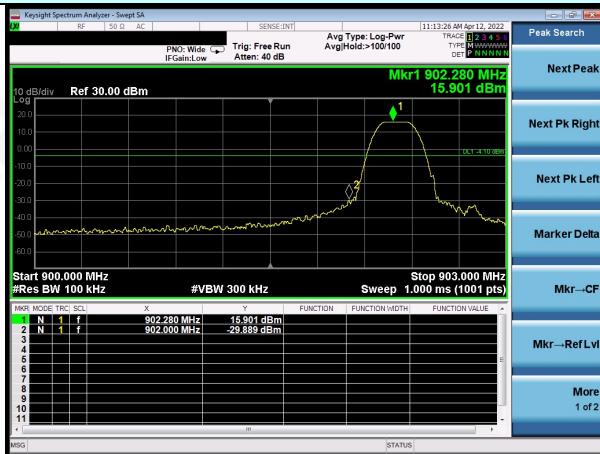


No-hopping mode

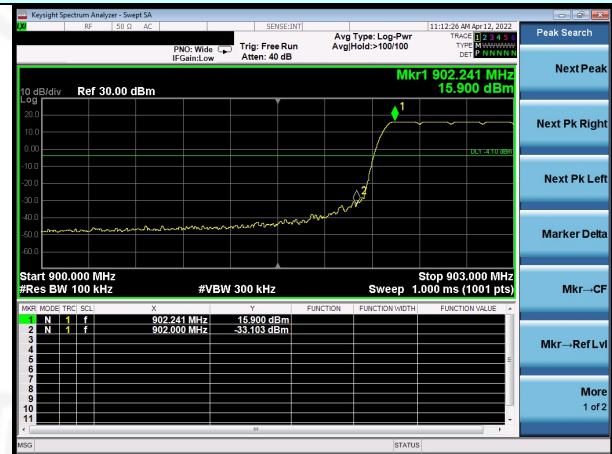


Hopping mode

Test channel:

Highest channel

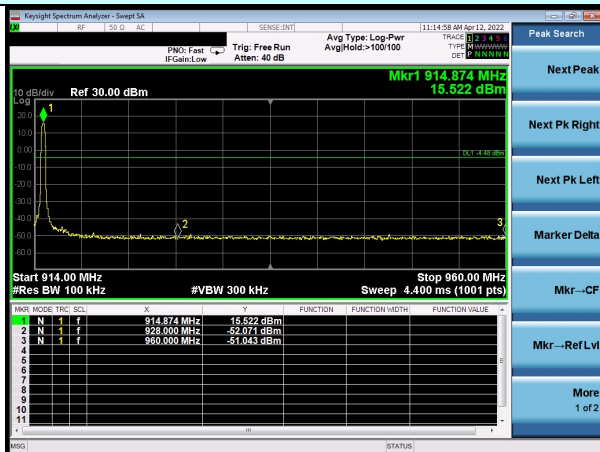

No-hopping mode

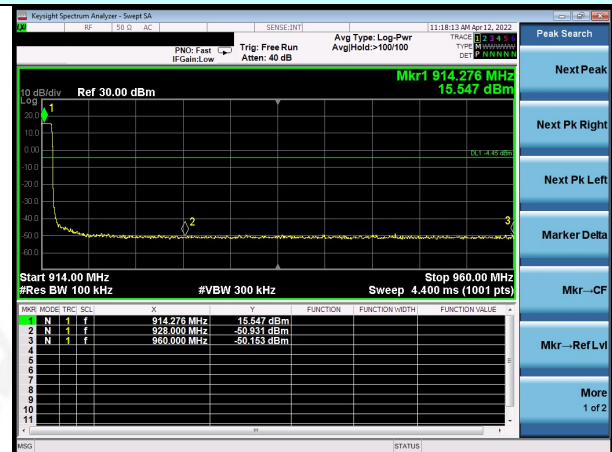


Hopping mode





#### 4.8 Spurious Emission

##### Conducted Emission Method

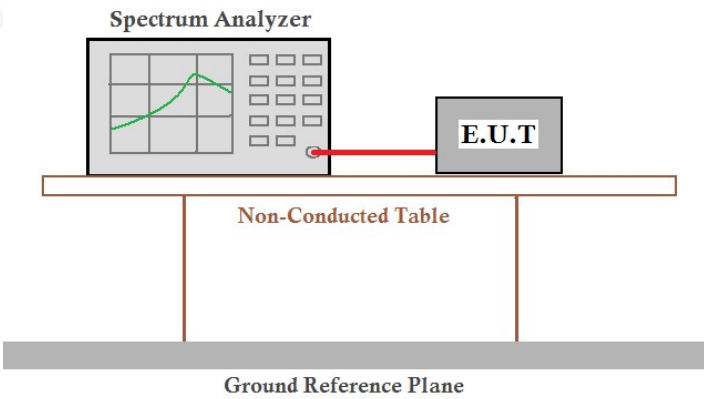
Test Requirement:	FCC Part15 C Section 15.247 (d)
Test Method:	ANSI C63.10:2013
Limit:	In any 100 kHz bandwidth outside the frequency band in which the spread spectrum intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement.
Test setup:	
Test Instruments:	Refer to section 6.0 for details
Test mode:	Refer to section 5.2 for details
Test results:	Pass






### 125KHz Bandwidth:

Test channel:	Lowest channel
---------------	----------------

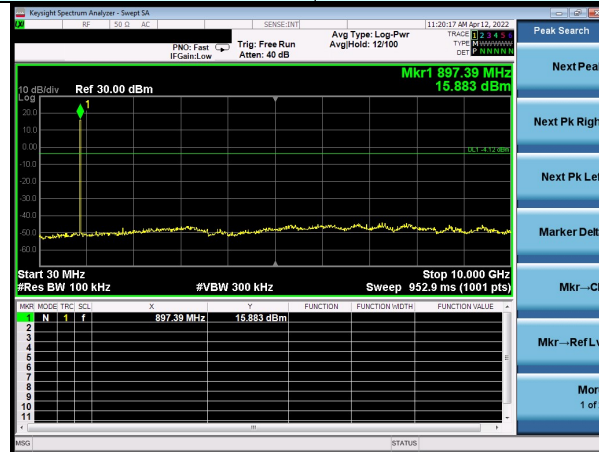


30MHz~10GHz

Test channel:	Middle channel
---------------	----------------

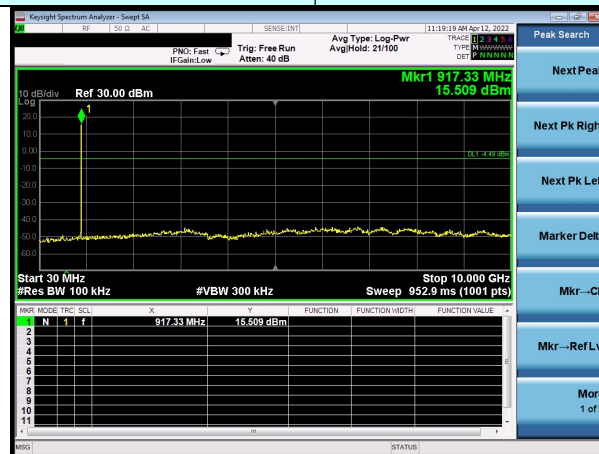

30MHz~10GHz


Test channel:	Highest channel
---------------	-----------------

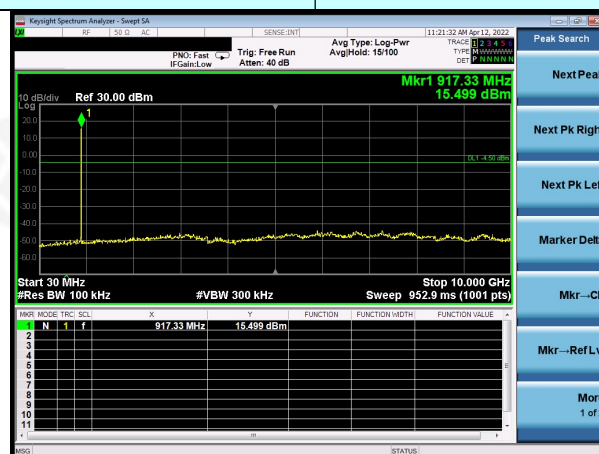



30MHz~10GHz



### Radiated Emission Method

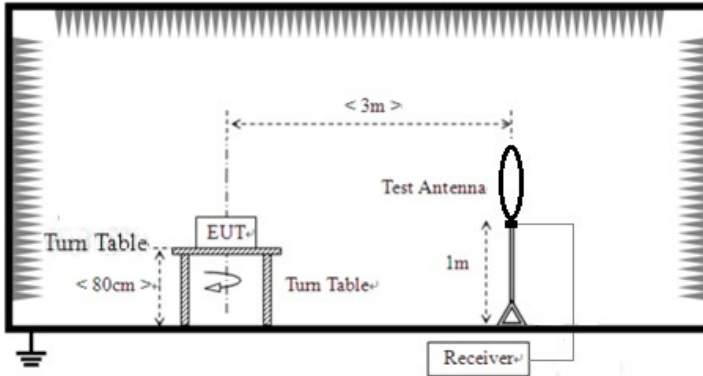Test Requirement:	FCC Part15 C Section 15.209				
Test Method:	ANSI C63.10:2013				
Test Frequency Range:	9kHz to 25GHz				
Test site:	Measurement Distance: 3m				
Receiver setup:	Frequency	Detector	RBW	VBW	Value
	9KHz-150KHz	Quasi-peak	200Hz	600Hz	Quasi-peak
	150KHz-30MHz	Quasi-peak	9KHz	30KHz	Quasi-peak
	30MHz-1GHz	Quasi-peak	120KHz	300KHz	Quasi-peak
	Above 1GHz	Peak	1MHz	3MHz	Peak
		Peak	1MHz	10Hz	Average
Limit:	Frequency	Limit (uV/m)		Value	Measurement Distance
	0.009MHz-0.490MHz	2400/F(KHz)		QP	300m
	0.490MHz-1.705MHz	24000/F(KHz)		QP	30m
	1.705MHz-30MHz	30		QP	30m
	30MHz-88MHz	100		QP	3m
	88MHz-216MHz	150		QP	
	216MHz-960MHz	200		QP	
	960MHz-1GHz	500		QP	
	Above 1GHz	500		Average	
		5000		Peak	
Test setup:	For radiated emissions from 9kHz to 30MHz				
					

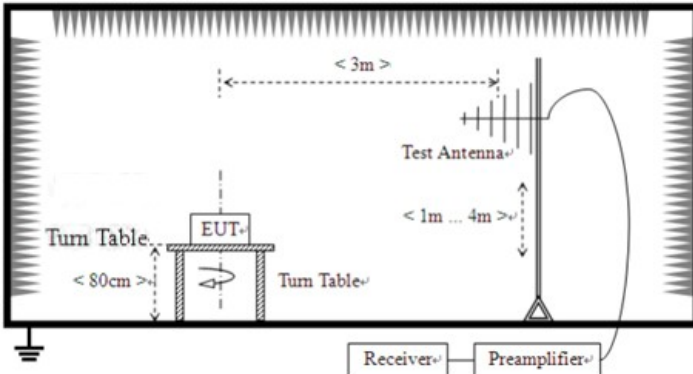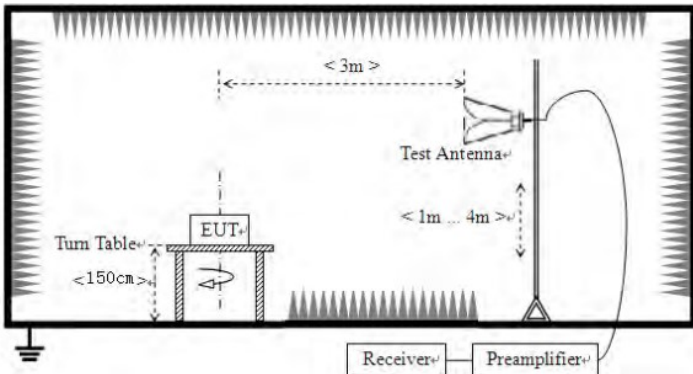

	<p>For radiated emissions from 30MHz to1GHz</p> 					
	<p>For radiated emissions above 1GHz</p> 					
Test Procedure:	<ol style="list-style-type: none"><li>1. The EUT was placed on the top of a rotating table (0.8m for below 1G and 1.5m for above 1G) above the ground at a 3 meter camber. The table was rotated 360 degrees to determine the position of the highest radiation.</li><li>2. The EUT was set 3 meters away from the interference-receiving antenna, which was mounted on the top of a variable-height antenna tower.</li><li>3. The antenna height is varied from one meter to four meters above the ground to determine the maximum value of the field strength. Both horizontal and vertical polarizations of the antenna are set to make the measurement.</li><li>4. For each suspected emission, the EUT was arranged to its worst case and then the antenna was tuned to heights from 1 meter to 4 meters and the rota table was turned from 0 degrees to 360 degrees to find the maximum reading.</li><li>5. The test-receiver system was set to Peak Detect Function and Specified Bandwidth with Maximum Hold Mode.</li><li>6. If the emission level of the EUT in peak mode was 10dB lower than the limit specified, then testing could be stopped and the peak values of the EUT would be reported. Otherwise the emissions that did not have 10dB margin would be re-tested one by one using peak, quasi-peak or average method as specified and then reported in a data sheet.</li></ol>					
Test Instruments:	Refer to section 6.0 for details					
Test mode:	Refer to section 5.2 for details					
Test environment:	Temp.:	25 °C	Humid.:	52%	Press.:	1012mbar
Test voltage:	DC 3V					
Test results:	Pass					



**Measurement data:**

*Remarks:*

1. Pre-scan all kind of the place mode (X-axis, Y-axis, Z-axis), and found the Y-axis which it is worse case.

■ **9kHz~30MHz**


The low frequency, which started from 9 kHz to 30 MHz, was pre-scanned and the result which was 20 dB lower than the limit line per 15.31(o) was not reported.



## ■ Below 1GHz

Pre-scan all test modes, found worst case at lowest channel of 125KHz bandwidth, so only show the worst case on the report.


### Horizontal:

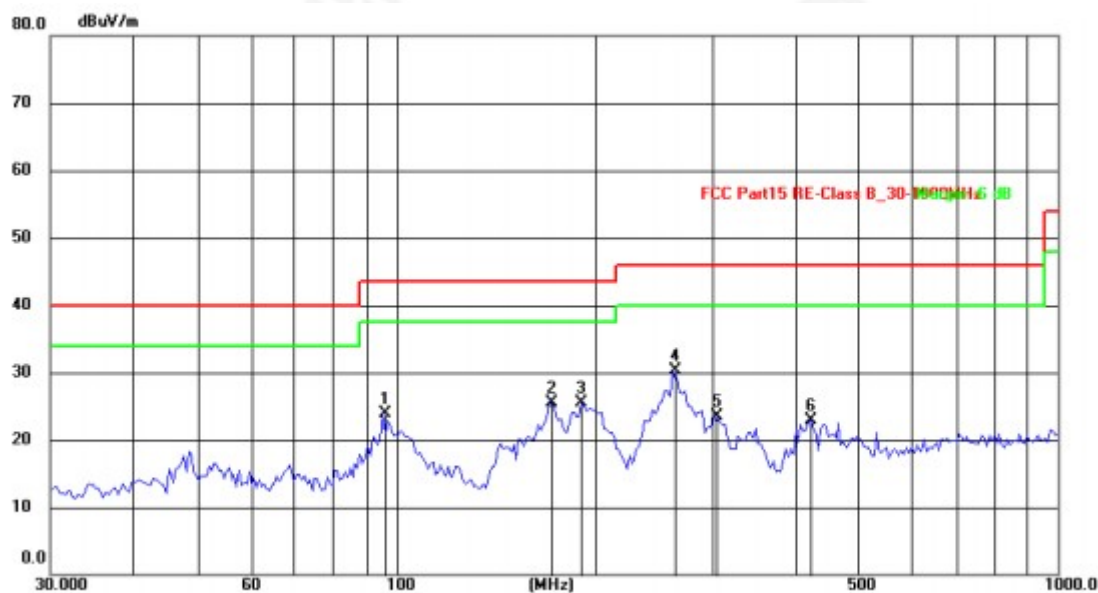

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector
1	95.4270	43.88	-19.99	23.89	43.50	-19.61	QP
2	171.6933	43.35	-17.87	25.48	43.50	-18.02	QP
3	190.7390	44.78	-19.27	25.51	43.50	-17.99	QP
4	261.5164	47.33	-17.08	30.25	46.00	-15.75	QP
5	306.2163	42.46	-18.96	23.50	46.00	-22.50	QP
6	423.5402	40.27	-17.41	22.86	46.00	-23.14	QP



Vertical:

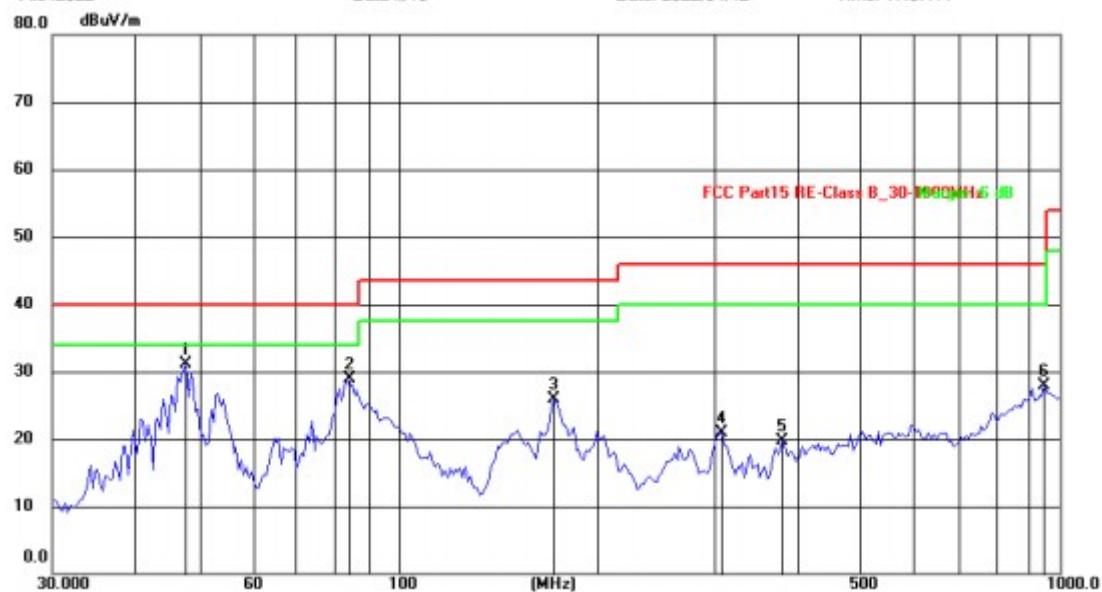

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector
1	47.7422	48.34	-17.20	31.14	40.00	-8.86	QP
2	83.6688	50.58	-21.73	28.85	40.00	-11.15	QP
3	171.6933	46.55	-20.70	25.85	43.50	-17.65	QP
4	308.9125	40.95	-20.04	20.91	46.00	-25.09	QP
5	381.2485	37.35	-17.65	19.70	46.00	-26.30	QP
6	948.7609	30.29	-2.48	27.81	46.00	-18.19	QP





## ■ Above 1GHz

Test channel:	Lowest channel
---------------	----------------

## Peak value:

Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	polarization
1804.60	41.75	25.35	4.67	34.04	37.73	74.00	-36.27	Vertical
2706.90	34.49	28.26	5.43	33.25	34.93	74.00	-39.07	Vertical
3609.20	33.17	29.18	7.11	37.34	32.12	74.00	-41.88	Vertical
4511.50	*					74.00		Vertical
5413.80	*					74.00		Vertical
6316.10	*					74.00		Vertical
1804.60	39.87	25.35	4.67	34.04	35.85	74.00	-38.15	Horizontal
2706.90	34.66	28.26	5.43	33.25	35.1	74.00	-38.9	Horizontal
3609.20	32.76	29.18	7.11	37.34	31.71	74.00	-42.29	Horizontal
4511.50	*					74.00		Horizontal
5413.80	*					74.00		Horizontal
6316.10	*					74.00		Horizontal

## Average value:

Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	polarization
1804.60	30.72	25.35	4.67	34.04	26.7	54.00	-27.3	Vertical
2706.90	23.18	28.26	5.43	33.25	23.62	54.00	-30.38	Vertical
3609.20	24.61	29.18	7.11	37.34	23.56	54.00	-30.44	Vertical
4511.50	*					54.00		Vertical
5413.80	*					54.00		Vertical
6316.10	*					54.00		Vertical
1804.60	29.13	25.35	4.67	34.04	25.11	54.00	-28.89	Horizontal
2706.90	23.78	28.26	5.43	33.25	24.22	54.00	-29.78	Horizontal
3609.20	22.25	29.18	7.11	37.34	21.2	54.00	-32.8	Horizontal
4511.50	*					54.00		Horizontal
5413.80	*					54.00		Horizontal
6316.10	*					54.00		Horizontal



Test channel:

Middle channel

**Peak value:**

Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	polarization
1830.20	40.12	25.43	4.89	34.12	36.32	74.00	-37.68	Vertical
2745.30	37.12	28.34	5.68	33.57	37.57	74.00	-36.43	Vertical
3660.40	34.37	29.42	7.29	37.66	33.42	74.00	-40.58	Vertical
4575.50	*					74.00		Vertical
5490.60	*					74.00		Vertical
6405.70	*					74.00		Vertical
1830.20	40.36	25.43	4.89	34.12	36.56	74.00	-37.44	Horizontal
2745.30	33.59	28.34	5.68	33.57	34.04	74.00	-39.96	Horizontal
3660.40	33.11	29.42	7.29	37.66	32.16	74.00	-41.84	Horizontal
4575.50	*					74.00		Horizontal
5490.60	*					74.00		Horizontal
6405.70	*					74.00		Horizontal

**Average value:**

Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	polarization
1830.20	31.07	25.43	4.89	34.12	27.27	54.00	-26.73	Vertical
2745.30	23.23	28.34	5.68	33.57	23.68	54.00	-30.32	Vertical
3660.40	23.89	29.42	7.29	37.66	22.94	54.00	-31.06	Vertical
4575.50	*					54.00		Vertical
5490.60	*					54.00		Vertical
6405.70	*					54.00		Vertical
1830.20	30.47	25.43	4.89	34.12	26.67	54.00	-27.33	Horizontal
2745.30	23.43	28.34	5.68	33.57	23.88	54.00	-30.12	Horizontal
3660.40	23.17	29.42	7.29	37.66	22.22	54.00	-31.78	Horizontal
4575.50	*					54.00		Horizontal
5490.60	*					54.00		Horizontal
6405.70	*					54.00		Horizontal





Test channel:	Highest channel
---------------	-----------------

**Peak value:**

Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	polarization
1855.40	45.91	25.64	4.75	34.67	41.63	74.00	-32.37	Vertical
2783.10	35.78	28.46	5.87	33.83	36.28	74.00	-37.72	Vertical
3710.80	38.34	29.75	7.59	37.76	37.92	74.00	-36.08	Vertical
4638.50	*					74.00		Vertical
5566.20	*					74.00		Vertical
6493.90	*					74.00		Vertical
1855.40	45.26	25.64	4.75	34.67	40.98	74.00	-33.02	Horizontal
2783.10	34.89	28.46	5.87	33.83	35.39	74.00	-38.61	Horizontal
3710.80	33.97	29.75	7.59	37.76	33.55	74.00	-40.45	Horizontal
4638.50	*					74.00		Horizontal
5566.20	*					74.00		Horizontal
6493.90	*					74.00		Horizontal

**Average value:**

Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	polarization
1855.40	36.47	25.64	4.75	34.67	32.19	54.00	-21.81	Vertical
2783.10	25.96	28.46	5.87	33.83	26.46	54.00	-27.54	Vertical
3710.80	26.53	29.75	7.59	37.76	26.11	54.00	-27.89	Vertical
4638.50	*					54.00		Vertical
5566.20	*					54.00		Vertical
6493.90	*					54.00		Vertical
1855.40	35.55	25.64	4.75	34.67	31.27	54.00	-22.73	Horizontal
2783.10	24.52	28.46	5.87	33.83	25.02	54.00	-28.98	Horizontal
3710.80	22.76	29.75	7.59	37.76	22.34	54.00	-31.66	Horizontal
4638.50	*					54.00		Horizontal
5566.20	*					54.00		Horizontal
6493.90	*					54.00		Horizontal

**Remarks:**

1. Final Level = Receiver Read level + Antenna Factor + Cable Loss – Preamplifier Factor
2. “\*” means this data is too weak instrument of signal is unable to test.
3. The emission levels of other frequencies are very lower than the limit and not show in test report.
4. The test data shows only the worst case 125KHz bandwidth mode.



## 5. Antenna Requirement

Standard requirement:	FCC Part15 C Section 15.203 /247(c)
<p>15.203 requirement:</p> <p>An intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator, the manufacturer may design the unit so that a broken antenna can be replaced by the user, but the use of a standard antenna jack or electrical connector is prohibited.</p> <p>15.247(c) (1)(i) requirement:</p> <p>(i) Systems operating in the 2400-2483.5 MHz band that is used exclusively for fixed. Point-to-point operations may employ transmitting antennas with directional gain greater than 6dBi provided the maximum conducted output power of the intentional radiator is reduced by 1 dB for every 3 dB that the directional gain of the antenna exceeds 6dBi.</p>	
EUT Antenna:	
The antenna is Internal antenna, the best case gain of the antennas is 2dBi, reference to the appendix II for details	



## 6. Test Setup Photo

Reference to the appendix I for details.

## 7. EUT Constructional Details

Reference to the appendix II for details.

\*\*\*\*\* END OF REPORT \*\*\*\*\*