

TEST REPORT

Applicant: Augury systems Ltd.

Address of Applicant: Haazmaut 39, Haifa 3303320, Israel

Manufacturer/Factory: Augury systems Ltd.

Address of Manufacturer/Factory: Haazmaut 39, Haifa 3303320, Israel

Equipment Under Test (EUT)

Product Name: Halo R4000

Model No.: AA00004-XXX-YYY

Trade Mark: Augury

FCC ID: 2A3XG-R4000

Applicable standards: FCC CFR Title 47 Part 15 Subpart C Section 15.225

Date of sample receipt: March 30, 2022

Date of Test: March 31, 2022-May 10, 2022

Date of report issued: May 10, 2022

Test Result : PASS

* In the configuration tested, the EUT complied with the standards specified above.

Authorized Signature:



Robinson Luo

Laboratory Manager

This results shown in this test report refer only to the sample(s) tested, this test report cannot be reproduced, except in full, without prior written permission of the company. The report would be invalid without specific stamp of test institute and the signatures of compiler and approver.

NVLAP®
TESTING
NVLAP LAB CODE 600179-0

2 Version

Version No.	Date	Description
00	May 10, 2022	Original

Prepared By:

Tiger Chen

Date:

May 10, 2022

Project Engineer

Check By:

Robinson Luu

Date:

May 10, 2022

Reviewer

3 Contents

	Page
1 COVER PAGE	1
2 VERSION	2
3 CONTENTS	3
4 TEST SUMMARY	4
4.1 MEASUREMENT UNCERTAINTY	4
5 GENERAL INFORMATION	5
5.1 GENERAL DESCRIPTION OF EUT	5
5.2 TEST MODE	6
5.3 TEST FACILITY	6
5.4 TEST LOCATION.....	6
5.5 DESCRIPTION OF SUPPORT UNITS	6
6 TEST INSTRUMENTS LIST	7
7 TEST RESULTS AND MEASUREMENT DATA.....	9
7.1 ANTENNA REQUIREMENT:	9
7.2 FIELD STRENGTH OF FUNDAMENTAL EMISSIONS AND MASK MEASUREMENT	10
7.3 RADIATED EMISSION	11
7.4 CHANNEL BANDWIDTH AND 99% OCCUPIED BANDWIDTH	16
7.5 FREQUENCY STABILITY MEASUREMENT	18
8 TEST SETUP PHOTO	20
9 EUT CONSTRUCTIONAL DETAILS	20

4 Test Summary

Test Item	Section in CFR 47	Result
Antenna Requirement	15.203	Pass
AC Power Line Conducted Emission	15.207	N/A
Field Strength of Fundamental Emissions and Mask Measurement	15.225(a)(b)(c)	Pass
Radiated Emission	15.225(d)&15.209	Pass
20dB Emission Bandwidth	15.225&15.215	Pass
Frequency Stability Measurement	15.225(e)	Pass

Remark:

1. Pass: The EUT complies with the essential requirements in the standard.

4.1 Measurement Uncertainty

Test Item	Frequency Range	Measurement Uncertainty	Notes
Radiated Emission	30MHz-200MHz	3.8039dB	(1)
Radiated Emission	200MHz-1GHz	3.9679dB	(1)
Radiated Emission	1GHz-18GHz	4.29dB	(1)
AC Power Line Conducted Emission	0.15MHz ~ 30MHz	3.44dB	(1)

Note (1): The measurement uncertainty is for coverage factor of k=2 and a level of confidence of 95%.

5 General Information

5.1 General Description of EUT

Product Name:	Halo R4000
Model No.:	AA00004-XXX-YYY
Serial No.:	12022-00036
Hardware Version:	1
Software Version:	1
Test sample(s) ID:	GTS202203000350-1
Sample(s) Status	Engineered sample
Operation Frequency:	13.56MHz
Channel Number:	1
Modulation:	ASK
Antenna type:	Integral Antenna
Antenna gain:	0dBi(Declared by applicant)
Power supply:	DC 3V

5.2 Test mode

Transmitter mode	Keep the EUT in continuously transmitting.		
Pre-test mode.			
GTS has verified the construction and function in typical operation, The EUT was placed on three different polar directions; i.e. X axis, Y axis, Z axis. which was shown in this test report and defined as follows:			
Axis	X	Y	Z
Field Strength(dBuV/m)	61.54	62.70	60.14
Final Test Mode:			
According to ANSI C63.4 standards, the test results are both the “worst case” and “worst setup”: Y axis (see the test setup photo)			

5.3 Test Facility

The test facility is recognized, certified, or accredited by the following organizations: <ul style="list-style-type: none">● FCC—Registration No.: 381383 Designation Number: CN5029 Global United Technology Services Co., Ltd., Shenzhen EMC Laboratory has been registered and fully described in a report filed with the (FCC) Federal Communications Commission. The acceptance letter from the FCC is maintained in files.● IC —Registration No.: 9079A CAB identifier: CN0091 The 3m Semi-anechoic chamber of Global United Technology Services Co., Ltd. has been registered by Certification and Engineering Bureau of Industry Canada for radio equipment testing● NVLAP (LAB CODE:600179-0) Global United Technology Services Co., Ltd., is accredited by the National Voluntary Laboratory Accreditation Program (NVLAP).

5.4 Test Location

All tests were performed at:
Global United Technology Services Co., Ltd. Address: No. 123-128, Tower A, Jinyuan Business Building, No.2, Laodong Industrial Zone, Xixiang Road, Baoan District, Shenzhen, Guangdong, China 518102 Tel: 0755-27798480 Fax: 0755-27798960

5.5 Description of Support Units

None

6 Test Instruments list

Radiated Emission:						
Item	Test Equipment	Manufacturer	Model No.	Inventory No.	Cal.Date (mm-dd-yy)	Cal.Due date (mm-dd-yy)
1	3m Semi- Anechoic Chamber	ZhongYu Electron	9.2(L)*6.2(W)* 6.4(H)	GTS250	July. 02 2020	July. 01 2025
2	Control Room	ZhongYu Electron	6.2(L)*2.5(W)* 2.4(H)	GTS251	N/A	N/A
3	EMI Test Receiver	Rohde & Schwarz	ESU26	GTS203	June. 24 2021	June. 23 2022
4	BiConiLog Antenna	SCHWARZBECK MESS-ELEKTRONIK	VULB9163	GTS214	June. 24 2021	June. 23 2022
5	Double -ridged waveguide horn	SCHWARZBECK MESS-ELEKTRONIK	BBHA 9120 D	GTS208	June. 24 2021	June. 23 2022
6	Horn Antenna	ETS-LINDGREN	3160	GTS217	June. 24 2021	June. 23 2022
7	EMI Test Software	AUDIX	E3	N/A	N/A	N/A
8	Coaxial Cable	GTS	N/A	GTS213	June. 24 2021	June. 23 2022
9	Coaxial Cable	GTS	N/A	GTS211	June. 24 2021	June. 23 2022
10	Coaxial cable	GTS	N/A	GTS210	June. 24 2021	June. 23 2022
11	Coaxial Cable	GTS	N/A	GTS212	June. 24 2021	June. 23 2022
12	Amplifier(100kHz-3GHz)	HP	8347A	GTS204	June. 24 2021	June. 23 2022
13	Amplifier(2GHz-20GHz)	HP	84722A	GTS206	June. 24 2021	June. 23 2022
14	Amplifier (18-26GHz)	Rohde & Schwarz	AFS33-18002 650-30-8P-44	GTS218	June. 24 2021	June. 23 2022
15	Band filter	Amindeon	82346	GTS219	June. 24 2021	June. 23 2022
16	Power Meter	Anritsu	ML2495A	GTS540	June. 24 2021	June. 23 2022
17	Power Sensor	Anritsu	MA2411B	GTS541	June. 24 2021	June. 23 2022
18	Wideband Radio Communication Tester	Rohde & Schwarz	CMW500	GTS575	June. 24 2021	June. 23 2022
19	Splitter	Agilent	11636B	GTS237	June. 24 2021	June. 23 2022
20	Loop Antenna	ZHINAN	ZN30900A	GTS534	June. 24 2021	June. 23 2022
21	Breitband hornantenne	SCHWARZBECK	BBHA 9170	GTS579	Oct. 17 2021	Oct. 16 2022
22	Amplifier	TDK	PA-02-02	GTS574	Oct. 17 2021	Oct. 16 2022
23	Amplifier	TDK	PA-02-03	GTS576	Oct. 17 2021	Oct. 16 2022
24	PSA Series Spectrum Analyzer	Rohde & Schwarz	FSP	GTS578	June. 24 2021	June. 23 2022

RF Conducted Test:						
Item	Test Equipment	Manufacturer	Model No.	Serial No.	Cal.Date (mm-dd-yy)	Cal.Due date (mm-dd-yy)
1	MXA Signal Analyzer	Agilent	N9020A	GTS566	June. 24 2021	June. 23 2022
2	EMI Test Receiver	R&S	ESCI 7	GTS552	June. 24 2021	June. 23 2022
3	Spectrum Analyzer	Agilent	E4440A	GTS533	June. 24 2021	June. 23 2022
4	MXG vector Signal Generator	Agilent	N5182A	GTS567	June. 24 2021	June. 23 2022
5	ESG Analog Signal Generator	Agilent	E4428C	GTS568	June. 24 2021	June. 23 2022
6	USB RF Power Sensor	DARE	RPR3006W	GTS569	June. 24 2021	June. 23 2022
7	RF Switch Box	Shongyi	RFSW3003328	GTS571	June. 24 2021	June. 23 2022
8	Programmable Constant Temp & Humi Test Chamber	WEWON	WHTH-150L-40-880	GTS572	June. 24 2021	June. 23 2022

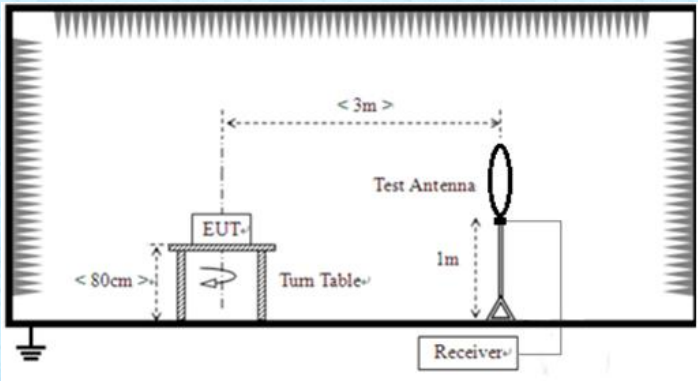
General used equipment:						
Item	Test Equipment	Manufacturer	Model No.	Inventory No.	Cal.Date (mm-dd-yy)	Cal.Due date (mm-dd-yy)
1	Humidity/ Temperature Indicator	KTJ	TA328	GTS243	June. 24 2021	June. 23 2022
2	Barometer	ChangChun	DYM3	GTS255	June. 24 2021	June. 23 2022

7 Test results and Measurement Data

7.1 Antenna requirement:

Standard requirement:	FCC Part15 C Section 15.203
15.203 requirement: An intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator, the manufacturer may design the unit so that a broken antenna can be replaced by the user, but the use of a standard antenna jack or electrical connector is prohibited.	
EUT Antenna:	
The antenna is integral antenna, reference to the appendix II for details	

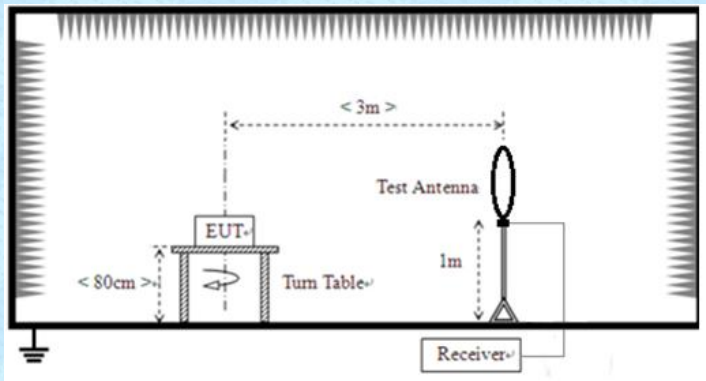
7.2 Field Strength of Fundamental Emissions and Mask Measurement

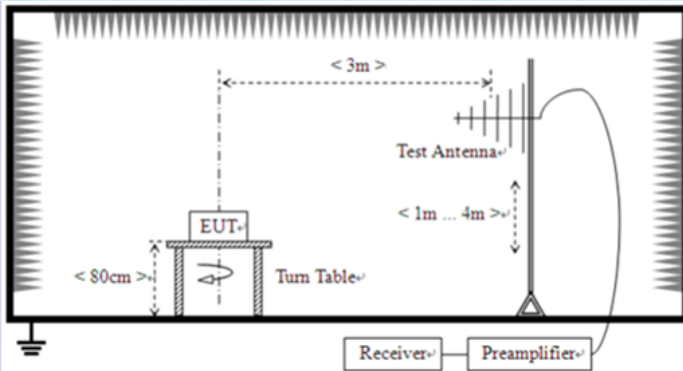
Test Requirement:	FCC Part15 C Section 15.225(a)(b)(c)
Test Method:	ANSI C63.10:2013 & ANSI C63.4: 2014
Test site:	Measurement Distance: 3m
Receiver setup:	RBW=9KHz, VBW=30KHz, Sweep time=Auto
limit:	FCC Part 15.225 & 15.209
Test setup:	
Test Instruments:	Refer to section 6.0 for details
Test mode:	Refer to section 5.2 for details
Test results:	Pass

Measurement data:

Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	Remark
13.56	39.33	22.86	0.51	62.70	124	-61.3	QP

7.3 Radiated Emission

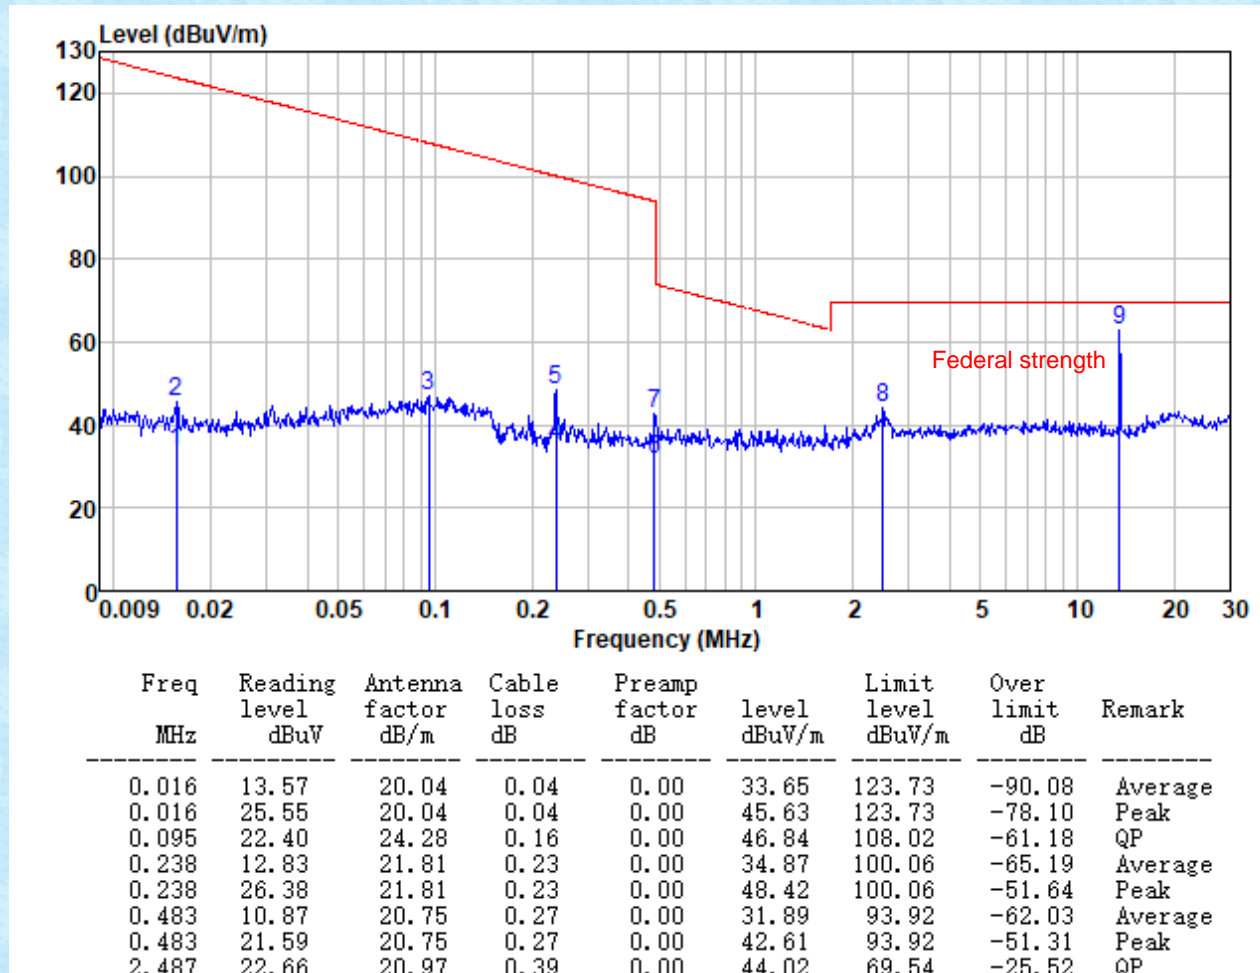
Test Requirement:	FCC Part15 C Section 15.225(d) and 15.209																												
Test Method:	ANSI C63.10: 2013 & ANSI C63.4: 2014																												
Test Frequency Range:	9KHz to 1000MHz																												
Test site:	Measurement Distance: 3m																												
Receiver setup:	Frequency	Detector	RBW	VBW	Remark																								
	9kHz-150kHz	Quasi-peak	200Hz	300Hz	Quasi-peak Value																								
	150kHz-30MHz	Quasi-peak	9kHz	10kHz	Quasi-peak Value																								
	30MHz-1GHz	Quasi-peak	120KHz	300KHz	Quasi-peak Value																								
FCC Limit:	<table><thead><tr><th>Frequency (MHz)</th><th>Field strength (microvolts/meter)</th><th>Measurement distance (meters)</th></tr></thead><tbody><tr><td>0.009-0.490</td><td>2400/F(kHz)</td><td>300</td></tr><tr><td>0.490-1.705</td><td>24000/F(kHz)</td><td>30</td></tr><tr><td>1.705-30.0</td><td>30</td><td>30</td></tr><tr><td>30-88</td><td>100**</td><td>3</td></tr><tr><td>88-216</td><td>150**</td><td>3</td></tr><tr><td>216-960</td><td>200**</td><td>3</td></tr><tr><td>Above 960</td><td>500</td><td>3</td></tr></tbody></table>					Frequency (MHz)	Field strength (microvolts/meter)	Measurement distance (meters)	0.009-0.490	2400/F(kHz)	300	0.490-1.705	24000/F(kHz)	30	1.705-30.0	30	30	30-88	100**	3	88-216	150**	3	216-960	200**	3	Above 960	500	3
	Frequency (MHz)	Field strength (microvolts/meter)	Measurement distance (meters)																										
0.009-0.490	2400/F(kHz)	300																											
0.490-1.705	24000/F(kHz)	30																											
1.705-30.0	30	30																											
30-88	100**	3																											
88-216	150**	3																											
216-960	200**	3																											
Above 960	500	3																											
	The emission limits shown in the above table are based on measurements employing a CISPR quasi-peak detector except for the frequency bands 9-90 kHz, 110-490 kHz and above 1000 MHz. Radiated emission limits in these three bands are based on measurements employing an average detector.																												
Test setup:	Below 30MHz																												
																													
	Above 30MHz																												

						
Test Instruments:	Refer to section 6.0 for details					
Test mode:	Refer to section 5.2 for details					
Test environment:	Temp.:	25 °C	Humid.:	52%	Press.:	1012mbar
Test voltage:	DC 3V					
Test results:	Pass					

Measurement data:

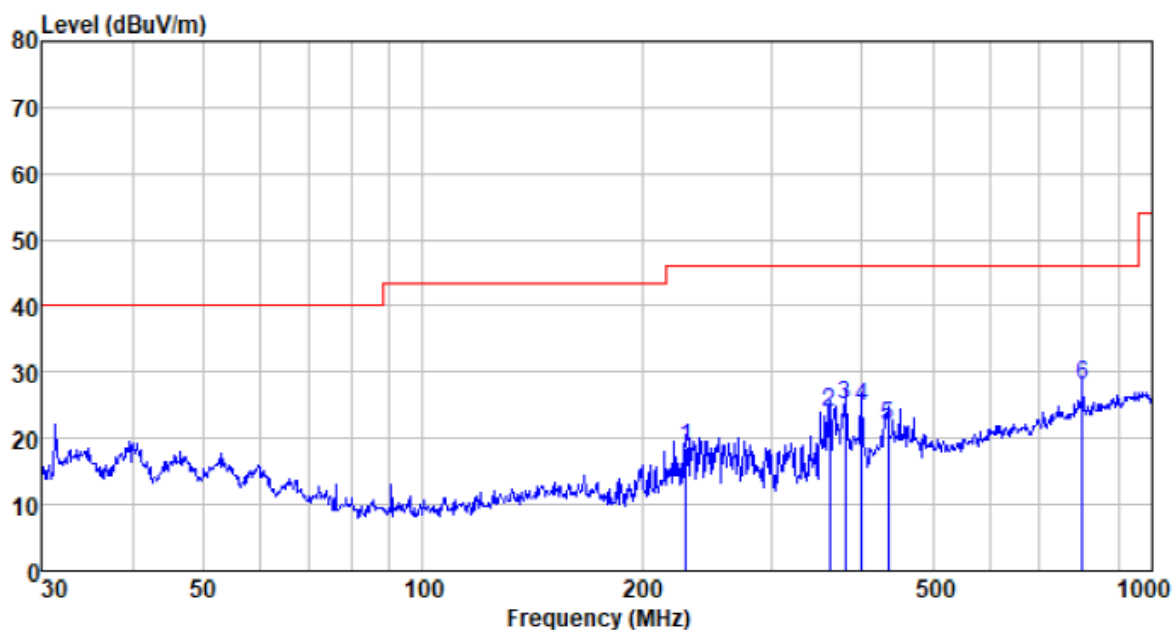
■ 9kHz~30MHz

Test data combines x, y, z-axis; the radiation emission more than 20dB below the limit



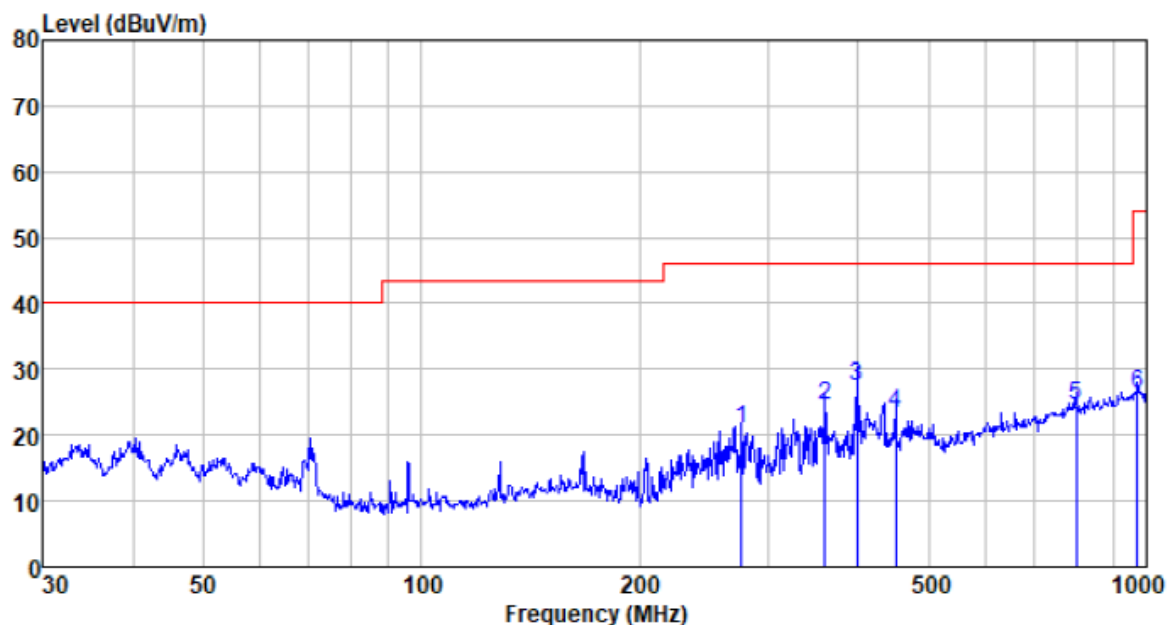
■ 30MHz~1GHz

Horizontal:



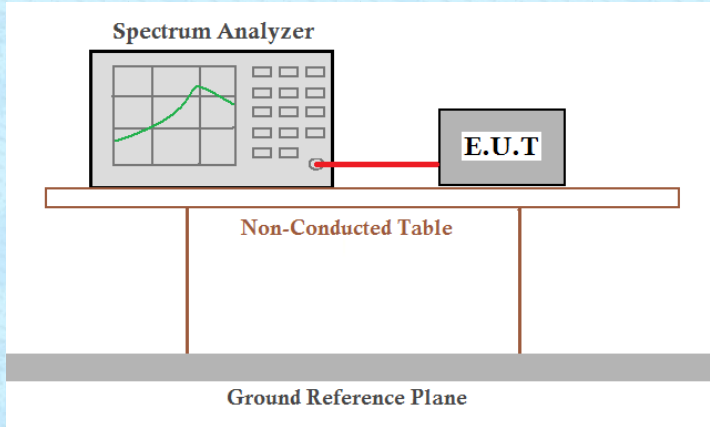
Freq MHz	Reading level dBuV	Antenna factor dB/m	Cable loss dB	Preamp factor dB	level dBuV/m	Limit level dBuV/m	Over limit dB	Remark
229.293	44.59	9.38	2.01	37.36	18.62	46.00	-27.38	QP
361.714	44.73	13.85	2.68	37.49	23.77	46.00	-22.23	QP
379.914	45.53	14.29	2.76	37.50	25.08	46.00	-20.92	QP
400.432	44.88	14.71	2.85	37.52	24.92	46.00	-21.08	QP
434.065	40.65	15.58	3.02	37.52	21.73	46.00	-24.27	QP
801.786	38.89	22.25	4.46	37.62	27.98	46.00	-18.02	QP

Vertical:



Freq MHz	Reading level dBuV	Antenna factor dB/m	Cable loss dB	Preamp factor dB	level dBuV/m	Limit level dBuV/m	Over limit dB	Remark
276.124	44.33	11.72	2.25	37.40	20.90	46.00	-25.10	QP
360.448	45.35	13.82	2.67	37.48	24.36	46.00	-21.64	QP
399.030	47.42	14.68	2.85	37.52	27.43	46.00	-18.57	QP
451.135	41.86	16.02	3.09	37.51	23.46	46.00	-22.54	QP
798.980	35.41	22.23	4.45	37.62	24.47	46.00	-21.53	QP
972.337	34.60	23.99	5.12	37.53	26.18	54.00	-27.82	QP

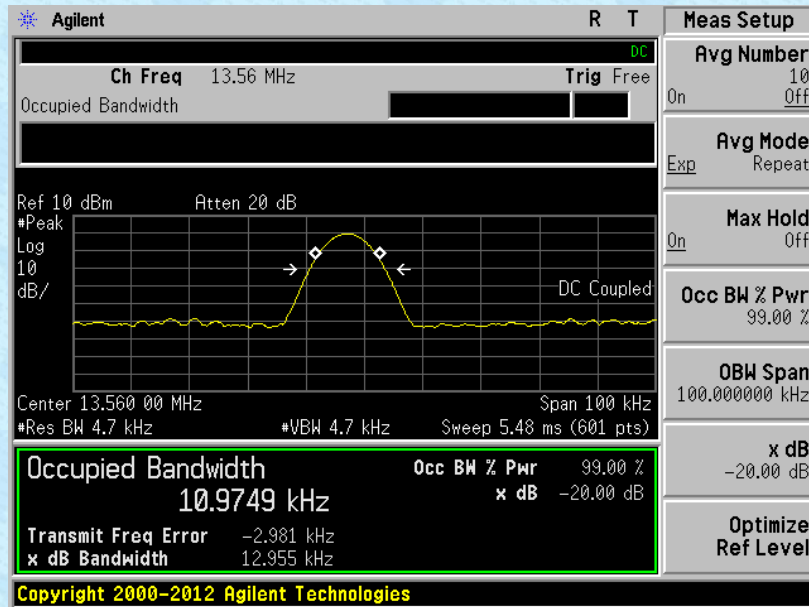
7.4 Channel Bandwidth and 99% Occupied Bandwidth

Test Requirement:	FCC Part15 C Section 15.225 and 15.215
Test Method:	ANSI C63.10:2013
Limit:	N/A
Test Procedure:	<ol style="list-style-type: none"> 1. According to the follow Test-setup, keep the relative position between the artificial antenna and the EUT. 2. Set the EUT to proper test channel. 3. Max hold the radiated emissions, mark the peak power frequency point and the -20dB upper and lower frequency points. 4. Read 20dB bandwidth & 99%bandwidth.
Test setup:	 <p>The diagram illustrates the test setup. A Spectrum Analyzer is connected to an E.U.T. (Equipment Under Test) via a red cable. Both the Spectrum Analyzer and the E.U.T. are placed on a Non-Conducted Table. The table is supported by a Ground Reference Plane.</p>
Test Instruments:	Refer to section 6.0 for details
Test mode:	Refer to section 5.2 for details
Test results:	Pass

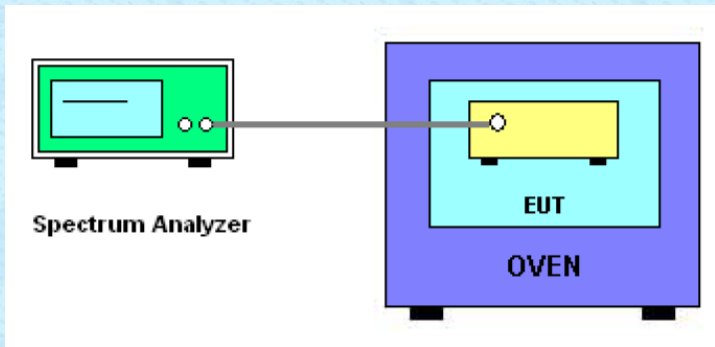
Measurement Data

Test frequency(MHz)	20dB bandwidth(KHz)	99% bandwidth(KHz)	Result
13.56	12.955	10.9749	Pass

Test plot as follows:



7.5 Frequency Stability Measurement

Test Requirement:	FCC Part15 C Section 15.225 (e)
Test Method:	ANSI C63.10: 2013
Receiver setup:	RBW=1KHz, VBW=1KHz, Sweep time=Auto
Limit:	<p>The frequency tolerance of the carrier signal shall be maintained within +/- 0.01% of the operating frequency over a temperature variation of -20 degrees to +50 degrees C at normal supply voltage, for a variation in the primary supply voltage from 85% to 115% of the rated supply voltage at a temperature of 20 degrees C.</p> <p>For battery operated equipment, the equipment tests shall be performed using a new battery.</p>
Test setup:	 <p>The diagram illustrates the test setup. On the left is a green Spectrum Analyzer. A cable connects its output to a yellow rectangular box labeled 'EUT' (Equipment Under Test). This EUT is placed inside a blue box labeled 'OVEN'.</p>
Test Instruments:	Refer to section 6.0 for details
Test mode:	Refer to section 5.2 for details
Test results:	Pass

Measurement data:

Reference Frequency: 13.56MHz					
Power supplied (Vdc)	Temperature (°C)	Frequency error		Limit	Result
		Hz	%		
3	-20	16	0.0001	+/- 0.01%	Pass
	-10	15	0.0001		
	0	13	0.0001		
	10	21	0.0002		
	20	18	0.0001		
	30	17	0.0001		
	40	16	0.0001		
	50	14	0.0001		

8 Test Setup Photo

Reference to the **appendix I** for details.

9 EUT Constructional Details

Reference to the **appendix II** for details.

----- End -----