



EMC TEST REPORT

Applicant ZTE Corporation
FCC ID SRQ-ZTE8010VF
Product WCDMA/LTE Multi-mode
Digital Mobile Phone
Model ZTE 8010
Report No. R2008A0548-E1
Issue Date September 7, 2020

TA Technology (Shanghai) Co., Ltd. tested the above equipment in accordance with the requirements in **FCC Code CFR47 Part15B (2019)/ ANSI C63.4 (2014)**. The test results show that the equipment tested is capable of demonstrating compliance with the requirements as documented in this report.

Wei Liu

Prepared by: Wei Liu

Guangchang Fan

Approved by: Guangchang Fan

TA Technology (Shanghai) Co., Ltd.

No.145, Jintang Rd, Tangzhen Industry Park, Pudong Shanghai, China

TEL: +86-021-50791141/2/3

FAX: +86-021-50791141/2/3-8000



Table of Contents

1	Test Laboratory.....	4
1.1	Notes of the Test Report.....	4
1.2.	Test facility	4
1.3	Testing Location.....	4
2	General Description of Equipment under Test.....	5
2.1	Applicant and Manufacturer Information.....	5
2.2	General information.....	5
2.3	Applied Standards.....	7
2.4	Test Mode.....	8
3	Test Case Results	9
3.1	Radiated Emission	9
3.2	Conducted Emission	14
4	Main Test Instruments	17



Summary of measurement results

Number	Test Case	Clause in FCC Rules	Conclusion
1	Radiated Emission	FCC Part15.109, ANSI C63.4-2014	PASS
2	Conducted Emission	FCC Part15.107, ANSI C63.4-2014	PASS
Test Date: August 16, 2020 ~ September 3, 2020			
Note: All indications of Pass/Fail in this report are opinions expressed by TA Technology (Shanghai) Co., Ltd. based on interpretations and/or observations of test results. Measurement Uncertainties were not taken into account and are published for informational purposes only.			

1 Test Laboratory

1.1 Notes of the Test Report

This report shall not be reproduced in full or partial, without the written approval of **TA technology (shanghai) co., Ltd.** The results documented in this report apply only to the tested sample, under the conditions and modes of operation as described herein .Measurement Uncertainties were not taken into account and are published for informational purposes only. This report is written to support regulatory compliance of the applicable standards stated above.

1.2. Test facility

FCC (Designation number: CN1179, Test Firm Registration Number: 446626)

TA Technology (Shanghai) Co., Ltd. has been listed on the US Federal Communications Commission list of test facilities recognized to perform electromagnetic emissions measurements.

A2LA (Certificate Number: 3857.01)

TA Technology (Shanghai) Co., Ltd. has been listed by American Association for Laboratory Accreditation to perform electromagnetic emission measurement.

1.3 Testing Location

Company: TA Technology (Shanghai) Co., Ltd.
Address: No.145, Jintang Rd, Tangzhen Industry Park, Pudong Shanghai, China
City: Shanghai
Post code: 201201
Country: P. R. China
Contact: Fan Guangchang
Telephone: +86-021-50791141/2/3
Fax: +86-021-50791141/2/3-8000
Website: <http://www.ta-shanghai.com>
E-mail: fanguangchang@ta-shanghai.com

2 General Description of Equipment under Test

2.1 Applicant and Manufacturer Information

Applicant	ZTE Corporation
Applicant address	ZTE Plaza, Keji Road South, Hi-Tech, Industrial Park, Nanshan District, Shenzhen, Guangdong, 518057, P.R.China
Manufacturer	ZTE Corporation
Manufacturer address	ZTE Plaza, Keji Road South, Hi-Tech, Industrial Park, Nanshan District, Shenzhen, Guangdong, 518057, P.R.China

2.2 General information

EUT Description			
Device Type:	Portable Device		
Model:	ZTE 8010		
IMEI:	IMEI 1:865350050002057 IMEI 2:865350050003055		
HW Version:	z10A		
SW Version:	ZTE Blade V2020 SmartB01-PT_ACC01		
Antenna Type:	Internal Antenna		
Frequency:	Band	Tx (MHz)	Rx (MHz)
	LTE Band 7	2500 ~ 2570	2620 ~ 2690
	Bluetooth:	2400 ~ 2483.5	2400 ~ 2483.5
	WIFI 2.4G:	2400 ~ 2483.5	2400 ~ 2483.5
EUT Accessory			
Adapter 1	Manufacturer: Jiangsu Chenyang Electron Co., Ltd. Model: STC-A520A-B		
Adapter 2	Manufacturer: SHENZHEN RUIJING INDUSTRIAL CO LTD Model: STC-A520A-B		
Adapter 3	Manufacturer: Jiangsu Chenyang Electron Co., Ltd. Model: STC-A520A-A		
Adapter 4	Manufacturer: SHENZHEN RUIJING INDUSTRIAL CO LTD Model: STC-A520A-A		
Battery 1	Manufacturer: NingDe Amperex Technoiogy Ltd. Model: Li3949T44P8h906450		
Battery 2	Manufacturer: SCUD (FUJIAN) Electronics Co., Ltd. Model: Li3949T44P8h906450		



Earphone 1	Manufacturer: JUWEI ELECTRONICS CO.,LTD Model: JWEP1036-Z01R
Earphone 2	Manufacturer: ShenZhen FDC Electronic Co.,Ltd Model: DEM-6
USB Cable 1	Manufacturer: Luxshare Precision industry Co., Ltd. Model: USB-TC20-W-100-M-L
USB Cable 2	Manufacturer: kingpower-tech Model: USB-TC20-W-100-M-L
<p>Note: 1.The EUT is sent from the applicant to TA and the information of the EUT is declared by the applicant.</p> <p>2. There is more than one Adapter/Earphone /USB Cable, each one should be applied throughout the compliance test respectively, and however, only the worst case (Adapter 2/ Earphone 1/ USB Cable1) will be recorded in this report.</p>	



2.3 Applied Standards

According to the specifications of the manufacturer, it must comply with the requirements of the following standards:

Test standards

FCC Code CFR47 Part15B (2019)

ANSI C63.4 (2014)

2.4 Test Mode

RE

Test Mode for RE	
Mode 1:	Adapter +USB cable+ earphone + Front camera On + LTE/ Bluetooth/ WLAN Receiver
Mode 2:	Adapter + USB cable + earphone + Mp4 + Receiver
Mode 3:	USB Copy(EUT with PC) + USB cable + earphone
Mode 4:	Front Camera On +earphone + LTE/ Bluetooth/ WLAN Receiver
Mode 5:	Rear camera On +earphone + LTE/ Bluetooth/ WLAN Receiver
Mode 6:	Earphone + MP4 + Receiver

During the test, the preliminary test was performed in all modes with all adapters, USB and batteries, mode 3 with Earphone 1, USB Cable1 is selected as the worst condition. The test data of the worst-case condition was recorded in this report.

CE

Test Mode for RE	
Mode 1:	Adapter +USB cable+ earphone + Front camera On + LTE/ Bluetooth/ WLAN Receiver
Mode 2:	Adapter + USB cable + earphone + Mp4 + Receiver
Mode 3:	USB Copy(EUT with PC) + USB cable + earphone

During the test, the preliminary test was performed in all modes with all adapters, USB and batteries, mode 2 with Adapter 2 and Earphone 1 , USB Cable1 is selected as the worst condition. The test data of the worst-case condition was recorded in this report.

3 Test Case Results

3.1 Radiated Emission

Ambient condition

Temperature	Relative humidity	Pressure
24°C~26°C	45%~50%	102.5kPa

Methods of Measurement

The EUT is placed on a non-metallic table 0.8m above the horizontal metal reference ground plane. The distance between EUT and receive antenna should be 3 meters. During the test, the EUT was operating in its typical mode. The test method is according to ANSI C63.4-2014. Sweep the whole frequency band through the range from 30MHz to the 5th harmonic of the carrier. During the test, the height of receive antenna shall be moved from 1 to 4 meters, and the antenna shall be performed under horizontal and vertical polarization. The turn table shall be rotated from 0 to 360 degrees for detecting the maximum of radiated signal level.

The data of cable loss and antenna factor has been calibrated in full testing frequency range before the testing. During the test, the EUT is worked at maximum output power.

Set the spectrum analyzer in the following:

Below 1GHz:

RBW=100 kHz / VBW=300 kHz / Sweep=AUTO

Above 1GHz:


(a) PEAK Detector: RBW=1MHz / VBW=3MHz/ Sweep=AUTO

(b) AVERAGE Detector: RBW=1MHz / VBW=3MHz / Sweep=AUTO


The radiated emission was measured in the following position: EUT stand-up position (Z axis), lie-down position (X, Y axis). The worst emission was found in lie-down position (X axis) and the worst case was recorded.

Test Setup

Below 1GHz

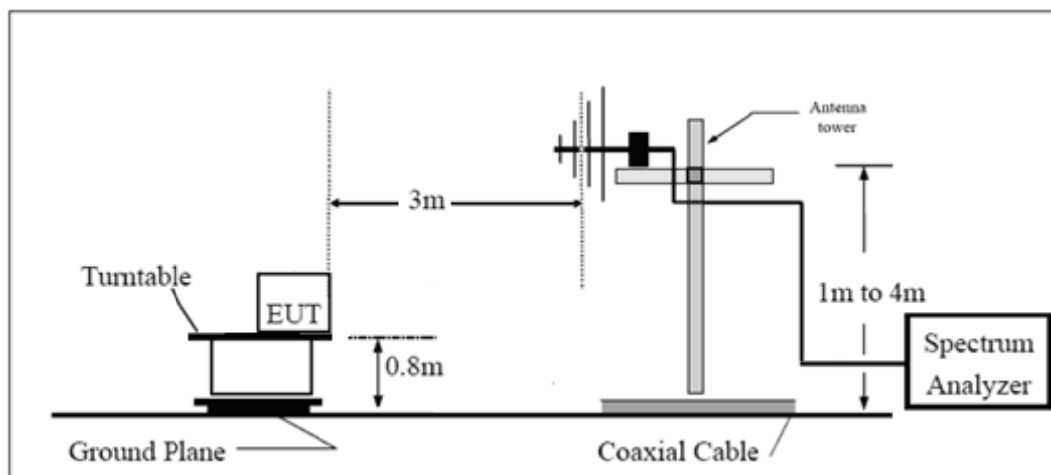

Above 1GHz

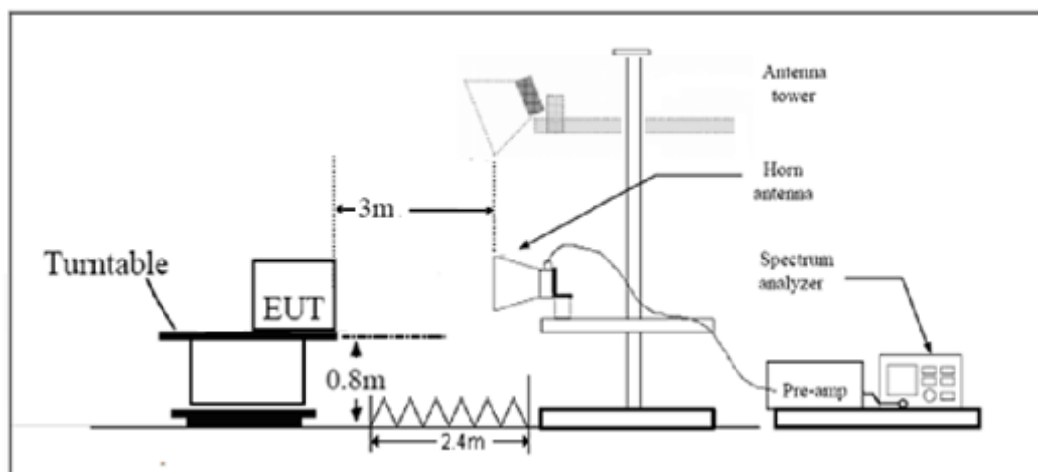

Note: Area side: 2.4mX3.6m

Antenna Tower meets ANSI C63.4 requirements for measurements above 1 GHz by keeping the antenna aimed at the EUT during the antenna's ascent/ descent along the antenna mast.

Limits**Class B**

Frequency (MHz)	Field Strength (dB μ V/m)	Detector
30 -88	40.0	Quasi-peak
88-216	43.5	Quasi-peak
216 – 960	46.0	Quasi-peak
960-1000	54.0	Quasi-peak
1000-5 th harmonic of the highest frequency or 40GHz, which is lower	54 74	Average Peak

Measurement Uncertainty


The assessed measurement uncertainty to ensure 95% confidence level for the normal distribution is with the coverage factor $k = 1.96$.

Frequency	Uncertainty
30MHz~200MHz	4.17 dB
200MHz~1000MHz	4.84 dB
1GHz~18GHz	4.35 dB

Test Results

Sweep the whole frequency band through the range from 30MHz to the 5th harmonic of the carrier, the Emissions in the frequency band 18GHz- 26.5GHz is more than 20dB below the limit are not reported.

The following graphs display the maximum values of horizontal and vertical by software.
For above 1GHz, Blue trace uses the peak detection, Green trace uses the average detection.

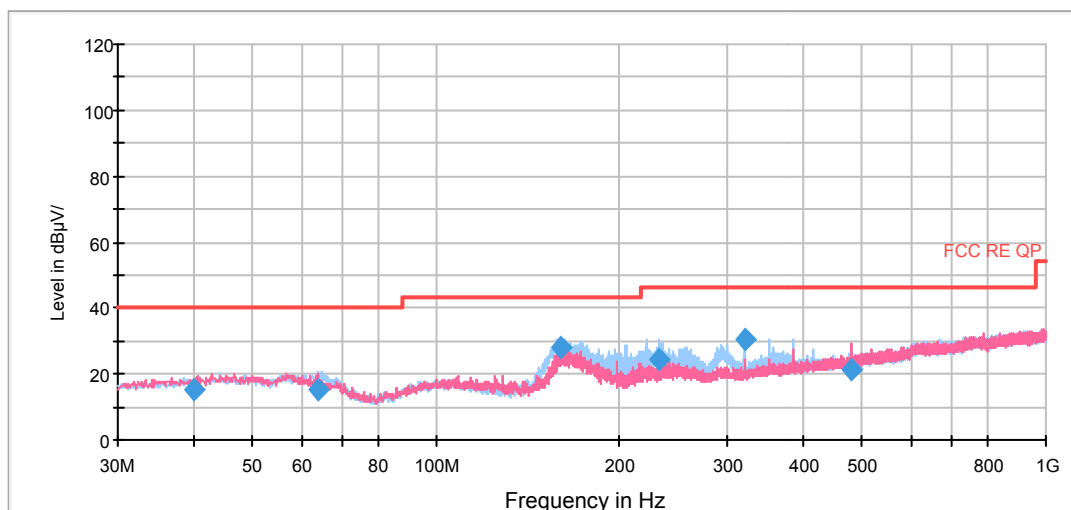


Radiated Emission from 30MHz to 1GHz

Frequency (MHz)	Quasi-Peak (dBuV/m)	Height (cm)	Polarization	Azimuth (deg)	Correct Factor (dB)	Margin (dB)	Limit (dBuV/m)
39.942500	14.9	100.0	V	336.0	14.0	25.1	40.0
63.950000	15.2	225.0	H	0.0	12.9	24.8	40.0
159.495000	28.1	200.0	H	121.0	10.4	15.4	43.5
232.366250	24.1	125.0	H	119.0	14.3	21.9	46.0
320.030000	30.7	100.0	H	126.0	16.2	15.3	46.0
480.080000	21.3	114.0	V	187.0	20.1	24.7	46.0

Remark: 1. Correction Factor = Antenna factor+ Insertion loss(cable loss+amplifier gain)

2. Margin = Limit – Quasi-Peak

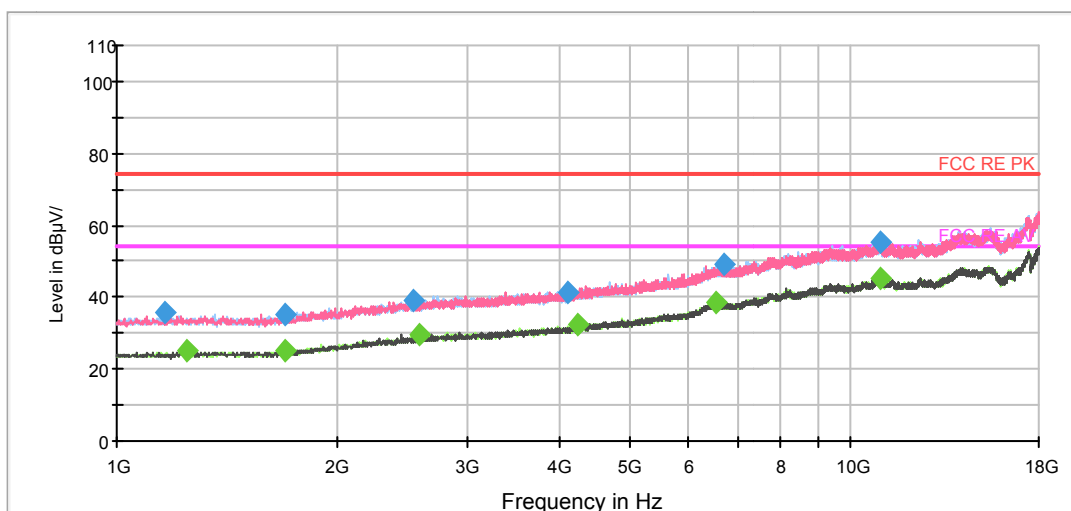

Radiated Emission from 1GHz to 18GHz

Frequency (MHz)	Peak (dBuV/m)	Height (cm)	Polarization	Azimuth (deg)	Correct Factor (dB)	Margin (dB)	Limit (dBuV/m)
1165.750000	35.8	200.0	V	60.0	-11.3	38.2	74.0
1699.125000	35.1	100.0	V	0.0	-9.6	38.9	74.0
2540.625000	39.1	100.0	V	17.0	-6.3	34.9	74.0
4121.625000	41.6	100.0	H	37.0	-2.3	32.4	74.0
6701.375000	49.0	100.0	V	122.0	5.0	25.0	74.0
10989.625000	55.2	200.0	H	28.0	13.6	18.8	74.0

Frequency (MHz)	Average (dBuV/m)	Height (cm)	Polarization	Azimuth (deg)	Correct Factor (dB)	Margin (dB)	Limit (dBuV/m)
1244.375000	25.0	200.0	H	169.0	-11.1	29.0	54.0
1690.625000	25.0	100.0	V	25.0	-9.6	29.0	54.0
2583.125000	29.6	200.0	H	39.0	-6.2	24.4	54.0
4236.375000	32.2	200.0	H	0.0	-2.0	21.8	54.0
6539.875000	38.5	100.0	H	84.0	4.9	15.5	54.0
10962.000000	45.0	100.0	V	2.0	13.5	9.0	54.0

3.2 Conducted Emission


Ambient condition

Temperature	Relative humidity	Pressure
24°C ~26°C	50%~55%	102.5kPa

Methods of Measurement

The EUT is placed on a non-metallic table of 80cm height above the horizontal metal reference ground plane. During the test, the EUT was operating in its typical mode. The test method is according to ANSI C63.4-2014. Connect the AC power line of the EUT to the L.I.S.N. Use EMI receiver to detect the average and Quasi-peak value. RBW is set to 9 kHz, VBW is set to 30kHz. The measurement result should include both L line and N line.

Test Setup

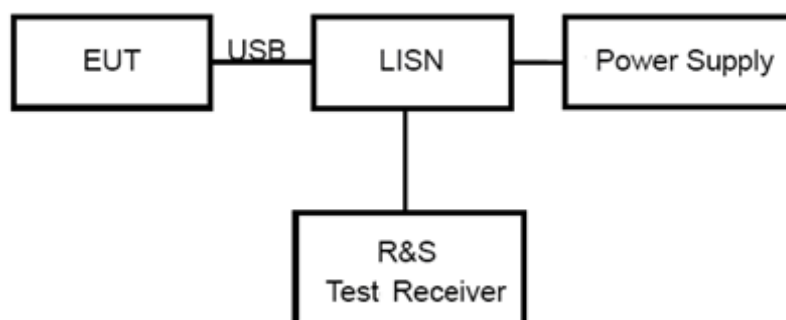

Note: Power Supply is AC Power source and it is used to change the voltage 120V/60Hz.

Limits


Frequency (MHz)	Conducted Limits(dB μ V)	
	Quasi-peak	Average
0.15 - 0.5	66 to 56 *	56 to 46 *
0.5 - 5	56	46
5 - 30	60	50
*: Decreases with the logarithm of the frequency.		

Measurement Uncertainty

The assessed measurement uncertainty to ensure 95% confidence level for the normal distribution is with the coverage factor $k = 1.96$. $U = 2.57$ dB.

Test Results

Following plots, Blue trace uses the peak detection; Green trace uses the average detection.

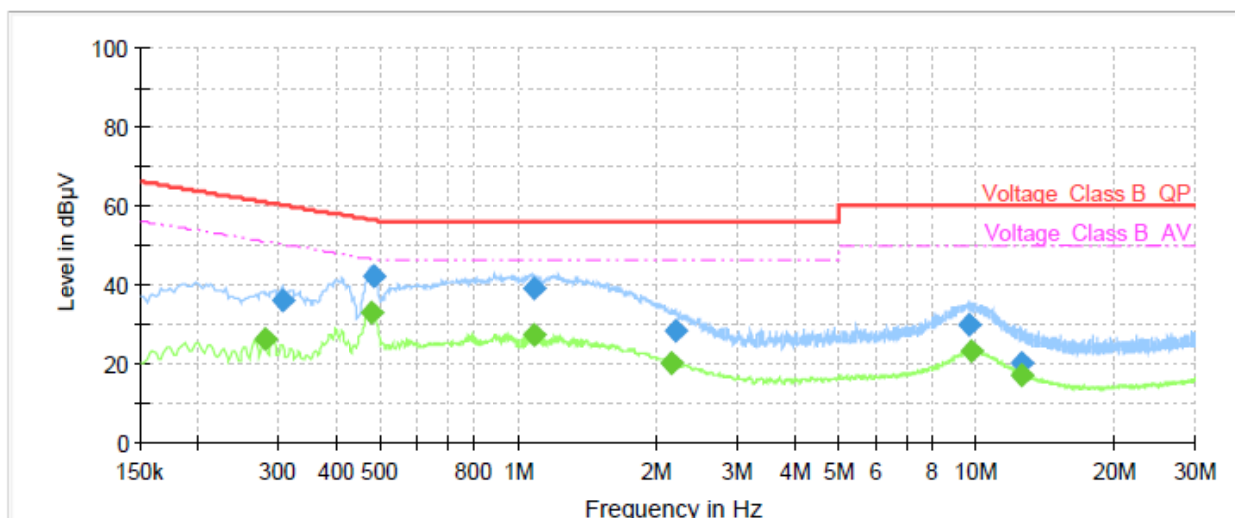


Frequency (MHz)	QuasiPeak (dBμV)	Average (dBμV)	Limit (dBμV)	Margin (dB)	Meas. Time (ms)	Bandwidth (kHz)	Line	Filter	Corr. (dB)
0.28	---	26.02	50.87	24.85	1000.0	9.000	L1	ON	19
0.31	36.02	---	60.10	24.08	1000.0	9.000	L1	ON	19
0.48	---	33.04	46.37	13.33	1000.0	9.000	L1	ON	19
0.48	42.23	---	56.33	14.10	1000.0	9.000	L1	ON	19
1.08	---	27.11	46.00	18.89	1000.0	9.000	L1	ON	19
1.08	39.06	---	56.00	16.94	1000.0	9.000	L1	ON	19
2.16	---	20.04	46.00	25.96	1000.0	9.000	L1	ON	19
2.21	28.29	---	56.00	27.71	1000.0	9.000	L1	ON	19
9.67	29.83	---	60.00	30.17	1000.0	9.000	L1	ON	19
9.75	---	23.04	50.00	26.96	1000.0	9.000	L1	ON	19
12.52	20.13	---	60.00	39.87	1000.0	9.000	L1	ON	19
12.52	---	17.14	50.00	32.86	1000.0	9.000	L1	ON	19

Remark: Correct factor=cable loss + LISN factor

L line

Conducted Emission from 150 KHz to 30 MHz

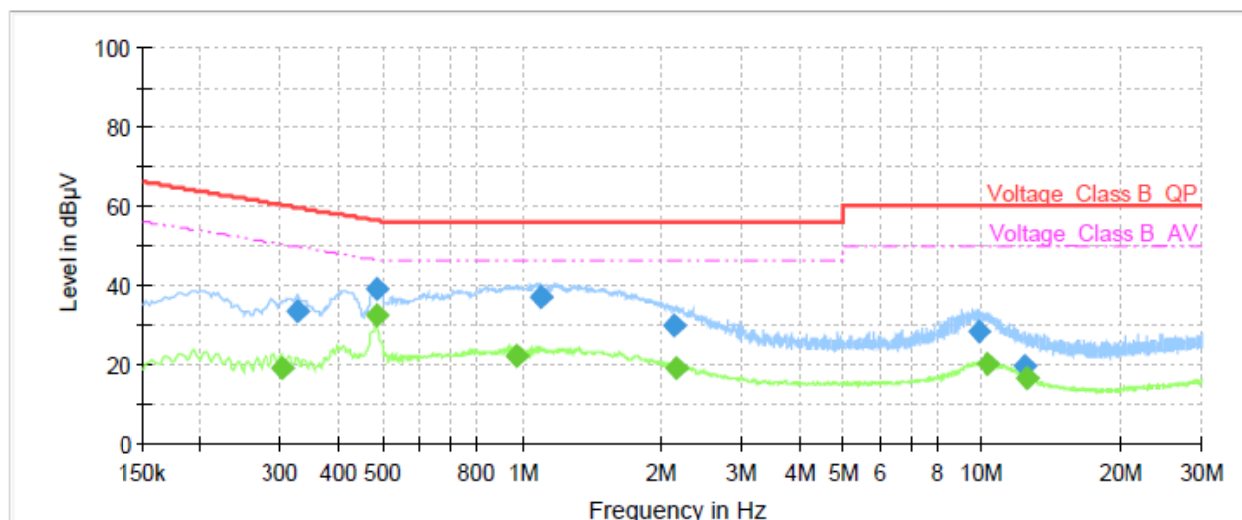

Frequency (MHz)	QuasiPeak (dBμV)	Average (dBμV)	Limit (dBμV)	Margin (dB)	Meas. Time (ms)	Bandwidth (kHz)	Line	Filter	Corr. (dB)
0.30	---	19.23	50.22	30.99	1000.0	9.000	N	ON	19
0.33	33.47	---	59.57	26.10	1000.0	9.000	N	ON	19
0.48	---	32.23	46.29	14.06	1000.0	9.000	N	ON	19
0.48	39.17	---	56.29	17.12	1000.0	9.000	N	ON	19
0.97	---	22.01	46.00	23.99	1000.0	9.000	N	ON	19
1.10	36.81	---	56.00	19.19	1000.0	9.000	N	ON	19
2.13	29.68	---	56.00	26.32	1000.0	9.000	N	ON	19
2.16	---	18.99	46.00	27.01	1000.0	9.000	N	ON	19
9.86	28.12	---	60.00	31.88	1000.0	9.000	N	ON	19
10.27	---	19.90	50.00	30.10	1000.0	9.000	N	ON	19
12.41	19.71	---	60.00	40.29	1000.0	9.000	N	ON	19
12.48	---	16.19	50.00	33.81	1000.0	9.000	N	ON	19

Remark: Correct factor=cable loss + LISN factor

N line

Conducted Emission from 150 KHz to 30 MHz

4 Main Test Instruments

Name	Manufacturer	Type	Serial Number	Calibration Date	Expiration Time
Spectrum Analyzer	R&S	FSV40	15195-01-00	2020-05-17	2021-05-16
EMI Test Receiver	R&S	ESCI	100948	2020-05-17	2021-05-16
Trilog Antenna	SCHWARZBECK	VULB 9163	391	2019-12-16	2021-12-15
Horn Antenna	R&S	HF907	102723	2018-08-11	2021-08-10
Horn Antenna	ETS-Lindgren	3160-09	00102643	2018-06-20	2021-06-19
EMI Test Receiver	R&S	ESR	101667	2020-05-17	2021-05-16
LISN	R&S	ENV216	101171	2018-12-15	2021-12-14
Bore Sight Antenna mast	ETS	2171B	00058752	/	/
Test software	EMC32	R&S	9.26.0	/	/

*****END OF REPORT *****