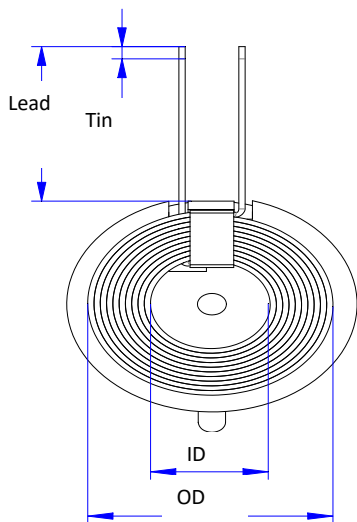
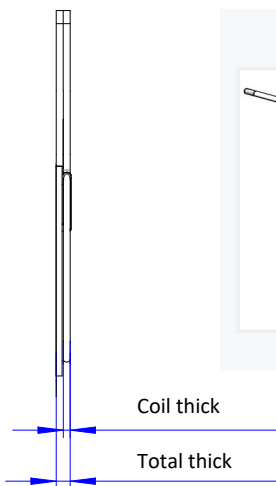
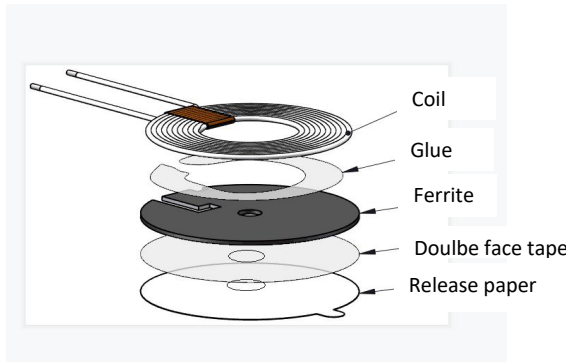


 雷宝电子 —ZYCOIL—		Specification						Number		ZY9204-1002		
								Version		A/0		
								Page		1/1		
Customer	ZY9204		Wire	Sample wire: 0.08x105P				Machine				
Itme	Wieless charger coil		Spec	20.5x0.08x105Px10TS+G50 ferrite				Direction	CCW			
1.Specification (Unit:mm)												
Item	Turns	L 120KHZ/1V	DCR 25℃	ID	OD	Lead	Tin	Coil thick	Total thick (Not include release paper)			
Standared	10TS	6.3uH	38mΩ	20.5	43	25	2~4	1.3	2.88			
Tolerance	Fixed	±10%	±20%	±0.5	±1	±2		MAX	MAX			
2.Drawing												
  												
3.BOM												
Material		Specification		Unit	Usage	Supplier	Remark					
Wire		0.08x105P USTC wire		g	6.3±0.3							
Glue		530#		mL	0.5							
Tpe		width 8.0mm		mm	38							
Ferrite		PR49.5x5.3x1.0(外径50 +0/-1, thick1.0±0.1)		PCS	1							
Double face tape		D48.5±0.5*5.3±0.3*0.08±0.01		PCS	1							
Foam tray		25 hole		PCS	1/250		10PCS/hole					
Carton		350x260x150		PCS	1/500		2pcs tray/carton					
Version	Content			Date	Remark							
A/0				2023/12/9								
Approval												
Make		Audit		Approval		Customer confirm						
尹艺												