



FCC TEST REPORT

FCC ID: 2AHAS-MBA9-1009-BLK

On Behalf of

JEM ACCESSORIES INC.

Bluetooth Transmitter/receiver

Model No.: MBA9-1009-BLK, WBA9-1008-BLK

Prepared for : JEM ACCESSORIES INC.
Address : 32Brunswick Avenue, Edison, New Jersey, United States,08817

Prepared By : Shenzhen Alpha Product Testing Co., Ltd.
Address : Building i, No.2, Lixin Road, Fuyong Street, Bao'an District, 518103,
Shenzhen, Guangdong, China

Report Number : A2403054-C01-R01
Date of Receipt : April 1, 2024
Date of Test : April 1, 2024 - April 11, 2024
Date of Report : April 11, 2024
Version Number : V0
Test Result : Pass

TABLE OF CONTENTS

<u>Description</u>	<u>Page</u>
1. Summary of Standards And Results	6
1.1. Description of Standards and Results	6
2. General Information	7
2.1. Description of Device (EUT)	7
2.2. Accessories of Device (EUT)	8
2.3. Tested Supporting System Details	8
2.4. Block Diagram of connection between EUT and simulators	8
2.5. Test Mode Description	8
2.6. Test Conditions	9
2.7. Test Facility	9
2.8. Measurement Uncertainty	9
2.9. Test Equipment List	10
3. Maximum Peak Output power	12
3.1. Limit	12
3.2. Test Procedure	12
3.3. Test Setup	12
3.4. Test Result	12
4. Bandwidth	13
4.1. Limit	13
4.2. Test Procedure	13
4.3. Test Result	13
5. Carrier Frequency Separation	24
5.1. Limit	24
5.2. Test Procedure	24
5.3. Test Result	24
6. Number Of Hopping Channel	26
6.1. Limit	26
6.2. Test Procedure	26
6.3. Test Result	26
7. Dwell Time	28
7.1. Test limit	28
7.2. Test Procedure	28
7.3. Test Result	28
8. Radiated emissions	38
8.1. Limit	38
8.2. Block Diagram of Test setup	39
8.3. Test Procedure	40
8.4. Test Result	40
9. Band Edge Compliance	51
9.1. Block Diagram of Test Setup	51

9.2. Limit	51
9.3. Test Procedure	51
9.4. Test Result.....	51
10. Power Line Conducted Emissions.....	58
10.1. Block Diagram of Test Setup	58
10.2. Limit	58
10.3. Test Procedure	58
10.4. Test Result.....	58
11. Antenna Requirements.....	61
11.1. Limit.....	61
11.2. Result	61
12. Test setup photo	62
12.1. Photo of Radiated Emission test	62
12.2. Photo of Conducted Emission test	63
13. EUT Photo.....	64

TEST REPORT DECLARATION

Applicant : JEM ACCESSORIES INC.
Address : 32Brunswick Avenue, Edison, New Jersey, United States,08817
Manufacturer : JEM ACCESSORIES INC.
Address : 32Brunswick Avenue, Edison, New Jersey, United States,08817
EUT Description : Bluetooth Transmitter/receiver
(A) Model No. : MBA9-1009-BLK, WBA9-1008-BLK
(B) Trademark : N/A

Measurement Standard Used:
FCC Rules and Regulations Part 15 Subpart C Section 15.247

The device described above is tested by Shenzhen Alpha Product Testing Co., Ltd. to determine the maximum emission levels emanating from the device. The maximum emission levels are compared to the FCC Part 15 Subpart C limits both conducted and radiated emissions. The test results are contained in this test report and Shenzhen Alpha Product Testing Co., Ltd. is assumed of full responsibility for the accuracy and completeness of these tests.

After the test, our opinion is that EUT compliance with the requirement of the above standards.

This report applies to above tested sample only. This report shall not be reproduced in parts without written approval of Shenzhen Alpha Product Testing Co., Ltd.

Tested by (name + signature).....:	Yannis Wen Project Engineer	
Approved by (name + signature).....:	Reak Yang Project Manager	
Date of issue.....:	April 11, 2024	

Revision History

Revision	Issue Date	Revisions	Revised By
V0	April 11, 2024	Initial released Issue	Yannis Wen

1. SUMMARY OF STANDARDS AND RESULTS

1.1. Description of Standards and Results

The EUT have been tested according to the applicable standards as referenced below:

Test Item	Standards Paragraph	Result
Maximum Peak Output Power	FCC Part 15: 15.247(b)(1)	P
Bandwidth	FCC Part 15: 15.215	P
Carrier Frequency Separation	FCC Part 15: 15.247(a)(1)	P
Number Of Hopping Channel	FCC Part 15: 15.247(a)(1)	P
Dwell Time	FCC Part 15: 15.247(a)(1)	P
Radiated Emission	FCC Part 15: 15.209, FCC Part 15: 15.247(d)	P
Band Edge Compliance	FCC Part 15: 15.247(d)	P
Power Line Conducted Emissions	FCC Part 15: 15.207	P
Antenna requirement	FCC Part 15: 15.203	P
Note: 1. P is an abbreviation for Pass. 2. F is an abbreviation for Fail. 3. N/A is an abbreviation for Not Applicable.		

1. Pass: The EUT complies with the essential requirements in the standard.
2. Frequency Stability: The manufacturer stated in the user's manual.
3. The conclusion of this test report is judged by actual test data without considering measurement uncertainty.

2. GENERAL INFORMATION

2.1. Description of Device (EUT)

Description	: Bluetooth Transmitter/receiver
Model Number	: MBA9-1009-BLK, WBA9-1008-BLK
Diff	: There is no difference except the name of the model. All tests are made with the MBA9-1009-BLK model.
Power supply	: DC 3.7V from battery, DC 5V from adapter
Radio Technology	: Bluetooth EDR
Operation frequency	: 2402-2480MHz
Channel No.	: 79 Channels
Channel spacing	: 1MHz
Modulation type	: GFSK, $\pi/4$ DQPSK, 8DPSK
Antenna Type	: PCB antenna, Maximum Gain is 1.58dBi. Antenna information is provided by applicant.
Software version	: V1.0
Hardware version	: TW8267Q-TYW-1796-V2
Connector cable loss	: Max. coaxial cable loss:0.5dB(Cable loss value is provided by applicant.)
Intend use environment	: Residential, commercial and light industrial environment


2.2. Accessories of Device (EUT)

Accessories : /
 Manufacturer : /
 Model : /
 INPUT : /
 OUTPUT : /

2.3. Tested Supporting System Details

No.	Description	Manufacturer	Model	Serial Number	Certification or SDoC
1.	Adapter	Shenzhen HUONIU Technology Co., Ltd.	HNFCQC3024UU	--	--

2.4. Block Diagram of connection between EUT and simulators



2.5. Test Mode Description

Tested mode, channel information			
Mode No.	Mode	Channel	Frequency (MHz)
TM1	GFSK	Low :CH1	2402
TM2		Middle: CH40	2441
TM3		High: CH79	2480
TM4	$\pi/4$ DQPSK	Low :CH1	2402
TM5		Middle: CH40	2441
TM6		High: CH79	2480
TM7	8DPSK	Low :CH1	2402
TM8		Middle: CH40	2441
TM9		High: CH79	2480
TM10	GFSK-Hopping	/	/
TM11	$\pi/4$ DQPSK-Hopping	/	/
TM12	8DPSK-Hopping	/	/

2.6. Test Conditions

Items	Required	Actual
Temperature range:	15-35°C	24°C
Humidity range:	25-75%	56%
Pressure range:	86-106kPa	980kPa

2.7. Test Facility

Shenzhen Alpha Product Testing Co., Ltd

Building i, No.2, Lixin Road, Fuyong Street, Bao'an District, 518103,
Shenzhen, Guangdong, China

June 21, 2018 File on Federal Communication Commission

Registration Number: 293961

July 15, 2019 Certificated by IC

Registration Number: CN0085

Company Number : 12135A

2.8. Measurement Uncertainty

(95% confidence levels, k=2)

Item	Uncertainty
Uncertainty for Power point Conducted Emissions Test	1.63dB
Uncertainty for Radiation Emission test in 3m chamber (below 30MHz)	3.5dB
Uncertainty for Radiation Emission test in 3m chamber (30MHz to 1GHz)	3.74dB(Polarize: V)
	3.76dB(Polarize: H)
Uncertainty for Radiation Emission test in 3m chamber (1GHz to 25GHz)	3.77dB(Polarize: V)
	3.80dB(Polarize: H)
Uncertainty for Radiation Emission test in 3m chamber (18GHz to 40GHz)	4.31 dB(Polarize: V)
	4.30 dB(Polarize: H)
Uncertainty for radio frequency	5.06×10^{-8} GHz
Uncertainty for conducted RF Power	0.40dB
Uncertainty for temperature	0.2°C
Uncertainty for humidity	1%
Uncertainty for DC and low frequency voltages	0.06%

2.9. Test Equipment List

Equipment	Manufacture	Model No.	Firmware version	Serial No.	Last cal.	Cal Interval
9*6*6 anechoic chamber	CHENYU	9*6*6	/	N/A	2022.05.17	3Year
Spectrum analyzer	ROHDE&SCHWARZ	FSV40-N	2.3	102137	2023.08.16	1Year
Spectrum analyzer	Agilent	N9020A	A.14.16	MY499100060	2023.08.16	1Year
Receiver	ROHDE&SCHWARZ	ESR	2.28 SP1	1316.3003K03-10 2082-Wa	2023.08.16	1Year
Receiver	R&S	ESCI	4.42 SP1	101165	2023.08.16	1Year
Bilog Antenna	Schwarzbeck	VULB 9168	/	VULB 9168#627	2023.08.28	1Year
Horn Antenna	SCHWARZBECK	BBHA 9120 D	/	2106	2023.08.19	1Year
Loop Antenna	SCHWARZBECK	FMZB 1519B	/	00128	2023.08.19	1Year
RF Cable	Resenberger	Cable 1	/	RE1	2023.08.16	1Year
RF Cable	Resenberger	Cable 2	/	RE2	2023.08.16	1Year
RF Cable	Resenberger	Cable 3	/	CE1	2023.08.16	1Year
Pre-amplifier	HP	HP8347A	/	2834A00455	2023.08.16	1Year
Pre-amplifier	Agilent	8449B	/	3008A02664	2023.08.16	1Year
L.I.S.N.#1	Schwarzbeck	NSLK8126	/	8126-466	2023.08.16	1Year
L.I.S.N.#2	ROHDE&SCHWARZ	ENV216	/	101043	2023.08.16	1Year
Horn Antenna	SCHWARZBECK	BBHA 9170	/	00946	2023.08.19	1Year
Preamplifier	SKET	LNPA_1840 -50	/	SK2018101801	2023.08.16	1 Year
Power Meter	Agilent	E9300A	/	MY41496628	2023.08.16	1 Year
Power Sensor	DARE	RPR3006W	/	15100041SNO91	2023.08.16	1 Year
Temp. & Humid. Chamber	Teelong	TL-HW408S	/	TL-20191205-01	2023.07.25	1 Year
Switching Mode Power Supply	JUNKE	JK12010S	/	20140927-6	2023.08.16	1 Year
Adjustable attenuator	MWRFTtest	N/A	/	N/A	N/A	N/A
10dB Attenuator	Mini-Circuits	DC-6G	/	N/A	N/A	N/A

Software Information			
Test Item	Software Name	Manufacturer	Version
RE	EZ-EMC	EZ	Alpha-3A1
CE	EZ-EMC	EZ	Alpha-3A1
RF-CE	MTS 8310	MW	V2.0.0.0

3. MAXIMUM PEAK OUTPUT POWER

3.1. Limit


Please refer section 15.247

For frequency hopping systems operating in the 2400-2483.5 MHz band employing at least 75 non-overlapping hopping channels, and all frequency hopping systems in the 5725-5850 MHz band: 1 watt. For all other frequency hopping systems in the 2400-2483.5 MHz band: 0.125 watts, the e.i.r.p shall not exceed 4W

3.2. Test Procedure

The transmitter output is connected to the RF Power Meter. The RF Power Meter is set to the peak power detection.

3.3. Test Setup



3.4. Test Result

Condition	Mode	Frequency (MHz)	Antenna	Conducted Power (dBm)	EIRP (dBm)	Limit (dBm)	Verdict
NVNT	1-DH1	2402	Ant1	-0.159	-0.159	21	Pass
NVNT	1-DH1	2441	Ant1	-0.723	-0.723	21	Pass
NVNT	1-DH1	2480	Ant1	-1.35	-1.35	21	Pass
NVNT	1-DH3	2441	Ant1	-0.342	-0.342	21	Pass
NVNT	1-DH5	2441	Ant1	-0.547	-0.547	21	Pass
NVNT	2-DH1	2402	Ant1	2.478	2.478	21	Pass
NVNT	2-DH1	2441	Ant1	1.719	1.719	21	Pass
NVNT	2-DH1	2480	Ant1	1.415	1.415	21	Pass
NVNT	2-DH3	2441	Ant1	1.363	1.363	21	Pass
NVNT	2-DH5	2441	Ant1	1.704	1.704	21	Pass
NVNT	3-DH1	2402	Ant1	2.872	2.872	21	Pass
NVNT	3-DH1	2441	Ant1	2.112	2.112	21	Pass
NVNT	3-DH1	2480	Ant1	2.39	2.39	21	Pass
NVNT	3-DH3	2441	Ant1	1.722	1.722	21	Pass
NVNT	3-DH5	2441	Ant1	2.158	2.158	21	Pass

4. BANDWIDTH

4.1. Limit

Intentional radiators operating under the alternative provisions to the general emission limits, as contained in FCC Section 15.247(a)(1), must be designed to ensure that the 20 dB bandwidth of the emission, or whatever bandwidth may otherwise be specified in the specific rule section under which the equipment operates, is contained within the frequency band designated in the rule section under which the equipment is operated..

4.2. Test Procedure

The RF output of EUT was connected to the spectrum analyzer by RF cable and attenuator. The bandwidth of the fundamental frequency was measured by spectrum analyzer with 30kHz RBW and 100kHz VBW. The 20dB bandwidth is defined as the total spectrum the power of which is higher than peak power minus 20dB.

4.3. Test Result

-20dB Bandwidth


Condition	Mode	Frequency (MHz)	Antenna	-20 dB Bandwidth (MHz)	Limit -20 dB Bandwidth (MHz)	Verdict
NVNT	1-DH1	2402	Ant1	0.834	/	Pass
NVNT	1-DH1	2441	Ant1	0.872	/	Pass
NVNT	1-DH1	2480	Ant1	0.836	/	Pass
NVNT	2-DH1	2402	Ant1	1.244	/	Pass
NVNT	2-DH1	2441	Ant1	1.23	/	Pass
NVNT	2-DH1	2480	Ant1	1.242	/	Pass
NVNT	3-DH1	2402	Ant1	1.252	/	Pass
NVNT	3-DH1	2441	Ant1	1.228	/	Pass
NVNT	3-DH1	2480	Ant1	1.232	/	Pass

-20dB Bandwidth NVNT 1-DH1 2402MHz Ant1




Date: 2.APR.2024 10:02:50

-20dB Bandwidth NVNT 1-DH1 2441MHz Ant1

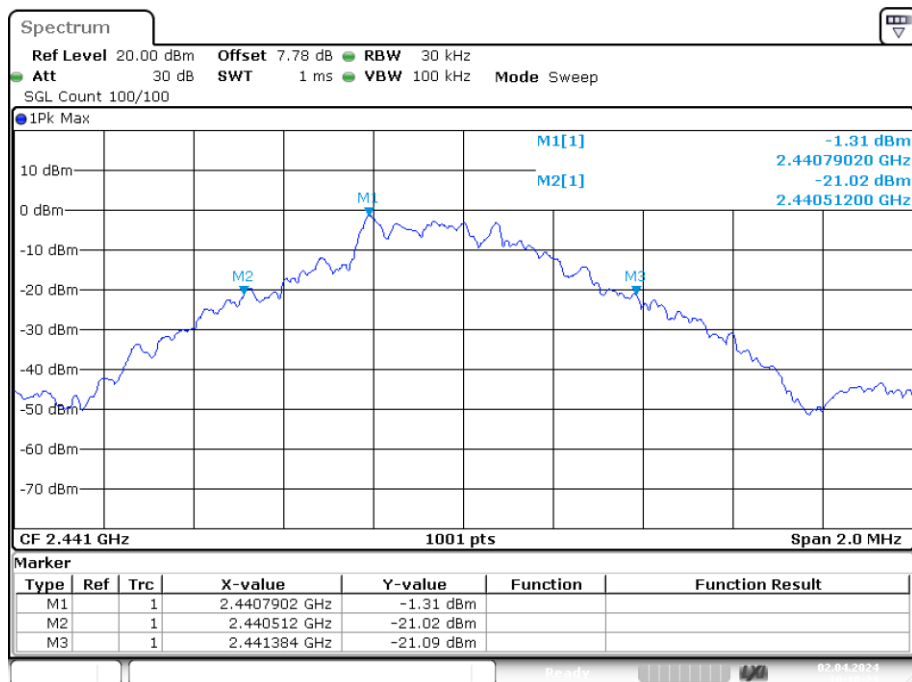


Date: 2.APR.2024 10:10:23

-20dB Bandwidth NVNT 1-DH1 2480MHz Ant1

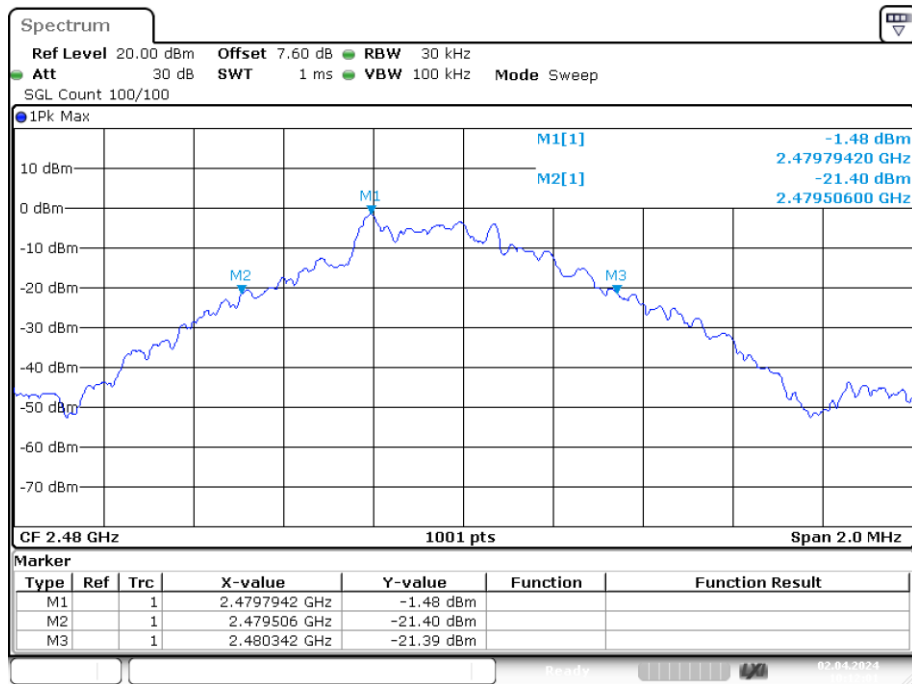


Date: 2.APR.2024 10:12:01


-20dB Bandwidth NVNT 2-DH1 2402MHz Ant1

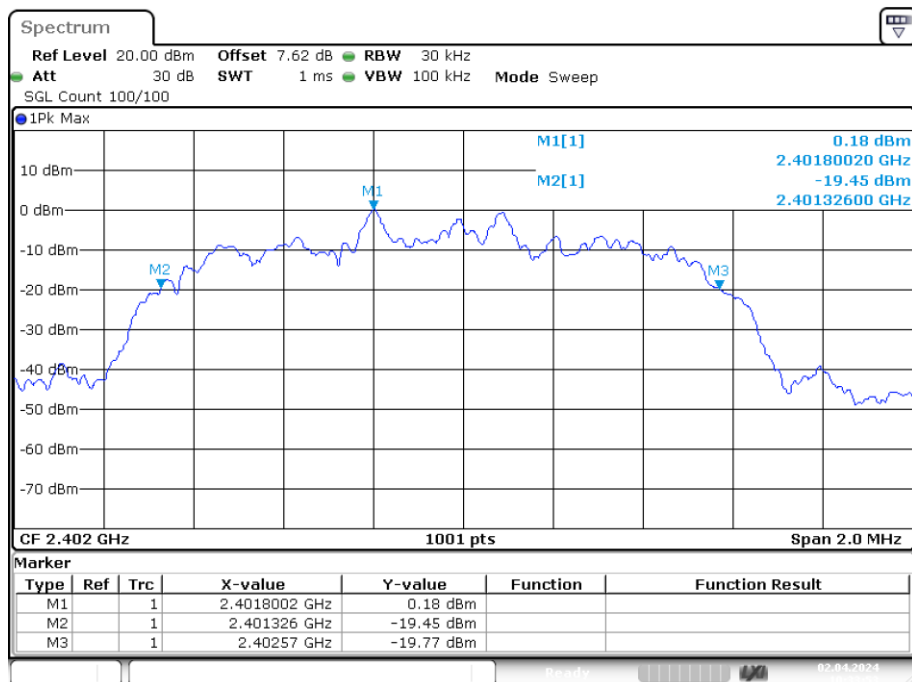


Date: 2.APR.2024 10:33:53

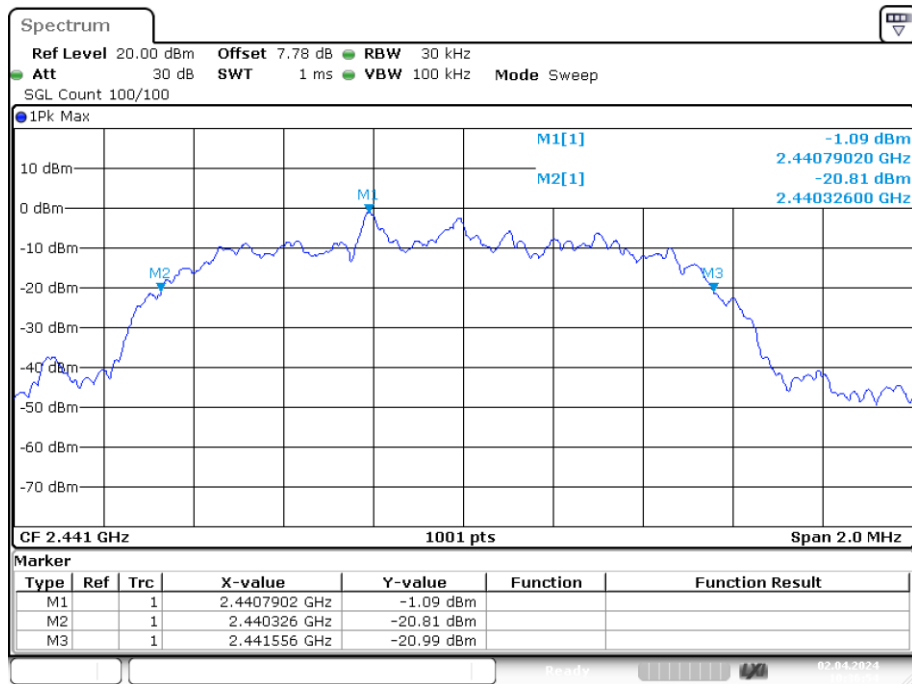-20dB Bandwidth NVNT 2-DH1 2441MHz Ant1


Date: 2.APR.2024 10:36:54

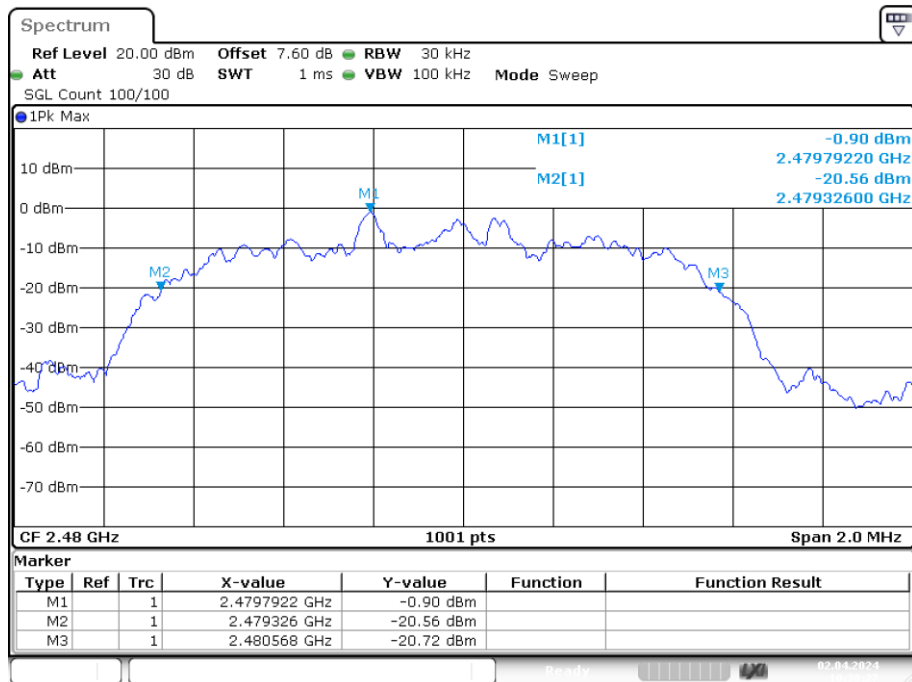-20dB Bandwidth NVNT 2-DH1 2480MHz Ant1

Date: 2.APR.2024 10:38:27

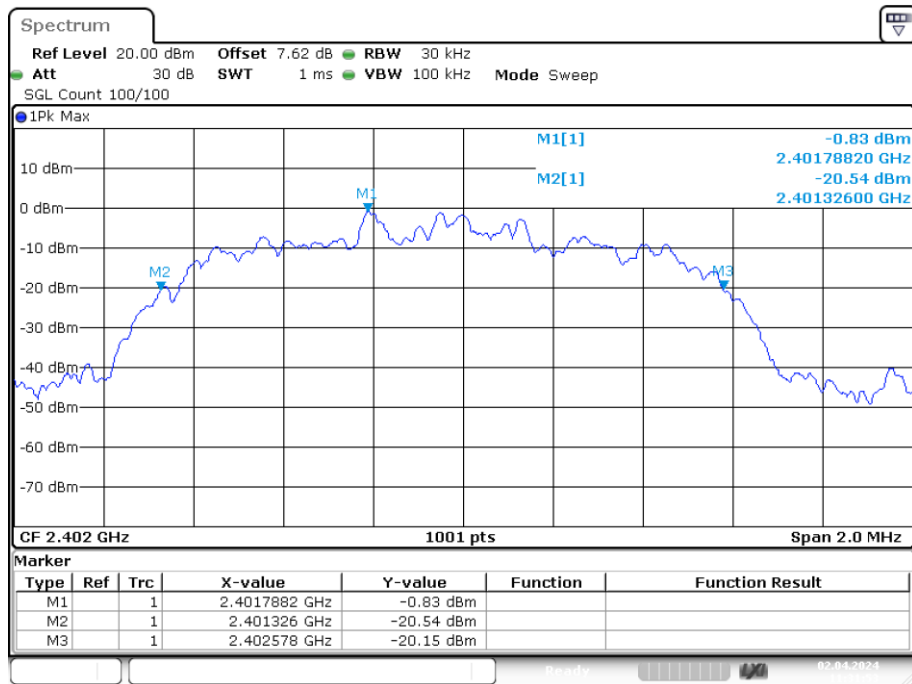
-20dB Bandwidth NVNT 3-DH1 2402MHz Ant1

Date: 2.APR.2024 11:31:53

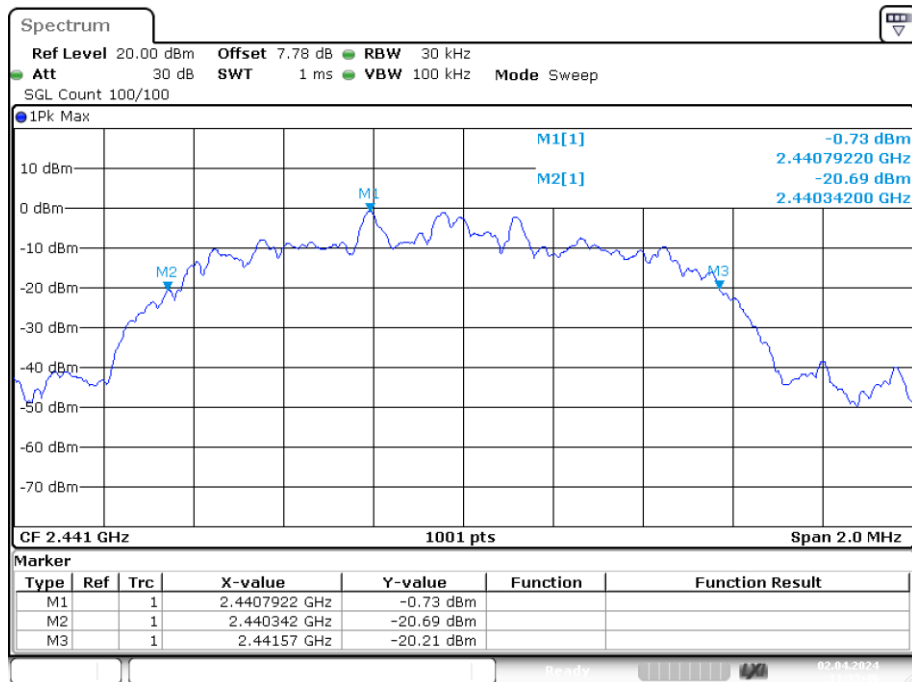-20dB Bandwidth NVNT 3-DH1 2441MHz Ant1

Date: 2.APR.2024 11:33:46

-20dB Bandwidth NVNT 3-DH1 2480MHz Ant1

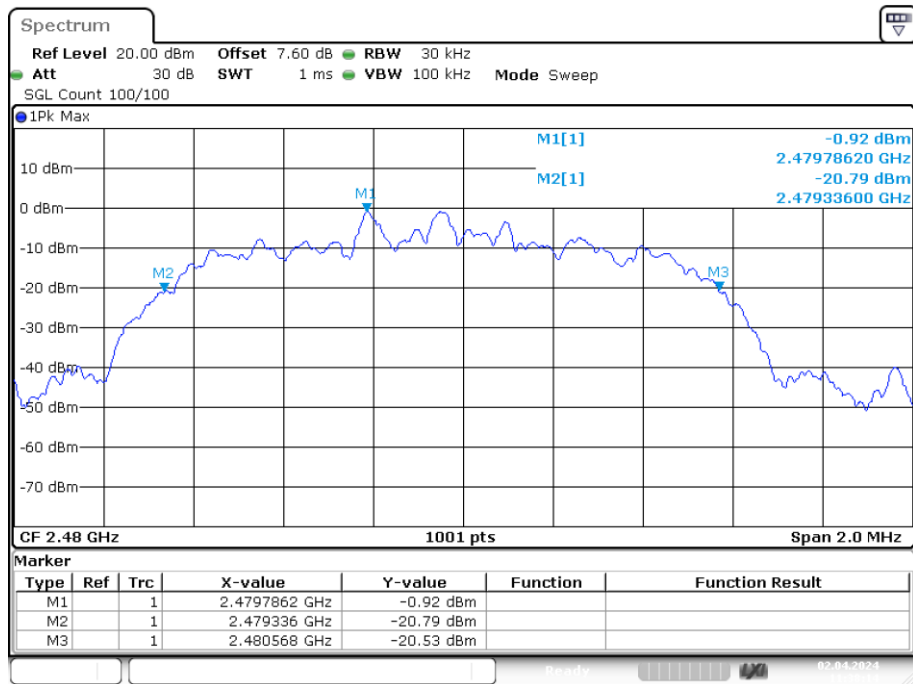


Date: 2.APR.2024 11:38:14

Occupied Channel Bandwidth


Condition	Mode	Frequency (MHz)	Antenna	99% OBW (MHz)
NVNT	1-DH1	2402	Ant1	0.825
NVNT	1-DH1	2441	Ant1	0.821
NVNT	1-DH1	2480	Ant1	0.809
NVNT	2-DH1	2402	Ant1	1.173
NVNT	2-DH1	2441	Ant1	1.159
NVNT	2-DH1	2480	Ant1	1.165
NVNT	3-DH1	2402	Ant1	1.137
NVNT	3-DH1	2441	Ant1	1.147
NVNT	3-DH1	2480	Ant1	1.151

OBW NVNT 1-DH1 2402MHz Ant1

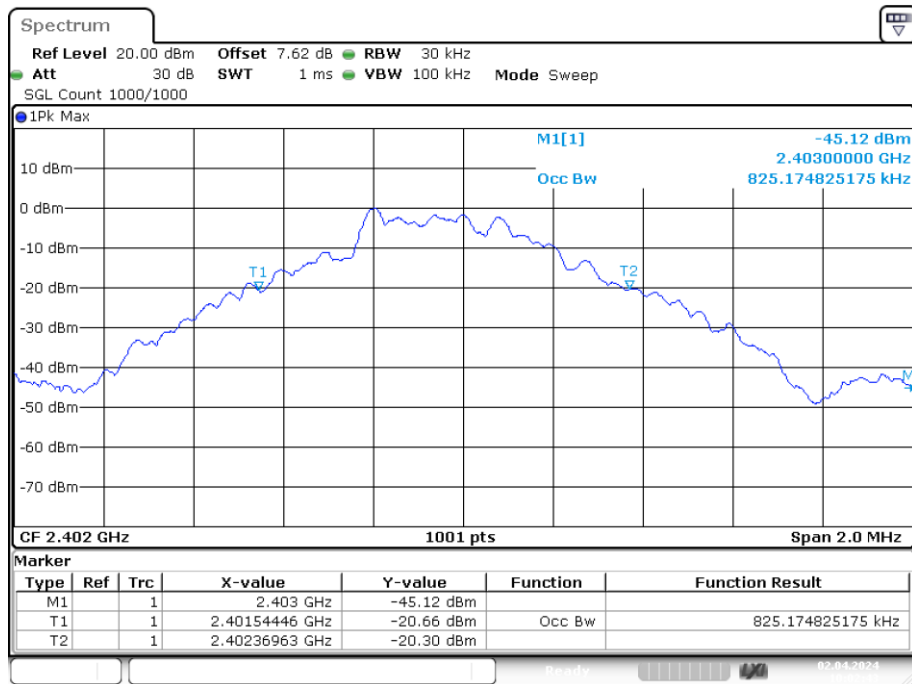


Date: 2.APR.2024 10:02:42

OBW NVNT 1-DH1 2441MHz Ant1

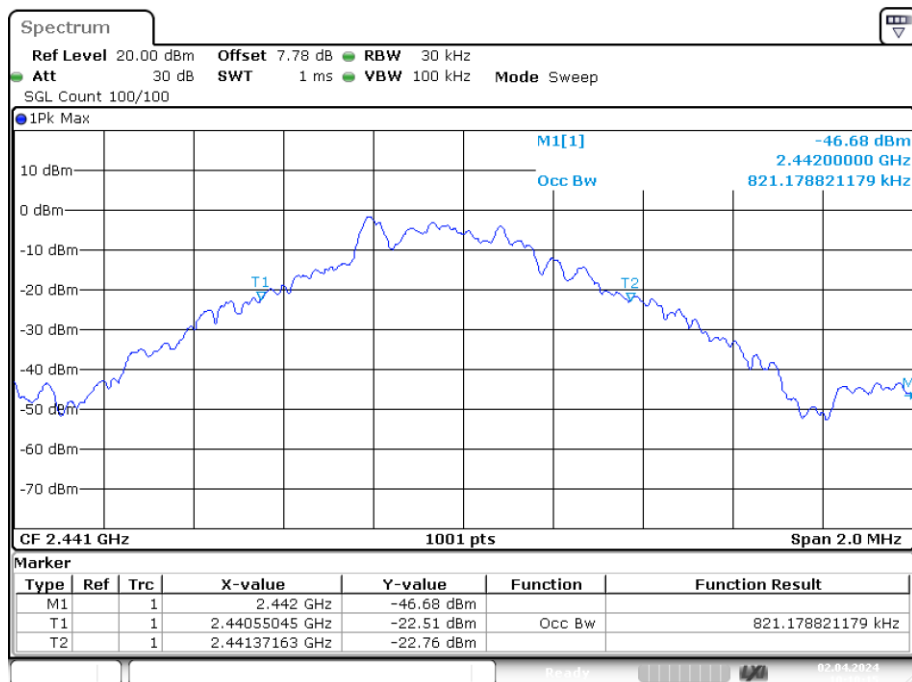


Date: 2.APR.2024 10:10:15

OBW NVNT 1-DH1 2480MHz Ant1

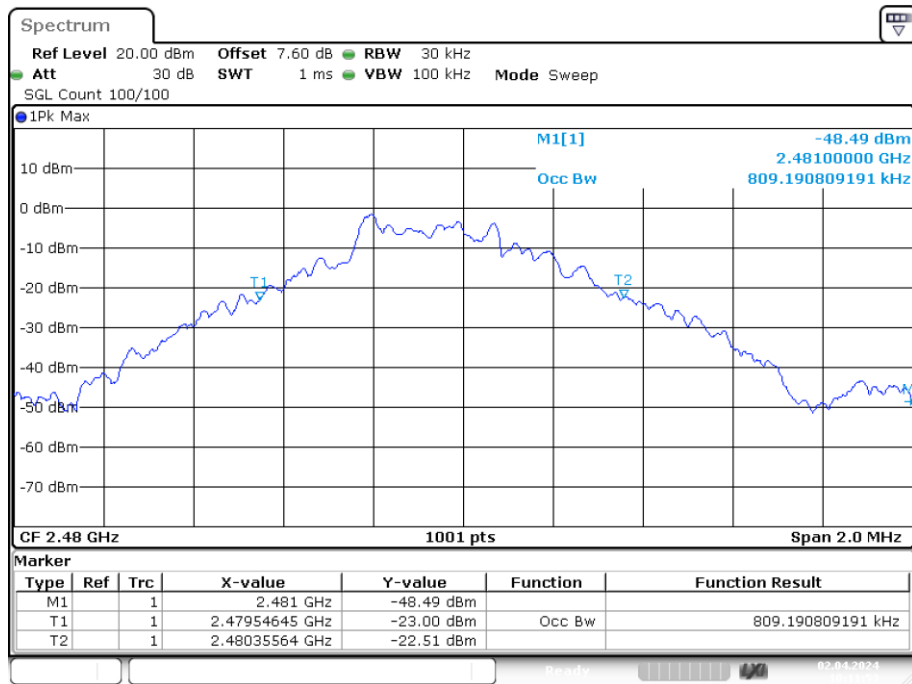


Date: 2.APR.2024 10:11:53

OBW NVNT 2-DH1 2402MHz Ant1

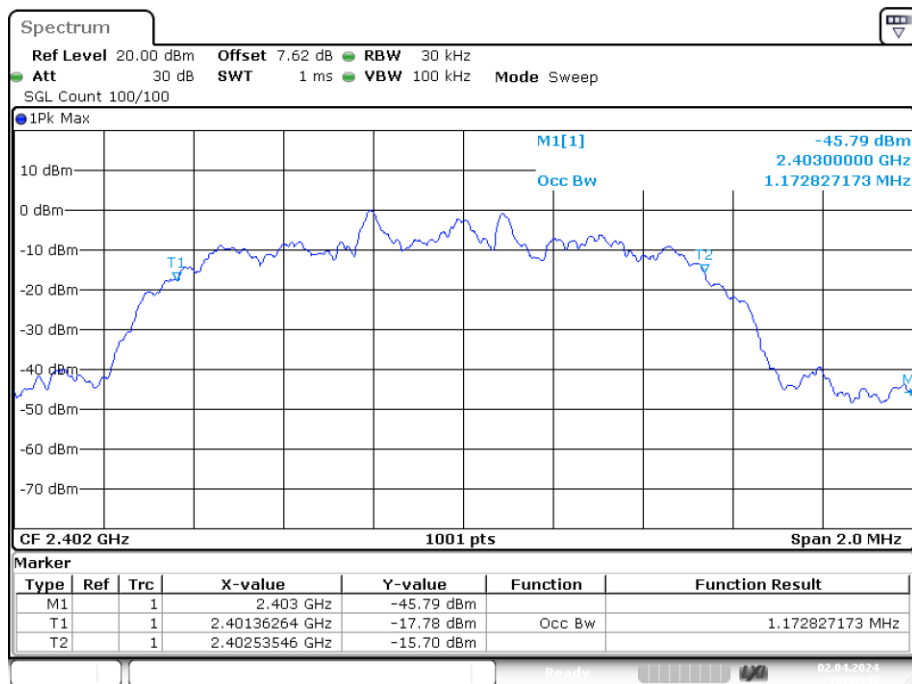


Date: 2.APR.2024 10:33:45

OBW NVNT 2-DH1 2441MHz Ant1

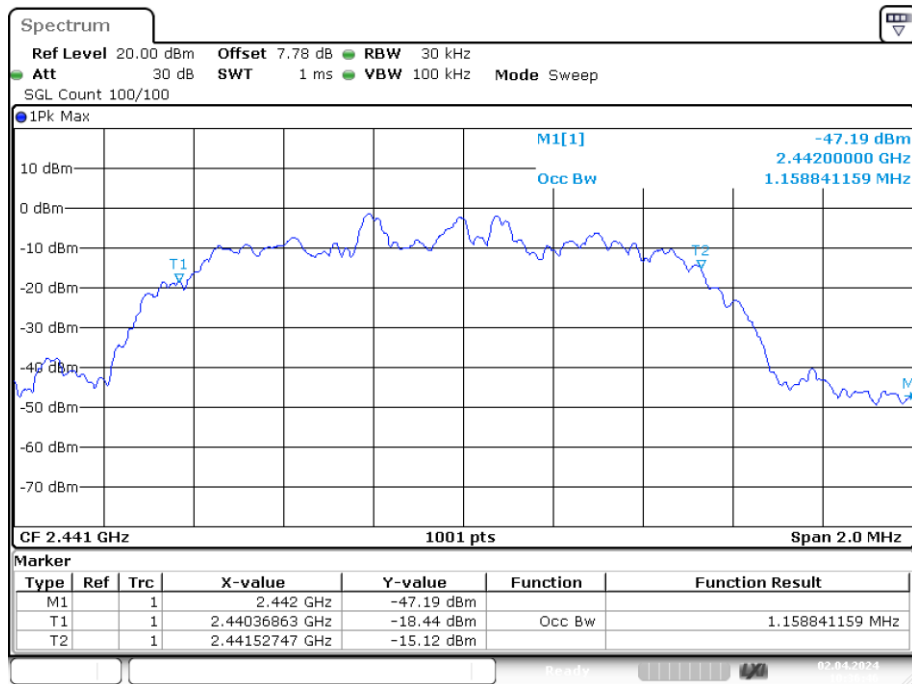


Date: 2.APR.2024 10:36:46

OBW NVNT 2-DH1 2480MHz Ant1

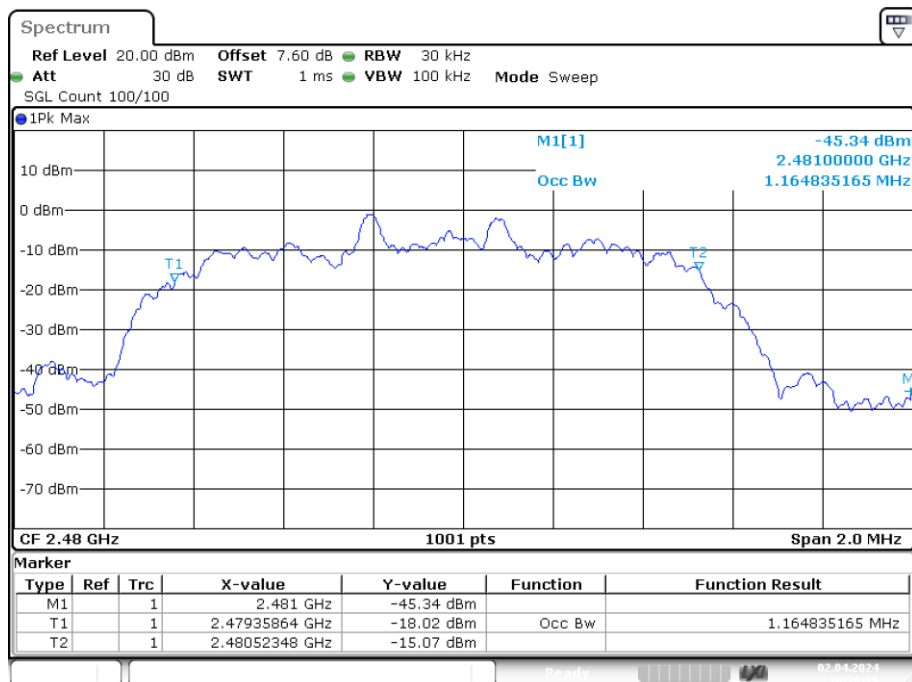


Date: 2.APR.2024 10:38:19

OBW NVNT 3-DH1 2402MHz Ant1

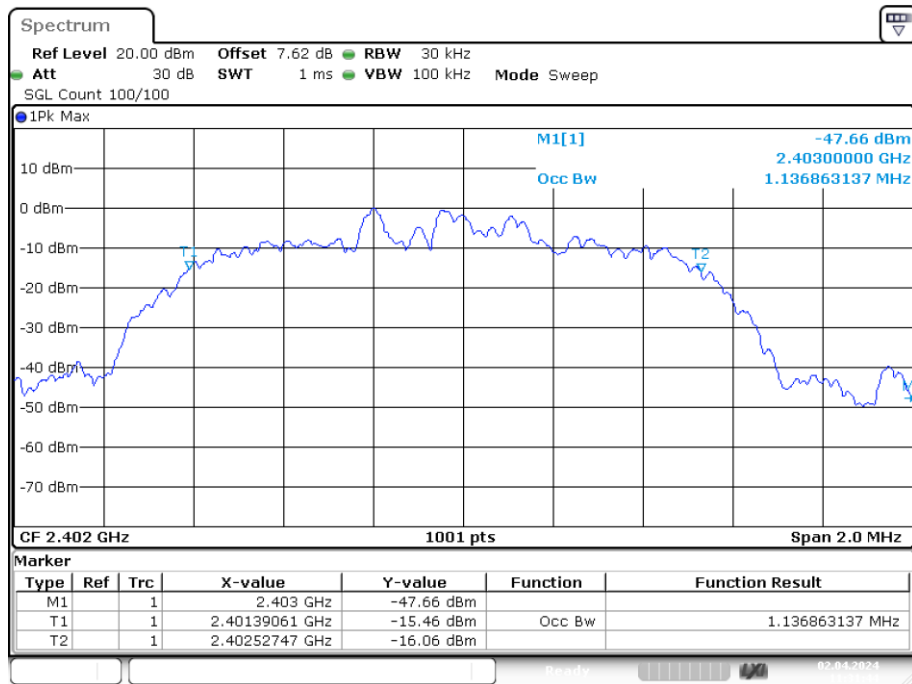


Date: 2.APR.2024 11:31:45

OBW NVNT 3-DH1 2441MHz Ant1

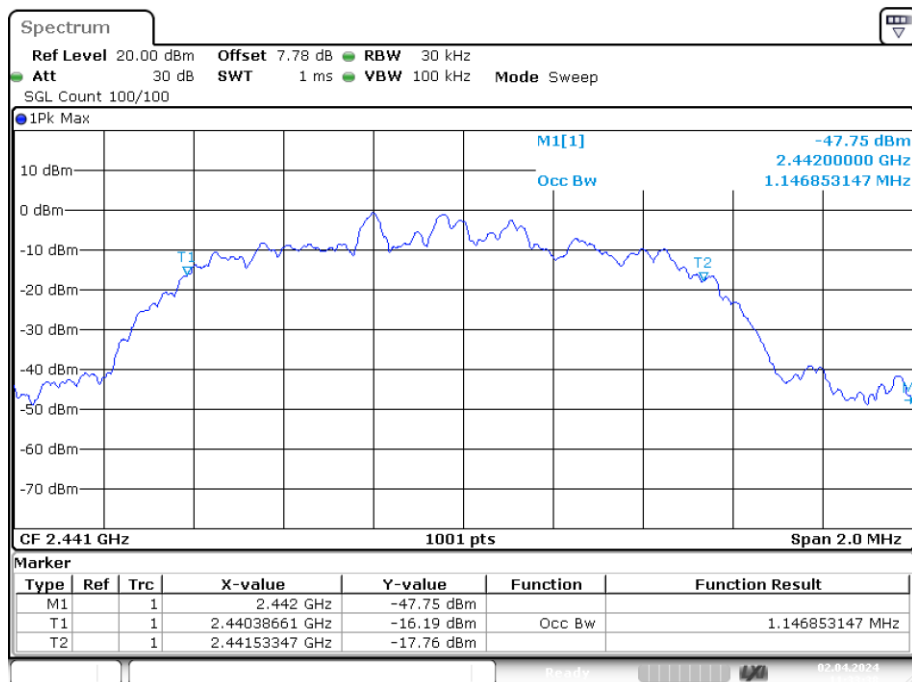

Date: 2.APR.2024 11:33:38

OBW NVNT 3-DH1 2480MHz Ant1

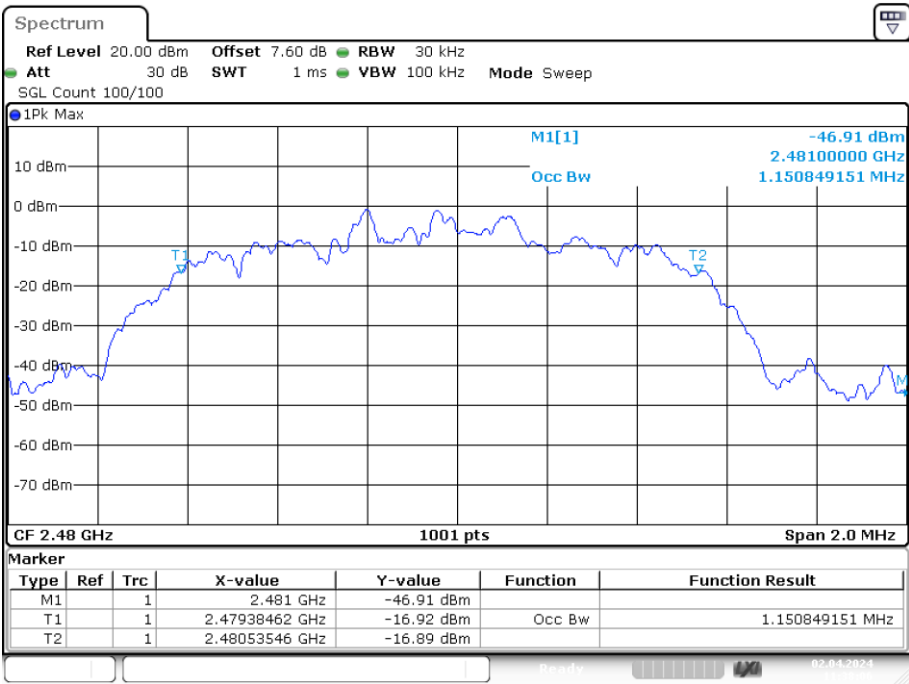

Date: 2.APR.2024 11:38:05

5. CARRIER FREQUENCY SEPARATION

5.1. Limit

Frequency hopping systems shall have hopping channel carrier frequencies separated by a minimum of 25 kHz or the 20 dB bandwidth of the hopping channel, whichever is greater. Alternatively, frequency hopping systems operating in the 2400-2483.5 MHz band may have hopping channel carrier frequencies that are separated by 25 kHz or two-thirds of the 20 dB bandwidth of the hopping channel, whichever is greater, provided the systems operate with an output power no greater than 125 mW


5.2. Test Procedure

The RF output of EUT was connected to the spectrum analyzer by RF cable and attenuator. The carrier frequency was measured by spectrum analyzer with 30kHz RBW and 100kHz VBW.

5.3. Test Result


Condition	Mode	Antenna	Hopping Freq1 (MHz)	Hopping Freq2 (MHz)	HFS (MHz)	Limit (MHz)	Verdict
NVNT	1-DH1	Ant1	2440.788	2441.798	1.01	0.872	Pass
NVNT	2-DH1	Ant1	2440.798	2441.794	0.996	0.82	Pass
NVNT	3-DH1	Ant1	2440.796	2441.798	1.002	0.819	Pass

CFS NVNT 1-DH1 2441MHz Ant1

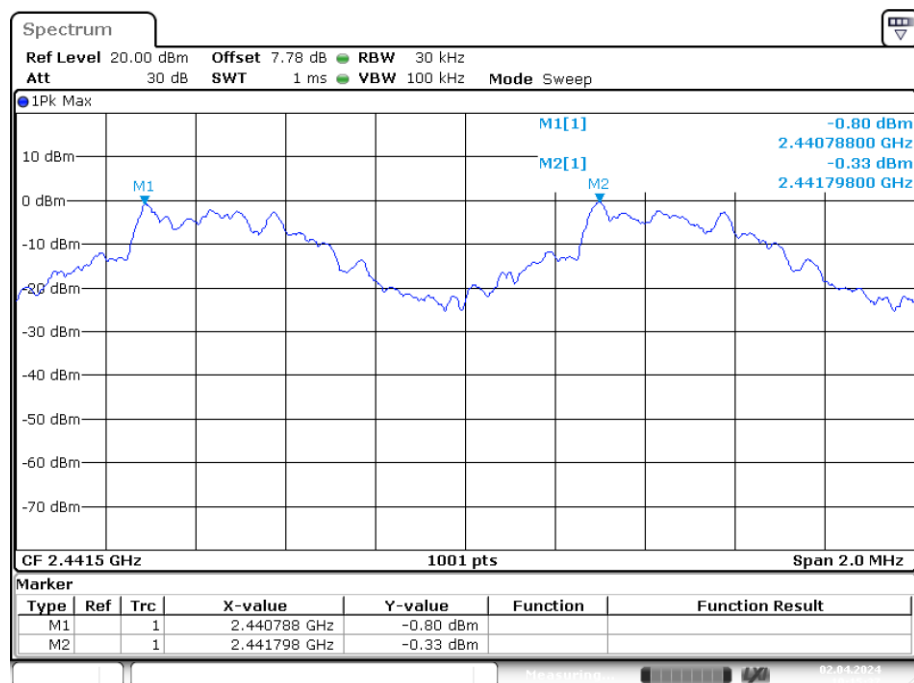


Date: 2.APR.2024 10:15:37

CFS NVNT 2-DH1 2441MHz Ant1

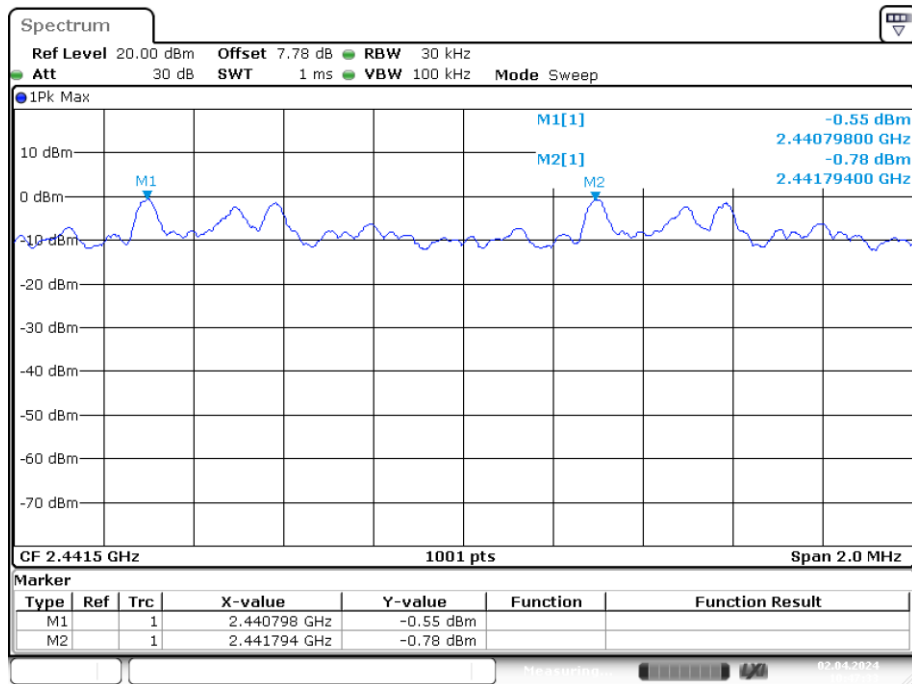

Date: 2.APR.2024 10:47:33

CFS NVNT 3-DH1 2441MHz Ant1

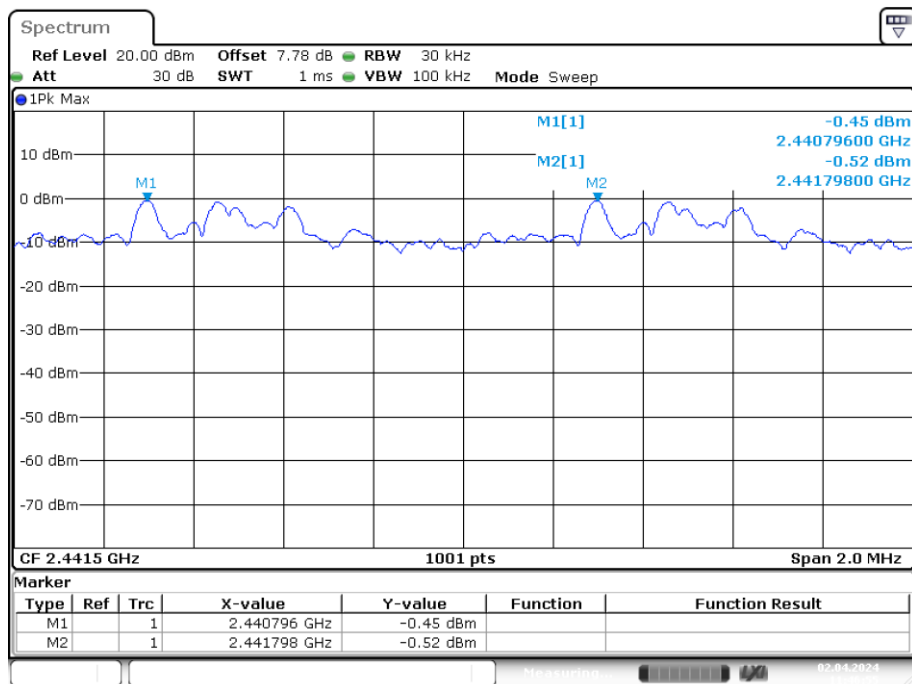

Date: 2.APR.2024 11:46:55

6. NUMBER OF HOPPING CHANNEL

6.1. Limit

Frequency hopping systems in the 2400-2483.5 MHz band shall use at least 15 channels


6.2. Test Procedure

The RF output of EUT was connected to the spectrum analyzer by RF cable and attenuator. The number of hopping channel was measured by spectrum analyzer with 100kHz RBW and 300KHz VBW.

6.3. Test Result


Condition	Mode	Hopping Number	Limit	Verdict
NVNT	1-DH1	79	15	Pass
NVNT	2-DH1	79	15	Pass
NVNT	3-DH1	79	15	Pass

Hopping No. NVNT 1-DH1 2441MHz Ant1

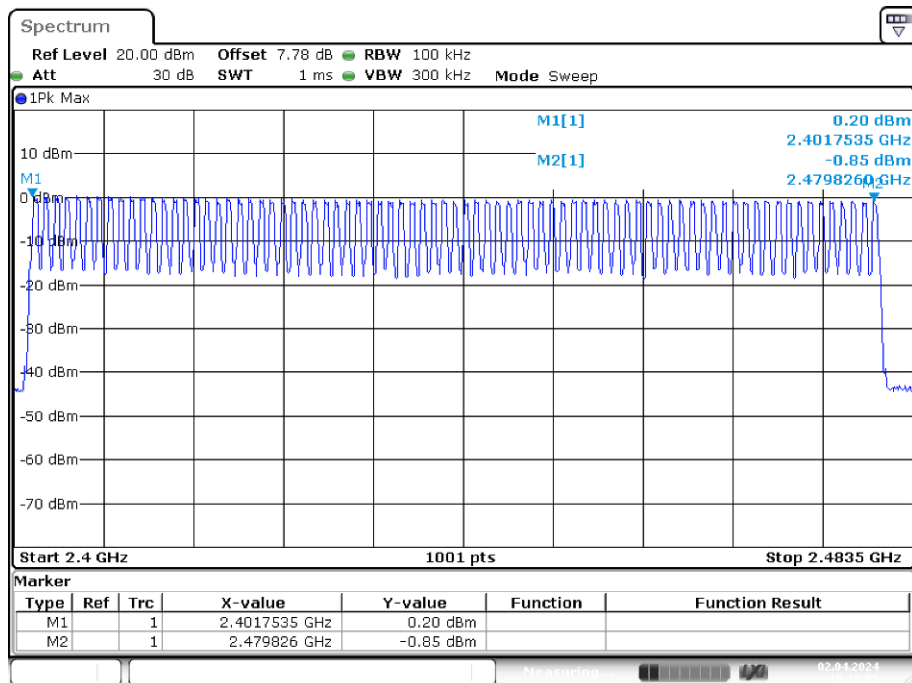


Date: 2.APR.2024 10:19:04

Hopping No. NVNT 2-DH1 2441MHz Ant1

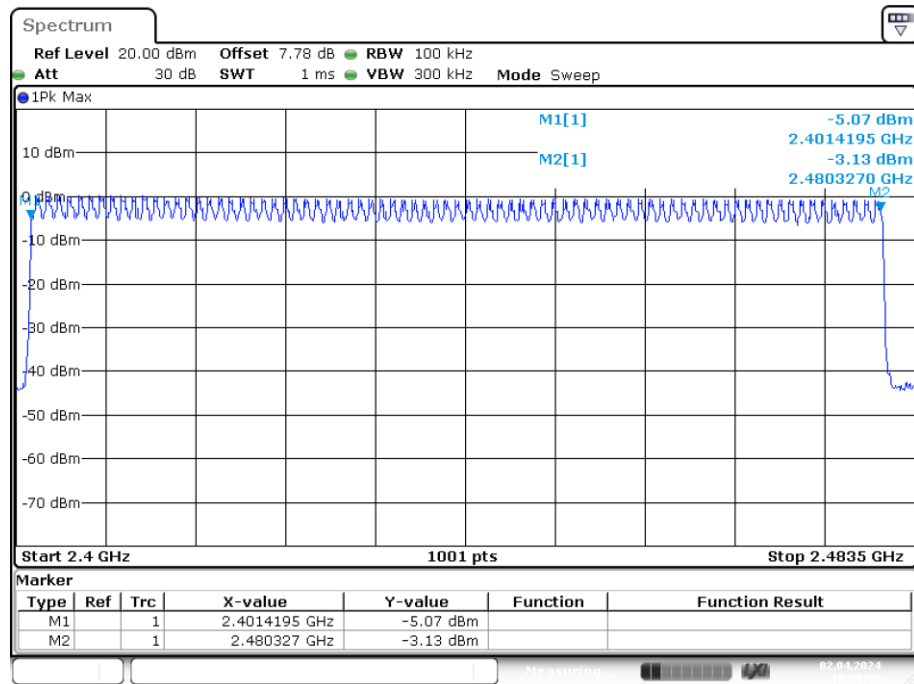

Date: 2.APR.2024 10:50:59

Hopping No. NVNT 3-DH1 2441MHz Ant1

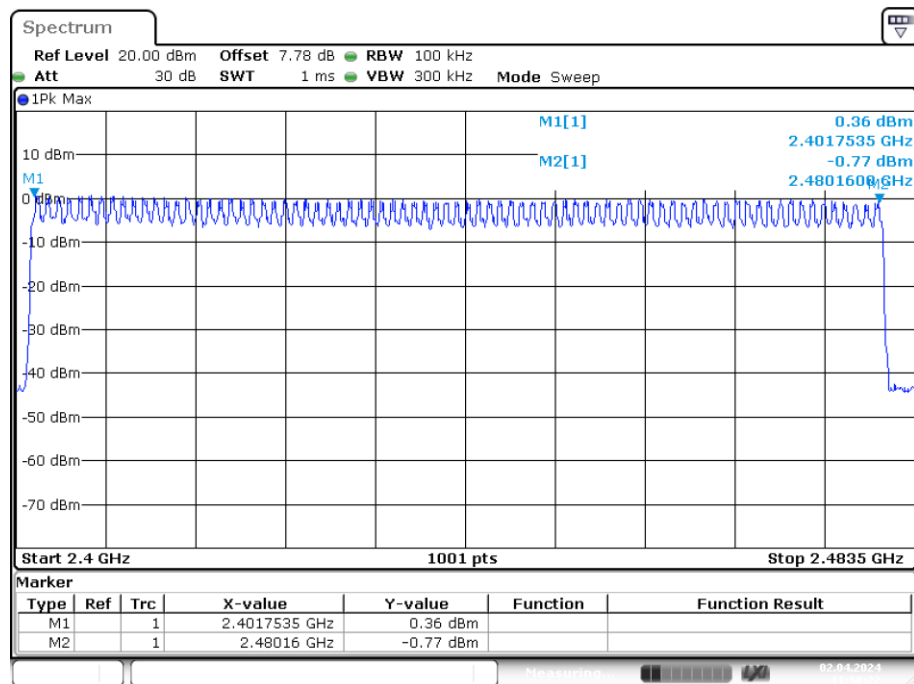

Date: 2.APR.2024 11:50:22

7. DWELL TIME

7.1. Test limit

Please refer section 15.247.

According to §15.247(a)(1)(iii), Frequency hopping systems operating in the 2400MHz-2483.5 MHz. The average time of occupancy on any frequency shall not greater than 0.4 s within period of 0.4 seconds multiplied by the number of hopping channel employed.

7.2. Test Procedure

7.2.1. Place the EUT on the table and set it in transmitting mode.

7.2.2. Remove the antenna from the EUT and then connect a low loss RF cable from the antenna port to the spectrum analyzer.

7.2.3. Set center frequency of spectrum analyzer = operating frequency.

7.2.4. Set the spectrum analyzer as RBW=1MHz, VBW=1MHz, Span = 0Hz, Sweep = auto.


7.2.5. Repeat above procedures until all frequency measured were complete.

7.3. Test Result

Condition	Mode	Frequency (MHz)	Antenna	Pulse Time (ms)	Total Dwell Time (ms)	Burst Count	Period Time (ms)	Limit (ms)	Verdict
NVNT	1-DH1	2441	Ant1	0.397	127.040	319	31600	400	Pass
NVNT	1-DH3	2441	Ant1	1.653	264.480	156	31600	400	Pass
NVNT	1-DH5	2441	Ant1	2.896	308.907	110	31600	400	Pass
NVNT	2-DH1	2441	Ant1	0.404	129.280	318	31600	400	Pass
NVNT	2-DH3	2441	Ant1	0.405	64.800	320	31600	400	Pass
NVNT	2-DH5	2441	Ant1	2.896	308.907	90	31600	400	Pass
NVNT	3-DH1	2441	Ant1	0.405	129.600	319	31600	400	Pass
NVNT	3-DH3	2441	Ant1	1.648	263.680	161	31600	400	Pass
NVNT	3-DH5	2441	Ant1	2.897	309.013	99	31600	400	Pass


Note: Total Dwell Time= Pulse Time* Burst Count

Dwell NVNT 1-DH1 2441MHz Ant1 One Burst

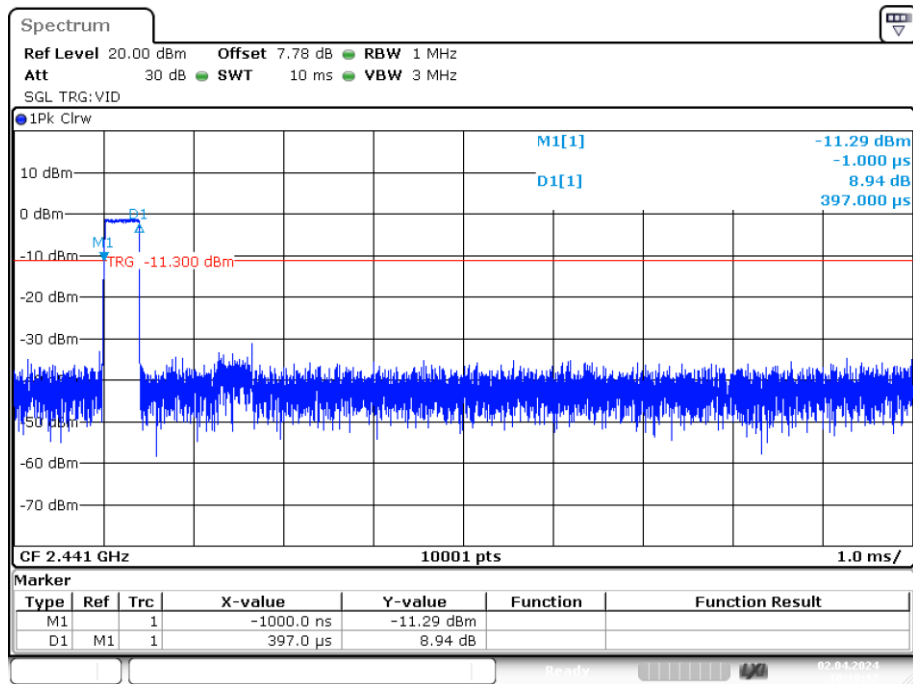


Date: 2.APR.2024 10:19:12

Dwell NVNT 1-DH1 2441MHz Ant1 Accumulated

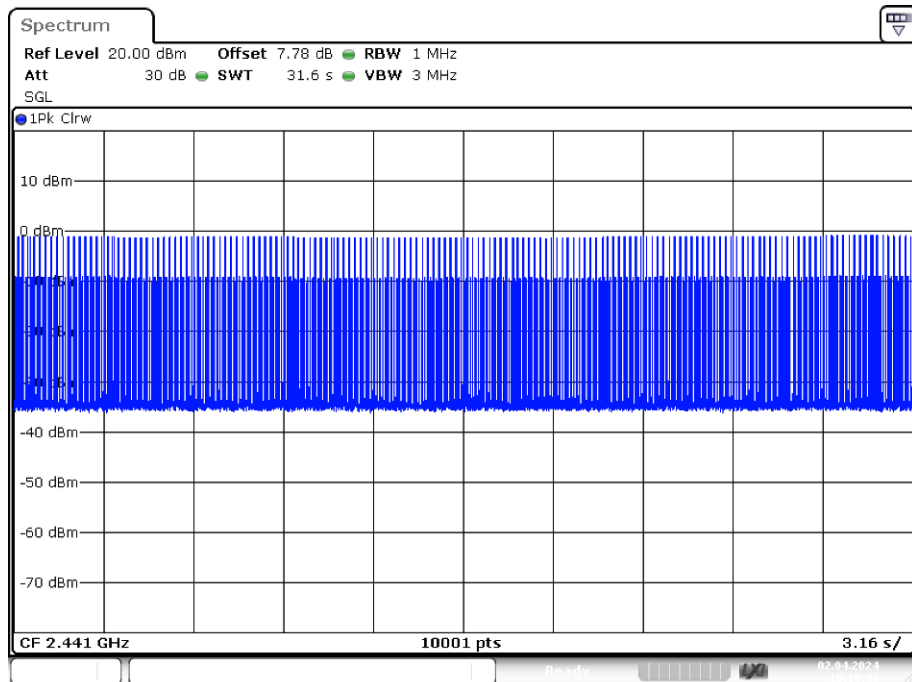


Date: 2.APR.2024 10:19:46

Dwell NVNT 1-DH3 2441MHz Ant1 One Burst

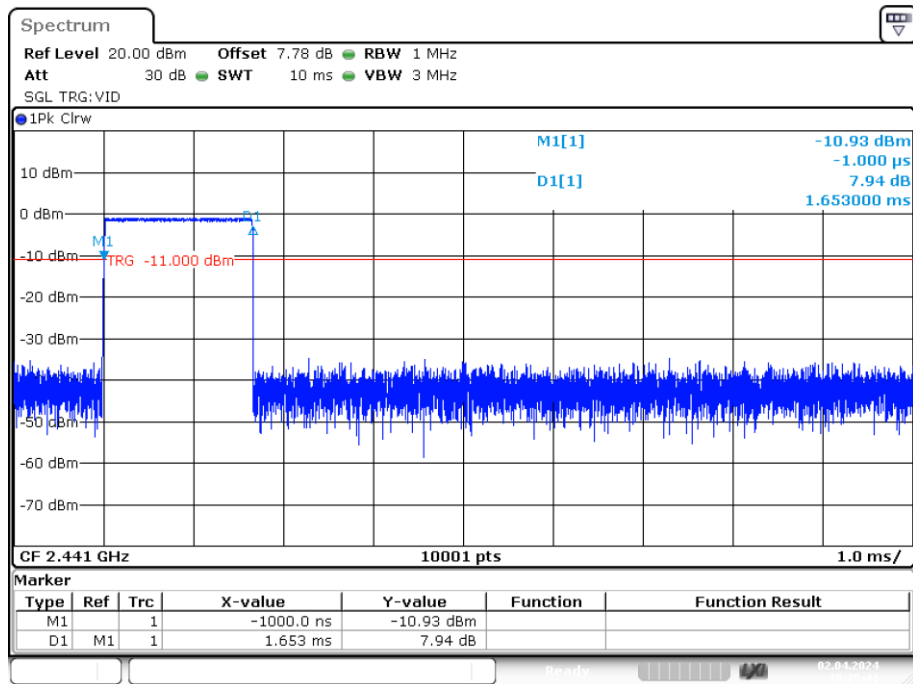


Date: 2.APR.2024 10:25:41

Dwell NVNT 1-DH3 2441MHz Ant1 Accumulated

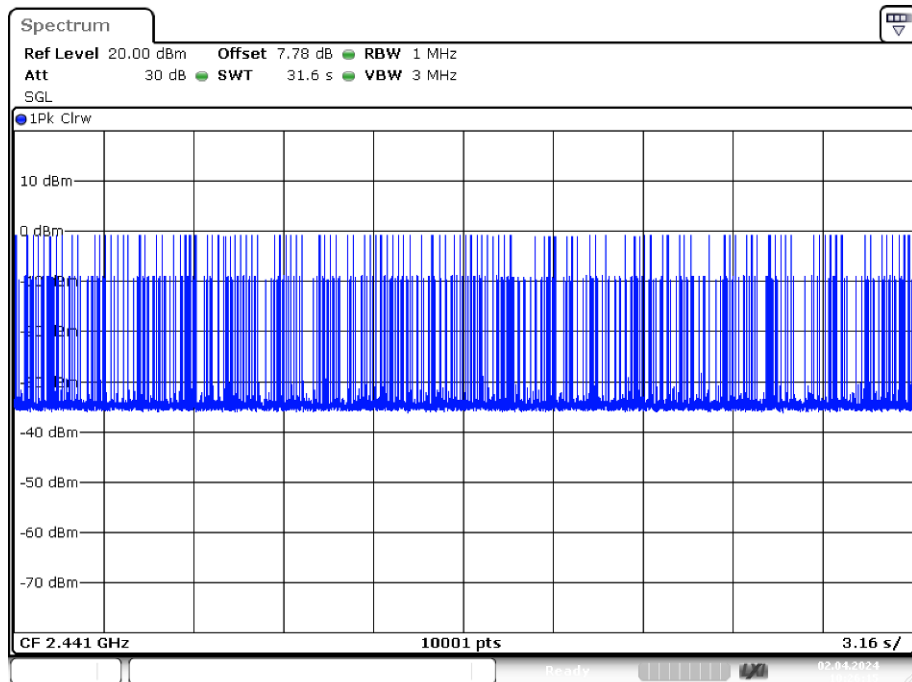


Date: 2.APR.2024 10:26:15

Dwell NVNT 1-DH5 2441MHz Ant1 One Burst

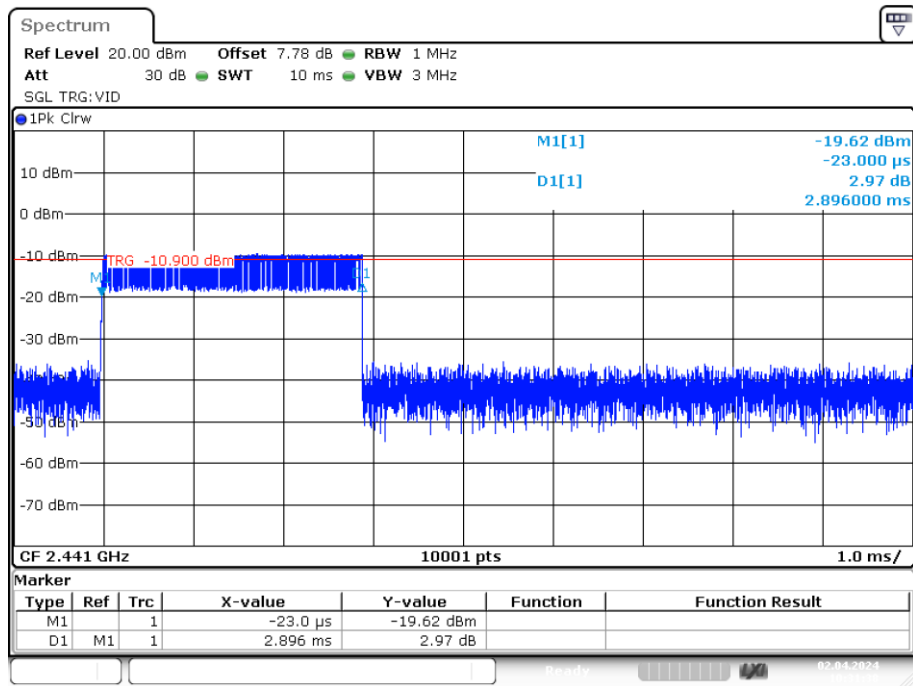


Date: 2.APR.2024 10:31:38

Dwell NVNT 1-DH5 2441MHz Ant1 Accumulated

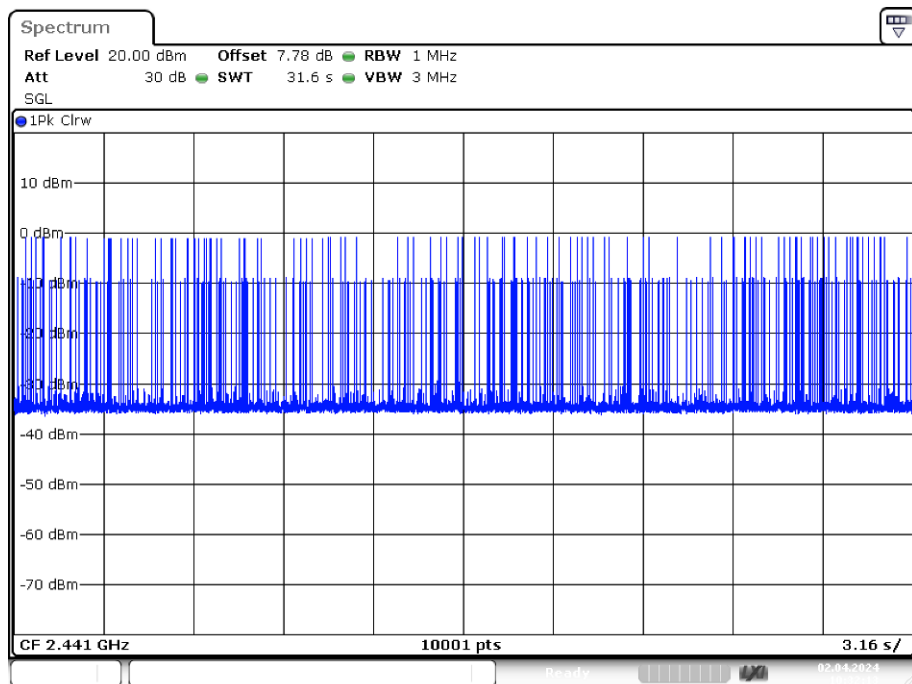


Date: 2.APR.2024 10:32:13

Dwell NVNT 2-DH1 2441MHz Ant1 One Burst

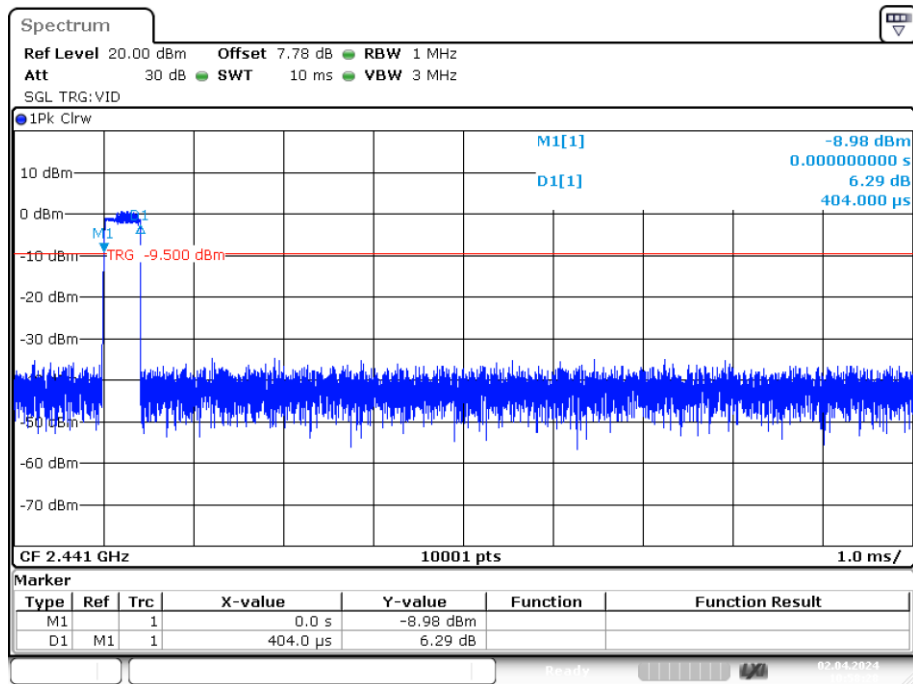


Date: 2.APR.2024 10:58:28

Dwell NVNT 2-DH1 2441MHz Ant1 Accumulated

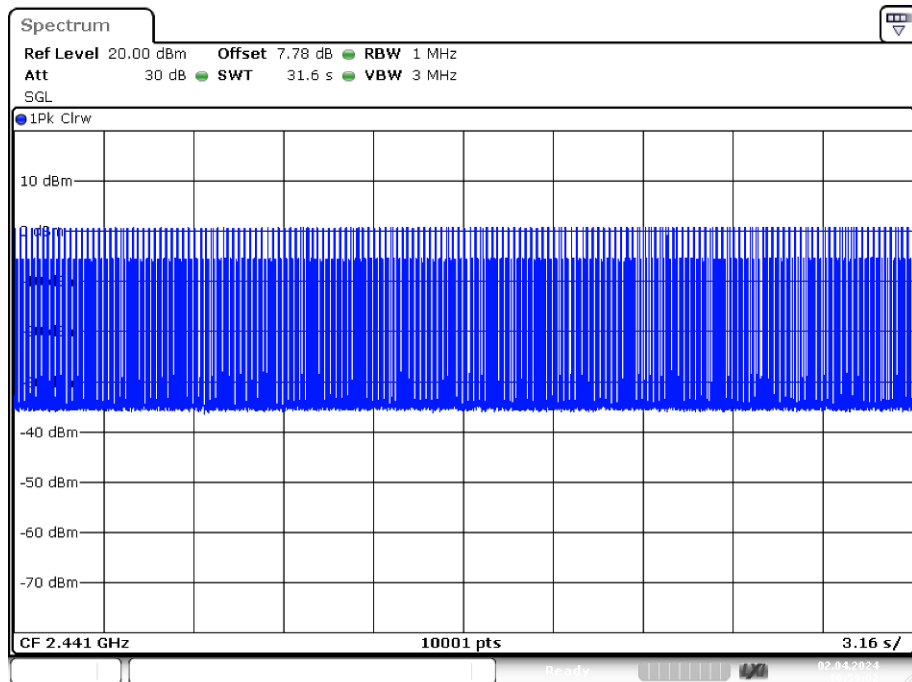


Date: 2.APR.2024 10:59:03

Dwell NVNT 2-DH3 2441MHz Ant1 One Burst

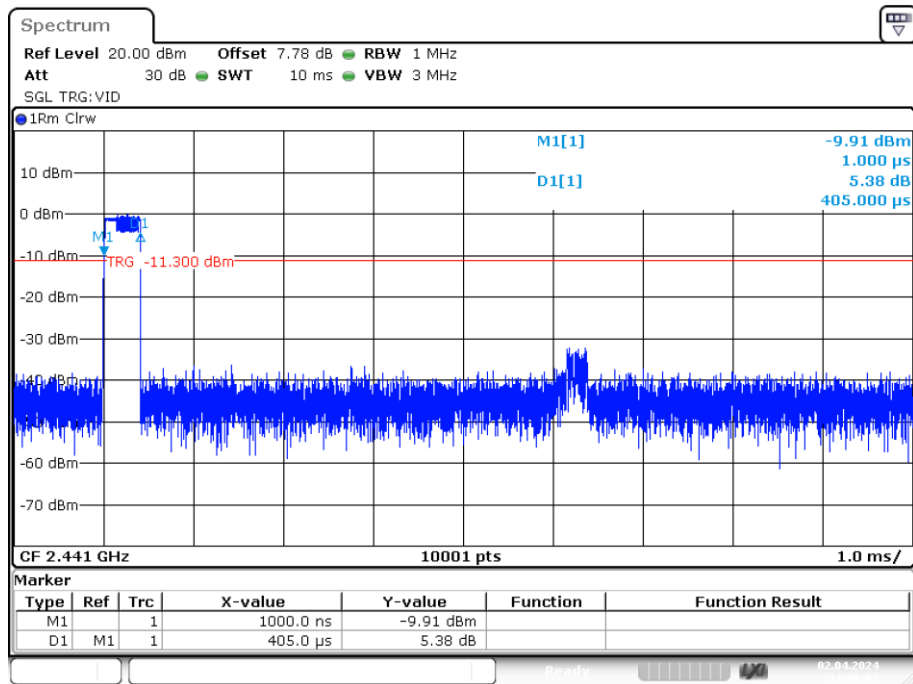


Date: 2.APR.2024 11:06:03

Dwell NVNT 2-DH3 2441MHz Ant1 Accumulated

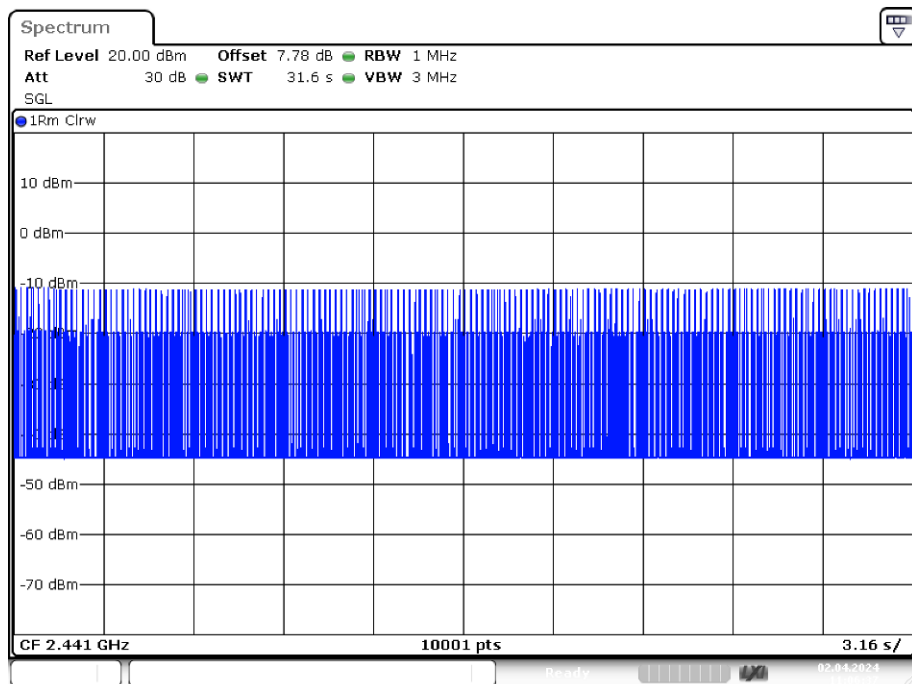


Date: 2.APR.2024 11:06:37

Dwell NVNT 2-DH5 2441MHz Ant1 One Burst

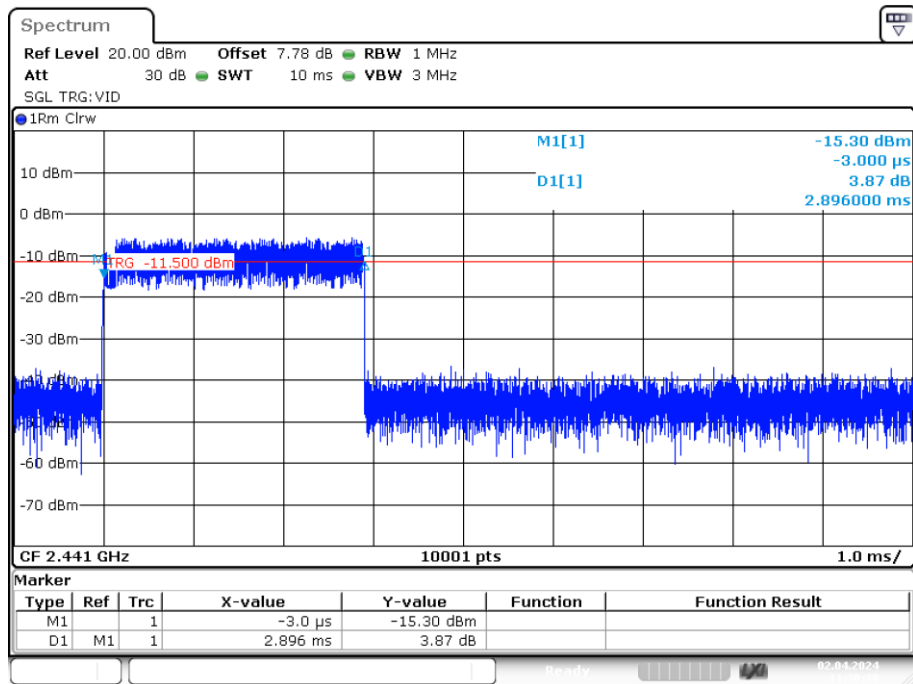


Date: 2.APR.2024 11:30:37

Dwell NVNT 2-DH5 2441MHz Ant1 Accumulated

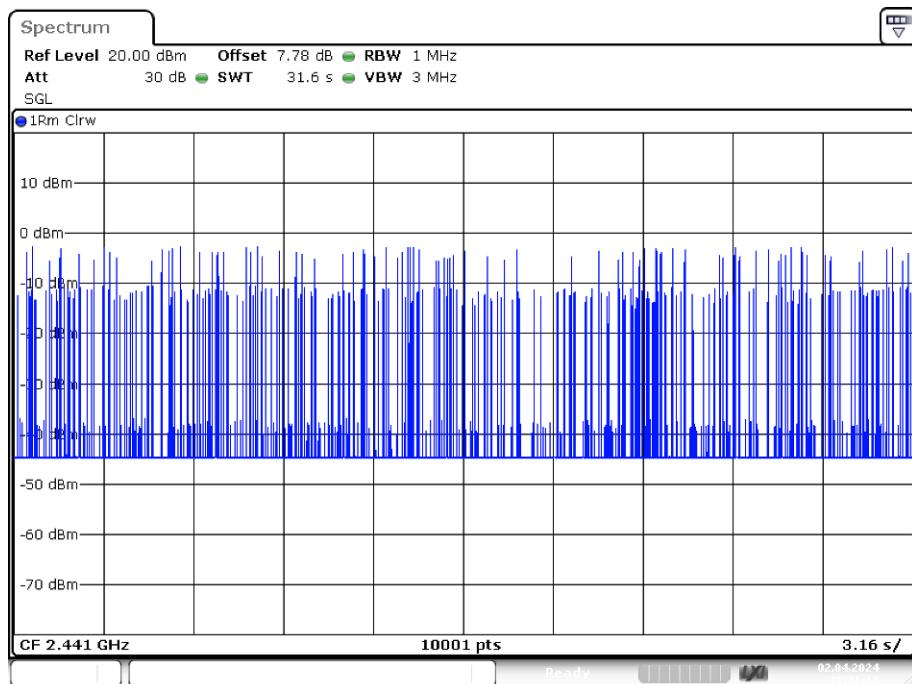


Date: 2.APR.2024 11:31:12

Dwell NVNT 3-DH1 2441MHz Ant1 One Burst

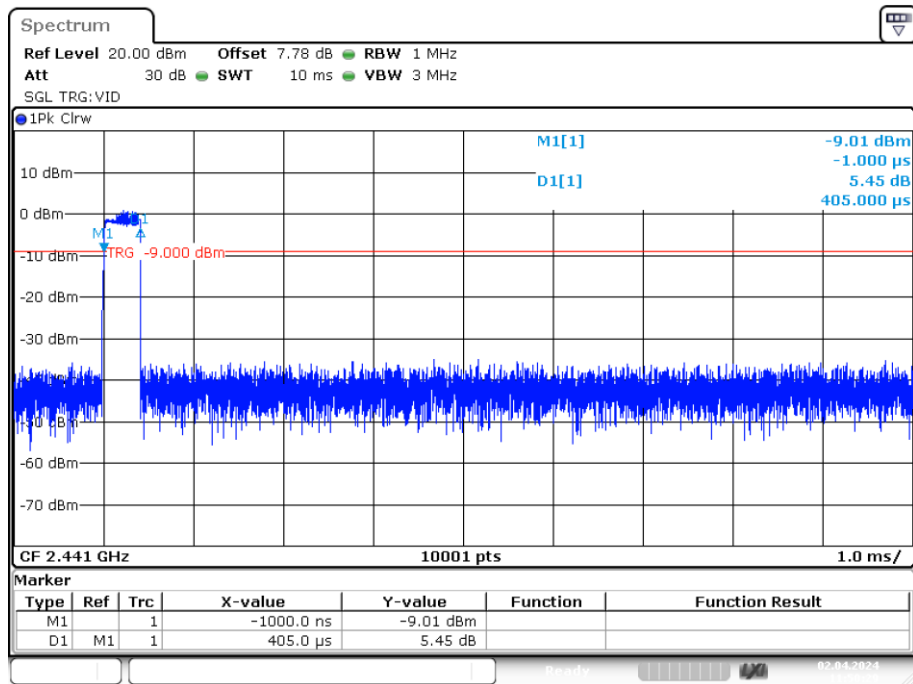


Date: 2.APR.2024 11:50:29

Dwell NVNT 3-DH1 2441MHz Ant1 Accumulated

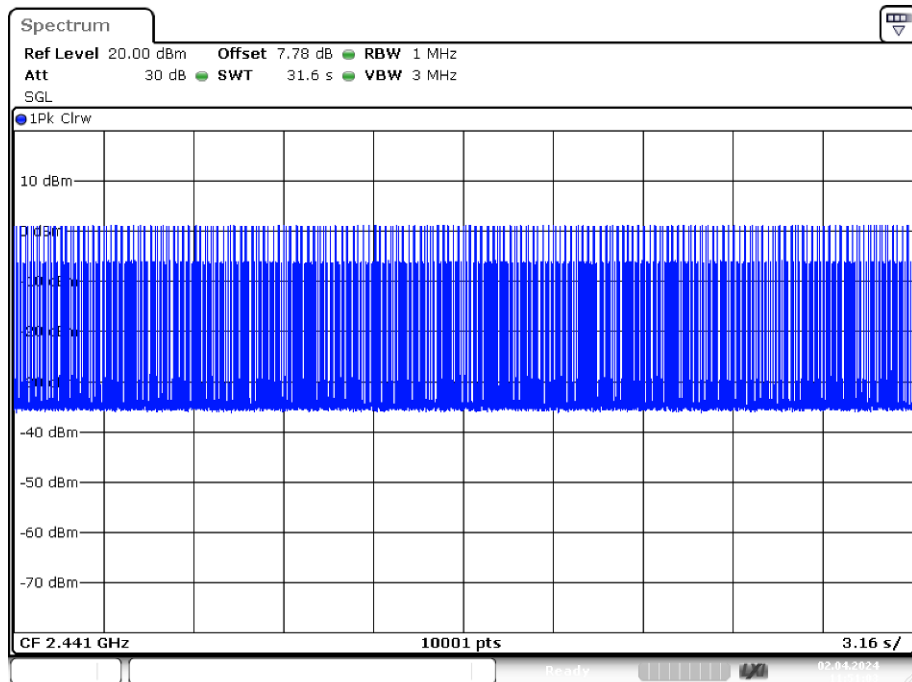


Date: 2.APR.2024 11:51:03

Dwell NVNT 3-DH3 2441MHz Ant1 One Burst

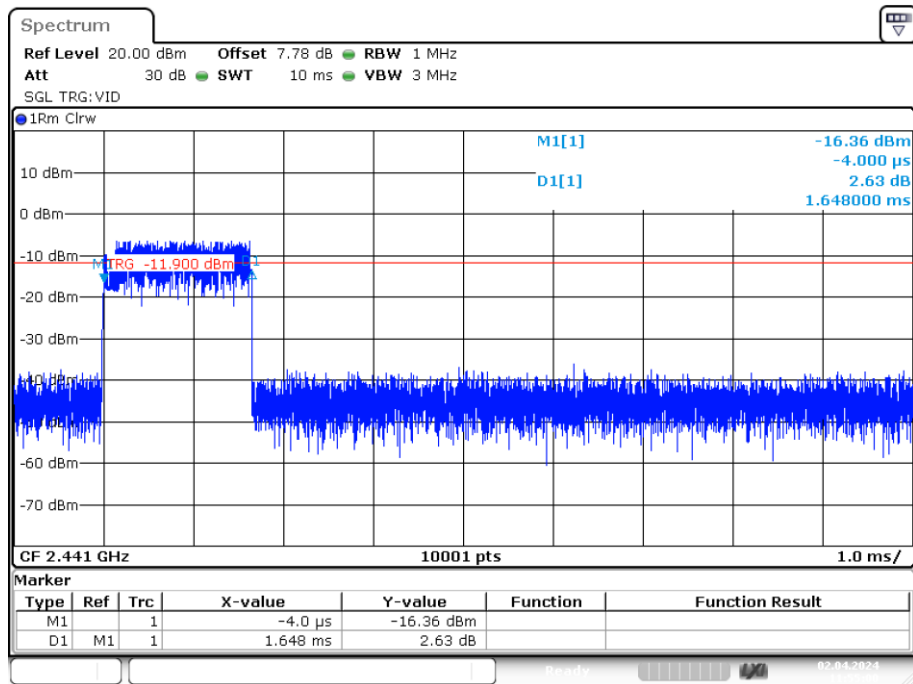


Date: 2.APR.2024 11:54:59

Dwell NVNT 3-DH3 2441MHz Ant1 Accumulated

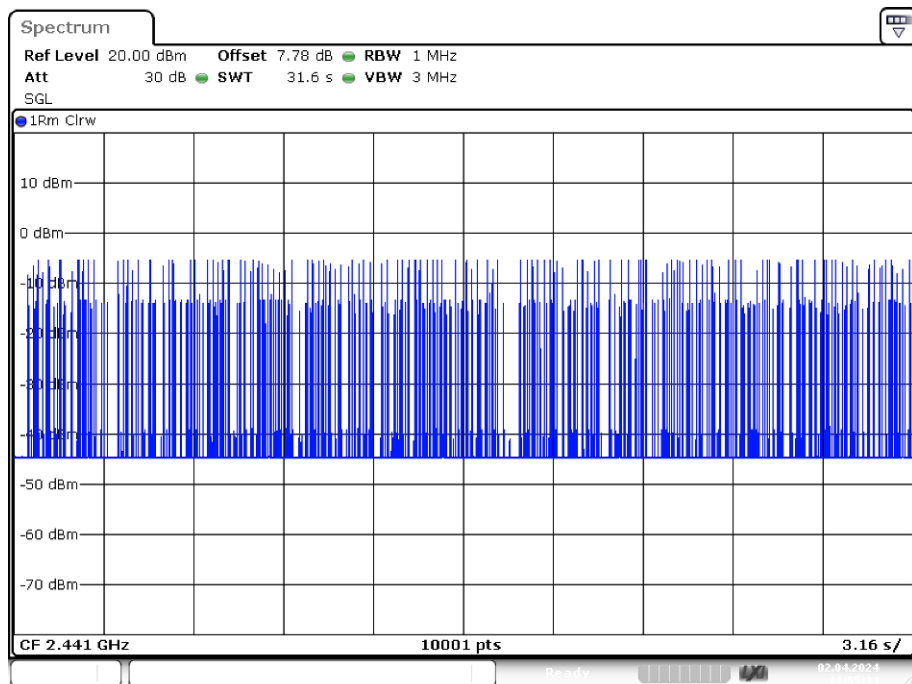


Date: 2.APR.2024 11:55:34

Dwell NVNT 3-DH5 2441MHz Ant1 One Burst

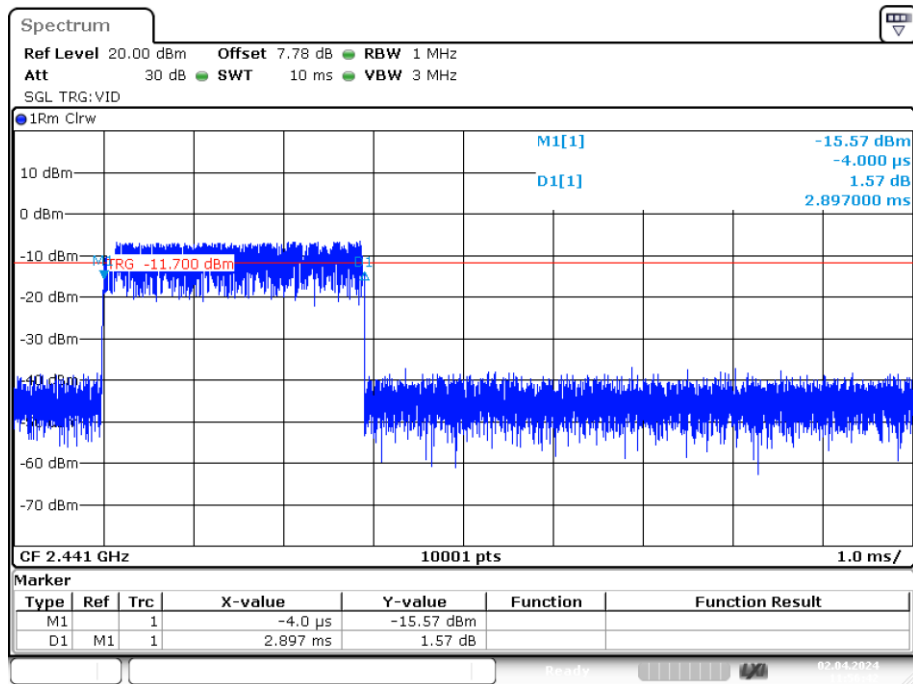

Date: 2.APR.2024 11:56:42

Dwell NVNT 3-DH5 2441MHz Ant1 Accumulated

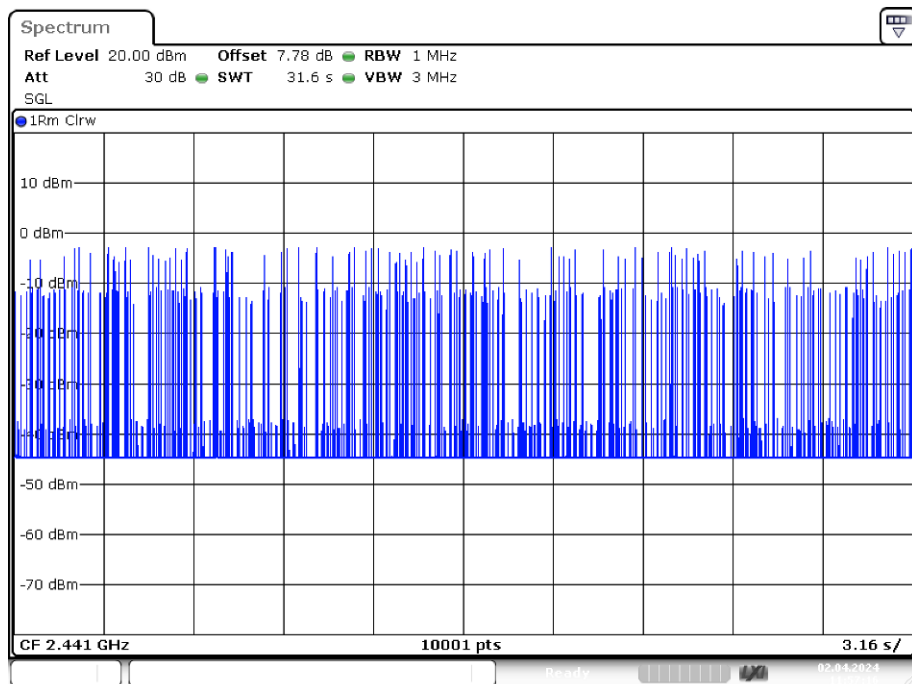

Date: 2.APR.2024 11:57:17

8. RADIATED EMISSIONS

8.1. Limit

All the emissions appearing within 15.205 restricted frequency bands shall not exceed the limits shown in 15.209, all the other emissions shall be at least 20dB below the fundamental emissions, or comply with 15.209 limits.

15.205 Restricted frequency band

MHz	MHz	MHz	GHz
0.090 - 0.110	16.42 - 16.423	399.9 - 410	4.5 - 5.15
¹ 0.495 - 0.505	16.69475 - 16.69525	608 - 614	5.35 - 5.46
2.1735 - 2.1905	16.80425 - 16.80475	960 - 1240	7.25 - 7.75
4.125 - 4.128	25.5 - 25.67	1300 - 1427	8.025 - 8.5
4.17725 - 4.17775	37.5 - 38.25	1435 - 1626.5	9.0 - 9.2
4.20725 - 4.20775	73 - 74.6	1645.5 - 1646.5	9.3 - 9.5
6.215 - 6.218	74.8 - 75.2	1660 - 1710	10.6 - 12.7
6.26775 - 6.26825	108 - 121.94	1718.8 - 1722.2	13.25 - 13.4
6.31175 - 6.31225	123 - 138	2200 - 2300	14.47 - 14.5
8.291 - 8.294	149.9 - 150.05	2310 - 2390	15.35 - 16.2
8.362 - 8.366	156.52475 - 156.52525	2483.5 - 2500	17.7 - 21.4
8.37625 - 8.38675	156.7 - 156.9	2690 - 2900	22.01 - 23.12
8.41425 - 8.41475	162.0125 - 167.17	3260 - 3267	23.6 - 24.0
12.29 - 12.293	167.72 - 173.2	3332 - 3339	31.2 - 31.8
12.51975 - 12.52025	240 - 285	3345.8 - 3358	36.43 - 36.5
12.57675 - 12.57725	322 - 335.4	3600 - 4400	(²)


15.209 Limit

FREQUENCY MHz	DISTANCE Meters	FIELD STRENGTHS LIMIT	
		μV/m	dB(μV)/m
0.009-0.490	300	2400/F(KHz)	/
0.490-1.705	30	24000/F(KHz)	/
1.705-30	30	30	29.5
30 ~ 88	3	100	40.0
88 ~ 216	3	150	43.5
216 ~ 960	3	200	46.0
960 ~ 1000	3	500	54.0
Above 1000	3	74.0 dB(μV)/m (Peak) 54.0 dB(μV)/m (Average)	


Note: The peak limit is 20 dB higher than the average limit

8.2. Block Diagram of Test setup


8.2.1 In 3m Anechoic Chamber Test Setup Diagram for below 30MHz

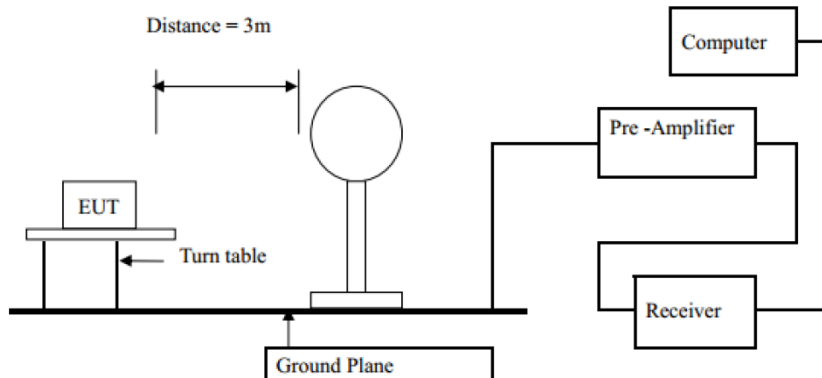

8.2.1 In 3m Anechoic Chamber Test Setup Diagram for below 1GHz

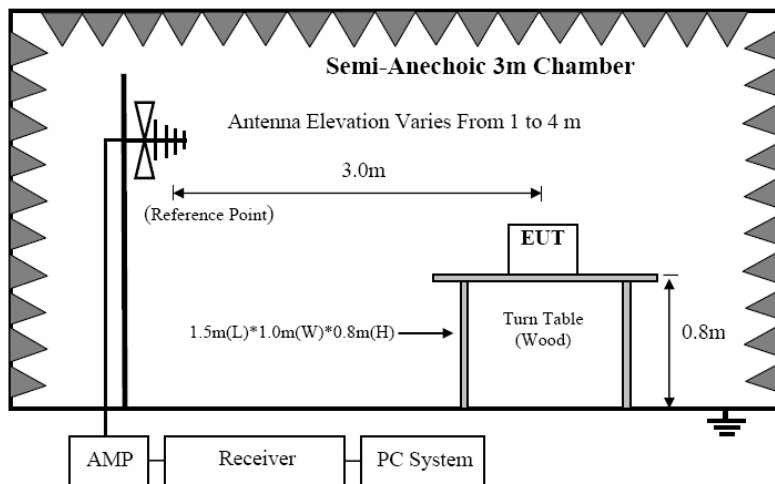

8.2.2 In 3m Anechoic Chamber Test Setup Diagram for frequency above 1GHz

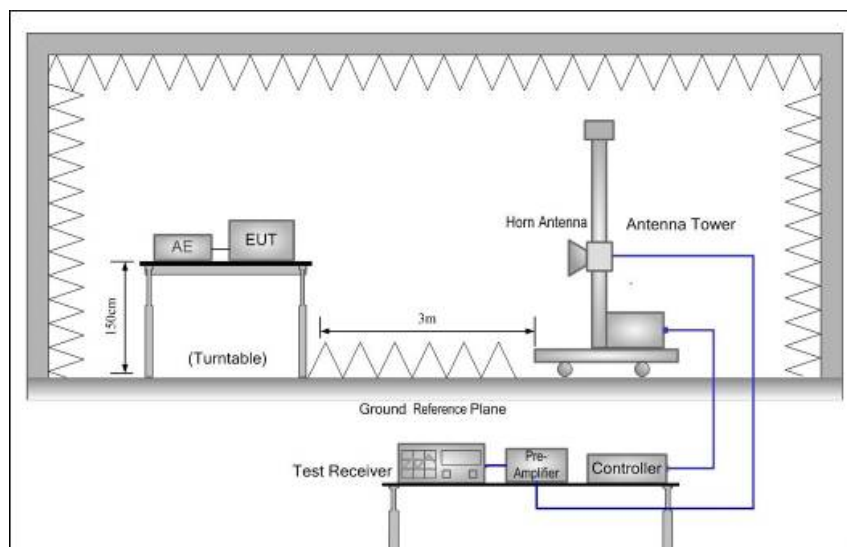

Note: For harmonic emissions test a appropriate high pass filter was inserted in the input port of AMP.

8.3. Test Procedure

- (1) EUT was placed on a non-metallic table, 80 cm above the ground plane inside a semi-anechoic chamber.
- (2) Setup EUT and simulator as shown in section 1.4 and 6.1
- (3) Test antenna was located 3m from the EUT on an adjustable mast. Below pre-scan procedure was first performed in order to find prominent radiated emissions.
 - (a) Change work frequency or channel of device if practicable.
 - (b) Change modulation type of device if practicable.
 - (c) Rotated EUT though three orthogonal axes to determine the attitude of EUT arrangement produces highest emissions
- (4) Spectrum frequency from 9KHz to 25GHz (tenth harmonic of fundamental frequency) was investigated
- (5) For final emissions measurements at each frequency of interest, the EUT were rotated and the antenna height was varied between 1m and 4m in order to maximize the emission. Measurements in both horizontal and vertical polarities were made and the data was recorded. In order to find the maximum emission, the relative positions of equipments and all of the interface cables were changed according to ANSI C63.10:2013on Radiated Emission test.
- (6) For emissions above 1GHz, both Peak and Average level were measured with Spectrum Analyzer, and the RBW is set at 1MHz, VBW is set at 3MHz for Peak measure; RBW is set at 1MHz, VBW is set at 10Hz for Average measure.

8.4. Test Result


We have scanned the 10th harmonic from 9KHz to the EUT's highest frequency.
Detailed information please see the following page.

From 9KHz to 30MHz: Conclusion: PASS

Note: The amplitude of spurious emissions which are attenuated by more than 20dB below the permissible value has no need to be reported.

From 30MHz to 1000MHz: Conclusion: PASS


Vertical:

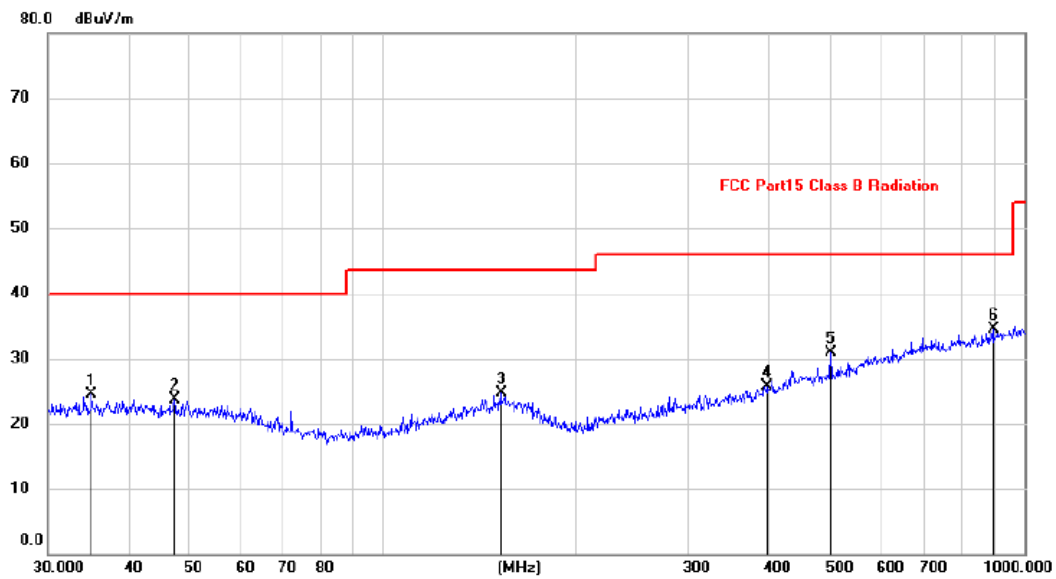

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin	Antenna Height	Table Degree		
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	cm	degree	Comment
1		35.2265	10.82	13.69	24.51	40.00	-15.49	peak			
2		47.3753	9.79	13.97	23.76	40.00	-16.24	peak			
3		152.7712	9.85	14.76	24.61	43.50	-18.89	peak			
4		397.4940	9.90	15.89	25.79	46.00	-20.21	peak			
5		500.1257	13.04	17.92	30.96	46.00	-15.04	peak			
6	*	895.7393	10.93	23.56	34.49	46.00	-11.51	peak			

Note: 1. *: Maximum data; x: Over limit; !: over margin.

2. Measurement = Reading Level + Correct Factor; Correct Factor = Antenna Factor + Cable Loss.

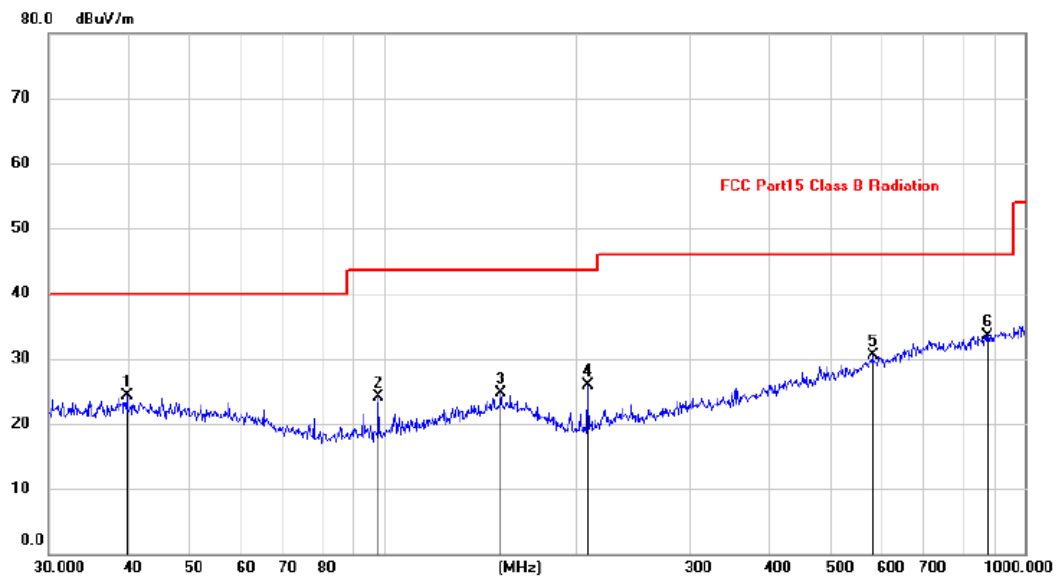Horizontal:

No.	Mk.	Freq.	Reading	Correct	Measure-	Limit	Margin	Antenna	Table	
		MHz	Level	Factor	ment			Height	Degree	
			dBuV	dB	dBuV/m	dBuV/m	dB	cm	degree	Comment
1		39.8123	9.93	14.39	24.32	40.00	-15.68	peak		
2		98.2107	13.56	10.60	24.16	43.50	-19.34	peak		
3		152.1831	10.00	14.77	24.77	43.50	-18.73	peak		
4		207.9960	15.15	10.71	25.86	43.50	-17.64	peak		
5		580.2955	10.95	19.49	30.44	46.00	-15.56	peak		
6	*	877.0904	10.21	23.30	33.51	46.00	-12.49	peak		

Note: 1. *: Maximum data; x: Over limit; !: over margin.

2. Measurement=Reading Level+Correct Factor; Correct Factor=Antenna Factor+Cable Loss.

Remark: All modes have been tested, and only worst data of GFSK 2402MHz was listed in this report.

From 1G-25GHz


Test Mode: GFSK TX Low									
Freq (MHz)	Read Level (dBuV/m)	Polar (H/V)	Antenna Factor (dB/m)	Cable loss(dB)	Amp Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
4804	47.58	V	33.95	10.18	34.26	57.45	74	-16.55	PK
4804	37.82	V	33.95	10.18	34.26	47.69	54	-6.31	AV
7206	/	/	/	/	/	/	/	/	/
9608	/	/	/	/	/	/	/	/	/
4804	46.73	H	33.95	10.18	34.26	56.60	74	-17.40	PK
4804	35.29	H	33.95	10.18	34.26	45.16	54	-8.84	AV
7206	/	/	/	/	/	/	/	/	/
9608	/	/	/	/	/	/	/	/	/
Test Mode: GFSK TX Mid									
4882	43.73	V	33.93	10.2	34.29	53.57	74	-20.43	PK
4882	36.51	V	33.93	10.2	34.29	46.35	54	-7.65	AV
7323	/	/	/	/	/	/	/	/	/
9764	/	/	/	/	/	/	/	/	/
4882	43.13	H	33.93	10.2	34.29	52.97	74	-21.03	PK
4882	36.49	H	33.93	10.2	34.29	46.33	54	-7.67	AV
7323	/	/	/	/	/	/	/	/	/
9764	/	/	/	/	/	/	/	/	/
Test Mode: GFSK TX High									
4960	45.06	V	33.93	10.2	34.29	54.90	74	-19.10	PK
4960	34.01	V	33.93	10.2	34.29	43.85	54	-10.15	AV
7440	/	/	/	/	/	/	/	/	/
9920	/	/	/	/	/	/	/	/	/
4960	43.33	H	33.93	10.2	34.29	53.17	74	-20.83	PK
4960	32.48	H	33.93	10.2	34.29	42.32	54	-11.68	AV
7440	/	/	/	/	/	/	/	/	/
9920	/	/	/	/	/	/	/	/	/

Note:

- 1, Result = Read level + Antenna factor + cable loss-Amp factor
2, All the other emissions not reported were too low to read and deemed to comply with FCC limit.


Conducted RF Spurious Emission

Tx. Spurious NVNT 1-DH1 2402MHz Ant1 Emission

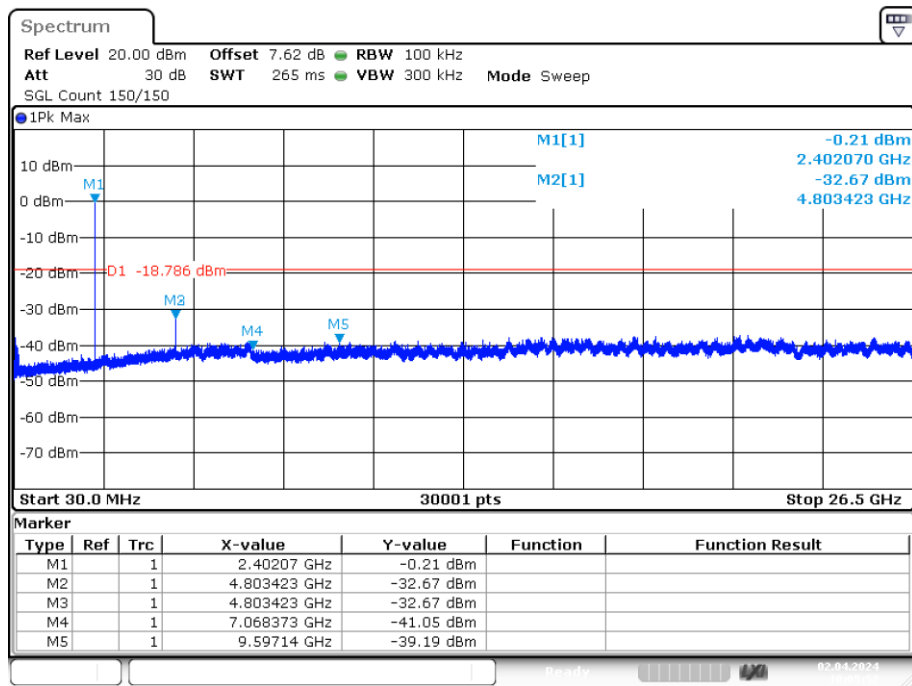


Date: 2.APR.2024 10:05:52

Tx. Spurious NVNT 1-DH1 2441MHz Ant1 Emission

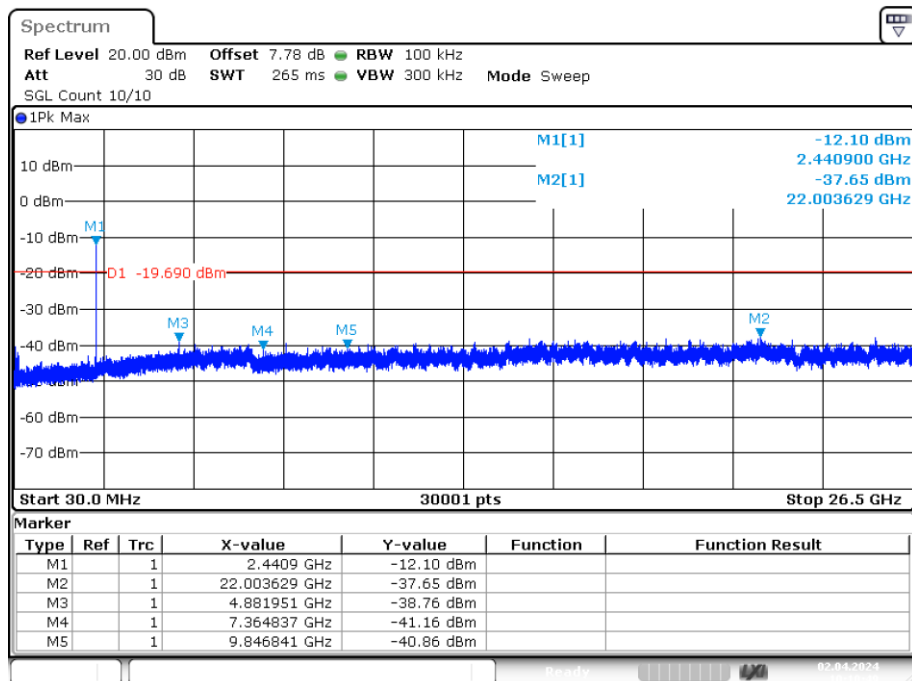


Date: 2.APR.2024 10:10:48

Tx. Spurious NVNT 1-DH1 2480MHz Ant1 Emission

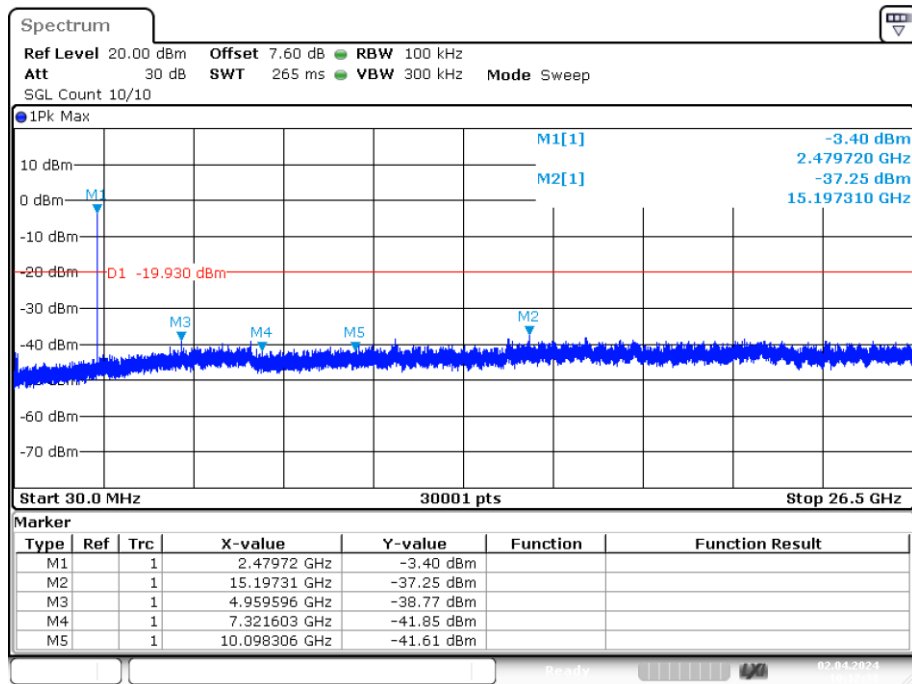

Date: 2.APR.2024 10:12:37

Tx. Spurious NVNT 2-DH1 2402MHz Ant1 Emission

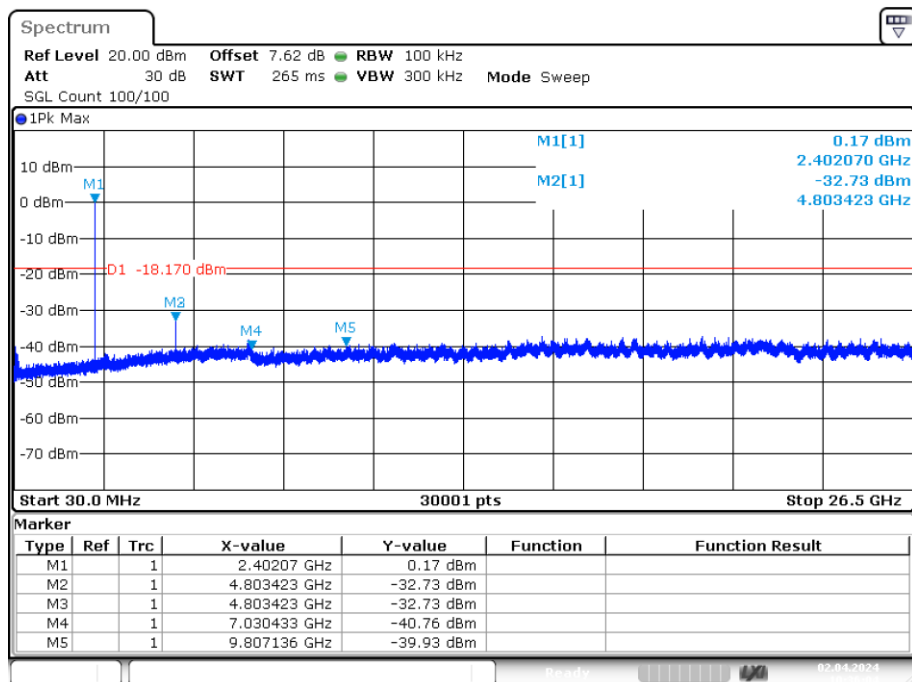

Date: 2.APR.2024 10:36:04