



**TEST REPORT OF A 2.4 GHZ LOW POWER WLAN
INTEGRATED PCMCIA CARD, BRAND AGERE,
TYPE PC24-11-FC/R, IN CONFORMITY WITH
47 CFR PART 15 (2001-12-18).**

TNO Electronic Products & Services (EPS) B.V.
P.O. Box 15
9822 ZG Niekerk (NL)
Smidshornerweg 18
9822 TL Niekerk (NL)

Telephone: +31 594 505005
Telefax: +31 594 504804

E-mail: info@eps.tno.nl



Test specification(s): 47 CFR Part 15 (2001-12-18)
Description of EUT: 2.4 GHz low power WLAN integrated PCMCIA card
Manufacturer: Agere Systems Nederland B.V.
Brand mark: Agere
Type: PC24-11-FC/R
FCC ID: IMRWLPC2411R

MEASUREMENT/TECHNICAL REPORT

Agere Systems Nederland B.V.

Model : PC24-11-FC/R

FCC ID: IMRWLPC2411R

April 29, 2002

This report concerns:	Original grant/certification	Class 2 change	Verification
Equipment type:	Direct Sequence Spread Spectrum Transceiver		
Deferred grant requested per 47 CFR 0.457(d)(1)(ii) ?	Yes	No	
Report prepared by:	Name	: P.A.J.M. Robben, B.Sc.E.E.	
	Company name	: TNO Electronic Products & Services (EPS) B.V.	
	Address	: Smidshornerweg 18	
	Postal code/city	: 9822 ZG Niekerk	
	Mailing address	: P.O. Box 15	
	Postal code/city	: 9822 TL Niekerk	
	Country	: The Netherlands	
	Telephone number	: + 31 594 505 005	
	Telefax number	: + 31 594 504 804	
	E-mail	: info@eps.tno.nl	

The data taken for this test and report herein was done in accordance with 47 CFR Part 15.247 and the measurement procedures of ANSI C63.4-1992. TNO Electronic Products & Services (EPS) B.V. at Niekerk, The Netherlands, certifies that the data is accurate and contains a true representation of the emission profile of the Equipment Under Test (EUT) on the date of the test as noted in the test report. I have reviewed the test report and find it to be an accurate description of the test(s) performed and the EUT so tested.

Date: April 29, 2002

Signature:

P. de Beer
TNO Electronic Products & Services (EPS) B.V.



Test specification(s): 47 CFR Part 15 (2001-12-18)
Description of EUT: 2.4 GHz low power WLAN integrated PCMCIA card
Manufacturer: Agere Systems Nederland B.V.
Brand mark: Agere
Type: PC24-11-FC/R
FCC ID: IMRWLPC2411R

Description of test item

Test item : 2.4 GHz low power WLAN integrated PCMCIA card
Manufacturer : Agere Systems Nederland B.V.
Brand : Agere
Type : PC24-11-FC/R
Serial number : 02UT03640001
Revision : n.a.
Receipt number : 2
Receipt date : March 25, 2002

Applicant information

Applicant's representative : Mr. M. Koop
Company : Agere Systems Nederland B.V.
Address : Zadelstede 1-10
Postal code : 3431 JZ
City : Nieuwegein
PO-box : 755
Postal code : 3430 AP
City : Nieuwegein
Country : The Netherlands
Telephone number : +31 30 607 6520
Telefax number : +31 30 609 7556

Test(s) performed

Location : Niekerk
Test(s) started : March 25, 2002
Test(s) completed : April 29, 2002
Purpose of test(s) : Type approval / certification
Test specification(s) : 47 CFR Part 15 (2001-12-18)

Test engineer : O.H. Hoekstra

Report written by : P.A.J.M. Robben, B.Sc.E.E.

Project leader : P.A.J.M. Robben, B.Sc.E.E.

This report is in conformity with NEN-EN-ISO/IEC 17025: 2000.

This report shall not be reproduced, except in full, without the written permission of TNO Electronic Products & Services (EPS) B.V.
The test results relate only to the item(s) tested.



Test specification(s): 47 CFR Part 15 (2001-12-18)
Description of EUT: 2.4 GHz low power WLAN integrated PCMCIA card
Manufacturer: Agere Systems Nederland B.V.
Brand mark: Agere
Type: PC24-11-FC/R
FCC ID: IMRWLPC2411R

Table of contents

1	General information.....	5
1.1	Product description	5
1.2	Related submittal(s) and/or Grant(s)	5
1.3	Tested system details	6
1.3.1	System configuration.....	6
1.4	Test methodology	7
1.5	Test facility	7
1.6	Product labeling.....	7
1.7	System test configuration	8
1.7.1	Justification.....	8
1.7.2	EUT exercise software.....	8
1.8	Special accessories	8
1.9	Equipment modifications.....	9
1.10	Configuration of the tested system	9
1.11	Block diagram(s) of the EUT	9
2	Radiated emission data	10
2.1	Test results with EUT operating in receive mode on channel 1.....	10
2.2	Test results with EUT operating in receive mode on channel 6.....	11
2.3	Test results with EUT operating in receive mode on channel 11.....	12
2.4	Test results with EUT operating in transmit mode on channel 1.....	13
2.5	Test results with EUT operating in transmit mode on channel 6.....	14
2.6	Test results with EUT operating in transmit mode on channel 11.....	15
3	Conducted emission data.....	16
4	Test results of measurements in conformity with 47 CFR Part 15.247	17
4.1	Minimum 6 dB bandwidth.....	17
4.2	Maximum peak output power.....	18
4.2.1	Test results for fixed point-to-point operation.	18
4.2.2	Test results for point-to-multipoint and other types of operation.	19
4.3	Radiated emission data outside restricted bands	20
4.4	Conducted emission data outside restricted bands	21
4.5	Peak power spectral density	22
4.6	Processing gain.....	23
5	Plots of measurement data.....	24
5.1	Minimum 6 dB bandwidth.....	25
5.2	Conducted emission data outside restricted bands	29
5.3	Peak power spectral density	31
6	List of utilized test equipment	35



Test specification(s): 47 CFR Part 15 (2001-12-18)
Description of EUT: 2.4 GHz low power WLAN integrated PCMCIA card
Manufacturer: Agere Systems Nederland B.V.
Brand mark: Agere
Type: PC24-11-FC/R
FCC ID: IMRWLPC2411R

1 General information

1.1 Product description

The 2.4 GHz low power WLAN integrated PCMCIA card, brand Agere, type PC24-11-FC/R, is designed to operate in the 2.4 GHz ISM frequency band, channels 1 to 11 (2412 MHz to 2462 MHz), as specified by the Federal Communications Commission in the USA.

The 2.4 GHz low power WLAN integrated PCMCIA card, brand Agere, type PC24-11-FC/R, utilizes Direct Sequence Spread Spectrum (DSSS) technology.

The 2.4 GHz low power WLAN integrated PCMCIA card, brand Agere, type PC24-11-FC/R, is intended for use with external antennas which are to be connected to the (unique) antenna connector(s). Only antennas, which have been certified by the Federal Communications Commission for use with this specific 2.4 GHz low power WLAN integrated PCMCIA card, may be connected to the antenna connector(s) of this device.

1.2 Related submittal(s) and/or Grant(s)

Not applicable.



Test specification(s): 47 CFR Part 15 (2001-12-18)
Description of EUT: 2.4 GHz low power WLAN integrated PCMCIA card
Manufacturer: Agere Systems Nederland B.V.
Brand mark: Agere
Type: PC24-11-FC/R
FCC ID: IMRWLPC2411R

1.3 Tested system details

1.3.1 System configuration.

Details and an overview of the system and all its components, as it has been tested, can be found in table 1 below. FCC ID's are stated in this overview where applicable. The EUT is listed in the first row of this table 1.

Description	Type number	Serial number	FCC ID	Cable descriptions
2.4 GHz low power WLAN integrated PCMCIA card	PC24-11-FC/R	02UT03640001	IMRWLPC2411R	Connected to coaxial cable.
Parabolic Grid antenna having a maximum antenna gain of 21.5 dBi (including all cable losses of the coaxial cable, surge arrestor and RF IEEE cable), intended for fixed point-to-point operation	AOU24-DI-24 (in combination with 20 ft. of coaxial cable, type LMR400)	n.a.	n.a.	Connected to 2.4 GHz low power WLAN integrated PCMCIA card.
Parabolic Grid antenna having a maximum antenna gain of 16.1 dBi (including all cable losses of the coaxial cable, surge arrestor and RF IEEE cable), intended for point-to-multipoint and other types of operation	AOU24-DI-24 (in combination with 100 ft. of coaxial cable, type LMR400)	n.a.	n.a.	Connected to 2.4 GHz low power WLAN integrated PCMCIA card.
Notebook computer, manufacturer Dell Computer Corporation	Latitude C600	DS/N TW-0791UH-12800-0BR-0635 DP/N 0791UH C/O TW Rev A05	n.a. (DoC)	Unshielded DC power cord to AC/DC adapter. Shielded parallel cable to printer.
Dell AC/DC power adapter 100-240 VAC/1.5 Amps to +20 VDC/3.5 Amps	AA20031, PA-6 family	DS/N CN-09364U-12761-0C4-007R DP/N 09361U/C/O CN/Rev A00	n.a. (DoC)	Unshielded DC power cord to notebook computer. Unshielded power cord to AC mains.
HP DeskJet 895Cxi	C6410A	ES8B42307H	n.a. (DoC)	Unshielded DC power cord to AC/DC adapter. Shielded parallel cable to notebook computer.
HP AC/DC power adapter 100-240 VAC/1 Amps to +18 VDC/1.1 Amps	C6409-60014	n.a.	n.a. (DoC)	Unshielded DC power cord to printer. Unshielded power cord to AC mains.

Table 1 - Tested system configuration.



Test specification(s):	47 CFR Part 15 (2001-12-18)
Description of EUT:	2.4 GHz low power WLAN integrated PCMCIA card
Manufacturer:	Agere Systems Nederland B.V.
Brand mark:	Agere
Type:	PC24-11-FC/R
FCC ID:	IMRWLPC2411R

1.4 Test methodology

The test methodology used is based on the requirements of 47 CFR Part 15 (2001-12-18).

The test methods, which have been used, are based on ANSI C63.4: 1992.

Radiated emission tests above 30 MHz were performed at a measurement distance of 3 meters. Below 30 MHz the radiated emission tests were carried out at measurement distances of 3 and 10 meters. The test results regarding the radiated emission tests on frequencies below 30 MHz have been extrapolated in order to determine the field strength of the measured values at measurement distances of 30 and 300 meters (as required by 47 CFR Part 15).

The bandwidth of the receiver is switching automatically to the right bandwidth in accordance with CISPR 16. This is implemented in the receiver. The antenna factors are programmed in the test receiver. The receiver automatically calculates the appropriate correction factor for the utilized antenna and also the appropriate antenna factor for the cable loss. The total correction is automatically added to the measured value.

Radiated emission tests on frequencies above 1 GHz were performed with appropriate pre-amplifiers, antennas and a spectrum analyzer. At frequencies on which radiated emissions were found the level at the input of the pre-amplifier was reproduced by means of a RF signal generator. The output level of the signal generator was then increased with the antenna factor in order to obtain the actual field strength value for each individual frequency on which radiated emissions were found.

1.5 Test facility

The Federal Communications Commission has reviewed the technical characteristics of the test facilities at TNO Electronic Products & Services (EPS) B.V., located in Niekerk, 9822 TL Smidshornerweg 18, The Netherlands, and has found these test facilities to be in compliance with the requirements of 47 CFR Part 15, section 2.948, per October 23, 2000.

The description of the test facilities has been filed under registration number 90828 at the Office of the Federal Communications Commission. The facility has been added to the list of laboratories performing these test services for the public on a fee basis.

The list of all public test facilities is available on the Internet at <http://www.fcc.gov>.

1.6 Product labeling

In accordance with 47 CFR Part 15.19 (a)(3) the following text shall be placed on a label, which is attached to the EUT:

This device complies with Part 15 of the FCC Rules. Operation is subject to the following two conditions: (1) This device may not cause harmful interference, and (2) this device must accept any interference received, including interference that may cause undesired operation.

In accordance with 47 CFR Part 2.925 (a)(1), the FCC ID shall be placed on a label, which is attached to the EUT.

For further details about the labeling requirements (size, legibility, etc.) as set by the Federal Communications Commission see 47 CFR Part 15.19 (a)(3), 47 CFR Part 15.19 (b)(2), 47 CFR Part 15.19 (b)(4), 47 CFR Part 2.925 and 47 CFR Part 2.926.



Test specification(s): 47 CFR Part 15 (2001-12-18)
Description of EUT: 2.4 GHz low power WLAN integrated PCMCIA card
Manufacturer: Agere Systems Nederland B.V.
Brand mark: Agere
Type: PC24-11-FC/R
FCC ID: IMRWLPC2411R

1.7 System test configuration

1.7.1 Justification

The system was configured for testing in a typical fashion (as a customer would normally use it).

The justification and manipulation of cables and equipment in order to simulate a worst-case behavior of the test setup has been carried out as prescribed in ANSI C63.4: 1992.

Tests were performed at the lowest operating frequency (channel 1: 2412 MHz), the operating frequency in the middle of the specified frequency band (channel 6: 2437 MHz) and the highest operating frequency (channel 11: 2462 MHz). Further details may be found in table 2 below.

Channel	Operating frequencies (MHz)	Rated output power (dBm)	Test performed
1	2412	+18	yes
2	2417	+18	no
3	2422	+18	no
4	2427	+18	no
5	2432	+18	no
6	2437	+18	yes
7	2442	+18	no
8	2447	+18	no
9	2452	+18	no
10	2457	+18	no
11	2462	+18	yes

Table 2 - Specification of channels and rated maximum output power (excluding antenna gain).

The EUT was tested in a notebook computer with an external antenna connected to the unique antenna connector of the EUT. The antenna, which has been used during all tests, is connected to a coaxial cable, surge arrestor and a RF IEEE coaxial cable which is fitted with a unique type of coaxial connector and which is manufactured solely for the manufacturer of the 2.4 GHz low power WLAN integrated PCMCIA card, as listed in this test report. This antenna can only be attached to those 2.4 GHz low power WLAN cards which are fitted with the same unique type of antenna connector.

All test results reflect the use of a 20 ft. coaxial cable as listed in table 1 in section 1.3 of this test report. In section 4.2.2 of this test report a remark is made about the use of a 100 ft. coaxial cable in order to comply with the peak power output requirements, as defined in 47 CFR Part 15.247, for point-to-multipoint and other types of operation.

All test results have been obtained by using the worst case configuration since a 20 ft. coaxial cable has a substantial lower attenuation than a 100 ft. cable.

1.7.2 EUT exercise software

The EUT could be enabled to transmit or receive continuously on channels 1 (2412 MHz), 6 (2437 MHz) and 11 (2462 MHz) by means of test software, which was supplied by the manufacturer of the EUT. Furthermore, the utilized test software also enables various transmission bit-rate settings in the range of 1 Mbit/s, 2 Mbit/s, 5.5 Mbit/s and 11 Mbit/s.

1.8 Special accessories

No special accessories are used and/or needed to achieve compliance with the appropriate sections of 47 CFR Part 15.



Test specification(s):	47 CFR Part 15 (2001-12-18)
Description of EUT:	2.4 GHz low power WLAN integrated PCMCIA card
Manufacturer:	Agere Systems Nederland B.V.
Brand mark:	Agere
Type:	PC24-11-FC/R
FCC ID:	IMRWLPC2411R

1.9 Equipment modifications

No modifications have been made to the equipment in order to achieve compliance with the appropriate sections of 47 CFR Part 15.

1.10 Configuration of the tested system

Not applicable. See table 1 in section 1.3 of this test report.

1.11 Block diagram(s) of the EUT

The block diagram is available as part of the documentation which is to be submitted to the FCC/TCB.



Test specification(s): 47 CFR Part 15 (2001-12-18)
Description of EUT: 2.4 GHz low power WLAN integrated PCMCIA card
Manufacturer: Agere Systems Nederland B.V.
Brand mark: Agere
Type: PC24-11-FC/R
FCC ID: IMRWLPC2411R

2 Radiated emission data

2.1 Test results with EUT operating in receive mode on channel 1

The results of the radiated emission tests, carried out in accordance with 47 CFR Part 15.109 and 47 CFR Part 15.209 with the EUT operating in receive mode on channel 1 (2412 MHz), are depicted in table 3.


Frequency (MHz)	Test results quasi peak (dB μ V/m)		Test results average (dB μ V/m)		Test results peak (dB μ V/m)		Resolution bandwidth (kHz)	Quasi peak limits (dB μ V/m)	Average limits (dB μ V/m)	Peak limits (dB μ V/m)
	V	H	V	H	V	H				
30.0-88.0	<20.0	<20.0	-	-	-	-	120	40.0	-	-
88.0-216.0	<23.5	<23.5	-	-	-	-	120	43.5	-	-
216.0-960.0	<26.0	<26.0	-	-	-	-	120	46.0	-	-
960.0-1000.0	<34.0	<34.0	-	-	-	-	120	54.0	-	-
1100.00	-	-	n.t.	n.t.	46.0	45.8	1000	-	54.0	74.0
1504.00	-	-	n.t.	n.t.	47.8	43.2	1000	-	54.0	74.0
1708.00	-	-	n.t.	n.t.	48.1	47.6	1000	-	54.0	74.0
4824.00	-	-	n.t.	n.t.	45.1	43.2	1000	-	54.0	74.0

Table 3 - Test results with the EUT operating in receive mode on channel 1 (2412 MHz).

Note: Above 1 GHz, all measured values of the spurious emissions with the detector in peak mode, are below the applicable limits, which are valid when using an average detector. Therefore, all spurious emissions above 1 GHz have been measured with the peak detector only (n.t. = not tested).

Note: Field strength values of radiated emissions at frequencies not listed in table 3 are more than 20 dB below the applicable limit.

Test engineer

Signature : 

Name : Onno H. Hoekstra

Date : April 29, 2002



Test specification(s): 47 CFR Part 15 (2001-12-18)
Description of EUT: 2.4 GHz low power WLAN integrated PCMCIA card
Manufacturer: Agere Systems Nederland B.V.
Brand mark: Agere
Type: PC24-11-FC/R
FCC ID: IMRWLPC2411R

2.2 Test results with EUT operating in receive mode on channel 6

The results of the radiated emission tests, carried out in accordance with 47 CFR Part 15.109 and 47 CFR Part 15.209 with the EUT operating in receive mode on channel 6 (2437 MHz), are depicted in table 4.


Frequency (MHz)	Test results quasi peak (dBµV/m)		Test results average (dBµV/m)		Test results peak (dBµV/m)		Resolution bandwidth (kHz)	Quasi peak limits (dBµV/m)	Average limits (dBµV/m)	Peak limits (dBµV/m)
	V	H	V	H	V	H				
30.0-88.0	<20.0	<20.0	-	-	-	-	120	40.0	-	-
88.0-216.0	<23.5	<23.5	-	-	-	-	120	43.5	-	-
216.0-960.0	<26.0	<26.0	-	-	-	-	120	46.0	-	-
960.0-1000.0	<34.0	<34.0	-	-	-	-	120	54.0	-	-
1100.00	-	-	n.t.	n.t.	48.0	47.9	1000	-	54.0	74.0
1504.00	-	-	n.t.	n.t.	48.3	45.2	1000	-	54.0	74.0
1708.00	-	-	n.t.	n.t.	49.3	48.6	1000	-	54.0	74.0
4874.00	-	-	n.t.	n.t.	49.3	48.7	1000	-	54.0	74.0

Table 4 - Test results with the EUT operating in receive mode on channel 6 (2437 MHz).

Note: Above 1 GHz, all measured values of the spurious emissions with the detector in peak mode, are below the applicable limits, which are valid when using an average detector. Therefore, all spurious emissions above 1 GHz have been measured with the peak detector only (n.t. = not tested).

Note: Field strength values of radiated emissions at frequencies not listed in table 4 are more than 20 dB below the applicable limit.

Test engineer

Signature : 

Name : Onno H. Hoekstra

Date : April 29, 2002



Test specification(s): 47 CFR Part 15 (2001-12-18)
 Description of EUT: 2.4 GHz low power WLAN integrated PCMCIA card
 Manufacturer: Agere Systems Nederland B.V.
 Brand mark: Agere
 Type: PC24-11-FC/R
 FCC ID: IMRWLPC2411R

2.3 Test results with EUT operating in receive mode on channel 11

The results of the radiated emission tests, carried out in accordance with 47 CFR Part 15.109 and 47 CFR Part 15.209 with the EUT operating in receive mode on channel 11 (2462 MHz), are depicted in table 5.


Frequency (MHz)	Test results quasi peak (dBµV/m)		Test results average (dBµV/m)		Test results peak (dBµV/m)		Resolution bandwidth (kHz)	Quasi peak limits (dBµV/m)	Average limits (dBµV/m)	Peak limits (dBµV/m)
	V	H	V	H	V	H				
30.0-88.0	<20.0	<20.0	-	-	-	-	120	40.0	-	-
88.0-216.0	<23.5	<23.5	-	-	-	-	120	43.5	-	-
216.0-960.0	<26.0	<26.0	-	-	-	-	120	46.0	-	-
960.0-1000.0	<34.0	<34.0	-	-	-	-	120	54.0	-	-
1100.00	-	-	n.t.	n.t.	48.3	48.1	1000	-	54.0	74.0
1504.00	-	-	n.t.	n.t.	48.7	47.6	1000	-	54.0	74.0
1708.00	-	-	n.t.	n.t.	49.8	48.3	1000	-	54.0	74.0
4944.00	-	-	n.t.	n.t.	49.9	48.8	1000	-	54.0	74.0

Table 5 - Test results with the EUT operating in receive mode on channel 11 (2462 MHz).

Note: Above 1 GHz, all measured values of the spurious emissions with the detector in peak mode, are below the applicable limits, which are valid when using an average detector. Therefore, all spurious emissions above 1 GHz have been measured with the peak detector only (n.t. = not tested).

Note: Field strength values of radiated emissions at frequencies not listed in table 5 are more than 20 dB below the applicable limit.

Test engineer

Signature : 
 Name : Onno H. Hoekstra
 Date : April 29, 2002



Test specification(s): 47 CFR Part 15 (2001-12-18)
Description of EUT: 2.4 GHz low power WLAN integrated PCMCIA card
Manufacturer: Agere Systems Nederland B.V.
Brand mark: Agere
Type: PC24-11-FC/R
FCC ID: IMRWLPC2411R

2.4 Test results with EUT operating in transmit mode on channel 1.

The results of the radiated emission tests, carried out in accordance with 47 CFR Part 15.205 (restricted bands of operation) with the EUT operating in transmit mode on channel 1 (2412 MHz), are depicted in table 6.

Frequency (MHz)	Test results quasi peak (dBµV/m)		Test results average (dBµV/m)		Test results peak (dBµV/m)		Resolution bandwidth (kHz)	Quasi peak limits (dBµV/m)	Average limits (dBµV/m)	Peak limits (dBµV/m)
	V	H	V	H	V	H				
30.0-88.0	<20.0	<20.0	-	-	-	-	120	40.0	-	-
88.0-216.0	<23.5	<23.5	-	-	-	-	120	43.5	-	-
216.0-960.0	<26.0	<26.0	-	-	-	-	120	46.0	-	-
960.0-1000.0	<34.0	<34.0	-	-	-	-	120	54.0	-	-
1100.00	-	-	n.t.	n.t.	46.2	46.0	1000	-	54.0	74.0
1499.00	-	-	n.t.	n.t.	48.1	44.1	1000	-	54.0	74.0
1713.00	-	-	n.t.	n.t.	49.2	48.3	1000	-	54.0	74.0
4824.00	-	-	49.1	48.7	61.1	60.8	1000	-	54.0	74.0
7236.00	-	-	50.9	49.8	62.5	61.1	1000	-	54.0	74.0

Table 6 - Test results with the EUT operating in transmit mode on channel 1 (2412 MHz).

Note: Radiated emission tests have been performed with all possible transmission bit-rates (1 Mbit/s, 2 Mbit/s, 5.5 Mbit/s and 11 Mbit/s) in transmit mode. The highest values measured of the spurious emission components are reported by means of table 6.

Note: Above 1 GHz, all measured values of the spurious emissions with the detector in peak mode are below the applicable limits which are valid when using an average detector. Therefore, all spurious emissions above 1 GHz have been measured with the peak detector only (n.t. = not tested).

Note: Field strength values of radiated emissions at frequencies not listed in table 6 are more than 20 dB below the applicable limit.

Test engineer

Signature

: 

Name

: Onno H. Hoekstra

Date

: April 29, 2002



Test specification(s): 47 CFR Part 15 (2001-12-18)
Description of EUT: 2.4 GHz low power WLAN integrated PCMCIA card
Manufacturer: Agere Systems Nederland B.V.
Brand mark: Agere
Type: PC24-11-FC/R
FCC ID: IMRWLPC2411R

2.5 Test results with EUT operating in transmit mode on channel 6.

The results of the radiated emission tests, carried out in accordance with 47 CFR Part 15.205 (restricted bands of operation) with the EUT operating in transmit mode on channel 6 (2437 MHz), are depicted in table 7.

Frequency (MHz)	Test results quasi peak (dBµV/m)		Test results average (dBµV/m)		Test results peak (dBµV/m)		Resolution bandwidth (kHz)	Quasi peak limits (dBµV/m)	Average limits (dBµV/m)	Peak limits (dBµV/m)
	V	H	V	H	V	H				
30.0-88.0	<20.0	<20.0	-	-	-	-	120	40.0	-	-
88.0-216.0	<23.5	<23.5	-	-	-	-	120	43.5	-	-
216.0-960.0	<26.0	<26.0	-	-	-	-	120	46.0	-	-
960.0-1000.0	<34.0	<34.0	-	-	-	-	120	54.0	-	-
1100.00	-	-	n.t.	n.t.	47.1	46.5	1000	-	54.0	74.0
1499.00	-	-	n.t.	n.t.	49.3	46.8	1000	-	54.0	74.0
1713.00	-	-	n.t.	n.t.	50.8	50.4	1000	-	54.0	74.0
4874.00	-	-	50.7	50.0	63.5	62.1	1000	-	54.0	74.0
7311.00	-	-	51.9	51.4	63.1	63.8	1000	-	54.0	74.0

Table 7 - Test results with the EUT operating in transmit mode on channel 6 (2437 MHz).

Note: Radiated emission tests have been performed with all possible transmission bit-rates (1 Mbit/s, 2 Mbit/s, 5.5 Mbit/s and 11 Mbit/s) in transmit mode. The highest values measured of the spurious emission components are reported by means of table 7.

Note: Above 1 GHz, all measured values of the spurious emissions with the detector in peak mode are below the applicable limits which are valid when using an average detector. Therefore, all spurious emissions above 1 GHz have been measured with the peak detector only (n.t. = not tested).

Note: Field strength values of radiated emissions at frequencies not listed in table 7 are more than 20 dB below the applicable limit.

Test engineer

Signature

: 

Name

: Onno H. Hoekstra

Date

: April 29, 2002



Test specification(s): 47 CFR Part 15 (2001-12-18)
Description of EUT: 2.4 GHz low power WLAN integrated PCMCIA card
Manufacturer: Agere Systems Nederland B.V.
Brand mark: Agere
Type: PC24-11-FC/R
FCC ID: IMRWLPC2411R

2.6 Test results with EUT operating in transmit mode on channel 11.

The results of the radiated emission tests, carried out in accordance with 47 CFR Part 15.205 (restricted bands of operation) with the EUT operating in transmit mode on channel 11 (2462 MHz), are depicted in table 8.

Frequency (MHz)	Test results quasi peak (dBµV/m)		Test results average (dBµV/m)		Test results peak (dBµV/m)		Resolution bandwidth (kHz)	Quasi peak limits (dBµV/m)	Average limits (dBµV/m)	Peak limits (dBµV/m)
	V	H	V	H	V	H				
30.0-88.0	<20.0	<20.0	-	-	-	-	120	40.0	-	-
88.0-216.0	<23.5	<23.5	-	-	-	-	120	43.5	-	-
216.0-960.0	<26.0	<26.0	-	-	-	-	120	46.0	-	-
960.0-1000.0	<34.0	<34.0	-	-	-	-	120	54.0	-	-
1100.00	-	-	n.t.	n.t.	48.1	48.0	1000	-	54.0	74.0
1499.00	-	-	n.t.	n.t.	50.7	48.8	1000	-	54.0	74.0
1713.00	-	-	n.t.	n.t.	53.6	52.1	1000	-	54.0	74.0
4944.00	-	-	53.5	53.0	64.0	63.9	1000	-	54.0	74.0
7386.00	-	-	52.8	52.4	63.4	63.7	1000	-	54.0	74.0

Table 8 - Test results with the EUT operating in transmit mode on channel 11 (2462 MHz).

Note: Radiated emission tests have been performed with all possible transmission bit-rates (1 Mbit/s, 2 Mbit/s, 5.5 Mbit/s and 11 Mbit/s) in transmit mode. The highest values measured of the spurious emission components are reported by means of table 8.

Note: Above 1 GHz, all measured values of the spurious emissions with the detector in peak mode are below the applicable limits which are valid when using an average detector. Therefore, all spurious emissions above 1 GHz have been measured with the peak detector only (n.t. = not tested).

Note: Field strength values of radiated emissions at frequencies not listed in table 8 are more than 20 dB below the applicable limit.

Test engineer

Signature

Name : Onno H. Hoekstra

Date : April 29, 2002



Test specification(s): 47 CFR Part 15 (2001-12-18)
Description of EUT: 2.4 GHz low power WLAN integrated PCMCIA card
Manufacturer: Agere Systems Nederland B.V.
Brand mark: Agere
Type: PC24-11-FC/R
FCC ID: IMRWLPC2411R

3 Conducted emission data

The (worst-case) results of the conducted emission tests at the 110 Volts AC mains connection terminals of the notebook computer in which the EUT is built-in, carried out in accordance with 47 CFR Part 15.107 and 47 CFR Part 15.207 with the EUT operating in transmit and/or receive mode on channels 1 (2412 MHz), 6 (2437 MHz) and 11 (2462 MHz) while utilizing all possible transmission bit-rates (1 Mbit/s, 2 Mbit/s, 5.5 Mbit/s and 11 Mbit/s), are depicted in table 9.

Frequency (MHz)	Measurement results dB(μ V) Neutral	Measurement results dB(μ V) Line 1	Limits dB(μ V)	Margin (dB) Neutral	Margin (dB) Line 1	Result
	QP	QP	QP	QP	QP	
0.46	32.4	31.5	48.0	-15.6	-16.5	PASS
0.67	32.9	32.0	48.0	-15.1	-16.0	PASS
0.92	32.7	31.3	48.0	-15.3	-16.7	PASS
1.46	32.4	31.6	48.0	-15.6	-16.4	PASS
1.96	33.5	32.9	48.0	-14.5	-15.1	PASS
2.57	36.1	35.4	48.0	-11.9	-12.6	PASS
2.97	35.0	34.7	48.0	-13.0	-13.3	PASS
5.49	35.2	34.9	48.0	-12.8	-13.1	PASS
8.82	32.1	31.8	48.0	-15.9	-16.2	PASS
24.00	28.4	29.2	48.0	-19.6	-18.8	PASS

Table 9 - Test results with the EUT operating in transmit/receive mode.

Note: Disturbance voltage values of conducted emissions at frequencies not listed in table 9 are more than 20 dB below the applicable limit.

Test engineer

Signature

: 

Name

: Onno H. Hoekstra

Date

: April 29, 2002



Test specification(s): 47 CFR Part 15 (2001-12-18)
Description of EUT: 2.4 GHz low power WLAN integrated PCMCIA card
Manufacturer: Agere Systems Nederland B.V.
Brand mark: Agere
Type: PC24-11-FC/R
FCC ID: IMRWLPC2411R

4 Test results of measurements in conformity with 47 CFR Part 15.247


4.1 Minimum 6 dB bandwidth

The results of tests on the EUT, carried out in accordance with 47 CFR Part 15.247 (a)(2), are depicted in table 10.

Transmission bitrate (Mbit/s)	Minimum 6 dB bandwidth (kHz)			Limit (kHz)
	Channel 1 (2412 MHz)	Channel 6 (2437 MHz)	Channel 11 (2462 MHz)	
1	11100	10200	10200	>500
2	10200	10200	10200	>500
5.5	11180	11480	10650	>500
11	11550	11480	11480	>500

Table 10 - Minimum 6 dB bandwidth.

Test engineer

Signature : 

Name : Onno H. Hoekstra

Date : April 29, 2002



Test specification(s): 47 CFR Part 15 (2001-12-18)
Description of EUT: 2.4 GHz low power WLAN integrated PCMCIA card
Manufacturer: Agere Systems Nederland B.V.
Brand mark: Agere
Type: PC24-11-FC/R
FCC ID: IMRWLPC2411R

4.2 Maximum peak output power

4.2.1 Test results for fixed point-to-point operation.

The results of tests on the EUT, carried out in accordance with 47 CFR Part 15.247 (b)(1), are depicted in table 11a.

As the maximum effective antenna gain exceeds 6 dBi, the limit of 30 dBm has been corrected to 24.8 dBm in accordance with 47 CFR Part 15.247 (b)(3)(i). The correction to the limit of 30 dBm can be calculated by the following formula:

$$30 \text{ dBm} - (1 \text{ dB} * ((\text{Effective antenna gain} - 6 \text{ dBi}) / 3 \text{ dBi})) =$$

$$30 \text{ dBm} - (1 \text{ dB} * ((21.5 \text{ dBi} - 6 \text{ dBi}) / 3 \text{ dBi})) =$$


$$30 \text{ dBm} - 5.2 \text{ dB} = 24.8 \text{ dBm}$$

Transmission bitrate (Mbit/s)	Maximum peak output power (dBm)			Limit (dBm) Effective antenna gain <=21.5 dBi
	Channel 1 (2412 MHz)	Channel 6 (2437 MHz)	Channel 11 (2462 MHz)	
1	18.4	18.3	18.4	24.8
2	18.5	18.4	18.4	24.8
5.5	17.9	17.9	17.9	24.8
11	18.3	18.2	18.3	24.8

Table 11a - Maximum peak output power for antennas having a maximum effective gain of 21.5 dBi.

Note: During the measurements, the AC mains supply voltage of the notebook PC in which the EUT was built-in was varied between 85% and 115% of the nominal value. The maximum measured values are depicted in table 11a. No differences in measurement results, due to the AC mains voltage variations between 85% and 115% from the nominal value, have been observed.

Test engineer

Signature : 

Name : Onno H. Hoekstra

Date : April 29, 2002



Test specification(s): 47 CFR Part 15 (2001-12-18)
Description of EUT: 2.4 GHz low power WLAN integrated PCMCIA card
Manufacturer: Agere Systems Nederland B.V.
Brand mark: Agere
Type: PC24-11-FC/R
FCC ID: IMRWLPC2411R

4.2.2 Test results for point-to-multipoint and other types of operation.

The results of tests on the EUT, carried out in accordance with 47 CFR Part 15.247 (b)(1), are depicted in table 11b.

As the maximum effective antenna gain exceeds 6 dBi, the limit of 30 dBm has been corrected to 19.9 dBm in accordance with 47 CFR Part 15.247 (b)(3). The correction to the limit of 30 dBm can be calculated by the following formula:

$$30 \text{ dBm} - (\text{Effective antenna gain} - 6 \text{ dBi}) =$$

$$30 \text{ dBm} - (16.1 \text{ dBi} - 6 \text{ dBi}) =$$

$$30 \text{ dBm} - 10.1 \text{ dB} = 19.9 \text{ dBm}$$

Transmission bitrate (Mbit/s)	Maximum peak output power (dBm)			Limit (dBm)
	Channel 1 (2412 MHz)	Channel 6 (2437 MHz)	Channel 11 (2462 MHz)	Effective antenna gain <=16.1 dBi
1	18.4	18.3	18.4	19.9
2	18.5	18.4	18.4	19.9
5.5	17.9	17.9	17.9	19.9
11	18.3	18.2	18.3	19.9

Table 11b - Maximum peak output power for antennas having a maximum effective gain of 16.1 dBi.

Note: During the measurements, the AC mains supply voltage of the notebook PC in which the EUT was built-in was varied between 85% and 115% of the nominal value. The maximum measured values are depicted in table 11b. No differences in measurement results, due to the AC mains voltage variations between 85% and 115% from the nominal value, have been observed.

Test engineer

Signature : 

Name : Onno H. Hoekstra

Date : April 29, 2002



Test specification(s): 47 CFR Part 15 (2001-12-18)
Description of EUT: 2.4 GHz low power WLAN integrated PCMCIA card
Manufacturer: Agere Systems Nederland B.V.
Brand mark: Agere
Type: PC24-11-FC/R
FCC ID: IMRWLPC2411R

4.3 Radiated emission data outside restricted bands

The results of tests on the EUT, carried out in accordance with 47 CFR Part 15.247 (c), are depicted in table 12.


Radiated emission data outside restricted bands in a 100 kHz bandwidth shall be at least 20 dB below the highest level in a 100 kHz bandwidth within the band.

Frequency (MHz)	Level below working channel based on field strength (dB)	Limit (dB)
2398.53	-35.6	< -20.0
2400.00	-37.9	< -20.0
all frequencies	<40.0	< -20.0

Table 12 - Radiated emission data outside restricted bands.

Note: Worst case measurement values for transmissions with all possible transmission bit-rates (1 Mbit/s, 2 Mbit/s, 5.5 Mbit/s and 11 Mbit/s) and channel (channel 1 (2412 MHz), channel 6 (2437 MHz) and channel 11 (2462 MHz)) combinations.

Test engineer

Signature : 

Name : Onno H. Hoekstra

Date : April 29, 2002



Test specification(s): 47 CFR Part 15 (2001-12-18)
Description of EUT: 2.4 GHz low power WLAN integrated PCMCIA card
Manufacturer: Agere Systems Nederland B.V.
Brand mark: Agere
Type: PC24-11-FC/R
FCC ID: IMRWLPC2411R

4.4 Conducted emission data outside restricted bands

The results of tests on the EUT, carried out in accordance with 47 CFR Part 15.247 (c), are depicted in table 13.

Conducted emission data outside restricted bands in a 100 kHz bandwidth shall be at least 20 dB below the highest level in a 100 kHz bandwidth within the band.

Frequency (MHz)	Level below working channel based on field strength (dB)	Limit (dB)
2398.53	-35.6	< -20.0
2400.00	-37.9	< -20.0
other frequencies	< -40.0	< -20.0

Table 13 - Conducted emission data outside restricted bands.

Note: Worst case measurement values for transmissions with all possible transmission bit-rates (1 Mbit/s, 2 Mbit/s, 5.5 Mbit/s and 11 Mbit/s) and channel (channel 1 (2412 MHz), channel 6 (2437 MHz) and channel 11 (2462 MHz)) combinations.

Test engineer

Signature

Name

: Onno H. Hoekstra

Date

: April 29, 2002



Test specification(s): 47 CFR Part 15 (2001-12-18)
Description of EUT: 2.4 GHz low power WLAN integrated PCMCIA card
Manufacturer: Agere Systems Nederland B.V.
Brand mark: Agere
Type: PC24-11-FC/R
FCC ID: IMRWLPC2411R


4.5 Peak power spectral density

The results of the tests on the EUT, carried out in accordance with 47 CFR Part 15.247 (d), are depicted in table 14.

Transmission bitrate (Mbit/s)	Peak power spectral density (conducted) in any 3 kHz band (dBm)			Limit (dBm)
	Channel 1 (2412 MHz)	Channel 6 (2437 MHz)	Channel 11 (2462 MHz)	
1	-9.3	-9.6	-9.5	<8.0
2	-9.3	-9.6	-9.6	<8.0
5.5	-10.5	-10.5	-10.6	<8.0
11	-7.5	-7.4	-7.4	<8.0

Table 14 - Peak power spectral density.

Test engineer

Signature : 

Name : Onno H. Hoekstra

Date : April 29, 2002



Test specification(s):	47 CFR Part 15 (2001-12-18)
Description of EUT:	2.4 GHz low power WLAN integrated PCMCIA card
Manufacturer:	Agere Systems Nederland B.V.
Brand mark:	Agere
Type:	PC24-11-FC/R
FCC ID:	IMRWLPC2411R

4.6 Processing gain

The results of the processing gain tests, carried out in accordance with 47 CFR Part 15.247 (e), are available in a separate test report with reference number 02060302.r00, dated April 29, 2002, issued by TNO Electronic Products & Services (EPS) B.V.

Test engineer

Signature

: 

Name

: Onno H. Hoekstra

Date

: April 29, 2002



Test specification(s):	47 CFR Part 15 (2001-12-18)
Description of EUT:	2.4 GHz low power WLAN integrated PCMCIA card
Manufacturer:	Agere Systems Nederland B.V.
Brand mark:	Agere
Type:	PC24-11-FC/R
FCC ID:	IMRWLPC2411R

5 Plots of measurement data

For reference purposes and visualization of spectrum analyzer settings during the measurements, a selection of plots of measurement data is included in this test report.

Test engineer

Signature

: 


Name

: Onno H. Hoekstra


Date

: April 29, 2002


5.1 Minimum 6 dB bandwidth

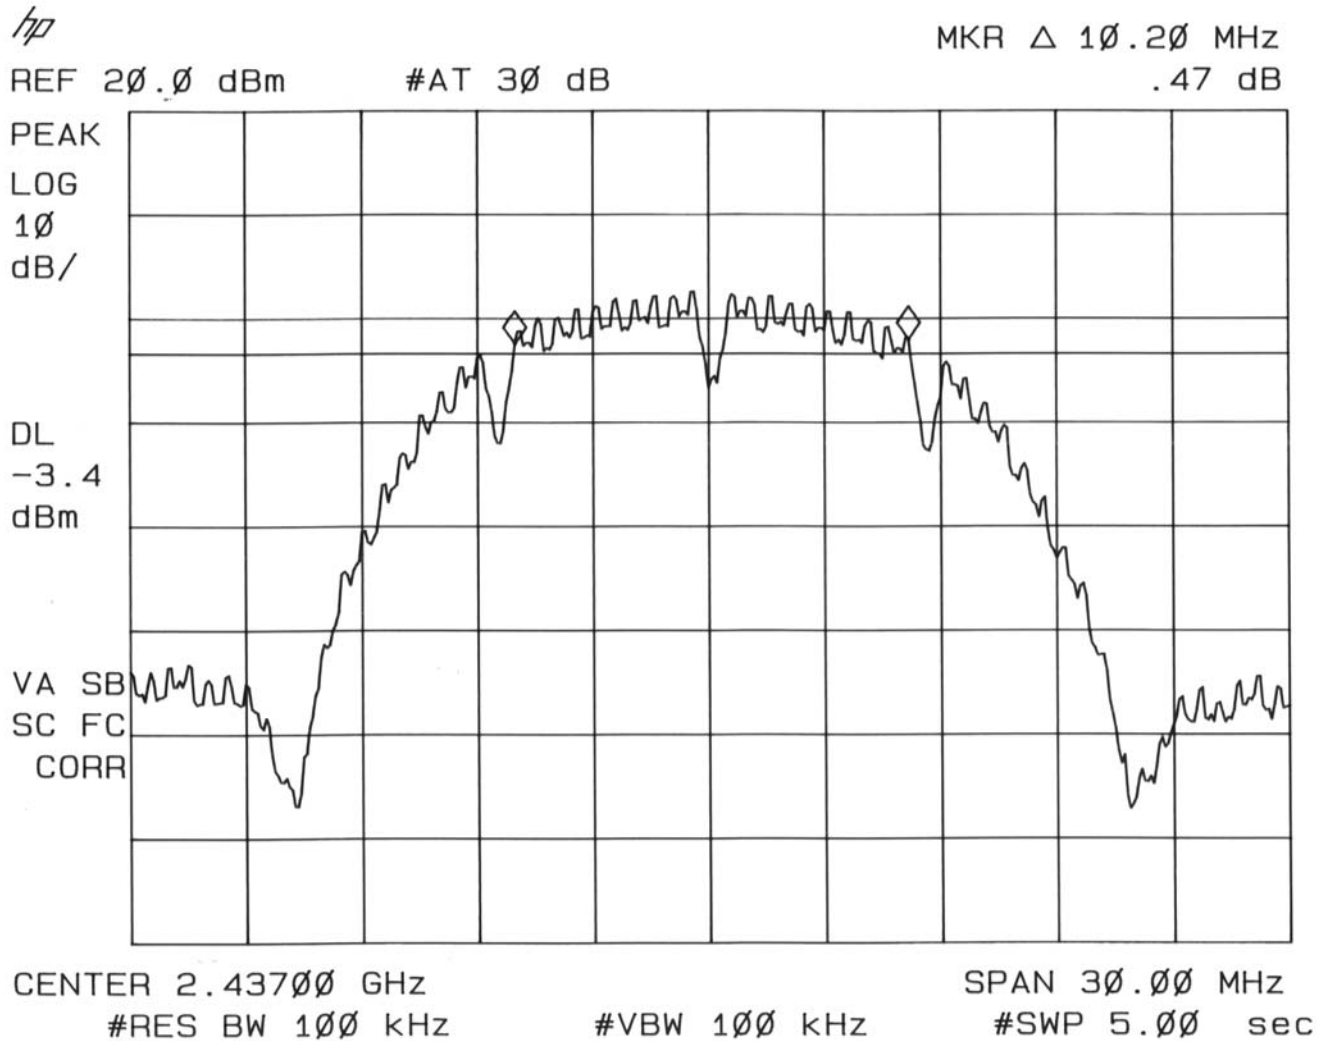


Plot 1 - Minimum 6 dB bandwidth at a transmission bit-rate of 1 Mbit/s.

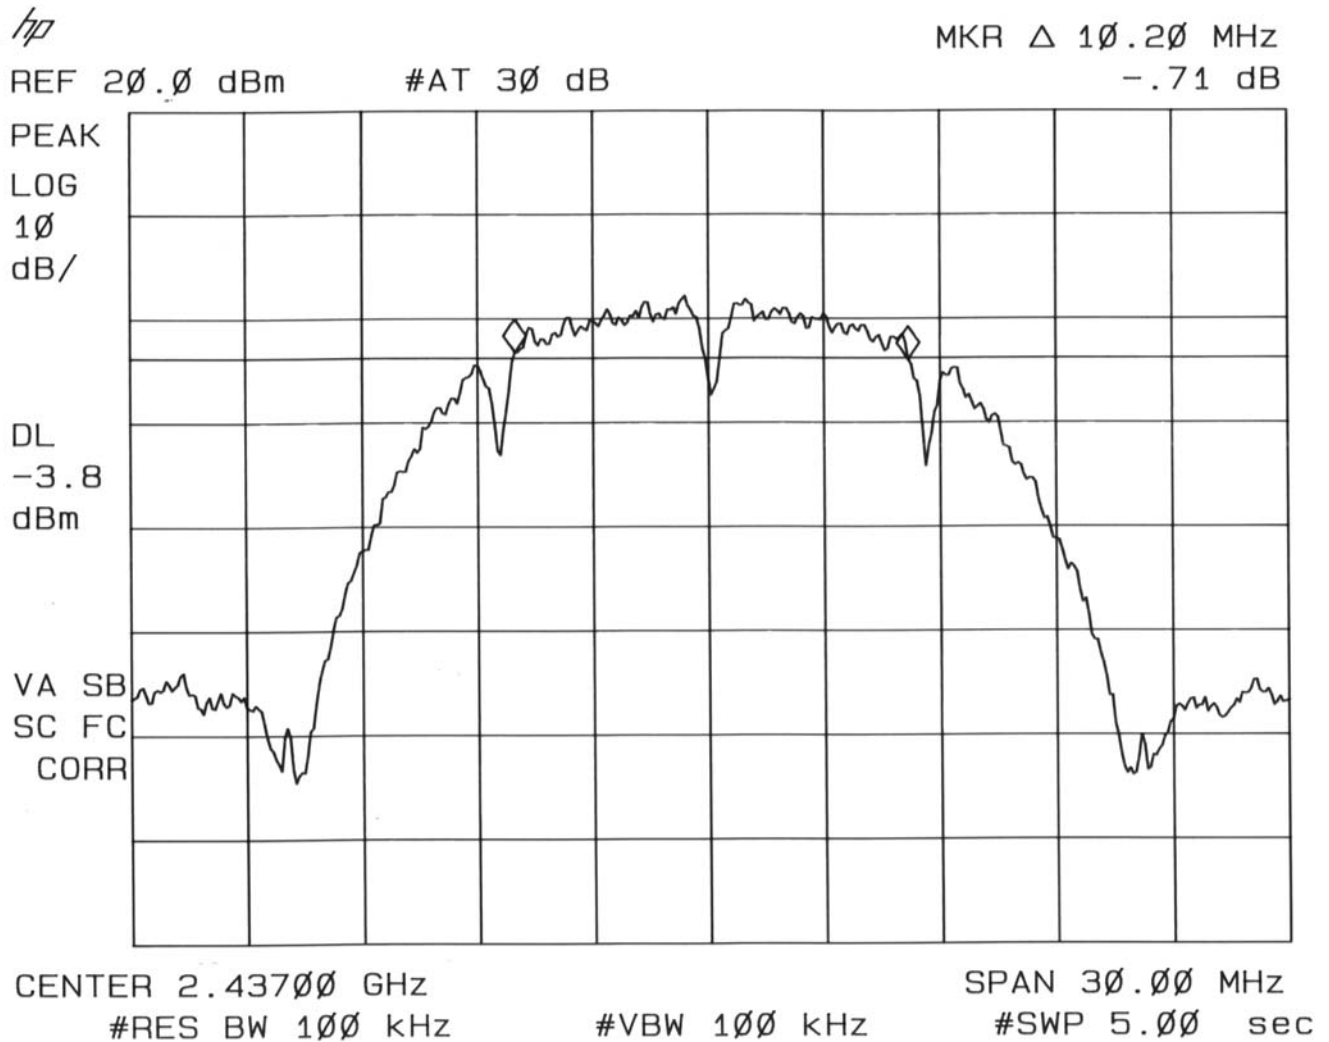

Plot 2 - Minimum 6 dB bandwidth at a transmission bit-rate of 2 Mbit/s.

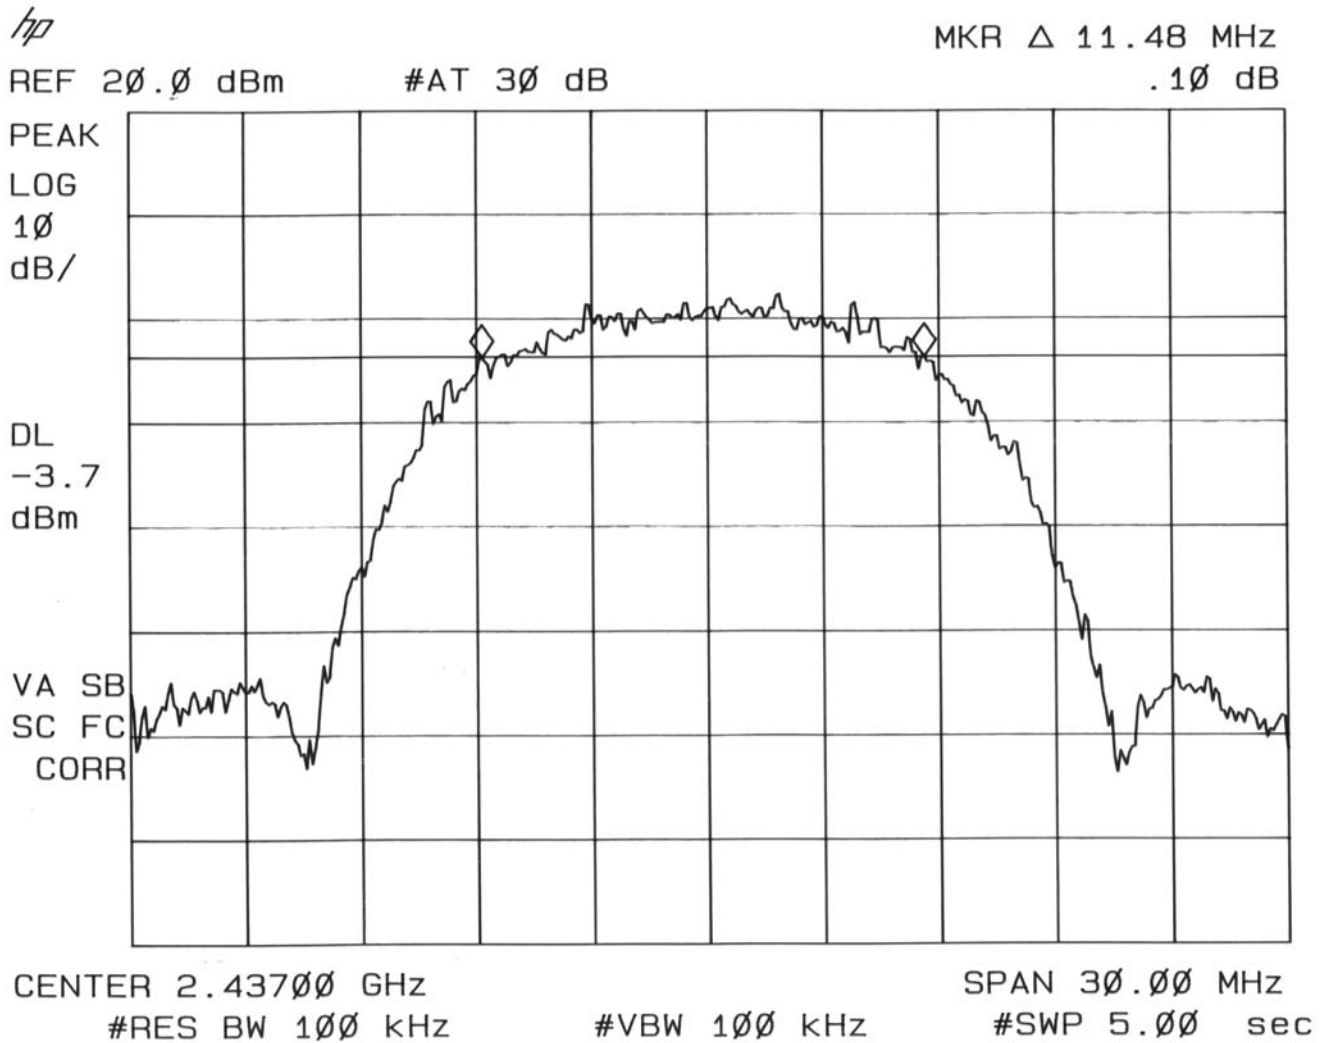


Plot 3 - Minimum 6 dB bandwidth at a transmission bit-rate of 5.5 Mbit/s.

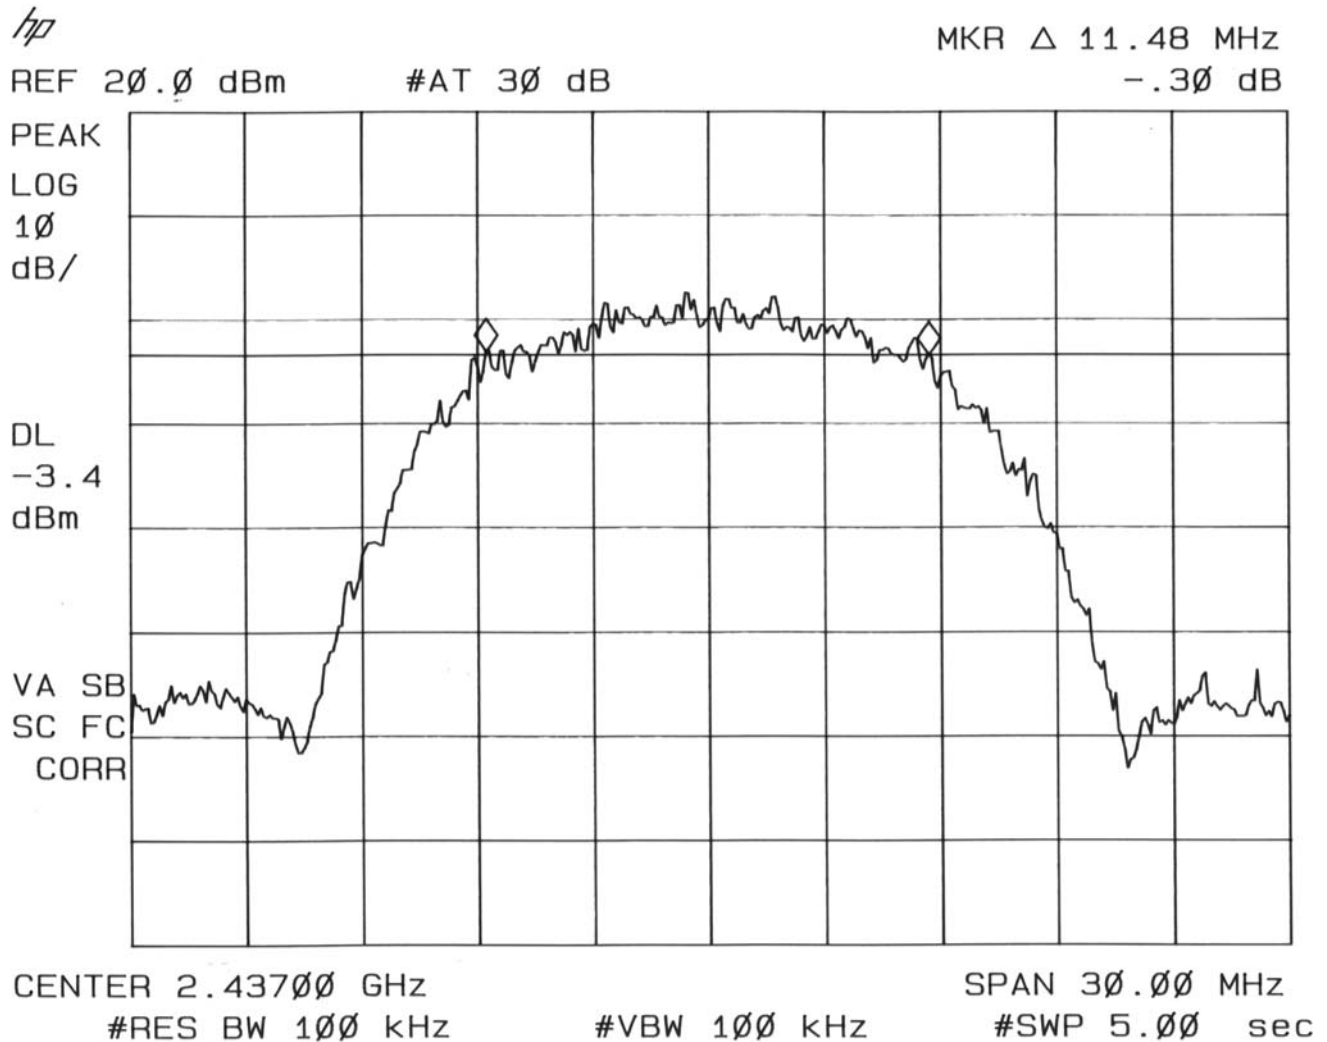


Plot 4 - Minimum 6 dB bandwidth at a transmission bit-rate of 11 Mbit/s.

5.2 Conducted emission data outside restricted bands

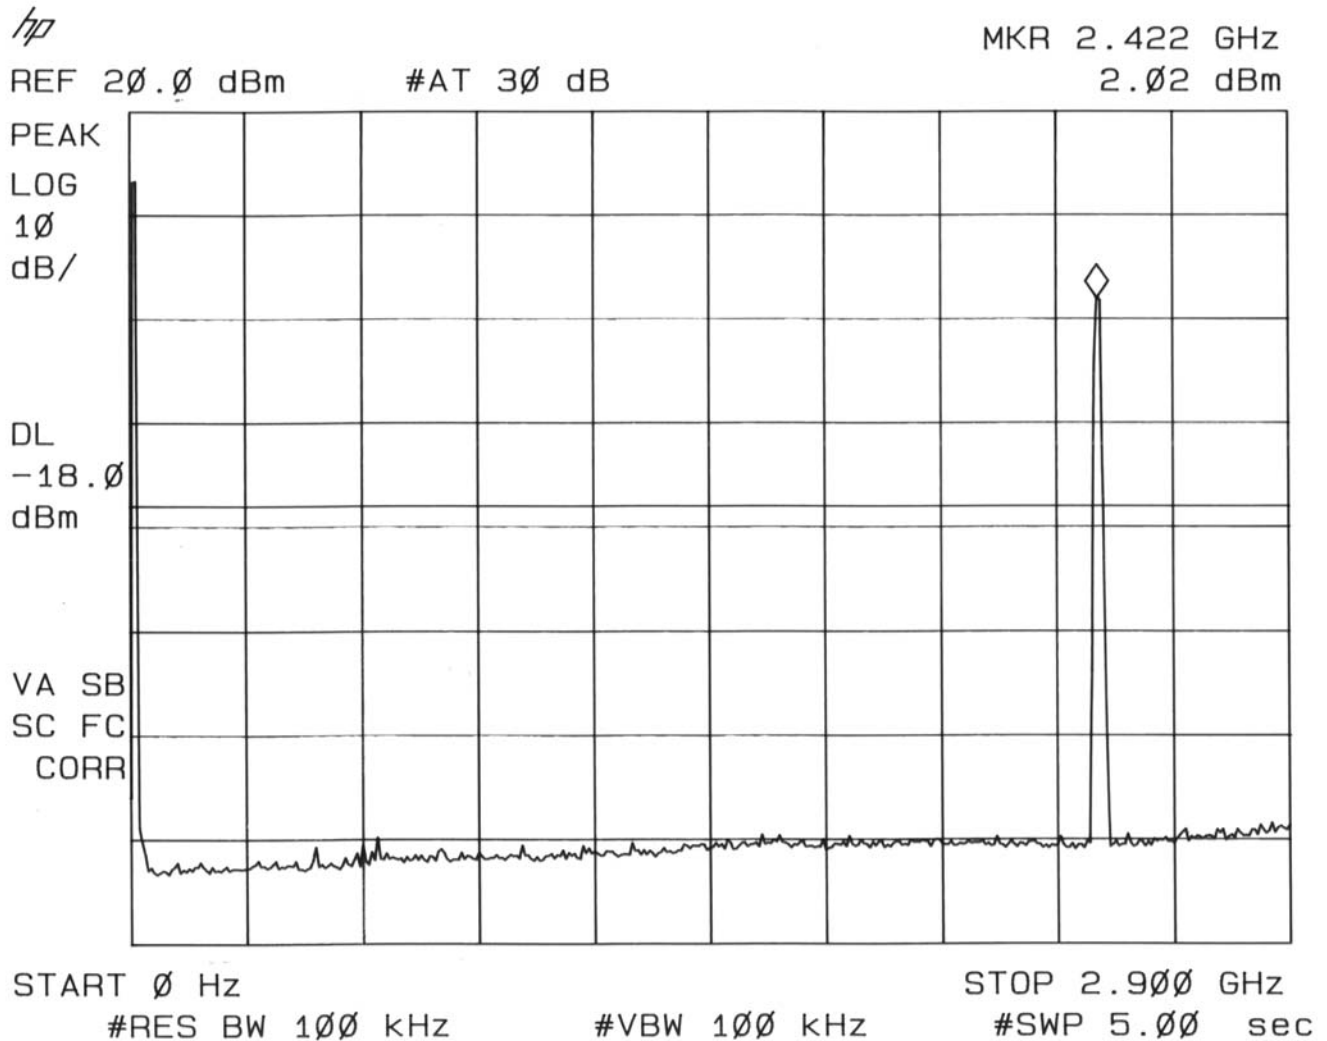

Plot 5 - Conducted emission outside restricted bands.


Conducted emission data outside restricted bands in a 100 kHz bandwidth shall be at least 20 dB below the highest level in a 100 kHz bandwidth within the band. Display line :: -20 dB limit line. Corrected (offset) for cable losses.

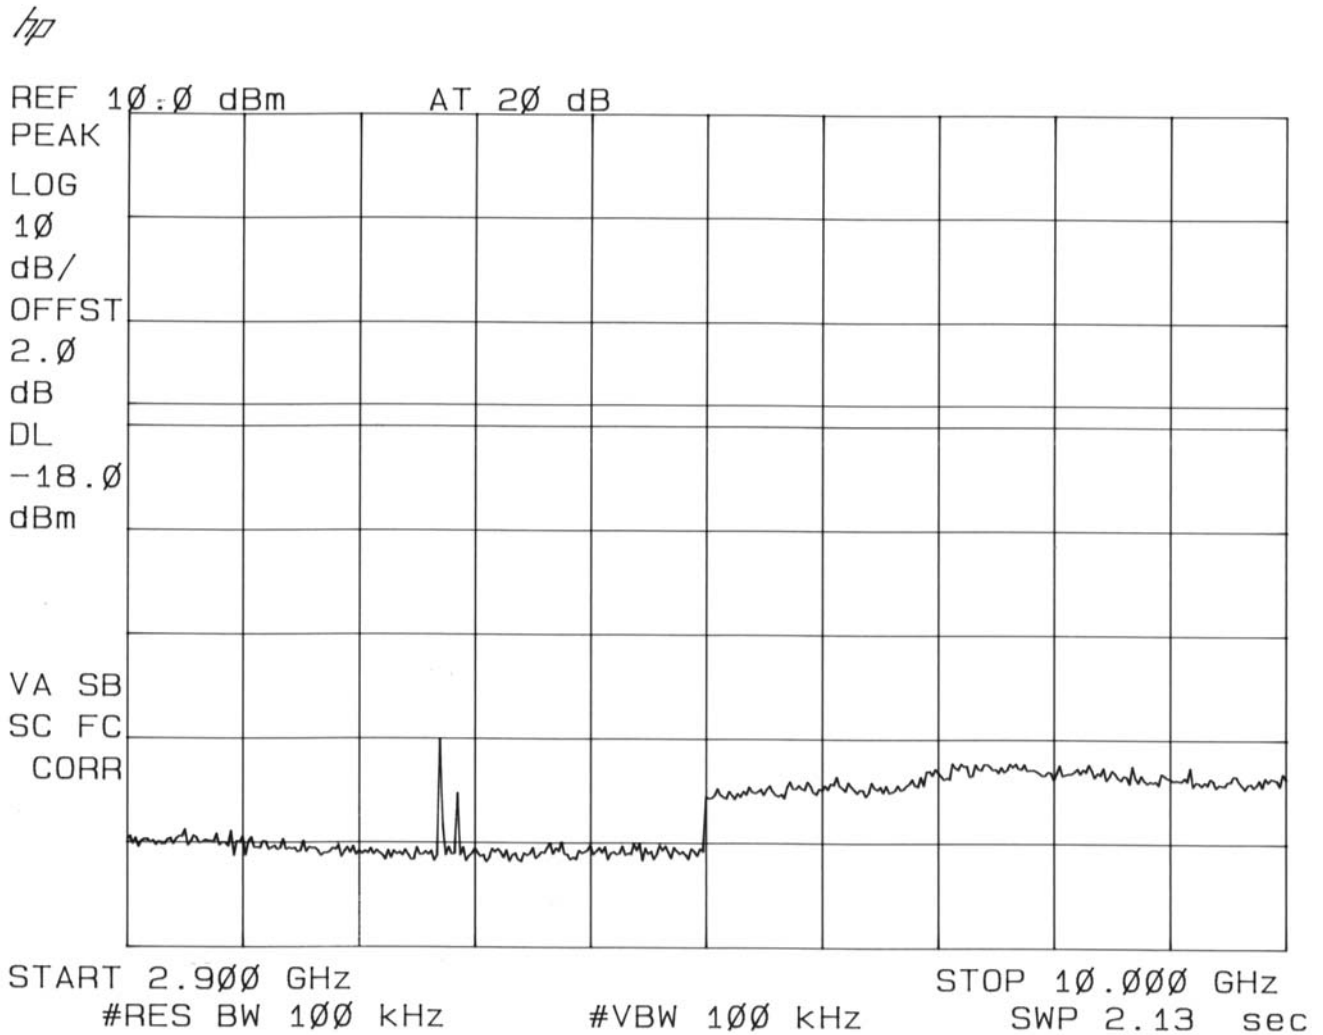

Plot 6 - Conducted emission outside restricted band.


Conducted emission data outside restricted bands in a 100 kHz bandwidth shall be at least 20 dB below the highest level in a 100 kHz bandwidth within the band. Display line :: -20 dB limit line. Corrected (offset) for cable losses.

5.3 Peak power spectral density

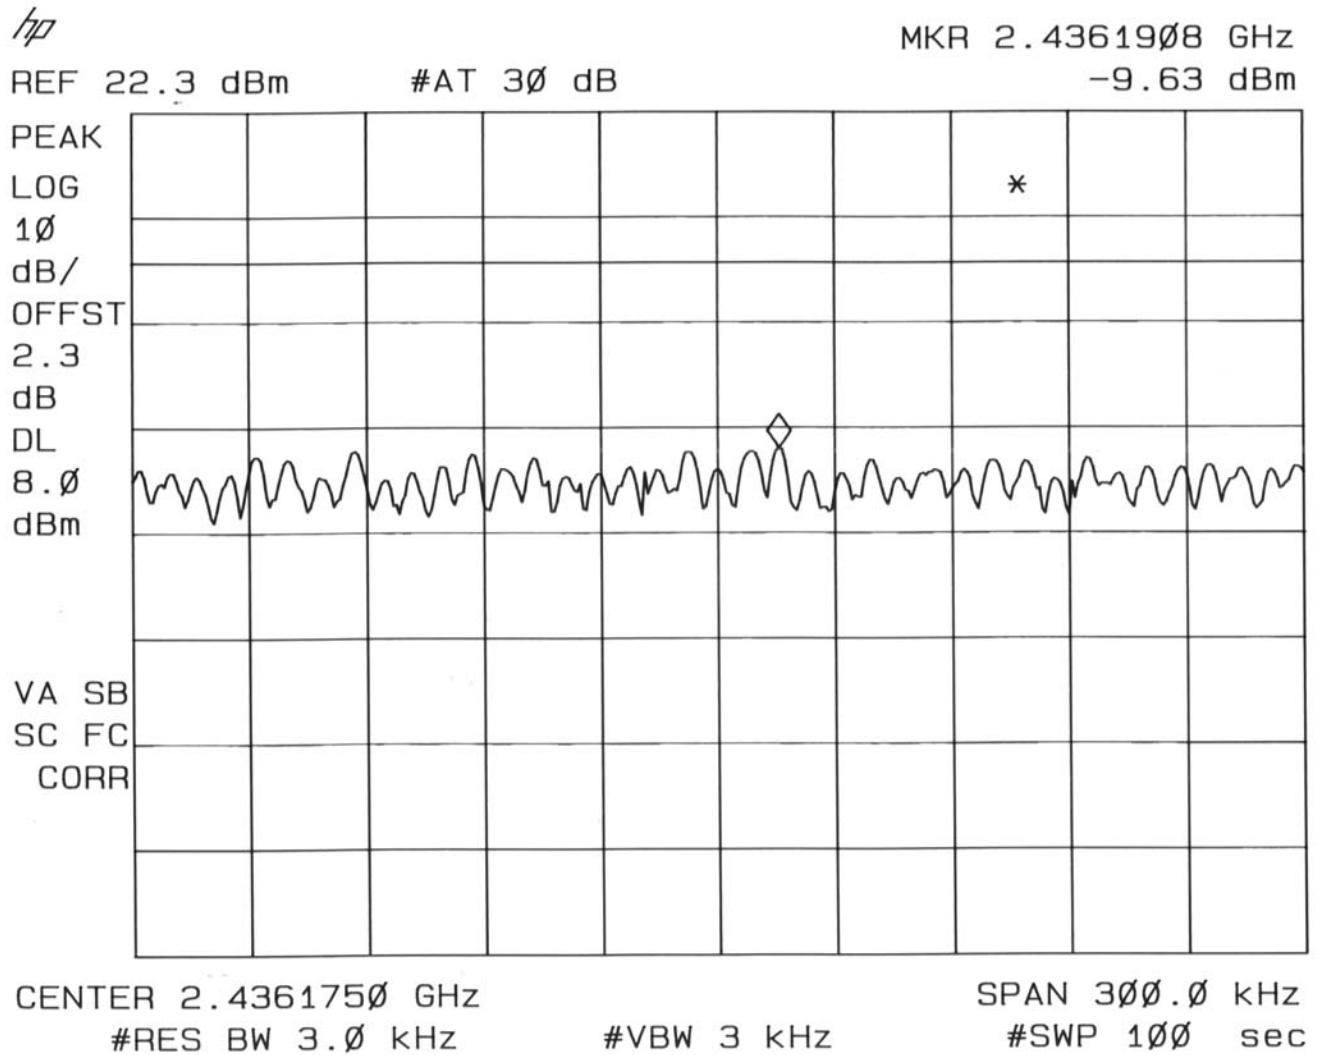


Plot 7 - Peak power spectral density (conducted) from the intentional radiator in any 3 kHz band.

Peak power spectral density (conducted) in a 3 kHz bandwidth at a transmission bit-rate of 1 Mbit/s. Corrected (offset) for cable losses.

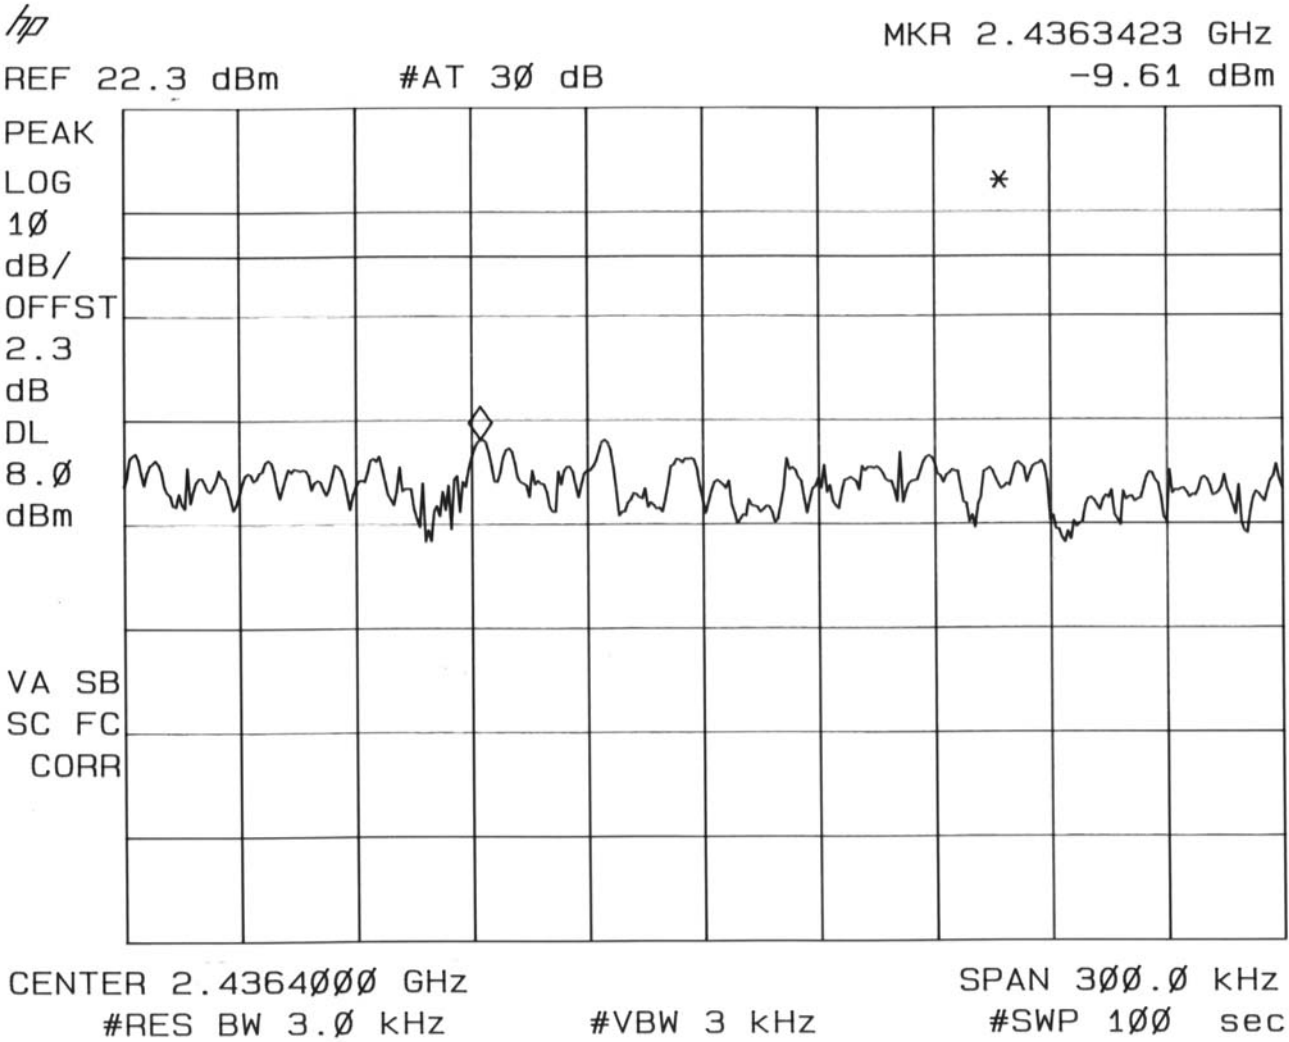

Plot 8 - Peak power spectral density (conducted) from the intentional radiator in any 3 kHz band.

Peak power spectral density (conducted) in a 3 kHz bandwidth at a transmission bit-rate of 2 Mbit/s. Corrected (offset) for cable losses.

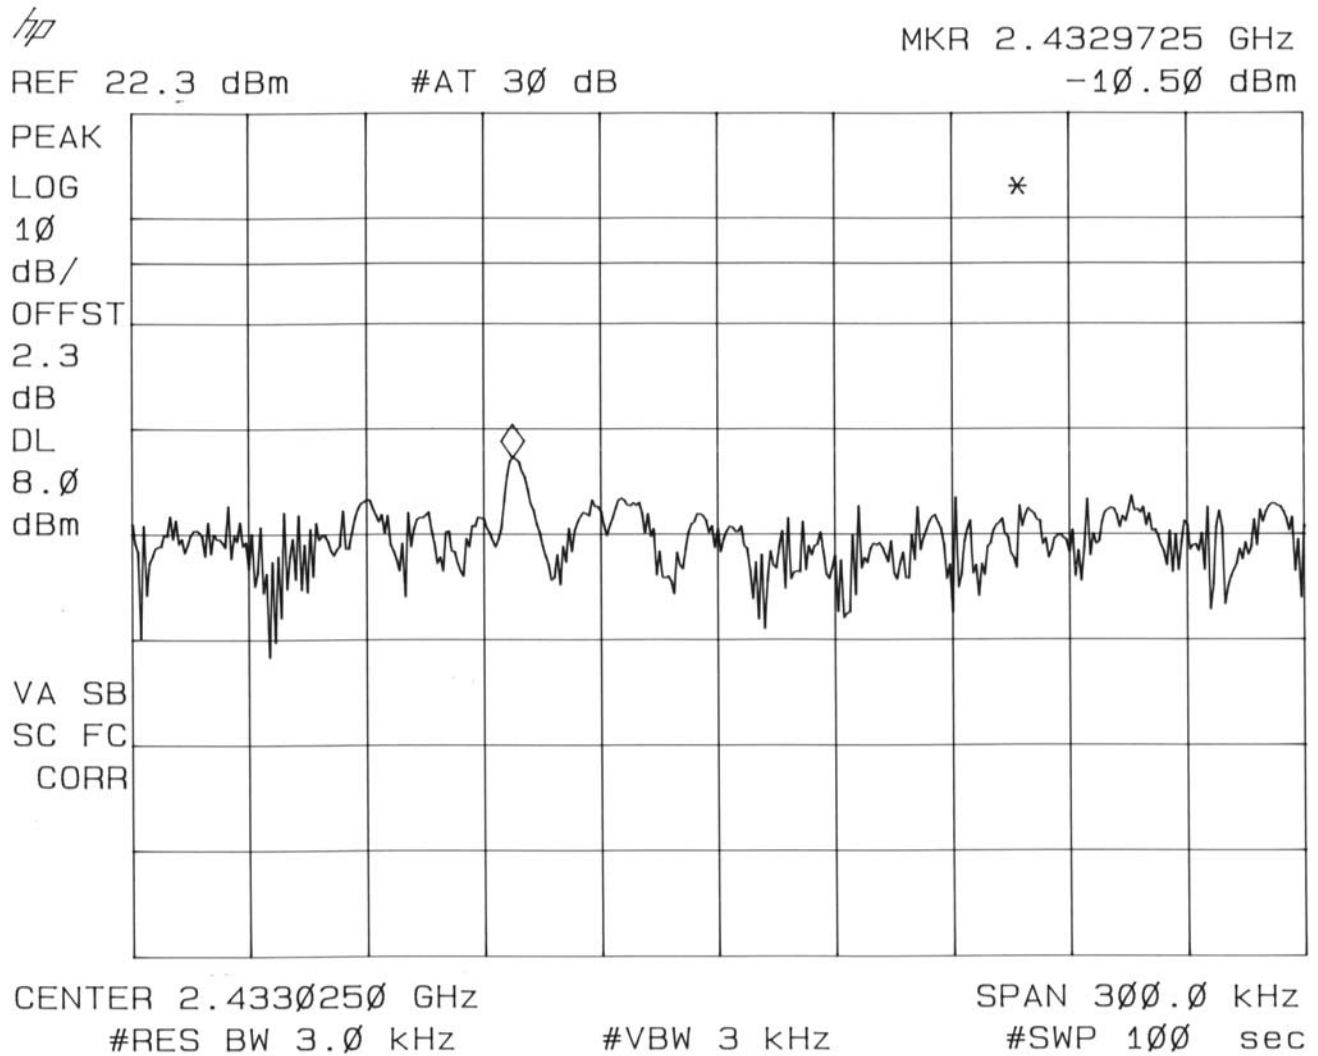


Plot 9 - Peak power spectral density (conducted) from the intentional radiator in any 3 kHz band.

Peak power spectral density (conducted) in a 3 kHz bandwidth at a transmission bit-rate of 5.5 Mbit/s. Corrected (offset) for cable losses.



Test specification(s): 47 CFR Part 15 (2001-12-18)
Description of EUT: 2.4 GHz low power WLAN integrated PCMCIA card
Manufacturer: Agere Systems Nederland B.V.
Brand mark: Agere
Type: PC24-11-FC/R
FCC ID: IMRWLPC2411R

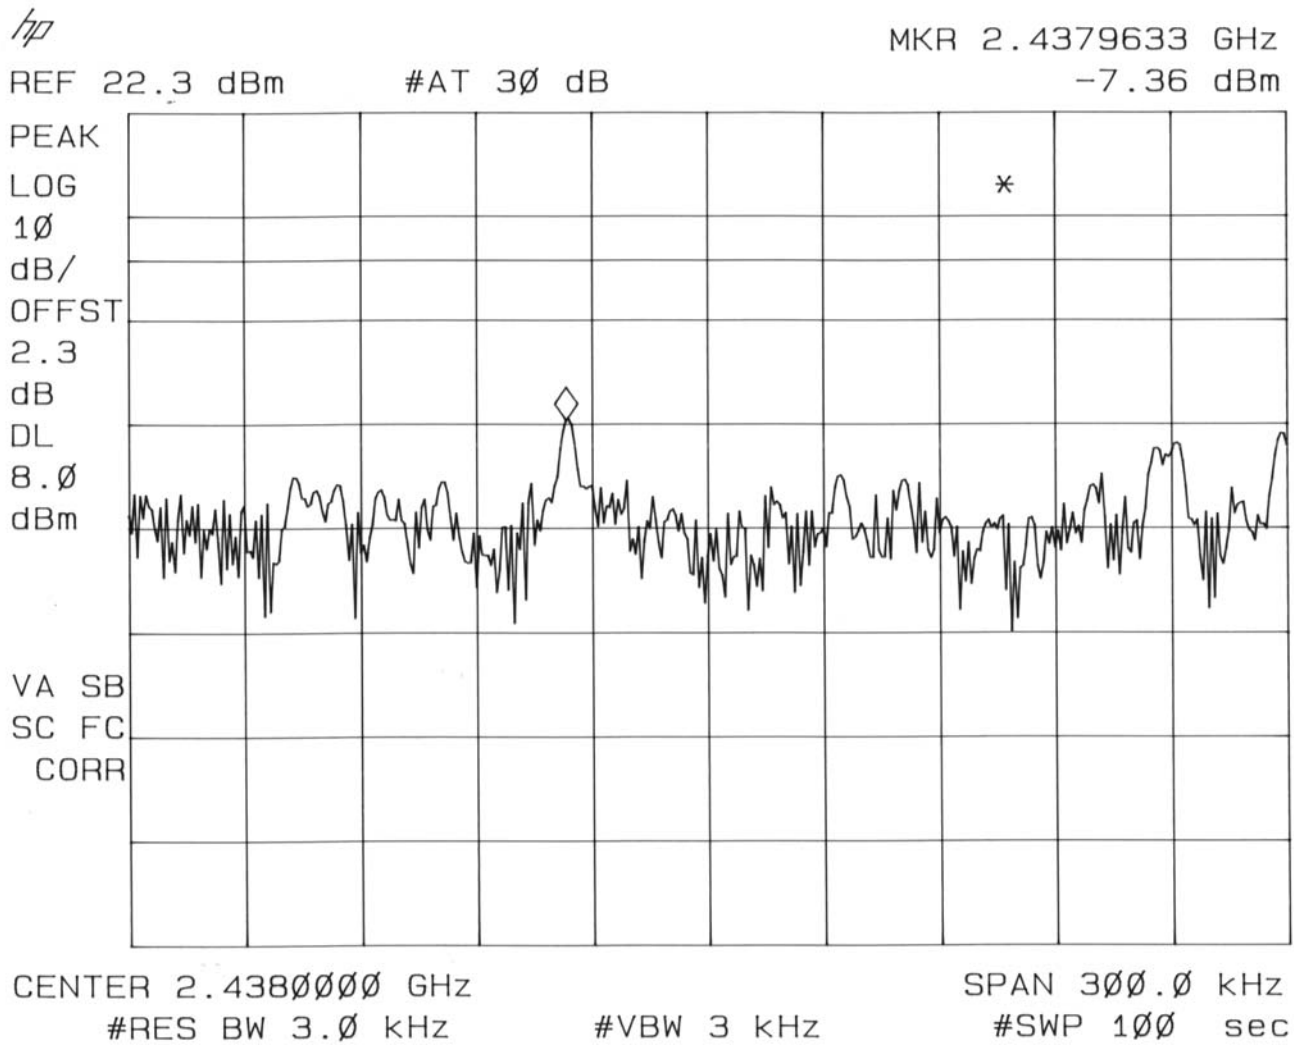

Plot 10 - Peak power spectral density (conducted) from the intentional radiator in any 3 kHz band.

Peak power spectral density (conducted) in a 3 kHz bandwidth at a transmission bit-rate of 11 Mbit/s. Corrected (offset) for cable losses.



Test specification(s): 47 CFR Part 15 (2001-12-18)
Description of EUT: 2.4 GHz low power WLAN integrated PCMCIA card
Manufacturer: Agere Systems Nederland B.V.
Brand mark: Agere
Type: PC24-11-FC/R
FCC ID: IMRWLPC2411R

6 List of utilized test equipment

Inventory number	Description	Brand	Type
12471	Biconical antenna 20MHz-200MHz	EATON	94455-1
12473	Log-per antenna 200-1000MHz	EATON	96005
12476	Antenna mast	EMCO	TR3
12477	Antenna mast 1-4 mtr	Poelstra	--
12482	Loop antenna	EMCO	6507
12483	Guidehorn	EMCO	3115
12484	Guidehorn	EMCO	3115
12488	Guidehorn 18 - 26.5 GHz	EMCO	RA42-K-F-4B-C
12533	Signalgenerator	MARCONI	2032
12559	Digital storage oscilloscope	Le Croy	9310M
12561	DC Power Supply 20A/70V	DELTA	SM7020D
12567	Plotter	HP	7440A
12605	calibrated dipole 28MHz-1GHz	Emco	3121c
12608	HF milliwattmeter	Hewlett Packard	HP435a
12609	Power sensor 10MHz-18GHz	Hewlett Packard	HP8481A
12636	Polyester chamber	Polyforce	--
12640	Temperature chamber	Heraeus	VEM03/500
13664	Spectrum analyzer	HP	HP8593E
13078	Preamplifier 0.1 GHz - 12 GHz	Miteq	AMF-3D-001120-35-14p
13452	Digital multi meter	HP	34401A
13526	Signalgenerator 20 GHz	Hewlett & Packard	83620A
13594	Preamplifier 10 GHz - 25 GHz	Miteq	AMF-6D-100250-10p
13886	Open Area testsite	Comtest	--
14051	Anechoic room	Comtest	--
14450	2.4 GHz bandrejectfilter	BSC	XN-1783
15633	Biconilog Testantenna	Chase	CBL 6111B
15667	Measuring receiver	R&S	ESCS 30
99045	DC Power Supply 3A/30V	DELTA	E030/3
99055	Non-conducting support	NMi	--
99061	Non-conducting support 150cm	NMi	--
99068	Detector N-F/BNC-F	Radiall	R451576000
99069	Cable 5m RG214	NMi	--
99071	Cable 10m RG214	NMi	--
99076	Bandpassfilter 4 - 10 GHz	Reactel	7AS-7G-6G-511
99077	Regulating trafo	RFT	LTS006
99112	Tripod	Chase	--
99136	Bandpassfilter 10 - 26.5 GHz	Reactel	9HS-10G/26.5G-S11