



TEST REPORT

No. I20D00079-SRD26

For

Client: Thales DIS AIS Deutschland GmbH

Production: LTE Data-Only SMT World-Module

Model Name: PLS62-W

Brand Name: CINTERION

FCC ID : QIPPLS62-W1

Hardware Version: B2.1

Software Version: 02.000

Issued date: 2020-08-10

NOTE

1. The test results in this test report relate only to the devices specified in this report.
2. This report shall not be reproduced except in full without the written approval of China Telecommunication Technology Labs.
3. For the test results, the uncertainty of measurement is not taken into account when judging the compliance with specification, and the results of measurement or the average value of measurement results are taken as the criterion of the compliance with specification directly.

Test Laboratory:

East China Institute of Telecommunications

Add: Block No.4, No.766, Jingang Road, Pudong District, Shanghai, P. R. China

Tel: +86 21 63843300

E-Mail: welcome@ecit.org.cn

Revision Version

Report Number	Revision	Date	Memo
I20D00079-SRD26	00	2020-08-10	Initial creation of test report

CONTENTS

1. TEST LABORATORY	6
1.1. TESTING LOCATION	6
1.2. TESTING ENVIRONMENT	6
1.3. SIGNATURE	6
2. CLIENT INFORMATION	7
2.1. APPLICANT INFORMATION	7
2.2. MANUFACTURER INFORMATION	7
3. EQUIPMENT UNDER TEST (EUT) AND ANCILLARY EQUIPMENT (AE)	8
3.1. ABOUT EUT	8
3.2. INTERNAL IDENTIFICATION OF EUT USED DURING THE TEST	8
3.3. INTERNAL IDENTIFICATION OF AE USED DURING THE TEST	8
4. REFERENCE DOCUMENTS	9
4.1. DOCUMENTS SUPPLIED BY APPLICANT	9
4.2. REFERENCE DOCUMENTS FOR TESTING	9
5. TEST RESULTS	10
5.1. SUMMARY OF TEST RESULTS	10
5.2. STATEMENTS	10
6. TEST EQUIPMENTS UTILIZED	11
6.1. CONDUCTED TEST SYSTEM	11
6.2. RADIATED EMISSION TEST SYSTEM	11
7. MEASUREMENT UNCERTAINTY	13
8. TEST ENVIRONMENT	14
ANNEX A. DETAILED TEST RESULTS	15
ANNEX A.1. OUTPUT POWER	15
ANNEX A.2. PEAK-TO-AVERAGE POWER RATIO	19

ANNEX A.3.	OCCUPIED BANDWIDTH.....	21
ANNEX A.4.	-26DB EMISSION BANDWIDTH	27
ANNEX A.5.	BAND EDGE AT ANTENNA TERMINALS	34
ANNEX A.6.	FREQUENCY STABILITY	38
ANNEX A.7.	CONDUCTED SPURIOUS EMISSION	44
ANNEX A.8.	RADIATED.....	53
ANNEX B.	ACCREDITATION CERTIFICATE	66

1. Test Laboratory

1.1. Testing Location

Company Name	ECIT Shanghai,East China Institute of Telecommunications
Address	1.7-8F, G Area, No. 668, Beijing East Road, Huangpu District, Shanghai, P. R. China 2.Block No.4, No.766, Jingang Road, Pudong District, Shanghai, P. R. China
Postal Code	201206
Telephone	+86 21 63843300
FCC registration No	CN1177

1.2. Testing Environment

Normal Temperature	15℃-35℃
Relative Humidity	20%-75%

Project Data

Project Leader	Zhou Yan
Testing Start Date	2020-07-15
Testing End Date	2020-07-30

1.3. Signature



Liu Yan
(Prepared this test report)



Fan Songyan
(Reviewed this test report)



Zheng Zhongbin
(Approved this test report)

2. Client Information

2.1. Applicant Information

Company Name	Thales DIS AIS Deutschland GmbH
Address	Werinherstr. 81, 81541 Munich, Germany
Telephone	/
Postcode	/

2.2. Manufacturer Information

Company Name	THALES DIS AIS Deutschland GmbH
Address	Thales DIS AIS Deutschland GmbH, Werinherstr. 81, 81541 Munich, Germany
Telephone	+ 86 10 59378342
Postcode	/

3. Equipment Under Test (EUT) and Ancillary Equipment (AE)

3.1. About EUT

Production	LTE Data-Only SMT World-Module
Model name	PLS62-W
GSM Frequency Band	850/900/1800/1900
UMTS Frequency Band	II/IV/V
Extreme Temperature	-10/+55°C
Nominal Voltage	3.8V
Extreme High Voltage	4.5V
Extreme Low Voltage	3.0V

Note:

- Photographs of EUT are shown in ANNEX A of this test report.
- The value of the antenna gain is provided by the customer. For specific antenna information, please check the antenna specifications of the customer.

3.2. Internal Identification of EUT used during the test

EUT ID*	SN or IMEI	HW Version	SW Version	Date of receipt
N01	004401081899482	B2.1	02.000	2020-07-14
N02	004401081896231	B2.1	02.000	2020-07-14
N03	004401081899888	B2.1	02.000	2020-07-14

*EUT ID: is used to identify the test sample in the lab internally.

3.3. Internal Identification of AE used during the test

AE ID*	Description	Type	Manufacturer
AE1	RF cable	---	AE1

*AE ID: is used to identify the test sample in the lab internally.

4. Reference Documents

4.1. Documents supplied by applicant

All technical documents are supplied by the client or manufacturer, which is the basis of testing.

4.2. Reference Documents for testing

The following documents listed in this section are referred for testing.

Reference	Title	Version
FCC Part 2	FREQUENCY ALLOCATIONS AND RADIO TREATY MATTERS; GENERAL RULES AND REGULATIONS	2018-10-01
FCC Part 22	PUBLIC MOBILE SERVICES	2018-10-01
FCC Part 24	PERSONAL COMMUNICATIONS SERVICES	2018-10-01
ANSI-TIA-603-E	Land Mobile FM or PM Communications Equipment Measurement and Performance Standards	2016
ANSI C63.26	American National Standard of Procedures for Compliance Testing of Licensed Transmitters Used in Licensed Radio	2015
KDB 971168 D01	Measurement Guidance for Certification of Licensed Digital Transmitters	v03r01

5. Test Results

5.1. Summary of Test Results

Measurement Items	Sub-clause of Part2/22/24	Verdict
Output Power	2.1046/22.913(a)/24.232(c)	P
Peak-to-Average Ratio	24.232(d)	P
99%Occupied Bandwidth	2.1049(h)(i)/ 22.917(b)	P
-26dB Emission Bandwidth	22.917(b)/§24.238(b)	P
Band Edge at antenna terminals	22.917(a)/24.238(a)	P
Frequency stability	2.1055/24.235	P
Conducted Spurious mission	2.1053/22.917(a)/24.238(a)	P
Emission Limit	2.1051/22.917/24.238/22.913/24.232	P

Note: please refer to Annex A in this test report for the detailed test results.

The following terms are used in the above table.

P	Pass, the EUT complies with the essential requirements in the standard.
NP	Not Perform, the test was not performed by ECIT.
NA	Not Applicable, the test was not applicable.
F	Fail, the EUT does not comply with the essential requirements in the standard.

5.2. Statements

The PLS62-W is a modified product for testing.

ECIT only performed test cases which identified with P/NP/NA/F results in Annex A.

ECIT has verified that the compliance of the tested device specified in section 3 of this test report is successfully evaluated according to the procedure and test methods as defined in type certification requirement listed in section 4 of this test report.

Note: This conduction data only tests the power and band edge of WCDMA BII/IV/V, the rest of the conduction data refer to I17D00184-SD05, the radiation data refer to I20D00046-SRD05.

6. Test Equipments Utilized

6.1. Conducted Test System

Item	Instrument Name	Type	SN	Manufacturer	Cal. Date	Cal. interval
1	Vector Signal Analyzer	FSQ26	101096	R&S	2017-05-11	1 year
					2020-05-10	
2	DC Power Supply	ZUP60-14	LOC-220Z006-0007	TDL-Lambda	2017-05-11	1 year
					2020-05-10	
3	Universal Radio Communication Tester	CMW500	104178	R&S	2017-05-11	1 year
					2020-05-10	

6.2. Radiated Emission Test System

The test equipment and ancillaries used are as follows.

Item	Instrument Name	Type	SN	Manufacturer	Cal. Date	Cal. interval
1	Universal Radio Communication Tester	CMU200	123123	R&S	2019-05-10	1 year
					2020-05-10	
2	EMI Test Receiver	ESU40	100307	R&S	2019-05-10	1 year
					2020-05-10	
3	TRILOG Antenna	VULB9163	VULB9163-515	Schwarzbeck	2020-02-28	2 years
4	Double- ridged guide Antenna	ETS-3117	00135890	ETS	2020-02-28	2 years
5	2-Line V-Network	ENV216	101380	R&S	2019-05-10	1 year
					2020-05-10	
6	RF Signal Generator	SMF100A	102314	R&S	2019-05-10	1 year
					2020-05-10	
7	Amplifier	SCU08	10146	R&S	2019-05-10	1 year
					2020-05-10	

Climate chamber

Item	Instrument Name	Type	SN	Manufacturer	Cal. Date	Cal. interval
1	Climate chamber	UT333 BT	C191995461	UNI-T	2020-05-10	1 year
2	Climate chamber	SH-641	92012011	ESPEC	2016-01-07	2 years

Anechoic chamber

Fully anechoic chamber by ETS

7. Measurement Uncertainty

Measurement uncertainty for all the testing in this report are within the limit specified in ECIT documents. The detailed measurement uncertainty is defined in ECIT documents.

Measurement Items	Range	Confidence Level	Calculated Uncertainty
Maximum Peak Output Power	30MHz-3600MHz	95%	$\pm 0.544\text{dB}$
EBW and VBW	30MHz-3600MHz	95%	$\pm 62.04\text{Hz}$
Transmitter Spurious Emission-Conducted	30MHz-2GHz	95%	$\pm 0.90\text{dB}$
Transmitter Spurious Emission-Conducted	2GHz-3.6GHz	95%	$\pm 0.88\text{dB}$
Transmitter Spurious Emission-Conducted	3.6GHz-8GHz	95%	$\pm 0.96\text{dB}$
Transmitter Spurious Emission-Conducted	8GHz-20GHz	95%	$\pm 0.94\text{dB}$
Transmitter Spurious Emission-Radiated	9KHz-30MHz	95%	$\pm 5.66\text{dB}$
Transmitter Spurious Emission-Radiated	30MHz-1000MHz	95%	$\pm 4.98\text{dB}$
Transmitter Spurious Emission-Radiated	1000MHz -18000MHz	95%	$\pm 5.06\text{dB}$
Transmitter Spurious Emission-Radiated	18000MHz -40000MHz	95%	$\pm 5.20\text{dB}$
Frequency stability	1MHz-16GHz	95%	$\pm 62.04\text{Hz}$

8. Test Environment

Shielding Room1 (6.0 meters×3.0 meters×2.7 meters) did not exceed following limits along the conducted RF performance testing:

Temperature	Min. = 15 °C, Max. = 35 °C
Relative humidity	Min. = 20 %, Max. = 75 %
Shielding effectiveness	> 100 dB
Ground system resistance	< 0.5 Ω

Control room did not exceed following limits along the EMC testing:

Temperature	Min. = 15 °C, Max. = 35 °C
Relative humidity	Min. = 25 %, Max. = 75 %
Shielding effectiveness	> 100 dB
Electrical insulation	> 10 kΩ
Ground system resistance	< 0.5 Ω

Fully-anechoic chamber1 (6.9 meters×10.9 meters×5.4 meters) did not exceed following limits along the EMC testing:

Temperature	Min. = 15 °C, Max. = 35 °C
Relative humidity	Min. = 25 %, Max. = 75 %
Shielding effectiveness	> 100 dB
Electrical insulation	> 10 kΩ
Ground system resistance	< 0.5 Ω
VSWR	Between 0 and 6 dB, from 1GHz to 18GHz
Site Attenuation Deviation	Between -4 and 4 dB, 30MHz to 1GHz
Uniformity of field strength	Between 0 and 6 dB, from 80MHz to 3000 MHz

ANNEX A. Detailed Test Results

ANNEX A.1. OUTPUT POWER

A.1.1. Summary

During the process of testing, the EUT was controlled Rhode & Schwarz Digital Radio.

Communication tester (CMU-200) to ensure max power transmission and proper modulation.

This result contains peak output power and EIRP measurements for the EUT. In all cases, output power is within the specified limits.

A.1.2. Conducted

A.1.2.1. Method of Measurements

Method of measurements please refer to KDB971168 D01 v03 clause 5.

The EUT was set up for the max output power with pseudo random data modulation.

The power was measured with Rhode & Schwarz Spectrum Analyzer FSQ(peak).

These measurements were done at 3 frequencies, 1850.2 MHz, 1880.0MHz and 1909.8MHz for PCS1900 band; 824.2MHz, 836.6MHz and 848.8MHz for GSM850 band. (bottom, middle and top of operational frequency range).

These measurements were done at 3 frequencies, 1852.4 MHz, 1880.0MHz and 1907.6MHz for WCDMA Band II; 1732.6 MHz, 1712.4MHz and 1752.6MHz for WCDMA Band IV; 826.4MHz, 836.6MHz and 846.6MHz for WCDMA Band V. (bottom, middle and top of operational frequency range).

A.1.2.2 Test procedures:

1. The transmitter output port was connected to base station.
2. Set the EUT at maximum power through base station.
3. Select lowest, middle, and highest channels for each band and different modulation.
4. Measure the maximum burst average power for GSM and maximum average power for other modulation signal.

A.1.2.3 Limit:

22.913(a) Mobile stations are limited to 7watts.

24.232(c) Mobile and portable stations are limited to 2 watts.

A.1.2.4 Test Procedure:

The transmitter output power was connected to calibrated attenuator, the other end of which was connected to signal analyzer. Transmitter output power was read off the power in dBm. The power outputs at the transmitter antenna port was determined by adding the value of attenuator to the signal analyzer reading.

A.1.2.5 GSM Test Condition:

RBW	VBW	Sweep time	Span
3MHz	10MHz	Auto	50MHz

A.1.2.6 WCDMA Test Condition:

RBW	VBW	Sweep time	Span
10MHz	30MHz	Auto	50MHz

A.1.2.7 Measurement results:

GPRS 850 (GMSK 1 Slot)		
Channel/fc(MHz)	Peak power (dBm)	AV power (dBm)
Low 128/824.2	33.79	33.41
Mid 189/836.4	34.00	33.62
High 251/848.8	34.06	33.71
EDGE 850 (8PSK 1 Slot)		
Channel/fc(MHz)	Peak power (dBm)	AV power (dBm)
Low 128/824.2	30.07	26.92
Mid 189/836.4	30.11	26.98
High 251/848.8	30.19	26.96

GPRS 1900 (GMSK 1 Slot)		
Channel/fc(MHz)	Peak power (dBm)	AV power (dBm)
Low 512/1850.2	30.11	29.86
Mid 661/1880	30.38	30.15
High 810/1909.8	30.06	29.79
EDGE 1900 (8PSK 1 Slot)		
Channel/fc(MHz)	Peak power (dBm)	AV power (dBm)
Low 512/1850.2	28.10	25.15
Mid 661/1880	28.47	25.47
High 810/1909.8	28.01	25.06

WCDMA II		
Channel/fc(MHz)	Peak power (dBm)	AV power (dBm)
Low 9663/1852.6	23.81	23.80
Mid 9800 /1880	23.78	23.76
High 9937/1907.4	23.58	23.57
WCDMA BAND IV		
Channel/fc(MHz)	Peak power (dBm)	AV power (dBm)
Low 1312/1712.4	23.47	23.46
Mid 1413 /1732.6	23.66	23.64
High 1513/1752.6	23.65	23.63
WCDMA BAND V		
Channel/fc(MHz)	Peak power (dBm)	AV power (dBm)
Low 4358/826.6	24.42	24.12
Mid 4400/835	24.26	24.10
High 4457/846.4	24.37	24.12

Conclusion: PASS

ANNEX A.2. Peak-to-Average Power Ratio

Method of test measurements please refer to KDB971168 D01 v03 clause 5.7.

A.2.1 PAPR Limit

The peak-to-average power ratio (PAPR) of the transmission may not exceed 13dB

A.2.2 Test procedures

1. The EUT was connected to the spectrum analyzer and system simulator via a power divider.
2.
 - 1) Select the spectrum analyzer CCDF function.
 - 2) Set $RBW \geq \text{signal's occupied bandwidth}$.
 - 3) Set the number of counts to a value that stabilizes the measured CCDF curve;
 - 4) Sweep time $\geq 1s$.
3. Record the maximum PAPR level associated with a probability of 0.1%.

A.2.3 Test results:

GPRS850			
Channel	128	189	251
Frequency (MHz)	824.2	836.4	848.8
PAPR(dB)	8.13	7.59	7.67
EDGE 850			
Channel	128	189	251
Frequency (MHz)	824.2	836.4	848.8
PAPR(dB)	10.24	10.91	10.35

GPRS1900			
Channel	512	661	810
Frequency (MHz)	1850.2	1880	1909.8
PAPR(dB)	7.16	7.26	9.67
EDGE 1900			
Channel	512	661	810
Frequency (MHz)	1850.2	1880	1909.8
PAPR(dB)	8.83	9.67	9.34

WCDMA Band II			
Channel	9262	9400	9538
Frequency (MHz)	1852.4	1880	1907.6
PAPR(dB)	8.59	8.59	8.59
WCDMA Band IV			
Channel	1312	1413	1513
Frequency (MHz)	1712.4	1732.6	1752.6
PAPR(dB)	4.71	4.71	5.1
WCDMA Band V			
Channel	4132	4183	4233
Frequency (MHz)	826.4	836.4	846.6
PAPR(dB)	8.43	8.43	8.43

Conclusion: PASS

ANNEX A.3. Occupied Bandwidth

Method of test please refer to KDB971168 D01 v03 clause 4.0.




A.3.1. Occupied Bandwidth






Similar to conducted emissions; occupied bandwidth measurements are only provided for selected frequencies in order to reduce the amount of submitted data. Data were taken at the extreme and mid frequencies of GSM850, PCS1900, WCDMA BANDII, WCDMA BANDIV and WCDMA BANDV.





A.3.2 Test Procedure:




1. The EUT output RF connector was connected with a short cable to the signal analyzer.
2. RBW was set to about 1% of emission BW, VBW $\geq$ 3 times RBW,.
3. 99% bandwidth were measured, the occupied bandwidth is delta frequency between the two points where the display line intersects the signal trace.

A.3.3 Test result:

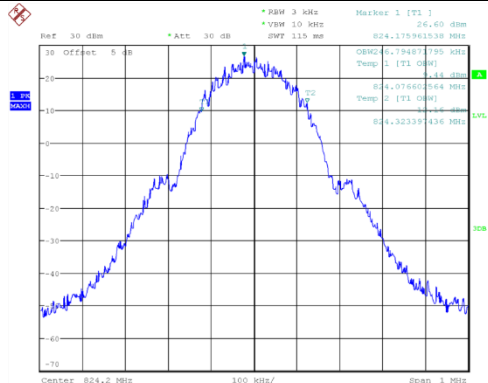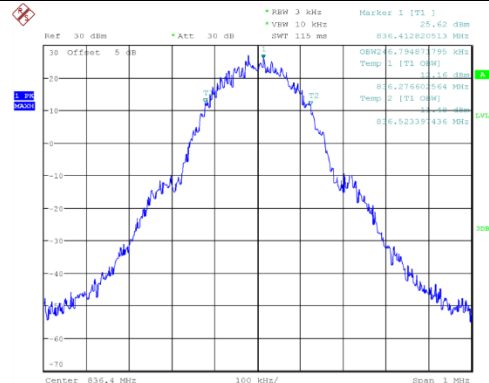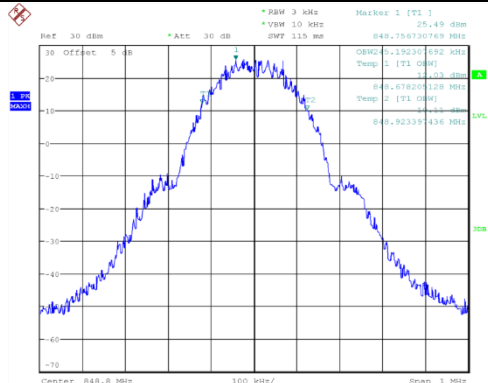
GPRS850			
Channel 128, 824.2MHz, Occupied Bandwidth (99%)(kHz)	246.80	Channel 189, 836.4MHz, Occupied Bandwidth (99%)(kHz)	246.80
 Date: 27.JUL.2017 07:54:37		 Date: 27.JUL.2017 07:53:59	
Channel 251, 848.8MHz, Occupied Bandwidth (99%)(kHz)	245.20	/	
 Date: 27.JUL.2017 07:55:15		/	

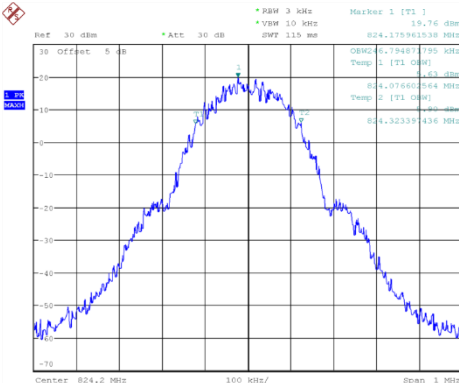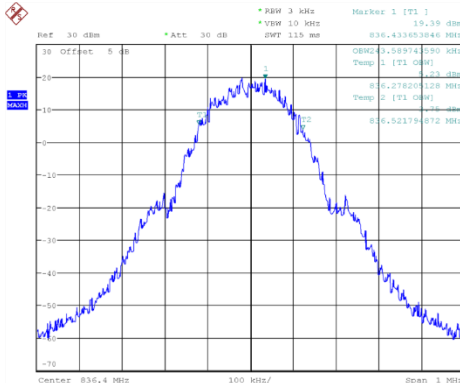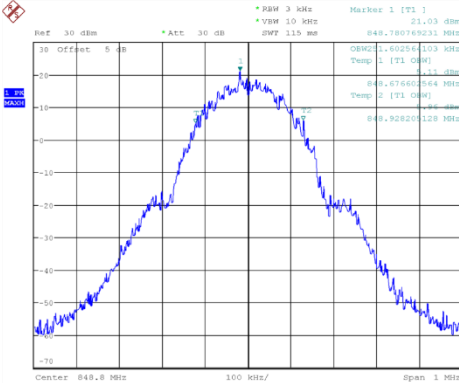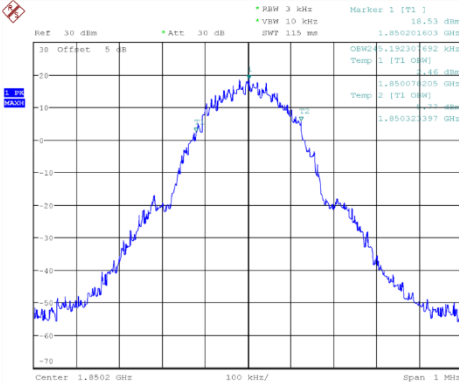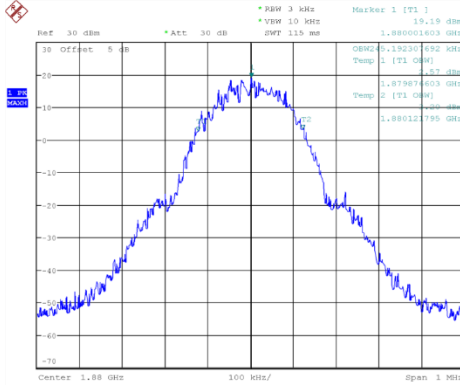EDGE850			
Channel 128, 824.2MHz, Occupied Bandwidth (99%)(kHz)	246.80	Channel 189, 836.4MHz, Occupied Bandwidth (99%)(kHz)	241.99
 Ref 30 dBm Att 30 dB SWF 115 MHz Marker 1 [T1] 19.76 dBm OBW99 246.80 kHz Temp 1 [T1] 19.76 dBm Center 824.2 MHz 100 kHz/ Span 1 MHz Date: 27.JUL.2017 08:00:20		 Ref 30 dBm Att 30 dB SWF 115 MHz Marker 1 [T1] 19.39 dBm OBW99 241.99 kHz Temp 1 [T1] 19.39 dBm Center 836.4 MHz 100 kHz/ Span 1 MHz Date: 27.JUL.2017 07:59:42	
Channel 251, 848.8MHz, Occupied Bandwidth (99%)(kHz)	250.00	/	
 Ref 30 dBm Att 30 dB SWF 115 MHz Marker 1 [T1] 21.03 dBm OBW99 250.00 kHz Temp 1 [T1] 21.03 dBm Center 848.8 MHz 100 kHz/ Span 1 MHz Date: 27.JUL.2017 08:00:58		/	
GPRS1900			
Channel 512, 1850.2 MHz Occupied Bandwidth (99%)(kHz)	245.19	Channel 661, 1880 MHz Occupied Bandwidth (99%)(kHz)	240.39
 Ref 30 dBm Att 30 dB SWF 115 MHz Marker 1 [T1] 18.53 dBm OBW99 245.19 kHz Temp 1 [T1] 18.53 dBm Center 1.8502 GHz 100 kHz/ Span 1 MHz Date: 27.JUL.2017 08:07:58		 Ref 30 dBm Att 30 dB SWF 115 MHz Marker 1 [T1] 19.19 dBm OBW99 240.39 kHz Temp 1 [T1] 19.19 dBm Center 1.88 GHz 100 kHz/ Span 1 MHz Date: 27.JUL.2017 08:07:20	

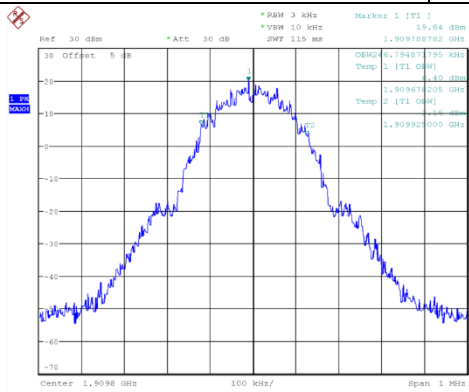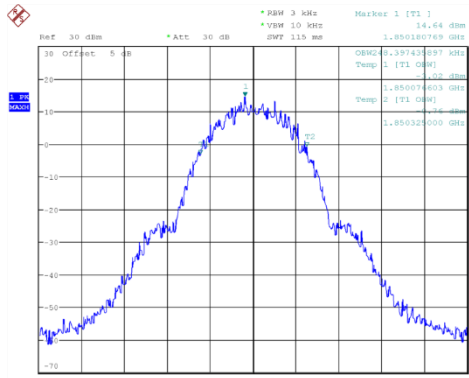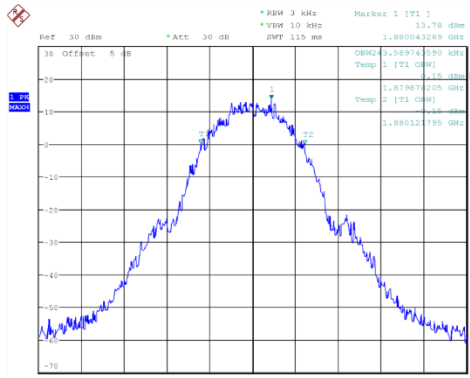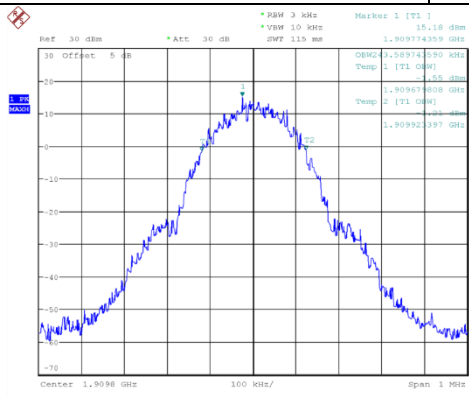Channel 810, 1909.8 MHz Occupied Bandwidth (99%)(kHz)		248.40	/	
			/	
Date: 27.JUL.2017 08:08:36				
EDGE1900				
Channel 512, 1850.2 MHz Occupied Bandwidth (99%)(kHz)		243.59	Channel 661, 1880 MHz Occupied Bandwidth (99%)(kHz)	249.62
				
Date: 27.JUL.2017 08:12:20			Date: 27.JUL.2017 08:11:42	
Channel 810, 1909.8 MHz Occupied Bandwidth (99%)(kHz)		248.40	/	
			/	
Date: 27.JUL.2017 08:12:57				

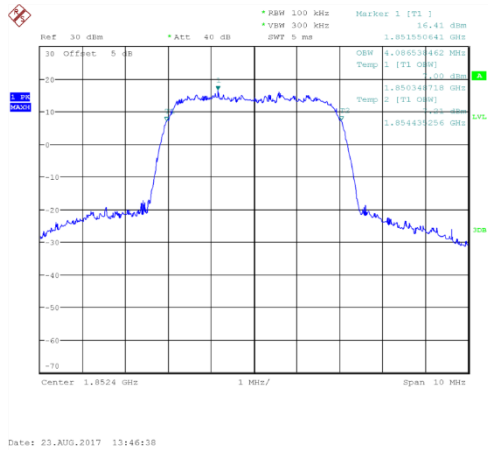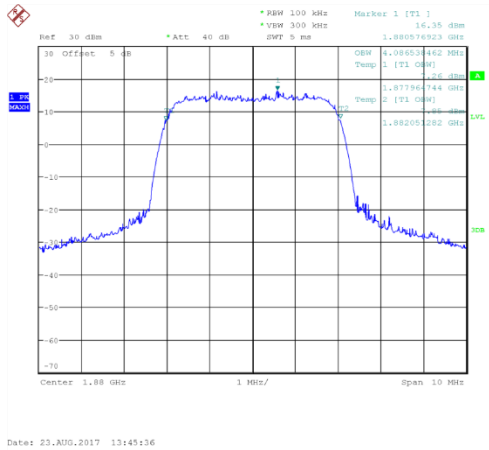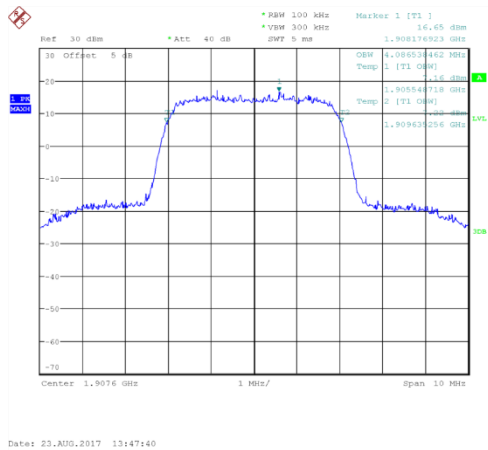WCDMA BAND II			
Channel 9262, 1852.4 MHz Occupied Bandwidth (99%)(MHz)	4.09	Channel 9400, 1880 MHz Occupied Bandwidth (99%)(MHz)	4.09
 Date: 23.AUG.2017 13:46:38		 Date: 23.AUG.2017 13:49:36	
Channel 9538, 1907.6 MHz Occupied Bandwidth (99%)(MHz)	4.09	/	
 Date: 23.AUG.2017 13:47:40		/	

WCDMA BAND IV			
Channel 1312, 1712.4MHz Occupied Bandwidth (99%)(MHz)	4.09	Channel 1413, 1732.6 MHz Occupied Bandwidth (99%)(MHz)	4.09
Ref: 30 dBm * PBM 100 kHz * VSM 300 kHz SWF 5 ms Marker 1 [T1] 17.21 dBm 1.712916523 GHz OSW 4.095534452 MHz Temp 1 [T1] dBm 4.09 dBm 1.710364744 GHz Temp 2 [T1] dBm 1.714451282 GHz Center 1.7124 GHz 1 MHz/ Span 10 MHz Date: 16.AUG.2017 08:00:03		Ref: 30 dBm * PBM 100 kHz * VSM 300 kHz SWF 5 ms Marker 1 [T1] 17.18 dBm 1.731718590 GHz OSW 4.095534452 MHz Temp 1 [T1] dBm 4.09 dBm 1.730544718 GHz Temp 2 [T1] dBm 1.734631256 GHz Center 1.7326 GHz 1 MHz/ Span 10 MHz Date: 16.AUG.2017 07:58:58	
Channel 1513, 1752.6 MHz Occupied Bandwidth (99%)(MHz)	4.07	/	
Ref: 30 dBm * PBM 100 kHz * VSM 300 kHz SWF 5 ms Marker 1 [T1] 16.71 dBm 1.751702564 GHz OSW 4.070513021 MHz Temp 1 [T1] dBm 4.07 dBm 1.750564744 GHz Temp 2 [T1] dBm 1.754631256 GHz Center 1.7526 GHz 1 MHz/ Span 10 MHz Date: 16.AUG.2017 08:01:07			
WCDMA BAND V			
Channel 4132, 826.4MHz Occupied Bandwidth (99%)(MHz)	4.07	Channel 4183, 836.6MHz Occupied Bandwidth (99%)(MHz)	4.07
Ref: 34 dBm * PBM 50 kHz * VSM 200 kHz SWF 5 ms Marker 1 [T1] 15.74 dBm 835.098333333 MHz OSW 4.070513021 MHz Temp 1 [T1] dBm 4.07 dBm 834.538717549 MHz Temp 2 [T1] dBm 835.619231269 MHz Center 826.4 MHz 1 MHz/ Span 10 MHz Date: 25.JUL.2017 13:20:25		Ref: 34 dBm * PBM 50 kHz * VSM 200 kHz SWF 5 ms Marker 1 [T1] 15.34 dBm 835.098333333 MHz OSW 4.070513021 MHz Temp 1 [T1] dBm 4.07 dBm 834.538717549 MHz Temp 2 [T1] dBm 835.619231269 MHz Center 836.6 MHz 1 MHz/ Span 10 MHz Date: 25.JUL.2017 13:19:44	

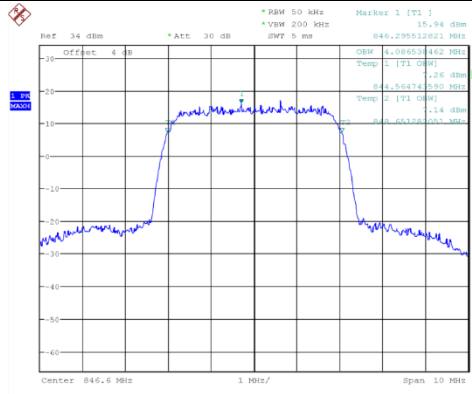Channel 4233, 846.6 MHz Occupied Bandwidth (99%)(MHz)	4.09	/
 Ref: 34 dBm, Att: 30 dB, Span: 10 MHz, Center: 846.6 MHz		/

ANNEX A.4. -26dB Emission Bandwidth

Method of test please refer to KDB971168 D01 v03 clause 4.0.

A.4.1. -26dB Emission Bandwidth

Similar to conducted emissions; occupied bandwidth measurements are only provided for selected frequencies in order to reduce the amount of submitted data. Data were taken at the extreme and mid frequencies of GSM850, PCS1900, WCDMA BANDII, WCDMA BANDIV and WCDMA BANDV.

A.4.2 Test Procedure:




1. The EUT output RF connector was connected with a short cable to the signal analyzer.
2. RBW was set to about 1% of emission BW, VBW $\geq$ 3 times RBW,.
3. 26dB bandwidth were measured, the occupied bandwidth is delta frequency between the two points where the display line intersects the signal trace.

A.4.3 Measurement methods:

For GSM: signal analyzer setting as: RBW=3KHz; VBW=10KHz; Span=1MHz.

For WCDMA: signal analyzer setting as: RBW=50KHz; VBW=200KHz; Span=10MHz.






A.4.4 Test results:

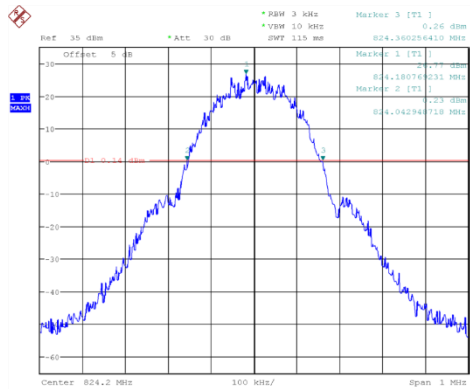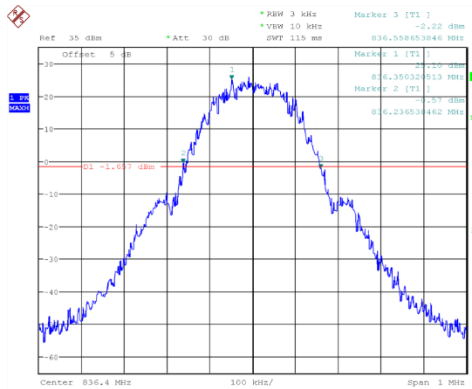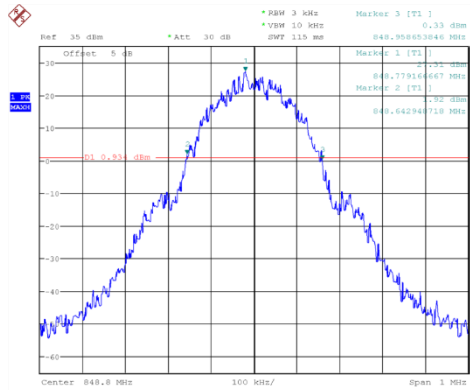
GPRS850			
Channel 128, 824.2MHz, -26dBc Emission Bandwidth(kHz)	317.31	Channel 189, 836.4MHz, -26dBc Emission Bandwidth(kHz)	322.12
 Ref: 35 dBm *Att: 30 dB *PBM: 3 kHz *VSW: 1.0 MHz SWF: 115 MHz Marker 3 [T1] 1 0.26 dBm 824.360256410 MHz Marker 1 [T1] 1 20.799 dBm 824.180768231 MHz Marker 2 [T1] 1 0.23 dBm 824.042948718 MHz Offset 5 dB Att 30 dB Center 824.2 MHz 100 kHz/ Span 1 MHz Date: 27.JUL.2017 11:24:19		 Ref: 35 dBm *Att: 30 dB *PBM: 3 kHz *VSW: 1.0 MHz SWF: 115 MHz Marker 3 [T1] 1 0.22 dBm 836.558653846 MHz Marker 1 [T1] 1 20.799 dBm 836.380768231 MHz Marker 2 [T1] 1 0.23 dBm 836.042948718 MHz Offset 5 dB Att 30 dB Center 836.4 MHz 100 kHz/ Span 1 MHz Date: 27.JUL.2017 11:23:50	
Channel 251, 848.8MHz, -26dBc Emission Bandwidth(kHz)	315.71	/	
 Ref: 35 dBm *Att: 30 dB *PBM: 3 kHz *VSW: 1.0 MHz SWF: 115 MHz Marker 3 [T1] 1 0.33 dBm 848.908653846 MHz Marker 1 [T1] 1 20.799 dBm 848.779164667 MHz Marker 2 [T1] 1 0.23 dBm 848.642948718 MHz Offset 5 dB Att 30 dB Center 848.8 MHz 100 kHz/ Span 1 MHz Date: 27.JUL.2017 11:24:48			

EDGE850			
Channel 128, 824.2MHz, -26dBc Emission Bandwidth(kHz)	312.50	Channel 189, 836.4MHz, -26dBc Emission Bandwidth(kHz)	315.71
Ref: 35 dBm *Att: 30 dB *RBW: 3 kHz *VBW: 10 kHz SWF: 115 ms Marker 3 [T1] -6.24 dBm 824.357051282 MHz Marker 1 [T1] -27.40 dBm 824.243249231 MHz Marker 2 [T1] -27.25 dBm 824.044551282 MHz D1 -26.24 dBm Date: 27.JUL.2017 11:28:37		Ref: 35 dBm *Att: 30 dB *RBW: 3 kHz *VBW: 10 kHz SWF: 115 ms Marker 3 [T1] -7.40 dBm 836.557051282 MHz Marker 1 [T1] -27.40 dBm 836.432377955 MHz Marker 2 [T1] -27.30 dBm 836.241344104 MHz D1 -7.31 dBm Date: 27.JUL.2017 11:28:08	
Channel 251, 848.8MHz, -26dBc Emission Bandwidth(kHz)	312.50	/	
Ref: 35 dBm *Att: 30 dB *RBW: 3 kHz *VBW: 10 kHz SWF: 115 ms Marker 3 [T1] -5.63 dBm 848.957051282 MHz Marker 1 [T1] -27.40 dBm 848.820833333 MHz Marker 2 [T1] -27.01 dBm 848.644551282 MHz D1 -6.223 dBm Date: 27.JUL.2017 11:29:06		/	
Channel 810, 1909.8 MHz -26dBc Emission Bandwidth(kHz)	310.00	/	
Ref: 30 dBm *Att: 20 dB *RBW: 3 kHz *VBW: 10 kHz SWF: 115 ms Marker 3 [T1] -3.71 dBm 1909.93300 GHz Marker 1 [T1] -22.47 dBm 1909.824100 GHz Marker 2 [T1] -24.48 dBm 1909.843070 GHz D1 -3.53 dBm Date: 10.FEB.2020 11:14:49		/	

East China Institute of Telecommunications Page Number: 30 of 66
Report Issued Date: Aug. 10, 2020

East China Institute of Telecommunications Page Number: 31 of 66
Report Issued Date: Aug. 10, 2020

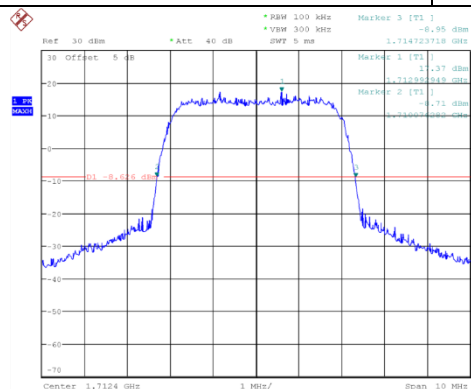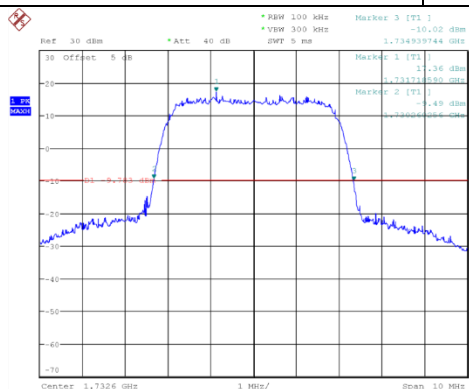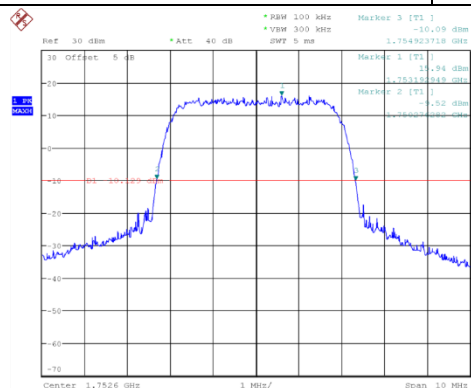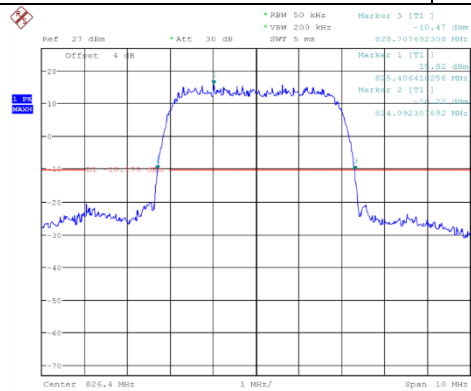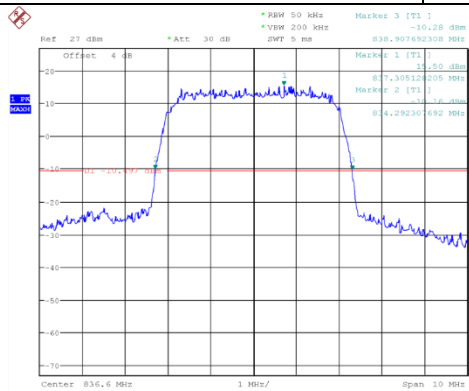WCDMA BAND IV			
Channel 1312, 1712.4MHz -26dBc Emission Bandwidth(MHz)	4.647	Channel 1413, 1732.6 MHz -26dBc Emission Bandwidth(MHz)	4.679
 Date: 16.AUG.2017 08:05:34		 Date: 16.AUG.2017 08:05:02	
Channel 1513, 1752.6 MHz -26dBc Emission Bandwidth(MHz)	4.647	/	
 Date: 16.AUG.2017 08:06:06		/	
WCDMA BAND V			
Channel 4132, 826.4MHz -26dBc Emission Bandwidth(MHz)	4.615	Channel 4183, 836.6MHz -26dBc Emission Bandwidth(MHz)	4.615
 Date: 25.JUL.2017 13:28:15		 Date: 25.JUL.2017 13:27:45	

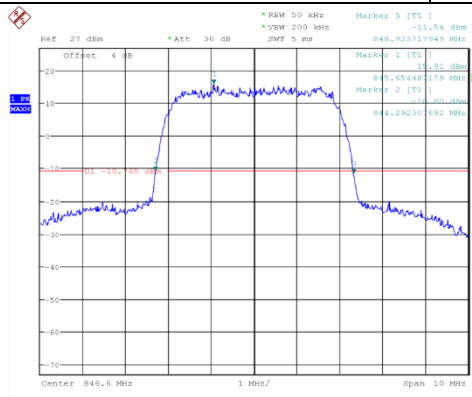Channel 4233, 846.6 MHz -26dBc Emission Bandwidth(MHz)	4.631	/
 Ref: 27 dBm Att: 30 dB PWR: 50 kHz FREQ: 846.6 MHz Span: 10 MHz Center: 846.6 MHz Date: 25 JUL 2017 13:28:45		/

ANNEX A.5. Band Edge at antenna terminals

Method of test measurements please refer to KDB971168 D01 v03 clause 6


A.5.1 Limit:

The magnitude of each spurious and harmonic emission that can be detected when the equipment is operated under the conditions specification in the instruction manual and/or alignment procedure, shall not be less than $43+10\log$ (Mean power in watts) dBc below the mean power output outside a license's frequency block(-13dBm).

A.5.2 Test procedure:


1. The RF output of the transceiver was connected to a signal analyzer through appropriate attenuation.
2. In the 1MHz bands immediately outside and adjacent to the frequency block a resolution bandwidth of at least one percent of the emission bandwidth of the fundamental emission of the transmitter may be employed.
3. The RF fundamental frequency should be excluded against the limit line in the operating frequency band
4. The limit line is derived from $43+10\log(P)$ Db below the transmitter power P(Watts)
 $= P(W) - [43+10\log(P)](Db)$
 $= [30+10\log(P)](dBm) - [43+10\log(P)](Db)$
 $= -13dBm$

A.5.3 Test Result:

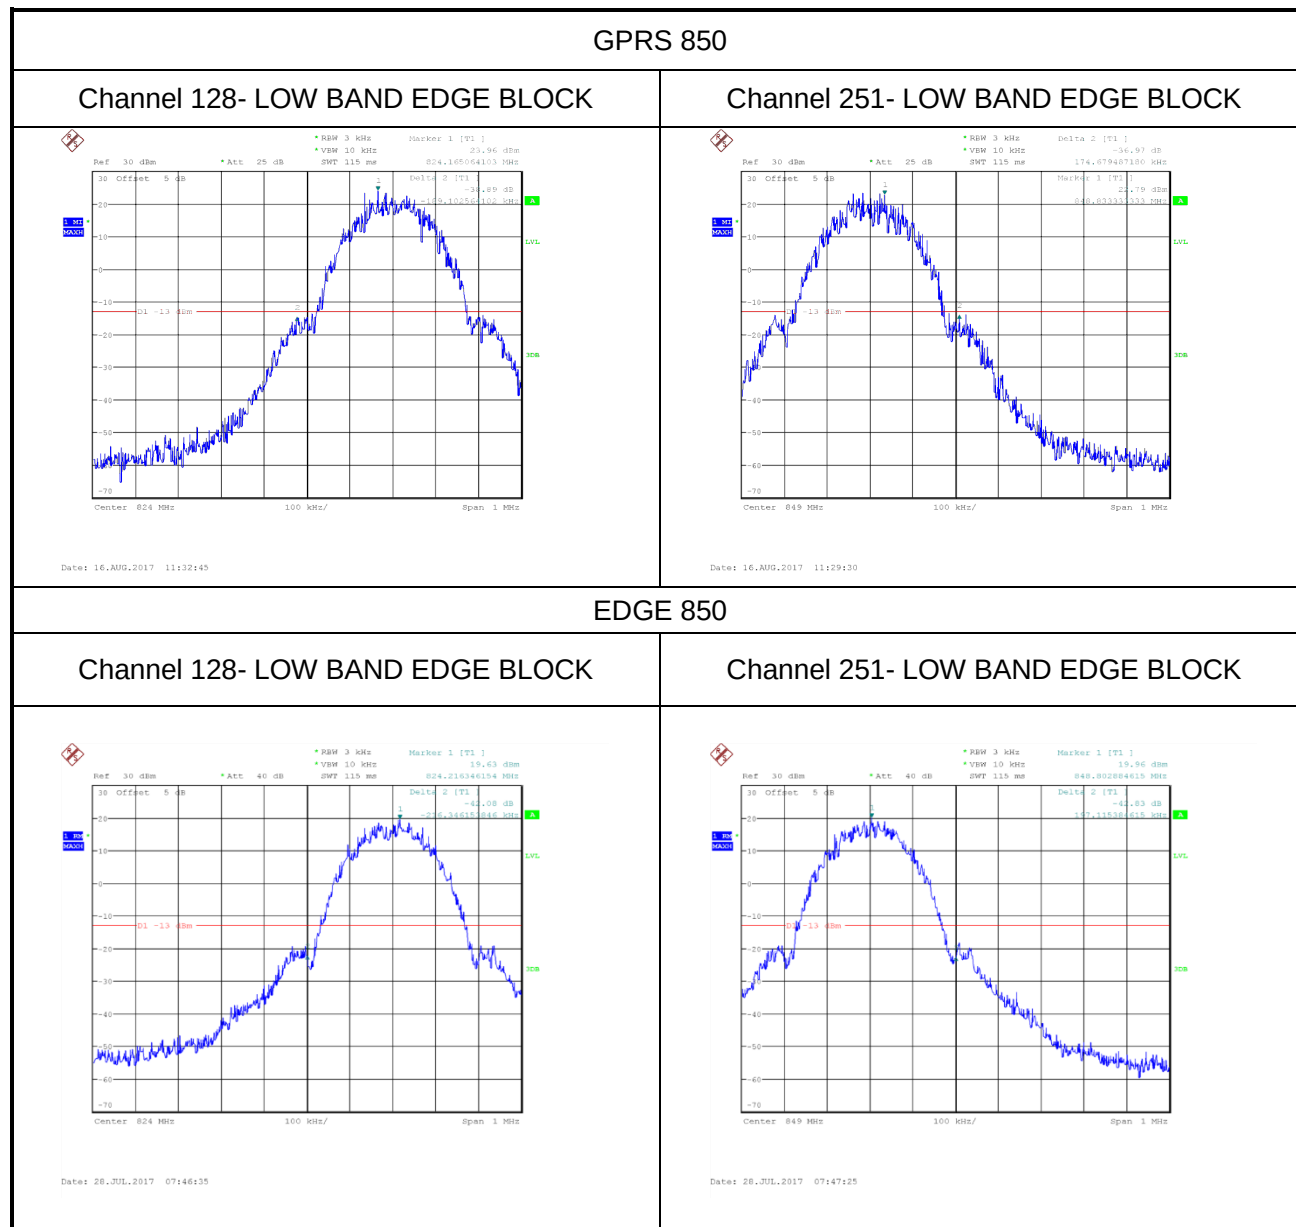


GPRS1900

Channel 512- LOW BAND EDGE BLOCK

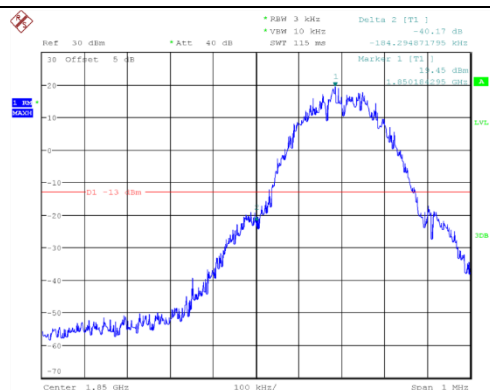

Date: 28.JUL.2017 07:59:29


Channel 810- LOW BAND EDGE BLOCK

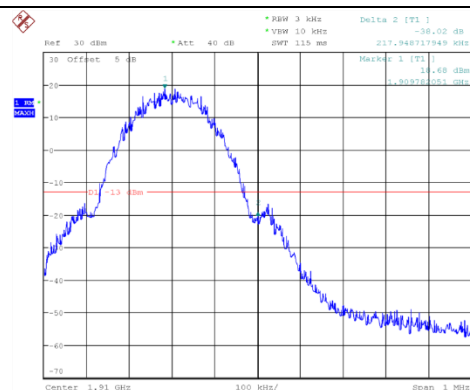

Date: 28.JUL.2017 08:00:20


EDGE1900

Channel 512- LOW BAND EDGE BLOCK

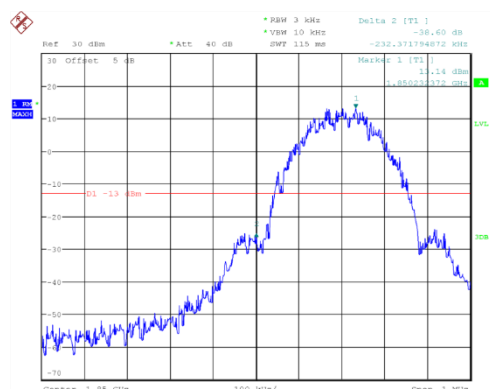

Date: 28.JUL.2017 08:07:48


Channel 810- LOW BAND EDGE BLOCK

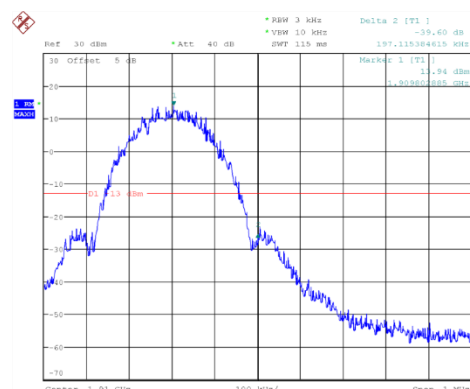

Date: 28.JUL.2017 08:08:38


WCDMA BAND II

Channel 9262- LOW BAND EDGE BLOCK

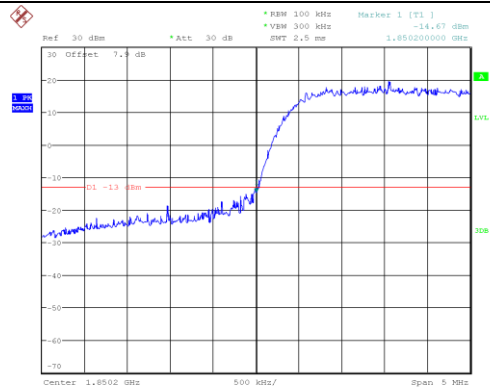

Date: 28.JUL.2020 10:30:28


Channel 9538- HIGH BAND EDGE BLOCK

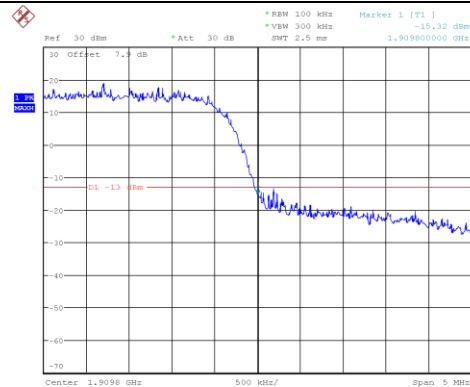

Date: 28.JUL.2020 10:35:29


WCDMA BAND IV

Channel 1312- LOW BAND EDGE BLOCK

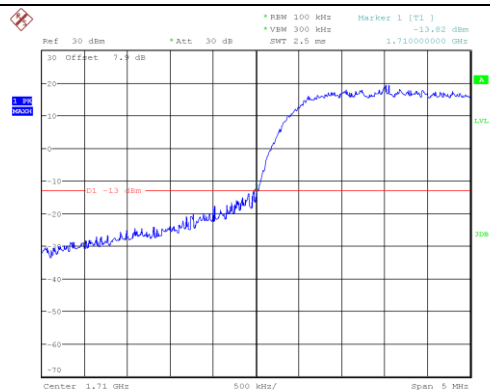

Date: 30.JUL.2020 10:10:33


Channel 1513- HIGH BAND EDGE BLOCK

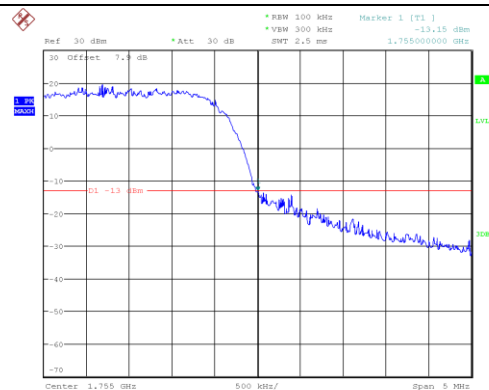

Date: 30.JUL.2020 10:24:11


WCDMA BAND V

Channel 4132- LOW BAND EDGE BLOCK

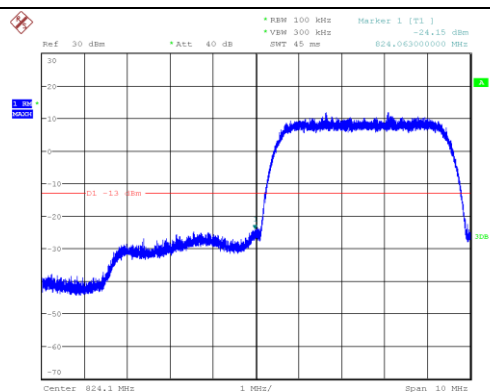

Date: 16.JUL.2020 09:56:10

Channel 4233- HIGH BAND EDGE BLOCK

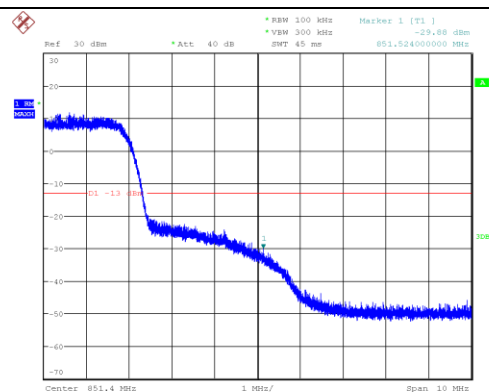

Date: 16.JUL.2020 09:59:45

ANNEX A.6. FREQUENCY STABILITY

Method of test measurements please refer to KDB971168 D01 v03 clause 9

A.6.1.Method of Measurement and test procedures

In order to measure the carrier frequency under the condition of AFC lock, it is necessary to make measurements with the EUT in a "call mode". This is accomplished with the use of R&S CMU200 DIGITAL RADIO COMMUNICATION TESTER.

1. Measure the carrier frequency at room temperature.
2. Subject the EUT to overnight soak at -30°C.
3. With the EUT, powered via nominal voltage, connected to the CMU200 and in a simulated call on mid channel of GSM850, PCS1900, WCDMA BANDII, WCDMA BANDIV and WCDMA BANDV, measure the carrier frequency. These measurements should be made within 2 minutes of Powering up the EUT, to prevent significant self-warming.
4. Repeat the above measurements at 10°C increments from -30°C to +50°C. Allow at least 1 1/2 hours at each temperature, unpowered, before making measurements.
5. Re-measure carrier frequency at room temperature with nominal voltage. Vary supply voltage from minimum voltage to maximum voltage, in 0.1Volt increments re-measuring carrier frequency at each voltage. Pause at nominal voltage for 1 1/2 hours unpowered, to allow any self-heating to stabilize, before continuing.
6. Subject the EUT to overnight soak at +50°C.
7. With the EUT, powered via nominal voltage, connected to the CMU200 and in a simulated call on the centre channel, measure the carrier frequency. These measurements should be made within 2 minutes of Powering up the EUT, to prevent significant self-warming.
8. Repeat the above measurements at 10 C increments from +50°C to -30°C. Allow at least 1.5 hours at each temperature, unpowered, before making measurements.
9. At all temperature levels hold the temperature to +/- 0.5°C during the measurement procedure.

A.6.2. Measurement Limit

A.6.2.1. For Hand carried battery powered equipment

According to the JTC standard the GSM frequency stability of the carrier shall be accurate to within 0.1ppm of the received frequency from the base station. And the WCDMA is 2.5ppm. This accuracy is sufficient to meet Sec.24.235, Frequency Stability. The frequency stability shall be sufficient to ensure that the fundamental emission stays within the authorized frequency block. As this transceiver is considered "Hand carried, battery powered equipment" Section 2.1055(d)(2) applies. This requires that the lower voltage for frequency stability testing be specified by the manufacturer. This transceiver is specified to operate with an input voltage of between 3.6VDC and 4.35VDC, with a nominal voltage of 3.8VDC. Operation above or below these voltage limits is prohibited by transceiver software in order to prevent improper operation as well as to protect components from overstress. These voltages was varied from 85% to 115%.

A.6.2.2. For equipment powered by primary supply voltage

According to the JTC standard the GSM frequency stability of the carrier shall be accurate to within 0.1ppm of the received frequency from the base station. And the WCDMA is 2.5ppm. This accuracy is sufficient to meet Sec.24.235, Frequency Stability. The frequency stability shall be sufficient to ensure that the fundamental emission stays within the authorized frequency block. For this EUT section 2.1055(d)(1) applies. This requires varying primary supply voltage from 85 to 115 percent of the nominal value for other than hand carried battery equipment.

A.6.3 Test results

GSM850Mid Channel/fc(MHz) 189/836.4

Frequency Error VS Temperature

Power Supply (VDC)	Environment Temperature(°C)	Frequency error(Hz)	Limit (Hz)
3.85	-30	11	84
3.85	-20	3	84
3.85	-10	5	84
3.85	0	-5	84
3.85	10	-5	84
3.85	20	2	84
3.85	30	5	84
3.85	40	11	84
3.85	50	16	84

Frequency Error VS Voltage

Power Supply (VDC)	Environment Temperature(°C)	Frequency error(Hz)	Limit (Hz)
3.50	25	12	84
3.85	25	-5	84
4.40	25	4	84

PCS1900 Mid Channel/fc(MHz) 661/1880

Frequency Error VS Temperature

Power Supply (VDC)	Environment Temperature(°C)	Frequency error(Hz)	Limit (Hz)
3.85	-30	9	196
3.85	-20	-4	196
3.85	-10	14	196
3.85	0	19	196
3.85	10	10	196
3.85	20	14	196
3.85	30	1	196
3.85	40	15	196
3.85	50	-7	196

Frequency Error VS Voltage

Power Supply (VDC)	Environment Temperature(°C)	Frequency error(Hz)	Limit (Hz)
3.50	25	-5	196
3.85	25	13	196
4.40	25	9	196

WCDMA BAND II Mid Channel/fc(MHz) 9400 /1880
Frequency Error VS Temperature

Power Supply (VDC)	Environment Temperature(°C)	Frequency error(Hz)	Limit (Hz)
3.85	-30	-13	4700
3.85	-20	7	4700
3.85	-10	18	4700
3.85	0	8	4700
3.85	10	-4	4700
3.85	20	-3	4700
3.85	30	14	4700
3.85	40	8	4700
3.85	50	11	4700

Frequency Error VS Voltage

Power Supply (VDC)	Environment Temperature(°C)	Frequency error(Hz)	Limit (Hz)
3.50	25	12	4700
3.85	25	-6	4700
4.40	25	2	4700

WCDMA BAND IV Mid Channel/fc(MHz) 1413/1732.6
Frequency Error VS Temperature

Power Supply (VDC)	Environment Temperature(°C)	Frequency error(Hz)	Limit (Hz)
3.85	-30	12	4331.5
3.85	-20	14	4331.5
3.85	-10	-5	4331.5
3.85	0	16	4331.5
3.85	10	-6	4331.5
3.85	20	10	4331.5
3.85	30	22	4331.5
3.85	40	1	4331.5
3.85	50	-7	4331.5

Frequency Error VS Voltage

Power Supply (VDC)	Environment Temperature(°C)	Frequency error(Hz)	Limit (Hz)
3.50	25	4	4331.5
3.85	25	12	4331.5
4.40	25	-7	4331.5

WCDMA BAND V Mid Channel/fc(MHz) 4183/836.6
Frequency Error VS Temperature

Power Supply (V _{Dc})	Environment Temperature(°C)	Frequency error(Hz)	Limit (Hz)
3.85	-30	12	2091.5
3.85	-20	14	2091.5
3.85	-10	-5	2091.5
3.85	0	16	2091.5
3.85	10	-6	2091.5
3.85	20	10	2091.5
3.85	30	22	2091.5
3.85	40	1	2091.5
3.85	50	-7	2091.5

Frequency Error VS Voltage

Power Supply (V _{Dc})	Environment Temperature(°C)	Frequency error(Hz)	Limit (Hz)
3.50	25	4	2091.5
3.85	25	12	2091.5
4.40	25	-7	2091.5

Conclusion: PASS

ANNEX A.7. CONDUCTED SPURIOUS EMISSION

A.7.1. GSM Measurement Method and test procedures

The following steps outline the procedure used to measure the conducted emissions from the EUT.

1. Determine frequency range for measurements: From CFR 2.1057 the spectrum should be investigated from the lowest radio frequency generated in the equipment up to at least the 10th harmonic of the carrier frequency. For the equipment of PCS1900 band, this equates to a frequency range of 30 MHz to 19.1 GHz, data taken from 30 MHz to 20 GHz. For GSM850, data taken from 30 MHz to 10 GHz.
2. The sweep time is set automatically by instrument itself. That should be the optimal sweep time for the span and the RBW. If the sweep time is too short, that is sweep is too fast, the sweep result is not accurate; If the sweep time is too long, that is sweep is too low, some frequency components may be lost. The instrument will give a optimal sweep time according the selected span and RBW.
3. The procedure to get the conducted spurious emission is as follows:
The trace mode is set to MaxHold to get the highest signal at each frequency;
Wait 25 seconds;Get the result.
4. Determine EUT transmit frequencies: below outlines the band edge frequencies pertinent to conducted emissions testing.

GSM 850 Transmitter

Channel	Frequency(MHz)
128	824.2
189	836.4
251	848.8

PCS 1900 Transmitter

Channel	Frequency(MHz)
512	1850.2
661	1880.0
810	1909.8

A.7.1.1. Measurement Limit


Part 24.238 and Part 22.917 specify that the power of any emission outside of the authorized operating frequency ranges must be attenuated below the transmitting power (P) by a factor of at least $43 + 10 \log(P)$ dB.

The specification that emissions shall be attenuated below the transmitter power (P) by at least $43 + 10 \log(P)$ dB, translates in the relevant power range (1 to 0.001 W) to -13 dBm. At 1 W the specified minimum attenuation becomes 43 dB and relative to a 30 dBm (1 W) carrier becomes a limit of -13 dBm. At 0.001 W (0 dBm) the minimum attenuation is 13 dB, which again yields a limit of -13 dBm. In this way a translation of the specification from relative to absolute terms is carried out.


A.7.1.2. Measurement result

Spurious emission limit -13dBm.

Note: peak above the limit line is the carrier frequency.

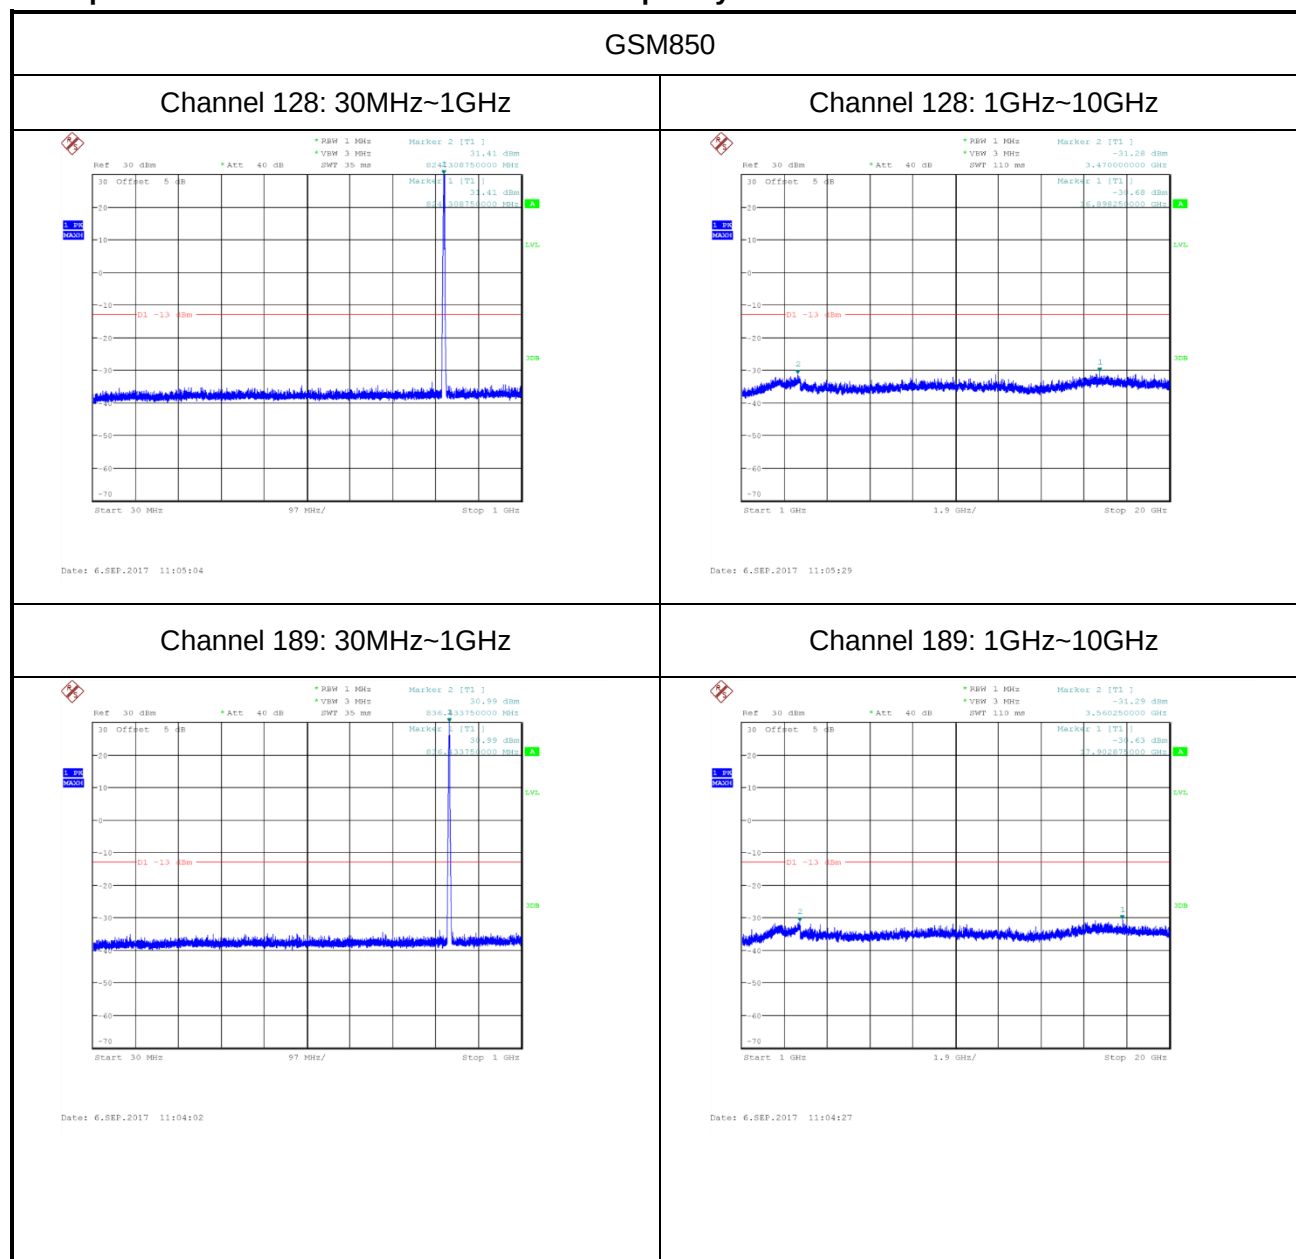


Channel 251: 30MHz~1GHz

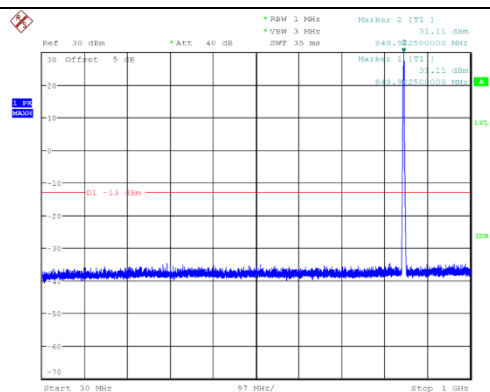

Date: 6 SEP 2017 11:06:08


Channel 251: 1GHz~10GHz

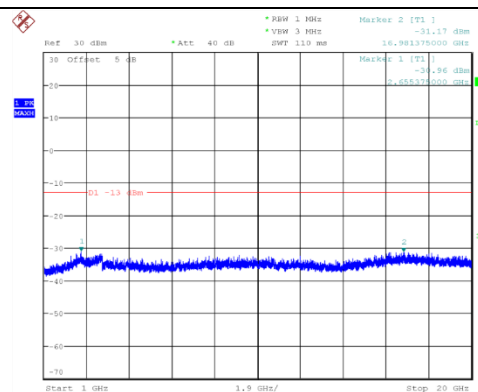

Date: 6 SEP 2017 11:06:32


GSM1900

Channel 512: 30MHz~1GHz

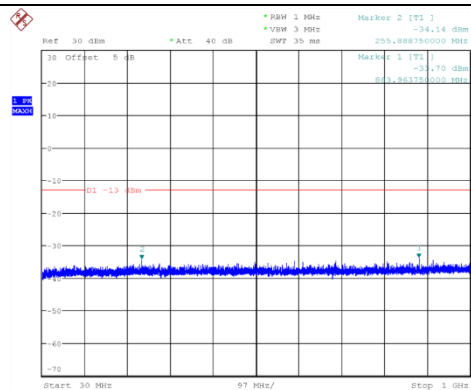


Date: 25.AUG.2017 12:40:39

Channel 512: 1GHz~20GHz

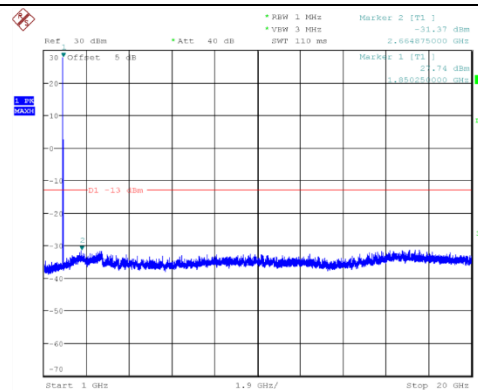


Date: 25-AUG-2017 12:41:03

Channel 661: 30MHz~1GHz

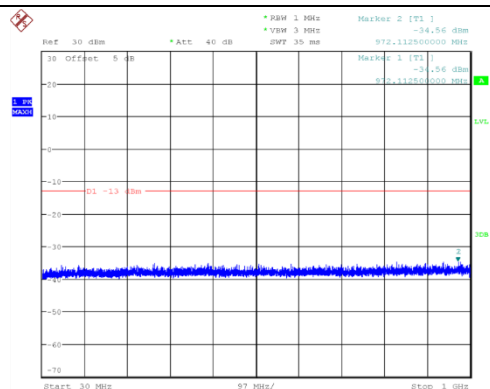


Date: 25.AUG.2017 12:39:37

Channel 661: 1GHz~20GHz

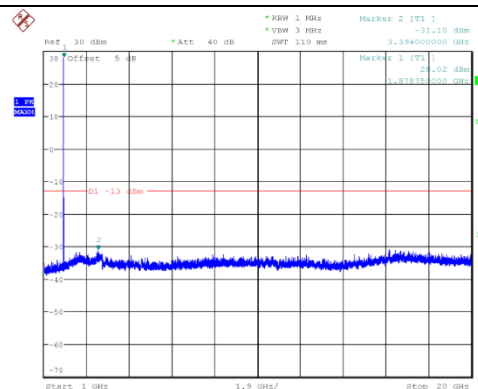

Date: 25.AUG.2017 12:40:01

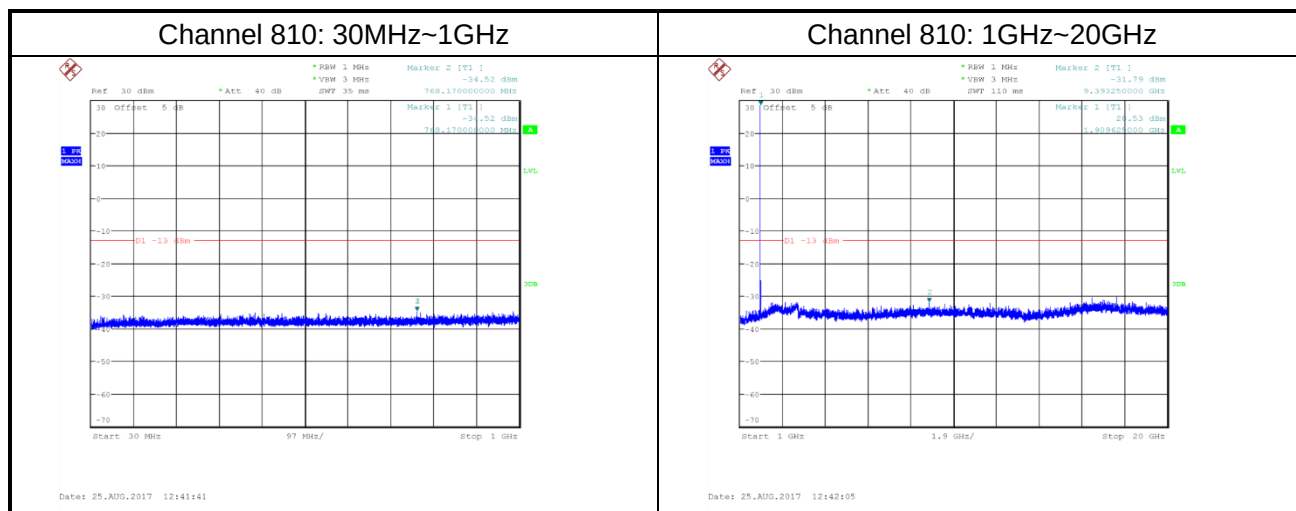

A.7.2. WCDMA Measurement Method and test procedures

The following steps outline the procedure used to measure the conducted emissions from the EUT.

1. Determine frequency range for measurements: From CFR 2.1057 the spectrum should be investigated from the lowest radio frequency generated in the equipment up to at least the 10th harmonic of the carrier frequency. For the equipment of WCDMA Band II and WCDMA BANDIV, these equate to a frequency range of 30 MHz to 19.1 GHz, data taken from 30 MHz to 20 GHz. For WCDMA Band V, data taken from 30 MHz to 10GHz.
2. The sweep time is set automatically by instrument itself. That should be the optimal sweep time for the span and the RBW. If the sweep time is too short, that is sweep is too fast, the sweep result is not accurate; If the sweep time is too long, that is sweep is too low, some frequency components may be lost. The instrument will give a optimal sweep time according the selected span and RBW.
3. The procedure to get the conducted spurious emission is as follows:
The trace mode is set to MaxHold to get the highest signal at each frequency;
Wait 25 seconds;
Get the result.
4. Determine EUT transmit frequencies: below outlines the band edge frequencies pertinent to conducted emissions testing.

WCDMA Band II Transmitter

Channel	Frequency (MHz)
9262	1852.40
9400	1880.00
9538	1907.60

WCDMA Band IV Transmitter

Channel	Frequency (MHz)
1312	1712.40
1413	1732.60
1513	1752.60

WCDMA Band V Transmitter

Channel	Frequency (MHz)
4132	826.40
4183	836.60
4233	846.60

A.7.2.1. Measurement Limit

Part 24.238 and Part 22.917 specify that the power of any emission outside of the authorized operating frequency ranges must be attenuated below the transmitting power (P) by a factor of at least $43 + 10 \log(P)$ dB.

The specification that emissions shall be attenuated below the transmitter power (P) by at least $43 + 10 \log(P)$ dB, translates in the relevant power range (1 to 0.001 W) to -13 dBm. At 1 W the specified minimum attenuation becomes 43 dB and relative to a 30 dBm (1 W) carrier becomes a limit of -13 dBm. At 0.001 W (0 dBm) the minimum attenuation is 13 dB, which again yields a limit of -13 dBm. In this way a translation of the specification from relative to absolute terms is carried out.

A.7.2.2. Measurement result

Spurious emission limit -13dBm.

Note: peak above the limit line is the carrier frequency.

Channel 9262: 30MHz~1GHz



Date: 22.AUG.2017 07:19:51

Date: 22.AUG.2017 07:18:22


Date: 22.AUG.2017 07:18:44

Date: 22.AUG.2017 07:20:34


Date: 22.AUG.2017 07:20:57

WCDMA Band IV


Channel 1312: 30MHz~1GHz

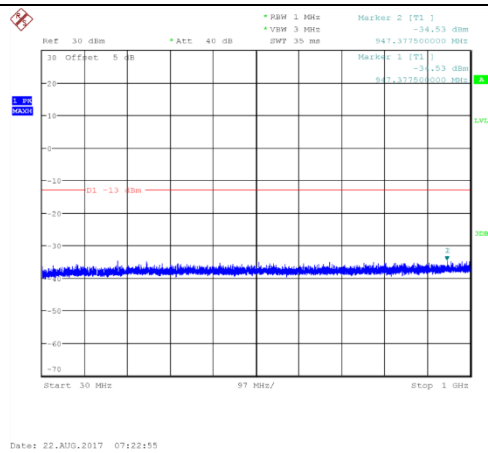


Channel 1312: 1GHz~20GHz

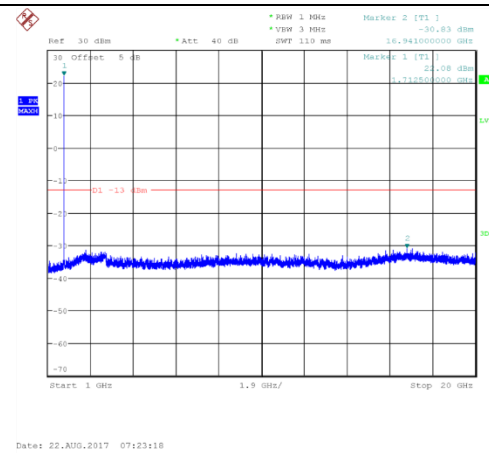


Channel 1450: 30MHz~1GHz

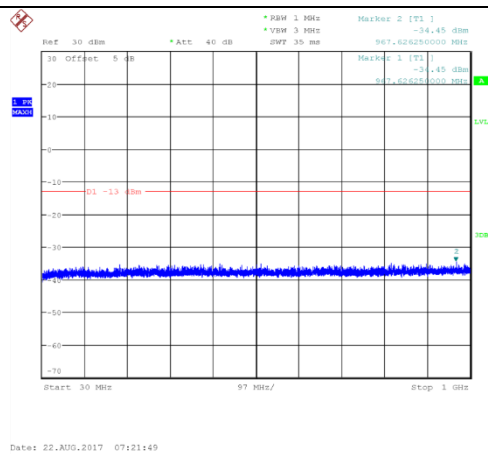


Channel 1450: 1GHz~20GHz

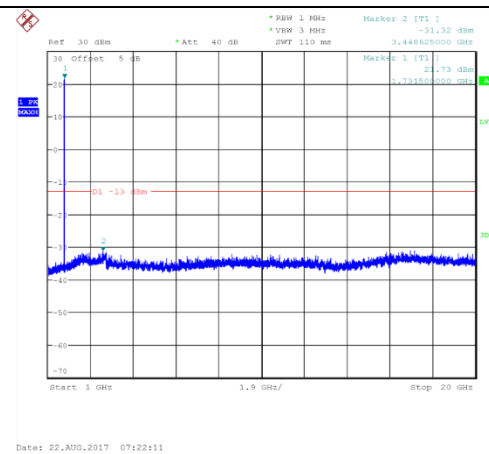

Channel 1512: 30MHz~1GHz

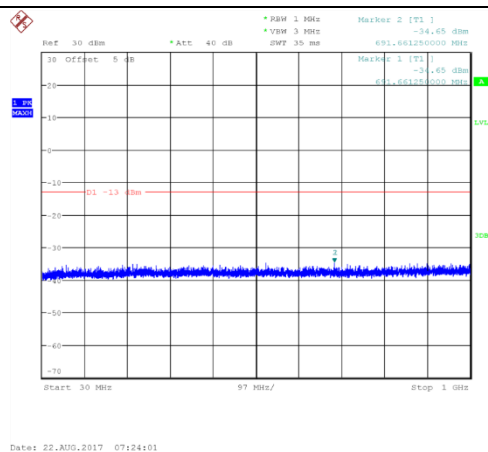


Channel 1512: 1GHz~20GHz

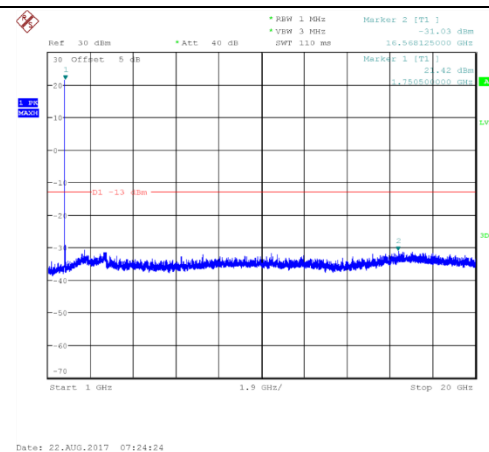


WCDMA Band V

Channel 4133: 30MHz~1GHz

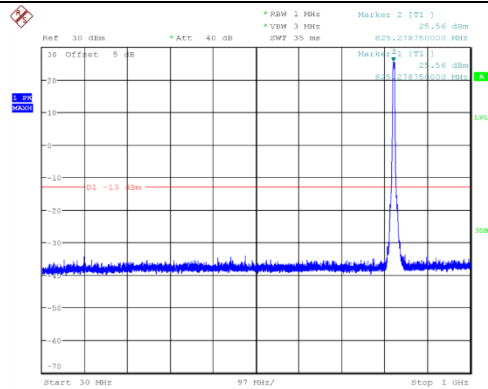


Date: 22.MIG.2017 07:26:22

Channel 4133: 1GHz~10GHz

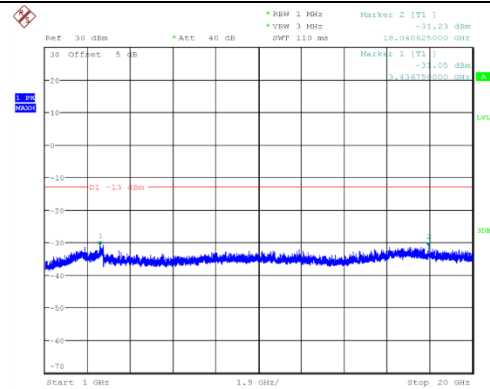


Date: 22.MIG.2017 07:26:45

Channel 4175: 30MHz~1GHz

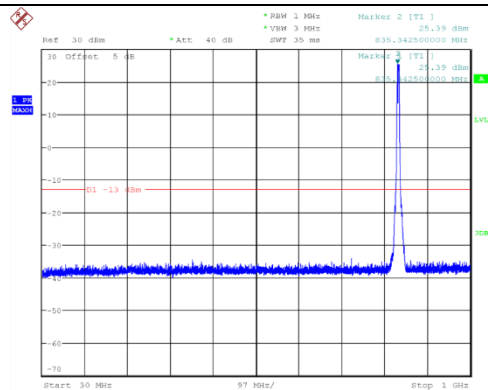


Date: 22.MIG.2017 07:25:16

Channel 4175: 1GHz~10GHz

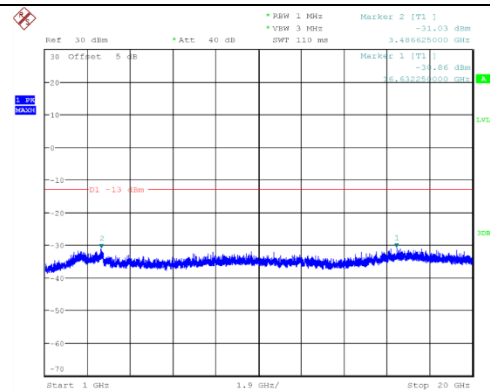


Date: 22.MIG.2017 07:25:39

Channel 4232: 30MHz~1GHz

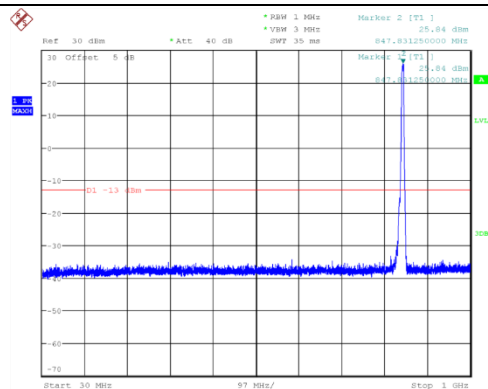

Date: 22.MIG.2017 07:27:29

Channel 4232: 1GHz~10GHz

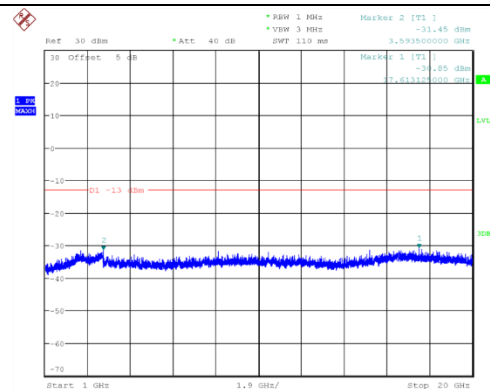

Date: 22.MIG.2017 07:27:51

ANNEX A.8. RADIATED

A.8.1. EIRP

A.8.1.1. GSM EIRP

A.8.1.1.1. Description


This is the test for the maximum radiated power from the EUT.

Rule Part 24.232(c) specifies, "Mobile/portable stations are limited to 2 watts e.i.r.p. Peak power" and 24.232(c) specifies that "Peak transmit power must be measured over any interval of continuous transmission using instrumentation calibrated in terms of an rms-equivalent voltage." Rule Part 22.913(a) specifies". The ERP of mobile transmitters and auxiliary test transmitters must not exceed 7 Watts."

A.8.1.1.2. Method of Measurement


The measurements procedures in TIA-603E-2016 are used.

1. EUT was placed on a 1.5 meter high non-conductive stand at a 3 meter test distance from the receive antenna. A receiving antenna was placed on the antenna mast 3 meters from the EUT for emission measurements. The height of receiving antenna is 1.5m. The test setup refers to figure below. Detected emissions were maximized at each frequency by rotating the EUT through 360° and adjusting the receiving antenna polarization. The radiated emission measurements of all transmit frequencies in three channels (High, Middle, Low) were measured with peak detector.

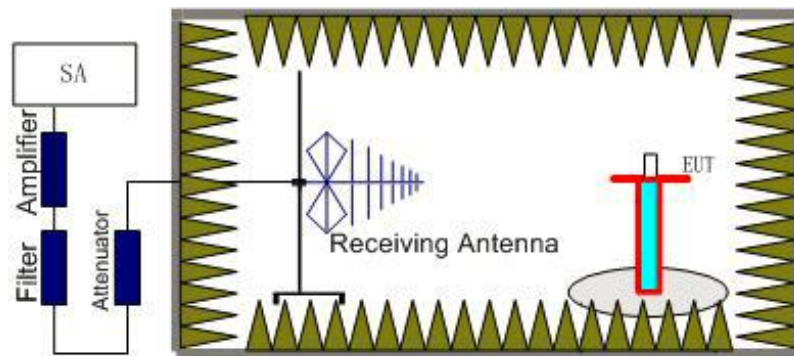

2. The EUT is then put into continuously transmitting mode at its maximum power level during the test. And the maximum value of the receiver should be recorded as (P_r).

3. The EUT shall be replaced by a substitution antenna. The test setup refers to figure below.

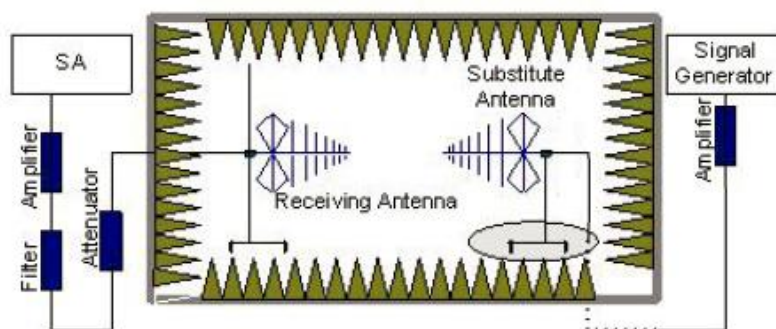

In the chamber, an substitution antenna for the frequency band of interest is placed at the reference point of the chamber. An RF Signal source for the frequency band of interest is connected to the substitution antenna with a cable that has been constructed to not interfere with the radiation pattern of the antenna. A power (P_{Mea}) is applied to the input of the substitution antenna, and adjust the level of the signal generator output until the value of the receiver reach the previously recorded (P_r). The power of

signal source (P_{Mea}) is recorded. The test should be performed by rotating the test item and adjusting the receiving antenna polarization.

4. A amplifier should be connected to the Signal Source output port. And the cable should be connected between the Amplifier and the Substitution Antenna.

The cable loss (P_{cl}), the Substitution Antenna Gain (G_a) and the Amplifier Gain (P_{Ag}) should be recorded after test.

The measurement results are obtained as described below:

$$\text{Power(EIRP)} = P_{Mea} + P_{Ag} - P_{cl} + G_a$$

5. This value is EIRP since the measurement is calibrated using an antenna of known gain (2.15dBi) and known input power.

6. ERP can be calculated from EIRP by subtracting the gain of the dipole, $ERP = EIRP - 2.15\text{dBi}$.

A.8.1.1.3 GSM 850-ERP 22.913(a)

A.8.1.1.3.1 Limits

	Power Step	Burst Peak ERP (dBm)
GPRS	3	$\leq 38.45\text{dBm}$ (7W)
EDGE	6	$\leq 38.45\text{dBm}$ (7W)

A.8.1.1.3.2 Measurement result

GPRS (GMSK)

Frequency(MHz)	Peak ERP (dBm)	Polarization
824.2	31.99	H
836.6	32.20	H
848.8	32.26	H

EDGE (8PSK)

Frequency(MHz)	Peak ERP (dBm)	Polarization
824.2	28.27	H
836.6	28.31	H
848.8	28.39	H

A.8.1.1.4 PCS 1900-EIRP 24.232(c)**A.8.1.1.4.1 Limits**

	Power Step	Burst Peak EIRP (dBm)
GPRS	3	≤33dBm (2W)
EDGE	6	≤33dBm (2W)

A.8.1.1.4.2 Measurement result**GPRS (GMSK)**

Frequency(MHz)	Peak EIRP (dBm)	Polarization
1850.2	27.51	V
1880.0	27.78	H
1909.8	27.46	V

EDGE (8PSK)

Frequency(MHz)	Peak EIRP (dBm)	Polarization
1850.2	25.50	V
1880.0	25.87	H
1909.8	25.41	V

A.8.1.2. WCDMA EIRP

A.8.1.2.1. Description


This is the test for the maximum radiated power from the EUT.

Rule Part 24.232(c) specifies, "Mobile/portable stations are limited to 2 watts e.i.r.p. Peak power" and 24.232(c) specifies that "Peak transmit power must be measured over any interval of continuous transmission using instrumentation calibrated in terms of an rms-equivalent voltage. "Rule Part 22.913(a) specifies " The ERP of mobile transmitters and auxiliary test transmitters must not exceed 7 Watts."

A.8.1.2.2. Method of Measurement


The measurements procedures in TIA-603E-2016 are used.

1. EUT was placed on a 1.5 meter high non-conductive stand at a 3 meter test distance from the receive antenna. A receiving antenna was placed on the antenna mast 3 meters from the EUT for emission measurements. The height of receiving antenna is 1.5m. The test setup refers to figure below. Detected emissions were maximized at each frequency by rotating the EUT through 360° and adjusting the receiving antenna polarization. The radiated emission measurements of all transmit frequencies in three channels (High, Middle, Low) were measured with peak detector.

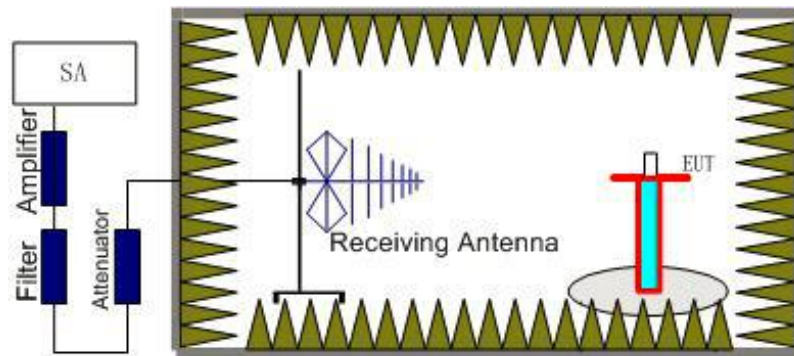

2. The EUT is then put into continuously transmitting mode at its maximum power level during the test. And the maximum value of the receiver should be recorded as (P_r).

3. The EUT shall be replaced by a substitution antenna. The test setup refers to figure below.

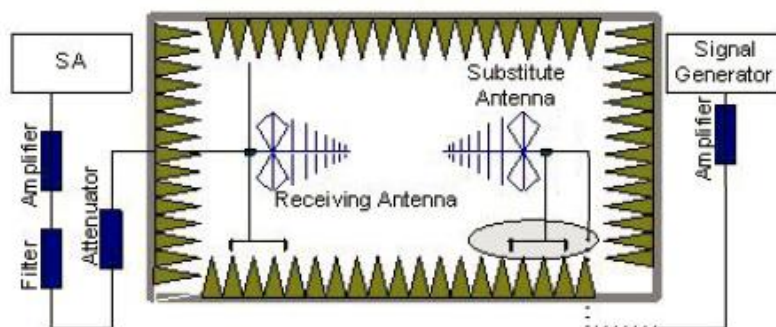

In the chamber, an substitution antenna for the frequency band of interest is placed at the reference point of the chamber. An RF Signal source for the frequency band of interest is connected to the substitution antenna with a cable that has been constructed to not interfere with the radiation pattern of the antenna. A power (P_{Mea}) is applied to the input of the substitution antenna, and adjust the level of the signal generator output until the value of the receiver reach the previously recorded (P_r). The power of signal source (P_{Mea}) is recorded. The test should be performed by rotating the test item and adjusting the receiving antenna

polarization.

4. A amplifier should be connected to the Signal Source output port. And the cable should be connect between the Amplifier and the Substitution Antenna.

The cable loss (P_{cl}), the Substitution Antenna Gain (G_a) and the Amplifier Gain (P_{Ag}) should be recorded after test.

The measurement results are obtained as described below:

$$\text{Power(EIRP)} = P_{\text{Mea}} + P_{\text{Ag}} - P_{\text{cl}} + G_a$$

5. This value is EIRP since the measurement is calibrated using an antenna of known gain (2.15 dBi) and known input power.

6. ERP can be calculated from EIRP by subtracting the gain of the dipole, $\text{ERP} = \text{EIRP} - 2.15\text{dBi}$.

A.8.1.2.3 WCDMA Band II-EIRP Limits

	Burst Peak EIRP (dBm)
WCDMA Band II	$\leq 33\text{dBm}$ (2W)

A.8.1.2.3.1 Measurement result

Frequency(MHz)	Peak EIRP(dBm)	Polarization
1852.4	21.20	V
1880.0	21.16	H
1907.6	20.97	V

A.8.1.2.4 WCDMA Band IV-EIRP Limits

	Burst Peak EIRP (dBm)
WCDMA Band IV	$\leq 33\text{dBm}$ (2W)

A.8.1.2.4.1 Measurement result

Frequency(MHz)	Peak EIRP(dBm)	Polarization
1712.4	21.20	H
1732.6	21.16	H
1752.6	20.97	H

A.8.1.2.4 WCDMA Band V-ERP Limits

	Burst Peak ERP (dBm)
WCDMA Band V	≤38.45dBm (7W)

A.8.1.2.4.1 Measurement result

Frequency(MHz)	Peak ERP (dBm)	Polarization
826.4	22.32	H
836.6	22.30	H
846.6	22.32	H

Note: the EUT was displayed in several different direction, the worst cases were shown.

A.8.2 EMISSION LIMIT (§2.1051/§22.917§24.238)


A.8.2.1 GSM Measurement Method

The measurement procedures in TIA-603E-2016 are used.


The spectrum was scanned from 30 MHz to the 10th harmonic of the highest frequency generated within the equipment, which is the transmitted carrier that can be as high as 1910 MHz. The resolution bandwidth is set as outlined in Part 24.238 and Part 22.917. The spectrum is scanned with the mobile station transmitting at carrier frequencies that pertain to low, mid and high channels of PCS1900 and GSM850.

A.8.2.2 The procedure of radiated spurious emissions is as follows:

1. Below 1 GHz, EUT was placed on a 0.8 meter high non-conductive stand at a 3 meter test distance from the receive antenna. Above 1 GHz, EUT was placed on a 1.5 meter high non-conductive stand at a 3 meter test distance from the receive antenna. EUT was placed on a 1.5 meter high non-conductive stand at a 3 meter test distance from the receive antenna. A receiving antenna was placed on the antenna mast 3 meters from the EUT for emission measurements. The height of receiving antenna is 1.5m. The test setup refers to figure below. Detected emissions were maximized at each frequency by rotating the EUT through 360° and adjusting the receiving antenna polarization. The radiated emission measurements of all non-harmonic and harmonics of the transmit frequency through the 10th harmonic were measured with peak detector.

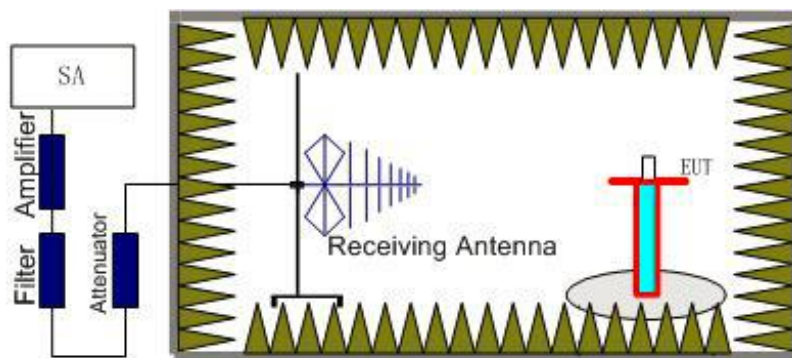

2. The EUT is then put into continuously transmitting mode at its maximum power level during the test. And the maximum value of the receiver should be recorded as (Pr).
3. The EUT shall be replaced by a substitution antenna. The test setup refers to figure below.

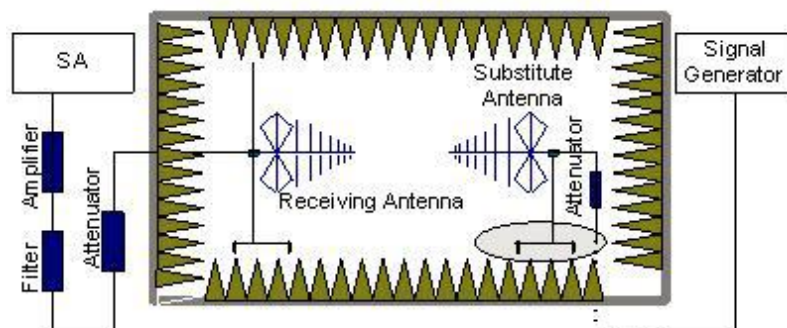

In the chamber, an substitution antenna for the frequency band of interest is placed at the reference point of the chamber. An RF Signal source for the frequency band of interest is connected to the substitution antenna with a cable that has been constructed to not interfere

with the radiation pattern of the antenna. A power (P_{Mea}) is applied to the input of the substitution antenna, and adjust the level of the signal generator output until the value of the receiver reach the previously recorded (P_r). The power of signal source (P_{Mea}) is recorded. The test should be performed by rotating the test item and adjusting the receiving antenna polarization.

4. The Path loss (P_{pl}) between the Signal Source with the Substitution Antenna and the Substitution Antenna Gain (G_a) should be recorded after test.

A amplifier should be connected in for the test.

The Path loss (P_{pl}) is the summation of the cable loss .

The measurement results are obtained as described below:

$$\text{Power(EIRP)} = P_{Mea} - P_{pl} + G_a$$

5. This value is EIRP since the measurement is calibrated using an antenna of known gain (2.15 dBi) and known input power.

6. ERP can be calculated from EIRP by subtracting the gain of the dipole, $ERP = EIRP - 2.15\text{dBi}$

A.8.2.3 Measurement Limit

Part 24.238 and Part 22.917 specify that the power of any emission outside of the authorized operating frequency ranges must be attenuated below the transmitting power (P) by a factor of at least $43 + 10 \log(P)$ dB.

The specification that emissions shall be attenuated below the transmitter power (P) by at least $43 + 10 \log(P)$ dB, translates in the relevant power range (1 to 0.001 W) to -13 dBm. At 1 W the specified minimum attenuation becomes 43 dB and relative to a 30 dBm (1 W) carrier becomes a limit of -13 dBm. At 0.001 W (0 dBm) the minimum attenuation is 13 dB, which again yields a limit of -13 dBm. In this way a translation of the specification from relative to absolute terms is carried out.

A.8.2.4 Measurement Results

Radiated emissions measurements were made only at the upper, middle, and lower carrier frequencies of the PCS1900 band (1850.2 MHz, 1880 MHz and 1909.8 MHz) and GSM850 band (824.2MHz, 836.6MHz, 848.8MHz) . It was decided that measurements at these three carrier frequencies would be sufficient to demonstrate compliance with emissions limits because it was seen that all the significant spurs occur well outside the band and no radiation was seen from a carrier in one block of the PCS1900 ,GSM850 into any of the other blocks. The equipment must still, however, meet emissions requirements with the carrier at all frequencies over which it is capable of operating and it is the manufacturer's responsibility to verify this.

A.8.2.5 Measurement Results

Measurements results:

Frequency	Channel	Frequency Range	Result
GSM1900	Low	30MHz~20GHz	P
	Middle	30MHz~20GHz	P
	High	30MHz~20GHz	P

GSM1900
GSM Mode Channel 512
Final result:

Frequency (MHz)	PMea (dBm)	Pcl (dBm)	Ga (dBi)	Peak EIRP (dBm)	Limit (dBm)	Polarization
3733.8	-53.47	6.6	7.7	-52.37	-13	V
5551.2	-50.57	8.2	9.5	-49.27	-13	V
7400.4	-47.4	9.7	14.6	-42.5	-13	V
9250.8	-53.19	10.6	18.5	-45.29	-13	H
11234.4	-50.13	12.1	18.5	-43.73	-13	H
13320.0	-46.88	13.6	21.8	-38.68	-13	H

GSM Mode Channel 661
Final result:

Frequency (MHz)	PMea (dBm)	Pcl (dBm)	Ga (dBi)	Peak EIRP (dBm)	Limit (dBm)	Polarization
3739.2	-55.58	6.6	7.7	-54.48	-13	V
5640.6	-50.85	8.3	10.5	-48.65	-13	V
7519.2	-49.77	9.7	14.6	-44.87	-13	V
9399.6	-51.12	10.7	18.6	-43.22	-13	V
11336.4	-49.22	12.1	18.5	-42.82	-13	H
13262.4	-48.12	13.0	21.8	-39.32	-13	V

GSM Mode Channel 810**Final result:**

Frequency (MHz)	PMea (dBm)	Pcl (dBm)	Ga (dBi)	Peak EIRP (dBm)	Limit (dBm)	Polarization
3736.2	-55.76	6.6	7.7	-54.66	-13	H
5730.0	-48.42	8.5	10.5	-46.42	-13	V
7639.2	-46.69	9.7	15.3	-41.09	-13	V
9549.6	-51.39	10.7	18.6	-43.49	-13	V
11246.4	-50.32	12.1	18.5	-43.92	-13	H
13353.6	-47.32	13.7	21.8	-39.22	-13	H

Note: the EUT was displayed in several different direction, the worst cases were shown.

A.8.3 WCDMA Measurement Method

The measurements procedures in TIA-603E-2016 are used.

The spectrum was scanned from 30 MHz to the 10th harmonic of the highest frequency generated within the equipment. The resolution bandwidth is set as outlined in Part 24.238 and Part 24.917.

The spectrum is scanned with the mobile station transmitting at carrier frequencies that pertain to low, mid and high channels of WCDMA Band V.

The procedure of radiated spurious emissions is the same like GSM.

A.8.3.1 Measurement Limit

Part 24.238 and Part 22.917 specify that the power of any emission outside of the authorized operating frequency ranges must be attenuated below the transmitting power (P) by a factor of at least $43 + 10 \log(P)$ dB.

The specification that emissions shall be attenuated below the transmitter power (P) by at least $43 + 10 \log(P)$ dB, translates in the relevant power range (1 to 0.001 W) to -13 dBm. At 1 W the specified minimum attenuation becomes 43 dB and relative to a 30 dBm (1 W) carrier becomes a limit of -13 dBm. At 0.001 W (0 dBm) the minimum attenuation is 13 dB, which again yields a limit of -13 dBm. In this way a translation of the specification from relative to absolute terms is carried out.

A.8.3.2 Measurement Results

Radiated emissions measurements were made only at the upper, middle, and lower carrier frequencies of the WCDMA Band V (826.4MHz, 836.6MHz and 846.6MHz) . It was decided that measurements at these three carrier frequencies would be sufficient to demonstrate compliance with emissions limits because it was seen that all the significant spurs occur well outside the band and no radiation was seen from a carrier in one block of the WCDMA Band V into any of the other blocks. The equipment must still, however, meet emissions requirements with the carrier at all frequencies over which it is capable of operating and it is the manufacturer's responsibility to verify this.

A.8.3.3 Measurement Results Table

Frequency	Channel	Frequency Range	Result
WCDMA Band II	Low	30MHz~20GHz	P
	Middle	30MHz~20GHz	P
	High	30MHz~20GHz	P

WCDMA BAND II Mode Channel 9262
Final result:

Frequency (MHz)	PMea (dBm)	Pcl (dBm)	Ga (dBi)	Peak EIRP (dBm)	Limit (dBm)	Polarization
3752.4	-64.86	6.6	7.7	-63.76	-13	H
5664.0	-63.33	8.3	10.5	-61.13	-13	H
7521.6	-62.35	9.7	14.6	-57.45	-13	H
9411.6	-63.26	10.7	18.6	-55.36	-13	V
11284.9	-58.61	12.1	18.5	-52.21	-13	H
13112.2	-56.11	13.0	20.2	-48.91	-13	H

WCDMA BAND II Mode Channel 9400
Final result:

Frequency (MHz)	PMea (dBm)	Pcl (dBm)	Ga (dBi)	Peak EIRP (dBm)	Limit (dBm)	Polarization
3785.2	-65.17	6.7	7.7	-64.17	-13	H
5642.8	-62.87	8.3	10.5	-60.67	-13	H
7509.2	-61.34	9.7	14.6	-56.44	-13	V
9409.2	-63.03	10.7	18.6	-55.13	-13	V
11255.2	-57.51	12.1	18.5	-51.11	-13	H
13157.4	-57.8	13.0	21.8	-49	-13	H

WCDMA BAND II Mode Channel 9538**Final result:**

Frequency (MHz)	PMea (dBm)	Pcl (dBm)	Ga (dBi)	Peak EIRP (dBm)	Limit (dBm)	Polarization
3754.0	-64.83	6.6	7.7	-63.73	-13	H
5628.4	-63.93	8.3	10.5	-61.73	-13	V
7554.0	-60.95	9.7	14.6	-56.05	-13	H
9440.0	-62.84	10.7	18.6	-54.94	-13	H
11258.0	-58.1	12.1	18.5	-51.7	-13	H
13123.8	-55.73	13.0	20.2	-48.53	-13	V

Note: the EUT was displayed in several different direction, the worst cases were shown.

ANNEX B. Accreditation Certificate



*****END OF REPORT*****