



MEASUREMENT REPORT

FCC PART 15.249

FCC ID: 2ANKDJCHR35H3

APPLICANT: ZHEJIANG JIECANG LINEAR MOTION TECHNOLOGY CO., LTD

Application Type: Certification

Product: RF Remote control


Model No.: JCHR35H3-1, JCHR35H3-2


FCC Classification: Low Power Communication Device Transmitter (DXX)

FCC Rule Part(s): Part 15.249

Test Procedure(s): ANSI C63.10 - 2013

Test Date: September 6 ~ 11, 2018

Reviewed By : 
(Kevin Guo)

Approved By : 
(Robin Wu)



The test results relate only to the samples tested.

This equipment has been shown to be capable of compliance with the applicable technical standards as indicated in the measurement report and was tested in accordance with the measurement procedures specified in ANSI C63.10-2013. Test results reported herein relate only to the item(s) tested.

The test report shall not be reproduced except in full without the written approval of MRT Technology (Suzhou) Co., Ltd.

Revision History

Report No.	Version	Description	Issue Date	Note
1809WSU004-U1	Rev. 01	Initial report	09-12-2018	Valid

CONTENTS

Description	Page
1. INTRODUCTION	6
1.1. Scope	6
1.2. MRT Test Location	6
2. PRODUCT INFORMATION	7
2.1. Equipment Description.....	7
2.2. Operation Frequency and Channel List.....	7
2.3. Test Configuration	7
2.4. Test Software	7
2.5. EMI Suppression Device(s)/Modifications.....	7
2.6. Labeling Requirements.....	7
3. DESCRIPTION OF TEST	8
3.1. Evaluation Procedure	8
3.2. AC Line Conducted Emissions	8
3.3. Radiated Emissions.....	9
4. ANTENNA REQUIREMENTS.....	10
5. TEST EQUIPMENT CALIBRATION DATE	11
6. MEASUREMENT UNCERTAINTY.....	12
7. TEST RESULT	13
7.1. Summary	13
7.2. Conducted Emission.....	14
7.2.1. Test Limit	14
7.2.2. Test Setup.....	14
7.2.3. Test Result.....	14
7.3. Radiated Emission.....	15
7.3.1. Test Limit	15
7.3.2. Test Setup.....	16
7.3.3. Test Result.....	17
7.4. Radiated Restricted Band Edge Measurement	22
7.4.1. Test Limit	22
7.4.2. Test Setup.....	23
7.4.3. Test Result.....	24
7.5. 20dB Spectrum Bandwidth Measurement	28
7.5.1. Test Limit	28

7.5.2.	Test Procedure used	28
7.5.3.	Test Setting	28
7.5.4.	Test Setup.....	28
7.5.5.	Test Result.....	29
7.6.	99% Bandwidth Measurement	30
7.6.1.	Test Limit	30
7.6.2.	Test Procedure used	30
7.6.3.	Test Setting	30
7.6.4.	Test Setup.....	30
7.6.5.	Test Result.....	31
8.	CONCLUSION.....	32
	Appendix A – Test Setup Photograph.....	33
	Appendix B – EUT Photograph	34

§2.1033 General Information

Applicant:	ZHEJIANG JIECANG LINEAR MOTION TECHNOLOGY CO., LTD
Applicant Address:	No.19 XinTao Road, Provincial High Tech Park XinChangcounty,ZheJiang Province
Manufacturer:	ZHEJIANG JIECANG LINEAR MOTION TECHNOLOGY CO., LTD
Manufacturer Address:	No.19 XinTao Road, Provincial High Tech Park XinChangcounty,ZheJiang Province
Test Site:	MRT Technology (Suzhou) Co., Ltd
Test Site Address:	D8 Building, Youxin Industrial Park, No.2 Tian'edang Rd., Wuzhong Economic Development Zone, Suzhou, China
FCC Registration No.:	893164
Test Device Serial No.:	N/A <input type="checkbox"/> Production <input checked="" type="checkbox"/> Pre-Production <input type="checkbox"/> Engineering

Test Facility / Accreditations

Measurements were performed at MRT Laboratory located in Tian'edang Rd., Suzhou, China.

- MRT facility is a FCC registered (MRT Reg. No. 893164) test facility with the site description report on file and has met all the requirements specified in ANSI C63.4-2014.
- MRT facility is an IC registered (MRT Reg. No. 11384A-1) test laboratory with the site description on file at Industry Canada.
- MRT facility is a VCCI registered (R-20025, G-20034, C-20020, T-20020) test laboratory with the site description on file at VCCI Council.
- MRT Lab is accredited to ISO 17025 by the American Association for Laboratory Accreditation (A2LA) under the American Association for Laboratory Accreditation Program (A2LA Cert. No. 3628.01) in EMC, Telecommunications, Radio and SAR testing.



1. INTRODUCTION

1.1. Scope

Measurement and determination of electromagnetic emissions (EMC) of radio frequency devices including intentional and/or unintentional radiators for compliance with the technical rules and regulations of the Federal Communications Commission and the Industry Canada Certification and Engineering Bureau.

1.2. MRT Test Location

The map below shows the location of the MRT LABORATORY, its proximity to the Taihu Lake. These measurement tests were conducted at the MRT Technology (Suzhou) Co., Ltd. Facility located at D8 Building, No.2 Tian'edang Rd., Wuzhong Economic Development Zone, Suzhou, China. The measurement facility compliant with the test site requirements specified in ANSI C63.4-2014.



2. PRODUCT INFORMATION

2.1. Equipment Description

Product Name	RF Remote control
Model No.	JCHR35H3-1, JCHR35H3-2
Frequency Range	2404 ~ 2479 MHz
Channel Number	5
Type of Modulation	GFSK

Note: Product supports transmitter only.

2.2. Operation Frequency and Channel List

Channel	Frequency	Channel	Frequency
01	2404 MHz	02	2419 MHz
03	2454 MHz	04	2469 MHz
05	2479 MHz	---	---

2.3. Test Configuration

The EUT was tested as described in this report is in compliance with the requirements limits of FCC Rules Part 15.207, 15.209, 15.215 and 15.249. ANSI C63.10-2013 was used to reference the appropriate EUT setup for radiated spurious emissions testing and AC line conducted testing.

2.4. Test Software

N/A

2.5. EMI Suppression Device(s)/Modifications

No EMI suppression device(s) were added and/or no modifications were made during testing.

2.6. Labeling Requirements

Per 2.1074 & 15.19; Docket 95-19

The label shall be permanently affixed at a conspicuous location on the device; instruction manual or pamphlet supplied to the user and be readily visible to the purchaser at the time of purchase.

However, when the device is so small wherein placement of the label with specified statement is not practical, only the FCC ID must be displayed on the device per Section 15.19(a)(5). Please see attachment for FCC ID label and label location.

3. DESCRIPTION OF TEST

3.1. Evaluation Procedure

The measurement procedures described in the American National Standard for Testing Unlicensed Wireless Devices (ANSI C63.10-2013), and the requirements provided in FCC 15.207, 15.209, 15.215 and 15.249 were performed in the report of the EUT.

Deviation from measurement procedure.....None

3.2. AC Line Conducted Emissions

The line-conducted facility is located inside an 8'x4'x4' shielded enclosure. A 1m x 2m wooden table 80cm high is placed 40cm away from the vertical wall and 80cm away from the sidewall of the shielded room. Two 10kHz-30MHz, 50Ω/50uH Line-Impedance Stabilization Networks (LISNs) are bonded to the shielded room floor. Power to the LISNs is filtered by external high-current high-insertion loss power line filters. These filters attenuate ambient signal noise from entering the measurement lines. These filters are also bonded to the shielded enclosure.

The EUT is powered from one LISN and the support equipment is powered from the second LISN. All interconnecting cables more than 1 meter were shortened to a 1 meter length by non-inductive bundling (serpentine fashion) and draped over the back edge of the test table. All cables were at least 40cm above the horizontal reference ground-plane. Power cables for support equipment were routed down to the second LISN while ensuring that that cables were not draped over the second LISN.

Sufficient time for the EUT, support equipment, and test equipment was allowed in order for them to warm up to their normal operating condition. The RF output of the LISN was connected to the receiver and exploratory measurements were made to determine the frequencies producing the maximum emission from the EUT. The receiver was scanned from 150kHz to 30MHz. The detector function was set to peak mode for exploratory measurements while the bandwidth of the analyzer was set to 9kHz. The EUT, support equipment, and interconnecting cables were arranged and manipulated to maximize each emission. Each emission was also maximized by varying: power lines, the mode of operation or data exchange speed, or support equipment whichever determined the worst-case emission. Once the worst case emissions have been identified, the one EUT cable configuration/arrangement and mode of operation that produced these emissions are used for final measurements on the same test site. The analyzer is set to CISPR quasi-peak and average detectors with a 9kHz resolution bandwidth for final measurements.

An extension cord was used to connect to a single LISN which powered by EUT. The extension cord was calibrated with LISN, the impedance and insertion loss are compliance with the requirements as stated in ANSI C63.10-2013.

3.3. Radiated Emissions

The radiated test facilities consisted of an indoor 3 meter semi-anechoic chamber used for final measurements and exploratory measurements, when necessary. The measurement area is contained within the semi-anechoic chamber which is shielded from any ambient interference. For measurements above 1GHz absorbers are arranged on the floor between the turn table and the antenna mast in such a way so as to maximize the reduction of reflections. For measurements below 1GHz, the absorbers are removed. A MF Model 210SS turntable is used for radiated measurement. It is a continuously rotatable, remote controlled, metallic turntable and 2 meters (6.56 ft.) in diameter. The turn table is flush with the raised floor of the chamber in order to maintain its function as a ground plane. An 80cm high PVC support structure is placed on top of the turntable.

For all measurements, the spectrum was scanned through all EUT azimuths and from 1 to 4 meter receive antenna height using a broadband antenna from 30MHz up to the upper frequency shown in 15.33(b)(1) depending on the highest frequency generated or used in the device or on which the device operates or tunes. For frequencies above 1GHz, linearly polarized double ridge horn antennas were used. For frequencies below 30MHz, a calibrated loop antenna was used. When exploratory measurements were necessary, they were performed at 1 meter test distance inside the semi-anechoic chamber using broadband antennas, broadband amplifiers, and spectrum analyzers to determine the frequencies and modes producing the maximum emissions. Sufficient time for the EUT, support equipment, and test equipment was allowed in order for them to warm up to their normal operating condition. The test set-up for frequencies below 1GHz was placed on top of the 0.8 meter high, 1 x 1.5 meter table; and test set-up for frequencies 1-25GHz was placed on top of the 1.5 meter high, 1 x 1.5 meter table. The EUT, support equipment, and interconnecting cables were arranged and manipulated to maximize each emission. Appropriate precaution was taken to ensure that all emissions from the EUT were maximized and investigated. The system configuration, clock speed, mode of operation or video resolution, if applicable, turntable azimuth, and receive antenna height was noted for each frequency found.

Final measurements were made in the semi-anechoic chamber using calibrated, linearly polarized broadband and horn antennas. The test setup was configured to the setup that produced the worst case emissions. The spectrum analyzer was set to investigate all frequencies required for testing to compare the highest radiated disturbances with respect to the specified limits. The turntable containing the EUT was rotated through 360 degrees and the height of the receive antenna was varied 1 to 4 meters and stopped at the azimuth and height producing the maximum emission. Each emission was maximized by changing the orientation of the EUT through three orthogonal planes and changing the polarity of the receive antenna, whichever produced the worst-case emissions. According to 3dB Beam-Width of horn antenna, the horn antenna should be always directed to the EUT when rising height.

4. ANTENNA REQUIREMENTS

Excerpt from §15.203 of the FCC Rules/Regulations:

“An intentional radiator antenna shall be designed to ensure that no antenna other than that furnished by the responsible party can be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the provisions of this section.”

- The antenna of the EUT is **permanently attached**.
- There are no provisions for connection to an external antenna.

Conclusion:

This unit complies with the requirement of §15.203.

5. TEST EQUIPMENT CALIBRATION DATE

Conducted Emissions - SR2

Instrument	Manufacturer	Type No.	Asset No.	Cali. Interval	Cali. Due Date
EMI Test Receiver	R&S	ESR3	MRTSUE06185	1 year	2019/04/20
Two-Line V-Network	R&S	ENV 216	MRTSUE06002	1 year	2019/06/15
Two-Line V-Network	R&S	ENV 216	MRTSUE06003	1 year	2019/06/15
Thermohygrometer	Testo	608-H1	MRTSUE06404	1 year	2019/08/15
Shielding Anechoic Chamber	Mikebang	Chamber-SR2	MRTSUE06214	N/A	N/A

Radiated Emission - AC1

Instrument	Manufacturer	Type No.	Asset No.	Cali. Interval	Cal. Due Date
PXA Signal Analyzer	Keysight	9030B	MRTSUE06395	1 year	2019/09/06
EMI Test Receiver	R&S	ESR7	MRTSUE06001	1 year	2019/08/14
Loop Antenna	Schwarzbeck	FMZB 1519	MRTSUE06025	1 year	2018/11/20
EXA Signal Analyzer	Agilent	N9020A	MRTSUE06106	1 year	2019/04/20
Microwave System Amplifier	Agilent	83017A	MRTSUE06076	1 year	2018/11/17
Bilog Period Antenna	Schwarzbeck	VULB 9168	MRTSUE06172	1 year	2019/04/12
Broad Band Horn Antenna	Schwarzbeck	BBHA9120D	MRTSUE06023	1 year	2018/10/21
Broad Band Horn Antenna	Schwarzbeck	BBHA 9170	MRTSUE06024	1 year	2018/12/14
Amplifier	Schwarzbeck	BBV 9721	MRTSUE06121	1 year	2019/06/13
Thermohygrometer	Testo	608-H1	MRTSUE06403	1 year	2019/08/15
Anechoic Chamber	TDK	Chamber-AC1	MRTSUE06212	1 year	2019/05/08

Conducted Test Equipment - TR3

Instrument	Manufacturer	Type No.	Asset No.	Cali. Interval	Cali. Due Date
EXA Signal Analyzer	Agilent	N9020A	MRTSUE06106	1 year	2019/04/20
Thermohygrometer	Testo	608-H1	MRTSUE06401	1 year	2019/08/15

Software	Version	Function
e3	V8.3.5	EMI Test Software

6. MEASUREMENT UNCERTAINTY

Where relevant, the following test uncertainty levels have been estimated for tests performed on the EUT as specified in CISPR 16-4-2. This uncertainty represents an expanded uncertainty expressed at approximately the 95% confidence level using a coverage factor of $k = 2$.

AC Conducted Emission Measurement - SR2
Measuring Uncertainty for a Level of Confidence of 95% ($U=2Uc(y)$): 150kHz~30MHz: 3.46dB
Radiated Emission Measurement - AC1
Measuring Uncertainty for a Level of Confidence of 95% ($U=2Uc(y)$): 9kHz ~ 1GHz: 4.18dB 1GHz ~ 25GHz: 4.76dB
20dB Spectrum Bandwidth - TR3
Measuring Uncertainty for a Level of Confidence of 95% ($U=2Uc(y)$): 0.28%

7. TEST RESULT

7.1. Summary

Company Name: ZHEJIANG JIECANG LINEAR MOTION TECHNOLOGY CO., LTD

Product: RF Remote control

FCC Part Section(s)	Test Description	Test Limit	Test Condition	Test Result	Reference
15.207	AC Conducted Emissions 150kHz - 30MHz	< FCC 15.207 limits	Line Conducted	N/A	Section 7.2
15.209 15.249	General Field Strength Limits (Restricted Bands and Radiated Emission Limits)	Emissions in restricted bands must meet the radiated limits detailed in 15.209 & clause 8.10	Radiated	Pass	Section 7.3 & 7.4
15.215(c)	20dB Spectrum Bandwidth	20 dB bandwidth of the emission in the specific band	Conducted	Pass	Section 7.5
15.215(c)	99% Occupied Bandwidth	N/A	Conducted	Pass	Section 7.6

Notes:

1. All modes of operation and data rates were investigated. For radiated emission test, every axis (X, Y, Z) was also verified. The test results shown in the following sections represent the worst case emissions.
2. The analyzer plots shown in this section were all taken with a correction table loaded into the analyzer. The correction table was used to account for the losses of the cables and attenuators used as part of the system to connect the EUT to the analyzer at all frequencies of interest.

7.2. Conducted Emission


7.2.1. Test Limit

FCC 15.207 Limits		
Frequency (MHz)	QP (dBuV)	AV (dBuV)
0.15 ~ 0.50	66 ~ 56	56 ~ 46
0.50 ~ 5.0	56	46
5.0 ~ 30	60	50

Note 1: The lower limit shall apply at the transition frequencies.

Note 2: The limit decreases linearly with the logarithm of the frequency in the range 0.15MHz to 0.5MHz.

7.2.2. Test Setup

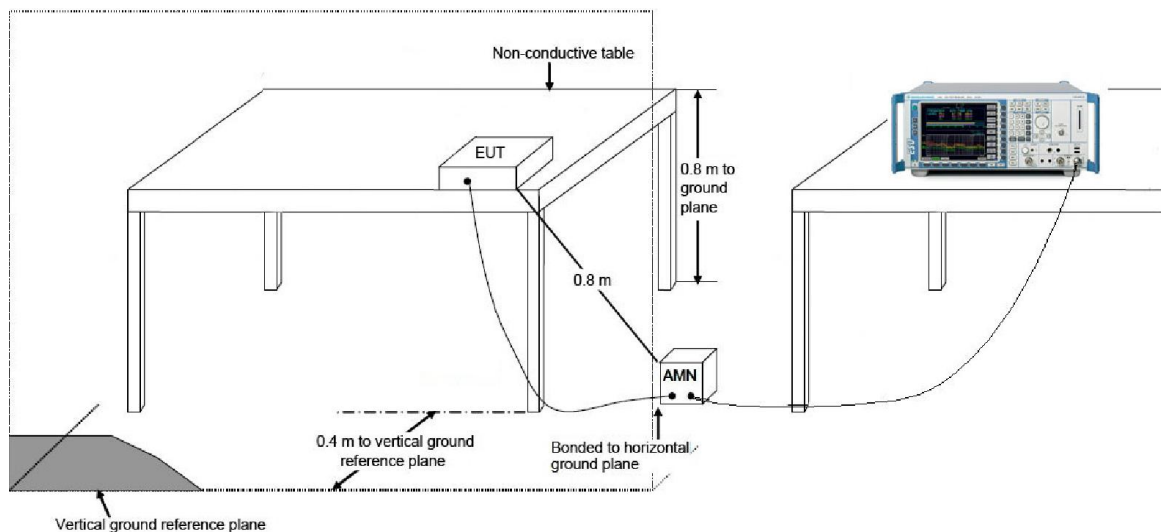

7.2.3. Test Result

The EUT is powered by battery, so this requirement does not apply.

7.3. Radiated Emission

7.3.1. Test Limit

FCC Part 15 Subpart C Paragraph 15.249 & RSS-210		
Fundamental Frequency (MHz)	Field Strength of Fundamental (mV/m)	Field Strength of Harmonics (uV/m)
902 ~ 908	50	500
2400 ~ 2483.5	50	500
5725 ~ 5875	50	500
24000 ~ 24250	250	2500

FCC Part 15.249 (d), Emissions radiated outside of the specified frequency bands, except for harmonics, shall be attenuated by at least 50 dB below the level of the fundamental or to the general radiated emission limits in §15.209, whichever is the lesser attenuation.

FCC Part 15 Subpart C Paragraph 15.209 & RSS-Gen		
Frequency (MHz)	Field Strength (uV/m)	Measurement Distance (m)
0.009 ~ 0.490	2400/F(kHz)	300
0.490 ~ 1.705	24000/F(kHz)	30
1.705 ~ 30.0	30	30
30 ~ 80	100**	3
80 ~ 216	150**	3
216 ~ 960	200**	3
Above 960	500	3


Note 1: The lower limit shall apply at the transition frequency.

Note 2: Distance refers to the distance in meters between the measuring instrument antenna and the closed point of any part of the device or system.


Note 3: E field strength (dBuV/m) = 20 log E field strength (uV/m).

7.3.2. Test Setup


9kHz ~ 30MHz Test Setup:

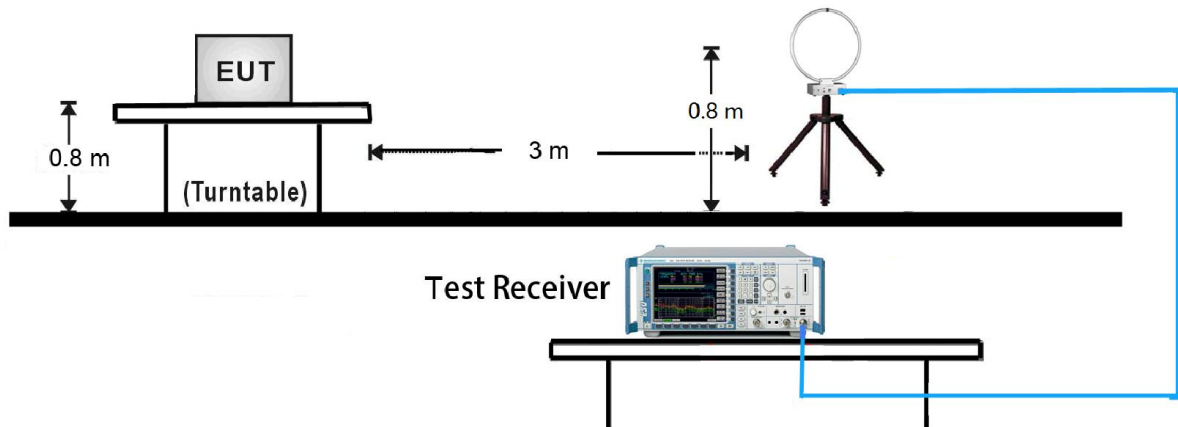

30MHz ~ 1GHz Test Setup:

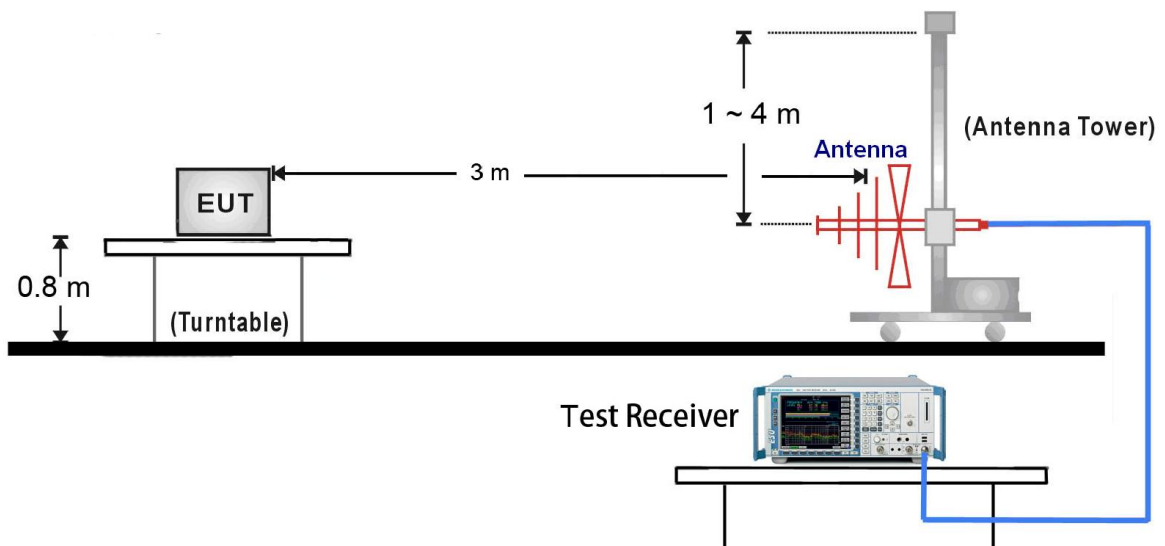

1GHz ~ 25GHz Test Setup:

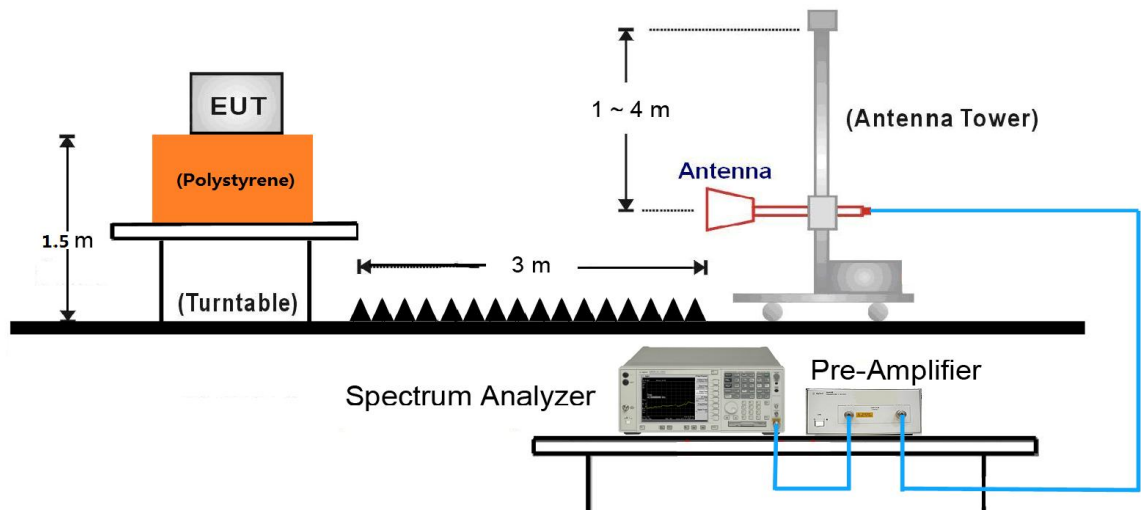


7.3.3.Test Result

Product	RF Remote control	Temperature	24°C
Test Engineer	Ternence Wang	Relative Humidity	59%
Test Site	AC1	Test Date	2018/09/11

Time On (ms)	One Period (ms)	Duty Cycle (%)	Duty Cycle Factor (dB)
13.5	100	13.50	-17.39

Note 1: Duty Cycle Factor = 20*Log (Duty Cycle)

Note 2: Time On(ms)=0.3*45=13.5 ms

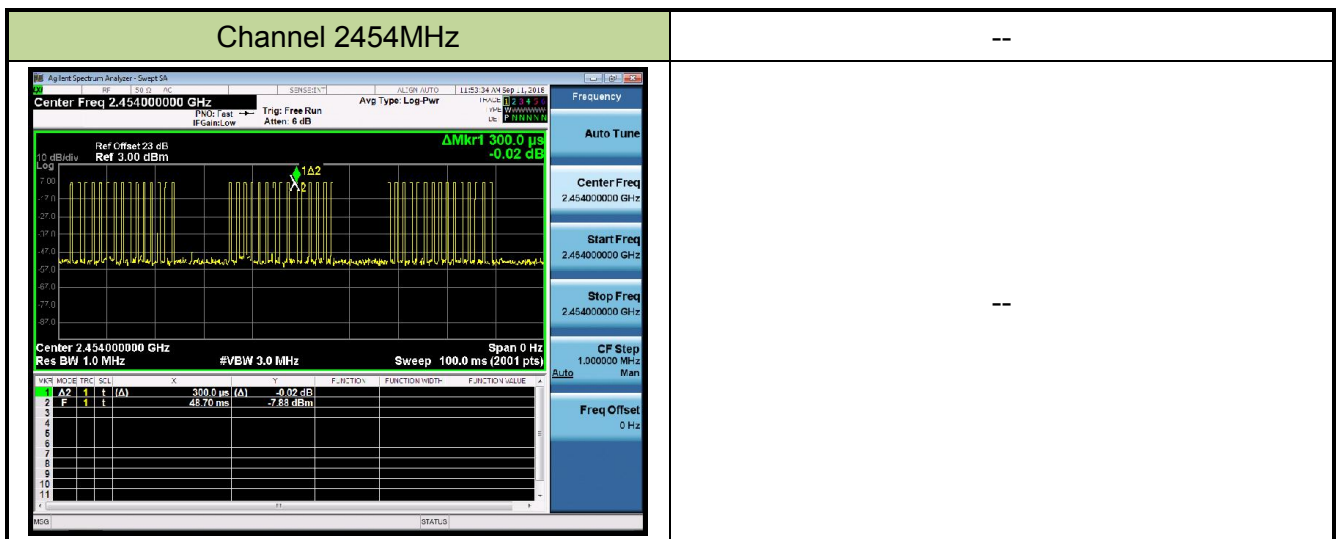

Product	RF Remote control	Temperature	25°C
Test Engineer	Ternence Wang	Relative Humidity	52%
Test Site	AC1	Test Date	2018/09/07
Remark:	Fundamental Radiated Emission		

Frequency (MHz)	Reading Level (dBμV)	Factor (dB)	Duty Cycle Factor (dB)	Measure Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Detector	Polarization
2404	63.1	32.3	N/A	95.4	114	-18.6	PK	Horizontal
	63.1	32.3	-17.4	78.0	94	-16.0	AV	Horizontal
	56.2	32.3	N/A	88.5	114	-25.5	PK	Vertical
	56.2	32.3	-17.4	71.1	94	-22.9	AV	Vertical
2454	62.2	32.3	N/A	94.4	114	-19.6	PK	Horizontal
	62.2	32.3	-17.4	77.0	94	-17.0	AV	Horizontal
	51.2	32.3	N/A	83.5	114	-30.5	PK	Vertical
	51.2	32.3	-17.4	66.1	94	-27.9	AV	Vertical
2479	62.2	32.3	N/A	94.6	114	-19.4	PK	Horizontal
	62.2	32.3	-17.4	77.2	94	-16.8	AV	Horizontal
	56.0	32.3	N/A	88.3	114	-25.7	PK	Vertical
	56.0	32.3	-17.4	70.9	94	-23.1	AV	Vertical

Note 1: Peak Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Average Measure Level = Peak Measure Level + Duty Cycle Factor

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m)

Note 2: All readings below 1GHz are peak, above 1GHz are performed with peak and/or average measurements as necessary.

Product	RF Remote control	Temperature	25°C
Test Engineer	Ternence Wang	Relative Humidity	52%
Test Site	AC1	Test Date	2018/09/07
Remark:	Harmonics Radiated Emission - 2404MHz		

Frequency (MHz)	Reading Level (dBμV)	Factor (dB)	Duty Cycle Factor (dB)	Measure Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Detector	Polarization
42.5	0.5	14.5	N/A	15.0	40.0	-25.0	QP	Horizontal
118.3	2.9	13.0	N/A	15.9	43.5	-27.6	QP	Horizontal
123.6	3.0	13.5	N/A	16.5	43.5	-27.0	QP	Vertical
594.1	3.9	20.5	N/A	24.4	46.0	-21.6	QP	Vertical
4808.0	45.7	5.9	N/A	51.6	74.0	-22.4	PK	Horizontal
7212.0	34.6	12.6	N/A	47.2	74.0	-26.8	PK	Horizontal
9616.0	33.8	15.4	N/A	49.2	74.0	-24.8	PK	Horizontal
12012.0	34.2	17.4	N/A	51.6	74.0	-22.4	PK	Horizontal
4808.0	39.5	5.9	N/A	45.4	74.0	-28.6	PK	Vertical
7212.0	34.3	12.6	N/A	46.9	74.0	-27.1	PK	Vertical
9616.0	34.0	15.4	N/A	49.4	74.0	-24.6	PK	Vertical
12012.0	32.9	17.4	N/A	50.3	74.0	-23.7	PK	Vertical

Note 1: Peak Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Average Measure Level = Peak Measure Level + Duty Cycle Factor

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) – Pre Amplifier Gain (dB)

Note 2: Average measurement was not performed when the peak level lower than average limit.

Note 3: The test trace is same as the ambient noise (the test frequency range: 9 kHz ~ 30 MHz and 18 GHz ~ 25 GHz), therefore no data appear in the report.

Product	RF Remote control	Temperature	25°C
Test Engineer	Ternence Wang	Relative Humidity	52%
Test Site	AC1	Test Date	2018/09/07
Remark:	Harmonics Radiated Emission - 2454MHz		

Frequency (MHz)	Reading Level (dBμV)	Factor (dB)	Duty Cycle Factor (dB)	Measure Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Detector	Polarization
117.5	3.0	13.0	N/A	16.0	43.5	-27.5	QP	Horizontal
176.5	2.0	13.4	N/A	15.4	43.5	-28.1	QP	Horizontal
123.1	5.0	13.4	N/A	18.4	43.5	-25.1	QP	Vertical
153.7	0.7	15.3	N/A	15.9	43.5	-27.6	QP	Vertical
4908.0	44.1	6.1	N/A	50.2	74.0	-23.8	PK	Horizontal
7362.0	34.6	12.7	N/A	47.3	74.0	-26.8	PK	Horizontal
9816.0	33.4	16.4	N/A	49.8	74.0	-24.2	PK	Horizontal
12270.0	33.5	17.4	N/A	50.8	74.0	-23.2	PK	Horizontal
4908.0	39.4	6.1	N/A	45.4	74.0	-28.6	PK	Vertical
7362.0	34.1	12.7	N/A	46.7	74.0	-27.3	PK	Vertical
9816.0	33.8	16.4	N/A	50.2	74.0	-23.8	PK	Vertical
12270.0	32.5	17.4	N/A	49.8	74.0	-24.2	PK	Vertical

Note 1: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Average Measure Level = Peak Measure Level + Duty Cycle Factor

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) – Pre Amplifier Gain (dB)

Note 2: Average measurement was not performed when the peak level lower than average limit.

Note 3: The test trace is same as the ambient noise (the test frequency range: 9 kHz ~ 30 MHz and 18 GHz ~ 25 GHz), therefore no data appear in the report.

Product	RF Remote control	Temperature	25°C
Test Engineer	Ternence Wang	Relative Humidity	52%
Test Site	AC1	Test Date	2018/09/07
Remark:	Harmonics Radiated Emission - 2479MHz		

Frequency (MHz)	Reading Level (dBμV)	Factor (dB)	Duty Cycle Factor (dB)	Measure Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Detector	Polarization
59.5	0.0	13.5	N/A	13.5	40.0	-26.5	QP	Horizontal
148.7	0.5	15.2	N/A	15.7	43.5	-27.8	QP	Horizontal
123.1	5.9	13.4	N/A	19.3	43.5	-24.2	QP	Vertical
157.0	0.2	15.3	N/A	15.5	43.5	-28.0	QP	Vertical
4958.0	45.0	6.1	N/A	51.1	74.0	-22.9	PK	Horizontal
7437.0	34.4	12.9	N/A	47.3	74.0	-26.7	PK	Horizontal
9916.0	34.0	16.6	N/A	50.6	74.0	-23.4	PK	Horizontal
12395.0	33.8	17.2	N/A	51.1	74.0	-22.9	PK	Horizontal
4958.0	40.0	6.1	N/A	46.1	74.0	-27.9	PK	Vertical
7437.0	34.9	12.9	N/A	47.8	74.0	-26.2	PK	Vertical
9916.0	33.2	16.6	N/A	49.9	74.0	-24.1	PK	Vertical
12395.0	33.4	17.2	N/A	50.6	74.0	-23.4	PK	Vertical

Note 1: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Average Measure Level = Peak Measure Level + Duty Cycle Factor

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) – Pre Amplifier Gain (dB)

Note 2: Average measurement was not performed when the peak level lower than average limit.

Note 3: The test trace is same as the ambient noise (the test frequency range: 9 kHz ~ 30 MHz and 18 GHz ~ 25 GHz), therefore no data appear in the report.

7.4. Radiated Restricted Band Edge Measurement

7.4.1. Test Limit

For 15.205 requirement:

Radiated emissions which fall in the restricted bands, as defined in Section 15.205(a) of FCC part 15, must also comply with the radiated emission limits specified in Section 15.209(a).


Frequency (MHz)	Frequency (MHz)	Frequency (MHz)	Frequency (GHz)
0.090 - 0.110	16.42 - 16.423	399.9 - 410	4.5 - 5.15
¹ 0.495 - 0.505	16.69475 - 16.69525	608 - 614	5.35 - 5.46
2.1735 - 2.1905	16.80425 - 16.80475	960 - 1240	7.25 - 7.75
4.125 - 4.128	25.5 - 25.67	1300 - 1427	8.025 - 8.5
4.17725 - 4.17775	37.5 - 38.25	1435 - 1626.5	9.0 - 9.2
4.20725 - 4.20775	73 - 74.6	1645.5 - 1646.5	9.3 - 9.5
6.215 - 6.218	74.8 - 75.2	1660 - 1710	10.6 - 12.7
6.26775 - 6.26825	108 - 121.94	1718.8 - 1722.2	13.25 - 13.4
6.31175 - 6.31225	123 - 138	2200 - 2300	14.47 - 14.5
8.291 - 8.294	149.9 - 150.05	2310 - 2390	15.35 - 16.2
8.362 - 8.366	156.52475 - 156.525	2483.5 - 2500	17.7 - 21.4
8.37625 - 8.38675	156.7 - 156.9	2690 - 2900	22.01 - 23.12
8.41425 - 8.41475	162.0125 - 167.17	3260 - 3267	23.6 - 24.0
12.29 - 12.293	167.72 - 173.2	3332 - 3339	31.2 - 31.8
12.51975 - 12.52025	240 - 285	3345.8 - 3358	36.43 - 36.5
12.57675 - 12.57725	322 - 335.4	3600 - 4400	(²)
13.36 - 13.41	--	--	--

All out of band emissions appearing in a restricted band as specified in Section 15.205 of the Title 47 CFR must not exceed the limits shown in Table per Section 15.209.

FCC Part 15 Subpart C Paragraph 15.209		
Frequency [MHz]	Field Strength [$\mu\text{V/m}$]	Measured Distance [Meters]
0.009 ~ 0.490	2400/F (kHz)	300
0.490 ~ 1.705	24000/F (kHz)	30
1.705 ~ 30	30	30
30 ~ 88	100	3
88 ~ 216	150	3
216 ~ 960	200	3
Above 960	500	3


7.4.2. Test Setup

1GHz ~ 18GHz Test Setup:

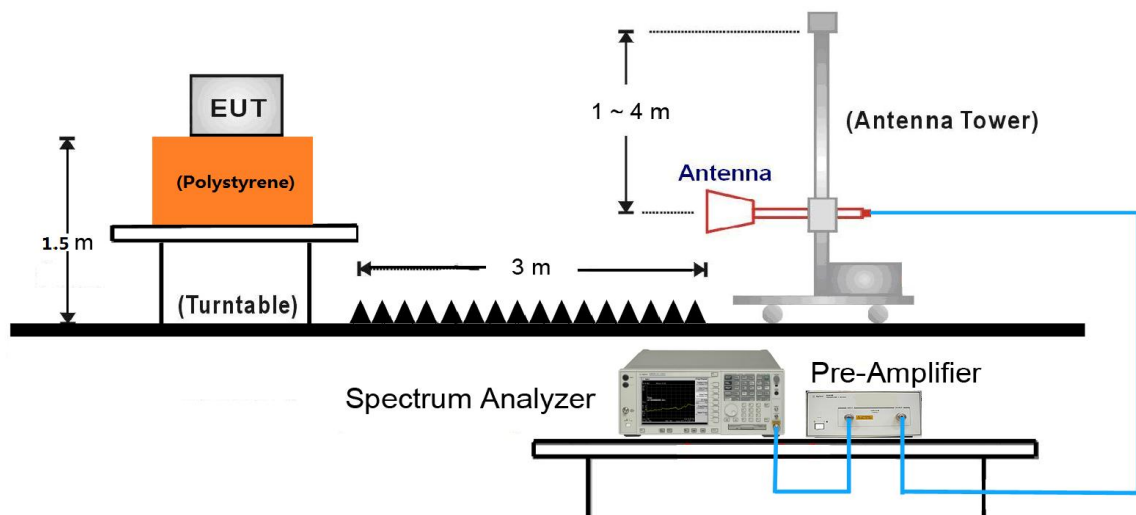

7.4.3.Test Result

Site: AC1	Time: 2018/09/07 - 08:08
Limit: FCC_Part15.209_RE(3m)	Engineer: Bruce Wang
Probe: BBHA9120D_1-18GHz	Polarity: Horizontal
EUT: RF Remote control	Power: By Battery
Test Mode: Transmit at low channel 2404MHz	

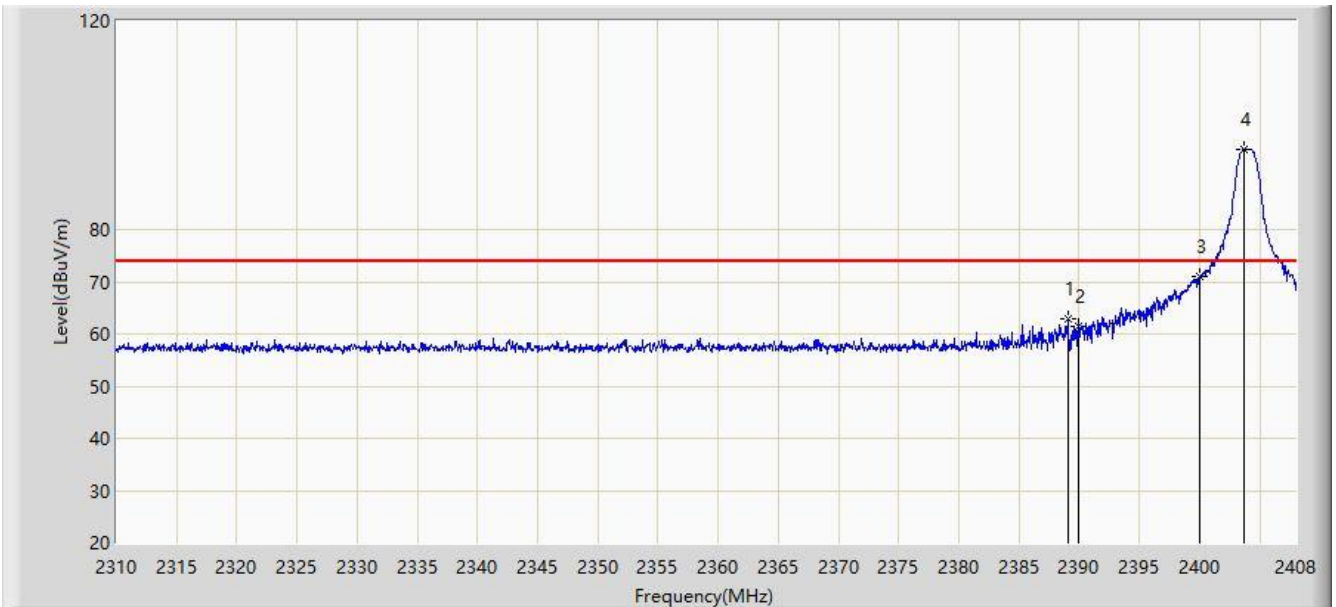


No	Flag	Mark	Frequency (MHz)	Reading Level (dBuV)	Factor (dB)	Duty Cycle Factor (dB)	Measure Level (dBuV/m)	Limit (dBuV/m)	Over Limit (dB)	Type
1			2389.037	30.539	32.328	N/A	62.867	74.000	-11.133	PK
			2389.037	30.539	32.328	-17.39	45.477	54.000	-8.523	AV
2			2390.000	29.032	32.327	N/A	61.359	74.000	-12.641	PK
			2390.000	29.032	32.327	-17.39	43.969	54.000	-10.031	AV
3			2400.000	38.633	32.309	N/A	70.942	74.000	-3.058	PK
			2400.000	38.633	32.309	-17.39	53.552	54.000	-0.448	AV
4		*	2403.737	63.063	32.3	N/A	95.363	114.000	-18.637	PK

Note: Peak Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Average Measure Level = Peak Measure Level + Duty Cycle Factor

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m)

Site: AC1	Time: 2018/09/07 - 08:11
Limit: FCC_Part15.209_RE(3m)	Engineer: Bruce Wang
Probe: BBHA9120D_1-18GHz	Polarity: Vertical
EUT: RF Remote control	Power: By Battery
Test Mode: Transmit at low channel 2404MHz	

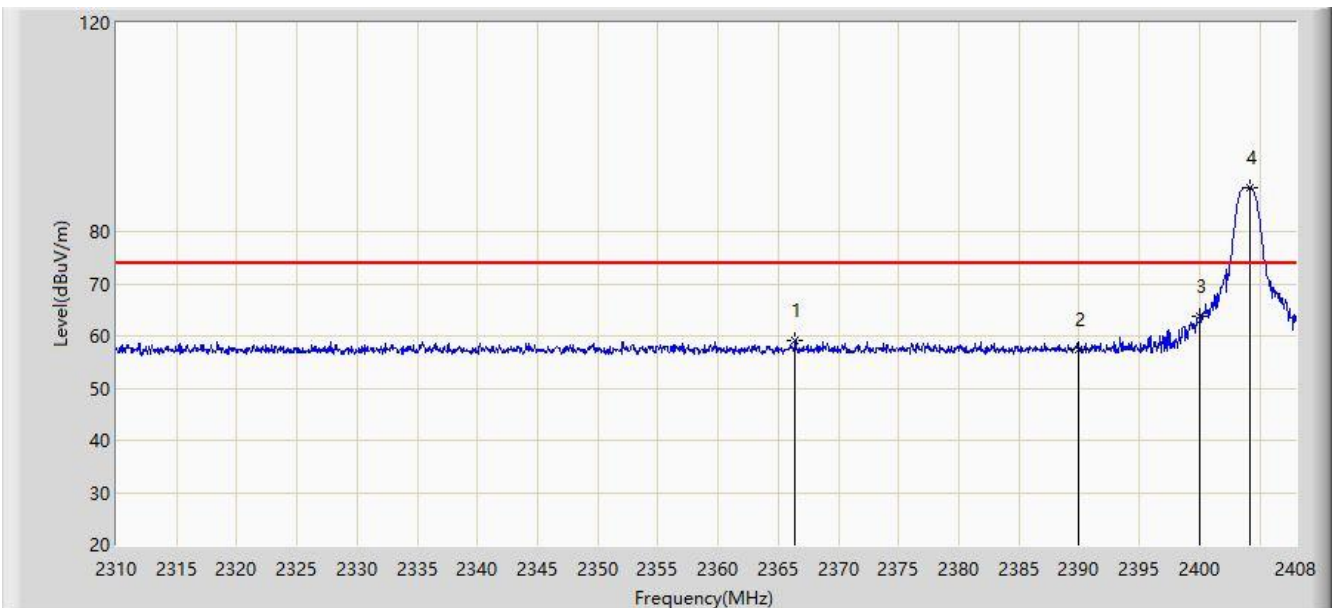


No	Flag	Mark	Frequency (MHz)	Reading Level (dBuV)	Factor (dB)	Duty Cycle Factor (dB)	Measure Level (dBuV/m)	Limit (dBuV/m)	Over Limit (dB)	Type
1			2366.399	26.889	32.365	N/A	59.254	74.000	-14.746	PK
			2366.399	26.889	32.365	-17.39	41.864	54.000	-12.136	AV
2			2390.000	24.951	32.327	N/A	57.278	74.000	-16.722	PK
			2390.000	24.951	32.327	-17.39	39.888	54.000	-14.112	AV
3			2400.000	31.579	32.309	N/A	63.888	74.000	-10.112	PK
			2400.000	31.579	32.309	-17.39	46.498	54.000	-7.502	AV
4		*	2404.178	56.164	32.3	N/A	88.464	114.000	-25.536	PK

Note: Peak Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Average Measure Level = Peak Measure Level + Duty Cycle Factor

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m)

Site: AC1	Time: 2018/09/07 - 08:37
Limit: FCC_Part15.209_RE(3m)	Engineer: Bruce Wang
Probe: BBHA9120D_1-18GHz	Polarity: Horizontal
EUT: RF Remote control	Power: By Battery
Test Mode: Transmit at high channel 2479MHz	

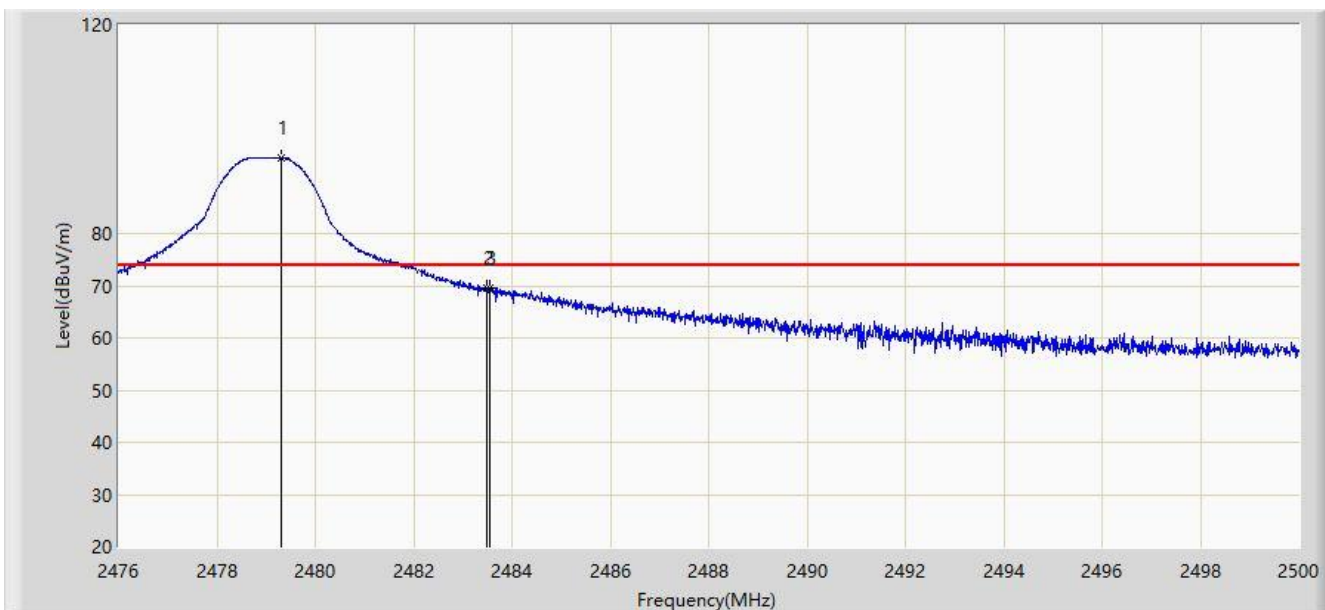


No	Flag	Mark	Frequency (MHz)	Reading Level (dBuV)	Factor (dB)	Duty Cycle Factor (dB)	Measure Level (dBuV/m)	Limit (dBuV/m)	Over Limit (dB)	Type
1		*	2479.300	62.233	32.323	N/A	94.556	114.000	-19.444	PK
2			2483.500	37.119	32.340	N/A	69.459	74.000	-4.541	PK
			2483.500	37.119	32.340	-17.39	52.069	54.000	-1.931	AV
3			2483.560	37.296	32.340	N/A	69.636	74.000	-4.364	PK
			2483.560	37.296	32.340	-17.39	52.246	54.000	-1.754	AV

Note: Peak Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Average Measure Level = Peak Measure Level + Duty Cycle Factor

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m)

Site: AC1	Time: 2018/09/07 - 08:39
Limit: FCC_Part15.209_RE(3m)	Engineer: Bruce Wang
Probe: BBHA9120D_1-18GHz	Polarity: Vertical
EUT: RF Remote control	Power: By Battery
Test Mode: Transmit at high channel 2479MHz	

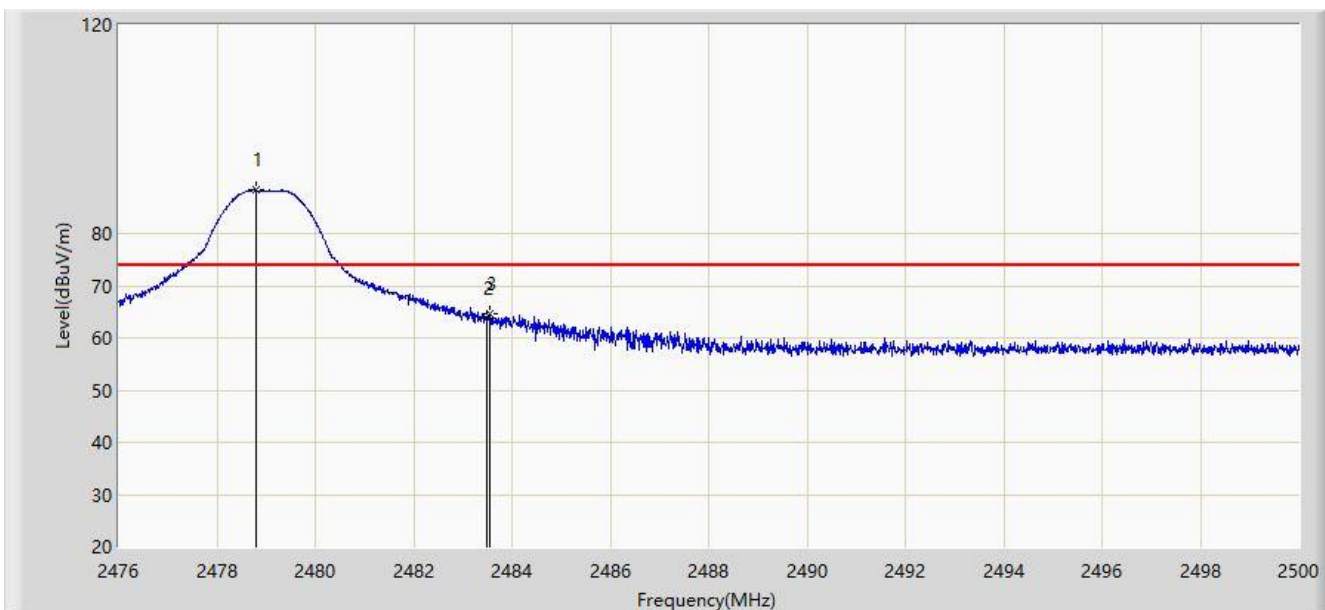

No	Flag	Mark	Frequency (MHz)	Reading Level (dBuV)	Factor (dB)	Duty Cycle Factor (dB)	Measure Level (dBuV/m)	Limit (dBuV/m)	Over Limit (dB)	Type
1		*	2475.780	54.639	32.314	N/A	86.953	114.000	-27.047	PK
2			2483.500	31.415	32.340	N/A	63.755	74.000	-10.245	PK
			2483.500	31.415	32.340	-17.39	46.365	54.000	-7.635	AV
3			2483.536	32.234	32.340	N/A	64.574	74.000	-9.426	PK
			2483.536	32.234	32.340	-17.39	47.184	54.000	-6.816	AV

Note: Peak Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Average Measure Level = Peak Measure Level + Duty Cycle Factor

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m)

7.5. 20dB Spectrum Bandwidth Measurement

7.5.1. Test Limit

Intentional radiators must be designed to ensure that the 20 dB bandwidth of the emission in the specific band (2400 ~ 2483.5MHz).


7.5.2. Test Procedure used

ANSI C63.10 Clause 6.9.2

7.5.3. Test Setting

1. Set the spectrum span range to overlap the nominal center frequency
2. Set RBW = 100 kHz
3. VBW $\geq 3 \times$ RBW
4. Detector = Peak
5. Trace mode = max hold
6. Sweep = auto couple
7. Allow the trace was allowed to stabilize and marker the highest level.
8. Determine the display level (the highest level - 20dB) and place two markers, one at the lowest frequency and the other at the highest frequency.


7.5.4. Test Setup

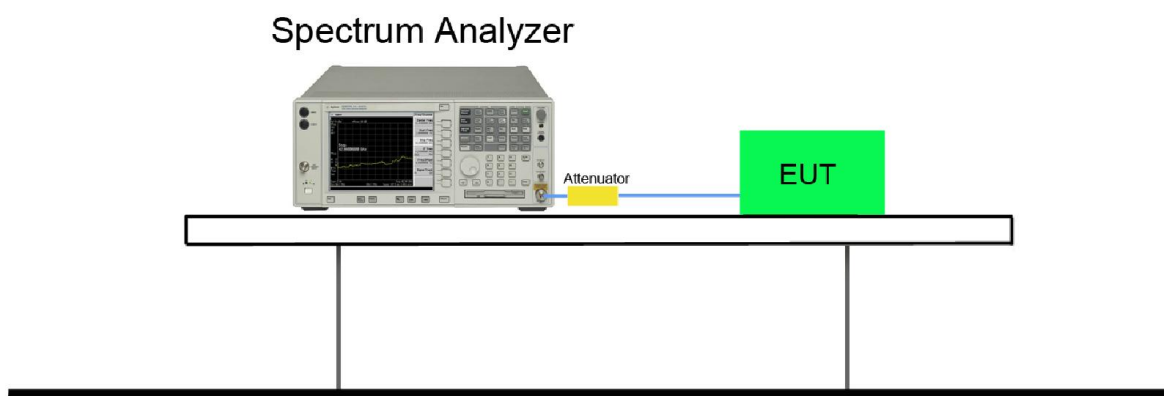

7.5.5.Test Result

Product	RF Remote control	Temperature	24°C
Test Engineer	Ternence Wang	Relative Humidity	59%
Test Site	AC1	Test Date	2018/09/07

Frequency (MHz)	Frequency Range (MHz)	Frequency Range (MHz)	Result
2404	2402.72	---	Pass
2479	---	2479.95	Pass

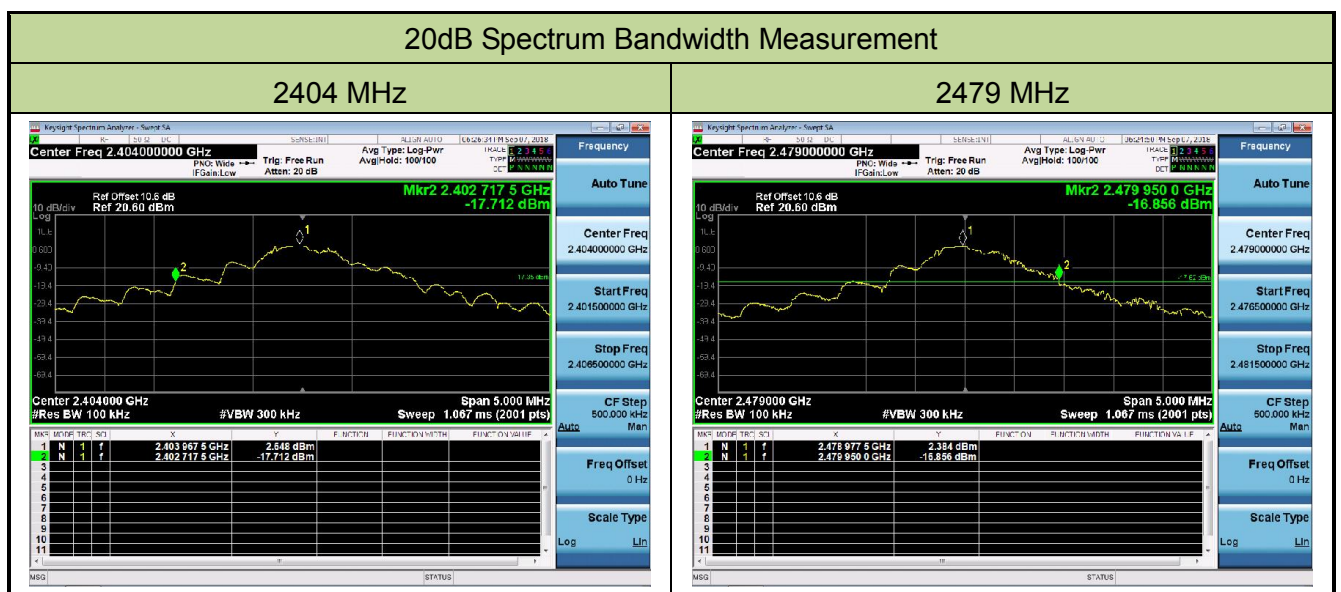

7.6. 99% Bandwidth Measurement

7.6.1. Test Limit

N/A


7.6.2. Test Procedure used

ANSI C63.10 Section 6.9

7.6.3. Test Setting

1. The analyzers' automatic bandwidth measurement capability was used to perform the 99% bandwidth measurement. The bandwidth measurement was not influenced by any intermediated power nulls in the fundamental emission.
2. RBW = approximately 1% to 5% of the OBW.
3. VBW $\geq 3 \times$ RBW.
4. Detector = Peak.
5. Trace mode = max hold.


7.6.4. Test Setup

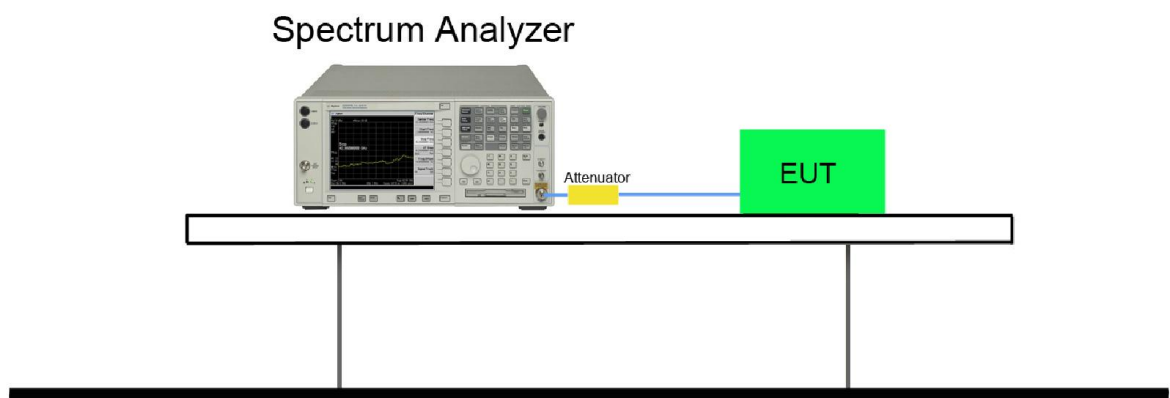

7.6.5. Test Result

Product	RF Remote control	Temperature	24°C
Test Engineer	Ternence Wang	Relative Humidity	59%
Test Site	TR3	Test Date	2018/09/07

Frequency (MHz)	99% Bandwidth (MHz)
2404	1.93
2454	1.59
2479	1.50

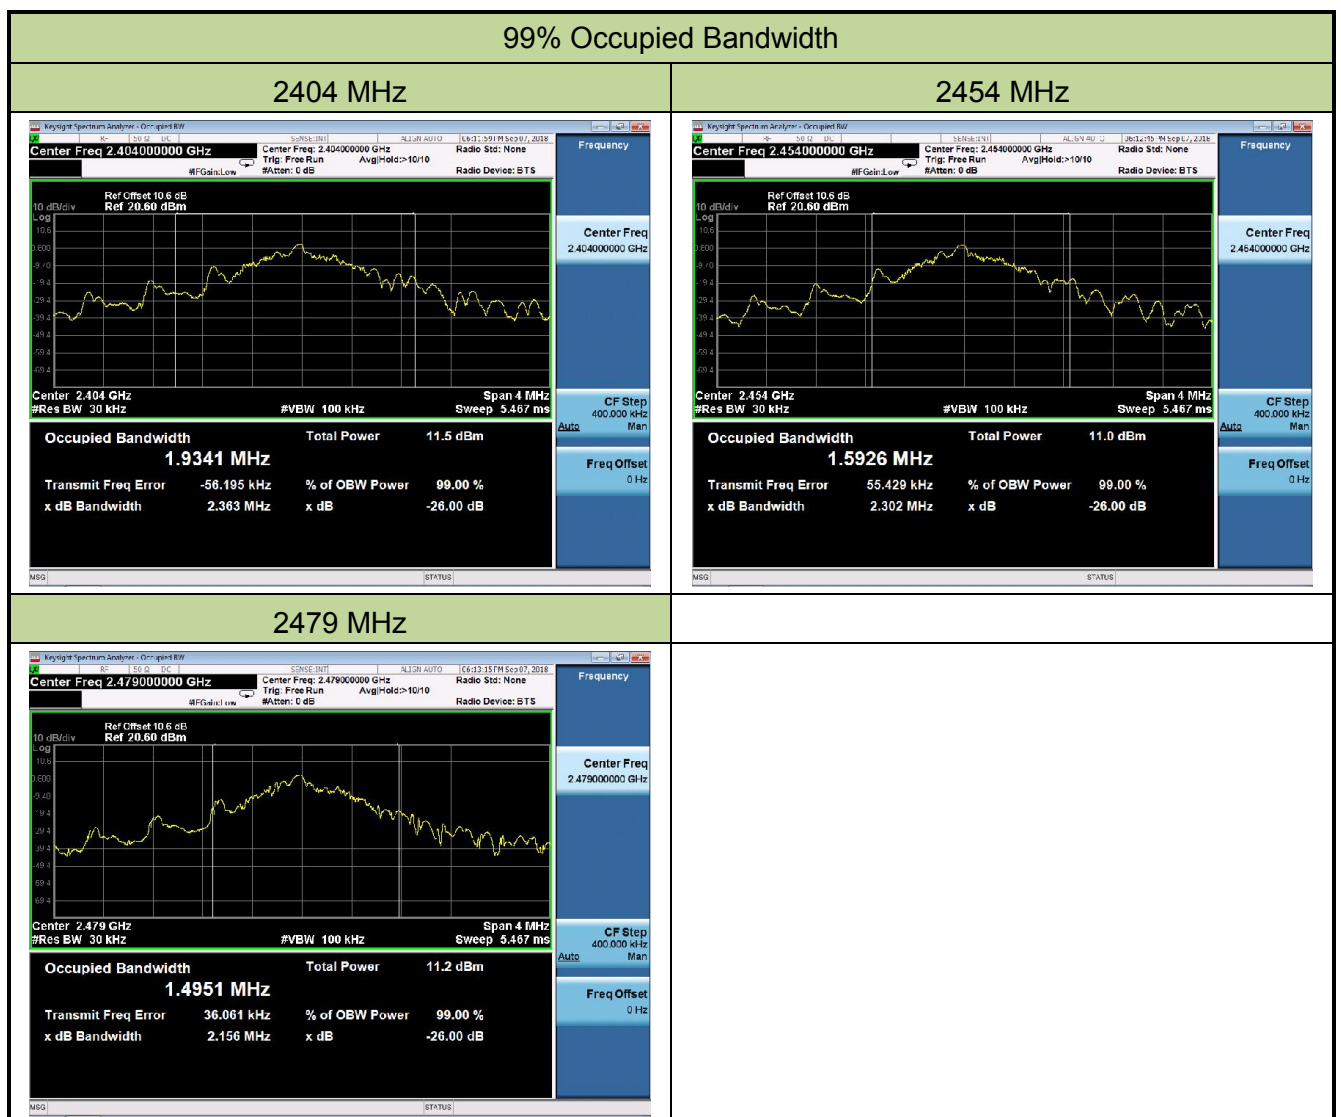

8. CONCLUSION

The data collected relate only the item(s) tested and show that the device is in compliance with Part 15C of the FCC Rules.

The End

Appendix A – Test Setup Photograph

Refer to “1809WSU004-UT” file.

Appendix B – EUT Photograph

Refer to “1809WSU004-UE” file.