



TESTING LABORATORY
CERTIFICATE #4820.01



FCC PART 15.247

TEST REPORT

For

Motic China Group Co., Ltd

Motic BLDG, TORCH HI-TECH INDUSTRIAL DEV ZONE, XIAMEN FUJIAN, CHINA,
361006

FCC ID: PVEPANTHERA

Report Type: Original Report	Product Name: Biological Microscope
Report Number:	RXM181227054-00A
Report Date:	2019-05-06
Reviewed By:	Jerry Zhang EMC Manager
Test Laboratory:	Bay Area Compliance Laboratories Corp. (Dongguan) No.69 Pulongcun, Puxinhu Industry Area, Tangxia, Dongguan, Guangdong, China Tel: +86-769-86858888 Fax: +86-769-86858891 www.baclcorp.com.cn

Note: This test report is prepared for the customer shown above and for the device described herein. It may not be duplicated or used in part without prior written consent from Bay Area Compliance Laboratories Corp. (Dongguan). This report must not be used by the customer to claim product certification, approval, or endorsement by A2LA* or any agency of the Federal Government. * This report may contain data that are not covered by the A2LA accreditation and are marked with an asterisk “*”.

TABLE OF CONTENTS

GENERAL INFORMATION.....	4
PRODUCT DESCRIPTION FOR EQUIPMENT UNDER TEST (EUT)	4
OBJECTIVE	4
RELATED SUBMITTAL(S)/GRANT(S).....	4
TEST METHODOLOGY	4
MEASUREMENT UNCERTAINTY	5
TEST FACILITY	5
SYSTEM TEST CONFIGURATION.....	6
DESCRIPTION OF TEST CONFIGURATION	6
EUT EXERCISE SOFTWARE	6
EQUIPMENT MODIFICATIONS	10
LOCAL SUPPORT EQUIPMENT LIST AND DETAILS	10
SUPPORT CABLE LIST AND DETAILS	10
BLOCK DIAGRAM OF TEST SETUP	10
SUMMARY OF TEST RESULTS.....	11
FCC §15.247 (i) & §1.1310 & §2.1091- MAXIMUM PERMISSIBLE EXPOSURE (MPE).....	12
APPLICABLE STANDARD	12
FCC §15.203 - ANTENNA REQUIREMENT.....	13
APPLICABLE STANDARD	13
ANTENNA CONNECTOR CONSTRUCTION	13
FCC §15.207 (a) – AC LINE CONDUCTED EMISSIONS	14
APPLICABLE STANDARD	14
EUT SETUP	14
EMI TEST RECEIVER SETUP.....	14
TEST PROCEDURE	15
CORRECTED AMPLITUDE & MARGIN CALCULATION	15
TEST EQUIPMENT LIST AND DETAILS.....	15
TEST DATA	16
FCC §15.209, §15.205 & §15.247(d) - SPURIOUS EMISSIONS.....	20
APPLICABLE STANDARD	20
EUT SETUP	20
EMI TEST RECEIVER & SPECTRUM ANALYZER SETUP	21
TEST PROCEDURE	21
CORRECTED AMPLITUDE & MARGIN CALCULATION	21
TEST EQUIPMENT LIST AND DETAILS.....	22
TEST DATA	22
FCC §15.247(a) (2)–6 dB EMISSION BANDWIDTH.....	35
APPLICABLE STANDARD	35
TEST PROCEDURE	35
TEST EQUIPMENT LIST AND DETAILS.....	35
TEST DATA	35
FCC §15.247(b) (3) - MAXIMUM PEAK CONDUCTED OUTPUT POWER.....	43
APPLICABLE STANDARD	43
TEST PROCEDURE	43

TEST EQUIPMENT LIST AND DETAILS.....	43
TEST DATA	43
FCC §15.247(d)– 100 kHz BANDWIDTH OF FREQUENCY BAND EDGE.....	45
APPLICABLE STANDARD	45
TEST PROCEDURE	45
TEST EQUIPMENT LIST AND DETAILS.....	45
TEST DATA	46
FCC §15.247(e) - POWER SPECTRAL DENSITY	55
APPLICABLE STANDARD	55
TEST PROCEDURE	55
TEST EQUIPMENT LIST AND DETAILS.....	55
TEST DATA	55

FINAL

GENERAL INFORMATION

Product Description for Equipment under Test (EUT)

EUT Name:	Biological Microscope
EUT Model:	Panthera D
Multiple Models:	Panthera I, Panthera DL, Panthera i fixed-kohler
Operation Frequency:	2412-2462 MHz(802.11b/g/n20) 2422-2452MHz(802.11 n40)
Maximum Peak Output Power (Conducted):	21.03 dBm
Modulation Type:	DSSS, OFDM
External Dimension:	400mm(L)*210mm(W)*394mm(H)
Rated Input Voltage:	AC 100-240V, 50-60Hz
Serial Number:	181227054
EUT Received Date:	2019-1-2

Note:

The series products models Panthera I, Panthera DL, Panthera i fixed-kohler are electrically identical with Panthera D, we selected Panthera D for fully testing, the details of the difference between them were explained in the attached declaration letter.

Objective

This report is prepared on behalf of *Motic China Group Co., Ltd* in accordance with Part 2, Subpart J, Part 15, Subparts A and C of the Federal Communications Commission's rules.

The tests were performed in order to determine the compliance of the EUT with FCC Rules Part 15-Subpart C, section 15.203, 15.205, 15.207, 15.209 and 15.247 rules.

Related Submittal(s)/Grant(s)

N/A

Test Methodology

All measurements contained in this report were conducted with ANSI C63.10-2013, American National Standard of Procedures for Compliance Testing of Unlicensed Wireless Devices. And 558074 D01 15.247 Meas Guidance v05r02.

All emissions measurement was performed and Bay Area Compliance Laboratories Corp. (Dongguan).

Measurement Uncertainty

Parameter	Measurement Uncertainty
Occupied Channel Bandwidth	±5 %
RF output power, conducted	±0.61dB
Power Spectral Density, conducted	±0.61 dB
Unwanted Emissions, radiated	30M~200MHz: 4.55 dB,200M~1GHz: 5.92 dB,1G~6GHz: 4.98 dB, 6G~18GHz: 5.89 dB,18G~26.5G:5.47 dB,26.5G~40G:5.63 dB
Unwanted Emissions, conducted	±1.5 dB
Temperature	±1 °C
Humidity	±5%
DC and low frequency voltages	±0.4%
Duty Cycle	1%
AC Power Lines Conducted Emission	3.12 dB (150 kHz to 30 MHz)

Test Facility

The Test site used by Bay Area Compliance Laboratories Corp. (Dongguan) to collect test data is located on the No.69 Pulongcun, Puxinhu Industry Area, Tangxia, Dongguan, Guangdong, China.

The lab has been recognized as the FCC accredited lab under the KDB 974614 D01 and is listed in the FCC Public Access Link (PAL) database, FCC Registration No. : 897218, the FCC Designation No. : CN1220.

The lab has been recognized by Innovation, Science and Economic Development Canada to test to Canadian radio equipment requirements, the CAB identifier: CN0022.

SYSTEM TEST CONFIGURATION

Description of Test Configuration

The system was configured for testing in Engineering Mode, which was provided by the manufacturer.

For 2.4GHz band, total 11 channels are provided:

Channel	Frequency (MHz)	Channel	Frequency (MHz)
1	2412	7	2442
2	2417	8	2447
3	2422	9	2452
4	2427	10	2457
5	2432	11	2462
6	2437	/	/

For 802.11b, 802.11g, and 802.11n ht20 modes were test with channel 1,6,11.

For 802.11n ht40 modes were test with channel 3,6,9.

The worst-case data rates are determined to be as follows for each mode based upon investigations by measuring the average power and PSD across all data rates, bandwidths, and modulations. The device supports SISO in all modes, and MIMO in 802.11n modes, per pretest, MIMO 2TX mode was the worst mode and reported for 802.11n modes.

EUT Exercise Software


The software “REALTEK 11ac 8812A USB WLAN MP Diagnostic Program 0.0062.10.20151208” was used for testing, which was provided by manufacturer. The maximum power was configured as below table, that provided by the manufacturer:

Mode	Channel	Frequency (MHz)	Data rate (Mbps)		Power level	
			Chain 0	Chain 1	Chain 0	Chain 1
802.11b	Low	2412	1	1	36	39
	Middle	2437	1	1	35	39
	High	2462	1	1	36	39
802.11g	Low	2412	6	6	48	51
	Middle	2437	6	6	48	50
	High	2462	6	6	48	50
802.11n ht20	Low	2412	MCS8	MCS8	43	47
	Middle	2437	MCS8	MCS8	43	46
	High	2462	MCS8	MCS8	43	47
802.11n ht40	Low	2422	MCS8	MCS8	45	48
	Middle	2437	MCS8	MCS8	45	48
	High	2452	MCS8	MCS8	45	48


The maximum duty cycle as following table:

Test mode	T _{on} (ms)	T _{on+off} (ms)	Duty Cycle (%)
802.11b	100	100	100
802.11g	100	100	100
802.11n ht20	100	100	100
802.11n ht40	100	100	100


802.11b

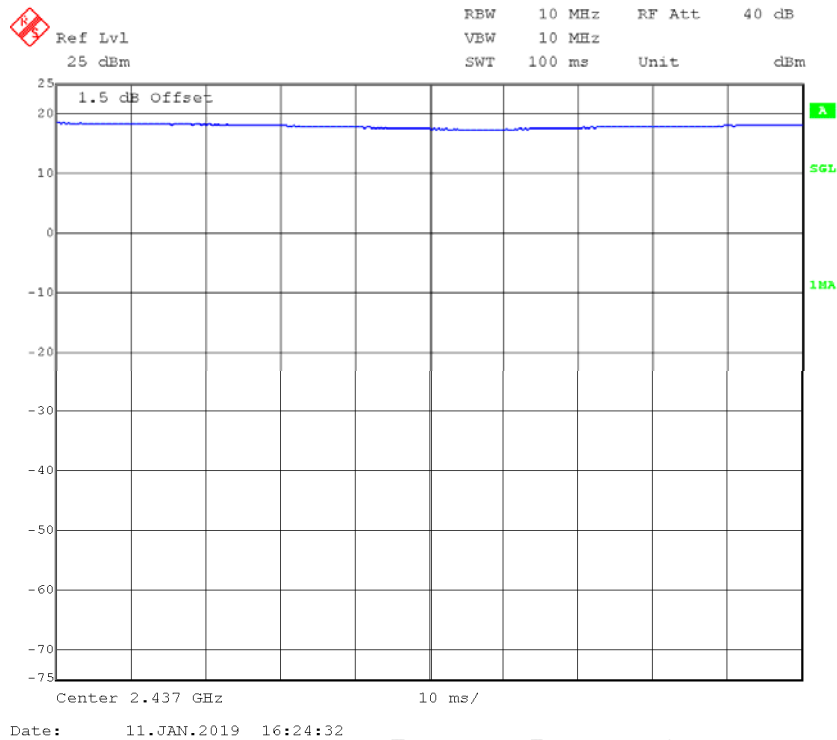

802.11g

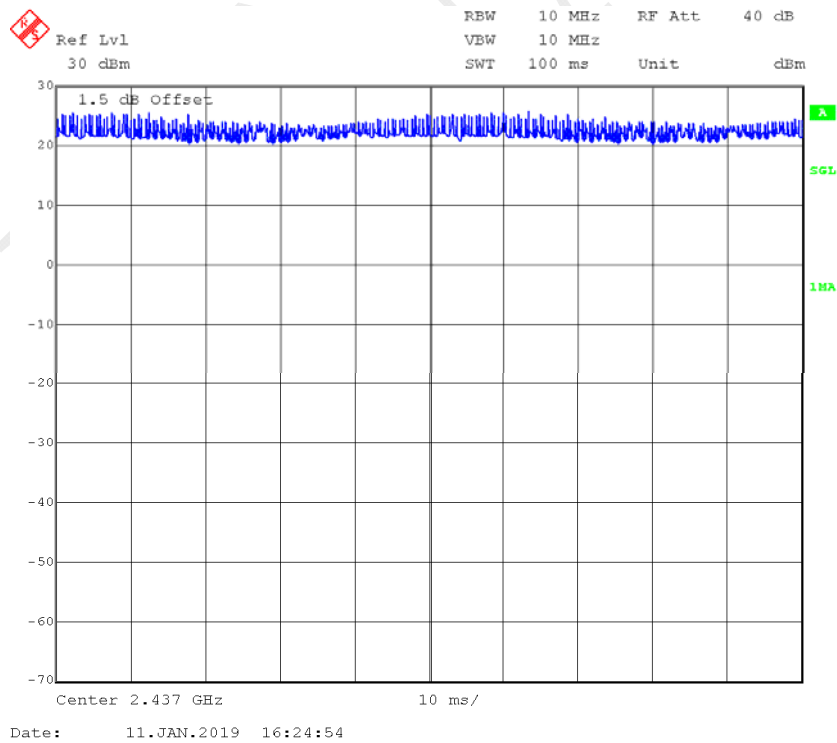


802.11n ht20

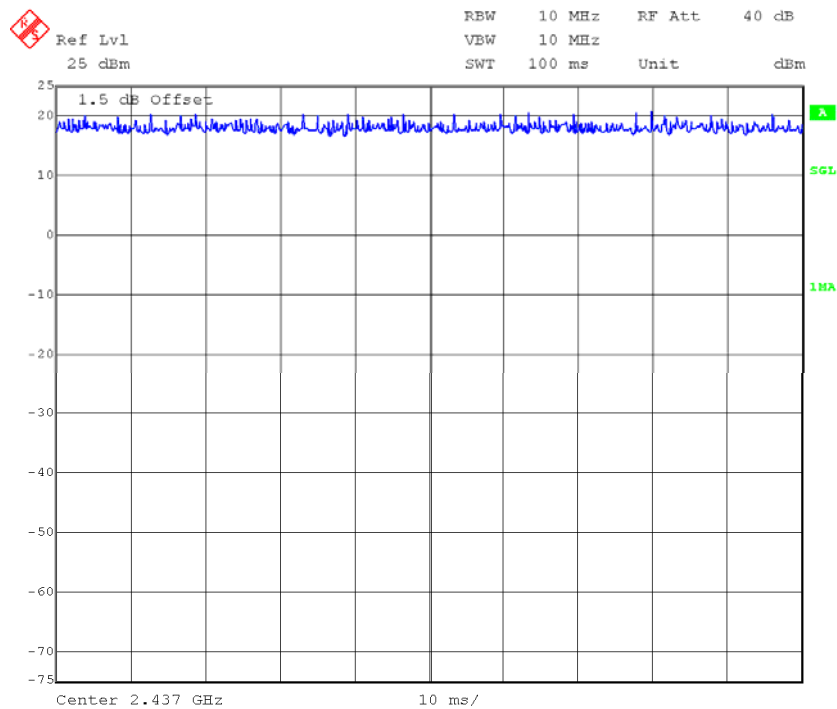

Date: 11.JAN.2019 16:23:54

802.11n ht40

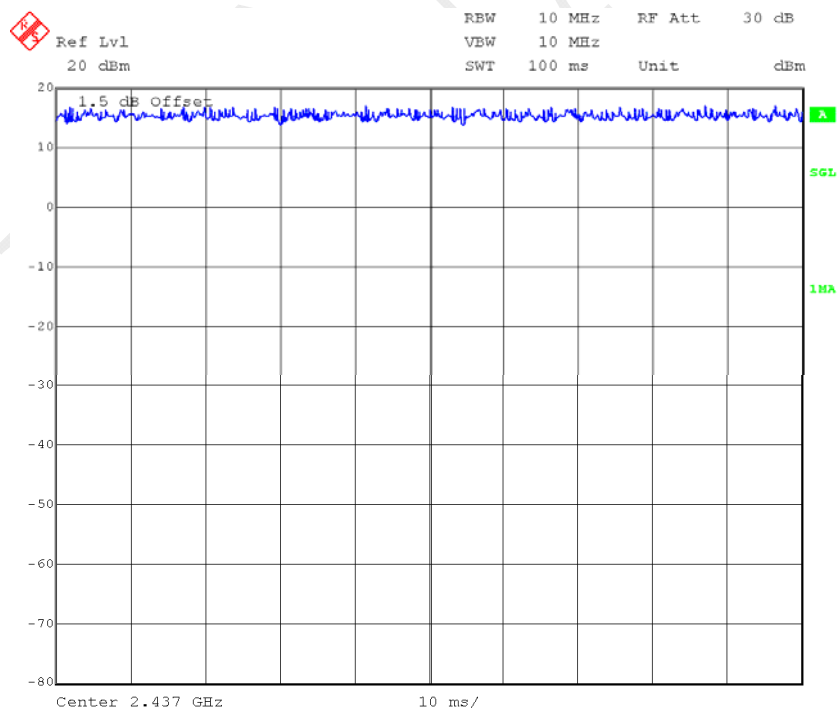

Date: 11.JAN.2019 16:23:00

Equipment Modifications

No modification was made to the EUT.


Local Support Equipment List and Details

Manufacturer	Description	Model	Serial Number
Dell	Notebook	E6410	N/A

Support Cable List and Details

Cable Description	Shielding Type	Ferrite Core	Length (m)	From	To
Power cable	No	Yes	2	LISN	EUT
RJ45	No	Yes	5	EUT	Notebook

Block Diagram of Test Setup

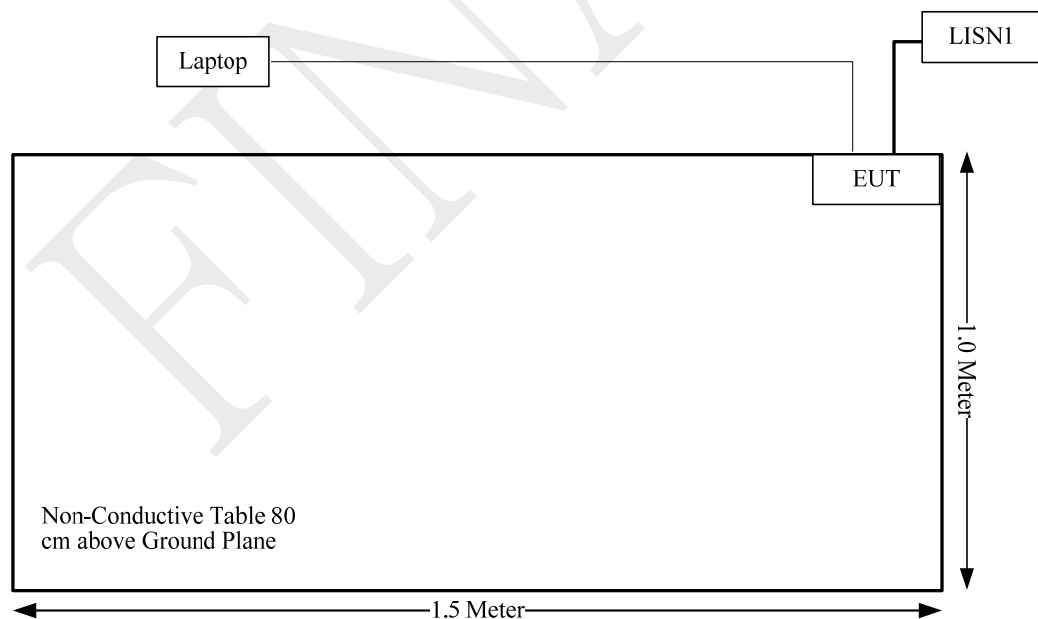

SUMMARY OF TEST RESULTS

FCC Rules	Description of Test	Result
FCC§15.247 (i) & §1.1310 & §2.1091	Maximum Permissible Exposure (MPE)	Compliance
§15.203	Antenna Requirement	Compliance
§15.207 (a)	AC Line Conducted Emissions	Compliance
§15.205, §15.209, §15.247(d)	Spurious Emissions	Compliance
§15.247 (a)(2)	6 dB Bandwidth	Compliance
§15.247(b)(3)	Maximum Conducted Output Power	Compliance
§15.247(d)	100 kHz Bandwidth of Frequency Band Edge	Compliance
§15.247(e)	Power Spectral Density	Compliance

FCC §15.247 (i) & §1.1310 & §2.1091- MAXIMUM PERMISSIBLE EXPOSURE (MPE)

Applicable Standard

According to §15.247(i) and §1.1310, systems operating under the provisions of this section shall be operated in a manner that ensures that the public is not exposed to radio frequency energy level in excess of the Commission's guidelines.

Limits for Maximum Permissible Exposure (MPE) (§1.1310, §2.1091)

(B) Limits for General Population/Uncontrolled Exposure				
Frequency Range (MHz)	Electric Field Strength (V/m)	Magnetic Field Strength (A/m)	Power Density (mW/cm ²)	Averaging Time (minutes)
0.3–1.34	614	1.63	*(100)	30
1.34–30	824/f	2.19/f	*(180/f ²)	30
30–300	27.5	0.073	0.2	30
300–1500	/	/	f/1500	30
1500–100,000	/	/	1.0	30

f = frequency in MHz; * = Plane-wave equivalent power density;

According to §1.1310 and §2.1091 RF exposure is calculated.

Calculated Formulary:

Predication of MPE limit at a given distance

$S = PG/4\pi R^2$ = power density (in appropriate units, e.g. mW/cm²);

P = power input to the antenna (in appropriate units, e.g., mW);

G = power gain of the antenna in the direction of interest relative to an isotropic radiator, the power gain factor, is normally numeric gain;

R = distance to the center of radiation of the antenna (appropriate units, e.g., cm);

Calculated Data:

Frequency Range (MHz)	Antenna Gain		Max. Target Power including Tolerance		Evaluation Distance (cm)	Power Density (mW/m ²)	MPE Limit (mW/m ²)
	(dBi)	(numeric)	(dBm)	(mW)			
2412-2462	3	2.00	22	158.49	20	0.063	1.0

Note: the Max. Target Power including Tolerance was declared by manufacturer.

Result: Compliance, The device meets MPE requirement for Devices Used by the General Public (Uncontrolled Environment) at distance ≥ 20 cm.

FCC §15.203 - ANTENNA REQUIREMENT

Applicable Standard

According to § 15.203, an intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the provisions of this section. The manufacturer may design the unit so that a broken antenna can be replaced by the user, but the user of a standard antenna jack or electrical connector is prohibited. The structure and application of the EUT were analyzed to determine compliance with section §15.203 of the rules. §15.203 state that the subject device must meet the following criteria:

- a. Antenna must be permanently attached to the unit.
- b. Antenna must use a unique type of connector to attach to the EUT.
- c. Unit must be professionally installed, and installer shall be responsible for verifying that the correct antenna is employed with the unit.

Antenna Connector Construction

The EUT has two internal antennas arrangement for WLAN, which use a unique type of connector to attach to the EUT. fulfill the requirement of this section. Please refer to the EUT photos.

Antenna Type	input impedance (Ohm)	Antenna Gain /Frequency Range
PIFA	50	3.0 dBi

Result: Compliance.

FCC §15.207 (a) – AC LINE CONDUCTED EMISSIONS

Applicable Standard

FCC§15.207(a).

EUT Setup



Note: 1. Support units were connected to second LISN.
2. Both of LISNs (AMN) 80 cm from EUT and at the least 30 cm from other units and other metal planes support units.

The setup of EUT is according with per ANSI C63.10-2013 measurement procedure. The specification used was with the FCC Part 15.207 limits.

The spacing between the peripherals was 10 cm.

The adapter was connected to the main lisn with a 120 V/60 Hz AC power source.

EMI Test Receiver Setup

The EMI test receiver was set to investigate the spectrum from 150 kHz to 30 MHz.

During the conducted emission test, the EMI test receiver was set with the following configurations:

Frequency Range	IF B/W
150 kHz – 30 MHz	9 kHz

Test Procedure

During the conducted emission test, the adapter was connected to the first LISN.

Maximizing procedure was performed on the six (6) highest emissions of the EUT.

All data was recorded in the Quasi-peak and average detection mode.

Corrected Amplitude & Margin Calculation

The basic equation is as follows:

$$V_C = V_R + A_C + VDF$$

$$C_f = A_C + VDF$$

Herein,

V_C (cord. Reading): corrected voltage amplitude

V_R : reading voltage amplitude

A_C : attenuation caused by cable loss

VDF : voltage division factor of AMN

C_f : Correction Factor

The “**Margin**” column of the following data tables indicates the degree of compliance within the applicable limit. For example, a margin of 7dB means the emission is 7dB below the limit. The equation for margin calculation is as follows:

$$\text{Margin} = \text{Limit} - \text{Corrected Amplitude}$$

Test Equipment List and Details

Manufacturer	Description	Model	Serial Number	Calibration Date	Calibration Due Date
R&S	EMI Test Receiver	ESCS 30	830245/006	2018-12-10	2019-12-10
Unknown	Coaxial Cable	C-NJNJ-50	C-0200-01	2018-09-05	2019-09-05
R&S	Test Software	EMC32	Version8.53.0	N/A	N/A
R&S	Two-line V-network	ENV 216	101614	2018-12-10	2019-12-10

* **Statement of Traceability:** Bay Area Compliance Laboratories Corp. (Dongguan) attests that all calibrations have been performed, traceable to National Primary Standards and International System of Units (SI).

Test Data**Environmental Conditions**


Temperature:	25.9 °C
Relative Humidity:	54 %
ATM Pressure:	101.4kPa

The testing was performed by Lily Xie on 2019-01-12

Test Mode: Transmitting (Chain 0 802.11b low channel was the worst case)


Model Number: Panthera D

AC120 V, 60 Hz, Line:

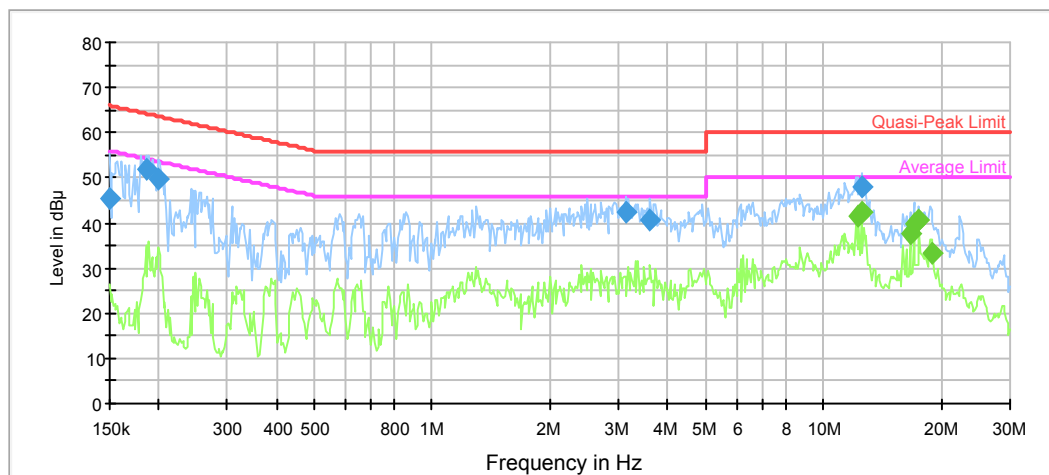

Frequency (MHz)	QuasiPeak (dBμV)	Bandwidth (kHz)	Line	Corr. (dB)	Margin (dB)	Limit (dBμV)
0.150000	45.6	9.000	L1	11.2	20.4	66.0
0.186006	51.8	9.000	L1	10.7	12.4	64.2
0.199835	49.8	9.000	L1	10.6	13.8	63.6
3.122873	42.2	9.000	L1	9.8	13.8	56.0
3.604490	40.8	9.000	L1	9.8	15.2	56.0
12.493579	48.0	9.000	L1	9.9	12.0	60.0

Frequency (MHz)	Average (dBμV)	Bandwidth (kHz)	Line	Corr. (dB)	Margin (dB)	Limit (dBμV)
12.296055	41.4	9.000	L1	9.9	8.6	50.0
12.493579	42.4	9.000	L1	9.9	7.6	50.0
16.644319	37.6	9.000	L1	10.0	12.4	50.0
17.046987	39.9	9.000	L1	10.0	10.1	50.0
17.599071	40.7	9.000	L1	10.0	9.3	50.0
18.907519	33.3	9.000	L1	10.0	16.7	50.0

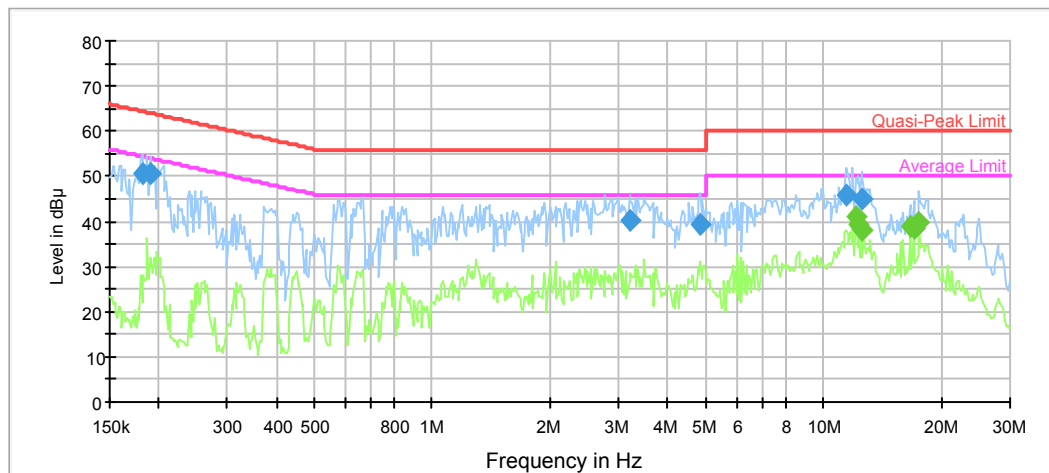
AC120 V, 60 Hz, Neutral:

Frequency (MHz)	QuasiPeak (dBμV)	Bandwidth (kHz)	Line	Corr. (dB)	Margin (dB)	Limit (dBμV)
0.181612	50.4	9.000	N	10.8	14.0	64.4
0.190505	50.7	9.000	N	10.7	13.3	64.0
3.198423	40.4	9.000	N	9.8	15.6	56.0
4.840426	39.5	9.000	N	9.8	16.5	56.0
11.445138	45.8	9.000	N	9.8	14.2	60.0
12.493579	45.1	9.000	N	9.9	14.9	60.0

Frequency (MHz)	Average (dBμV)	Bandwidth (kHz)	Line	Corr. (dB)	Margin (dB)	Limit (dBμV)
12.101654	41.1	9.000	N	9.9	8.9	50.0
12.296055	39.6	9.000	N	9.9	10.4	50.0
12.493579	38.1	9.000	N	9.9	11.9	50.0
16.644319	39.1	9.000	N	9.9	10.9	50.0
17.046987	38.3	9.000	N	10.0	11.7	50.0
17.599071	39.7	9.000	N	10.0	10.3	50.0


Model Number: Panthera DL

AC120 V, 60 Hz, Line:

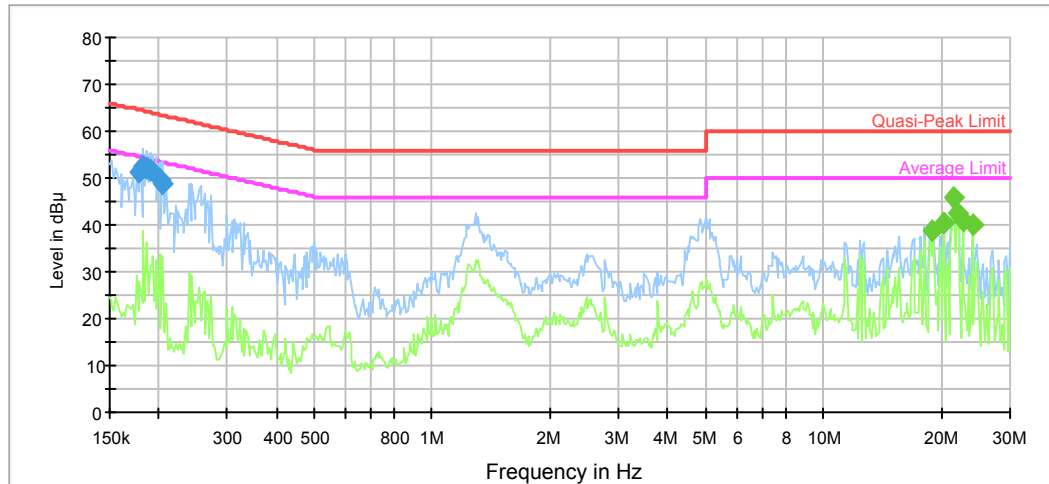

Frequency (MHz)	QuasiPeak (dBμV)	Bandwidth (kHz)	Line	Corr. (dB)	Margin (dB)	Limit (dBμV)
0.178741	51.4	9.000	L1	10.8	13.1	64.5
0.183065	52.5	9.000	L1	10.8	11.8	64.3
0.187494	52.0	9.000	L1	10.7	12.1	64.1
0.190505	51.5	9.000	L1	10.7	12.5	64.0
0.201433	49.6	9.000	L1	10.6	14.0	63.6
0.204669	48.6	9.000	L1	10.6	14.8	63.4

Frequency (MHz)	Average (dBμV)	Bandwidth (kHz)	Line	Corr. (dB)	Margin (dB)	Limit (dBμV)
19.058779	38.8	9.000	L1	10.1	11.2	50.0
20.313246	40.3	9.000	L1	10.1	9.7	50.0
21.478456	45.8	9.000	L1	10.1	4.2	50.0
21.998074	42.7	9.000	L1	10.1	7.3	50.0
22.710504	40.7	9.000	L1	10.1	9.3	50.0
24.013226	39.9	9.000	L1	10.1	10.1	50.0


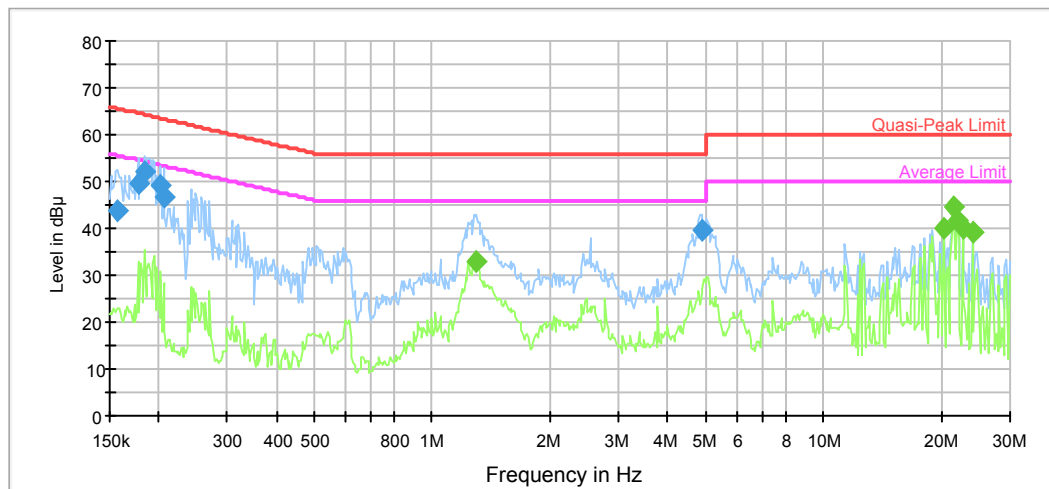
AC120 V, 60 Hz, Neutral:

Frequency (MHz)	QuasiPeak (dB μ V)	Bandwidth (kHz)	Line	Corr. (dB)	Margin (dB)	Limit (dB μ V)
0.157346	43.8	9.000	N	11.1	21.8	65.6
0.177322	49.5	9.000	N	10.8	15.1	64.6
0.184529	52.1	9.000	N	10.7	12.2	64.3
0.203045	49.1	9.000	N	10.6	14.4	63.5
0.206306	46.8	9.000	N	10.6	16.6	63.4
4.879149	39.5	9.000	N	9.8	16.5	56.0

Frequency (MHz)	Average (dB μ V)	Bandwidth (kHz)	Line	Corr. (dB)	Margin (dB)	Limit (dB μ V)
1.289541	33.1	9.000	N	9.8	12.9	46.0
20.313246	39.8	9.000	N	10.0	10.2	50.0
21.478456	44.5	9.000	N	10.0	5.5	50.0
21.998074	41.7	9.000	N	10.0	8.3	50.0
22.710504	40.0	9.000	N	10.0	10.0	50.0
24.013226	39.2	9.000	N	10.1	10.8	50.0

FCC §15.209, §15.205 & §15.247(d) - SPURIOUS EMISSIONS**Applicable Standard**

FCC §15.247 (d); §15.209; §15.205;

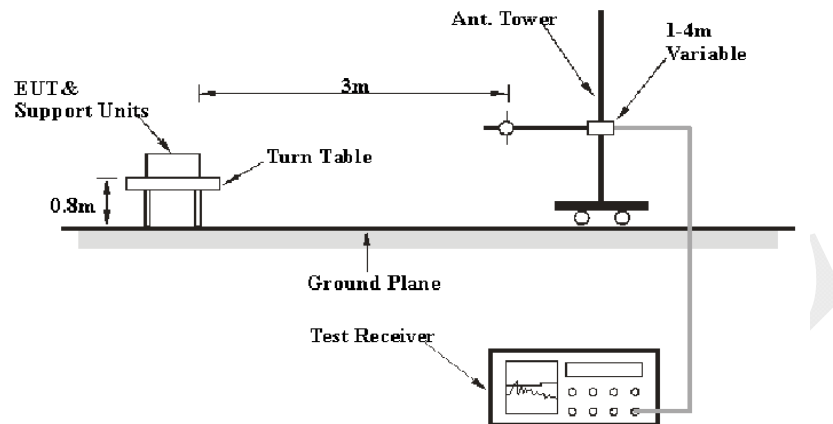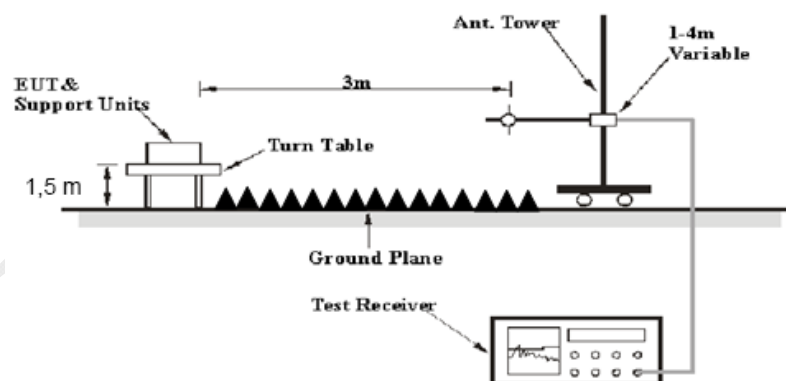EUT Setup**Below 1GHz:****Above 1GHz:**

The radiated emission Below 1GHz tests were performed in the 10 meters chamber, above 1GHz tests were performed in the 3 meters chamber A, using the setup accordance with the ANSI C63.10-2013. The specification used was the FCC 15.209, and FCC 15.247 limits.

The spacing between the peripherals was 10 cm.

EMI Test Receiver & Spectrum Analyzer Setup

The system was investigated from 30 MHz to 25 GHz.

During the radiated emission test, the EMI test receiver & Spectrum Analyzer Setup were set with the following configurations:

30MHz-1000MHz:

Measurement	RBW	Video B/W	IF B/W
QP	120 kHz	300 kHz	120kHz

1GHz- 25GHz:

Measurement	Duty cycle	RBW	Video B/W
PK	Any	1MHz	3 MHz
AV	>98%	1MHz	10 Hz
	<98%	1MHz	1/T

Note: T is minimum transmission duration

If the maximized peak measured value complies with under the QP/Average limit more than 6dB, then it is unnecessary to perform an QP/Average measurement.

Test Procedure

Maximizing procedure was performed on the highest emissions to ensure that the EUT complied with all installation combinations.

Data was recorded in Quasi-peak detection mode for frequency range of 30 MHz-1 GHz, peak and Average detection modes for frequencies above 1 GHz.

Corrected Amplitude & Margin Calculation

The Corrected Amplitude is calculated by adding the Antenna Factor and Cable Loss, and subtracting the Amplifier Gain from the Meter Reading. The basic equation is as follows:

$$\text{Corrected Amplitude} = \text{Meter Reading} + \text{Antenna Factor} + \text{Cable Loss} - \text{Amplifier Gain}$$

The “**Margin**” column of the following data tables indicates the degree of compliance with the applicable limit. For example, a margin of 7dB means the emission is 7dB below the limit. The equation for margin calculation is as follows:

$$\text{Margin} = \text{Limit} - \text{Corrected Amplitude}$$

Test Equipment List and Details

Manufacturer	Description	Model	Serial Number	Calibration Date	Calibration Due Date
R&S	EMI Test Receiver	ESCI	100035	2018-08-03	2019-08-03
Farad	Test Software	EZ-EMC	V1.1.4.2	N/A	N/A
Sunol Sciences	Antenna	JB3	A060611-3	2017-07-21	2019-07-21
Unknown	Coaxial Cable	C-NJNJ-50	C-1000-01	2018-09-05	2019-09-05
Unknown	Coaxial Cable	C-NJNJ-50	C-0400-02	2018-09-05	2019-09-05
Unknown	Coaxial Cable	C-NJNJ-50	C-0530-01	2018-09-24	2019-09-24
Sonoma	Amplifier	310N	185914	2018-10-13	2019-10-13
R&S	Spectrum Analyzer	FSP 38	100478	2018-12-10	2019-12-10
TDK RF	Horn Antenna	HRN-0118	130 084	2018-10-12	2021-10-12
Ducommun Technologies	Horn Antenna	ARH-4223-02	1007726-01 1304	2016-11-18	2019-11-18
MICRO-COAX	Coaxial Cable	UFA147-1-2362- 100100	64639 231029-001	2018-02-24	2019-02-24
Mini	Pre-amplifier	ZVA-183-S+	5969001149	2018-09-05	2019-09-05
Quinstar	Amplifier	QLW-18405536-JO	15964001001	2018-06-27	2019-06-27
E-Microwave	Band-stop Filters	OBSF-2400-2483.5-S	OE01601525	2018-06-16	2019-06-16
Micro-tronics	High Pass Filter	HPM50111	S/N-G217	2018-06-16	2019-06-16

* **Statement of Traceability:** Bay Area Compliance Laboratories Corp. (Dongguan) attests that all calibrations have been performed, traceable to National Primary Standards and International System of Units (SI).

Test Data**Environmental Conditions**

Temperature:	23-26.0 °C
Relative Humidity:	40-55%
ATM Pressure:	100.2-101.8kPa


* The testing was performed by Vern Shen on 2019-01-15&2019-01-17

Test Result: Compliance, please Refer to the following data


Test Mode: Transmitting

1) 30MHz-1GHz (802.11b_high channel Chain1 was the worst)

Model Number: Panthera D

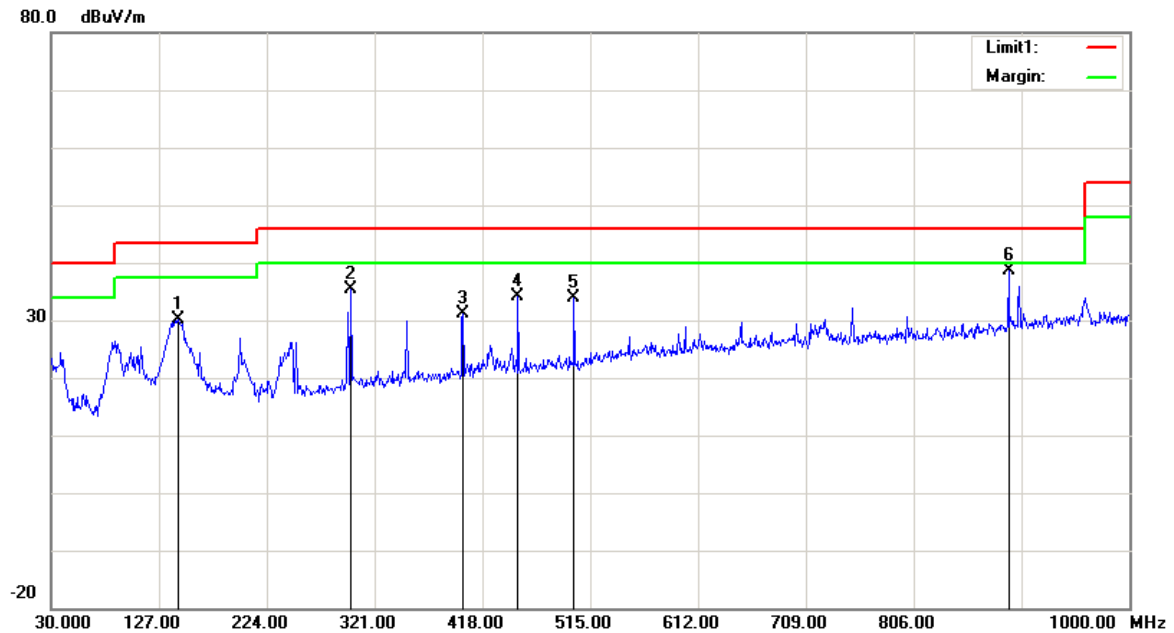
Horizontal:

Frequency (MHz)	Receiver Reading (dBuV)	Detector	Correction Factor (dB/m)	Cord. Amp. (dBuV/m)	Limit (dBuV/m)	Margin (dB)
144.4600	39.40	peak	-9.34	30.06	43.50	13.44
299.6600	42.79	peak	-7.48	35.31	46.00	10.69
400.5400	36.47	peak	-5.25	31.22	46.00	14.78
450.0100	38.36	peak	-4.35	34.01	46.00	11.99
500.4500	37.28	peak	-3.45	33.83	46.00	12.17
891.3600	34.86	peak	3.69	38.55	46.00	7.45

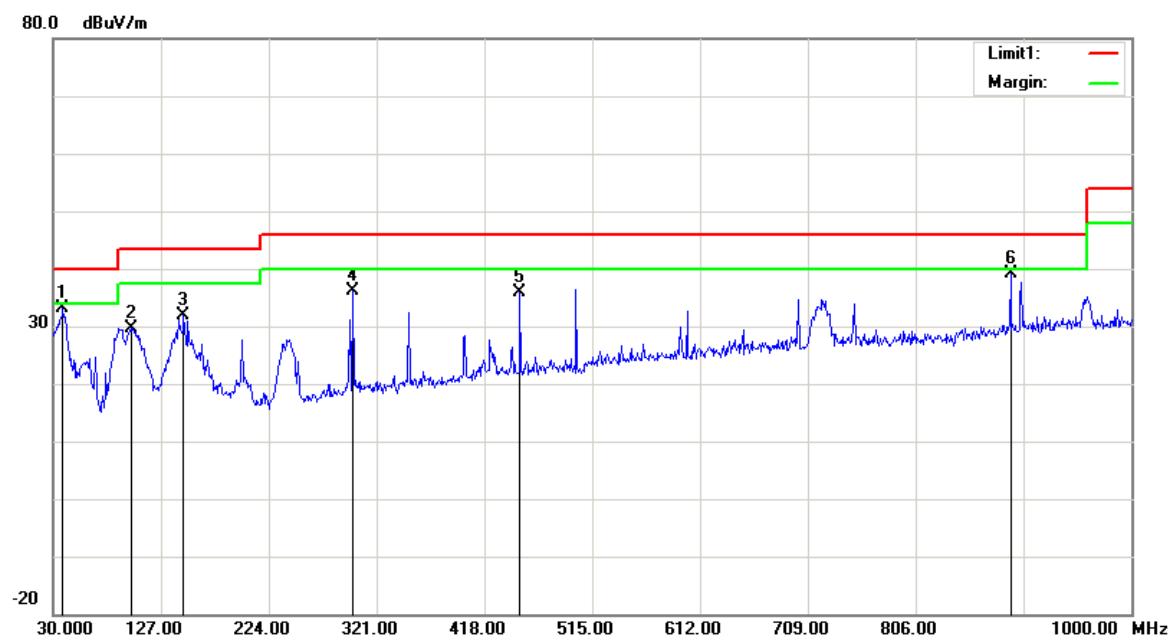
Vertical:

Frequency (MHz)	Receiver Reading (dBuV)	Detector	Correction Factor (dB/m)	Cord. Amp. (dBuV/m)	Limit (dBuV/m)	Margin (dB)
38.7300	41.87	peak	-8.78	33.09	40.00	6.91
99.8400	43.85	peak	-14.16	29.69	43.50	13.81
147.3700	41.38	peak	-9.47	31.91	43.50	11.59
299.6600	43.60	peak	-7.48	36.12	46.00	9.88
450.0100	40.18	peak	-4.35	35.83	46.00	10.17
891.3600	35.51	peak	3.69	39.20	46.00	6.80

Model Number: Panthera DL

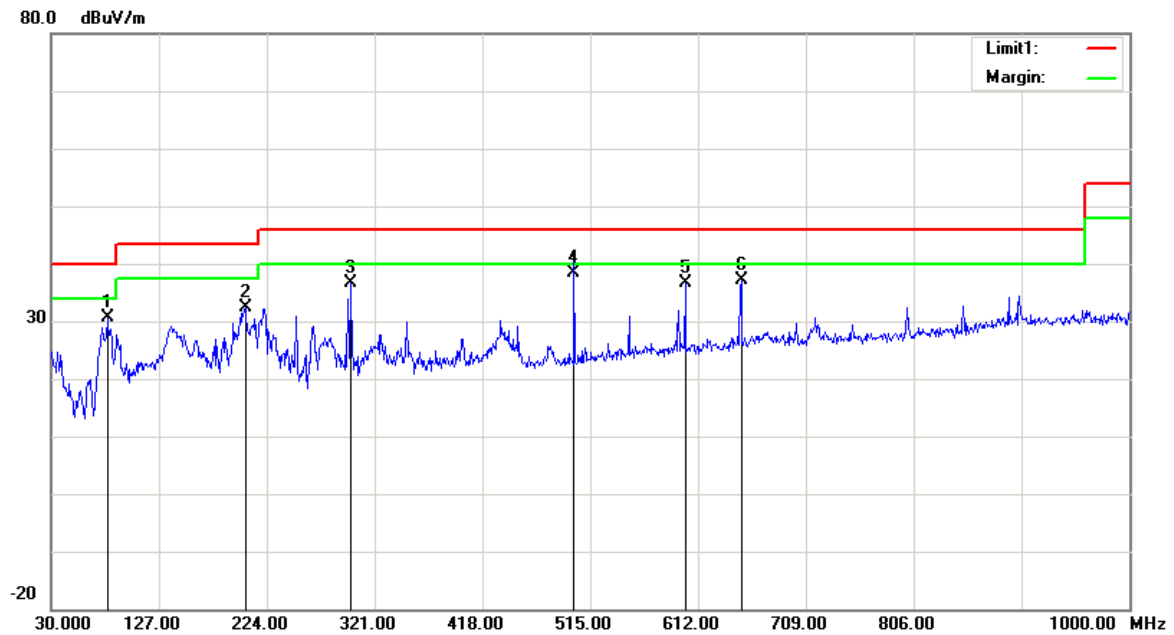Horizontal:

Frequency (MHz)	Receiver Reading (dBuV)	Detector	Correction Factor (dB/m)	Cord. Amp. (dBuV/m)	Limit (dBuV/m)	Margin (dB)
80.4400	46.59	peak	-15.99	30.60	40.00	9.40
204.6000	42.72	peak	-10.25	32.47	43.50	11.03
299.6600	44.13	peak	-7.48	36.65	46.00	9.35
500.4500	41.75	QP	-3.45	38.30	46.00	7.70
600.3600	38.00	peak	-1.34	36.66	46.00	9.34
650.8000	37.54	peak	-0.32	37.22	46.00	8.78

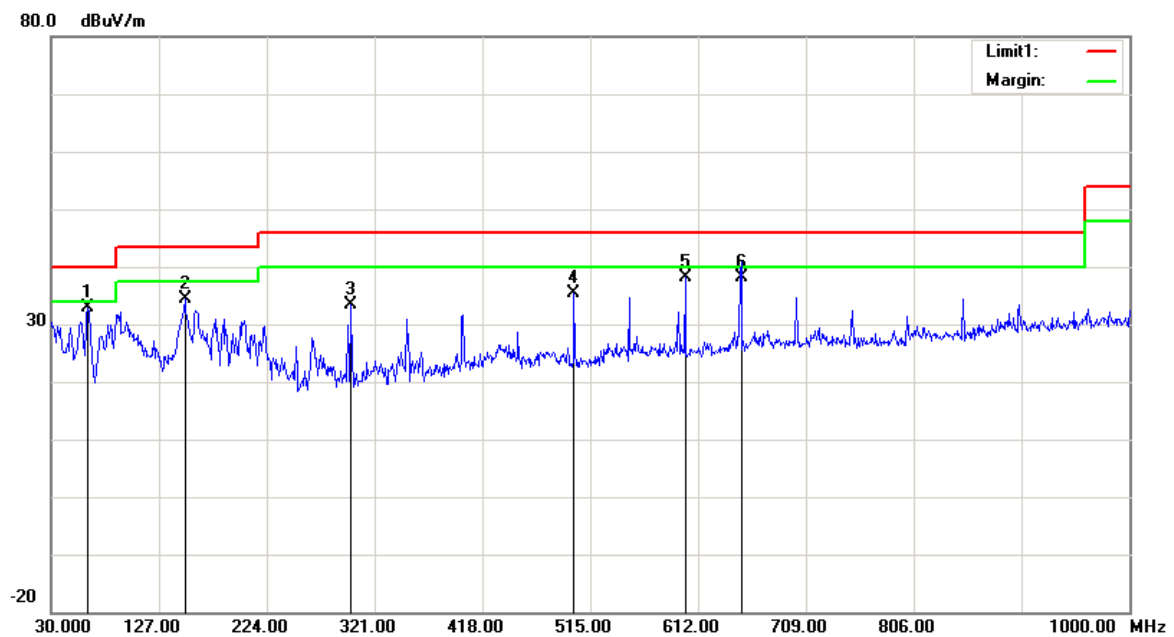Vertical:

Frequency (MHz)	Receiver Reading (dBuV)	Detector	Correction Factor (dB/m)	Cord. Amp. (dBuV/m)	Limit (dBuV/m)	Margin (dB)
62.9800	49.48	peak	-16.56	32.92	40.00	7.08
150.2800	44.01	peak	-9.60	34.41	43.50	9.09
299.6600	40.93	peak	-7.48	33.45	46.00	12.55
500.4500	38.87	peak	-3.45	35.42	46.00	10.58
600.3600	39.35	peak	-1.34	38.01	46.00	7.99
650.8000	38.52	QP	-0.32	38.20	46.00	7.80

2) 1-25GHz (Pre-scan Panthera DL and Panthera D, Panthera D was the worst case):
802.11b Mode:

Chain 0

Frequency (MHz)	Receiver		Rx Antenna		Cable loss (dB)	Amplifier Gain (dB)	Corrected Amplitude (dBμV/m)	Limit (dBμV/m)	Margin (dB)
	Reading (dBμV)	Detector	Polar (H/V)	Factor (dB/m)					
Low Channel: 2412 MHz									
2412.00	74.87	PK	H	24.84	3.35	0.00	103.06	N/A	N/A
2412.00	70.52	AV	H	24.84	3.35	0.00	98.71	N/A	N/A
2412.00	72.17	PK	V	24.84	3.35	0.00	100.36	N/A	N/A
2412.00	67.53	AV	V	24.84	3.35	0.00	95.72	N/A	N/A
2390.00	28.69	PK	H	24.80	3.33	0.00	56.82	74.00	17.18
2390.00	17.12	AV	H	24.80	3.33	0.00	45.25	54.00	8.75
4824.00	35.44	PK	H	29.75	4.58	27.41	42.36	74.00	31.64
4824.00	22.71	AV	H	29.75	4.58	27.41	29.63	54.00	24.37
7236.00	37.08	PK	H	33.98	5.62	27.22	49.46	74.00	24.54
7236.00	23.00	AV	H	33.98	5.62	27.22	35.38	54.00	18.62
Middle Channel: 2437 MHz									
2437.00	74.08	PK	H	24.89	3.36	0.00	102.33	N/A	N/A
2437.00	69.67	AV	H	24.89	3.36	0.00	97.92	N/A	N/A
2437.00	71.98	PK	V	24.89	3.36	0.00	100.23	N/A	N/A
2437.00	67.21	AV	V	24.89	3.36	0.00	95.46	N/A	N/A
4874.00	35.60	PK	H	29.85	4.57	27.54	42.48	74.00	31.52
4874.00	22.80	AV	H	29.85	4.57	27.54	29.68	54.00	24.32
7311.00	36.59	PK	H	34.10	5.68	27.28	49.09	74.00	24.91
7311.00	22.40	AV	H	34.10	5.68	27.28	34.90	54.00	19.10
High Channel: 2462 MHz									
2462.00	74.93	PK	H	24.93	3.37	0.00	103.23	N/A	N/A
2462.00	70.73	AV	H	24.93	3.37	0.00	99.03	N/A	N/A
2462.00	72.27	PK	V	24.93	3.37	0.00	100.57	N/A	N/A
2462.00	67.93	AV	V	24.93	3.37	0.00	96.23	N/A	N/A
2483.50	29.42	PK	H	24.97	3.38	0.00	57.77	74.00	16.23
2483.50	19.12	AV	H	24.97	3.38	0.00	47.47	54.00	6.53
4924.00	34.89	PK	H	29.95	4.57	27.51	41.90	74.00	32.10
4924.00	22.32	AV	H	29.95	4.57	27.51	29.33	54.00	24.67
7386.00	37.07	PK	H	34.22	5.74	27.18	49.85	74.00	24.15
7386.00	23.20	AV	H	34.22	5.74	27.18	35.98	54.00	18.02

Chain 1

Frequency (MHz)	Receiver		Rx Antenna		Cable loss (dB)	Amplifier Gain (dB)	Corrected Amplitude (dBμV/m)	Limit (dBμV/m)	Margin (dB)
	Reading (dBμV)	Detector	Polar (H/V)	Factor (dB/m)					
Low Channel: 2412 MHz									
2412.00	73.19	PK	H	24.84	3.35	0.00	101.38	N/A	N/A
2412.00	68.82	AV	H	24.84	3.35	0.00	97.01	N/A	N/A
2412.00	71.85	PK	V	24.84	3.35	0.00	100.04	N/A	N/A
2412.00	67.54	AV	V	24.84	3.35	0.00	95.73	N/A	N/A
2390.00	29.40	PK	H	24.80	3.33	0.00	57.53	74.00	16.47
2390.00	17.23	AV	H	24.80	3.33	0.00	45.36	54.00	8.64
4824.00	39.28	PK	H	29.75	4.58	27.41	46.20	74.00	27.80
4824.00	35.97	AV	H	29.75	4.58	27.41	42.89	54.00	11.11
7236.00	36.32	PK	H	33.98	5.62	27.22	48.70	74.00	25.30
7236.00	22.90	AV	H	33.98	5.62	27.22	35.28	54.00	18.72
Middle Channel: 2437 MHz									
2437.00	73.57	PK	H	24.89	3.36	0.00	101.82	N/A	N/A
2437.00	69.31	AV	H	24.89	3.36	0.00	97.56	N/A	N/A
2437.00	71.99	PK	V	24.89	3.36	0.00	100.24	N/A	N/A
2437.00	67.40	AV	V	24.89	3.36	0.00	95.65	N/A	N/A
4874.00	40.64	PK	H	29.85	4.57	27.54	47.52	74.00	26.48
4874.00	36.53	AV	H	29.85	4.57	27.54	43.41	54.00	10.59
7311.00	36.89	PK	H	34.10	5.68	27.28	49.39	74.00	24.61
7311.00	23.01	AV	H	34.10	5.68	27.28	35.51	54.00	18.49
High Channel: 2462 MHz									
2462.00	73.52	PK	H	24.93	3.37	0.00	101.82	N/A	N/A
2462.00	69.27	AV	H	24.93	3.37	0.00	97.57	N/A	N/A
2462.00	71.93	PK	V	24.93	3.37	0.00	100.23	N/A	N/A
2462.00	67.33	AV	V	24.93	3.37	0.00	95.63	N/A	N/A
2483.50	29.11	PK	H	24.97	3.38	0.00	57.46	74.00	16.54
2483.50	17.69	AV	H	24.97	3.38	0.00	46.04	54.00	7.96
4924.00	41.71	PK	H	29.95	4.57	27.51	48.72	74.00	25.28
4924.00	37.63	AV	H	29.95	4.57	27.51	44.64	54.00	9.36
7386.00	37.18	PK	H	34.22	5.74	27.18	49.96	74.00	24.04
7386.00	23.30	AV	H	34.22	5.74	27.18	36.08	54.00	17.92

802.11g Mode:**Chain 0**

Frequency (MHz)	Receiver		Rx Antenna		Cable loss (dB)	Amplifier Gain (dB)	Corrected Amplitude (dBμV/m)	Limit (dBμV/m)	Margin (dB)
	Reading (dBμV)	Detector	Polar (H/V)	Factor (dB/m)					
Low Channel: 2412 MHz									
2412.00	76.04	PK	H	24.84	3.35	0.00	104.23	N/A	N/A
2412.00	66.84	AV	H	24.84	3.35	0.00	95.03	N/A	N/A
2412.00	74.19	PK	V	24.84	3.35	0.00	102.38	N/A	N/A
2412.00	64.73	AV	V	24.84	3.35	0.00	92.92	N/A	N/A
2390.00	35.92	PK	H	24.80	3.33	0.00	64.05	74.00	9.95
2390.00	18.20	AV	H	24.80	3.33	0.00	46.33	54.00	7.67
4824.00	37.50	PK	H	29.75	4.58	27.41	44.42	74.00	29.58
4824.00	23.50	AV	H	29.75	4.58	27.41	30.42	54.00	23.58
7236.00	36.67	PK	H	33.98	5.62	27.22	49.05	74.00	24.95
7236.00	23.54	AV	H	33.98	5.62	27.22	35.92	54.00	18.08
Middle Channel: 2437 MHz									
2437.00	77.13	PK	H	24.89	3.36	0.00	105.38	N/A	N/A
2437.00	67.69	AV	H	24.89	3.36	0.00	95.94	N/A	N/A
2437.00	75.01	PK	V	24.89	3.36	0.00	103.26	N/A	N/A
2437.00	65.05	AV	V	24.89	3.36	0.00	93.30	N/A	N/A
4874.00	37.20	PK	H	29.85	4.57	27.54	44.08	74.00	29.92
4874.00	23.37	AV	H	29.85	4.57	27.54	30.25	54.00	23.75
7311.00	36.59	PK	H	34.10	5.68	27.28	49.09	74.00	24.91
7311.00	23.18	AV	H	34.10	5.68	27.28	35.68	54.00	18.32
High Channel: 2462 MHz									
2462.00	77.08	PK	H	24.93	3.37	0.00	105.38	N/A	N/A
2462.00	68.16	AV	H	24.93	3.37	0.00	96.46	N/A	N/A
2462.00	75.23	PK	V	24.93	3.37	0.00	103.53	N/A	N/A
2462.00	65.25	AV	V	24.93	3.37	0.00	93.55	N/A	N/A
2483.50	39.82	PK	H	24.97	3.38	0.00	68.17	74.00	5.83
2483.50	22.38	AV	H	24.97	3.38	0.00	50.73	54.00	3.27
4924.00	37.54	PK	H	29.95	4.57	27.51	44.55	74.00	29.45
4924.00	23.57	AV	H	29.95	4.57	27.51	30.58	54.00	23.42
7386.00	36.70	PK	H	34.22	5.74	27.18	49.48	74.00	24.52
7386.00	23.34	AV	H	34.22	5.74	27.18	36.12	54.00	17.88

Chain 1

Frequency (MHz)	Receiver		Rx Antenna		Cable loss (dB)	Amplifier Gain (dB)	Corrected Amplitude (dBμV/m)	Limit (dBμV/m)	Margin (dB)
	Reading (dBμV)	Detector	Polar (H/V)	Factor (dB/m)					
Low Channel: 2412 MHz									
2412.00	74.88	PK	H	24.84	3.35	0.00	103.07	N/A	N/A
2412.00	65.37	AV	H	24.84	3.35	0.00	93.56	N/A	N/A
2412.00	73.35	PK	V	24.84	3.35	0.00	101.54	N/A	N/A
2412.00	63.24	AV	V	24.84	3.35	0.00	91.43	N/A	N/A
2390.00	35.50	PK	H	24.80	3.33	0.00	63.63	74.00	10.37
2390.00	19.35	AV	H	24.80	3.33	0.00	47.48	54.00	6.52
4824.00	38.84	PK	H	29.75	4.58	27.41	45.76	74.00	28.24
4824.00	25.36	AV	H	29.75	4.58	27.41	32.28	54.00	21.72
7236.00	37.32	PK	H	33.98	5.62	27.22	49.70	74.00	24.30
7236.00	23.57	AV	H	33.98	5.62	27.22	35.95	54.00	18.05
Middle Channel: 2437 MHz									
2437.00	74.43	PK	H	24.89	3.36	0.00	102.68	N/A	N/A
2437.00	65.29	AV	H	24.89	3.36	0.00	93.54	N/A	N/A
2437.00	73.20	PK	V	24.89	3.36	0.00	101.45	N/A	N/A
2437.00	63.10	AV	V	24.89	3.36	0.00	91.35	N/A	N/A
4874.00	39.97	PK	H	29.85	4.57	27.54	46.85	74.00	27.15
4874.00	26.76	AV	H	29.85	4.57	27.54	33.64	54.00	20.36
7311.00	36.28	PK	H	34.10	5.68	27.28	48.78	74.00	25.22
7311.00	23.10	AV	H	34.10	5.68	27.28	35.60	54.00	18.40
High Channel: 2462 MHz									
2462.00	74.63	PK	H	24.93	3.37	0.00	102.93	N/A	N/A
2462.00	64.98	AV	H	24.93	3.37	0.00	93.28	N/A	N/A
2462.00	73.44	PK	V	24.93	3.37	0.00	101.74	N/A	N/A
2462.00	63.37	AV	V	24.93	3.37	0.00	91.67	N/A	N/A
2483.50	33.97	PK	H	24.97	3.38	0.00	62.32	74.00	11.68
2483.50	19.99	AV	H	24.97	3.38	0.00	48.34	54.00	5.66
4924.00	40.78	PK	H	29.95	4.57	27.51	47.79	74.00	26.21
4924.00	27.18	AV	H	29.95	4.57	27.51	34.19	54.00	19.81
7386.00	37.21	PK	H	34.22	5.74	27.18	49.99	74.00	24.01
7386.00	24.20	AV	H	34.22	5.74	27.18	36.98	54.00	17.02

802.11n ht20 Mode:




Frequency (MHz)	Receiver		Rx Antenna		Cable loss (dB)	Amplifier Gain (dB)	Corrected Amplitude (dBμV/m)	Limit (dBμV/m)	Margin (dB)
	Reading (dBμV)	Detector	Polar (H/V)	Factor (dB/m)					
Low Channel: 2412 MHz									
2412.00	75.29	PK	H	24.84	3.35	0.00	103.48	N/A	N/A
2412.00	63.55	AV	H	24.84	3.35	0.00	91.74	N/A	N/A
2412.00	73.10	PK	V	24.84	3.35	0.00	101.29	N/A	N/A
2412.00	62.30	AV	V	24.84	3.35	0.00	90.49	N/A	N/A
2390.00	29.27	PK	H	24.80	3.33	0.00	57.40	74.00	16.60
2390.00	17.37	AV	H	24.80	3.33	0.00	45.50	54.00	8.50
4824.00	38.07	PK	H	29.75	4.58	27.41	44.99	74.00	29.01
4824.00	24.39	AV	H	29.75	4.58	27.41	31.31	54.00	22.69
7236.00	36.37	PK	H	33.98	5.62	27.22	48.75	74.00	25.25
7236.00	23.44	AV	H	33.98	5.62	27.22	35.82	54.00	18.18
Middle Channel: 2437 MHz									
2437.00	75.45	PK	H	24.89	3.36	0.00	103.70	N/A	N/A
2437.00	63.85	AV	H	24.89	3.36	0.00	92.10	N/A	N/A
2437.00	73.17	PK	V	24.89	3.36	0.00	101.42	N/A	N/A
2437.00	62.40	AV	V	24.89	3.36	0.00	90.65	N/A	N/A
4874.00	38.11	PK	H	29.85	4.57	27.54	44.99	74.00	29.01
4874.00	24.48	AV	H	29.85	4.57	27.54	31.36	54.00	22.64
7311.00	36.41	PK	H	34.10	5.68	27.28	48.91	74.00	25.09
7311.00	23.45	AV	H	34.10	5.68	27.28	35.95	54.00	18.05
High Channel: 2462 MHz									
2462.00	74.10	PK	H	24.93	3.37	0.00	102.40	N/A	N/A
2462.00	62.57	AV	H	24.93	3.37	0.00	90.87	N/A	N/A
2462.00	72.23	PK	V	24.93	3.37	0.00	100.53	N/A	N/A
2462.00	61.87	AV	V	24.93	3.37	0.00	90.17	N/A	N/A
2483.50	30.19	PK	H	24.97	3.38	0.00	58.54	74.00	15.46
2483.50	17.81	AV	H	24.97	3.38	0.00	46.16	54.00	7.84
4924.00	38.03	PK	H	29.95	4.57	27.51	45.04	74.00	28.96
4924.00	24.42	AV	H	29.95	4.57	27.51	31.43	54.00	22.57
7386.00	36.37	PK	H	34.22	5.74	27.18	49.15	74.00	24.85
7386.00	23.10	AV	H	34.22	5.74	27.18	35.88	54.00	18.12

802.11n ht40 Mode:

Frequency (MHz)	Receiver		Rx Antenna		Cable loss (dB)	Amplifier Gain (dB)	Corrected Amplitude (dBμV/m)	Limit (dBμV/m)	Margin (dB)
	Reading (dBμV)	Detector	Polar (H/V)	Factor (dB/m)					
Low Channel: 2422 MHz									
2422.00	71.39	PK	H	24.86	3.35	0.00	99.60	N/A	N/A
2422.00	61.53	AV	H	24.86	3.35	0.00	89.74	N/A	N/A
2422.00	69.25	PK	V	24.86	3.35	0.00	97.46	N/A	N/A
2422.00	58.67	AV	V	24.86	3.35	0.00	86.88	N/A	N/A
2390.00	30.05	PK	H	24.80	3.33	0.00	58.18	74.00	15.82
2390.00	17.51	AV	H	24.80	3.33	0.00	45.64	54.00	8.36
4844.00	36.61	PK	H	29.79	4.57	27.46	43.51	74.00	30.49
4844.00	22.73	AV	H	29.79	4.57	27.46	29.63	54.00	24.37
7266.00	37.06	PK	H	34.03	5.64	27.25	49.48	74.00	24.52
7266.00	23.08	AV	H	34.03	5.64	27.25	35.50	54.00	18.50
Middle Channel: 2437 MHz									
2437.00	70.69	PK	H	24.89	3.36	0.00	98.94	N/A	N/A
2437.00	59.88	AV	H	24.89	3.36	0.00	88.13	N/A	N/A
2437.00	68.87	PK	V	24.89	3.36	0.00	97.12	N/A	N/A
2437.00	58.88	AV	V	24.89	3.36	0.00	87.13	N/A	N/A
4874.00	36.15	PK	H	29.85	4.57	27.54	43.03	74.00	30.97
4874.00	22.54	AV	H	29.85	4.57	27.54	29.42	54.00	24.58
7311.00	37.04	PK	H	34.10	5.68	27.28	49.54	74.00	24.46
7311.00	23.04	AV	H	34.10	5.68	27.28	35.54	54.00	18.46
High Channel: 2452 MHz									
2452.00	70.80	PK	H	24.91	3.37	0.00	99.08	N/A	N/A
2452.00	60.25	AV	H	24.91	3.37	0.00	88.53	N/A	N/A
2452.00	68.98	PK	V	24.91	3.37	0.00	97.26	N/A	N/A
2452.00	58.98	AV	V	24.91	3.37	0.00	87.26	N/A	N/A
2483.50	30.60	PK	H	24.97	3.38	0.00	58.95	74.00	15.05
2483.50	18.04	AV	H	24.97	3.38	0.00	46.39	54.00	7.61
4904.00	36.65	PK	H	29.91	4.56	27.58	43.54	74.00	30.46
4904.00	22.87	AV	H	29.91	4.56	27.58	29.76	54.00	24.24
7356.00	37.66	PK	H	34.17	5.72	27.22	50.33	74.00	23.67
7356.00	23.45	AV	H	34.17	5.72	27.22	36.12	54.00	17.88




Test plots (Panthera D 802.11b_high channel Chain1 was the worst)
Horizontal:

Fundamental
Test with Band
Rejection Filter

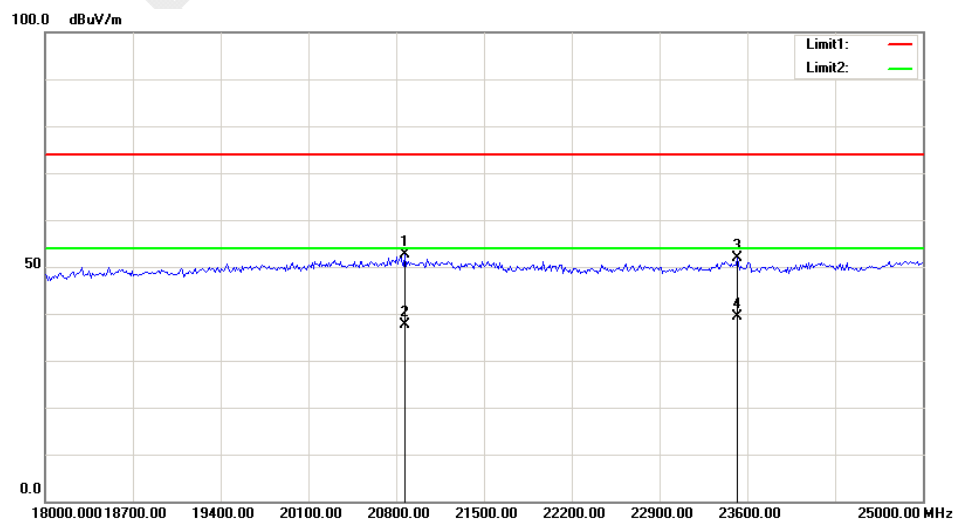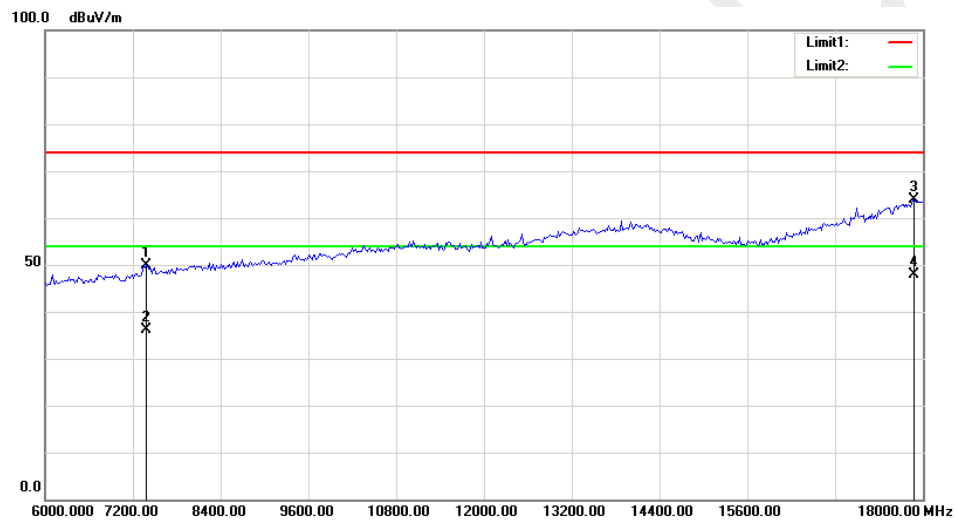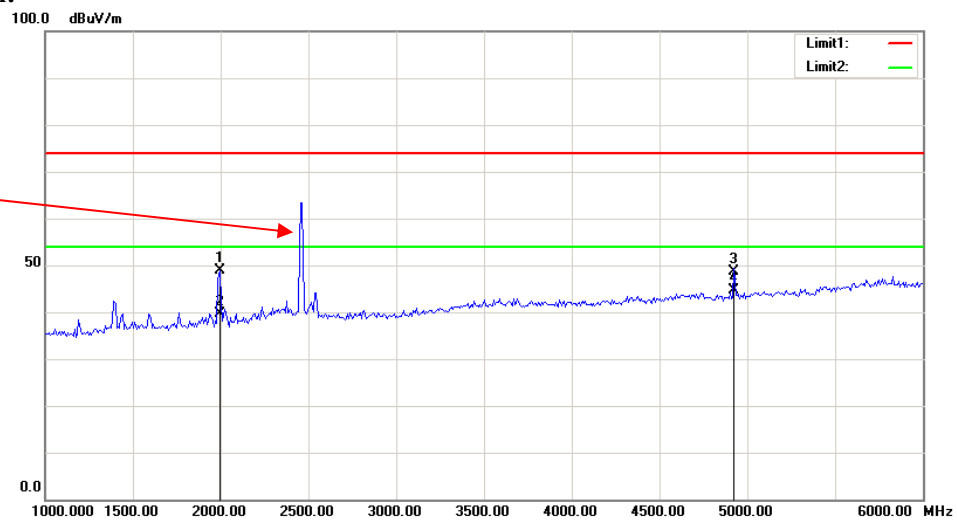

Vertical:

Fundamental
Test with Band
Rejection Filter

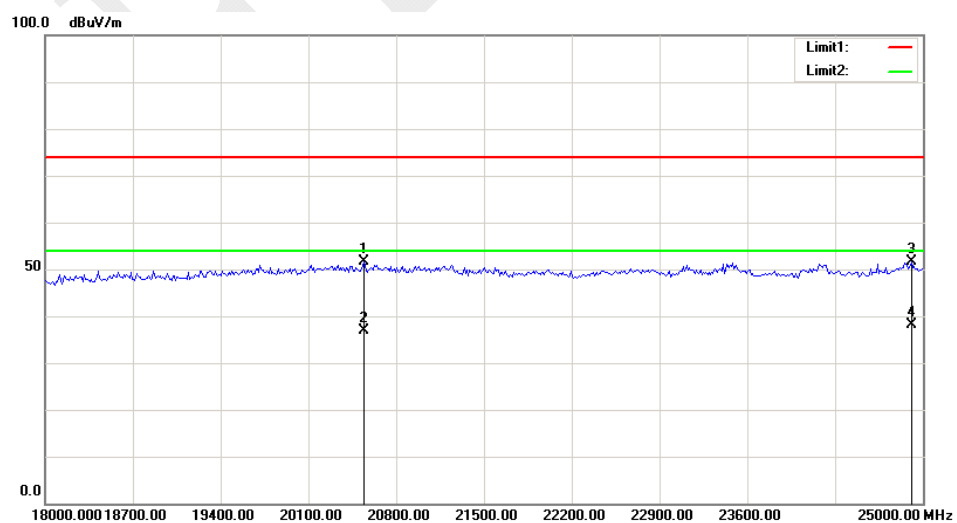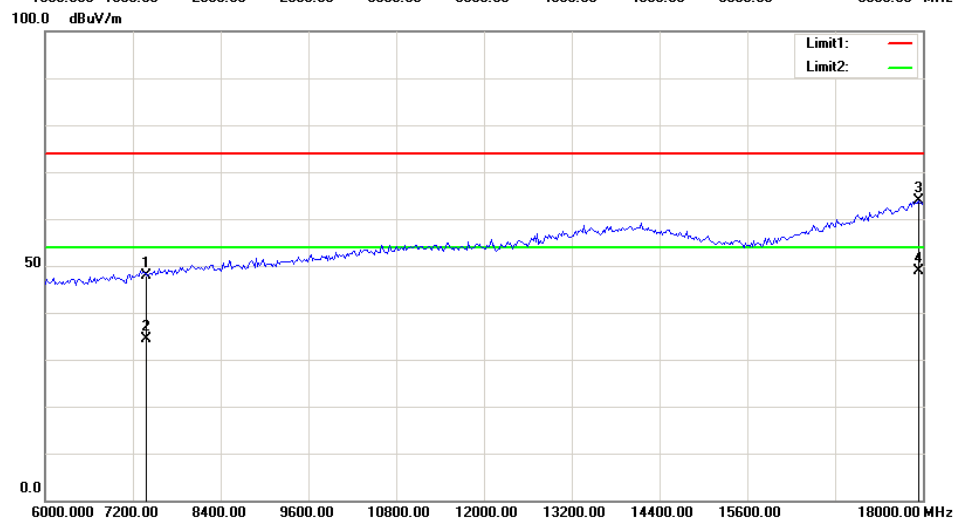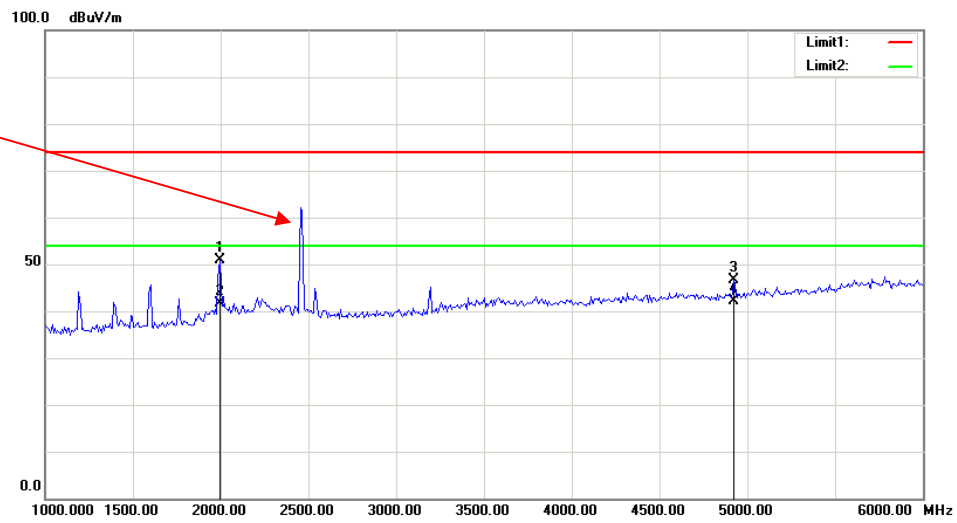

FCC §15.247(a) (2)–6 dB EMISSION BANDWIDTH

Applicable Standard

According to FCC §15.247(a) (2)

Systems using digital modulation techniques may operate in the 902–928 MHz, 2400–2483.5 MHz, and 5725–5850 MHz bands. The minimum 6 dB bandwidth shall be at least 500 kHz.

Test Procedure

- Set RBW = 100 kHz.
- Set the video bandwidth (VBW) $\geq 3 \times$ RBW.
- Detector = Peak.
- Trace mode = max hold.
- Sweep = auto couple.
- Allow the trace to stabilize.
- Measure the maximum width of the emission that is constrained by the frequencies associated with the two outermost amplitude points (upper and lower frequencies) that are attenuated by 6 dB relative to the maximum level measured in the fundamental emission.



Test Equipment List and Details

Manufacturer	Description	Model	Serial Number	Calibration Date	Calibration Due Date
Rohde & Schwarz	Signal Analyzer	FSIQ26	831929/005	2018-08-03	2019-08-03
yzjingcheng	Coaxial Cable	KTRFBU-141-50	41005012	Each time	N/A

* **Statement of Traceability:** Bay Area Compliance Laboratories Corp. (Dongguan) attests that all calibrations have been performed, traceable to National Primary Standards and International System of Units (SI).

Test Data

Environmental Conditions

Temperature:	23°C
Relative Humidity:	42 %
ATM Pressure:	100.2kPa


* The testing was performed by Andy Huang on 2019-01-11

Test Mode: Transmitting (Test performed at chain 1)


Test Result: Compliance. Please refer to the following table and plots.

Test mode	Channel	Frequency (MHz)	6 dB Bandwidth (MHz)	Limit (MHz)
802.11b	Low	2412	10.180	≥ 0.5
	Middle	2437	10.180	≥ 0.5
	High	2462	10.180	≥ 0.5
802.11g	Low	2412	16.593	≥ 0.5
	Middle	2437	16.593	≥ 0.5
	High	2462	16.593	≥ 0.5
802.11n ht20	Low	2412	17.796	≥ 0.5
	Middle	2437	17.796	≥ 0.5
	High	2462	17.796	≥ 0.5
802.11n ht40	Low	2422	36.553	≥ 0.5
	Middle	2437	36.232	≥ 0.5
	High	2452	36.553	≥ 0.5


802.11b Low Channel

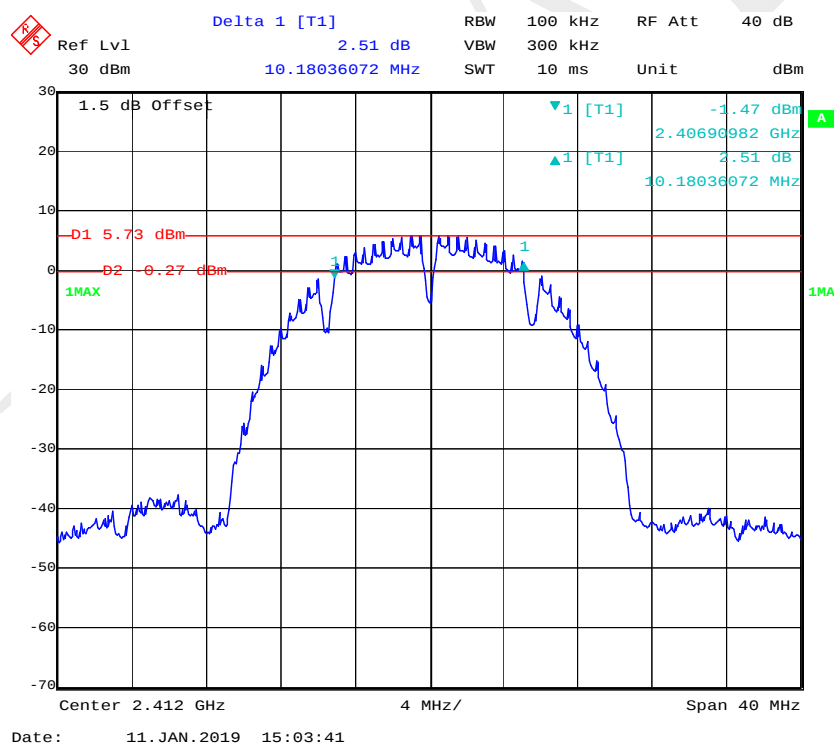


802.11b Middle Channel

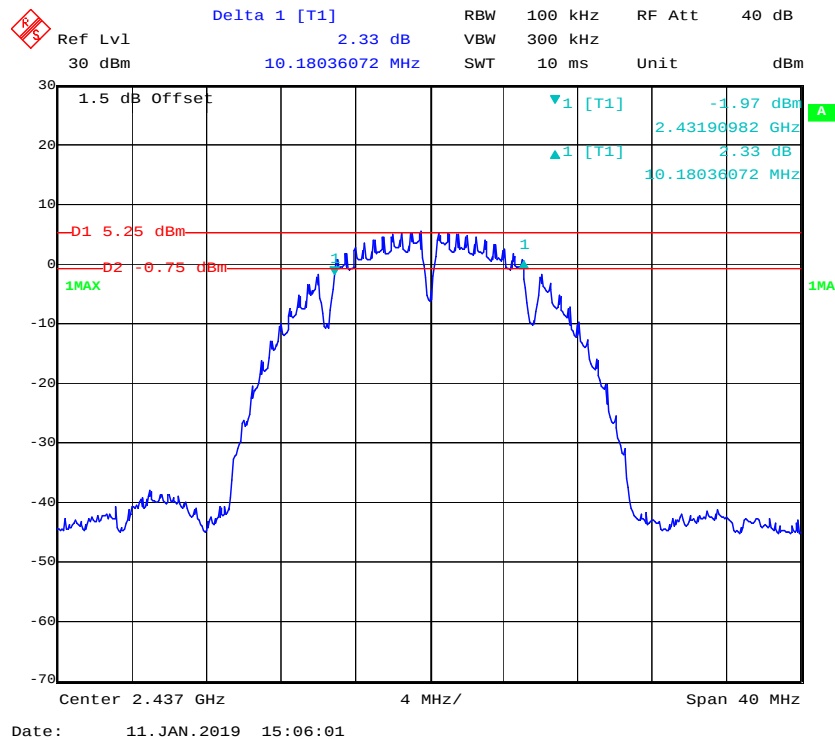


802.11b High Channel


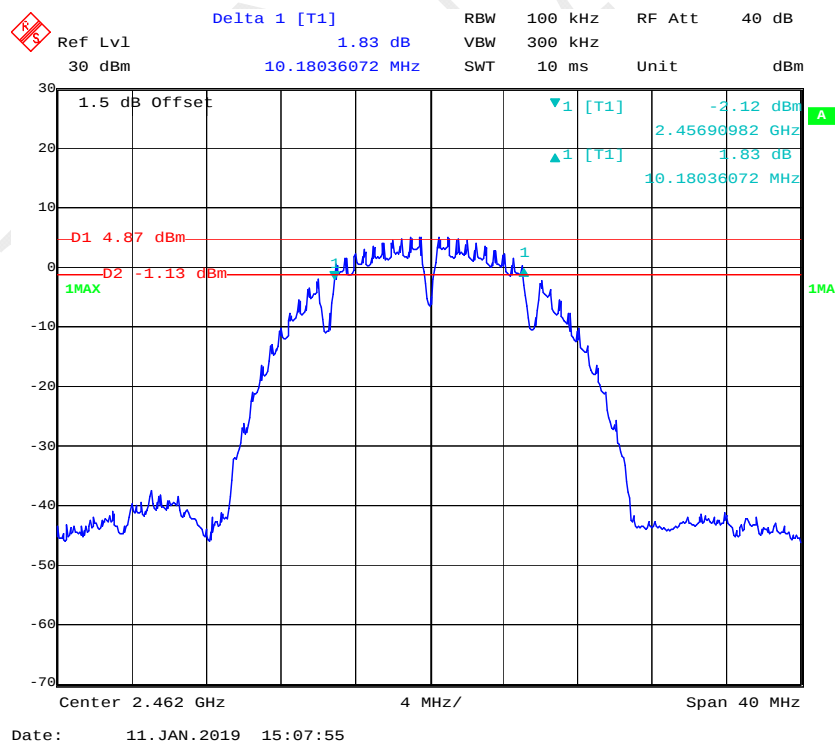


802.11g Low Channel

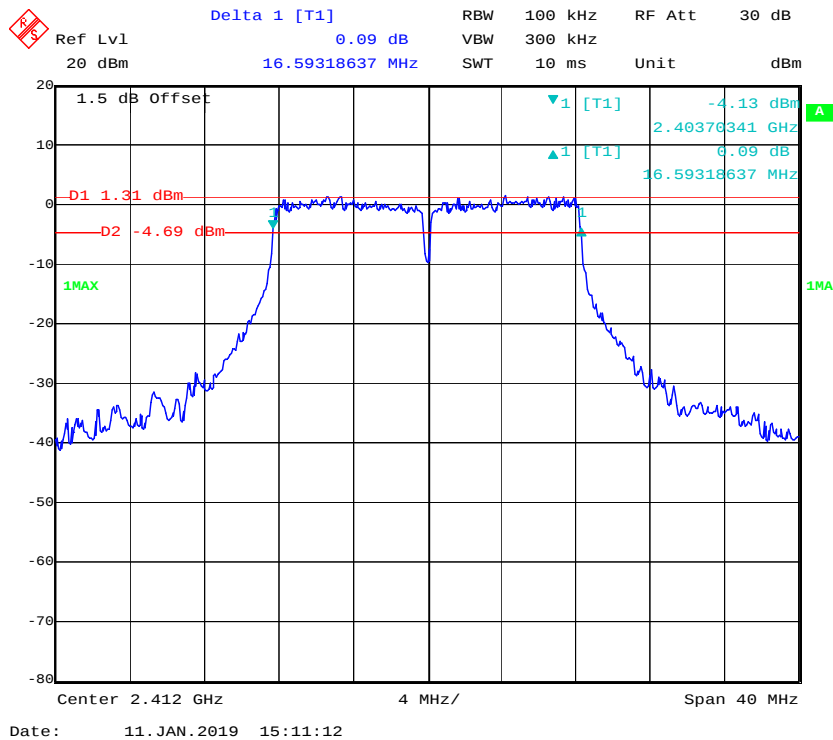


802.11g Middle Channel

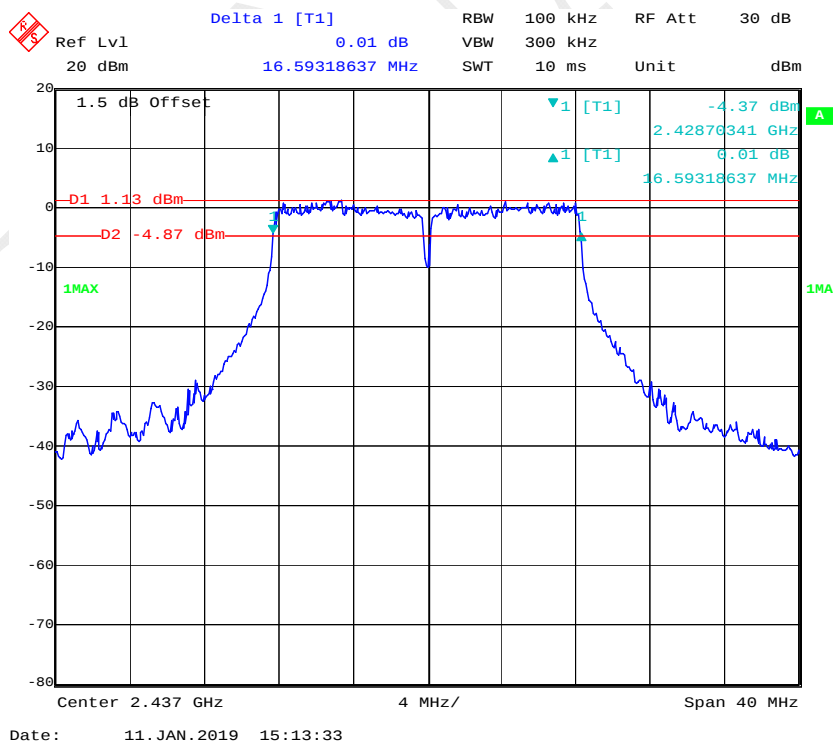

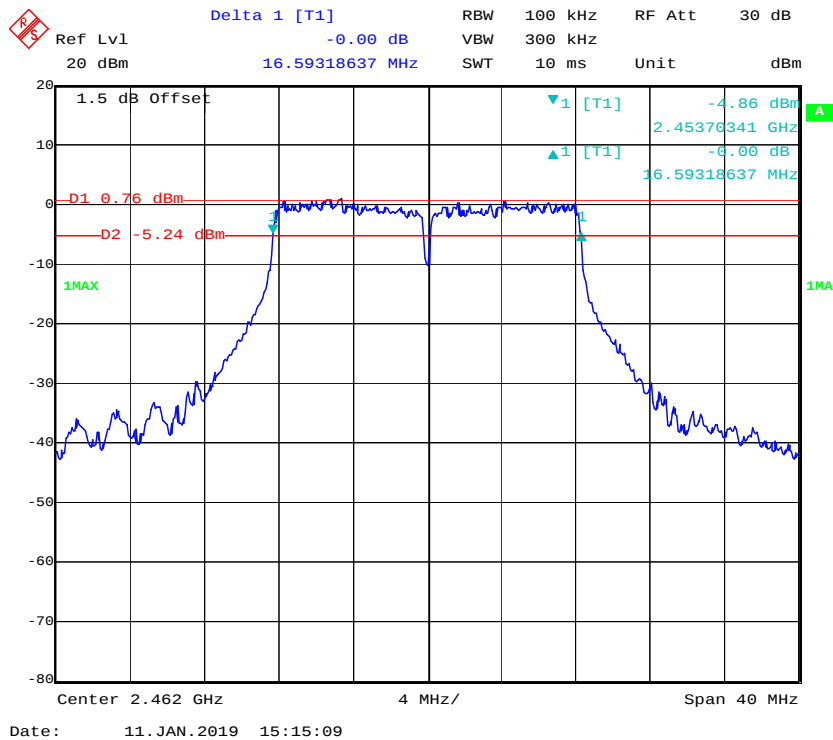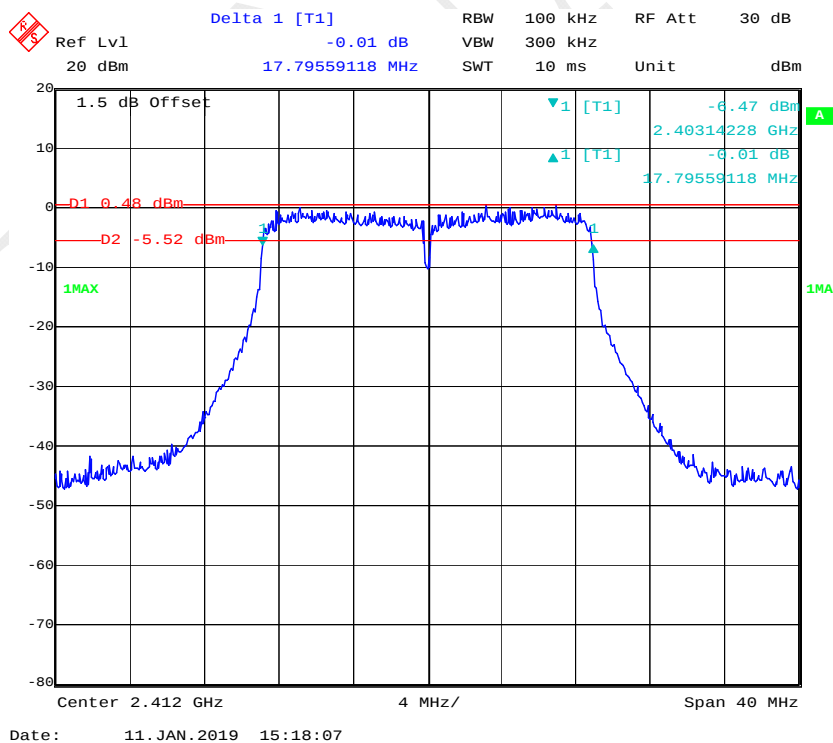
802.11g High Channel**802.11n ht20 Low Channel**

802.11n ht20 Middle Channel

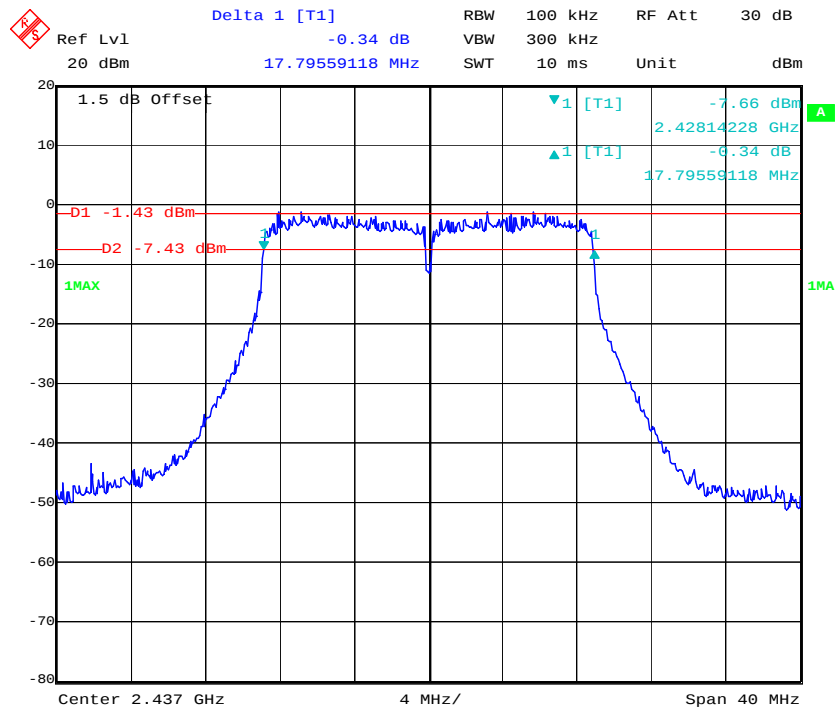


Date: 11.JAN.2019 15:20:21

802.11n ht20 High Channel

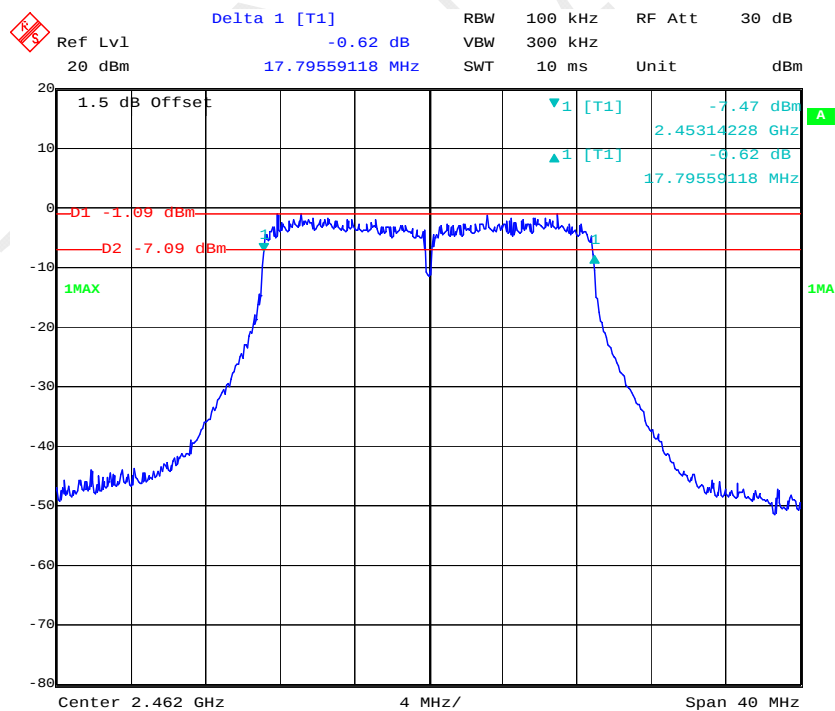


Date: 11.JAN.2019 15:22:21


802.11n ht40 Low Channel

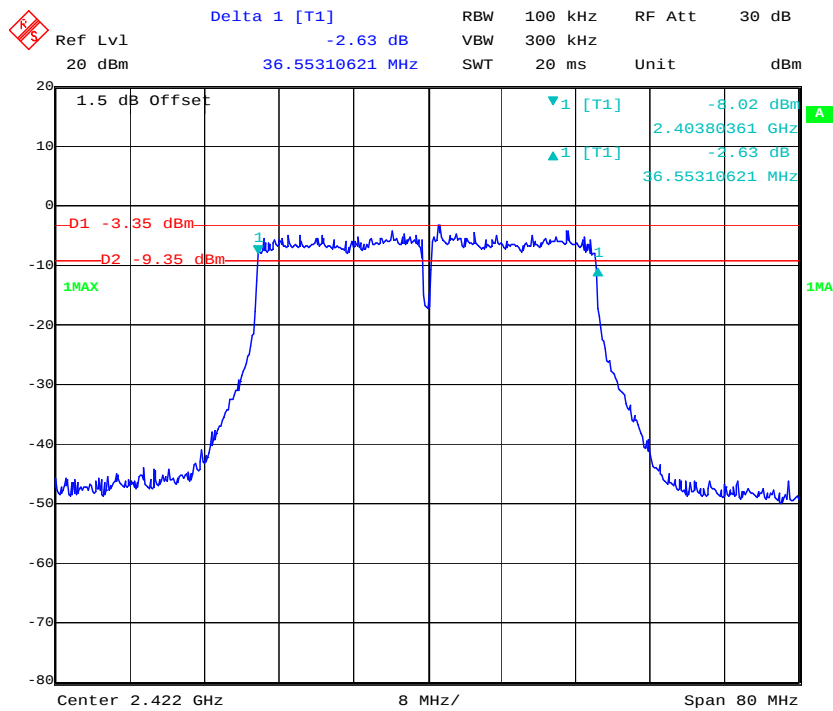

802.11n ht40 Middle Channel

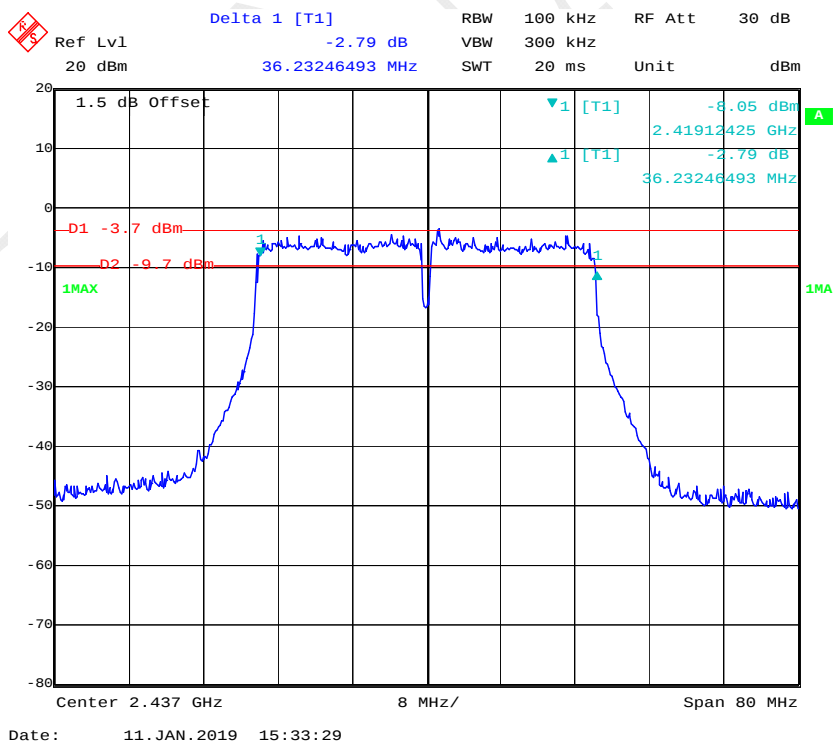

802.11n ht40 High Channel

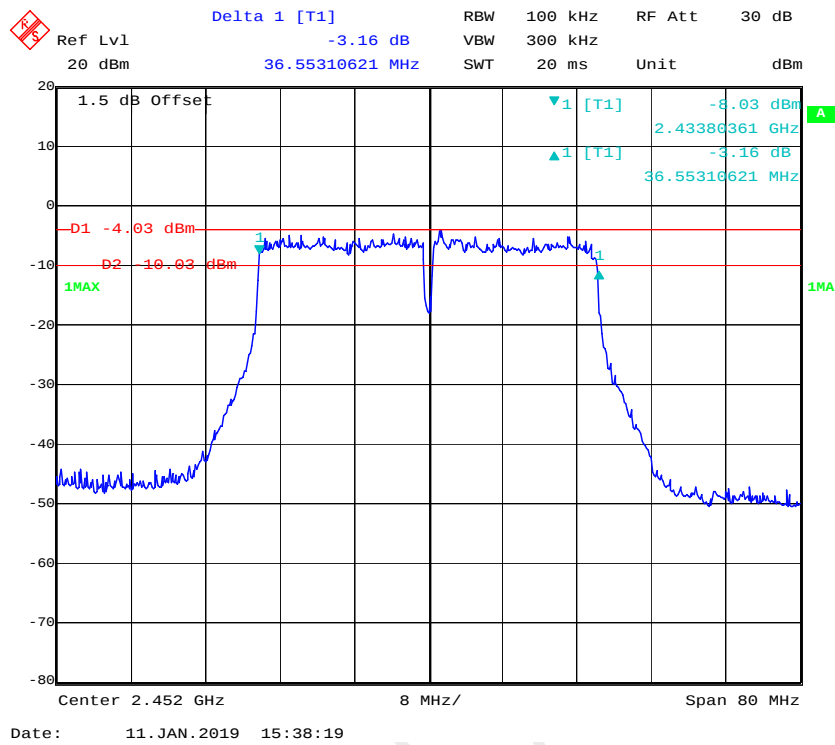

FCC §15.247(b) (3) - MAXIMUM PEAK CONDUCTED OUTPUT POWER

Applicable Standard

According to FCC §15.247(b) (3), for systems using digital modulation in the 902-928 MHz, 2400-2483.5 MHz, and 5725-5850 MHz bands: 1 Watt. As an alternative to a peak power measurement, compliance with the one Watt limit can be based on a measurement of the maximum conducted output power.

Maximum Conducted Output Power is defined as the total transmit power delivered to all antennas and antenna elements averaged across all symbols in the signaling alphabet when the transmitter is operating at its maximum power control level. Power must be summed across all antennas and antenna elements. The average must not include any time intervals during which the transmitter is off or is transmitting at a reduced power level. If multiple modes of operation are possible (e.g., alternative modulation methods), the maximum conducted output power is the highest total transmit power occurring in any mode.

Test Procedure

1. Place the EUT on a bench and set it in transmitting mode.
2. Remove the antenna from the EUT and then connect a low loss RF cable from the antenna port to test equipment.
3. Add a correction factor to the display.
4. Set the power meter to test average output power, record the result as average power.



Test Equipment List and Details

Manufacturer	Description	Model	Serial Number	Calibration Date	Calibration Due Date
Agilent	USB Wideband Power Sensor	U2022XA	MY5417006	2018-12-10	2019-12-10
yzjingcheng	Coaxial Cable	KTRFBU-141-50	41005012	Each time	N/A

* **Statement of Traceability:** Bay Area Compliance Laboratories Corp. (Dongguan) attests that all calibrations have been performed, traceable to National Primary Standards and International System of Units (SI).

Test Data

Environmental Conditions

Temperature:	23°C
Relative Humidity:	42 %
ATM Pressure:	100.2kPa

* The testing was performed by Andy Huang on 2019-01-11

Test Mode: Transmitting

Test Result: Compliance. Please refer to the following table.

Test mode	Frequency (MHz)	Conducted Peak Output Power (dBm)			Conducted Average Output Power (dBm)			Limit (dBm)
		Chain 0	Chain 1	Total	Chain 0	Chain 1	Total	
802.11b	2412	17.51	16.41	N/A	14.83	14.65	N/A	30
	2437	16.34	16.66	N/A	14.49	14.84	N/A	30
	2462	16.91	16.52	N/A	14.89	14.73	N/A	30
802.11g	2412	20.92	20.14	N/A	14.85	14.76	N/A	30
	2437	21.03	20.01	N/A	14.90	14.39	N/A	30
	2462	20.95	20.71	N/A	14.80	14.54	N/A	30
802.11n ht20	2412	17.28	17.34	20.32	11.45	11.65	14.56	30
	2437	17.19	17.57	20.39	11.21	11.74	14.49	30
	2462	17.03	17.44	20.25	11.18	11.89	14.56	30
802.11n ht40	2422	17.22	17.61	20.43	11.81	11.44	14.64	30
	2437	17.03	17.02	20.04	11.51	11.58	14.56	30
	2452	16.84	16.73	19.80	11.33	11.28	14.32	30

FCC §15.247(d)– 100 kHz BANDWIDTH OF FREQUENCY BAND EDGE**Applicable Standard**

According to FCC§15.247(d):In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided the transmitter demonstrates compliance with the peak conducted power limits. If the transmitter complies with the conducted power limits based on the use of RMS averaging over a time interval, as permitted under paragraph (b)(3) of this section, the attenuation required under this paragraph shall be 30 dB instead of 20 dB. Attenuation below the general limits specified in §15.209(a) is not required. In addition, radiated emissions which fall in the restricted bands, as defined in §15.205(a), must also comply with the radiated emission limits specified in §15.209(a) (see §15.205(c)).

Test Procedure

1. Check the calibration of the measuring instrument using either an internal calibrator or a known signal from an external generator.
2. Position the EUT without connection to measurement instrument. Turn on the EUT and connect its antenna terminal to measurement instrument via a low loss cable. Then set it to any one measured frequency within its operating range, and make sure the instrument is operated in its linear range.
3. Set RBW to 100 kHz and VBW of spectrum analyzer to 300 kHz with a convenient frequency span including 100 kHz bandwidth from band edge.
4. Measure the highest amplitude appearing on spectral display and set it as a reference level. Plot the graph with marking the highest point and edge frequency.
5. Repeat above procedures until all measured frequencies were complete.

Test Equipment List and Details

Manufacturer	Description	Model	Serial Number	Calibration Date	Calibration Due Date
Rohde & Schwarz	Signal Analyzer	FSIQ26	831929/005	2018-08-03	2019-08-03
yzjingcheng	Coaxial Cable	KTRFBU-141-50	41005012	Each time	N/A

* **Statement of Traceability:** Bay Area Compliance Laboratories Corp. (Dongguan) attests that all calibrations have been performed, traceable to National Primary Standards and International System of Units (SI).


Test Data**Environmental Conditions**

Temperature:	23°C
Relative Humidity:	42 %
ATM Pressure:	100.2kPa


* The testing was performed by Andy Huang on 2019-01-11

Test mode: Transmitting


Test Result: Compliance. Please refer to following plots.


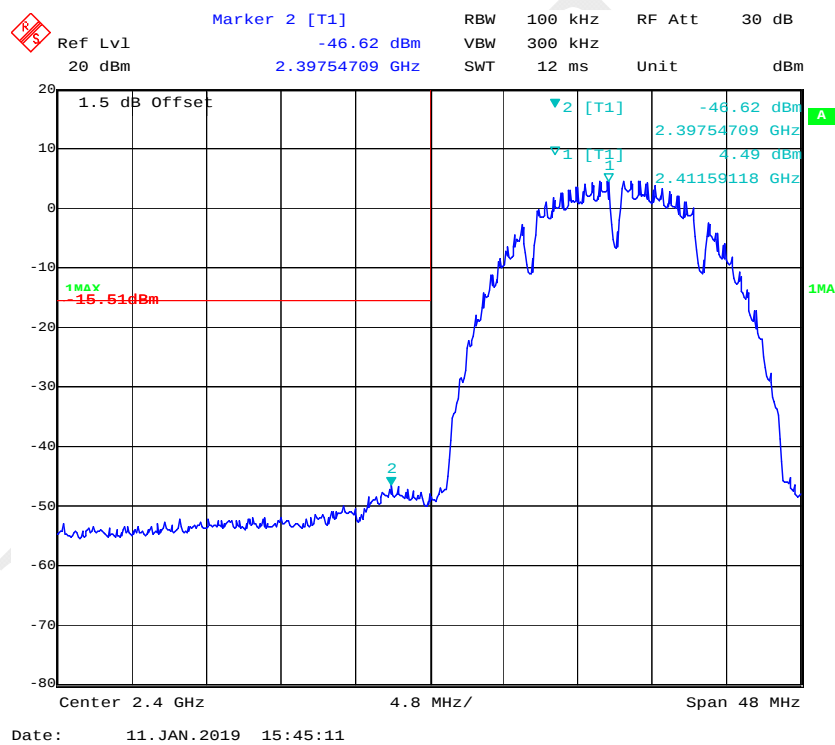
Chain 0**802.11b: Band Edge, Left Side**



802.11n ht20 Band Edge, Right Side


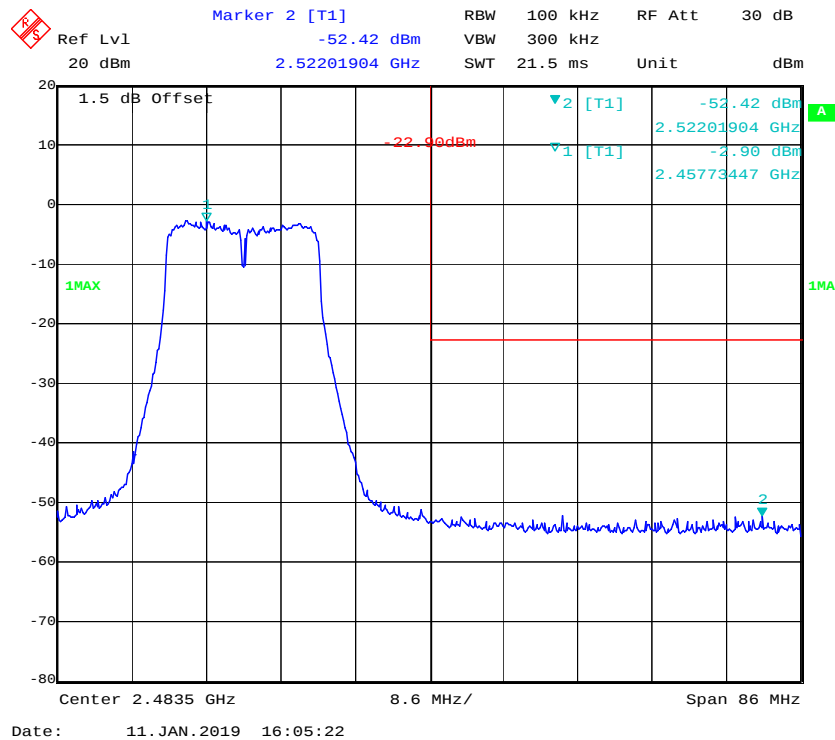


802.11n ht40 Band Edge, Left Side

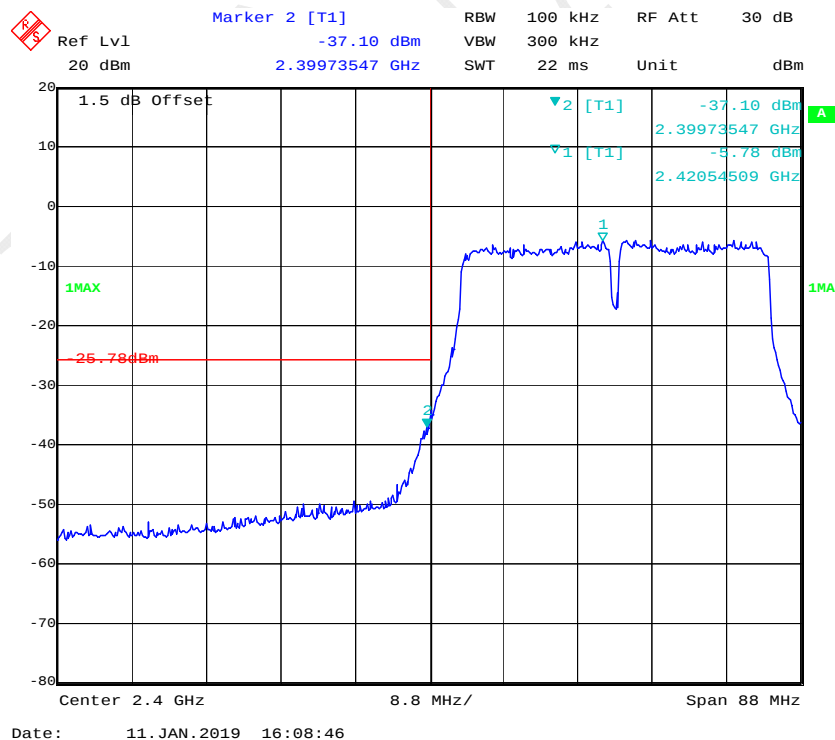

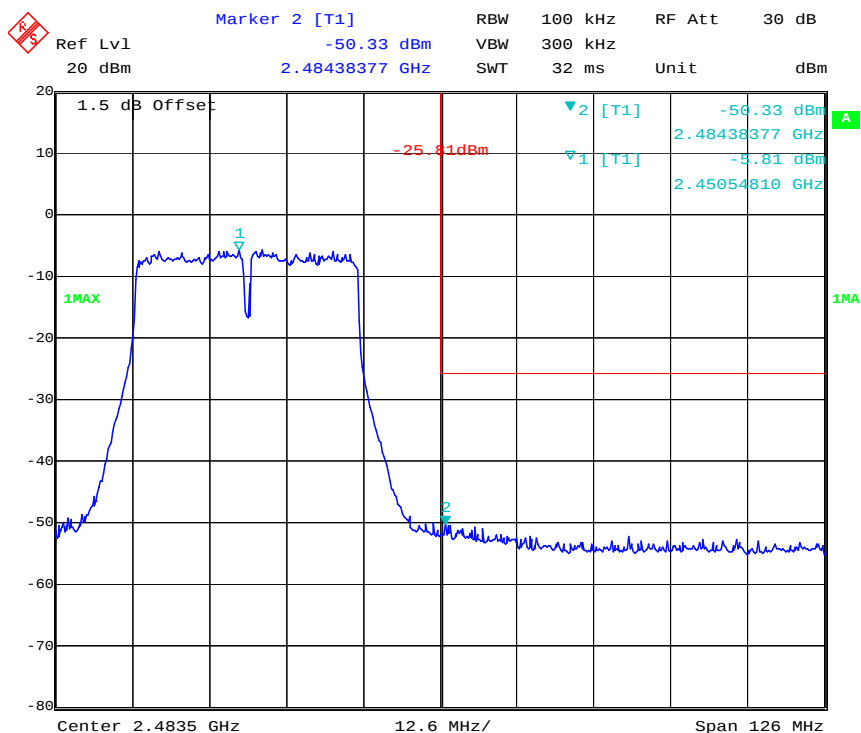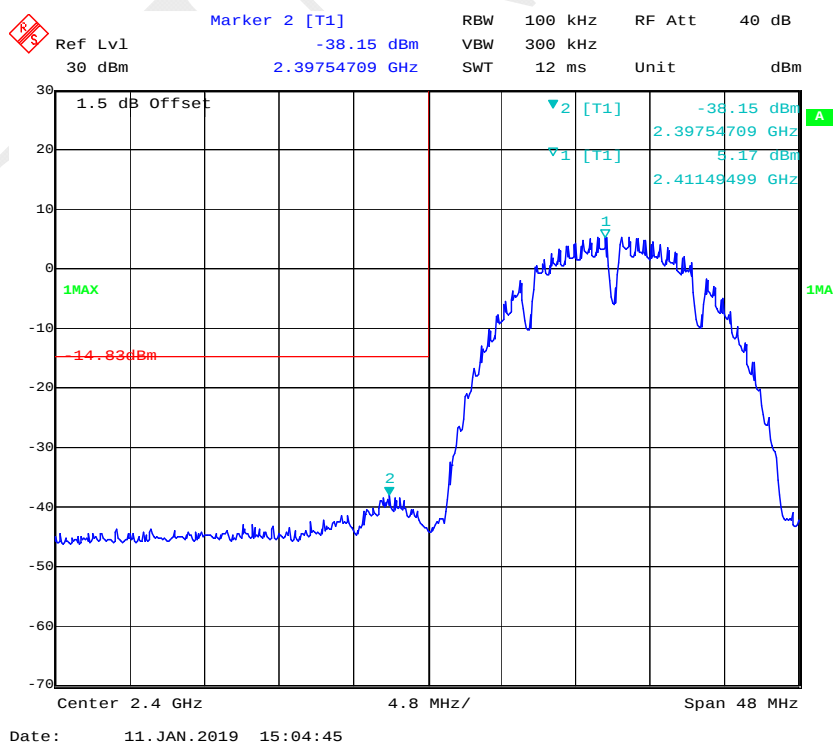802.11n ht40 Band Edge, Right Side**Chain 1****802.11b: Band Edge, Left Side**

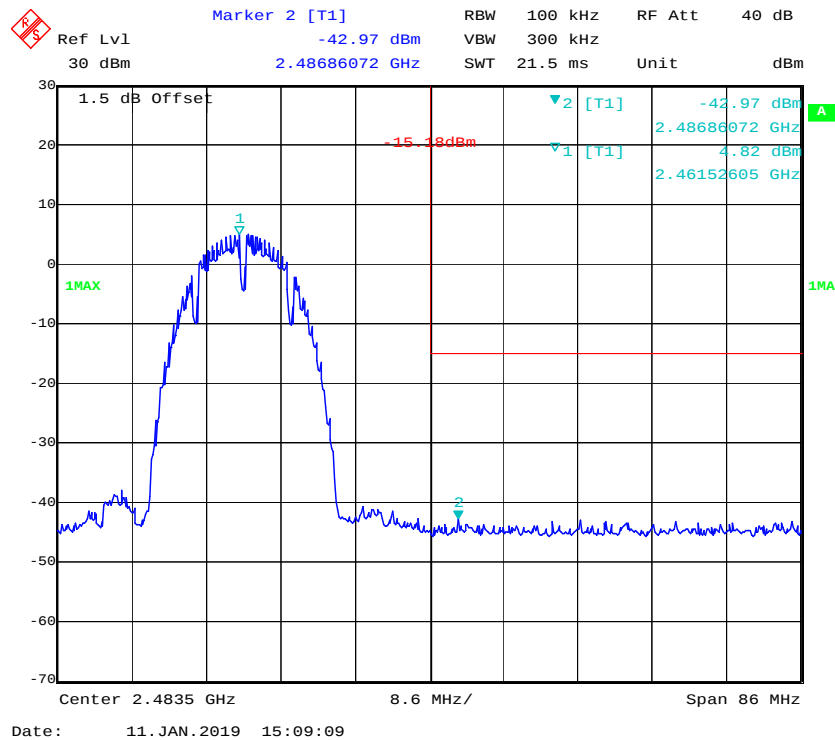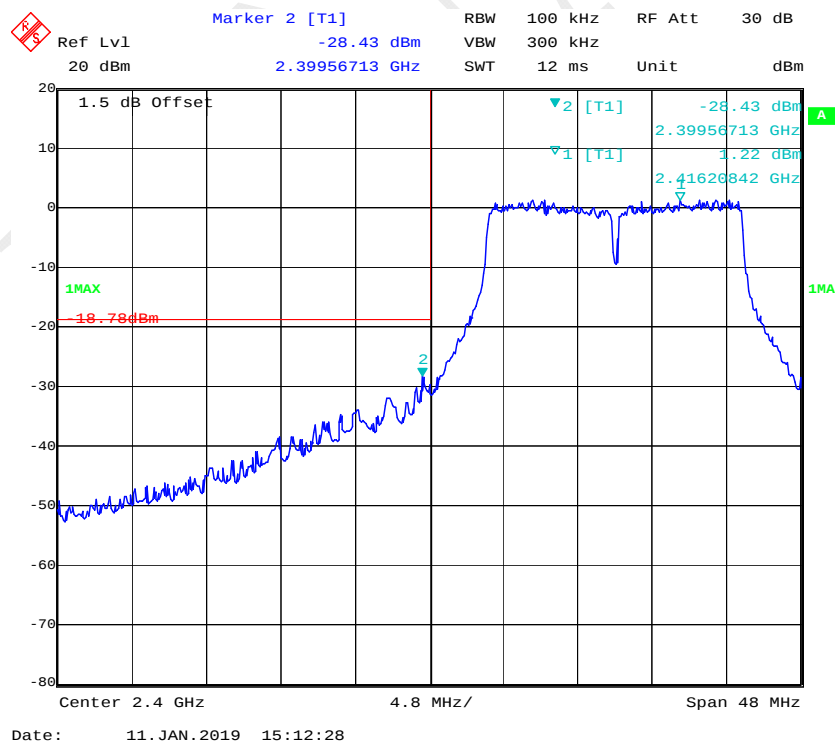802.11b: Band Edge, Right Side**802.11g: Band Edge, Left Side**

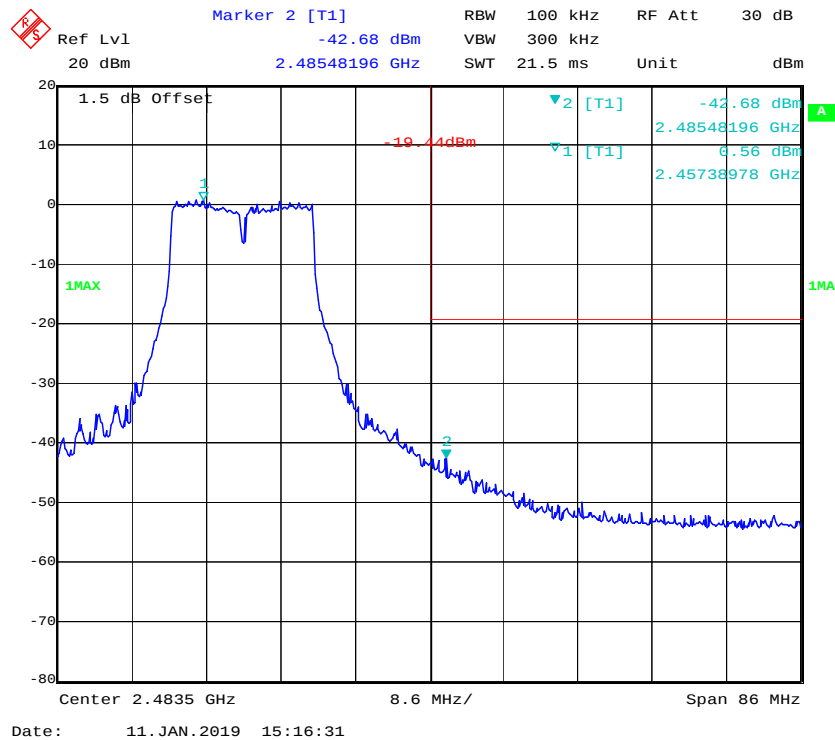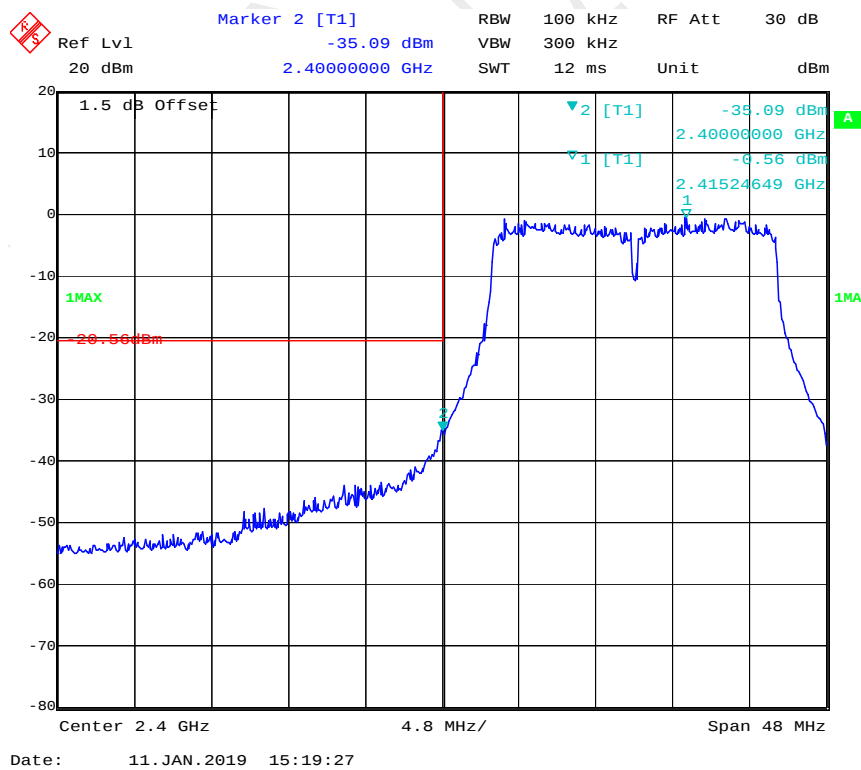802.11g: Band Edge, Right Side**802.11n ht20 Band Edge, Left Side**

Ref Lvl 20 dBm

Marker 2 [T1] -50.77 dBm

RBW 100 kHz

VBW 300 kHz

SWT 21.5 ms

RF Att 30 dB

Unit dBm

1.5 dB Offset

1MAX

2

1 [T1] -50.77 dBm

2 [T1] -21.63 dBm

2.48513727 GHz

2.45394289 GHz

Center 2.4835 GHz

8.6 MHz/

Span 86 MHz

Date: 11. JAN. 2019 15:24:09

Ref Lvl 20 dBm

Marker 2 [T1] -37.97 dBm

2.39973547 GHz

RBW 100 kHz

VBW 300 kHz

SWT 22 ms

Unit dBm

1.5 dB Offset

1MAX

24.12 dBm

2 [T1] -37.97 dBm

2.39973547 GHz

1 [T1] -4.12 dBm

2.42336673 GHz


1

Center 2.4 GHz

8.8 MHz/

Span 88 MHz

802.11n ht40 Band Edge, Right Side

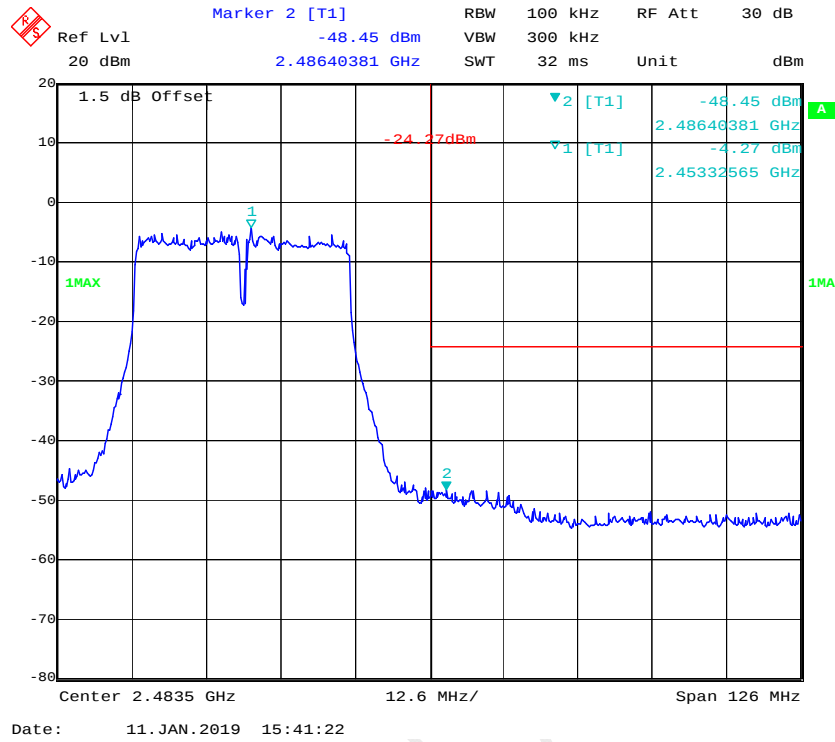

FCC §15.247(e) - POWER SPECTRAL DENSITY

Applicable Standard

For digitally modulated systems, the power spectral density conducted from the intentional radiator to the antenna shall not be greater than 8 dBm in any 3 kHz band during any time interval of continuous transmission. This power spectral density shall be determined in accordance with the provisions of paragraph (b) of this section. The same method of determining the conducted output power shall be used to determine the power spectral density.

Test Procedure

1. Check the calibration of the measuring instrument using either an internal calibrator or a known signal from an external generator.
2. Position the EUT was set without connection to measurement instrument. Turn on the EUT and connect its antenna terminal to measurement instrument via a low loss cable. Then set it to any one measured frequency within its operating range, and make sure the instrument is operated in its linear range.
3. Set the RBW = 3 kHz, VBW = 10 kHz, Set the span to 1.5 times the DTS bandwidth.
4. Use the peak marker function to determine the maximum amplitude level.

Test Equipment List and Details

Manufacturer	Description	Model	Serial Number	Calibration Date	Calibration Due Date
Rohde & Schwarz	Signal Analyzer	FSIQ26	831929/005	2018-08-03	2019-08-03
yzjingcheng	Coaxial Cable	KTRFBU-141-50	41005012	Each time	N/A



* **Statement of Traceability:** Bay Area Compliance Laboratories Corp. (Dongguan) attests that all calibrations have been performed, traceable to National Primary Standards and International System of Units (SI).

Test Data


Environmental Conditions

Temperature:	23°C
Relative Humidity:	42 %
ATM Pressure:	100.2kPa

* The testing was performed by Andy Huang on 2019-01-11

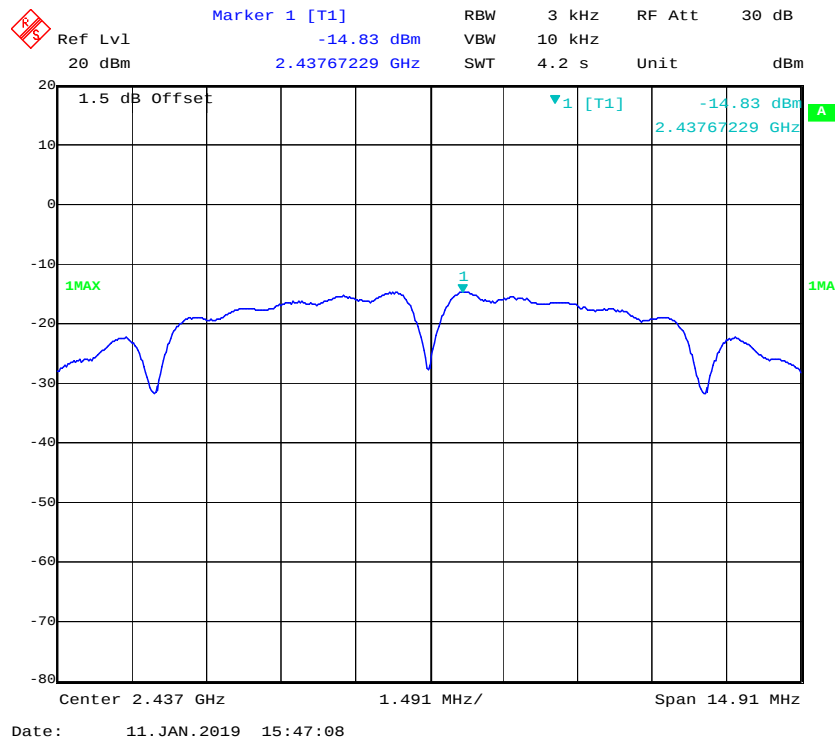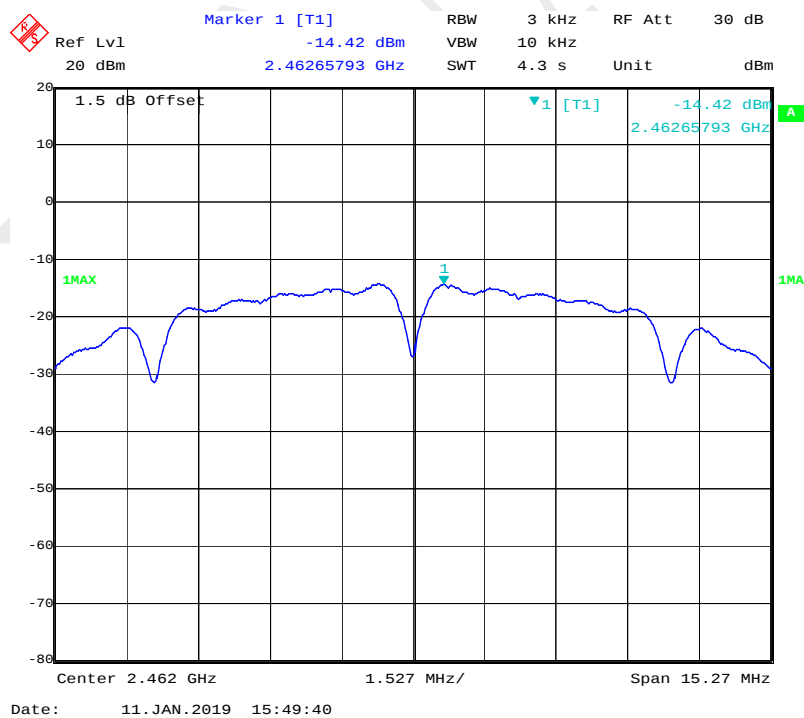
Power Spectral Density, 802.11b Middle Channel**Power Spectral Density, 802.11b High Channel**

Power Spectral Density, 802.11g Low Channel


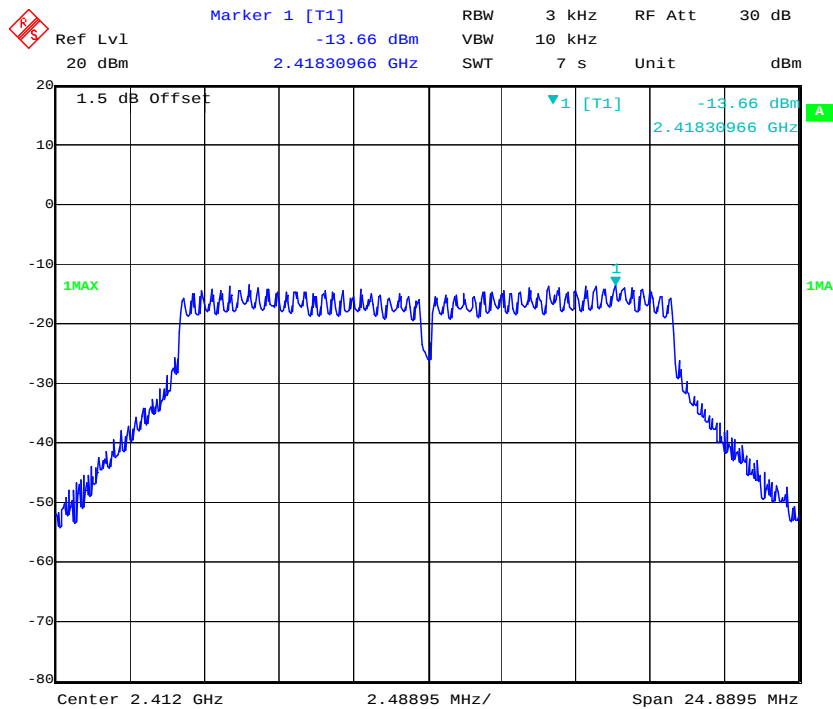




Date: 11. JAN. 2019 15:51:48

Power Spectral Density, 802.11g Middle Channel

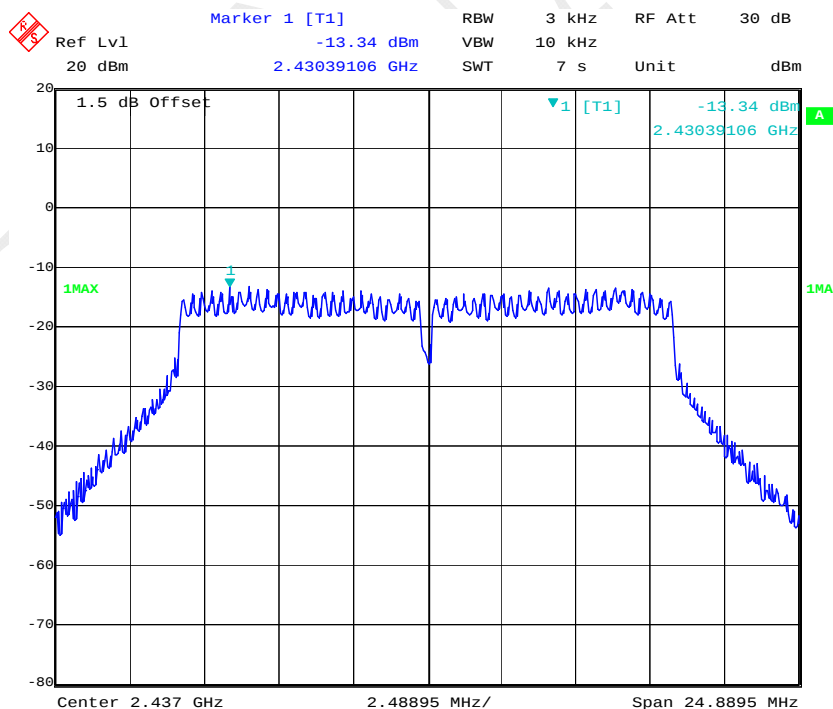


Date: 11. JAN. 2019 15:53:49

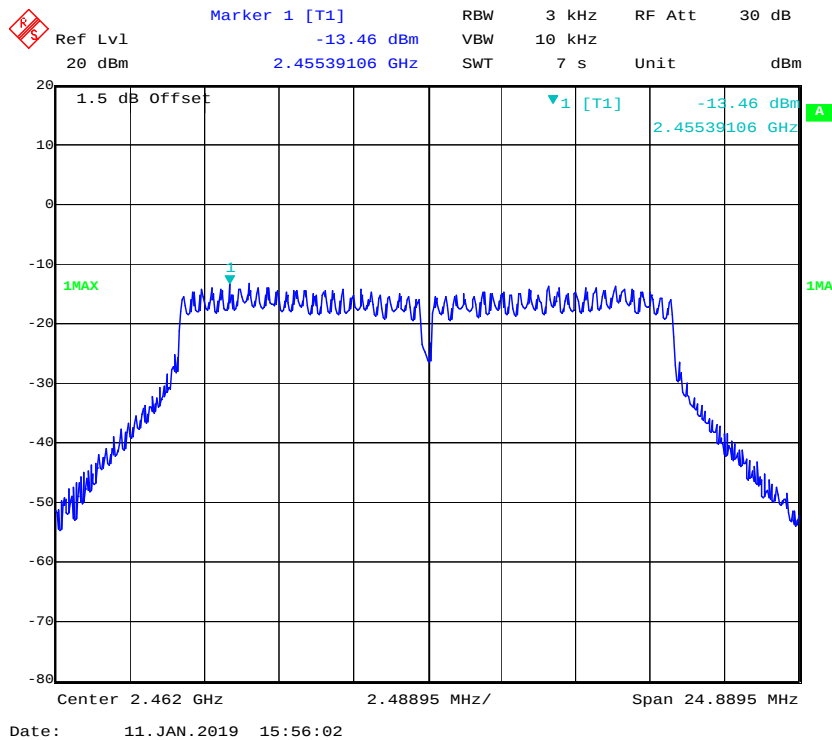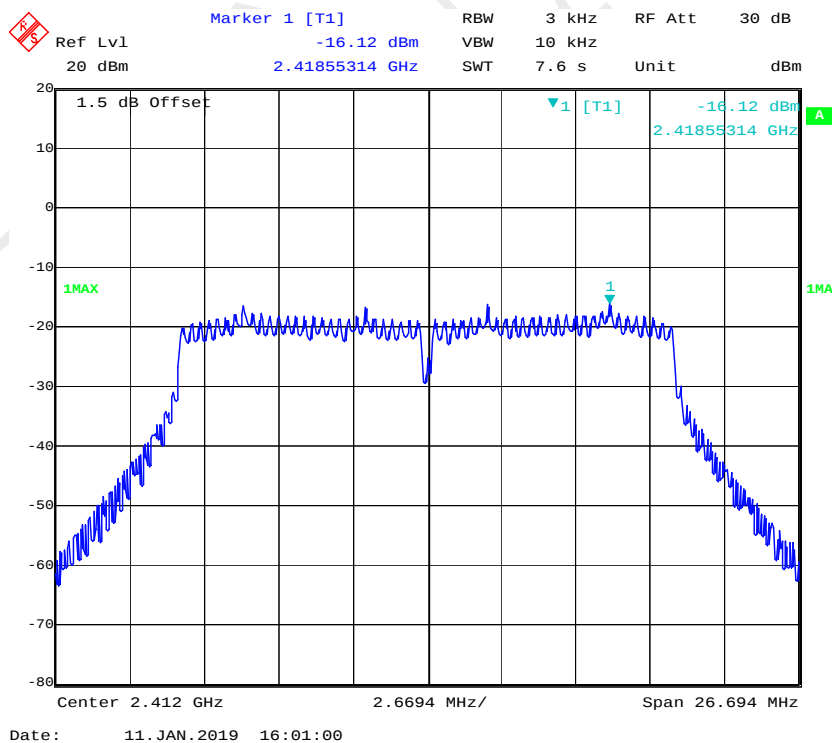
Power Spectral Density, 802.11g High Channel**Power Spectral Density, 802.11n ht20 Low Channel**

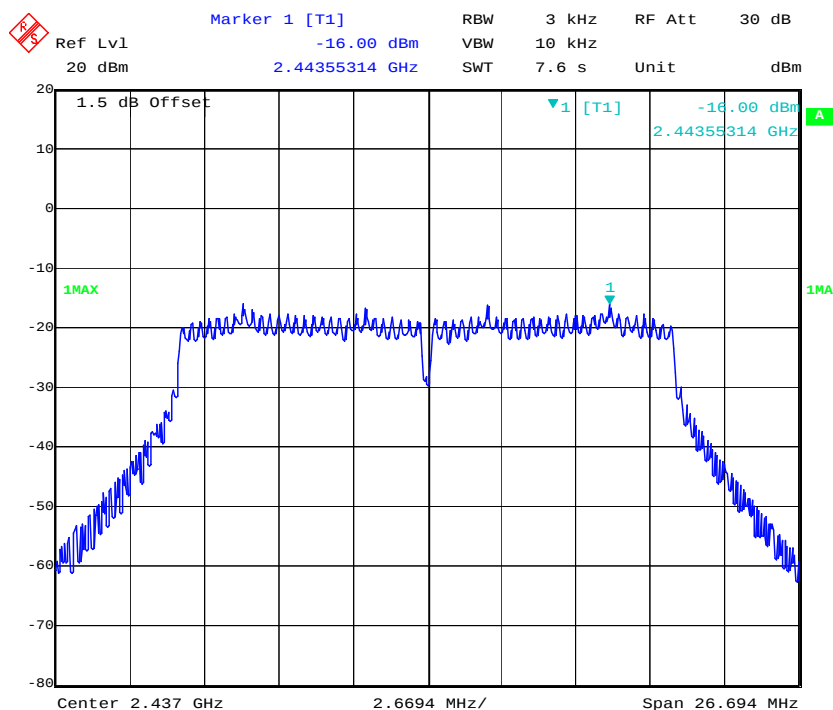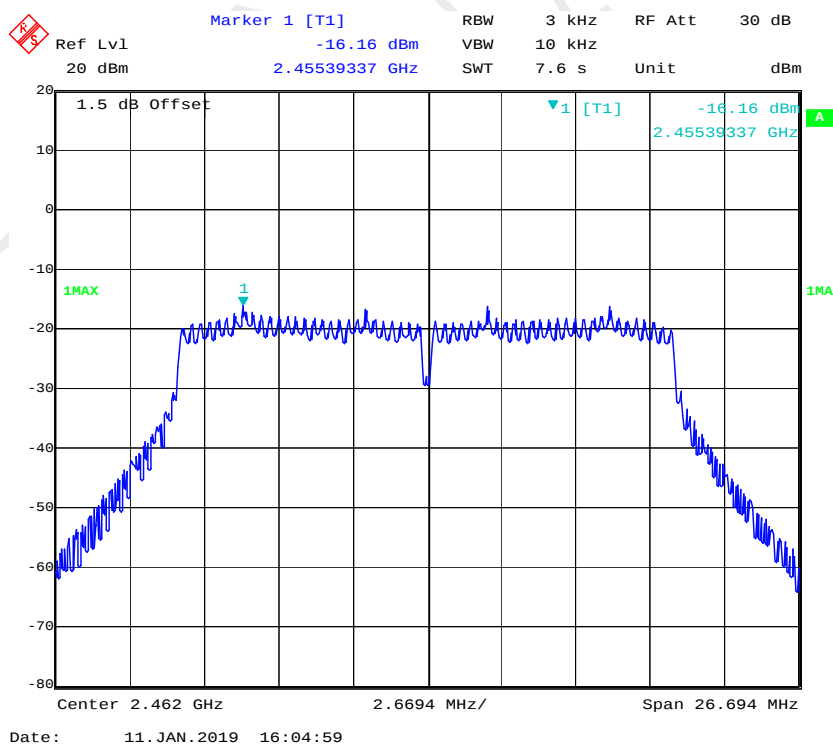Power Spectral Density, 802.11n ht20 Middle Channel**Power Spectral Density, 802.11n ht20 High Channel**


Power Spectral Density, 802.11n ht40 Low Channel

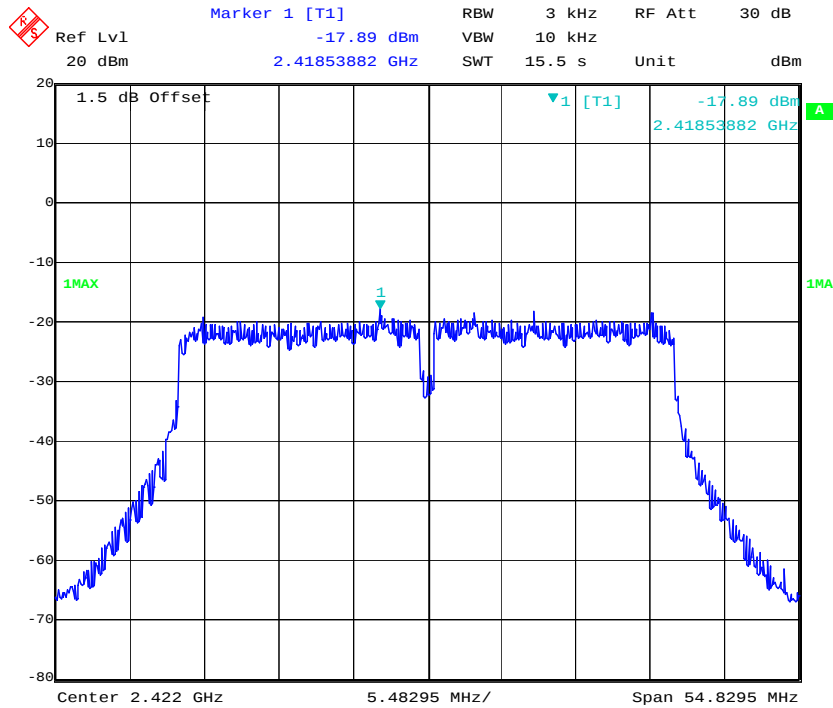

Power Spectral Density, 802.11n ht40 Middle Channel

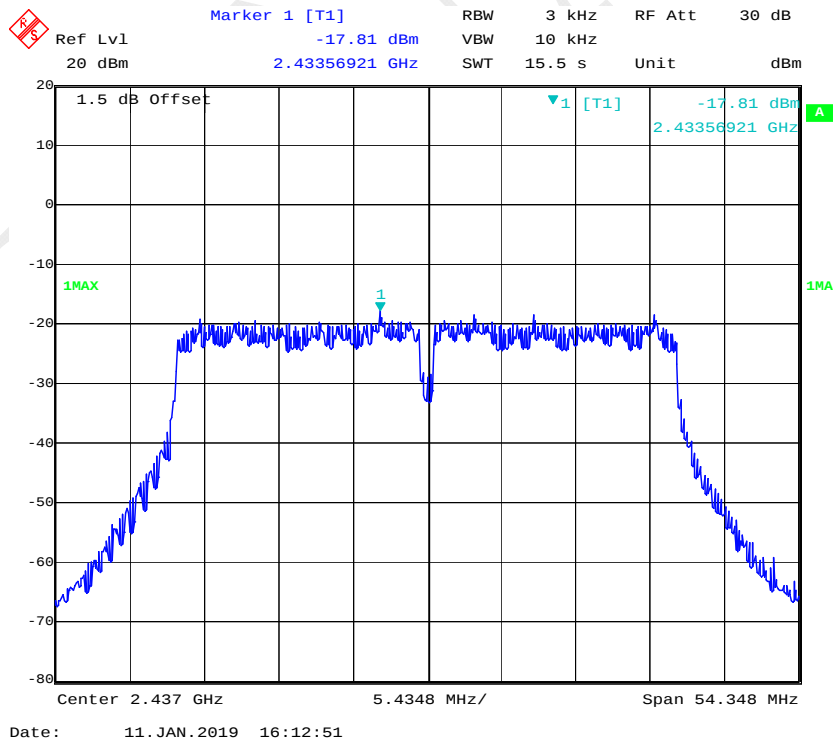


Power Spectral Density, 802.11n ht40 High Channel

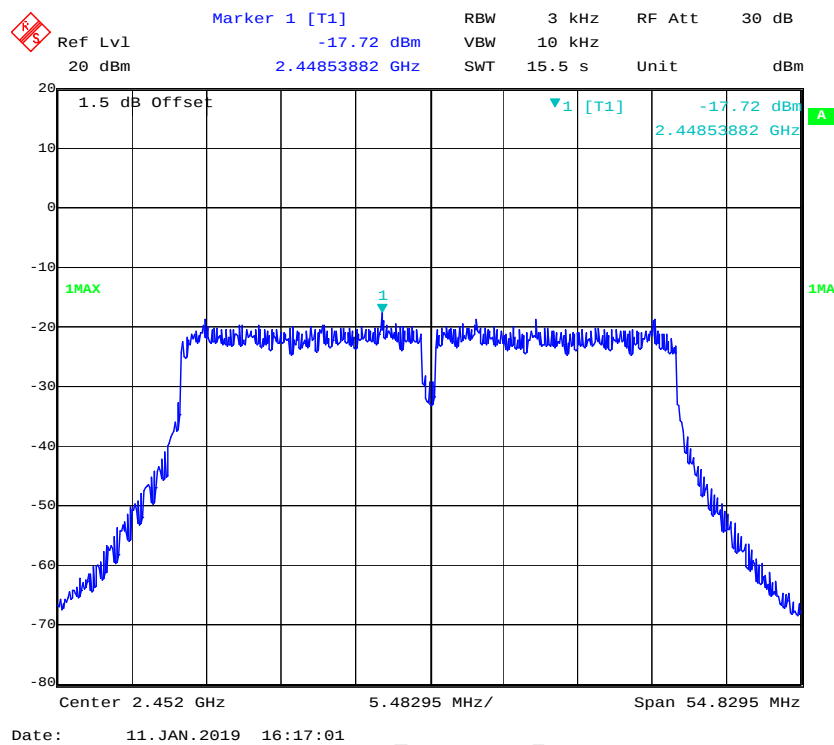


Chain1

Power Spectral Density, 802.11b Low Channel

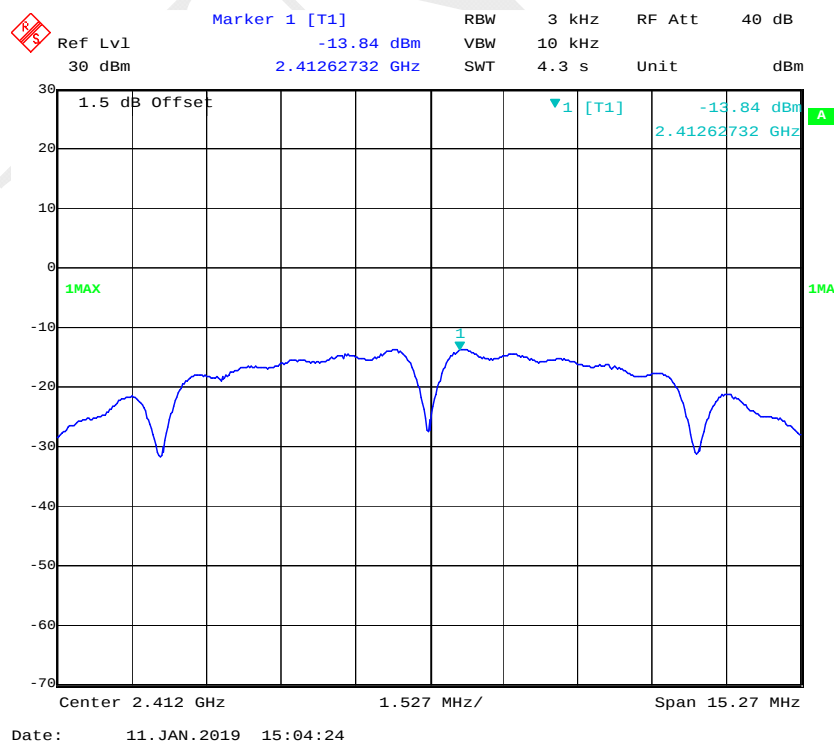


Power Spectral Density, 802.11b Middle Channel

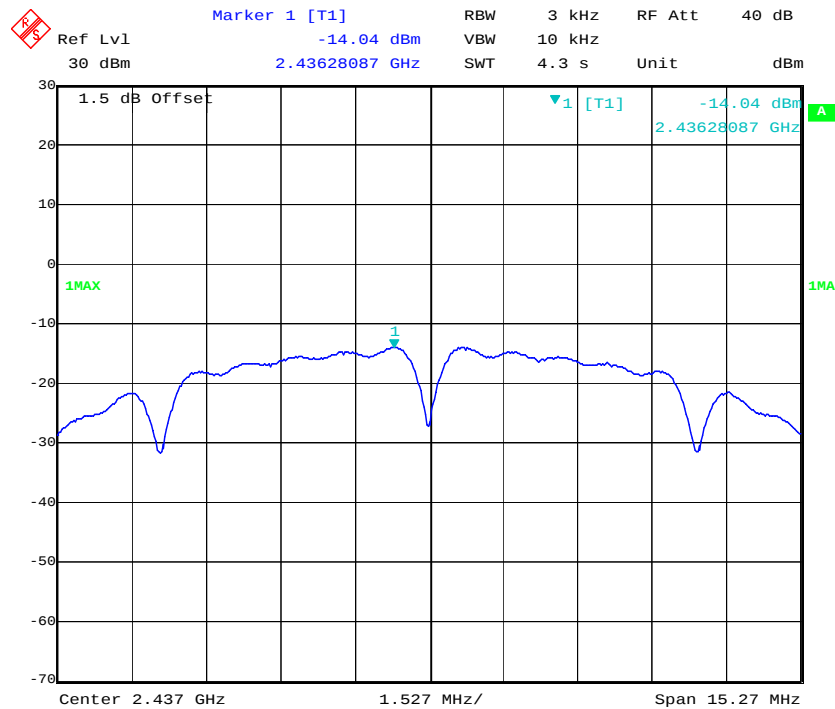


Date: 11.JAN.2019 15:06:49

Power Spectral Density, 802.11b High Channel

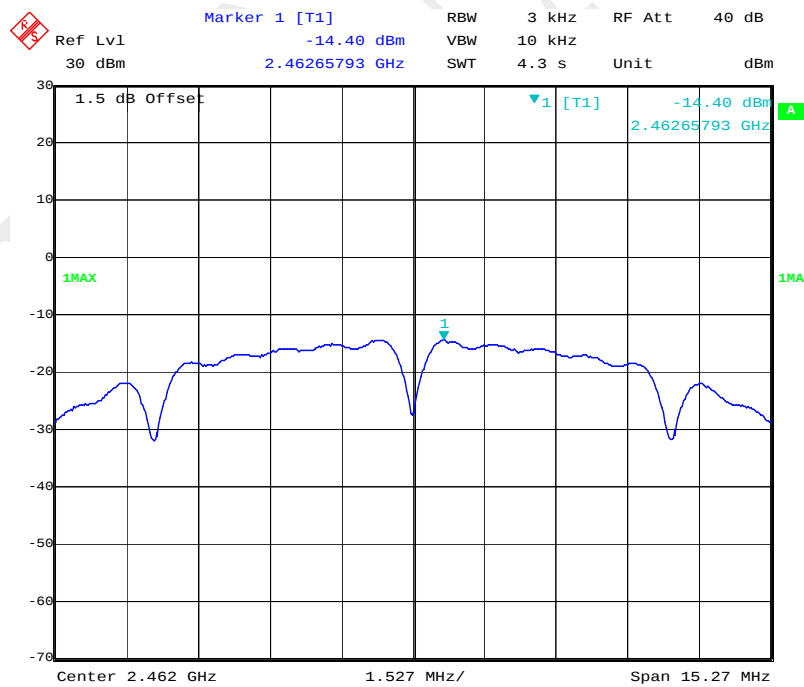


Date: 11.JAN.2019 15:08:43


Power Spectral Density, 802.11g Low Channel

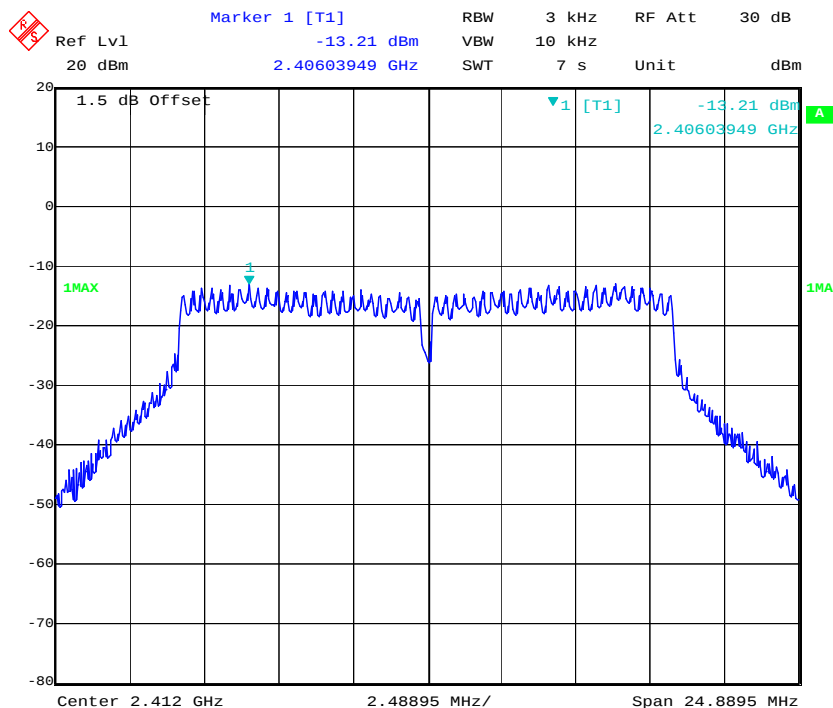

Power Spectral Density, 802.11g Middle Channel

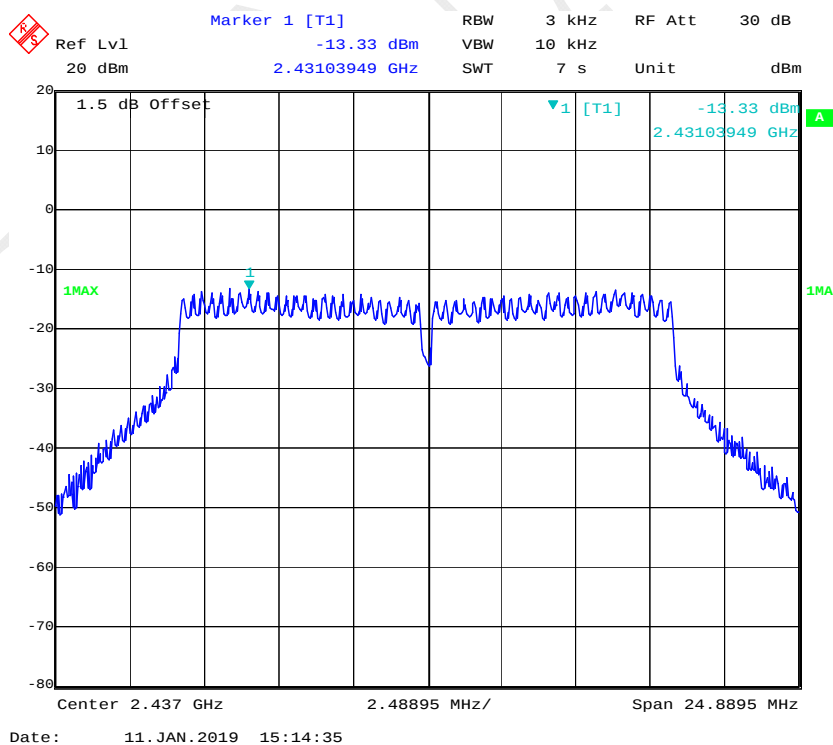


Power Spectral Density, 802.11g High Channel

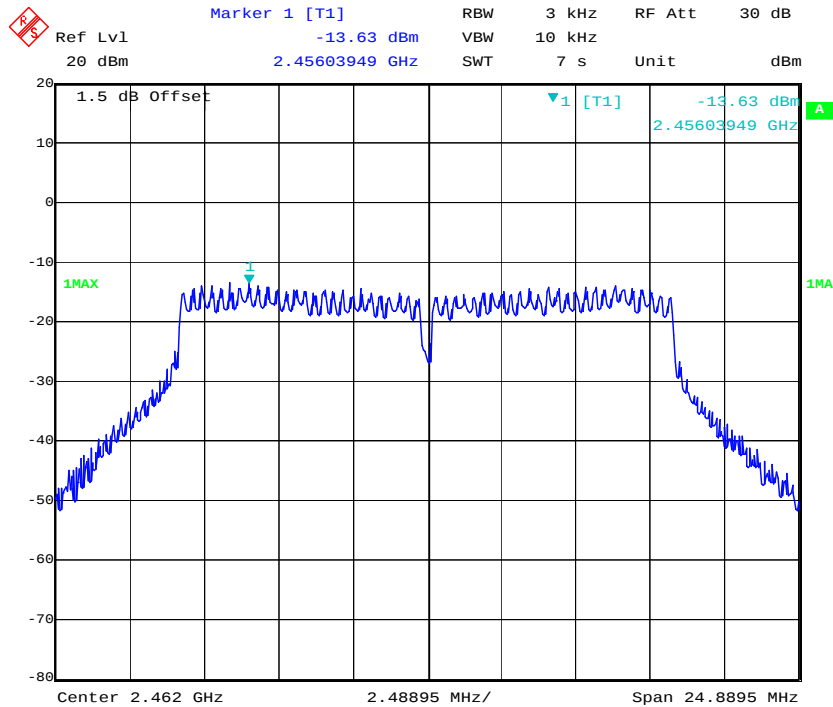


Date: 11.JAN.2019 15:16:11

Power Spectral Density, 802.11n ht20 Low Channel

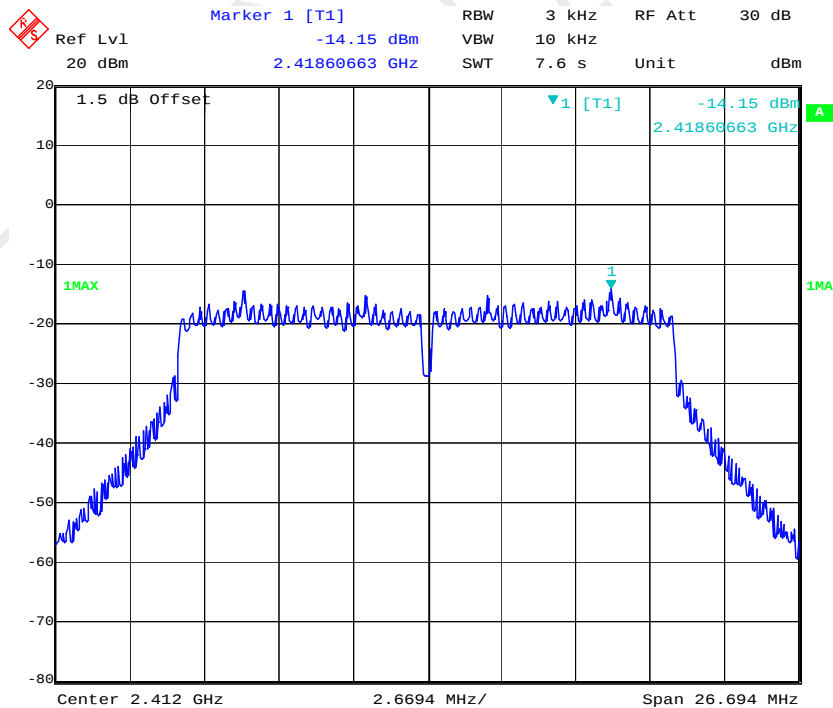


Date: 11.JAN.2019 15:19:10


Power Spectral Density, 802.11n ht20 Middle Channel

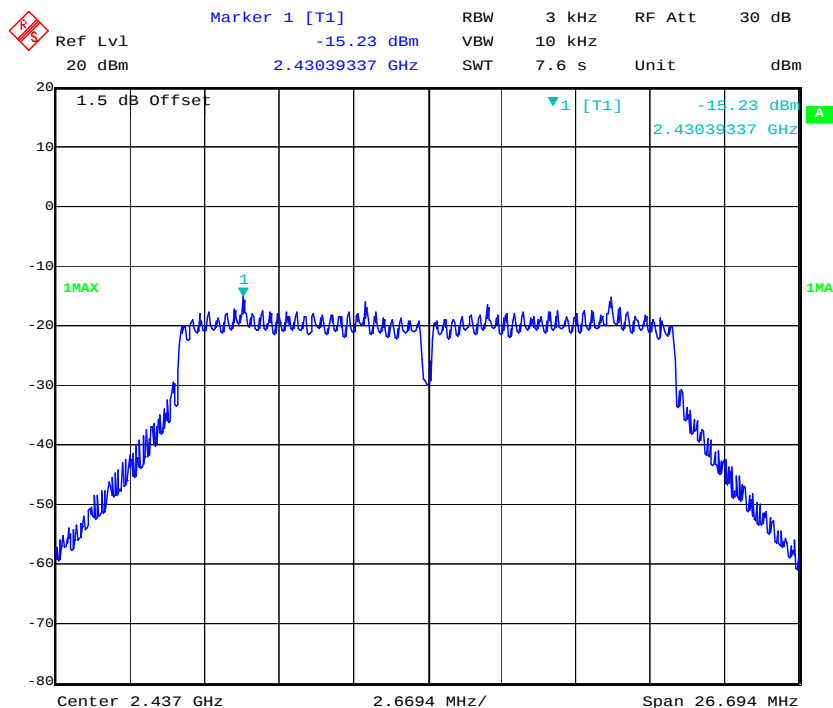


Power Spectral Density, 802.11n ht20 High Channel

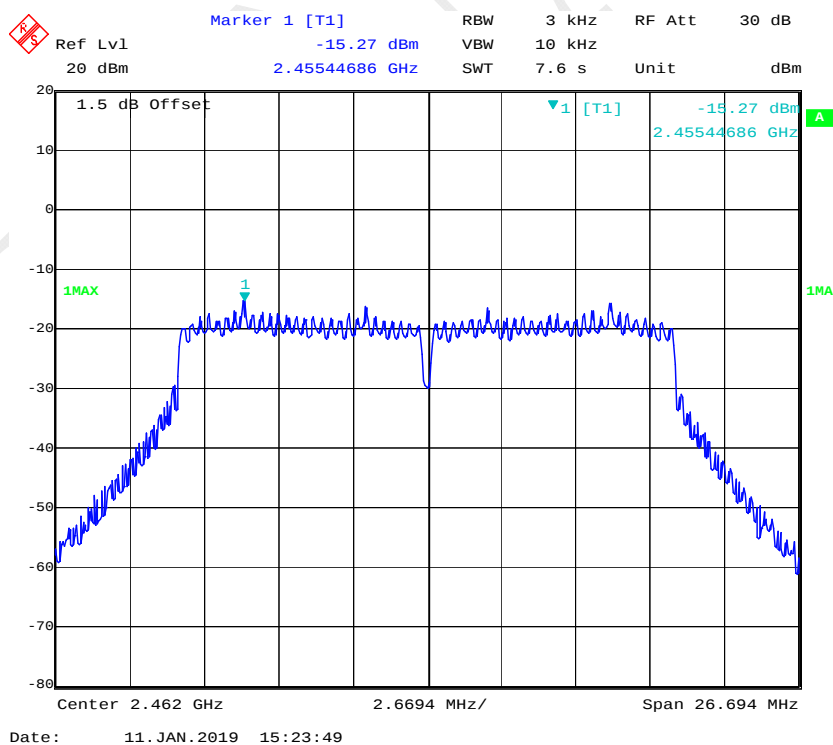


Power Spectral Density, 802.11n ht40 Low Channel

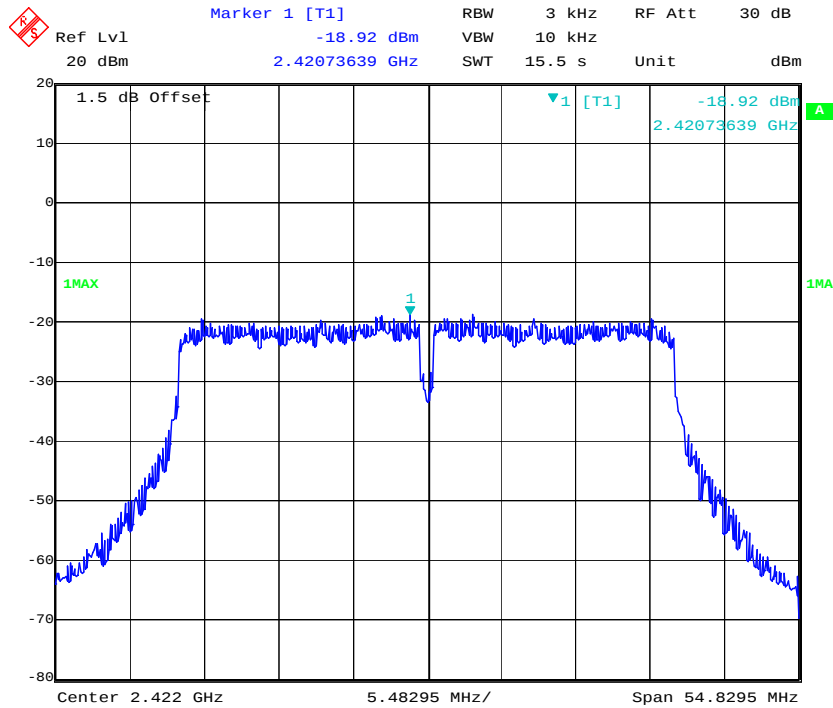

Power Spectral Density, 802.11n ht40 Middle Channel

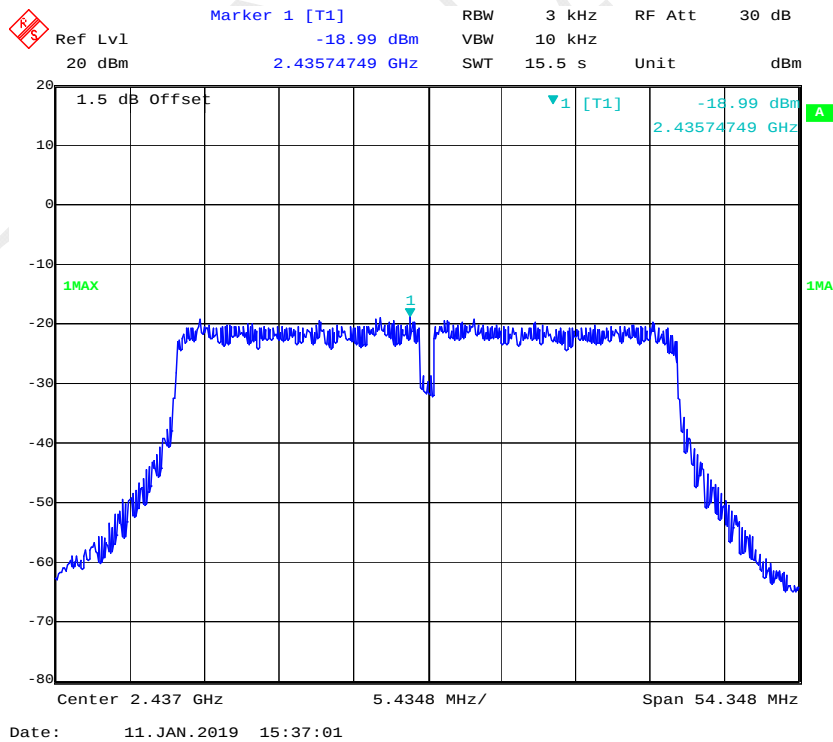

Power Spectral Density, 802.11n ht40 High Channel

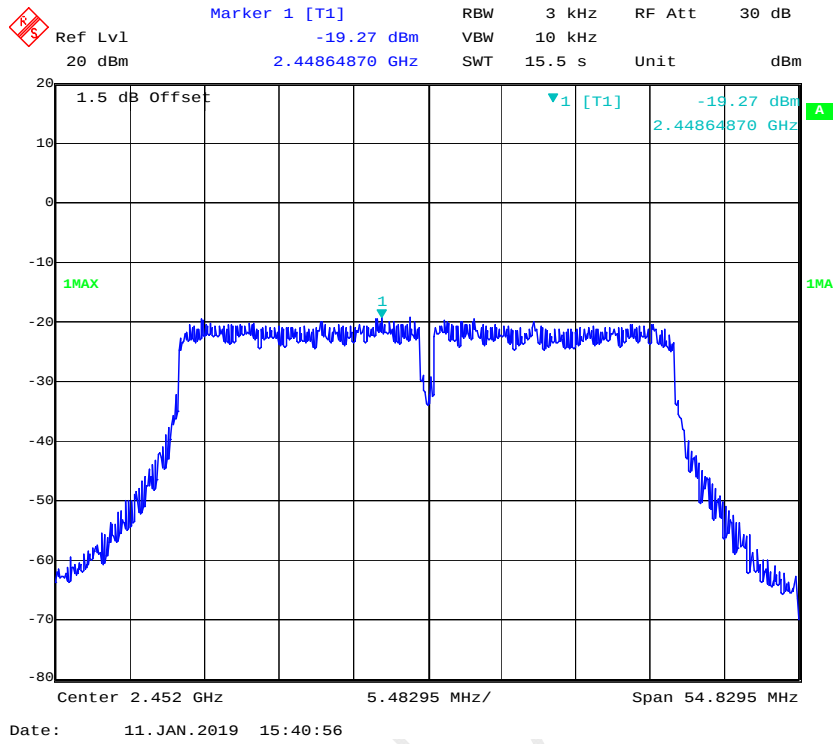

***** END OF REPORT *****