



EMC

TEST REPORT

REPORT NO. : F87110205A
MODEL NO. : 9000A
DATE OF TEST : Nov. 25, 1998

PREPARED FOR: BEHAVIOR TECH COMPUTER CORP.

ADDRESS : 2F, NO.51, TUNG HSING. RD.,
TAIPEI, TAIWAN, R.O.C.

PREPARED BY: ADVANCE DATA TECHNOLOGY CORPORATION



Accredited Laboratory

11F, NO.1, SEC.4, NAN-KING EAST RD.,
TAIPEI, TAIWAN, R.O.C.

This test report consists of 13 pages in total. It may be duplicated completely for legal use with the allowance of the applicant. It shall not be reproduced except in full, without the written approval of our laboratory. It should not be used by the client to claim product endorsement by NVLAP or any agency of the U.S. government. The test result in the report only applies to the tested sample.



TABLE OF CONTENTS

1. CERTIFICATION	3
2. GENERAL INFORMATION	4
2.1 GENERAL DESCRIPTION OF EUT	4
2.2 DESCRIPTION OF SUPPORT UNITS	5
2.3 TEST METHODOLOGY AND CONFIGURATION	5
3. TEST INSTRUMENTS	6
3.1 TEST INSTRUMENTS (EMISSION)	6
3.2 LIMITS OF CONDUCTED AND RADIATED EMISSION.....	7
4. TEST RESULTS (EMISSION)	8
4.1 RADIO DISTURBANCE	8
4.2 EUT OPERATION CONDITION	8
4.3 TEST DATA OF CONDUCTED EMISSION	9
4.4 TEST DATA OF RADIATED EMISSION	10
5. PHOTOGRAPHS OF THE TEST CONFIGURATION WITH MINIMUM MARGIN	12



1.

CERTIFICATION

Issue Date: Dec. 04, 1998

Product : KEYBOARD
Trade Name : BTC, HP
Model No. : 9000A
Applicant : BEHAVIOR TECH COMPUTER CORP.
Standard : FCC Part 15, Subpart B, Class B
ANSI C63.4-1992
CISPR 22:1993+A1: 1995+A2: 1997

We hereby certify that one sample of the designation has been tested in our facility on Nov. 25, 1998. The test record, data evaluation and Equipment Under Test (EUT) configurations represent herein are true and accurate representation of the measurements of the sample's EMC characteristics under the conditions herein specified.

The test results show that the EUT as described in this report is in compliance with the Class B limits of conducted and radiated emission of applicable standards

TESTED BY: John Liao, DATE: 12/4/98
(John Liao)

CHECKED BY: Ariel Hsieh, DATE: 12/4/98
(Ariel Hsieh)

APPROVED BY: Mike Su, DATE: 12/04/98
(Mike Su)

ADVANCE DATA TECHNOLOGY CORPORATION

NVLAP[®]

Accredited Laboratory



2. GENERAL INFORMATION

2.1 GENERAL DESCRIPTION OF EUT

Product	:	KEYBOARD
Model No.	:	9000A
Power Supply	:	DC 5V (from PC)
Data Cable	:	Shielded (1.8m)

Note: For more detailed features description, please refer to manufacturer's specification or User's Manual.



2.2 DESCRIPTION OF SUPPORT UNITS

The EUT has been tested as an independent unit together with other necessary accessories or support units. The following support units or accessories are used to form representative test configuration during the tests.

No	Product	Brand	Model No.	FCC DoC	I/O Cable
1	PERSONAL COMPUTER	HP	VL SERIES 4 5/100	B94VECTRA500T	Nonshielded Power (1.8m)
2	MONITOR	HP	D2846	FCC DoC Approved	Shielded Signal (1.2m) Nonshielded Power (1.8m)
3	PRINTER	HP	2225C+	DSI6XU2225	Shielded Signal (1.2m) Nonshielded Power (1.8m)
4	MODEM	ACEEX	1414	IFAXDM1414	Shielded Signal (1.2m) Nonshielded Power (1.8m)
5	MOUSE	DEXIN	A2P800A	NIYA2P800A	Shielded Signal (1.5m)
6	SPEAKER	JAZZ HIPSTER	J-008	N/A	Shielded Signal (1.0m)
7	SOUND CARD	Ya Hsin	Audio 1869	FCC DoC Approved	N/A
8	VGA CARD	GORDIA	DSV3365	LUT-DSV3365	N/A

2.3 TEST METHODOLOGY AND CONFIGURATION

Both conducted and radiated testing were performed according to the procedures in ANSI C63.4: 1992. Radiated testing was performed at an antenna to EUT distance of 10 m on an open area test site.

Please refer to the photos of test configuration in Item 5.



3. TEST INSTRUMENTS

3.1 TEST INSTRUMENTS (EMISSION)

RADIATED EMISSION MEASUREMENT

Description & Manufacturer	Model No.	Serial No.	Calibrated Until
HP Spectrum Analyzer	8594A	3144A00308	Sept. 3, 1999
HP Preamplifier	8447D	2944A08119	Jan. 20, 1999
ROHDE & SCHWARZ TEST RECEIVER	ESVP	893496/030	July 15, 1999
SCHWARZBECK Tunable Dipole Antenna	VHA 9103 UHA 9105	E101051 E101055	Nov. 25, 1999
CHASE Bilog Antenna	CBL6112A	2329	Sept. 19, 1999
EMCO Turn Table	1060	1195	N/A
EMCO Tower	1051	1163	N/A
Open Field Test Site	Site 2	ADT-R02	Sept. 18, 1999

- Note: 1. The measurement uncertainty is less than +/- 3dB, which is calculated as per NAMA's document NIS81.
2. The calibration interval of the above test instruments is 12 months. And the calibrations are traceable to NML/ROC and NIST/USA.

CONDUCTED EMISSION MEASUREMENT

Description & Manufacturer	Model No.	Serial No.	Calibrated Until
ROHDE & SCHWARZ Test Receiver	ESH3	893495/006	July 15, 1999
ROHDE & SCHWARZ Spectrum Monitor	EZM	893787/013	July 16, 1999
ROHDE & SCHWARZ Artificial Mains Network	ESH3-Z5	839135/006	July 14, 1999
EMCO-L.I.S.N.	3825/2	9204-1964	July 14, 1999
Shielded Room	Site 2	ADT-C02	N/A

- Note: 1. The measurement uncertainty is less than +/- 2.6dB, which is calculated as per NAMA's document NIS81.
2. The calibration interval of the above test instruments is 12 months. And the calibrations are traceable to NML/ROC and NIST/USA.



3.2 LIMITS OF CONDUCTED AND RADIATED EMISSION

LIMIT OF RADIATED EMISSION OF CISPR 22

FREQUENCY (MHz)	Class A (at 10m)	Class B (at 10m)
	dBuV/m	dBuV/m
30 - 230	40	30
230 - 1000	47	37

LIMIT OF RADIATED EMISSION OF FCC PART 15, SUBPART B FOR FREQUENCY ABOVE 1000 MHz

FREQUENCY (MHz)	Class A (at 10m)		Class B (at 3m)	
	uV/m	dBuV/m	uV/m	dBuV/m
Above 1000	300	49.5	500	54.0

Note: (1) The lower limit shall apply at the transition frequencies.

(2) Emission level (dBuV/m) = 20 log Emission level (uV/m).

(3) All emanation from a class A/B digital device or system, including any network of conductors and apparatus connected thereto, shall not exceed the level of field strengths specified above.

LIMIT OF CONDUCTED EMISSION OF CISPR 22

FREQUENCY (MHz)	Class A (dBuV)		Class B (dBuV)	
	Quasi-peak	Average	Quasi-peak	Average
0.15 - 0.5	79	66	66 - 56	56 - 46
0.50 - 5.0	73	60	56	46
5.0 - 30.0	73	60	60	50

Note: (1) The lower limit shall apply at the transition frequencies.

(2) The limit decreases linearly with the logarithm of the frequency in the range 0.15 to 0.50 MHz

(3) All emanation from a class A/B digital device or system, including any network of conductors and apparatus connected thereto, shall not exceed the level of field strengths specified above.



4. TEST RESULTS (EMISSION)

4.1 RADIO DISTURBANCE

Frequency Range : 0.15 - 30 MHz (Conducted Emission)
30 - 1000 MHz (Radiated Emission)
Input Voltage : 120 Vac, 60 Hz
Temperature : 21 °C
Humidity : 86 %
Atmospheric Pressure : 1003 mbar

TEST RESULT	Remarks
PASS	Minimum passing margin of conducted emission: -14.1 dB at 0.239 MHz Minimum passing margin of radiated emission: - 3.6 dB at 132.63 MHz

4.2 EUT OPERATION CONDITION

1. Turn on the power of all equipments.
2. PC runs a test program to enable all functions.
3. PC sends "H" messages to monitor and monitor displays "H" patterns on screen.
4. PC sends "H" messages to modem.
5. PC sends "H" messages to printer, and the printer prints them on paper.
6. PC sends audio message to external speaker.
7. Repeat steps 3-7.



4.3 TEST DATA OF CONDUCTED EMISSION


EUT: **KEYBOARD**MODEL: **9000A**6 dB Bandwidth: 10 kHz

Freq. [MHz]	L Level		N Level		Limit		Margin [dB (μV)]			
	[dB (μV)]		[dB (μV)]		[dB (μV)]		L		N	
	QP	AV	QP	AV	QP	AV	QP	AV	QP	AV
0.159	42.8	-	50.3	-	65.5	55.51	-22.7	-	-15.2	-
0.239	42.4	-	48.0	-	62.1	52.1	-19.7	-	-14.1	-
0.376	42.0	-	39.8	-	58.3	48.3	-16.3	-	-18.5	-
0.796	28.1	-	25.0	-	56.0	46.0	-27.9	-	-31.0	-
10.397	31.2	-	30.2	-	60.0	50.0	-28.8	-	-29.8	-
24.995	32.6	-	32.8	-	60.0	50.0	-27.4	-	-27.2	-

- Remarks:
1. "*": Undetectable
 2. Q.P. and AV. are abbreviations of quasi-peak and average individually.
 3. "-": The Quasi-peak reading value also meets average limit and measurement with the average detector is unnecessary.
 4. The emission levels of other frequencies were very low against the limit.

dBuV

Mkr 0.168742MHz 46.2dBuV

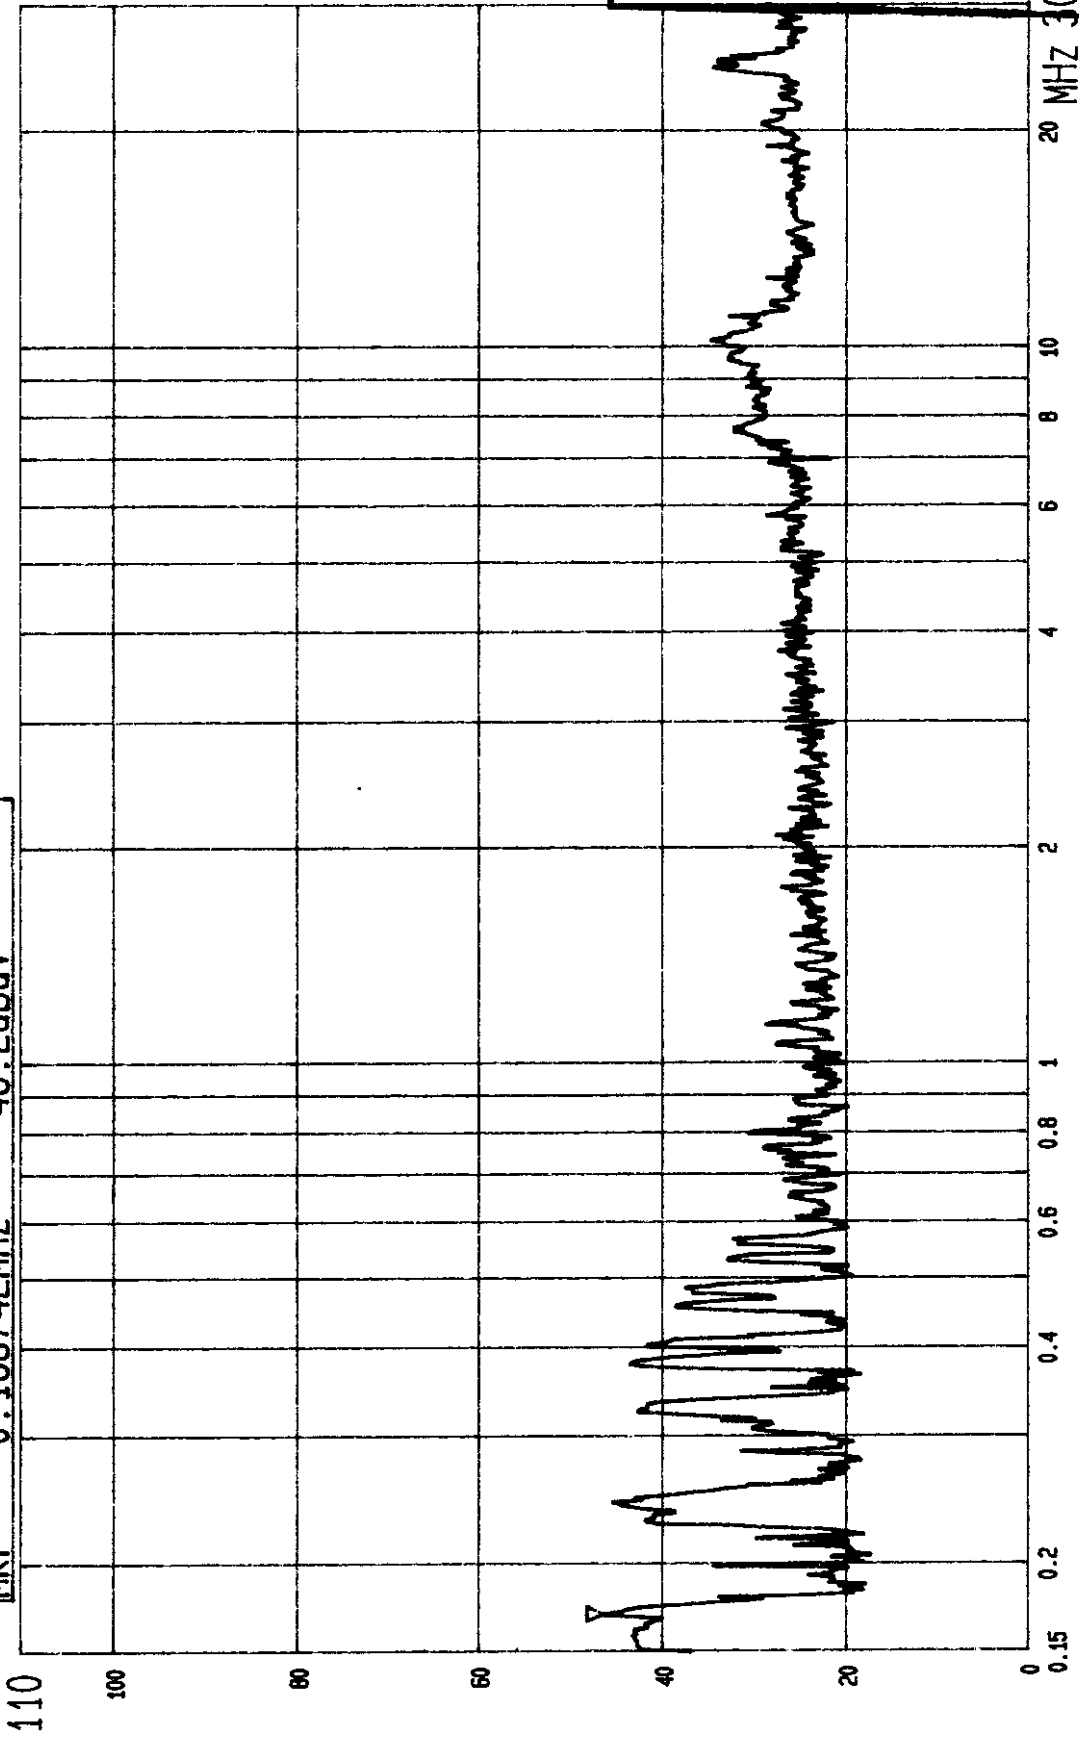

Report No. F87110305A
Page 9-1
Tested by John Liao

--- Date 25.NOV.'98 Time 09:20:00

CISPR 22 CLASS B CONDUCTION TEST (PEAK VALUE)

ADT CORP.
LISN: L

MODE: 9000A

dBuV

Mkr 0.165788MHz 52.5dBuV

110

100

80

60

40

20

0

0.15

0.2

0.4

0.6

0.8

1

2

4

6

8

10

20

30

MHz

Report No. F87110205A

Page 9-2

Tested by John Liab

--- Date 25.NOV.'98 Time 09:18:11

CISPR 22 CLASS B CONDUCTION TEST

MODE: 9000A

(PEAK VALUE)

ADT CORP.

LISN: N



4.4 TEST DATA OF RADIATED EMISSION

EUT: **KEYBOARD**MODEL: **9000A**POLARITY: HorizontalDETECTOR FUNCTION: Quasi-peak6 dB BANDWIDTH: 120 kHzFREQUENCY RANGE: 30-1000 MHzMEASURED DISTANCE: 10 M

Frequency (MHz)	Correction Factor (dB/m)	Reading Data (dBuV)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)
66.34	7.5	7.5	15.0	30.0	-15.0
84.59	9.1	12.3	21.4	30.0	-8.6
109.98	13.1	7.4	20.5	30.0	-9.5
132.64	13.9	10.8	24.7	30.0	-5.3
162.67	11.3	6.4	17.7	30.0	-12.3
167.08	11.4	7.2	18.6	30.0	-11.4
198.94	11.8	10.1	21.9	30.0	-8.1
232.10	14.2	12.5	26.7	37.0	-10.3

- REMARKS:
1. Emission level (dBuV/m) = Correction Factor (dB/m) + Meter Reading (dBuV).
 2. Correction Factor (dB/m) = Ant. Factor (dB/m) + Cable loss (dB)
 3. The other emission levels were very low against the limit.
 4. Margin value = Emission level - Limit value



TEST DATA OF RADIATED EMISSION

EUT: **KEYBOARD**MODEL: **9000A**POLARITY: VerticalDETECTOR FUNCTION: Quasi-peak6 dB BANDWIDTH: 120 kHzFREQUENCY RANGE: 30-1000 MHzMEASURED DISTANCE: 10 M

Frequency (MHz)	Correction Factor (dB/m)	Reading Data (dBuV)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)
66.38	6.6	13.5	20.1	30.0	-9.9
76.63	7.2	14.2	21.4	30.0	-8.6
86.52	8.9	13.3	22.2	30.0	-7.8
132.63	14.2	12.2	26.4	30.0	-3.6
198.94	12.6	9.7	22.3	30.0	-7.7
232.10	14.1	15.7	29.8	37.0	-7.2
265.25	16.0	7.4	23.4	37.0	-13.6
534.60	23.0	5.4	28.4	37.0	-8.6

- REMARKS:
1. Emission level (dBuV/m) = Correction Factor (dB/m) + Meter Reading (dBuV).
 2. Correction Factor (dB/m) = Ant. Factor (dB/m) + Cable loss (dB)
 3. The other emission levels were very low against the limit.
 4. Margin value = Emission level - Limit value



TEL:(02)2603-2180-3

FAX:(02)2602-2943

TEST REPORT & CERTIFICATION SERVICES QUESTIONNAIRE

We, ADT Corp., would like to provide you a high quality report and certification in a timely manner. To achieve this goal, we would like you to response to the brief questions listed below in this questionnaire. Therefore your feed back is vital to us in order to determine how good our services are, and what areas could be improved.

*Please indicate beside each question what you feel is the rating. Also, feel free to make comments and suggestions directly on this questionnaire, or by attaching separate sheet. The completed form should then be returned by mail or FAX to **Harris W. Lai**, Director. Your cooperation and effort are truly appreciated.*

TEST REPORT NUMBER : _____

	YES	NO
1. Was the information presented clearly	[]	[]
2. Was the report complete ?	[]	[]
3. Was the report timely ?	[]	[]
4. Did the report satisfy your requirement ?	[]	[]
5. Was the Certification (if any) completed in the scheduled time ?	[]	[]
Your working field ?	[] Engineering	[] Manufacturing
	[] Marketing	[] Other

YOUR CONTACT INFORMATION (OPTIONAL) : _____

OPTIONAL COMMENTS : _____