



ELECTROMAGNETIC COMPATIBILITY TEST REPORT

Company : ASKEY COMPUTER CORP.
Address : 10F, NO.119, CHIENKANG RD., CHUNG-HO, TAIPEI,
TAIWAN, R.O.C.
Product name : Wireless CABLE Router
Model name : CME063W
Date Received : Sept. 24, 2002
Date Tested : Sept. 24-26, 2002

MEASUREMENT REQUIREMENT USED :

47 CFR Part 15, Subpart B and Subpart C (Section 15.247),
ANSI C63.4-1992

WE HEREBY CERTIFY THAT: The measurements shown in the attachment were made in accordance with the procedures indicated, and the energy emitted by the equipment was found to be within the limits applicable. We assume full responsibility for the accuracy and completeness of these measurements and vouch for the qualifications of all persons taking them.

	Name	Signature	Date
Testing Engineer	M. C. Huang/NVLAP	M.C. Huang	Oct. 17, 2002
Approving Manager	C.F. Wu/NVLAP	C.F. Wu	Oct. 07, 2002

Notes :

1. This report will be invalid if duplicated or photocopied in part.
2. This report refers only to the specimen(s) submitted to test, and is invalid as separately used.
3. This report is invalid without examination stamp and signature of this institute.
4. The tested specimen(s) will be preserved for thirty days from the data issued.
5. The report must not be used to claim product certification, approval, or endorsement by NVLAP, NIST, or any agency of the federal government.



TABLE OF CONTENTS

TITLE	PAGE NO.
1. GENERAL INFORMATION.....	4
1.1 GENERAL STATEMENT.....	4
1.2 GENERAL DESCRIPTION OF EUT & POWER.....	4
1.3 DESCRIPTION OF PERIPHERALS.....	5-6
1.4 EUT & PERIPHERALS SETUP DIAGRAM.....	7
1.5 EUT OPERATING CONDITION.....	7
1.6 DESCRIPTION OF TEST SITE.....	8
1.7 SUMMARY OF TEST RESULTS.....	8
2. CONDUCTED POWERLINE TEST.....	9
2.1 TEST EQUIPMENTS.....	9
2.2 TEST SETUP.....	9
2.3 CONDUCTED POWER LINE EMISSION LIMIT.....	10
2.4 TEST PROCEDURE.....	10
2.5 UNCERTAINTY OF CONDUCTED EMISSION.....	10
2.6 CONDUCTED RF VOLTAGE MEASUREMENT.....	11-12
2.7 PHOTOS OF CONDUCTION TEST.....	13
3. RADIATED EMISSION TEST.....	14
3.1 TEST EQUIPMENTS.....	14
3.2 TEST SETUP.....	14
3.3 RADIATION LIMIT.....	15
3.4 TEST PROCEDURES.....	16
3.5 UNCERTAINTY OF RADIATED EMISSION.....	16
3.6 RADIATED RF NOISE MEASUREMENT.....	17-26
3.7 PHOTOS OF OPEN SITE.....	27
3.7 PHOTOS OF OPEN SITE.....	28
4. 6dB BANDWIDTH MEASUREMENT.....	29
4.1 TEST EQUIPMENTS.....	29
4.2 TEST SETUP.....	29
4.3 LIMITS OF 6dB BANDWIDTH MEASUREMENT.....	29
4.4 TEST PROCEDURE.....	29
4.5 UNCERTAINTY OF CONDUCTED EMISSION.....	29
4.6 TEST RESULTS.....	30
4.7 PHOTO OF 6DB BANDWIDTH MEASUREMENT.....	31
5. MAXIMUM PEAK OUTPUT POWER.....	32
5.1 TEST EQUIPMENTS.....	32
5.2 TEST SETUP.....	32
5.3 LIMITS OF MAXIMUM PEAK OUTPUT POWER.....	32
5.4 TEST PROCEDURE.....	33
5.5 UNCERTAINTY OF CONDUCTED EMISSION.....	33
5.6 TEST RESULTS.....	33
6. POWER SPECTRAL DENSITY MEASUREMENT.....	34
6.1 TEST EQUIPMENTS.....	34
6.2 TEST SETUP.....	34
6.3 LIMITS OF POWER SPECTRAL DENSITY MEASUREMENT.....	34
6.4 TEST PROCEDURE.....	35
6.5 UNCERTAINTY OF CONDUCTED EMISSION.....	35
6.6 TEST RESULTS.....	35
6.7 PHOTO OF POWER SPECTRAL DENSITY MEASUREMENT.....	36



TABLE OF CONTENTS

TITLE	PAGE NO.
7. OUT OF BAND MEASUREMENT	37
7.1 TEST EQUIPMENTS.....	37
7.2 TEST SETUP.....	37
7.3 LIMITS OF OUT OF BAND EMISSIONS MEASUREMENT	37
7.4 TEST PROCEDURE	38
7.5 UNCERTAINTY OF CONDUCTED EMISSION.....	38
7.6 TEST RESULTS	38
7.7 PHOTO OF OUT OF BAND MEASUREMENT	39
8. ANTENNA REQUIREMENT	40
8.1 STANDARD APPLICABLE.....	40
8.2 ANTENNA CONNECTED CONSTRUCTION	40
9. RF EXPOSURE EVALUATION.....	41
9.1 FRIIS FORMULA	41
9.2 EUT OPERATING CONDITION.....	41
9.3 TEST RESULT OF RF EXPOSURE EVALUATION	42
9.3.1 ANTENNA GAIN	42
9.3.2 OUTPUT POWER INTO ANTENNA & RF EXPOSURE EVALUATION DISTANCE.....	42



1. GENERAL INFORMATION

1.1 GENERAL STATEMENT

MEASUREMENT DEVIATION : Comply with standard in full

TRACEABILITY : This test result is traceable to national or international std.

1.2 GENERAL DESCRIPTION OF EUT & POWER

MANUFACTURER : ASKEY COMPUTER CORP.

SAMPLE NAME : Wireless CABLE Router

MODEL NO : CME063W

FREQUENCY RANGE : 2412 MHz TO 2462MHz

CHANNEL NUMBER : 11

AIR DATA RATE : 11Mbps (Highest Mode)

TYPE OF MODULATION : DIRECT SEQUENCE SPREAD SPECTRUM

FREQUENCY SELECTION : BY SOFTWARE

EUT Description : 2.4GHz Direct Sequence Spread Spectrum Data Transceiver
for 11Mbps Wireless CABLE Router

ANTENNA TYPE : CERAMIC ANTENNA

Power Adapter :

Manufacturer : DELTA ELECTRONICS, INC.

Model Number : ADP-12SB Rev.B

Input Power : 100-240VAC / 50~60Hz

Output Power : 12VDC



1.3 DESCRIPTION OF PERIPHERALS

(1) Notebook PC

MANUFACTURER : DELL CORP.
MODEL NUMBER : PP01L
SERIAL NUMBER : CN-09C748-48155-1AP-6081
F.C.C. : DOC
POWER CORD : Unshielded, Detachable, 1.8m

(2) MODEM

MANUFACTURER : ZyXEL CORP.
MODEL NUMBER : omni 56K
SERIAL NUMBER : S1Z4107729
F.C.C. ID : I880MNI56K
POWER CORD : UnShielded , Detachable , 1.8m (9VAC from Power Adapter)

(3) PRINTER

MANUFACTURER : HP CORP.
MODEL NUMBER : C6431D
SERIAL NUMBER : CN19T6S011
F.C.C. : DOC
POWER CORD : Unshielded , Detachable , 1.8m
DATA CABLE : Shielded , Detachable , 1.2m

(4) MONITOR

MANUFACTURER : HP CORP.
MODEL NUMBER : D8894A
SERIAL NUMBER : CN00905269
F.C.C. ID : ARSCM569N
POWER CORD : UnShielded , Detachable , 1.8m
SIGNAL CABLE : Shielded , Undetachable , 1.8m

(5) KEYBOARD

MANUFACTURER : HP CORP.
MODEL NUMBER : SK-2502C
SERIAL NUMBER : M000303429
F.C.C. ID : -----
POWER SOURCE : 5VDC (from Notebook PC)
SIGNAL CABLE : Shielded , Undetachable , 1.8m



(6) MOUSE

MODEL NUMBER : M-S34
SERIAL NUMBER : LZE95050431
MANUFACTURER : HP CORP.
FCC ID : DZL211029
SIGNAL CABLE : Shielded , Undetachable , 1.8m
POWER SOURCE : 5VDC (from PC)

(7) PC


MANUFACTURER : HP CORP.
MODEL NUMBER : 8894
SERIAL NUMBER : P3129-WOYO
F.C.C. : DOC
POWER CORD : Unshielded, Detachable, 1.8m

(8) CABLE

	Type	Connector	shielded	Length
(A)	Cross-over Cat5 twisted-pair	RJ-45, Plastic	NO	15m
(B)	Telephone Line	RJ-45, Plastic	NO	15m



1.4 EUT & PERIPHERALS SETUP DIAGRAM

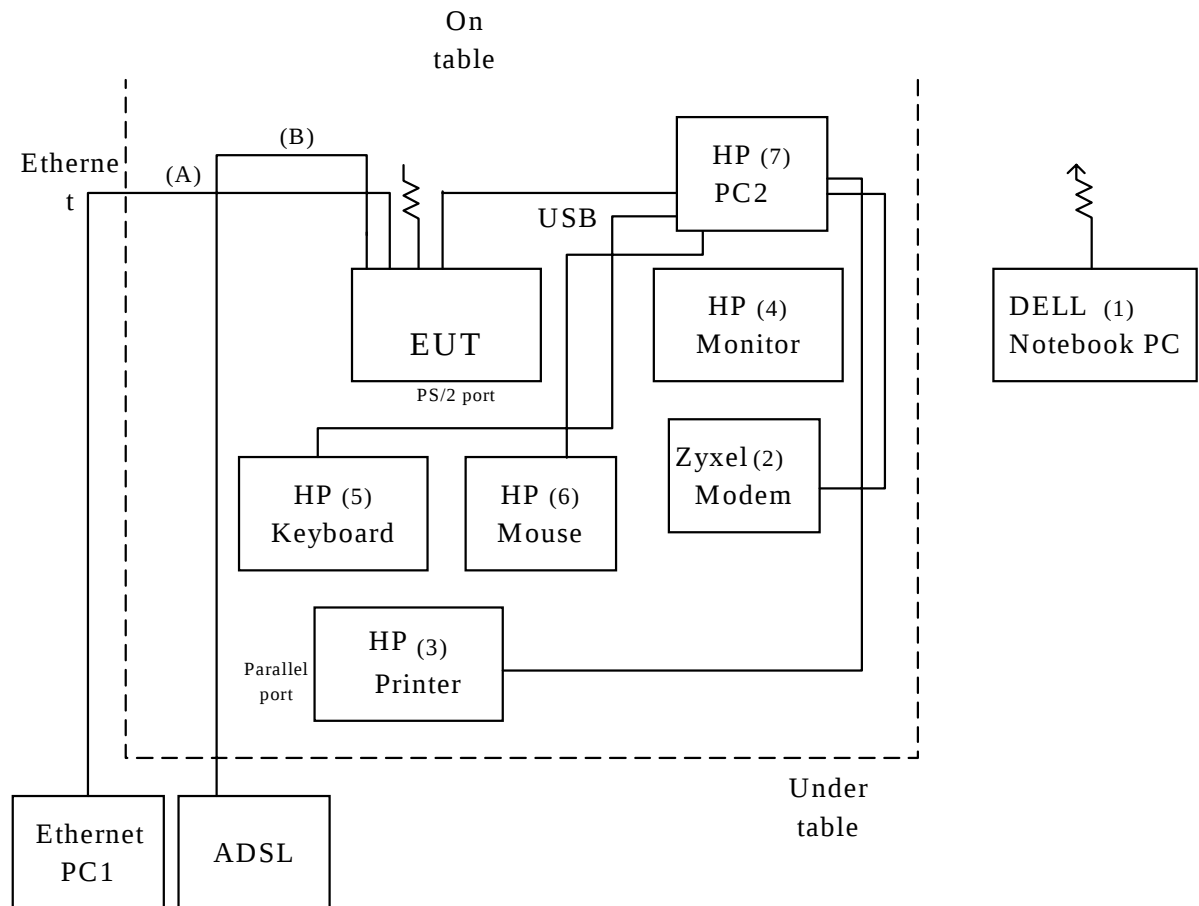

The indicated numbers (1) (2)..., Please refer to item
1.3

1.5 EUT OPERATING CONDITION

1. Set up all computer like the setup diagram.
2. PC2 ping 10.0.0.1-t-1 1024.
3. PC1 ping 10.0.0.1-t-1 1024.
4. Notebook PC ping 192.168.1.1 -t-1 1024.
5. All of the function are under run.
6. Start test.



1.6 DESCRIPTION OF TEST SITE

SITE DESCRIPTION : FCC certificate NO. : 31040/PRV
TUV certificate NO. : I9664582-9911
BSMI certificate NO. : SL2-IN-E-0002
NVLAP Lab code : 200118-0
CNLA certificate NO. : CNLA-ZL97018
VCCI certificate NO. : R-1229, C-1250

NAME OF SITE : Electronics Research & Service Organization
Industrial Technology Research Institute

SITE LOCATION : R1500, 195-4, sec. 4, Chung Hsing Rd., Chu-Tung Chen.
Hsin-Chu, Taiwan 310 R.O.C.

1.7 SUMMARY OF TEST RESULTS

The EUT has been tested according to the following specifications :

APPLIED STANDARD : 47 CFR Part 15, Subpart B and Subpart C			
Standard Section	Test Type and Limit	Result	REMARK
15.107 15.207	AC Power Conducted Emission Limit : 48dBuV	PASS	Meet the requirement of limit
15.247(a)(2)	Spectrum Bandwidth of a Direct Sequence Spread Spectrum System Limit : 6dB bandwidth > 500KHz	PASS	Meet the requirement of limit
15.247(b)	Maximum Peak Output Power Limit : max. 30dBm	PASS	Meet the requirement of limit
15.109 15.205 15.209	Transmitter Radiated Emissions Limit : Table 15.209	PASS	Meet the requirement of limit
15.247(d)	Power Spectral Density Limit : max. 8dBm	PASS	Meet the requirement of limit
15.247(c)	Out of Band Emission and Restricted Band Radiation Limit: 20dB less than peak value of fundamental frequency Restricted band Limit: Table 15.209	PASS	Meet the requirement of limit




2. CONDUCTED POWERLINE TEST

2.1 TEST EQUIPMENTS

The following test equipments are used during the conducted powerline tests :

MANUFACTURER OR TYPE	MODEL No	SERIAL NO.	DATE OF CALIBRATION	CALIBRATION PERIOD	REMARK
SPECTRUM ANALYZER & DISPLAY	HP 8568A	2235A02320	APR. 01, 2002	1 Year	PRETEST
QUASI-PEAK ADAPTER	HP 85650 A	2341A00672	APR. 01, 2002	1 Year	PRETEST
ISOLATION TRANSFORMER	SOLAR 7032-1	N/A	N/A	N/A	FINAL
L.I.S.N.	EMCO 3850/2	9311-1025 9401-1028	JAN. 08, 2002 For Characteristic impedance MAY 18, 2002 For Insertion loss	1 Year	FINAL
TEST RECEIVER	R/S ESHS30	838550/003	JUN. 07, 2002	1 Year	FINAL
SHIELDED ROOM	KEENE 5983	NO.1	N/A	N/A	FINAL
PULSE LIMIT	R/S EHS3Z2	357.8810.52	JUL. 10, 2002	1 Year	FINAL
N TYPE COAXIAL CABLE	-----	-----	JUL. 10, 2002	1 Year	FINAL
50Ω TERMINATOR	-----	-----	JUL. 10, 2002	1 Year	FINAL

2.2 TEST SETUP

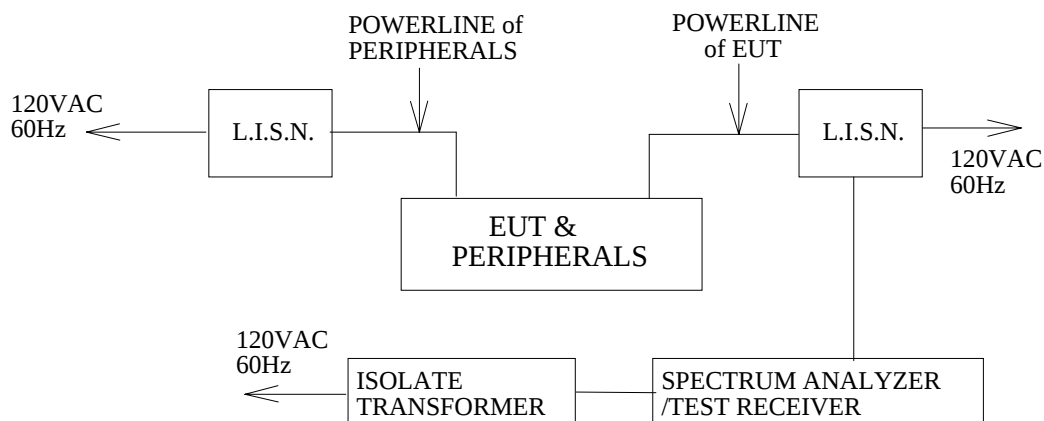



2.3 CONDUCTED POWER LINE EMISSION LIMIT

For unintentional device, according to § 15.107(a) Line Conducted Emission Limits is as following :

Frequency (MHz)	Emissions (μ V)	Emissions (dB μ V)
0.45 – 30.0	250	48.0

For intentional device, according to § 15.207(a) Line Conducted Emission Limit is same as above table.

2.4 TEST PROCEDURE

The test procedure is performed in a 12ft $\times$ 12ft $\times$ 8ft(L $\times$ W $\times$ H) shielded room. the EUT along with its peripherals were placed on a 1.0m(W) $\times$ 1.5m(L) and 0.8m in height wooden table and the EUT was adjusted to maintain a 0.4 meter space from a vertical reference plane. The EUT was connected to power mains through a line impedance stabilization network (LISN) which provides 50 ohm coupling impedance for measuring instrument and the chasis ground was bounded to the horizontal ground plane of shielded room. All peripherals were connected to the second LISN and the chasis ground also bounded to the horizontal ground plane of shielded room. The excess power cable between the EUT and the LISN was bundled. The power cables of peripherals were unbundled. All connecting cables of EUT and peripherals were moved to find the maximum emission.

2.5 UNCERTAINTY OF CONDUCTED EMISSION

The uncertainty of conducted emission is ± 1.36 dB.



2.6 CONDUCTED RF VOLTAGE MEASUREMENT

The frequency spectrum from 0.45 MHz to 30 MHz was investigated. All emissions not reported below are more than 20 dB below the prescribed limits.

Temperature : 26 °C

Humidity : 65 % RH

FREQUENCY (MHz)	READING(dB μ V)		LIMITS (dB μ V)
	ONE END & GRD'D	THE OTHER END & GRD'D	
	Q.P.	Q.P.	
0.608	31.8	*	48.00
0.701	*	32.7	48.00
1.576	36.7	35.5	48.00
2.975	35.2	*	48.00
3.071	*	36.2	48.00
4.425	33.3	34.1	48.00
8.618	35.5	*	48.00
10.594	34.2	36.8	48.00
10.763	*	35.4	48.00
24.964	*	32.00	48.00
26.181	32.4	*	48.00
30.000	*	*	48.00

REMARKS : 1. * Undetectable
2. For USB Mode



2.6 CONDUCTED RF VOLTAGE MEASUREMENT

The frequency spectrum from 0.45 MHz to 30 MHz was investigated. All emissions not reported below are more than 20 dB below the prescribed limits.

Temperature : 26 °CHumidity : 65 % RH

FREQUENCY (MHz)	READING(dB μ V)		LIMITS
	Q.P.	Q.P.	Q.P.
	ONE END & GRD'D	THE OTHER END & GRD'D	(dB μ V)
0.747	35.0	34.4	48.00
1.011	35.9	*	48.00
1.185	*	36.1	48.00
1.367	36.8	*	48.00
3.122	34.4	35.5	48.00
4.355	32.0	*	48.00
4.798	*	32.4	48.00
7.835	36.7	32.4	48.00
10.427	*	38.0	48.00
10.594	36.2	*	48.00
15.754	33.8	*	48.00
24.964	*	31.9	48.00
26.964	32.5	*	48.00
30.000	*	*	48.00

REMARKS : 1. * Undetectable
2. For ethernet Mode



2.7 PHOTOS OF CONDUCTION TEST





3. RADIATED EMISSION TEST


3.1 TEST EQUIPMENTS

The following test equipments are utilized in making the measurements contained in this report.

MANUFACTURER OR TYPE	MODEL NO	SERIAL NO	DATE OF CALIBRATION	CALIBRATION PERIOD	REMARK
CHASE BI-LOG ANTENNA	CBL6112B	2421	MAY 07, 2002	1 Year	FINAL
R/S TEST RECEIVER	ESMI	842088/005 841978/008	SEPT. 3, 2002	1 Year	FINAL
OPEN SITE	-----	No.1	JUL. 10~12, 2002	1 Year	FINAL
N TYPE COAXIAL CABLE	CHA9525	4	JUL. 13, 2002	1 Year	FINAL
Horn Antenna	AH-118	10089	FEB. 25, 2002	1 Year	FINAL
HP Pre-amplifier	8449B	3008A01471	OCT. 11, 2001	1 Year	FINAL
HP High pass filter	84300/80038	011	cal. on use	1 Year	FINAL
Horn Antenna	AH-840	03077	FEB. 25, 2002	1 Year	FINAL

3.2 TEST SETUP

The diagram below shows the test setup which is utilized to make these measurements.

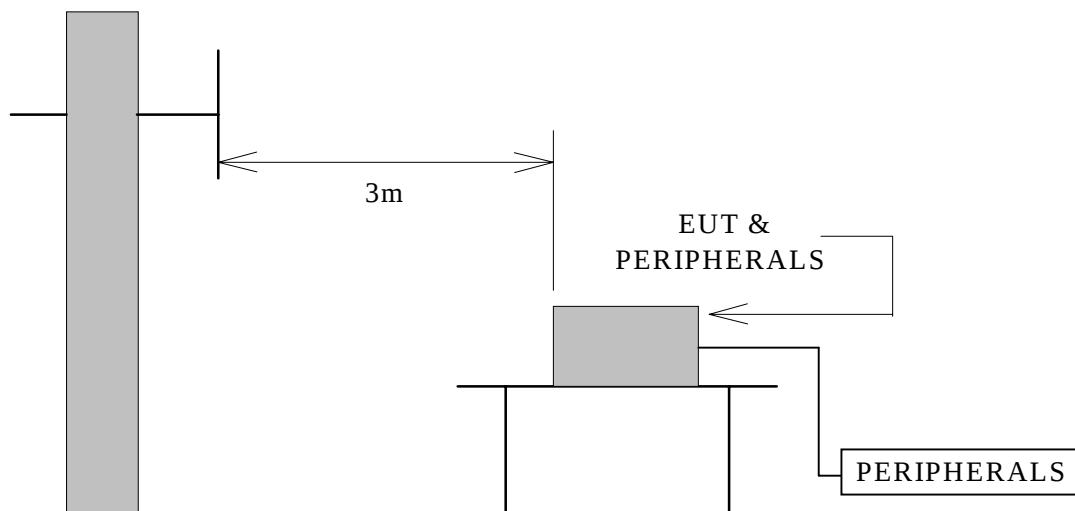

Antenna Elevation Variable



3.3 RADIATION LIMIT

For unintentional device, according to § 15.109(a), except for Class A digital devices, the field strength of radiated emissions from unintentional radiators at a distance of 3 meters shall not exceed the following values :

FREQUENCY (MHz)	DISTANCE (METERS)	Radiated (dB μ V/M)	Radiated (μ V/M)
30-88	3	40.0	100
88-216	3	43.5	150
216-960	3	46.0	200
Above 960	3	54.0	500

For intentional device, according to § 15.209(a), the general requirement of field strength of radiated emissions from intentional radiators at a distance of 3 meters shall not exceed the above table.



3.4 TEST PROCEDURES

- a. The EUT was placed on the top of a rotating table 0.8 meters above the ground at a 10 meter open area test site. The table was rotated 360 degrees to determine the position of the highest radiation.
- b. The EUT was set 3 meters away from the interference-receiving antenna, which was mounted on the top of a variable-height antenna tower.
- c. The antenna is a broadband antenna, and its height is varied from one meter to four meters above the ground to determine the maximum value of the field strength. Both horizontal and vertical polarizations of the antenna are set to make the measurement.
- d. For each suspected emission, the EUT was arranged to its worst case and then the antenna was tuned to heights from 1 meter to 4 meters and the rotatable table was turned from 0 degrees to 360 degrees to find the maximum reading.
- e. The test-receiver system was set to Peak Detect Function and Specified Bandwidth with Maximum Hold Mode.
- f. If the emission level of the EUT in peak mode was 10 dB lower than the limit specified, then testing could be stopped and the peak values of the EUT would be reported. Otherwise the emissions that did not have 10 dB margin would be re-tested one by one using peak, quasi-peak or average method as specified and then reported in a data sheet.

NOTE :

1. The resolution bandwidth and video bandwidth of test receiver/spectrum analyzer is 120 KHz for Peak detection (PK) and Quasi-peak detection (QP) at frequency below 1GHz.
2. The resolution bandwidth and video bandwidth of test receiver/spectrum analyzer is 1 MHz for Peak detection and frequency above 1GHz.
3. The resolution bandwidth of test receiver/spectrum analyzer is 1 MHz and the video bandwidth is 10 Hz for Average detection (AV) at frequency above 1GHz.

3.5 UNCERTAINTY OF RADIATED EMISSION

The uncertainty of radiated emission is $\pm 2.72\text{dB}$.



3.6 RADIATED RF NOISE MEASUREMENT

Test Requirement: 15.109, 15.209

The frequency spectrum from 30 MHz to 1000 MHz was investigated. All emissions not reported below are more than 20 dB below the prescribed limits.

All readings are quasi-peak values.

Temperature : 31 °C

Humidity : 53 % RH

FREQ- UENCY (MHz)	ANTENNA FACTOR (dB)	CABLE LOSS (dB)	METER READING AT3m(dB μ V/M)		LIMITS (dB μ V/M)	EMISSION LEVEL AT3m(dB μ V/M)	
			HORIZON- TAL	VERTICAL		HORIZON- TAL	VERTICAL
30.00	18.11	0.90	*	*	30.00	*	*
83.23	8.79	1.73	12.10	11.90	30.00	22.62	22.42
251.97	13.56	3.11	9.50	8.64	37.00	26.16	25.30
671.97	19.54	5.15	8.12	3.56	37.00	32.81	28.25
755.97	20.04	5.46	7.10	4.56	37.00	32.60	30.06
839.72	20.28	5.54	5.40	5.64	37.00	31.22	31.46
881.97	20.25	5.58	4.53	4.56	37.00	30.36	30.39
886.70	20.24	5.59	5.20	4.53	37.00	31.03	30.36
923.12	20.49	5.78	3.14	4.59	37.00	29.41	30.86
1000.00	21.34	6.40	*	*	37.00	*	*

REMARKS : 1. * Undetectable

2. Emission level (dB μ V/M) = Antenna Factor (dB/m) + Cable loss (dB)
+ Meter Reading (dB μ V).

3. According to technical experiences, all spurious emission at channel 1,6,11 are almost the same below 1GHz, so that the channel 1 was chosen as representation for the test.

4. For USB Mode



Test Requirement: 15.109, 15.209

The frequency spectrum from 30 MHz to 1000 MHz was investigated. All emissions not reported below are more than 20 dB below the prescribed limits.

All readings are quasi-peak values.

Temperature : 31 °C

Humidity : 53 % RH

FREQ- UENCY (MHz)	ANTENNA FACTOR (dB)	CABLE LOSS (dB)	METER READING AT3m(dB μ V/M)		LIMITS (dB μ V/M)	EMISSION LEVEL AT3m(dB μ V/M)	
			HORIZON- TAL	VERTICAL		HORIZON- TAL	VERTICAL
30.00	18.11	0.90	*	*	30.00	*	*
83.23	8.79	1.73	11.56	15.80	30.00	22.08	26.32
251.97	13.56	3.11	8.65	7.64	37.00	25.31	24.30
671.97	19.54	5.15	9.80	4.58	37.00	34.49	29.27
755.97	20.04	5.46	7.10	5.65	37.00	32.60	31.15
839.72	20.28	5.54	6.58	5.34	37.00	32.40	31.16
881.97	20.25	5.58	4.53	4.56	37.00	30.36	30.39
886.70	20.24	5.59	5.20	4.23	37.00	31.03	30.06
923.12	20.49	5.78	4.56	4.56	37.00	30.83	30.83
1000.00	21.34	6.40	*	*	37.00	*	*

REMARKS : 1. * Undetectable

2. Emission level (dB μ V/M) = Antenna Factor (dB/m) + Cable loss (dB)
+ Meter Reading (dB μ V).

3. According to technical experiences, all spurious emission at channel 1,6,11 are almost the same below 1GHz, so that the channel 1 was chosen as representation for the test.

4. For ethernet Mode



Test Requirement: 15.109, 15.209

The frequency spectrum above 1 GHz was investigated. All emissions not reported below are more than 40 dB below the prescribed limits. Readings are both peak and average values.

RX	CME063W	Test Date :	2002/9/23
		Test By:	M.C. Huang
Temperature :		Humidity :	65%

			CH	1	RX				
Freq.	Reading	AF	Closs	Dist	Level	Limit	Margin	Mark	Pol
(MHz)	(dBuV)	(dBuV)	(dB)	dB	(dBuV/m)	FCC_B	(dB)	(P/Q/A)	(H/V)
1151.94	17.36	25.87	6.21	9.5	39.95	54	-14.05	A	H
1151.94	18.50	25.87	6.21	9.5	41.09	54	-12.91	A	V
1151.97	23.84	25.87	6.21	9.5	46.43	74	-27.57	P	H
1151.97	25.67	25.87	6.21	9.5	48.26	74	-25.74	P	V
2037.70	21.56	32.16	6.45	9.5	50.67	74	-23.33	P	H
2037.70	10.23	32.16	6.45	9.5	39.34	54	-14.66	A	H
2037.70	20.12	32.16	6.45	9.5	49.23	74	-24.77	P	V
2037.70	18.73	32.16	6.45	9.5	47.84	54	-6.16	A	V
4075.40	24.35	32.55	9.14	9.5	56.55	74	-17.45	P	H
4075.40	14.76	32.55	9.14	9.5	46.96	54	-7.04	A	H
4075.40	25.40	32.55	9.14	9.5	57.60	74	-16.40	P	V
4075.40	11.50	32.55	9.14	9.5	43.70	54	-10.30	A	V
			CH	6	RX				
1151.94	17.36	25.87	6.21	9.5	39.95	54	-14.05	A	H
1151.94	18.50	25.87	6.21	9.5	41.09	54	-12.91	A	V
1151.97	23.84	25.87	6.21	9.5	46.43	74	-27.57	P	H
1151.97	25.67	25.87	6.21	9.5	48.26	74	-25.74	P	V
2062.97	41.20	32.14	6.53	9.5	70.37	74	-3.63	P	H
2062.97	33.60	32.14	6.53	9.5	62.77	54	8.77	A	H
2062.97	16.57	32.14	6.53	9.5	45.74	74	-28.26	P	V
2062.97	12.54	32.14	6.53	9.5	41.71	54	-12.29	A	V
4125.94	19.70	32.52	9.16	9.5	51.88	74	-22.12	P	H
4125.94	15.40	32.52	9.16	9.5	47.58	54	-6.42	A	H
4125.94	20.56	32.52	9.16	9.5	52.74	74	-21.26	P	V
4125.94	14.60	32.52	9.16	9.5	46.78	54	-7.22	A	V



Test Requirement: 15.109 ,15.209

The frequency spectrum above 1 GHz was investigated. All emissions not reported below are more than 40 dB below the prescribed limits. Readings are both peak and average values.

RX	CME063W	Test Date :	2002/9/23
		Test By:	M.C. Huang
Temperature :		Humidity :	65%

			CH	11	RX				
1151.94	17.36	25.87	6.21	9.5	39.95	54	-14.05	A	H
1151.94	17.36	25.87	6.21	9.5	39.95	54	-14.05	A	V
1151.97	23.84	25.87	6.21	9.5	46.43	74	-27.57	P	H
1151.97	23.84	25.87	6.21	9.5	46.43	74	-27.57	P	V
2087.91	16.57	32.11	6.62	9.5	45.80	74	-28.20	P	H
2087.91	12.54	32.11	6.62	9.5	41.77	54	-12.23	A	H
2087.91	17.80	32.11	6.62	9.5	47.03	74	-26.97	P	V
2087.91	5.40	32.11	6.62	9.5	34.63	54	-19.37	A	V
4175.82	21.56	32.49	9.17	9.5	53.72	74	-20.28	P	H
4175.82	16.50	32.49	9.17	9.5	48.66	54	-5.34	A	H
4175.82	21.54	32.49	9.17	9.5	53.70	74	-20.30	P	V
4175.82	18.50	32.49	9.17	9.5	50.66	54	-3.34	A	V

Note :

1. Measurement was up to 6GHz harmonic, "---" means that the emissions level is too low to be measured.
2. AF: Antenna Factor, Closs: Cable Loss,
3. Analyzer setting P(Peak): RBW=1MHz, VBW=1MHz, A(Average): RBW=1MHz, VBW=10Hz



Test Requirement: 15.205

The frequency spectrum above 1 GHz was investigated. All emissions not reported below are more than 40 dB below the prescribed limits. Readings are both peak and average values.

Operation Mode:	Transmitting	Test Date :	2002/9/23
Fundamental Frequency:	2412MHz (CH 1)	Test By:	M.C. Huang
Temperature :	30 °C	Humidity :	65%

Freq. (MHz)	Reading (dBuV)	AF (dBuV)	Closs (dB)	Pre-amp (dB)	Filter dB	Level (dBuV/m)	Limit FCC_B	Margin (dB)	Mark (P/Q/A)	Pol (H/V)	Height (Meter)
1133.90	23.56	25.757	4.15	9.5	1	44.97	74	-30.03	P	H	1
1439.98	23.46	27.7159	5.23	9.5	1	47.90	74	-27.10	P	H	1
1562.50	15.6	28.6125	5.30	9.5	1	41.01	74	-33.99	P	H	1
2015.98	21.59	32.184	4.37	9.5	1	49.65	74	-25.35	P	H	1
2037.71	12.23	32.1623	4.45	9.5	1	40.34	74	-34.66	P	H	1
4824.29*	18.3	36.5	8.82	35.4	1	29.22	74	-44.78	P	H	1
4824.29*	17.4	36.5	8.82	35.4	1	28.32	54	-25.68	A	H	1
7237.53	12.5	39.4	11.2	35.5	1	28.60	74	-45.4	P	H	1
9647.887	7.8	40.1	12.5	35.8	1	25.60	74	-48.4	P	H	1
12059.93*	---	42.6	15.2	35.3	1	---	74	---	---	---	---
14471.97*	---	43.4	16.8	34	1	---	74	---	---	---	---
16884.01	---	45.2	17.6	34.3	1	---	74	---	---	---	---
19296.05*	---	36.3	18.5	34.3	1	---	74	---	---	---	---
21708.09	---	36.2	19.2	34.6	1	---	74	---	---	---	---
24120.13	---	36.8	21	34.2	1	---	74	---	---	---	---

Note :

1. The measurement was searched to 10th harmonic, Remark “---” means that the emissions level is too low to be measured.
2. AF: Antenna Factor, Closs: Cable Loss, Pre-Amp: Preamp gain, Filter: High Pass Filter Insertion Loss (3.5GHz)
3. Analyzer setting P(Peak): RBW=1MHz, VBW=1MHz, A(Average): RBW=1MHz, VBW=10Hz
4. Remark “*” means that Restricted band.
5. The EUT of LAN SPEED=100M(WORSE CASE)
6. The result basic equation calculation is as follow:
Level=Reading+AF+Closs-Preamp+Filter, Margin=Level-Limit



Test Requirement: 15.205

The frequency spectrum above 1 GHz was investigated. All emissions not reported below are more than 40 dB below the prescribed limits. Readings are both peak and average values.

Operation Mode:	Transmitting	Test Date :	2002/9/23
Fundamental Frequency:	2412MHz (CH 1)	Test By:	M.C. Huang
Temperature :	30 °C	Humidity :	65%

Freq. (MHz)	Reading (dBuV)	AF (dBuV)	Closs (dB)	Pre-amp (dB)	Filter dB	Level (dBuV/m)	Limit FCC_B	Margin (dB)	Mark (P/Q/A)	Pol (H/V)	Height (Meter)
1133.90	26.52	25.76	4.15	9.5	1	46.93	74	-27.07	P	V	1
1439.98	25.68	27.72	5.23	9.5	1	49.12	74	-24.88	P	V	1
1562.50	25.3	28.61	5.30	9.5	1	49.71	74	-24.29	P	V	1
2015.98	21.59	32.18	4.37	9.5	1	48.65	74	-25.35	P	V	1
2037.71	22.1	32.16	4.45	9.5	1	49.21	74	-24.79	P	V	1
4824.29*	46.44	36.50	8.82	35.4	1	57.36	74	-16.64	P	V	1
4824.29*	34.5	36.50	8.82	35.4	1	45.42	54	-8.58	A	V	1
7237.53	35.3	39.40	11.2	35.5	1	51.4	74	-22.6	P	V	1
9647.887	43.2	40.10	12.5	35.8	1	61	74	-13	P	V	1
12059.93*	---	42.60	15.2	35.3	1	---	74	---	---	---	---
14471.97*	---	43.40	16.8	34	1	---	74	---	---	---	---
16884.01	---	45.20	17.6	34.3	1	---	74	---	---	---	---
19296.05*	---	36.30	18.5	34.3	1	---	74	---	---	---	---
21708.09	---	36.20	19.2	34.6	1	---	74	---	---	---	---
24120.13	---	36.80	21	34.2	1	---	74	---	---	---	---

Note :

1. The measurement was searched to 10th harmonic, Remark "---" means that the emissions level is too low to be measured.
2. AF: Antenna Factor, Closs: Cable Loss, Pre-Amp: Preamp gain, Filter: High Pass Filter Insertion Loss (3.5GHz)
3. Analyzer setting P(Peak): RBW=1MHz, VBW=1MHz, A(Average): RBW=1MHz, VBW=10Hz
4. Remark "*" means that Restricted band.
5. The EUT of LAN SPEED=100M(WORSE CASE)
6. The result basic equation calculation is as follow:
Level=Reading+AF+Closs-Preamp+Filter, Margin=Level-Limit



Test Requirement: 15.205

The frequency spectrum above 1 GHz was investigated. All emissions not reported below are more than 40 dB below the prescribed limits. Readings are both peak and average values.

Operation Mode:	Transmitting	Test Date :	2002/9/23
Fundamental Frequency:	2437MHz (CH 6)	Test By:	M.C. Huang
Temperature :	30 °C	Humidity :	65%

Freq.	Reading	AF	Closs	Pre-amp	Filter	Level	Limit	Margin	Mark	Pol	Height
(MHz)	(dBuV)	(dBuV)	(dB)	(dB)	dB	(dBuV/m)	FCC_B	(dB)	(P/Q/A)	(H/V)	(Meter)
1133.90	26.52	25.76	4.15	9.5	1	46.93	74	-27.07	P	V	1
1439.98	25.68	27.72	5.23	9.5	1	49.12	74	-24.88	P	V	1
1562.50	25.3	28.61	5.30	9.5	1	49.71	74	-24.29	P	V	1
2015.98	21.59	32.18	4.37	9.5	1	48.65	74	-25.35	P	V	1
2037.71	22.1	32.16	4.45	9.5	1	49.21	74	-24.79	P	V	1
4874.25*	43.44	36.60	8.9	35.4	1	54.54	74	-19.46	P	V	1.2
4874.25*	32.42	36.60	8.9	35.4	1	43.52	54	-10.48	A	V	1.2
7309.85	34.21	39.50	11.3	35.5	1	50.51	74	-23.49	P	V	1.2
9748.08	---	40.20	12.5	35.8	1	---	74	---	---	---	---
12185.10*	---	42.60	15.2	35.3	1	---	74	---	---	---	---
14622.12	---	43.40	16.8	34	1	---	74	---	---	---	---
17059.14	---	45.20	17.6	34.3	1	---	74	---	---	---	---
19496.16*	---	36.30	18.5	34.3	1	---	74	---	---	---	---
21933.18	---	36.20	19.2	34.6	1	---	74	---	---	---	---
24370.2	---	36.80	21	34.2	1	---	74	---	---	---	---

Note :

1. The measurement was searched to 10th harmonic, Remark "----" means that the emissions level is too low to be measured.
2. AF: Antenna Factor, Closs: Cable Loss, Pre-Amp: Preamp gain, Filter: High Pass Filter Insertion Loss (3.5GHz)
3. Analyzer setting P(Peak): RBW=1MHz, VBW=1MHz, A(Average): RBW=1MHz, VBW=10Hz
4. Remark "*" means that Restricted band.
5. The EUT of LAN SPEED=100M(WORSE CASE)
6. The result basic equation calculation is as follow:
Level=Reading+AF+Closs-Preamp+Filter, Margin=Level-Limit



Test Requirement: 15.205

The frequency spectrum above 1 GHz was investigated. All emissions not reported below are more than 40 dB below the prescribed limits. Readings are both peak and average values.

Operation Mode:	Transmitting	Test Date :	2002/9/23
Fundamental Frequency:	2437MHz (CH 6)	Test By:	M.C. Huang
Temperature :	30 °C	Humidity :	65%

Freq.	Reading	AF	Closs	Pre-amp	Filter	Level	Limit	Margin	Mark	Pol	Height
(MHz)	(dBuV)	(dBuV)	(dB)	(dB)	dB	(dBuV/m)	FCC_B	(dB)	(P/Q/A)	(H/V)	(Meter)
1133.90	23.56	25.76	4.15	9.5	1	44.97	74	-30.03	P	H	1
1439.98	23.46	27.72	5.23	9.5	1	47.90	74	-27.10	P	H	1
1562.50	15.6	28.61	5.30	9.5	1	41.01	74	-33.99	P	H	1
2015.98	21.59	32.18	4.37	9.5	1	49.65	74	-25.35	P	H	1
2037.71	12.23	32.16	4.45	9.5	1	40.34	74	-34.66	P	H	1
4874.25*	32.5	36.60	8.9	35.4	1	43.6	74	-30.4	P	H	1.2
4874.25*	23.5	36.60	8.9	35.4	1	34.6	54	-19.4	A	H	1.2
7309.85	35.2	39.50	11.3	35.5	1	51.5	74	-22.5	P	H	1.2
9748.08	---	40.20	12.5	35.8	1	---	74	---	---	---	---
12185.10*	---	42.60	15.2	35.3	1	---	74	---	---	---	---
14622.12	---	43.40	16.8	34	1	---	74	---	---	---	---
17059.14	---	45.20	17.6	34.3	1	---	74	---	---	---	---
19496.16*	---	36.30	18.5	34.3	1	---	74	---	---	---	---
21933.18	---	36.20	19.2	34.6	1	---	74	---	---	---	---
24370.2	---	36.80	21	34.2	1	---	74	---	---	---	---

Note :

1. The measurement was searched to 10th harmonic, Remark “---” means that the emissions level is too low to be measured.
2. AF: Antenna Factor, Closs: Cable Loss, Pre-Amp: Preamp gain, Filter: High Pass Filter Insertion Loss (3.5GHz)
3. Analyzer setting P(Peak): RBW=1MHz, VBW=1MHz, A(Average): RBW=1MHz, VBW=10Hz
4. Remark “*” means that Restricted band.
5. The EUT of LAN SPEED=100M(WORSE CASE)
6. The result basic equation calculation is as follow:

Level=Reading+AF+Closs-Preamp+Filter, Margin=Level-Limit



Test Requirement: 15.205

The frequency spectrum above 1 GHz was investigated. All emissions not reported below are more than 40 dB below the prescribed limits. Readings are both peak and average values.

Operation Mode:	Transmitting	Test Date :	2002/9/23
Fundamental Frequency:	2462MHz (CH 11)	Test By:	M.C. Huang
Temperature :	30 °C	Humidity :	65%

Freq. (MHz)	Reading (dBuV)	AF (dBuV)	Closs (dB)	Pre-amp (dB)	Filter dB	Level (dBuV/m)	Limit FCC_B	Margin (dB)	Mark (P/Q/A)	Pol (H/V)	Height (Meter)
1133.90	26.52	25.76	4.15	9.5	1	46.93	74	-27.07	P	V	1
1439.98	25.68	27.72	5.23	9.5	1	49.12	74	-24.88	P	V	1
1562.50	25.3	28.61	5.30	9.5	1	49.71	74	-24.29	P	V	1
2015.98	21.59	32.18	4.37	9.5	1	48.65	74	-25.35	P	V	1
2037.71	22.1	32.16	4.45	9.5	1	49.21	74	-24.79	P	V	1
4924.05*	32.5	36.80	9.01	35.4	1	43.91	74	-30.09	P	V	1.2
4924.05*	25.6	36.80	9.01	35.4	1	37.01	54	-16.99	A	V	1.2
7386.0*	34.21	39.80	11.5	35.5	1	51.01	74	-22.99	P	V	1.2
7386.0*	28.5	39.80	11.5	35.5	1	45.3	54	-8.7	A	V	1.2
9848.02	---	40.30	12.6	35.8	1	---	74	---	---	---	---
12310.04*	---	42.60	15.2	35.3	1	---	74	---	---	---	---
14772.06	---	43.40	16.8	34	1	---	74	---	---	---	---
17234.08	---	45.20	17.6	34.3	1	---	74	---	---	---	---
19696.1*	---	36.30	18.5	34.3	1	---	74	---	---	---	---
22158.12*	---	36.20	19.2	34.6	1	---	74	---	---	---	---
24620.14	---	36.80	21	34.2	1	---	74	---	---	---	---

Note :

1. The measurement was searched to 10th harmonic, Remark "---" means that the emissions level is too low to be measured.
2. AF: Antenna Factor, Closs: Cable Loss, Pre-Amp: Preamp gain, Filter: High Pass Filter Insertion Loss (3.5GHz)
3. Analyzer setting P(Peak): RBW=1MHz, VBW=1MHz, A(Average): RBW=1MHz, VBW=10Hz
4. Remark "*" means that Restricted band.
5. The EUT of LAN SPEED=100M(WORSE CASE)
6. The result basic equation calculation is as follow:
Level=Reading+AF+Closs-Preamp+Filter, Margin=Level-Limit



Test Requirement: 15.205

The frequency spectrum above 1 GHz was investigated. All emissions not reported below are more than 40 dB below the prescribed limits. Readings are both peak and average values.

Operation Mode:	Transmitting	Test Date :	2002/9/23
Fundamental Frequency:	2462MHz (CH 11)	Test By:	M.C. Huang
Temperature :	30 °C	Humidity :	65%

Freq.	Reading	AF	Closs	Pre-amp	Filter	Level	Limit	Margin	Mark	Pol	Height
(MHz)	(dBuV)	(dBuV)	(dB)	(dB)	dB	(dBuV/m)	FCC_B	(dB)	(P/Q/A)	(H/V)	(Meter)
1133.90	23.56	25.76	4.15	9.5	1	44.97	74	-30.03	P	H	1
1439.98	23.46	27.72	5.23	9.5	1	47.90	74	-27.10	P	H	1
1562.50	15.6	28.61	5.30	9.5	1	41.01	74	-33.99	P	H	1
2015.98	21.59	32.18	4.37	9.5	1	49.65	74	-25.35	P	H	1
2037.71	12.23	32.16	4.45	9.5	1	40.34	74	-34.66	P	H	1
4924.05*	31.06	36.8	9.01	35.4	1	42.47	74	-31.53	P	H	1.2
4924.05*	30.2	36.8	9.01	35.4	1	41.61	54	-12.39	A	H	1.2
7386.0*	35.2	39.8	11.5	35.5	1	52	74	-22	P	H	1.2
9848.02	---	40.3	12.6	35.8	1	---	74	---	---	---	---
12310.04*	---	42.6	15.2	35.3	1	---	74	---	---	---	---
14772.06	---	43.4	16.8	34	1	---	74	---	---	---	---
17234.08	---	45.2	17.6	34.3	1	---	74	---	---	---	---
19696.1*	---	36.3	18.5	34.3	1	---	74	---	---	---	---
22158.12*	---	36.2	19.2	34.6	1	---	74	---	---	---	---
24620.14	---	36.8	21	34.2	1	---	74	---	---	---	---

Note :

1. The measurement was searched to 10th harmonic, Remark “---” means that the emissions level is too low to be measured.
2. AF: Antenna Factor, Closs: Cable Loss, Pre-Amp: Preamp gain, Filter: High Pass Filter Insertion Loss (3.5GHz)
3. Analyzer setting P(Peak): RBW=1MHz, VBW=1MHz, A(Average): RBW=1MHz, VBW=10Hz
4. Remark “*” means that Restricted band.
5. The EUT of LAN SPEED=100M(WORSE CASE)

6. The result basic equation calculation is as follow:

Level=Reading+AF+Closs-Preamp+Filter, Margin=Level-Limit



3.7 PHOTOS OF OPEN SITE





3.7 PHOTOS OF OPEN SITE





4. 6dB BANDWIDTH MEASUREMENT


4.1 TEST EQUIPMENTS

Description & Manufacturer	Model No.	Serial No.	DATE OF CALIBRATION
ROHDE & SCHWARZ TEST RECEIVER	ESMI	842088/005 841978/008	SEPT. 3, 2002
HP ATTENUATOR	8496B	3247A18505	Cal. on use
HP PLOTTER	7750A	725A 852141	N/A

NOTE :

1. The measurement uncertainty is less than +/- 2.6dB, which is calculated as per the NAMAS document NIS81.
2. The calibration interval of the above test instruments is 12 months and the calibrations are traceable to NML/ROC and NIST/USA.

4.2 TEST SETUP



4.3 LIMITS OF 6dB BANDWIDTH MEASUREMENT

The minimum of 6dB Bandwidth Measurement is >500KHz

4.4 TEST PROCEDURE

The transmitter output was connected to the spectrum analyzer through an attenuator. The bandwidth of the fundamental frequency was measured by spectrum analyzer with 100 KHz RBW and 100 KHz VBW. The 6dB bandwidth is defined as the total spectrum the power of which is higher than peak power minus 6dB.

4.5 UNCERTAINTY OF CONDUCTED EMISSION

The uncertainty of conducted emission is ± 200 KHz.




4.6 TEST RESULTS

EUT	Wireless CABLE Router	MODEL	CME063W
INPUT POWER (SYSTEM)	120VAC, 60Hz	ENVIRONMENTAL CONDITIONS	27°C, 70%RH,
TESTED BY : M. C. Huang			


CHANNEL	CHANNEL FREQUENCY (MHz)	6dB BANDWIDTH (MHz)	MINIMUM LIMIT (MHz)	PASS / FAIL
1	2412	8.11	0.5	PASS
6	2437	8.06	0.5	PASS
11	2462	7.88	0.5	PASS




4.7 PHOTO OF 6DB BANDWIDTH MEASUREMENT

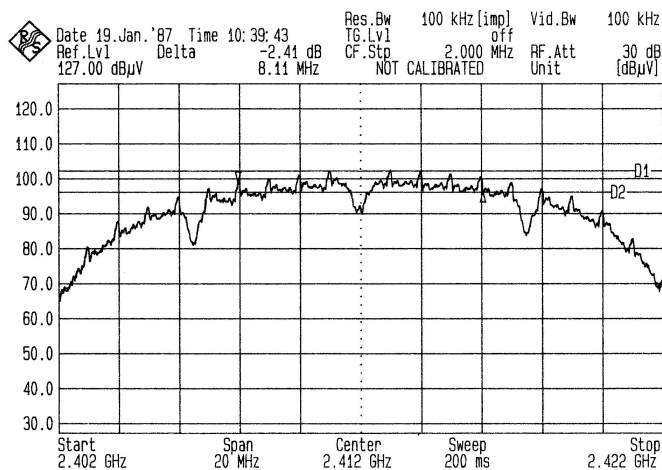

Channel 1

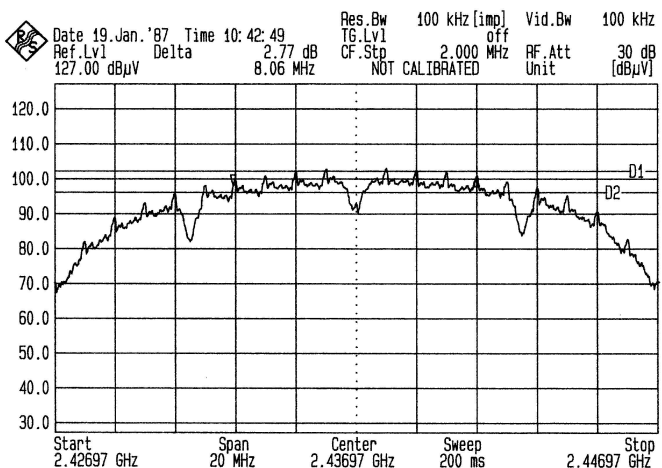

Channel 6

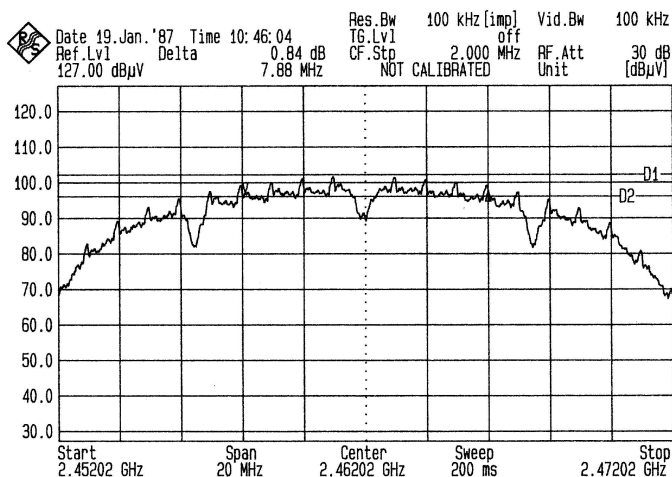

Channel 11



5. MAXIMUM PEAK OUTPUT POWER


5.1 TEST EQUIPMENTS

Description & Manufacturer	Model No.	Serial No.	DATE OF CALIBRATION
ROHDE & SCHWARZ TEST RECEIVER	ESMI	842088/005 841978/008	SEPT. 3, 2002
HP ATTENUATOR	8496B	3247A18505	Cal. on use
HP PLOTTER	7750A	725A 852141	N/A

NOTE :

1. The measurement uncertainty is less than +/- 2.6dB, which is calculated as per the NAMAS document NIS81.
2. The calibration interval of the above test instruments is 12 months and the calibrations are traceable to NML/ROC and NIST/USA.

5.2 TEST SETUP



5.3 LIMITS OF MAXIMUM PEAK OUTPUT POWER

The Maximum Peak Output Power Measurement is 30dBm.



5.4 TEST PROCEDURE

The RF power output was measured with a Power meter connected to the RF Antenna connector (conducted measurement) while EUT was operating in transmit mode at the appropriate center frequency.

5.5 UNCERTAINTY OF CONDUCTED EMISSION

The uncertainty of conducted emission is $\pm 1.82\text{dB}$.

5.6 TEST RESULTS

EUT	Wireless CABLE Router	MODEL	CME063W
INPUT POWER (SYSTEM)	120VAC, 60Hz	ENVIRONMENTAL CONDITIONS	27°C, 70%RH,
TESTED BY : M. C. Huang			

CHANNEL	CHANNEL FREQUENCY (MHz)	PEAK POWER OUTPUT (dBm)	PEAK POWER LIMIT (dBm)	PASS / FAIL
1	2412	16.5	30	PASS
6	2437	16.4	30	PASS
11	2462	16.5	30	PASS