

TIMCO ENGINEERING INC.

849 NW State Road 45

Newberry, Florida 32669

<http://www.timcoengr.com>

888.472.2424 F 352.472.2030 email: sid@timcoengr.com



Test Report

Product Name: COMMUNICATIONS RECEIVER

FCC ID: JFZATWR220

Applicant:

**AUDIO TECHNICA CORPORATION
2206 NARUSE, MACHIDA
TOKYO 194
JAPAN**

Date Receipt: MARCH 26, 2004

Date Tested: APRIL 16, 2004

APPLICANT: AUDIO TECHNICA CORPORATION

FCC ID: JFZATWR220

REPORT #: A\AudioTechnica_JFZ\426AUT4\426AUT4TestReport.doc

COVER SHEET

TIMCO ENGINEERING INC.

849 NW State Road 45

Newberry, Florida 32669

<http://www.timcoengr.com>

888.472.2424 F 352.472.2030 email: sid@timcoengr.com

TABLE OF CONTENTS LIST

APPLICANT: AUDIO TECHNICA CORPORATION

FCC ID: JFZATWR220

TEST REPORT CONTAINING:

PAGE 1.....TEST EQUIPMENT LIST
PAGE 2.....TEST PROCEDURES
PAGE 3.....RADIATION INTERFERENCE TEST DATA
PAGE 4.....POWER LINE CONDUCTED EMISSIONS
PAGE 5.....POWER LINE CONDUCTED PLOTS

EXHIBITS CONTAINING:

REQUEST FOR CONFIDENTIALITY LETTER
BLOCK DIAGRAM
SCHEMATIC
INSTRUCTION MANUAL
LABEL SAMPLE
LABEL LOCATION
EXTERNAL PHOTOGRAPHS
INTERNAL PHOTOGRAPHS
CIRCUIT DESCRIPTION
TEST SET UP PHOTOGRAPH

APPLICANT: AUDIO TECHNICA CORPORATION

FCC ID: JFZATWR220

REPORT #: A\AudioTechnica_JFZ\426AUT4\426AUT4TestReport.doc

TABLE OF CONTENTS

TIMCO ENGINEERING INC.

849 NW State Road 45

Newberry, Florida 32669

<http://www.timcoengr.com>

888.472.2424 F 352.472.2030 email: sid@timcoengr.com

EMC Equipment List

| Device | Manufacturer | Model | Serial Number | Cal/Char Date | Due Date |
|-------------------------------|-----------------|----------|--------------------------|-------------------|-------------|
| 3/10-Meter OATS | TEI | N/A | N/A | Listed 3/26/01 | 3/26/04 |
| 3-Meter OATS | TEI | N/A | N/A | Listed 1/13/03 | 1/13/06 |
| Biconnical Antenna | Eaton | 94455-1 | 1057 | CAL 3/18/03 | 3/18/05 |
| Biconnical Antenna | Eaton | 94455-1 | 1096 | CAL 10/1/01 | 10/1/03 |
| Biconnical Antenna | Electro-Metrics | BIA-25 | 1171 | CAL 4/26/01 | 4/26/03 |
| Blue Tower Quasi-Peak Adapter | HP | 85650A | 2811A01279 | CAL 4/15/03 | 4/15/05 |
| Blue Tower RF Preselector | HP | 85685A | 2620A00294 | | out for Cal |
| Blue Tower Spectrum Analyzer | HP | 8568B | 2928A04729 2848A18049 | CAL 4/15/03 | 4/15/05 |
| LISN | Electro-Metrics | ANS-25/2 | 2604 | CAL 10/9/01 | 10/9/03 |
| LISN | Electro-Metrics | EM-7820 | 2682 | CAL 3/12/03 | 3/12/05 |
| Log-Periodic Antenna | Eaton | 96005 | 1243 | CAL 5/8/03 | 5/8/05 |

APPLICANT: AUDIO TECHNICA CORPORATION

FCC ID: JFZATWR220

REPORT #: A\AudioTechnica_JFZ\426AUT4\426AUT4TestReport.doc

TIMCO ENGINEERING INC.

849 NW State Road 45
Newberry, Florida 32669
<http://www.timcoengr.com>
888.472.2424 F 352.472.2030 email: sid@timcoengr.com

TEST PROCEDURE

GENERAL: This report shall NOT be reproduced except in full without the written approval of TIMCO ENGINEERING, INC.

RADIATION INTERFERENCE: The test procedure used was ANSI STANDARD C63.4-2001 using a HEWLETT PACKARD spectrum analyzer with a pre-selector. The bandwidth of the spectrum analyzer was 100 kHz with an appropriate sweep speed. The analyzer was calibrated in dB above a microvolt at the output of the antenna. The resolution bandwidth was 100KHZ and the video bandwidth was 300KHZ. The ambient temperature of the UUT was 80°F with a humidity of 70%.

FORMULA OF CONVERSION FACTORS: The Field Strength at 3m was established by adding the meter reading of the spectrum analyzer (which is set to read in units of dBuV) to the antenna correction factor supplied by the antenna manufacturer. The antenna correction factors are stated in terms of dB. The gain of the Preselector was accounted for in the Spectrum Analyzer Meter Reading.

Example:

Freq (MHz) METER READING + ACF = FS
33 20 dBuV + 10.36 dB = 30.36 dBuV/m @ 3m

ANSI STANDARD C63.4-2001 10.1.7 MEASUREMENT PROCEDURES: The unit under test was placed on a table 80 cm high and with dimensions of 1m by 1.5m. The table used for radiated measurements is capable of continuous rotation. When an emission was found, the table was rotated to produce the maximum signal strength. At this point, the antenna was raised and lowered from 1m to 4m. The antenna was placed in both the horizontal and vertical planes.

The situation was similar for the conducted measurement except that the table did not rotate. The EUT was setup as described in ANSIC63.4-1992 with the EUT 40 cm from the vertical ground wall.

APPLICANT: AUDIO TECHNICA CORPORATION
FCC ID: JFZATWR220
REPORT #: A\AudioTechnica_JFZ\426AUT4\426AUT4TestReport.doc

TIMCO ENGINEERING INC.

849 NW State Road 45
Newberry, Florida 32669
<http://www.timcoengr.com>
888.472.2424 F 352.472.2030 email: sid@timcoengr.com

APPLICANT: AUDIO TECHNICA CORPORATION

FCC ID: JFZATWR220

NAME OF TEST: RADIATION INTERFERENCE

RULES PART NO.: 15.109

REQUIREMENTS:

| | |
|-----------------|------------------------|
| 30 to 88 MHz: | 40.0 dBuV/M @ 3 METERS |
| 88 to 216 MHz: | 43.5 dBuV/M |
| 216 to 960 MHz: | 46.0 dBuV/M |
| ABOVE 960 MHz: | 54.0 dBuV/M |

TEST RESULTS: A search was made of the spectrum from 30 to 1000MHz and the measurements indicate that the unit DOES meet the FCC requirements.

TEST DATA:

| Tuned Frequency MHz | Emission Frequency MHz | Meter Reading dBuV | Ant. Polarity | Coax Loss dB | Correction Factor dB | Field Strength dBuV/m | Margin dB |
|------------------------|---------------------------|-----------------------|---------------|-----------------|-------------------------|--------------------------|--------------|
| 169.5 | 180.20 | 15.7 | V | 1.96 | 14.77 | 32.43 | 11.07 |
| 169.5 | 180.20 | 20.5 | H | 1.96 | 14.18 | 36.64 | 6.86 |
| 169.5 | 360.40 | 11.5 | H | 2.90 | 15.50 | 29.90 | 16.10 |
| 169.5 | 360.40 | 16.9 | V | 2.90 | 15.01 | 34.81 | 11.19 |
| 169.5 | 540.60 | 13.7 | V | 3.62 | 18.12 | 35.44 | 10.56 |
| 169.5 | 540.60 | 14.6 | H | 3.62 | 18.71 | 36.93 | 9.07 |
| 170.2 | 180.92 | 16.8 | V | 1.97 | 14.67 | 33.44 | 10.06 |
| 170.2 | 180.92 | 17.7 | H | 1.97 | 14.11 | 33.78 | 9.72 |
| 170.2 | 361.84 | 12.4 | H | 2.91 | 15.48 | 30.79 | 15.21 |
| 170.2 | 361.84 | 15.7 | V | 2.91 | 15.04 | 33.65 | 12.35 |
| 170.2 | 542.76 | 11.3 | V | 3.63 | 18.18 | 33.11 | 12.89 |
| 170.2 | 542.76 | 11.5 | H | 3.63 | 18.76 | 33.89 | 12.11 |
| 171.9 | 182.60 | 19.2 | V | 1.98 | 14.44 | 35.62 | 7.88 |
| 171.9 | 182.60 | 20.7 | H | 1.98 | 13.94 | 36.62 | 6.88 |
| 171.9 | 365.20 | 13.5 | H | 2.93 | 15.45 | 31.88 | 14.12 |
| 171.9 | 365.20 | 14.5 | V | 2.93 | 15.10 | 32.53 | 13.47 |
| 171.9 | 547.80 | 14.0 | V | 3.64 | 18.33 | 35.97 | 10.03 |
| 171.9 | 547.80 | 17.3 | H | 3.64 | 18.86 | 39.80 | 6.20 |

SAMPLE CALCULATION: $FSdBuV/m = MR (dBuV) + ACFdB$.

TEST PROCEDURE: ANSI STANDARD C63.4-2001 using a Hewlett Packard Model 8566B spectrum analyzer, a Hewlett Packard Model 85685A Preselector, a Hewlett Packard Model 85650A Quasi-Peak adapter, and an appropriate antenna - see the test equipment list. The bandwidth of spectrum analyzer was 100 kHz with an appropriate sweep speed. When an emission was found, the table was rotated to produce the maximum signal strength. The antenna was placed in both the horizontal and vertical planes and the worse case emissions were reported.

PERFORMED BY: JOSEPH SCOGLIO

DATE: APRIL 16, 2004

APPLICANT: AUDIO TECHNICA CORPORATION

FCC ID: JFZATWR220

REPORT #: A\AudioTechnica_JFZ\426AUT4\426AUT4TestReport.doc

TIMCO ENGINEERING INC.

849 NW State Road 45
Newberry, Florida 32669
<http://www.timcoengr.com>
888.472.2424 F 352.472.2030 email: sid@timcoengr.com

APPLICANT: AUDIO TECHNICA CORPORATION
FCC ID: JFZATWR220
NAME OF TEST: POWER LINE CONDUCTED INTERFERENCE
RULES PART NO.: 15.107

| REQUIREMENTS: | QUASI-PEAK | AVERAGE |
|---------------|------------|------------|
| .15 - 0.5 MHz | 66-56 dBuV | 56-46 dBuV |
| 0.5 - 5.0 | 56 | 46 |
| 5.0 - 30. | 60 | 50 |

TEST PROCEDURE: ANSI STANDARD C63.4-2001. The spectrum was scanned from .15 to 30 MHz.

TEST DATA:

THE GRAPHS ON THE FOLLOWING PAGE REPRESENT THE EMISSIONS TAKEN FOR
POWER LINE CONDUCTED FOR THIS DEVICE.

TEST RESULTS: Both lines were observed. The measurements indicate that the unit DOES appear to meet the FCC requirements for this class of equipment.

PERFORMED BY: NAM NGUYEN **DATE:** APRIL 16, 2004

APPLICANT: AUDIO TECHNICA CORPORATION
FCC ID: JFZATWR220
REPORT #: A\AudioTechnica_JFZ\426AUT4\426AUT4TestReport.doc

TIMCO ENGINEERING INC.


849 NW State Road 45

Newberry, Florida 32669


<http://www.timcoengr.com>

888.472.2424 F 352.472.2030 email: sid@timcoengr.com

POWER LINE CONDUCTED LINE 1

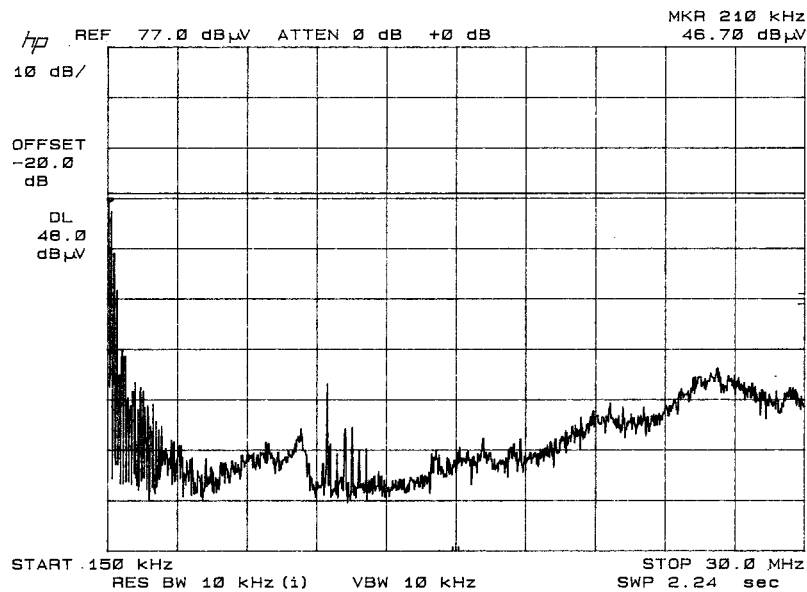

LINE 2

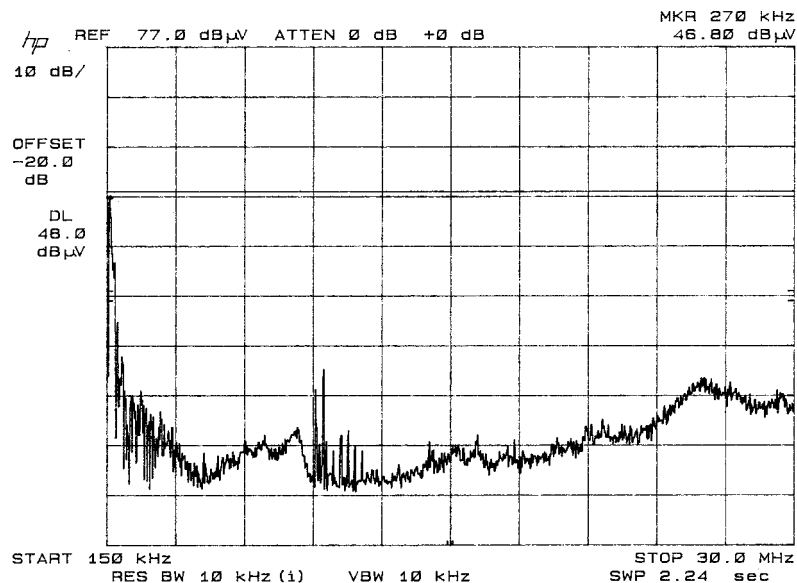

APPLICANT: AUDIO TECHNICA CORPORATION

FCC ID: JFZATWR220

REPORT #: A\AudioTechnica_JFZ\426AUT4\426AUT4TestReport.doc