



FCC TEST REPORT

REPORT NO.: RF901005R01

MODEL NO.: LM-WA200

RECEIVED: October 4, 2001

TESTED: October 16 ~ October 23, 2001

APPLICANT: DELTA NETWORKS, INC.

ADDRESS: 8, Kon Jan West Road, Liutu Industrial Zone,
Keelung, Taiwan, R.O.C.

ISSUED BY: Advance Data Technology Corporation

LAB LOCATION: 47 14th Lin, Chiapau Tsun, Linko, Taipei,
Taiwan, R.O.C.

This test report consists of 58 pages in total. It may be duplicated completely for legal use with the approval of the applicant. It should not be reproduced except in full, without the written approval of our laboratory. The client should not use it to claim product endorsement by CNLA, NVLAP or any government agencies. The test results in the report only apply to the tested sample.



0528



Lab Code: 200102-0



Table of Contents

1	CERTIFICATION	4
2	SUMMARY OF TEST RESULTS	5
3	GENERAL INFORMATION	6
3.1	GENERAL DESCRIPTION OF EUT	6
3.2	DESCRIPTION OF TEST MODES	7
3.3	GENERAL DESCRIPTION OF APPLIED STANDARDS	7
3.4	DESCRIPTION OF SUPPORT UNITS	8
4	TEST TYPES AND RESULTS	9
4.1	CONDUCTED EMISSION MEASUREMENT	9
4.1.1	LIMITS OF CONDUCTED EMISSION MEASUREMENT	9
4.1.2	TEST INSTRUMENTS	9
4.1.3	TEST PROCEDURES	10
4.1.4	TEST SETUP	10
4.1.5	EUT OPERATING CONDITIONS	11
4.1.6	TEST RESULTS (A)	12
4.1.7	TEST RESULTS (B)	18
4.2	RADIATED EMISSION MEASUREMENT	24
4.2.1	LIMITS OF RADIATED EMISSION MEASUREMENT	24
4.2.2	TEST INSTRUMENTS	25
4.2.3	TEST PROCEDURES	26
4.2.4	TEST SETUP	27
4.2.5	EUT OPERATING CONDITIONS	27
4.2.6	TEST RESULTS (A)	28
4.2.7	TEST RESULTS (B)	32
4.3	6DB BANDWIDTH MEASUREMENT	36
4.3.1	LIMITS OF 6dB BANDWIDTH MEASUREMENT	36
4.3.2	TEST INSTRUMENTS	36
4.3.3	TEST PROCEDURE	37
4.3.4	TEST SETUP	37
4.3.5	EUT OPERATING CONDITIONS	37
4.3.6	TEST RESULTS	38
4.4	MAXIMUM PEAK OUTPUT POWER	42
4.4.1	LIMITS OF MAXIMUM PEAK OUTPUT POWER MEASUREMENT	42
4.4.2	INSTRUMENTS	42
4.4.3	TEST PROCEDURES	43
4.4.4	TEST SETUP	43
4.4.5	EUT OPERATING CONDITIONS	43
4.4.6	TEST RESULTS	44
4.5	POWER SPECTRAL DENSITY MEASUREMENT	45
4.5.1	LIMITS OF POWER SPECTRAL DENSITY MEASUREMENT	45
4.5.2	TEST INSTRUMENTS	45
4.5.3	TEST PROCEDURE	46
4.5.4	TEST SETUP	46
4.5.5	EUT OPERATING CONDITION	46
4.5.6	TEST RESULTS	47



4.6	BAND EDGES MEASUREMENT	51
4.6.1	LIMITS OF BAND EDGES MEASUREMENT	51
4.6.2	TEST INSTRUMENTS.....	51
4.6.3	TEST PROCEDURE.....	51
4.6.4	EUT OPERATING CONDITION	52
4.6.5	TEST RESULTS	52
4.7	ANTENNA REQUIREMENT	55
4.7.1	STANDARD APPLICABLE.....	55
4.7.2	ANTENNA CONNECTED CONSTRUCTION	55
5	PHOTOGRAPHS OF THE TEST CONFIGURATION	56
6	INFORMATION ON THE TESTING LABORATORIES	58



1 CERTIFICATION

PRODUCT : WLAN PCI Adapter
BRAND NAME : DELTA NETWORKS
MODEL NO. : LM-WA200
APPLICANT : DELTA NETWORKS, INC.
STANDARDS : 47 CFR Part 15, Subpart C (Section 15.247),
ANSI C63.4-1992, Canada RSS 210,
New Zealand RFS 29

We, **Advance Data Technology Corporation**, hereby certify that one sample of the designation has been tested in our facility from October 16, 2001 to October 23, 2001. The test record, data evaluation and Equipment UnderTest (EUT) configurations represented herein are true and accurate accounts of the measurements of the sample's EMC characteristics under the conditions herein specified.

TESTED BY : James Lee · DATE: Oct. 25, 2001
James Lee

CHECKED BY : Emily Lu · DATE: Oct. 25, 2001
Emily Lu

APPROVED BY : Alan Lane · DATE: Oct. 25, 2001
Dr. Alan Lane, Manager



2 SUMMARY OF TEST RESULTS

The EUT has been tested according to the following specifications:

APPLIED STANDARD: 47 CFR Part 15, Subpart C			
Standard Section	Test Type and Limit	Result	REMARK
15.107	AC Power Conducted Emission Limit: 48dBuV	PASS	Meet the requirement of limit Minimum passing margin is -2.41dBuV at 0.5073MHz
15.247(a)(2)	Spectrum Bandwidth of a Direct Sequence Spread Spectrum System Limit: min. 500kHz	PASS	Meet the requirement of limit
15.247(b)	Maximum Peak Output Power Limit: max. 30dBm	PASS	Meet the requirement of limit
15.247(c)	Radiated Emissions Limit: Table 15.209	PASS	Meet the requirement of limit Minimum passing margin is -7.6dBuV at 792.00MHz
15.247(d)	Power Spectral Density Limit: max. 8dBm	PASS	Meet the requirement of limit
15.247(c)	Band Edge Measurement Limit: 20 dB less than the peak value of fundamental frequency	PASS	Meet the requirement of limit



3 GENERAL INFORMATION

3.1 GENERAL DESCRIPTION OF EUT

PRODUCT	WLAN PCI Adapter
MODEL NO.	LM-WA200
POWER SUPPLY	5VDC from host equipment
MODULATION TYPE	BPSK, QPSK, CCK
RADIO TECHNOLOGY	DSSS
TRANSFER RATE	1/2/5.5/11Mbps
FREQUENCY RANGE	2412MHz ~ 2462MHz
NUMBER OF CHANNEL	11
OUTPUT POWER	16dBm
ANTENNA TYPE	Monopole Antenna
DATA CABLE	NA
I/O PORTS	NA
ASSOCIATED DEVICES	NA

Note:

1. The EUT has two sets of antennas which antenna gain is 3dBi and 2dBi respectively.
2. For a more detailed features description, please refer to the manufacturer's specifications or the User's Manual.



3.2 DESCRIPTION OF TEST MODES

Eleven channels are provided in this EUT.

Channel	Frequency	Channel	Frequency
1	2412 MHz	7	2442 MHz
2	2417 MHz	8	2447 MHz
3	2422 MHz	9	2452 MHz
4	2427 MHz	10	2457 MHz
5	2432 MHz	11	2462 MHz
6	2437 MHz		

- NOTE:** 1. Below 1 GHz, the channel 1, 6, and 11 were pre-tested in chamber. The channel 11, worst case one, was chosen for final test.
 2. Above 1 GHz, the channel 1, 6, and 11 were tested individually.
 3. Test result (A) is for antenna gain = 3dBi and test result (B) is for antenna gain = 2dBi.

3.3 GENERAL DESCRIPTION OF APPLIED STANDARDS

The EUT is a WLAN PCI Adapter. According to the specifications of the manufacturer, it must comply with the requirements of the following standards:

FCC CFR 47 Part 15, Subpart C. (15.247)

ANSI C63.4 : 1992

All tests have been performed and recorded as per the above standards.

NOTE: The EUT is also considered as a kind of computer peripheral, because the connection to computer is necessary for typical use. It has been verified to comply with the requirements of FCC Part 15, Subpart B, Class B (DoC). The test report has been issued separately.



3.4 DESCRIPTION OF SUPPORT UNITS

The EUT has been tested as an independent unit together with other necessary accessories or support units. The following support units or accessories were used to form a representative test configuration during the tests.

NO.	PRODUCT	BRAND	MODEL NO.	SERIAL NO.	FCC ID
1	Personal Computer	HP	Brio BA410	SG12902766	FCC DoC Approved
2	19" COLOR MONITOR	HP	D2842A	KR93473168	BEJCB910
3	PS/2 KEYBOARD	FORWARD	FDA-104GA	FDKB8110111	F4ZDA-104G
4	PS/2 MOUSE	LOGITECH	M-S43	LZE00703207	DZL211106
5	PRINTER	HP	2225C+	3123S97230	DSI6XU2225
6	MODEM	ACEEX	1414	980020510	IFAXDM1414

NO.	SIGNAL CABLE DESCRIPTION OF THE ABOVE SUPPORT UNITS
1	NA
2	1.8 m braid shielded wire, terminated with VGA connector via metallic frame, w/o core.
3	1.5 m foil shielded wire, terminated with PS/2 connector via metallic frame, w/o core.
4	1.8 m foil shielded wire, terminated with PS/2 connector via drain wire, w/o core.
5	1.2m braid shielded wire, terminated with DB25 and Centronics connector via metallic frame, w/o core.
6	1.2 m braid shielded wire, terminated with DB25 and DB9 connector via metallic frame, w/o core.

NOTE: All power cords of the above support units are non shielded (1.8m).



4 TEST TYPES AND RESULTS

4.1 CONDUCTED EMISSION MEASUREMENT

4.1.1 LIMITS OF CONDUCTED EMISSION MEASUREMENT

FREQUENCY (MHz)	Class B (dBuV)	
	Quasi-peak	Average
0.45 – 30	48	-

NOTE:

1. The lower limit shall apply at the transition frequencies.
2. All emanations from a class B digital device or system, including any network of conductors and apparatus connected thereto, shall not exceed the level of field strengths specified above.

4.1.2 TEST INSTRUMENTS


DESCRIPTION & MANUFACTURER	MODEL NO.	SERIAL NO.	CALIBRATED UNTIL
ROHDE & SCHWARZ Test Receiver	ESHS30	828109/007	July 4, 2002
ROHDE & SCHWARZ Artificial Mains Network (for EUT)	ESH3-Z5	839135/006	July 3, 2002
* ROHDE & SCHWARZ 4-wire ISN	ENY41	837032/016	Nov. 28, 2001
* ROHDE & SCHWARZ 2-wire ISN	ENY22	837497/016	Dec. 3, 2001
EMCO-L.I.S.N. (for peripheral)	3825/2	9204-1964	July 3, 2002
Software	Cond-V2J	NA	NA
RF cable (JYEBAO)	RG-58A/U	Cable-C02.01	July 5, 2002
HP Terminator (For EMCO LISN)	11593A	E1-01-298	Feb. 20, 2002
HP Terminator (For EMCO LISN)	11593A	E1-01-299	Feb. 20, 2002
Shielded Room	Site 2	ADT-C02	NA
VCCI Site Registration No.	Site 2	C-240	NA

- NOTE: 1. The measurement uncertainty is less than +/- 2.6dB, which is calculated as per the NAMAS document NIS81.
2. The calibration interval of the above test instruments is 12 months and the calibrations are traceable to NML/ROC and NIST/USA.
3. “*”: These equipment are used for conducted telecom port test only (if tested).

4.1.3 TEST PROCEDURES

- a. The EUT was placed 0.4 meters from the conducting wall of the shielded room with EUT being connected to the power mains through a line impedance stabilization network (LISN). Other support units were connected to the power mains through another LISN. The two LISNs provide 50 ohm/ 50uH of coupling impedance for the measuring instrument.
- b. Both lines of the power mains connected to the EUT were checked for maximum conducted interference.
- c. The frequency range from 450 kHz to 30 MHz was searched. Emission levels over 10dB under the prescribed limits could not be reported.

4.1.4 TEST SETUP

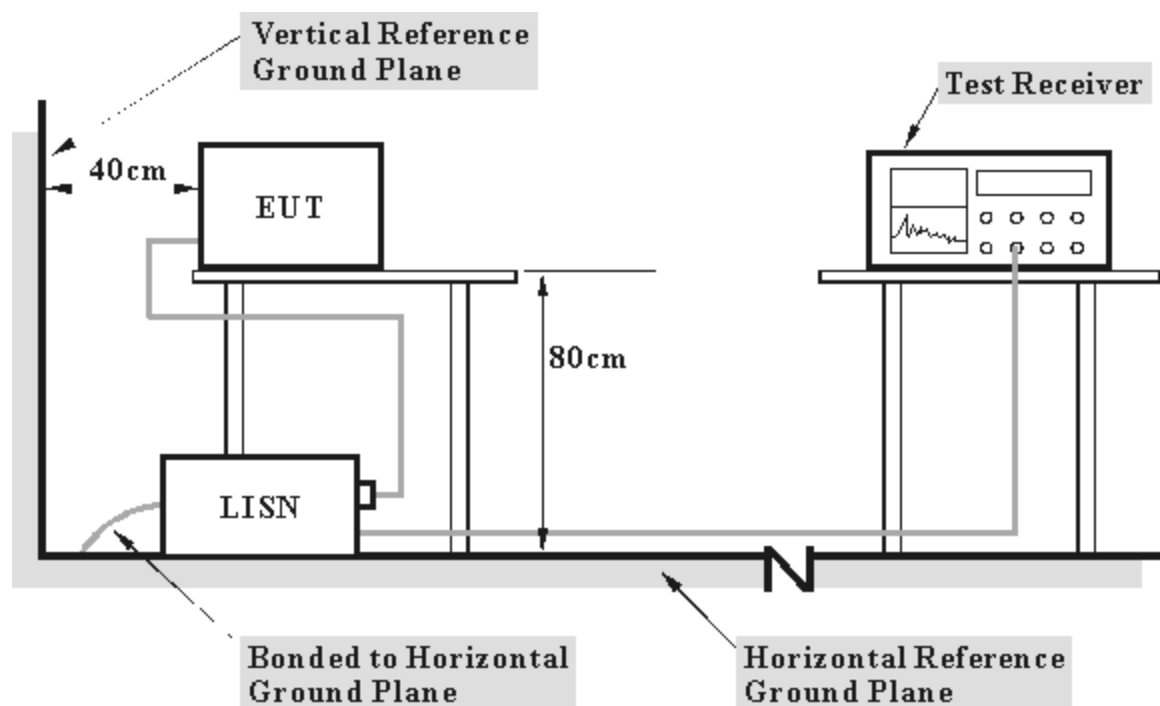

Note: 1. Support units were connected to second LISN.
2. Both of LISNs (AMN) 80 cm from EUT and at the least 80 cm from other units and other metal planes support units.

For the actual test configuration, please refer to the related item – Photographs of the Test Configuration.



4.1.5 EUT OPERATING CONDITIONS


- a. Connected the EUT to a computer system placed on a testing table.
- b. The computer system ran a test program to enable EUT under transmission/receiving condition continuously at specific channel frequency.
- c. The computer system sent "H" messages to its screen.
- d. The computer system sent "H" messages to modem.
- e. The computer system sent "H" messages to printer, and the printer prints them on paper.

4.1.6 TEST RESULTS (A)

EUT	WLAN PCI Adapter	MODEL	LM-WA200
MODE	Channel 1	6dB BANDWIDTH	10 kHz
INPUT POWER (SYSTEM)	120Vac, 60 Hz	PHASE	Line (L)
ENVIRONMENTAL CONDITIONS	25 deg. C, 70%RH, 1005 hPa	TESTED BY: James Lee	

No	Freq. (MHz)	Corr. Factor (dB)	Reading Value [dB (uV)]		Emission Level [dB (uV)]		Limit [dB (uV)]		Margin (dB)	
			QP.	AV.	QP.	AV.	QP.	AV.	QP.	AV.
1	0.507	0.10	45.11	-	45.21	-	48.00	-	-2.79	-
2	0.610	0.10	38.47	-	38.57	-	48.00	-	-9.43	-
3	1.520	0.10	37.98	-	38.08	-	48.00	-	-9.92	-
4	3.450	0.25	38.98	-	39.23	-	48.00	-	-8.77	-
5	4.059	0.30	39.86	-	40.16	-	48.00	-	-7.84	-
6	22.571	1.05	37.91	-	38.96	-	48.00	-	-9.04	-

- Remarks:
1. "*": Undetectable
 2. QP. and AV. are abbreviations of quasi-peak and average individually.
 3. "-": NA
 4. The emission levels of other frequencies were very low against the limit.
 5. Margin value = Emission level - Limit value
 6. Emission Level = Correction Factor + Reading Value.

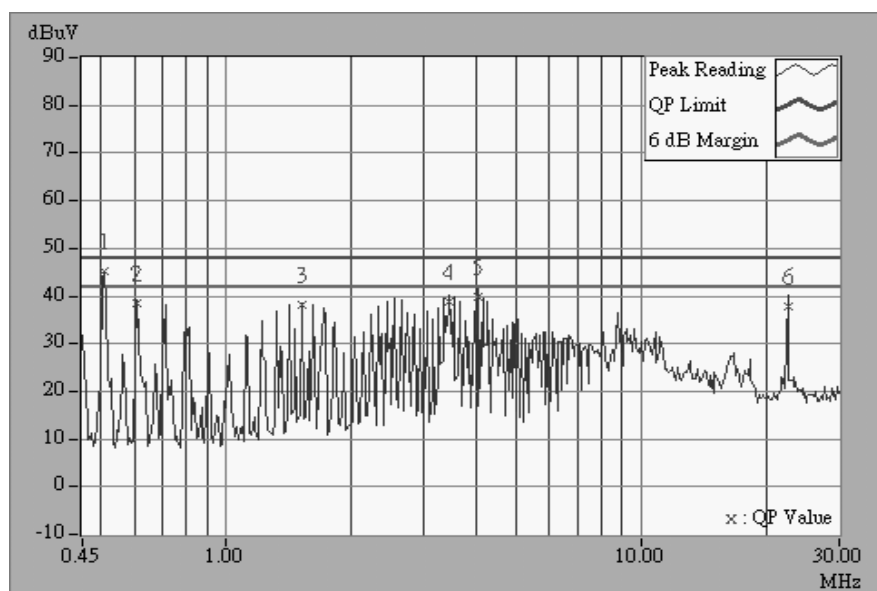




EUT	WLAN PCI Adapter	MODEL	LM-WA200
MODE	Channel 1	6dB BANDWIDTH	10 kHz
INPUT POWER (SYSTEM)	120Vac, 60 Hz	PHASE	Neutral (N)
ENVIRONMENTAL CONDITIONS	25 deg. C, 70%RH, 1005 hPa	TESTED BY: James Lee	

No	Freq. (MHz)	Corr. Factor (dB)	Reading Value [dB (uV)]		Emission Level [dB (uV)]		Limit [dB (uV)]		Margin (dB)	
			QP.	AV.	QP.	AV.	QP.	AV.	QP.	AV.
1	0.508	0.10	43.11	-	43.21	-	48.00	-	-4.79	-
2	0.610	0.10	36.59	-	36.69	-	48.00	-	-11.31	-
3	1.524	0.10	35.76	-	35.86	-	48.00	-	-12.14	-
4	4.059	0.30	35.70	-	36.00	-	48.00	-	-12.00	-
5	9.040	0.38	33.47	-	33.85	-	48.00	-	-14.15	-
6	22.571	0.85	37.87	-	38.72	-	48.00	-	-9.28	-

- Remarks:
1. "*": Undetectable
 2. QP. and AV. are abbreviations of quasi-peak and average individually.
 3. "-": NA
 4. The emission levels of other frequencies were very low against the limit.
 5. Margin value = Emission level - Limit value
 6. Emission Level = Correction Factor + Reading Value.

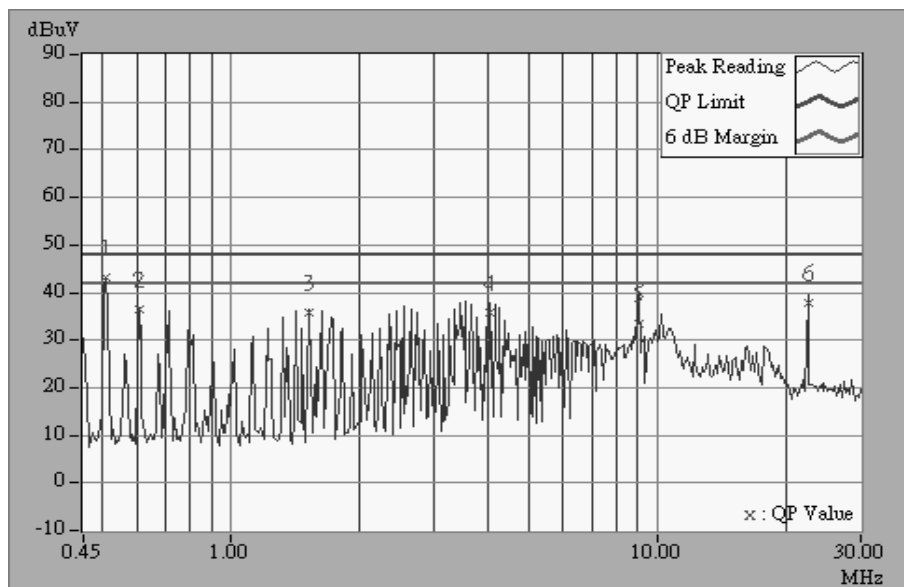




EUT	WLAN PCI Adapter	MODEL	LM-WA200
MODE	Channel 6	6dB BANDWIDTH	10 kHz
INPUT POWER (SYSTEM)	120Vac, 60 Hz	PHASE	Line (L)
ENVIRONMENTAL CONDITIONS	25 deg. C, 70%RH, 1005 hPa	TESTED BY: James Lee	

No	Freq. (MHz)	Corr. Factor (dB)	Reading Value [dB (uV)]		Emission Level [dB (uV)]		Limit [dB (uV)]		Margin (dB)	
			QP.	AV.	QP.	AV.	QP.	AV.	QP.	AV.
1	0.508	0.10	45.07	-	45.17	-	48.00	-	-2.83	-
2	0.610	0.10	38.49	-	38.59	-	48.00	-	-9.41	-
3	1.524	0.10	37.67	-	37.77	-	48.00	-	-10.23	-
4	2.536	0.15	38.87	-	39.02	-	48.00	-	-8.98	-
5	4.059	0.30	40.37	-	40.67	-	48.00	-	-7.33	-
6	22.571	1.05	38.72	-	39.77	-	48.00	-	-8.23	-


- Remarks:
1. "*": Undetectable
 2. QP. and AV. are abbreviations of quasi-peak and average individually.
 3. "-": NA
 4. The emission levels of other frequencies were very low against the limit.
 5. Margin value = Emission level - Limit value
 6. Emission Level = Correction Factor + Reading Value.

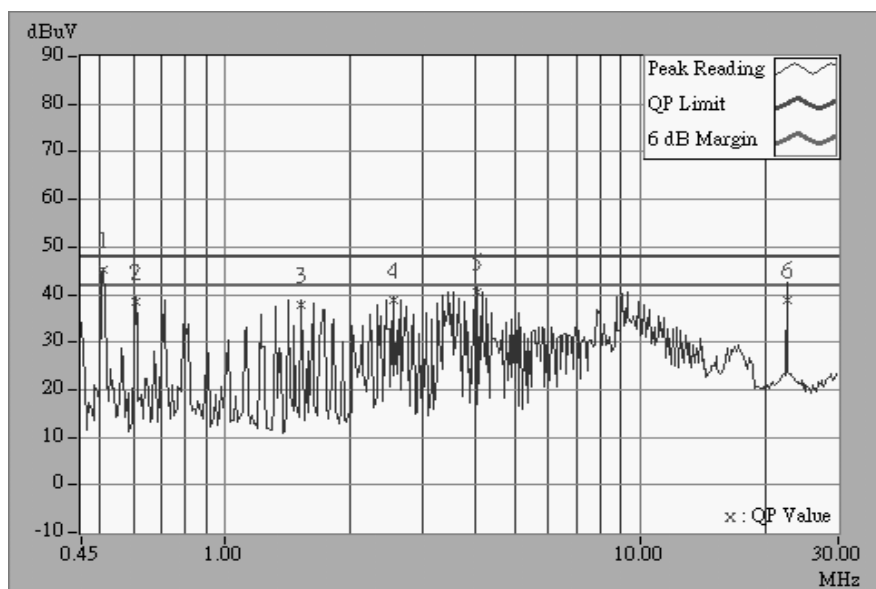

EUT	WLAN PCI Adapter	MODEL	LM-WA200
MODE	Channel 6	6dB BANDWIDTH	10 kHz
INPUT POWER (SYSTEM)	120Vac, 60 Hz	PHASE	Neutral (N)
ENVIRONMENTAL CONDITIONS	25 deg. C, 70%RH, 1005 hPa	TESTED BY: James Lee	

No	Freq. (MHz)	Corr. Factor (dB)	Reading Value [dB (uV)]		Emission Level [dB (uV)]		Limit [dB (uV)]		Margin (dB)	
			QP.	AV.	QP.	AV.	QP.	AV.	QP.	AV.
1	0.508	0.10	43.15	-	43.25	-	48.00	-	-4.75	-
2	0.610	0.10	36.57	-	36.67	-	48.00	-	-11.33	-
3	1.524	0.10	35.64	-	35.74	-	48.00	-	-12.26	-
4	3.450	0.25	36.86	-	37.11	-	48.00	-	-10.89	-
5	4.161	0.30	36.52	-	36.82	-	48.00	-	-11.18	-
6	22.571	0.85	37.83	-	38.68	-	48.00	-	-9.32	-

- Remarks:
1. "*": Undetectable
 2. QP. and AV. are abbreviations of quasi-peak and average individually.
 3. "-": NA
 4. The emission levels of other frequencies were very low against the limit.
 5. Margin value = Emission level - Limit value
 6. Emission Level = Correction Factor + Reading Value.

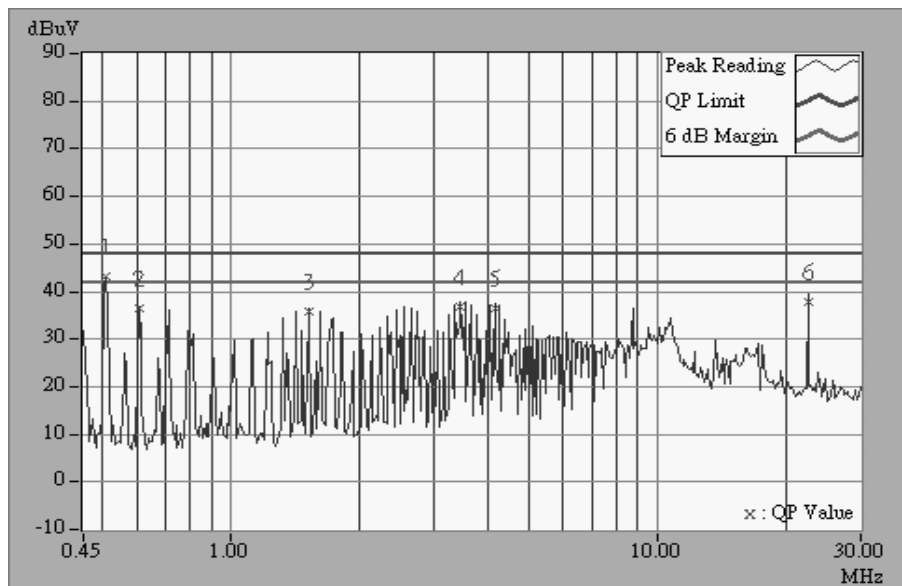




EUT	WLAN PCI Adapter	MODEL	LM-WA200
MODE	Channel 11	6dB BANDWIDTH	10 kHz
INPUT POWER (SYSTEM)	120Vac, 60 Hz	PHASE	Line (L)
ENVIRONMENTAL CONDITIONS	25 deg. C, 70%RH, 1005 hPa	TESTED BY: James Lee	

No	Freq. (MHz)	Corr. Factor (dB)	Reading Value [dB (uV)]		Emission Level [dB (uV)]		Limit [dB (uV)]		Margin (dB)	
			QP.	AV.	QP.	AV.	QP.	AV.	QP.	AV.
1	0.508	0.10	43.46	-	43.56	-	48.00	-	-4.44	-
2	0.610	0.10	36.92	-	37.02	-	48.00	-	-10.98	-
3	1.423	0.10	36.33	-	36.43	-	48.00	-	-11.57	-
4	3.552	0.26	39.04	-	39.30	-	48.00	-	-8.70	-
5	8.751	0.46	34.70	-	35.16	-	48.00	-	-12.84	-
6	22.571	1.05	40.45	-	41.50	-	48.00	-	-6.50	-

- Remarks:
1. "x": Undetectable
 2. QP. and AV. are abbreviations of quasi-peak and average individually.
 3. "-": NA
 4. The emission levels of other frequencies were very low against the limit.
 5. Margin value = Emission level - Limit value
 6. Emission Level = Correction Factor + Reading Value.

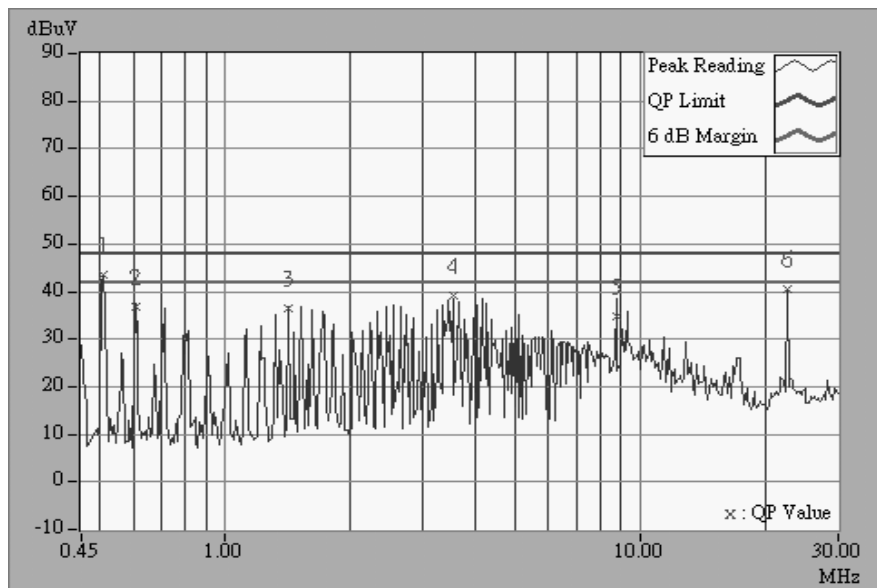




EUT	WLAN PCI Adapter	MODEL	LM-WA200
MODE	Channel 11	6dB BANDWIDTH	10 kHz
INPUT POWER (SYSTEM)	120Vac, 60 Hz	PHASE	Neutral (N)
ENVIRONMENTAL CONDITIONS	25 deg. C, 70%RH, 1005 hPa	TESTED BY: James Lee	

No	Freq.	Corr. Factor	Reading Value [dB (uV)]		Emission Level [dB (uV)]		Limit [dB (uV)]		Margin (dB)	
	[MHz]	(dB)	QP.	AV.	QP.	AV.	QP.	AV.	QP.	AV.
1	0.508	0.10	43.13	-	43.23	-	48.00	-	-4.77	-
2	0.610	0.10	36.69	-	36.79	-	48.00	-	-11.21	-
3	1.423	0.10	35.41	-	35.51	-	48.00	-	-12.49	-
4	3.552	0.26	37.15	-	37.41	-	48.00	-	-10.59	-
5	4.161	0.30	36.64	-	36.94	-	48.00	-	-11.06	-
6	22.571	0.85	37.99	-	38.84	-	48.00	-	-9.16	-

- Remarks:
1. "*": Undetectable
 2. QP. and AV. are abbreviations of quasi-peak and average individually.
 3. "-": NA
 4. The emission levels of other frequencies were very low against the limit.
 5. Margin value = Emission level - Limit value
 6. Emission Level = Correction Factor + Reading Value.

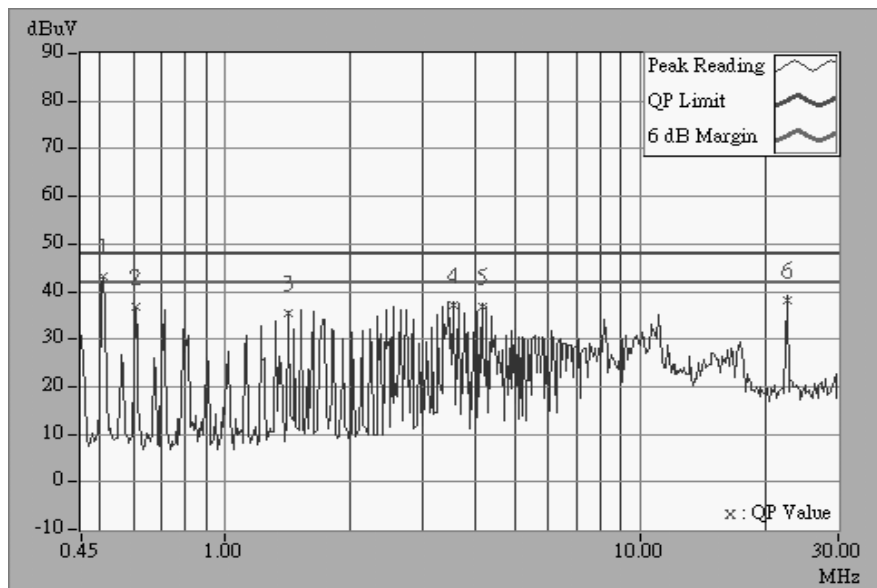


4.1.7 TEST RESULTS (B)

EUT	WLAN PCI Adapter	MODEL	LM-WA200
MODE	Channel 1	6dB BANDWIDTH	10 kHz
INPUT POWER (SYSTEM)	120Vac, 60 Hz	PHASE	Line (L)
ENVIRONMENTAL CONDITIONS	25 deg. C, 70%RH, 1005 hPa	TESTED BY: James Lee	

No	Freq. (MHz)	Corr. Factor (dB)	Reading Value [dB (uV)]		Emission Level [dB (uV)]		Limit [dB (uV)]		Margin (dB)	
			QP.	AV.	QP.	AV.	QP.	AV.	QP.	AV.
1	0.508	0.10	45.49	-	45.59	-	48.00	-	-2.41	-
2	1.520	0.10	37.96	-	38.06	-	48.00	-	-9.94	-
3	2.536	0.15	38.95	-	39.10	-	48.00	-	-8.90	-
4	4.059	0.30	39.59	-	39.89	-	48.00	-	-8.11	-
5	9.040	0.47	34.94	-	35.41	-	48.00	-	-12.59	-
6	22.571	1.05	40.38	-	41.43	-	48.00	-	-6.57	-

- Remarks:
1. "*": Undetectable
 2. QP. and AV. are abbreviations of quasi-peak and average individually.
 3. "-": NA
 4. The emission levels of other frequencies were very low against the limit.
 5. Margin value = Emission level - Limit value
 6. Emission Level = Correction Factor + Reading Value.

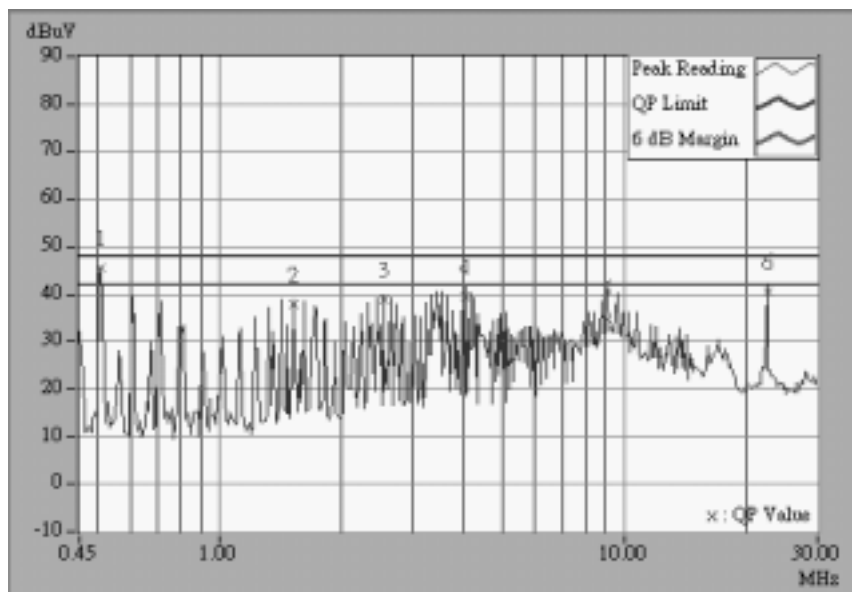




EUT	WLAN PCI Adapter	MODEL	LM-WA200
MODE	Channel 1	6dB BANDWIDTH	10 kHz
INPUT POWER (SYSTEM)	120Vac, 60 Hz	PHASE	Neutral (N)
ENVIRONMENTAL CONDITIONS	25 deg. C, 70%RH, 1005 hPa	TESTED BY: James Lee	

No	Freq. (MHz)	Corr. Factor (dB)	Reading Value [dB (uV)]		Emission Level [dB (uV)]		Limit [dB (uV)]		Margin (dB)	
			QP.	AV.	QP.	AV.	QP.	AV.	QP.	AV.
1	0.509	0.10	42.95	-	43.05	-	48.00	-	-4.95	-
2	0.610	0.10	36.57	-	36.67	-	48.00	-	-11.33	-
3	1.524	0.10	35.86	-	35.96	-	48.00	-	-12.04	-
4	3.552	0.26	36.95	-	37.21	-	48.00	-	-10.79	-
5	9.040	0.38	33.26	-	33.64	-	48.00	-	-14.36	-
6	22.571	0.85	37.87	-	38.72	-	48.00	-	-9.28	-

- Remarks:
1. "*": Undetectable
 2. QP. and AV. are abbreviations of quasi-peak and average individually.
 3. "-": NA
 4. The emission levels of other frequencies were very low against the limit.
 5. Margin value = Emission level - Limit value
 6. Emission Level = Correction Factor + Reading Value.

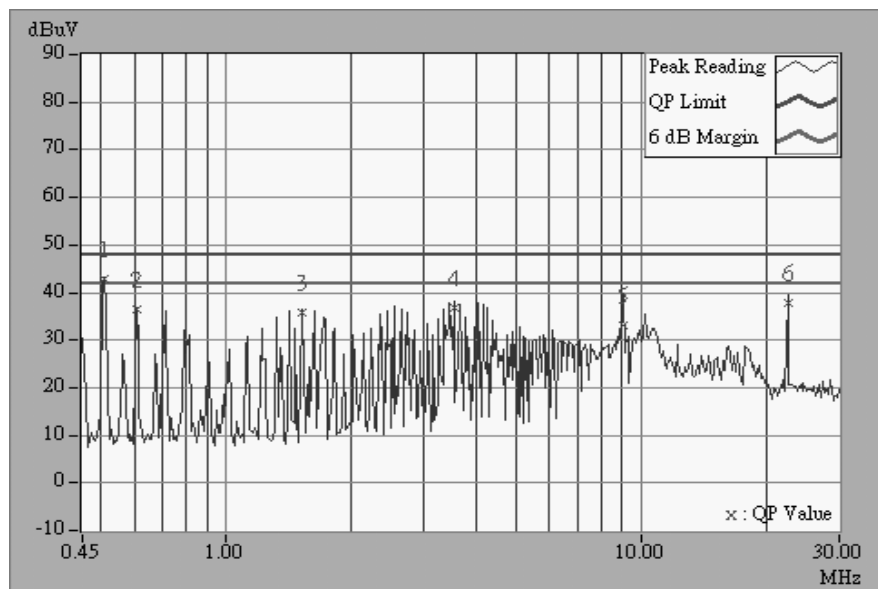




EUT	WLAN PCI Adapter	MODEL	LM-WA200
MODE	Channel 6	6dB BANDWIDTH	10 kHz
INPUT POWER (SYSTEM)	120Vac, 60 Hz	PHASE	Line (L)
ENVIRONMENTAL CONDITIONS	25 deg. C, 70%RH, 1005 hPa	TESTED BY: James Lee	

No	Freq. (MHz)	Corr. Factor (dB)	Reading Value [dB (uV)]		Emission Level [dB (uV)]		Limit [dB (uV)]		Margin (dB)	
			QP.	AV.	QP.	AV.	QP.	AV.	QP.	AV.
1	0.508	0.10	45.35	-	45.45	-	48.00	-	-2.55	-
2	0.610	0.10	38.93	-	39.03	-	48.00	-	-8.97	-
3	1.524	0.10	38.35	-	38.45	-	48.00	-	-9.55	-
4	2.536	0.15	38.77	-	38.92	-	48.00	-	-9.08	-
5	2.536	0.15	38.83	-	38.98	-	48.00	-	-9.02	-
6	22.571	1.05	40.32	-	41.37	-	48.00	-	-6.63	-

- Remarks:
1. "*": Undetectable
 2. QP. and AV. are abbreviations of quasi-peak and average individually.
 3. "-": NA
 4. The emission levels of other frequencies were very low against the limit.
 5. Margin value = Emission level - Limit value
 6. Emission Level = Correction Factor + Reading Value.

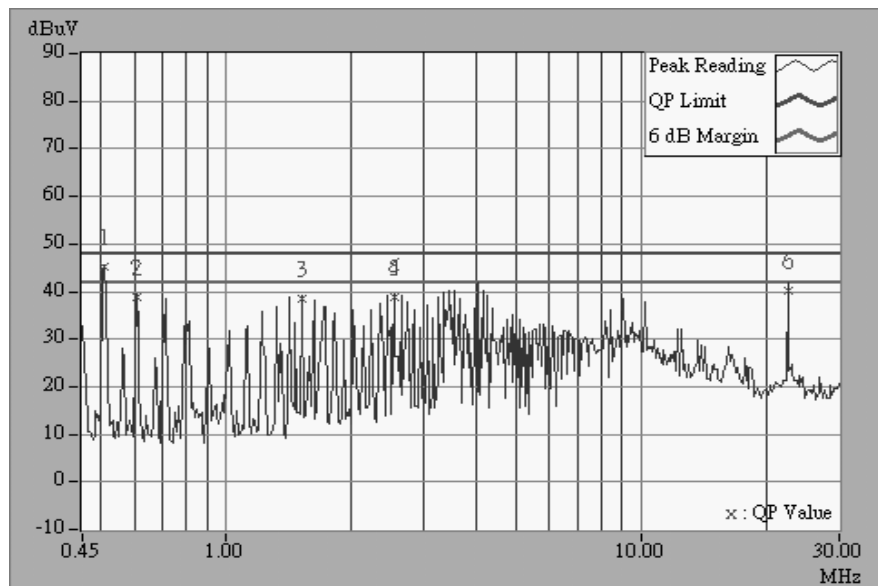




EUT	WLAN PCI Adapter	MODEL	LM-WA200
MODE	Channel 6	6dB BANDWIDTH	10 kHz
INPUT POWER (SYSTEM)	120Vac, 60 Hz	PHASE	Neutral (N)
ENVIRONMENTAL CONDITIONS	25 deg. C, 70%RH, 1005 hPa	TESTED BY: James Lee	

No	Freq. (MHz)	Corr. Factor (dB)	Reading Value [dB (uV)]		Emission Level [dB (uV)]		Limit [dB (uV)]		Margin (dB)	
			QP.	AV.	QP.	AV.	QP.	AV.	QP.	AV.
1	0.508	0.10	43.09	-	43.19	-	48.00	-	-4.81	-
2	0.610	0.10	36.65	-	36.75	-	48.00	-	-11.25	-
3	1.524	0.10	35.70	-	35.80	-	48.00	-	-12.20	-
4	3.552	0.26	37.03	-	37.29	-	48.00	-	-10.71	-
5	4.059	0.30	35.98	-	36.28	-	48.00	-	-11.72	-
6	22.571	0.85	37.63	-	38.48	-	48.00	-	-9.52	-

- Remarks:
1. "*": Undetectable
 2. QP. and AV. are abbreviations of quasi-peak and average individually.
 3. "-": NA
 4. The emission levels of other frequencies were very low against the limit.
 5. Margin value = Emission level - Limit value
 6. Emission Level = Correction Factor + Reading Value.

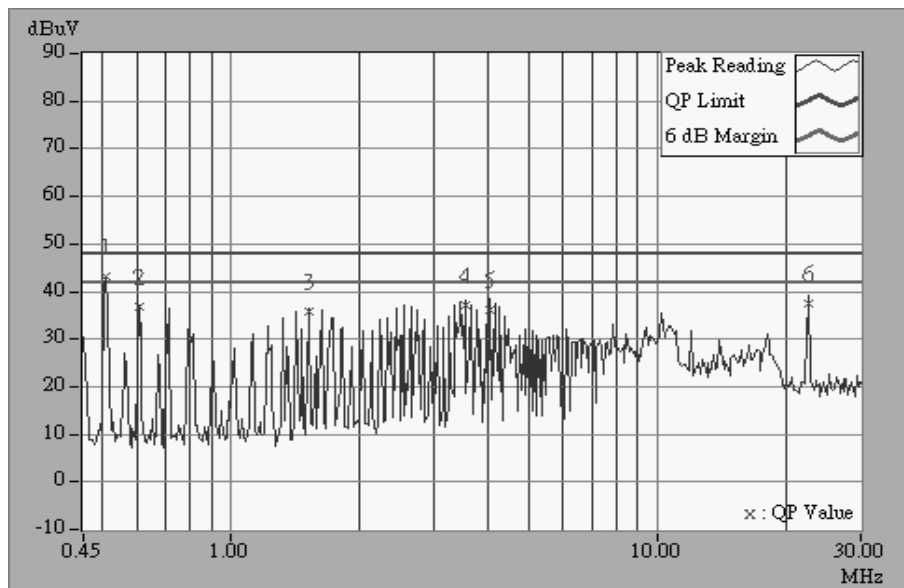




EUT	WLAN PCI Adapter	MODEL	LM-WA200
MODE	Channel 11	6dB BANDWIDTH	10 kHz
INPUT POWER (SYSTEM)	120Vac, 60 Hz	PHASE	Line (L)
ENVIRONMENTAL CONDITIONS	25 deg. C, 70%RH, 1005 hPa	TESTED BY: James Lee	

No	Freq. (MHz)	Corr. Factor (dB)	Reading Value [dB (uV)]		Emission Level [dB (uV)]		Limit [dB (uV)]		Margin (dB)	
			QP.	AV.	QP.	AV.	QP.	AV.	QP.	AV.
1	0.507	0.10	45.49	-	45.59	-	48.00	-	-2.41	-
2	0.610	0.10	39.03	-	39.13	-	48.00	-	-8.87	-
3	1.524	0.10	38.30	-	38.40	-	48.00	-	-9.60	-
4	4.059	0.30	39.68	-	39.98	-	48.00	-	-8.02	-
5	9.626	0.49	36.17	-	36.66	-	48.00	-	-11.34	-
6	22.571	1.05	39.95	-	41.00	-	48.00	-	-7.00	-

- Remarks:
1. "*": Undetectable
 2. QP. and AV. are abbreviations of quasi-peak and average individually.
 3. "-": NA
 4. The emission levels of other frequencies were very low against the limit.
 5. Margin value = Emission level - Limit value
 6. Emission Level = Correction Factor + Reading Value.

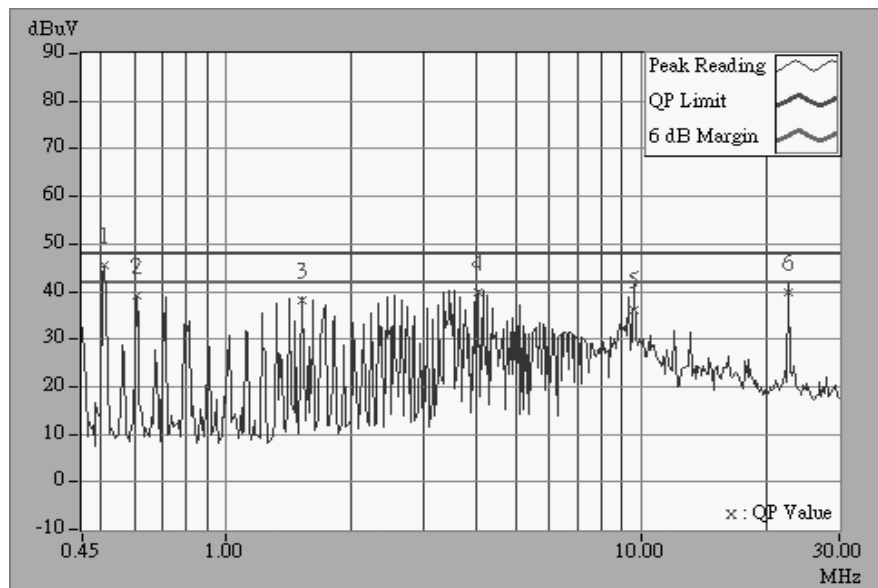




EUT	WLAN PCI Adapter	MODEL	LM-WA200
MODE	Channel 11	6dB BANDWIDTH	10 kHz
INPUT POWER (SYSTEM)	120Vac, 60 Hz	PHASE	Neutral (N)
ENVIRONMENTAL CONDITIONS	25 deg. C, 70%RH, 1005 hPa	TESTED BY: James Lee	

No	Freq.	Corr. Factor	Reading Value [dB (uV)]		Emission Level [dB (uV)]		Limit [dB (uV)]		Margin (dB)	
	[MHz]	(dB)	QP.	AV.	QP.	AV.	QP.	AV.	QP.	AV.
1	0.508	0.10	43.13	-	43.23	-	48.00	-	-4.77	-
2	0.610	0.10	36.57	-	36.67	-	48.00	-	-11.33	-
3	0.610	0.10	36.55	-	36.65	-	48.00	-	-11.35	-
4	2.536	0.15	36.36	-	36.51	-	48.00	-	-11.49	-
5	3.552	0.26	37.05	-	37.31	-	48.00	-	-10.69	-
6	22.571	0.85	37.75	-	38.60	-	48.00	-	-9.40	-

- Remarks:
1. "*": Undetectable
 2. QP. and AV. are abbreviations of quasi-peak and average individually.
 3. "-": NA
 4. The emission levels of other frequencies were very low against the limit.
 5. Margin value = Emission level - Limit value
 6. Emission Level = Correction Factor + Reading Value.

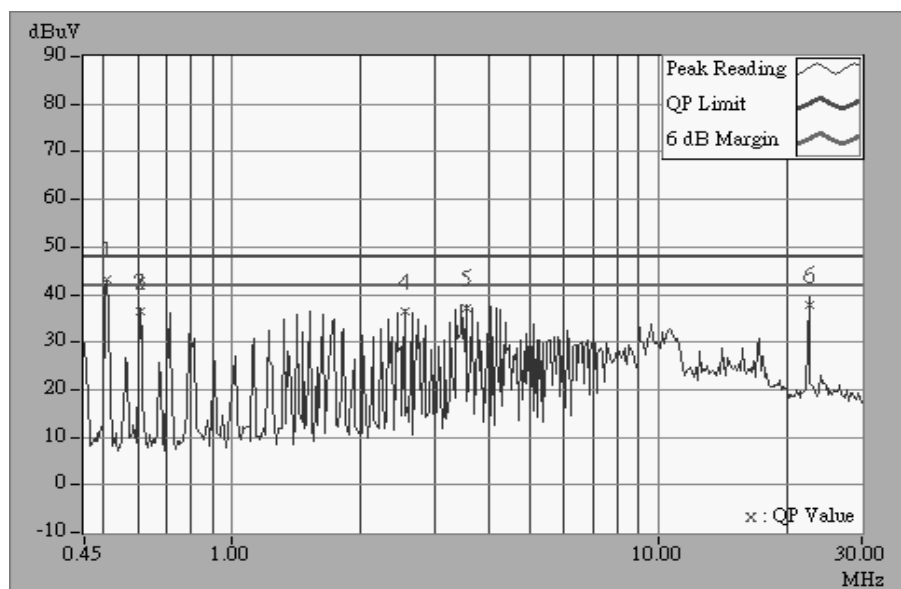



4.2 RADIATED EMISSION MEASUREMENT

4.2.1 LIMITS OF RADIATED EMISSION MEASUREMENT

Field strength limits are at the distance of 3 meters, emissions radiated outside of the specified bands, shall be according to the general radiated limits in 15.209 as following:

Frequencies (MHz)	Field Strength of Fundamental	
	uV/m	dBuV/m
30-88	100	40.0
88-216	150	43.5
216-960	200	46.0
Above 960	500	54.0

NOTE:

1. The lower limit shall apply at the transition frequencies.
2. Emission level (dBuV/m) = 20 log Emission level (uV/m).
3. As shown in 15.35(b), for frequencies above 1000MHz, the field strength limits are based on average detector, however, the peak field strength of any emission shall not exceed the maximum permitted average limits, specified above by more than 20dB under any condition of modulation.



4.2.2 TEST INSTRUMENTS

DESCRIPTION & MANUFACTURER	MODEL NO.	SERIAL NO.	CALIBRATED UNTIL
*HP Spectrum Analyzer	8590L	3544A01176	May 7, 2002
*HP Preamplifier	8447D	2944A08485	Nov. 3, 2001
* HP Preamplifier	8449B	3008A01201	Dec. 13, 2001
* HP Preamplifier	8449B	3008A01292	Aug. 21, 2002
* ROHDE & SCHWARZ TEST RECEIVER	ESMI	839013/007 839379/002	Jan. 25, 2002
SCHWARZBECK Tunable Dipole Antenna	VHA 9103 UHA 9105	E101051 E101055	Nov. 23, 2001
* CHASE BILOG Antenna	CBL6112A	2221	Aug. 2, 2002
* SCHWARZBECK Horn Antenna	BBHA9120-D1	D130	July 6, 2002
* EMCO Horn Antenna	3115	9312-4192	April 15, 2002
* EMCO Turn Table	1060	1115	NA
* SHOSHIN Tower	AP-4701	A6Y005	NA
* Software	AS61D4	NA	NA
* ANRITSU RF Switches	MP59B	M35046	Aug. 2, 2002
* TIMES RF cable	LMR-600	CABLE-ST5-01	Aug. 2, 2002
Open Field Test Site	Site 5	ADT-R05	July 28, 2002
Site Registration No.	FCC: 90422 Canada IC: IC 3789 VCCI : R-1039		

- NOTE:** 1. The measurement uncertainty is less than +/- 3.0dB, which is calculated as per the NAMAS document NIS81.
2. The calibration interval of the above test instruments is 12 months. And the calibrations are traceable to NML/ROC and NIST/USA.
3. "*" = These equipment are used for the final measurement.
4. The horn antenna and HP preamplifier (model: 8449B) are used only for the measurement of emission frequency above 1GHz




4.2.3 TEST PROCEDURES

- a. The EUT was placed on the top of a rotating table 0.8 meters above the ground at a 10 meter open area test site. The table was rotated 360 degrees to determine the position of the highest radiation.
- b. The EUT was set 3 meters away from the interference-receiving antenna, which was mounted on the top of a variable-height antenna tower.
- c. The antenna is a broadband antenna, and its height is varied from one meter to four meters above the ground to determine the maximum value of the field strength. Both horizontal and vertical polarizations of the antenna are set to make the measurement.
- d. For each suspected emission, the EUT was arranged to its worst case and then the antenna was tuned to heights from 1 meter to 4 meters and the rotatable table was turned from 0 degrees to 360 degrees to find the maximum reading.
- e. The test-receiver system was set to Peak Detect Function and Specified Bandwidth with Maximum Hold Mode.
- f. If the emission level of the EUT in peak mode was 10 dB lower than the limit specified, then testing could be stopped and the peak values of the EUT would be reported. Otherwise the emissions that did not have 10 dB margin would be re-tested one by one using the quasi-peak method or average method as specified and then reported in Data sheet peak mode and QP mode.

NOTE:

1. The resolution bandwidth and video bandwidth of test receiver/spectrum analyzer is 120kHz for Quasi-peak detection at frequency below 1GHz.
2. The resolution bandwidth and video bandwidth of test receiver/spectrum analyzer is 1 MHz for Peak detection (PK) at frequency above 1GHz.
3. The resolution bandwidth of test receiver/spectrum analyzer is 1 MHz and the video bandwidth is 300 Hz for Average detection (AV) at frequency above 1GHz.

4.2.4 TEST SETUP

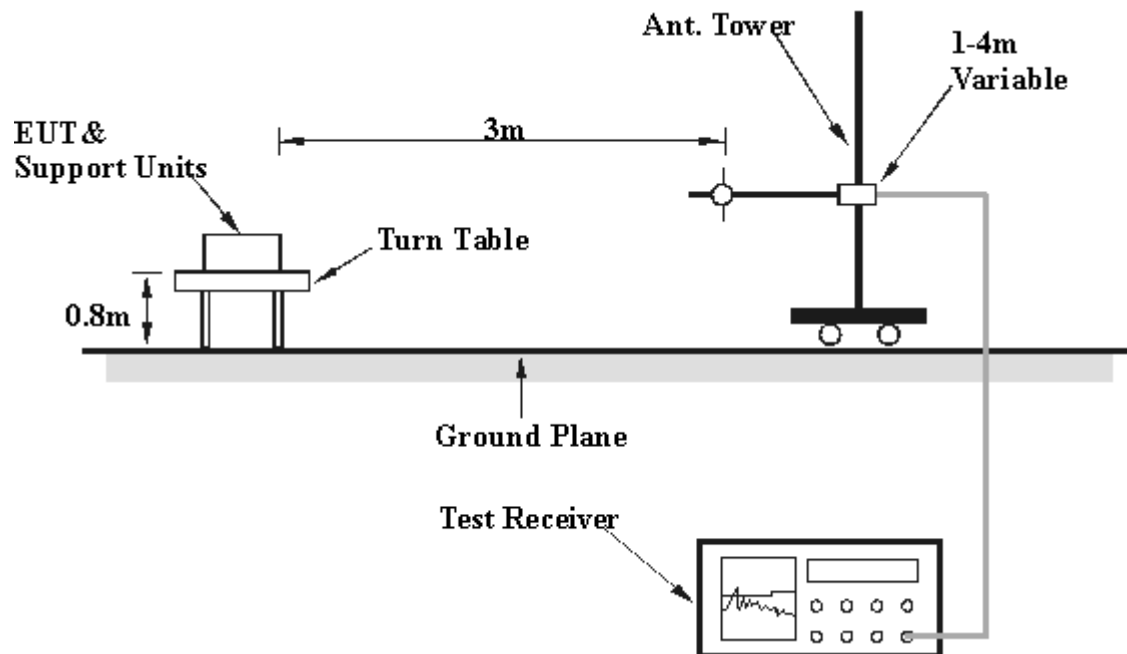

For the actual test configuration, please refer to the related item – Photographs of the Test Configuration.

4.2.5 EUT OPERATING CONDITIONS

Same as 4.1.5.



4.2.6 TEST RESULTS (A)

EUT	WLAN PCI Adapter	MODEL	LM-WA200
MODE	Channel 11	FREQUENCY RANGE	30-1000 MHz
INPUT POWER (SYSTEM)	120Vac, 60 Hz	DETECTOR FUNCTION	Quasi-Peak
ENVIRONMENTAL CONDITIONS	25 deg. C, 70%RH, 1005 hPa	TESTED BY: Gary Chang	

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M

No.	Freq. (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Antenna Factor (dB/m)	Cable Factor (dB)	Pre-Amp. Factor (dB)	Correction Factor (dB/m)
1	132.00	31.3 QP	43.50	-12.20	1.57H	206	19.00	11.16	1.13	0.00	-12.29
2	176.00	28.4 QP	43.50	-15.10	1.11H	286	18.00	9.08	1.33	0.00	-10.42
3	220.40	29.3 QP	46.00	-16.70	1.35H	241	17.50	10.26	1.52	0.00	-11.79
4	264.00	32.6 QP	46.00	-13.40	1.24H	4	18.00	12.89	1.70	0.00	-14.59
5	528.00	37.2 QP	46.00	-8.80	1.73H	20	17.00	17.62	2.60	0.00	-20.23
6	660.40	35.3 QP	46.00	-10.70	1.11H	129	13.00	19.25	3.05	0.00	-22.29
7	748.00	34.8 QP	46.00	-11.20	1.22H	194	11.40	20.14	3.26	0.00	-23.40
8	792.00	38.4 QP	46.00	-7.60	1.27H	2	14.50	20.60	3.31	0.00	-23.91.

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M

No.	Freq. (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Antenna Factor (dB/m)	Cable Factor (dB)	Pre-Amp. Factor (dB)	Correction Factor (dB/m)
1	132.00	30.3 QP	43.50	-13.20	1.22V	322	18.00	11.16	1.13	0.00	-12.29
2	220.40	32.8 QP	46.00	-13.20	1.40V	276	21.00	10.26	1.52	0.00	-11.79
3	264.10	31.4 QP	46.00	-14.60	1.24V	244	17.00	12.75	1.70	0.00	-14.45
4	396.00	34.0 QP	46.00	-12.00	1.73V	29	15.80	15.96	2.22	0.00	-18.18
5	484.00	34.4 QP	46.00	-11.60	1.48V	132	15.00	16.96	2.47	0.00	-19.43
6	528.00	36.2 QP	46.00	-9.80	2.25V	89	16.00	17.62	2.60	0.00	-20.22
7	660.30	36.3 QP	46.00	-9.70	1.11V	326	14.00	19.25	3.05	0.00	-22.29
8	748.00	36.4 QP	46.00	-9.60	1.60V	58	13.00	20.14	3.26	0.00	-23.41

- NOTE:**
- 1 Emission level = Raw Value - Correction Factor
 - 2 Correction Factor = External Preamp. Gain - Ant. Factor - Cable loss
(External Preamp. Gain = 0, when the test receiver is used for the test.)
 - 3 The other emission levels were very low against the limit.
 - 4 Margin value = Emission level - Limit value



EUT	WLAN PCI Adapter	MODEL	LM-WA200
MODE	Channel 1	FREQUENCY RANGE	Above 1000 MHz
INPUT POWER (SYSTEM)	120Vac, 60 Hz	DETECTOR FUNCTION	Peak(PK) Average (AV)
ENVIRONMENTAL CONDITIONS	25 deg. C, 70%RH, 1005 hPa	TESTED BY: Gary Chang	

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M

No.	Freq. (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Antenna Factor (dB/m)	Cable Factor (dB)	Pre-Amp. Factor (dB)	Correction Factor (dB/m)
1	2038.00	47.2 PK	74.00	-26.80	1.45H	357	52.00	25.20	4.86	34.90	4.84
2	*2412.60	104.9 PK	-	-	1.52H	60	72.65	27.11	5.10	0.00	-32.22
3	*2412.60	99.0 AV	-	-	1.52H	60	66.80	27.11	5.10	0.00	-32.22
4	4075.00	51.4 PK	74.00	-22.60	1.09H	144	49.00	30.13	6.78	34.52	-2.39
5	4824.00	52.0 PK	74.00	-22.00	1.29H	282	48.00	31.43	7.23	34.63	-4.02

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M

No.	Freq. (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Antenna Factor (dB/m)	Cable Factor (dB)	Pre-Amp. Factor (dB)	Correction Factor (dB/m)
1	2037.80	48.2 PK	74.00	-25.80	1.43V	13	53.07	25.20	4.86	34.90	4.84
2	*2413.60	104.5 PK	-	-	1.11V	321	72.25	27.11	5.10	0.00	-32.21
3	*2413.60	99.2 AV	-	-	1.11V	321	67.00	27.11	5.10	0.00	-32.21
4	4075.00	48.4 PK	74.00	-25.60	1.28V	14	46.00	30.13	6.78	34.52	-2.39
5	4824.20	51.0 PK	74.00	-23.00	1.48V	253	47.00	31.43	7.23	34.63	-4.02

- NOTE:**
1. Emission level = Raw Value - Correction Factor
 2. Correction Factor = External Preamp. Gain - Ant. Factor - Cable loss
(External Preamp. Gain = 0, when the test receiver is used for the test.)
 3. The other emission levels were very low against the limit.
 4. Margin value = Emission level - Limit value
 5. The limit value is defined as per 15.247
 6. " * " : Fundamental frequency



EUT	WLAN PCI Adapter	MODEL	LM-WA200
MODE	Channel 6	FREQUENCY RANGE	Above 1000 MHz
INPUT POWER (SYSTEM)	120Vac, 60 Hz	DETECTOR FUNCTION	Peak(PK) Average (AV)
ENVIRONMENTAL CONDITIONS	25 deg. C, 70%RH, 1005 hPa	TESTED BY: Gary Chang	

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M

No.	Freq. (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Antenna Factor (dB/m)	Cable Factor (dB)	Pre-Amp. Factor (dB)	Correction Factor (dB/m)
1	2062.80	47.2 PK	74.00	-26.80	1.29H	60	51.75	25.41	4.96	34.90	4.53
2	*2437.00	101.1 PK	-	-	2.37H	345	68.74	27.33	5.08	0.00	-32.40
3	*2437.00	92.4 AV	-	-	2.37H	345	60.00	27.33	5.08	0.00	-32.40
4	4126.00	49.6 PK	74.00	-24.40	1.42H	355	47.13	30.32	6.70	34.56	-2.46
5	4874.00	50.9 PK	74.00	-23.10	1.31H	63	46.80	31.47	7.21	34.63	-4.06

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M

No.	Freq. (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Antenna Factor (dB/m)	Cable Factor (dB)	Pre-Amp. Factor (dB)	Correction Factor (dB/m)
1	2063.00	47.5 PK	74.00	-26.50	2.39V	356	52.06	25.41	4.96	34.90	4.53
2	*2437.00	100.6 PK	-	-	1.46V	52	68.21	27.33	5.08	0.00	-32.41
3	*2437.00	92.8 AV	-	-	1.46V	52	60.40	27.33	5.08	0.00	-32.41
4	4126.00	51.5 PK	74.00	-22.50	1.63V	100	49.00	30.32	6.70	34.56	-2.46
5	4874.00	51.3 PK	74.00	-22.70	1.43V	353	47.20	31.47	7.21	34.63	-4.05

- NOTE:**
1. Emission level = Raw Value - Correction Factor
 2. Correction Factor = External Preamp. Gain - Ant. Factor - Cable loss
(External Preamp. Gain = 0, when the test receiver is used for the test.)
 3. The other emission levels were very low against the limit.
 4. Margin value = Emission level - Limit value
 5. The limit value is defined as per 15.247
 6. " * " : Fundamental frequency



EUT	WLAN PCI Adapter	MODEL	LM-WA200
MODE	Channel 11	FREQUENCY RANGE	Above 1000 MHz
INPUT POWER (SYSTEM)	120Vac, 60 Hz	DETECTOR FUNCTION	Peak(PK) Average (AV)
ENVIRONMENTAL CONDITIONS	25 deg. C, 70%RH, 1005 hPa	TESTED BY: Gary Chang	

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M

No.	Freq. (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Antenna Factor (dB/m)	Cable Factor (dB)	Pre-Amp. Factor (dB)	Correction Factor (dB/m)
1	2088.00	47.2 PK	74.00	-26.80	1.03H	346	51.50	25.62	5.02	34.90	4.26
2	*2462.70	98.0 PK	-	-	1.79H	65	65.62	27.33	5.08	0.00	-32.40
3	*2462.70	90.6 AV	-	-	1.79H	65	58.20	27.33	5.08	0.00	-32.40
4	2496.00	51.2 PK	74.00	-22.80	1.28H	49	53.50	27.54	5.06	34.90	2.32
5	4176.00	52.5 PK	74.00	-21.50	1.24H	10	50.00	30.41	6.68	34.58	-2.51
6	4924.00	52.1 PK	74.00	-21.90	1.13H	6	48.00	31.51	7.21	34.62	-4.10

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M

No.	Freq. (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Antenna Factor (dB/m)	Cable Factor (dB)	Pre-Amp. Factor (dB)	Correction Factor (dB/m)
1	2088.00	49.2 PK	74.00	-24.80	1.83V	139	53.50	25.62	5.02	34.90	4.26
2	*2462.70	99.1 PK	-	-	1.02V	342	66.74	27.33	5.08	0.00	-32.41
3	*2462.70	91.4 AV	-	-	1.02V	342	59.00	27.33	5.08	0.00	-32.41
4	2483.50	51.0 PK	74.00	-23.00	1.60V	62	53.33	27.54	5.06	34.90	2.32
5	4176.00	50.5 PK	74.00	-23.50	1.54V	298	48.00	30.41	6.68	34.58	-2.51
6	4924.10	50.9 PK	74.00	-23.10	1.41V	282	46.80	31.51	7.21	34.62	-4.10

- NOTE:**
1. Emission level= Raw Value - Correction Factor
 2. Correction Factor = External Preamp. Gain - Ant. Factor - Cable loss
(External Preamp. Gain = 0, when the test receiver is used for the test.)
 3. The other emission levels were very low against the limit.
 4. Margin value = Emission level - Limit value
 5. The limit value is defined as per 15.247
 6. “ * ” : Fundamental frequency



4.2.7 TEST RESULTS (B)

EUT	WLAN PCI Adapter	MODEL	LM-WA200
MODE	Channel 11	FREQUENCY RANGE	30-1000 MHz
INPUT POWER (SYSTEM)	120Vac, 60 Hz	DETECTOR FUNCTION	Quasi-Peak
ENVIRONMENTAL CONDITIONS	25 deg. C, 70%RH, 1005 hPa	TESTED BY: Gary Chang	

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M											
No.	Freq. (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Antenna Factor (dB/m)	Cable Factor (dB)	Pre-Amp. Factor (dB)	Correction Factor (dB/m)
1	132.00	27.5 QP	43.50	-16.00	1.06H	229	15.20	11.16	1.13	0.00	-12.29
2	176.00	28.4 QP	43.50	-15.10	1.20H	270	18.00	9.08	1.33	0.00	-10.42
3	220.40	27.8 QP	46.00	-18.20	1.09H	319	16.00	10.26	1.52	0.00	-11.79
4	396.00	33.6 QP	46.00	-12.40	1.04H	281	15.40	15.96	2.22	0.00	-18.18
5	440.10	32.9 QP	46.00	-13.10	1.01H	227	14.20	16.32	2.38	0.00	-18.69
6	528.00	33.2 QP	46.00	-12.80	1.01H	140	13.00	17.62	2.60	0.00	-20.22
7	616.00	32.1 QP	46.00	-13.90	1.29H	35	10.40	18.82	2.89	0.00	-21.71
8	748.00	34.4 QP	46.00	-11.60	1.11H	65	11.00	20.14	3.26	0.00	-23.40
9	792.00	33.1 QP	46.00	-12.90	1.18H	55	9.20	20.60	3.31	0.00	-23.91

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M											
No.	Freq. (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Antenna Factor (dB/m)	Cable Factor (dB)	Pre-Amp. Factor (dB)	Correction Factor (dB/m)
1	132.00	30.3 QP	43.50	-13.20	1.09V	169	18.00	11.16	1.13	0.00	-12.29
2	220.00	30.0 QP	46.00	-16.00	1.22V	91	18.40	10.12	1.51	0.00	-11.64
3	352.00	31.6 QP	46.00	-14.40	1.40V	149	15.20	14.31	2.05	0.00	-16.36
4	440.10	32.8 QP	46.00	-13.20	1.57V	211	14.10	16.32	2.38	0.00	-18.69
5	528.40	33.3 QP	46.00	-12.70	1.37V	266	13.00	17.66	2.61	0.00	-20.26
6	660.70	33.1 QP	46.00	-12.90	1.58V	212	10.80	19.25	3.05	0.00	-22.29
7	748.00	35.4 QP	46.00	-10.60	1.60V	235	12.00	20.14	3.26	0.00	-23.40
8	792.00	35.6 QP	46.00	-10.40	1.46V	145	11.70	20.60	3.31	0.00	-23.91

- NOTE:**
- 1 Emission level = Raw Value - Correction Factor
 - 2 Correction Factor = External Preamp. Gain - Ant. Factor - Cable loss
(External Preamp. Gain = 0, when the test receiver is used for the test.)
 - 3 The other emission levels were very low against the limit.
 - 4 Margin value = Emission level - Limit value



EUT	WLAN PCI Adapter	MODEL	LM-WA200
MODE	Channel 1	FREQUENCY RANGE	Above 1000 MHz
INPUT POWER (SYSTEM)	120Vac, 60 Hz	DETECTOR FUNCTION	Peak(PK) Average (AV)
ENVIRONMENTAL CONDITIONS	25 deg. C, 70%RH, 1005 hPa	TESTED BY: Gary Chang	

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M

No.	Freq. (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Antenna Factor (dB/m)	Cable Factor (dB)	Pre-Amp. Factor (dB)	Correction Factor (dB/m)
1	2037.80	48.4 PK	74.00	-25.60	1.28H	284	19.83	25.27	3.29	0.00	-28.57
2	*2413.50	109.2 PK	-	-	1.81H	342	78.40	27.19	3.62	0.00	-30.82
3	*2413.50	99.0 AV	-	-	1.81H	342	68.20	27.19	3.62	0.00	-30.82
4	4075.20	49.5 PK	74.00	-24.50	1.38H	68	14.60	30.18	4.77	0.00	-34.96
5	4824.10	50.2 PK	74.00	-23.80	1.39H	311	13.60	31.43	5.21	0.00	-36.64

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M

No.	Freq. (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Antenna Factor (dB/m)	Cable Factor (dB)	Pre-Amp. Factor (dB)	Correction Factor (dB/m)
1	2037.80	50.9 PK	74.00	-23.10	1.12V	360	22.31	25.27	3.29	0.00	-28.57
2	*2413.50	102.4 PK	-	-	1.99V	29	71.56	27.19	3.62	0.00	-30.81.
3	*2413.50	93.5 AV	-	-	1.99V	29	62.70	27.19	3.62	0.00	-30.81.
4	4075.00	49.2 PK	74.00	-24.80	1.51V	294	14.30	30.18	4.77	0.00	-34.95
5	4824.10	50.0 PK	74.00	-24.00	1.47V	17	13.40	31.43	5.21	0.00	-36.65

- NOTE:**
1. Emission level = Raw Value - Correction Factor
 2. Correction Factor = External Preamp. Gain - Ant. Factor - Cable loss
(External Preamp. Gain = 0, when the test receiver is used for the test.)
 3. The other emission levels were very low against the limit.
 4. Margin value = Emission level - Limit value
 5. The limit value is defined as per 15.247
 6. " * " : Fundamental frequency



EUT	WLAN PCI Adapter	MODEL	LM-WA200
MODE	Channel 6	FREQUENCY RANGE	Above 1000 MHz
INPUT POWER (SYSTEM)	120Vac, 60 Hz	DETECTOR FUNCTION	Peak(PK) Average (AV)
ENVIRONMENTAL CONDITIONS	25 deg. C, 70%RH, 1005 hPa	TESTED BY: Gary Chang	

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M

No.	Freq. (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Antenna Factor (dB/m)	Cable Factor (dB)	Pre-Amp. Factor (dB)	Correction Factor (dB/m)
1	2062.80	49.2 PK	74.00	-24.80	1.51H	31	20.54	25.39	3.31	0.00	-28.70
2	*2438.50	105.7 PK	-	-	2.04H	38	74.79	27.30	3.64	0.00	-30.95
3	*2438.50	97.6 AV	-	-	2.04H	38	66.71	27.30	3.64	0.00	-30.95
4	4125.60	48.9 PK	74.00	-25.10	2.01H	310	13.80	30.28	4.79	0.00	-35.07
5	4874.10	50.4 PK	74.00	-23.60	1.43H	352	13.70	31.47	5.25	0.00	-36.72

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M

No.	Freq. (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Antenna Factor (dB/m)	Cable Factor (dB)	Pre-Amp. Factor (dB)	Correction Factor (dB/m)
1	2062.80	47.1 PK	74.00	-26.90	2.51V	67	18.40	25.39	3.31	0.00	-28.70
2	*2438.50	105.9 PK	-	-	1.00V	287	75.01	27.30	3.64	0.00	-30.94
3	*2438.50	98.1 AV	-	-	1.00V	287	67.20	27.30	3.64	0.00	-30.94
4	4125.10	49.2 PK	74.00	-24.80	1.00V	149	14.10	30.28	4.79	0.00	-35.07
5	4874.20	49.9 PK	74.00	-24.10	1.30V	229	13.20	31.47	5.25	0.00	-36.72

- NOTE:**
1. Emission level = Raw Value - Correction Factor
 2. Correction Factor = External Preamp. Gain - Ant. Factor - Cable loss
(External Preamp. Gain = 0, when the test receiver is used for the test.)
 3. The other emission levels were very low against the limit.
 4. Margin value = Emission level - Limit value
 5. The limit value is defined as per 15.247
 6. " * " : Fundamental frequency



EUT	WLAN PCI Adapter	MODEL	LM-WA200
MODE	Channel 11	FREQUENCY RANGE	Above 1000 MHz
INPUT POWER (SYSTEM)	120Vac, 60 Hz	DETECTOR FUNCTION	Peak(PK) Average (AV)
ENVIRONMENTAL CONDITIONS	25 deg. C, 70%RH, 1005 hPa	TESTED BY: Gary Chang	

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M

No.	Freq. (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Antenna Factor (dB/m)	Cable Factor (dB)	Pre-Amp. Factor (dB)	Correction Factor (dB/m)
1	2087.70	49.2 PK	74.00	-24.80	1.73H	96	20.40	25.50	3.33	0.00	-28.83
2	*2463.60	103.8 PK	-	-	1.48H	310	72.70	27.41	3.66	0.00	-31.07
3	*2463.60	94.8 AV	-	-	1.48H	310	63.70	27.41	3.66	0.00	-31.07
4	2483.70	49.2 PK	74.00	-24.80	1.66H	18	17.95	27.52	3.68	0.00	-31.20
5	4175.30	48.9 PK	74.00	-25.10	1.68H	273	13.70	30.38	4.81	0.00	-35.19
6	4924.10	50.3 PK	74.00	-23.70	1.14H	96	13.50	31.51	5.28	0.00	-36.81

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M

No.	Freq. (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Antenna Factor (dB/m)	Cable Factor (dB)	Pre-Amp. Factor (dB)	Correction Factor (dB/m)
1	2087.40	49.7 PK	74.00	-24.30	1.00V	346	20.84	25.50	3.33	0.00	-28.83
2	*2462.40	102.5 PK	-	-	1.99V	348	71.40	27.41	3.66	0.00	-31.08
3	*2462.40	93.8 AV	-	-	1.99V	348	62.77	27.41	3.66	0.00	-31.08
4	2483.50	50.2 PK	74.00	-23.80	2.11V	341	19.04	27.52	3.68	0.00	-31.20
5	4175.30	49.4 PK	74.00	-24.60	1.00V	10	14.20	30.38	4.81	0.00	-35.19
6	4924.00	50.6 PK	74.00	-23.40	1.41V	300	13.80	31.51	5.28	0.00	-36.80

- NOTE:**
1. Emission level= Raw Value - Correction Factor
 2. Correction Factor = External Preamp. Gain - Ant. Factor - Cable loss
(External Preamp. Gain = 0, when the test receiver is used for the test.)
 3. The other emission levels were very low against the limit.
 4. Margin value = Emission level - Limit value
 5. The limit value is defined as per 15.247
 6. " * " : Fundamental frequency



4.3 6DB BANDWIDTH MEASUREMENT

4.3.1 LIMITS OF 6dB BANDWIDTH MEASUREMENT

The minimum of 6dB Bandwidth Measurement is 0.5 MHz.

4.3.2 TEST INSTRUMENTS

Description & Manufacturer	Model No.	Serial No.	Calibrated Until
SPECTRUM ANALYZER	FSEK30	100049	July 17, 2002


Notes:

1. The measurement uncertainty is less than +/- 2.6dB, which is calculated as per the NAMAS document NIS81.
2. The calibration interval of the above test instruments is 12 months and the calibrations are traceable to NML/ROC and NIST/USA.

4.3.3 TEST PROCEDURE

The transmitter output was connected to the spectrum analyzer through an attenuator. The bandwidth of the fundamental frequency was measured by spectrum analyzer with 100 kHz RBW and 100 kHz VBW. The 6 dB bandwidth is defined as the total spectrum the power of which is higher than peak power minus 6 dB.

4.3.4 TEST SETUP



4.3.5 EUT OPERATING CONDITIONS

The software provided by client to enable the EUT under transmission condition continuously at lowest, middle and highest channel frequencies individually.




4.3.6 TEST RESULTS


EUT	WLAN PCI Adapter	MODEL	LM-WA200
INPUT POWER (SYSTEM)	120Vac, 60 Hz	ENVIRONMENTAL CONDITIONS	26 deg. C, 73%RH, 1005 hPa
TESTED BY: Bruce Shiau			

CHANNEL	CHANNEL FREQUENCY (MHz)	6 dB BANDWIDTH (MHz)	MINIMUM LIMIT (MHz)	PASS/FAIL
1	2412	8.98	0.5	PASS
7	2442	8.70	0.5	PASS
11	2462	8.94	0.5	PASS


CH1

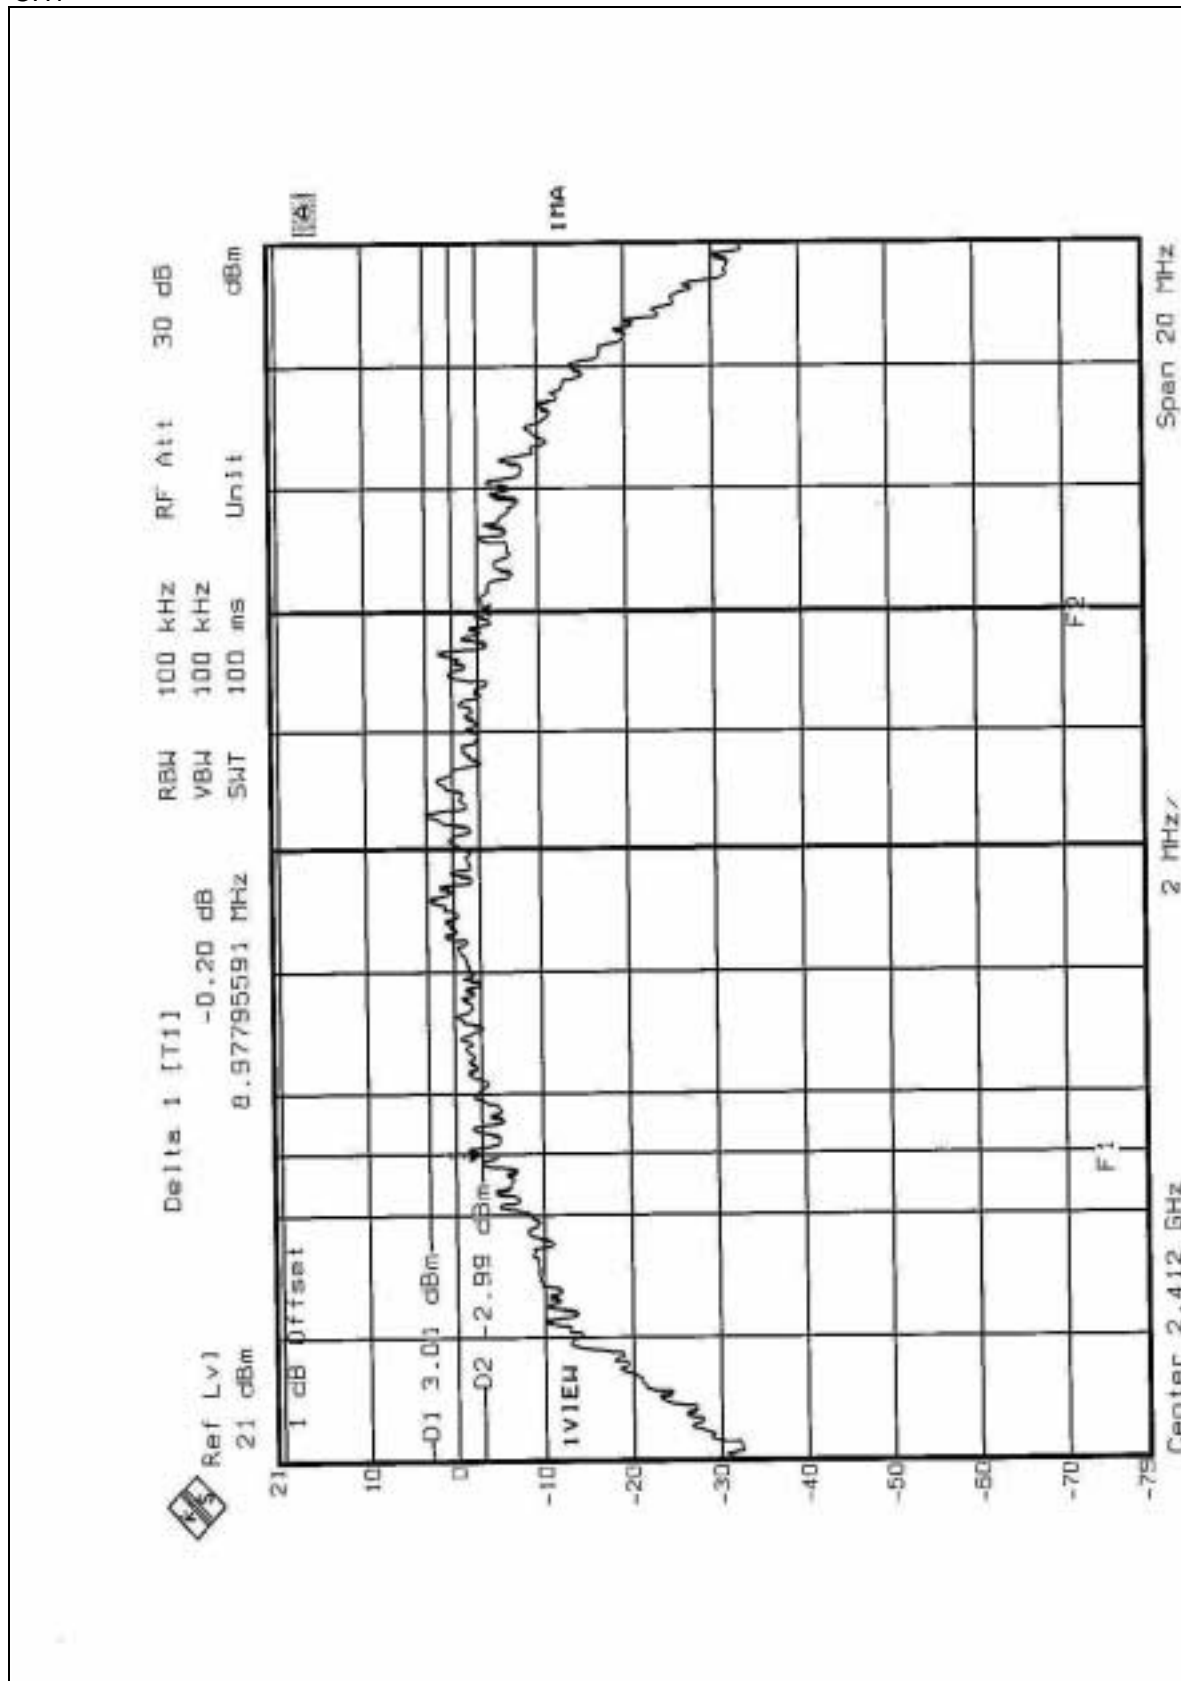

CH7

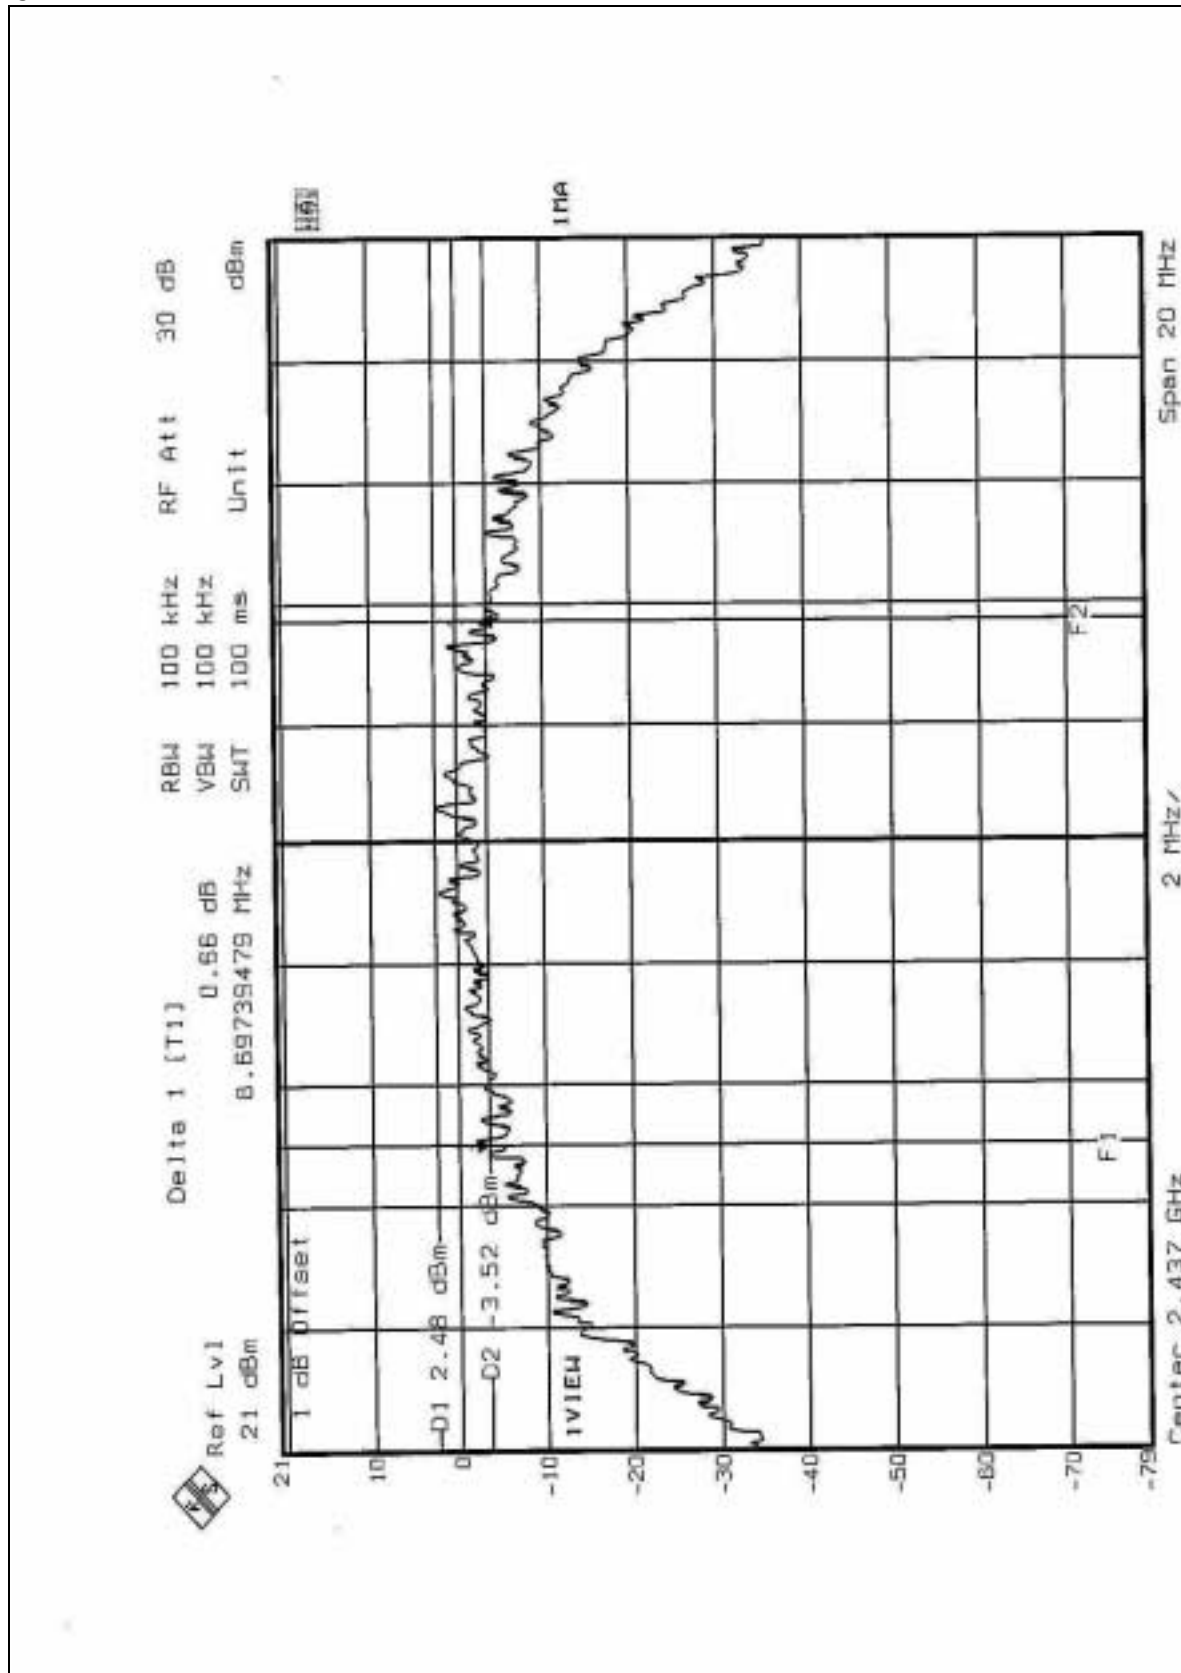

CH11

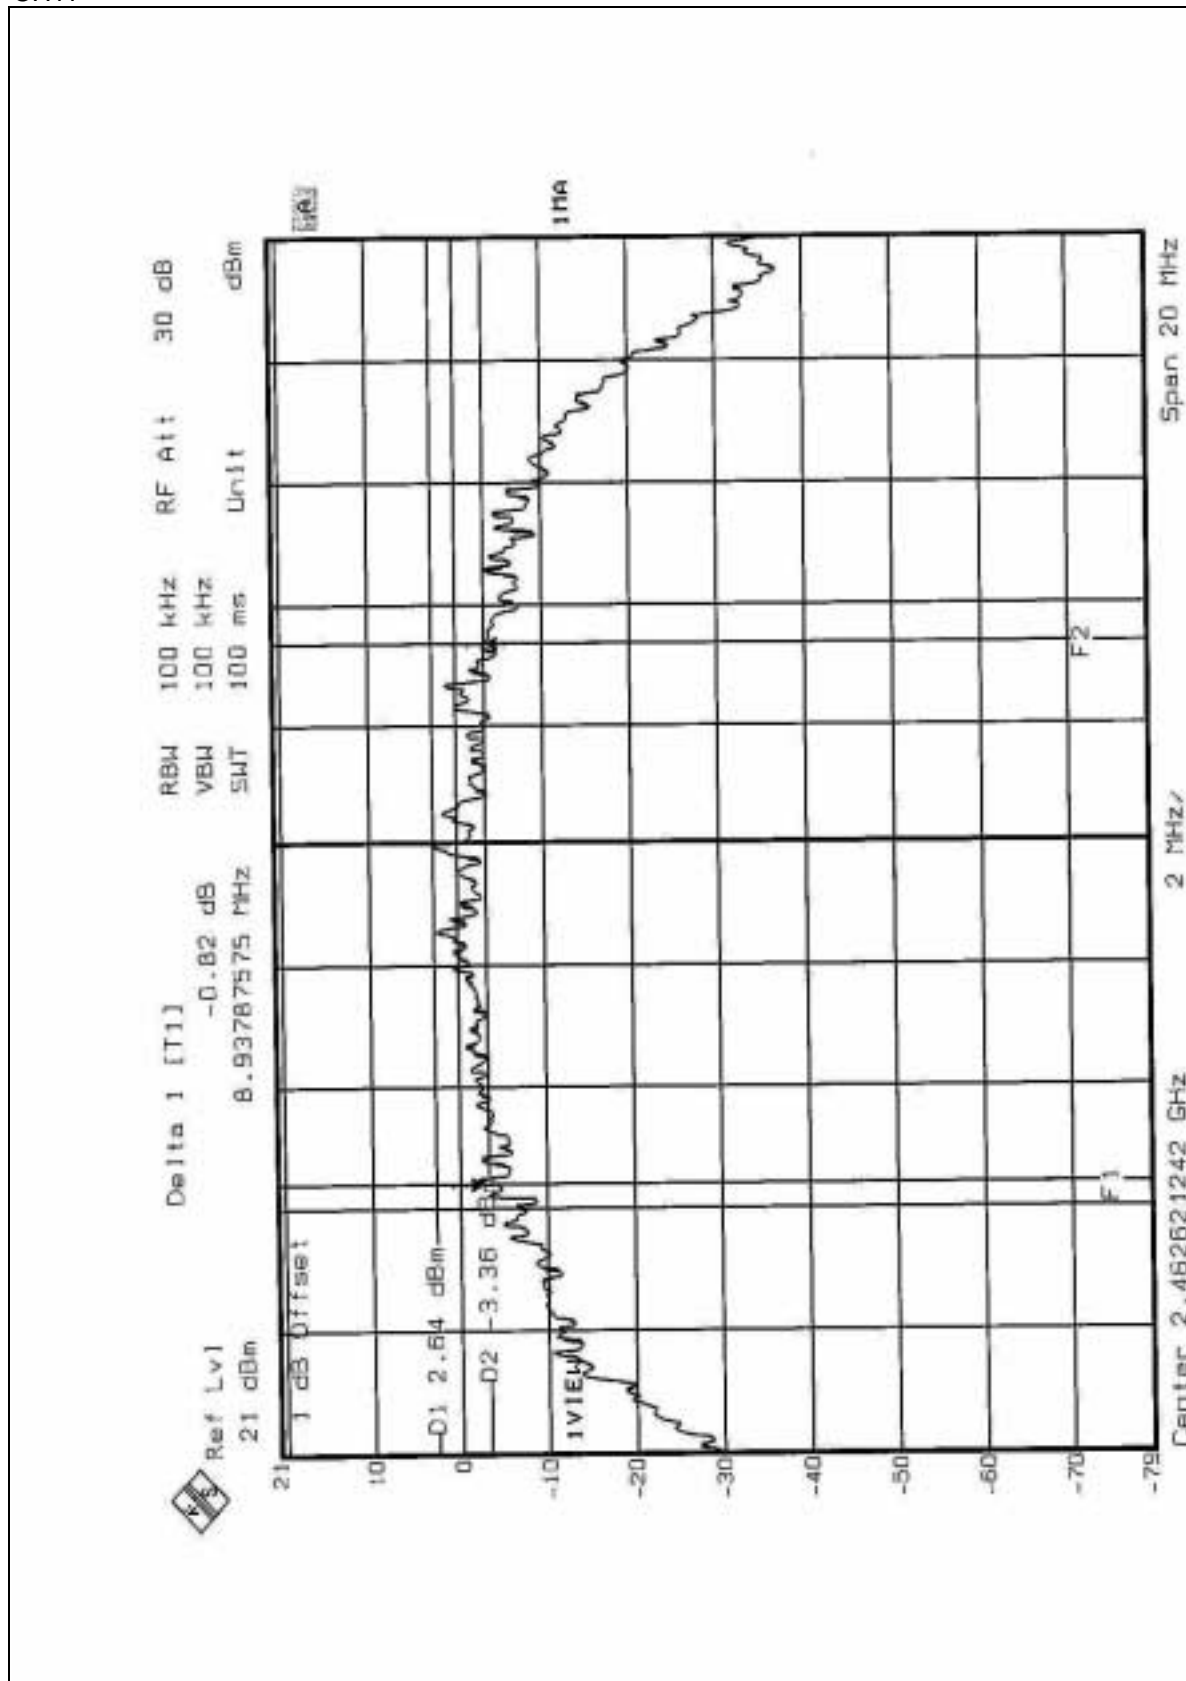



4.4 MAXIMUM PEAK OUTPUT POWER

4.4.1 LIMITS OF MAXIMUM PEAK OUTPUT POWER MEASUREMENT

The Maximum Peak Output Power Measurement is 30dBm.

4.4.2 INSTRUMENTS

Description & Manufacturer	Model No.	Serial No.	Calibrated Until
SPECTRUM ANALYZER	FSEK30	100049	July 17, 2002


- NOTE:** 1. The measurement uncertainty is less than +/- 2.6dB, which is calculated as per the NAMAS document NIS81.
2. The calibration interval of the above test instruments is 12 months and the calibrations are traceable to NML/ROC and NIST/USA.

4.4.3 TEST PROCEDURES

1. The transmitter output was connected to the spectrum analyzer through an attenuator.
2. The center frequency of the spectrum analyzer was set to the fundamental frequency and using 3 MHz RBW and 3 MHz VBW.
3. The span of the spectrum analyzer was larger than 6dB BandWidth plus 10MHz.
4. Used Peak Search to read the peak power after Maximum Hold function is activated.
5. Shifted the marker to +/- 3MHz and +/-6MHz, and recorded the reading.
6. The Maximum Peak Output Power is the linear summation of the five readings in 4 and 5.

NOTE: This measurement is the total power of 12MHz bandwidth which is far more wider than 6dB bandwidth.

4.4.4 TEST SETUP



4.4.5 EUT OPERATING CONDITIONS

Same as Item 3.4.5



4.4.6 TEST RESULTS

EUT	WLAN PCI Adapter	MODEL	LM-WA200
INPUT POWER (SYSTEM)	120ac, 60 Hz	ENVIRONMENTAL CONDITIONS	26 deg. C, 73%RH, 1005 hPa
TESTED BY: Bruce Shiau			

CHANNEL	CHANNEL FREQUENCY (MHz)	PEAK POWER OUTPUT (dBm)	PEAK POWER LIMIT (dBm)	PASS/FAIL
1	2412	16.19	30	PASS
7	2442	16.14	30	PASS
11	2462	16.27	30	PASS



4.5 POWER SPECTRAL DENSITY MEASUREMENT

4.5.1 LIMITS OF POWER SPECTRAL DENSITY MEASUREMENT

The Maximum of Power Spectral Density Measurement is 8dBm.

4.5.2 TEST INSTRUMENTS

Description & Manufacturer	Model No.	Serial No.	Calibrated Until
SPECTRUM ANALYZER	FSEK30	100049	July 17, 2002


- NOTE:** 1. The measurement uncertainty is less than +/- 2.6dB, which is calculated as per the NAMAS document NIS81.
2. The calibration interval of the above test instruments is 12 months and the calibrations are traceable to NML/ROC and NIST/USA.

4.5.3 TEST PROCEDURE

The transmitter output was connected to the spectrum analyzer through an attenuator, the bandwidth of the fundamental frequency was measured with the spectrum analyzer using 3 kHz RBW and 30 kHz VBW, set sweep time = span/3 kHz. The power spectral density was measured and recorded.

The sweep time is allowed to be longer than span/3 kHz for a full response of the mixer in the spectrum analyzer.

4.5.4 TEST SETUP



4.5.5 EUT OPERATING CONDITION

Same as Item 3.4.5




4.5.6 TEST RESULTS


EUT	WLAN PCI Adapter	MODEL	LM-WA200
INPUT POWER (SYSTEM)	120Vac, 60 Hz	ENVIRONMENTAL CONDITIONS	26 deg. C, 73%RH, 1005 hPa
TESTED BY: Bruce Shiao			

CHANNEL NUMBER	CHANNEL FREQUENCY (MHz)	RF POWER LEVEL IN 3 kHz BW (dBm)	MAXIMUM LIMIT (dBm)	PASS/FAIL
1	2412	-12.44	8	PASS
7	2442	-13.02	8	PASS
11	2462	-12.97	8	PASS

CH1

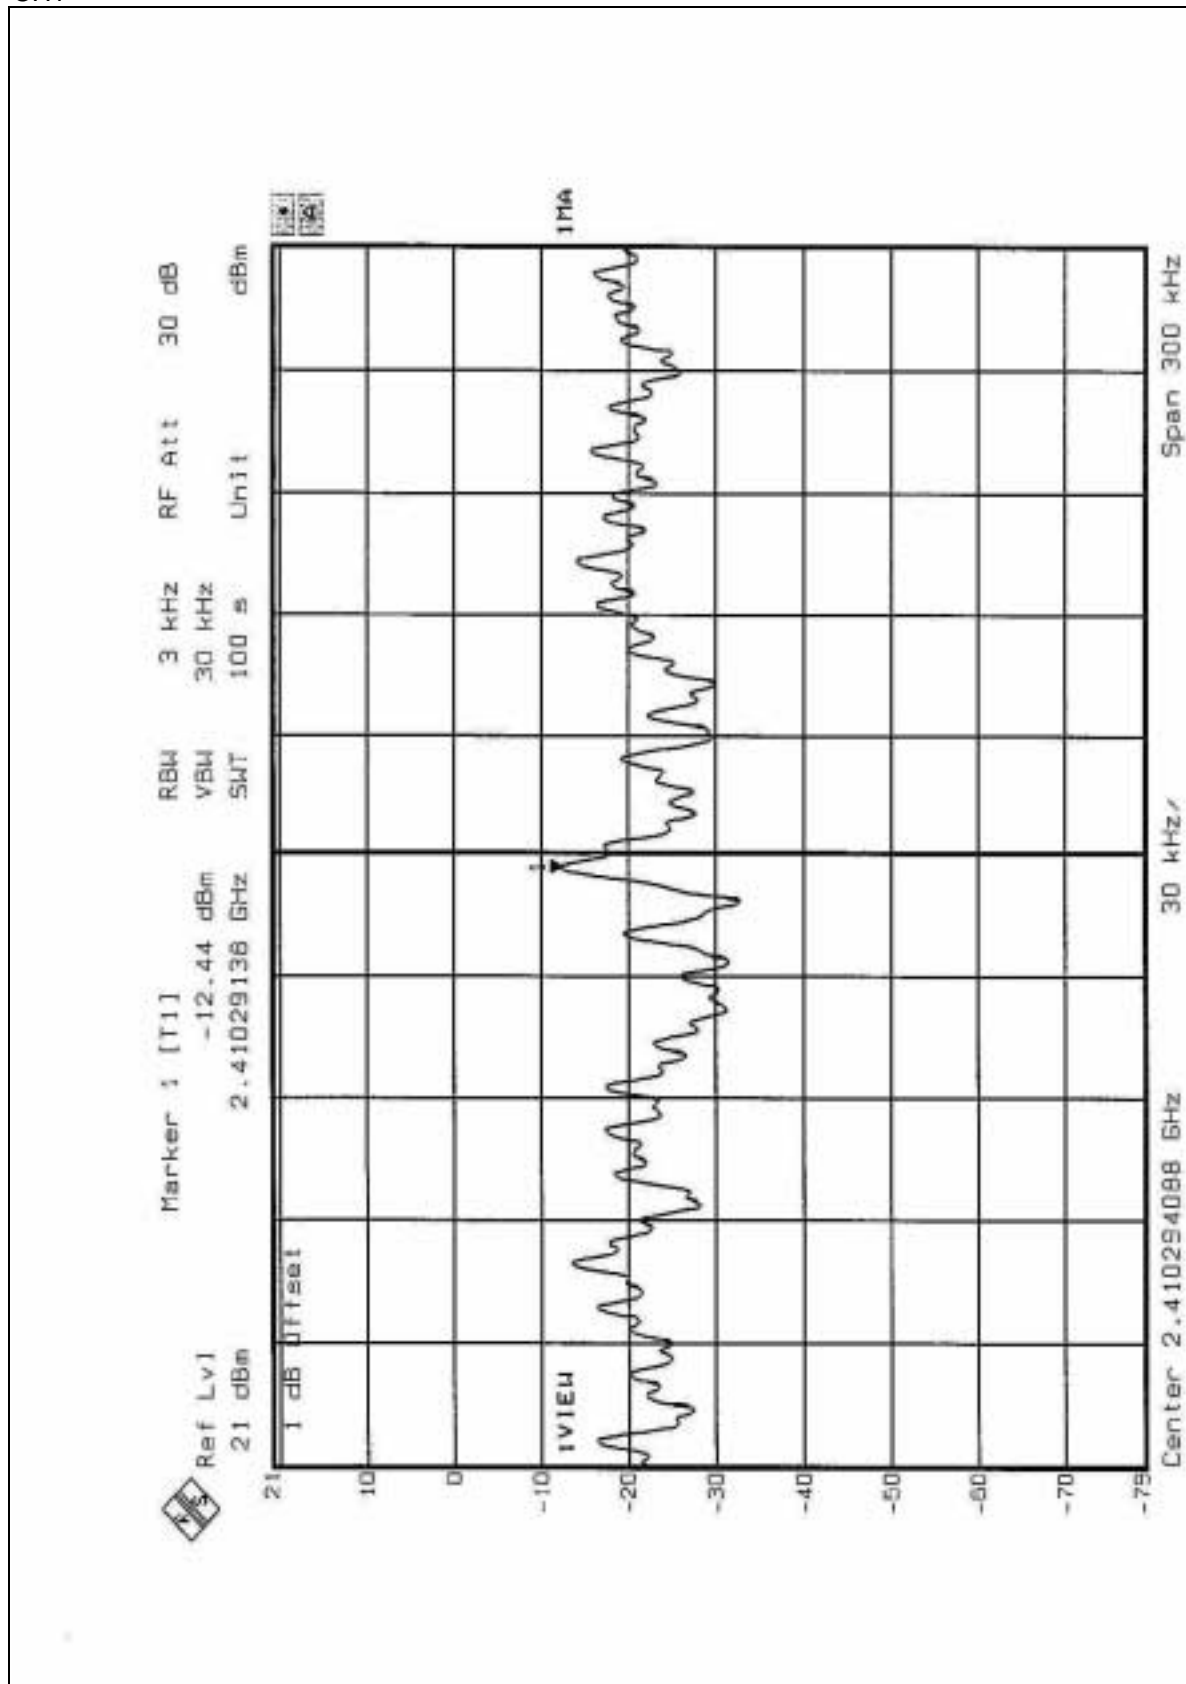

CH7

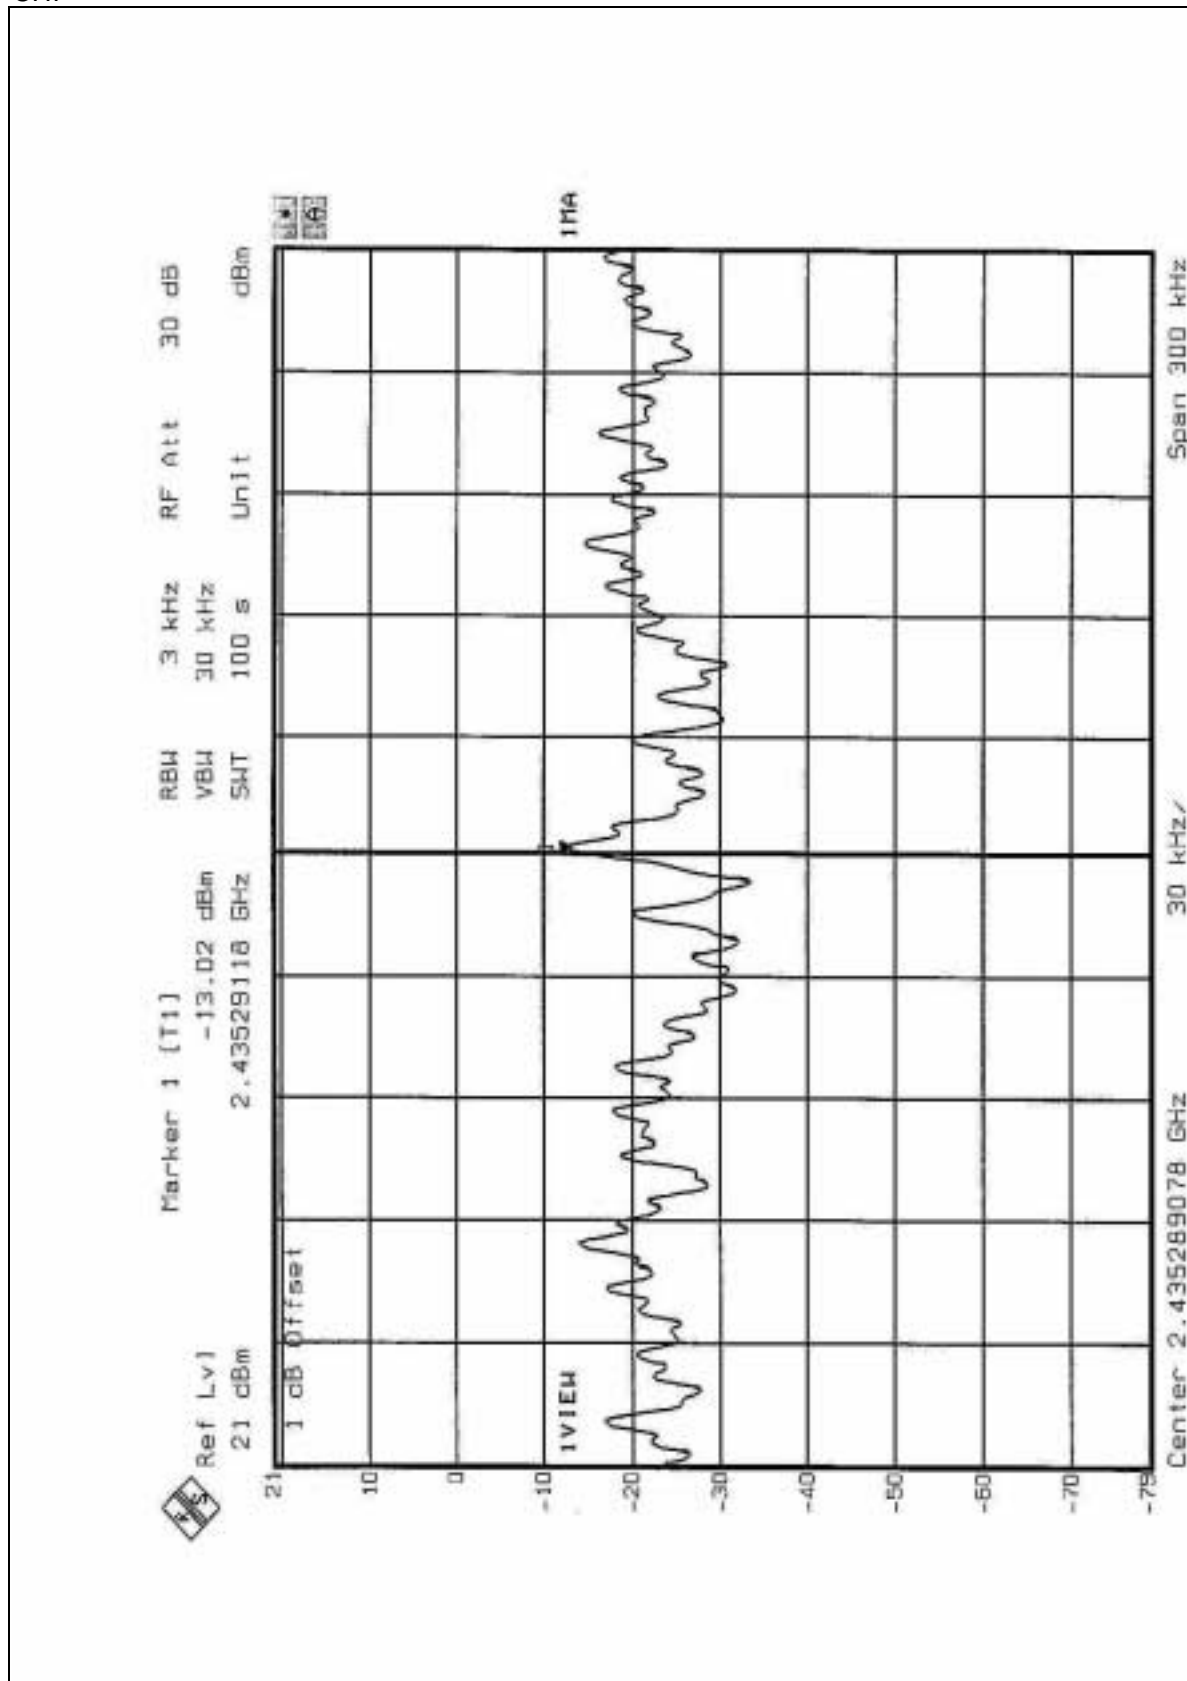

Marker 1 [T1]
 -12.97 dBm
 2.46029118 GHz

Ref Lvl
 21 dBm

RBW 3 kHz
 VBW 30 kHz
 SUT 100 s

Unit dBm

1 dB Offset

1V1E4

1MA

Center 2.46029118 GHz



4.6 BAND EDGES MEASUREMENT

4.6.1 LIMITS OF BAND EDGES MEASUREMENT

Below -20dB of the highest emission level of operating band (in 100KHz Resolution Bandwidth).

4.6.2 TEST INSTRUMENTS

Description & Manufacturer	Model No.	Serial No.	Calibrated Until
SPECTRUM ANALYZER	FSEK30	100049	July 17, 2002

NOTE:

- 1.The measurement uncertainty is less than +/- 2.6dB, which is calculated as per the NAMAS document NIS81.
- 2.The calibration interval of the above test instruments is 12 months and the calibrations are traceable to NML/ROC and NIST/USA.

4.6.3 TEST PROCEDURE

The transmitter output was connected to the spectrum analyzer via a low lose cable. Set both RBW and VBW of spectrum analyzer to 100 kHz with suitable frequency span including 100 kHz bandwidth from band edge. The band edges was measured and recorded.




4.6.4 EUT OPERATING CONDITION


Same as Item 3.4.5

4.6.5 TEST RESULTS

The spectrum plots are attached on the following 2 pages. D2 line indicates the highest level, D1 line indicates the 20dB offset below D2. It shows compliance with the requirement in part 15.247(C).

NOTE: The band edge emission plot on the following 2 pages shows 48.98dB delta between carrier maximum power and local maximum emission in restrict band (2.4837GHz). The emission of carrier strength list in the test result of channel 11 at the item 4.2.7 (Page 35) is 94.8dBuV/m, so the maximum field strength in restrict band is $94.8 - 48.98 = 45.82$ dBuV/m which is under 54 dBuV/m limit.

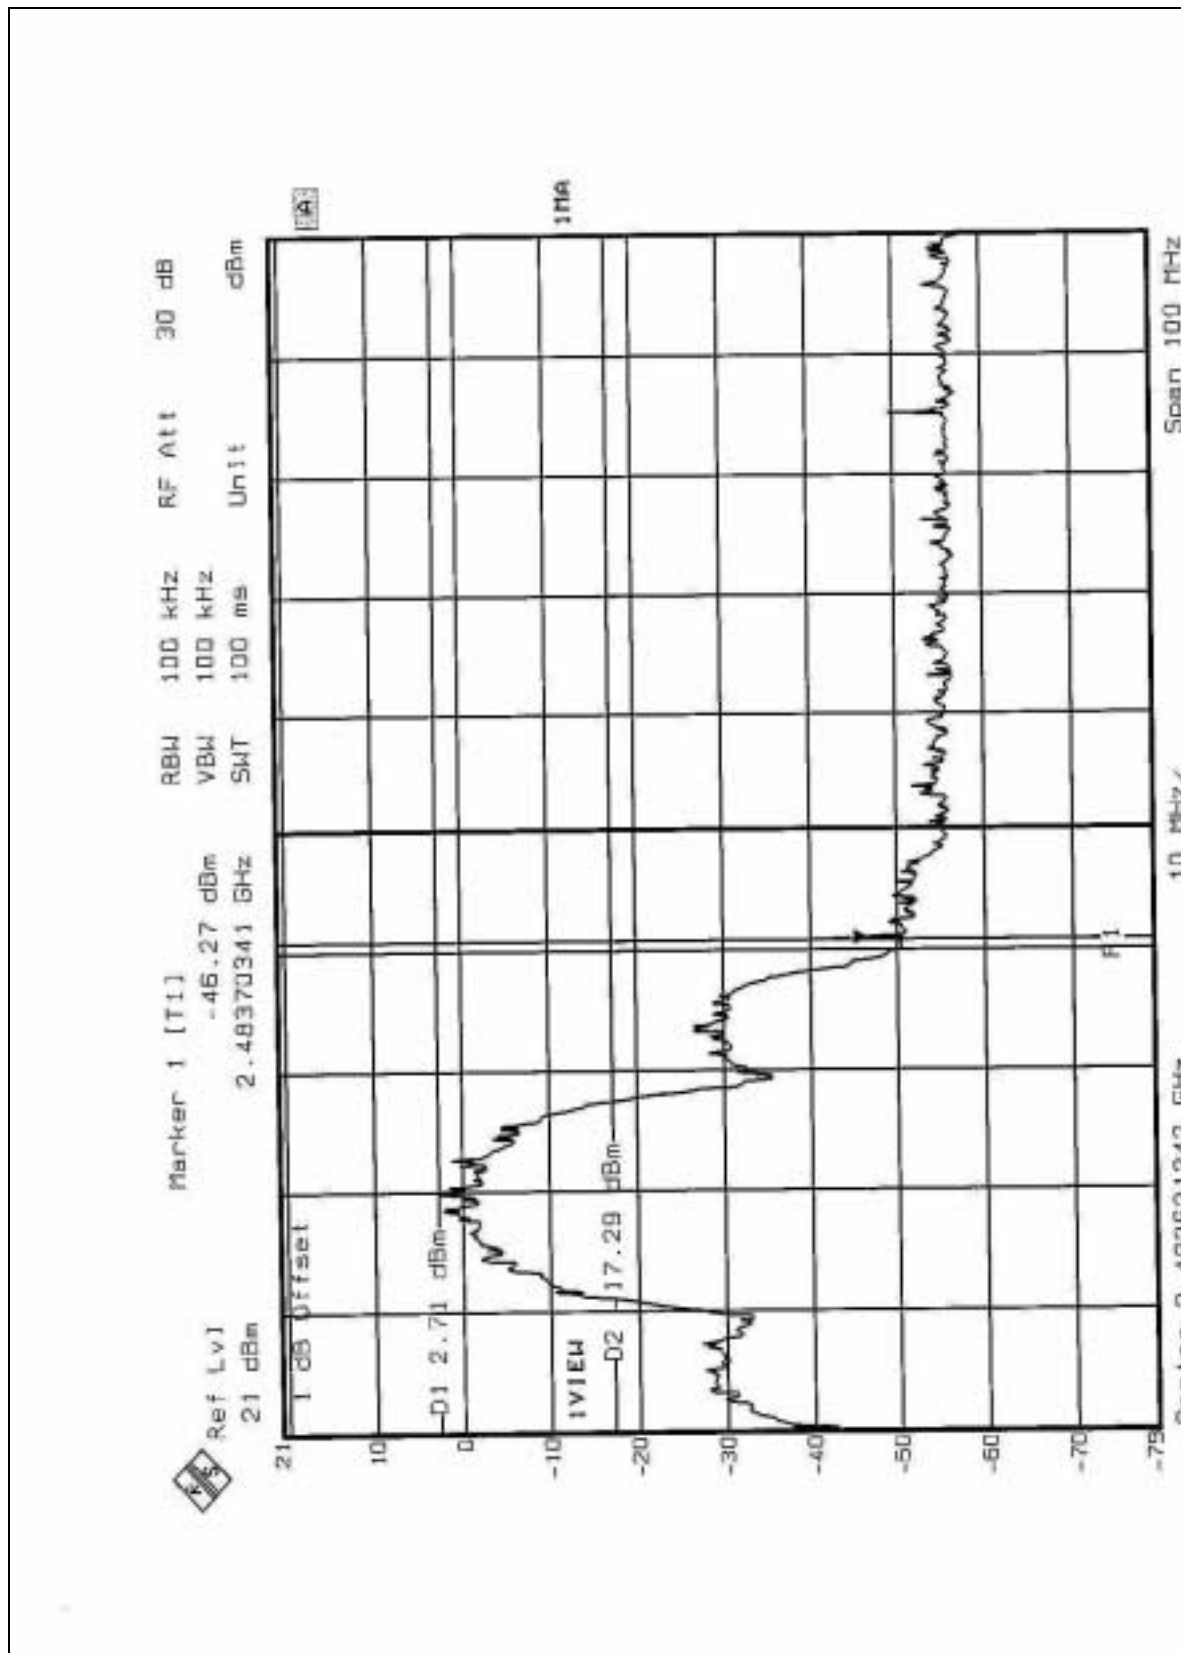

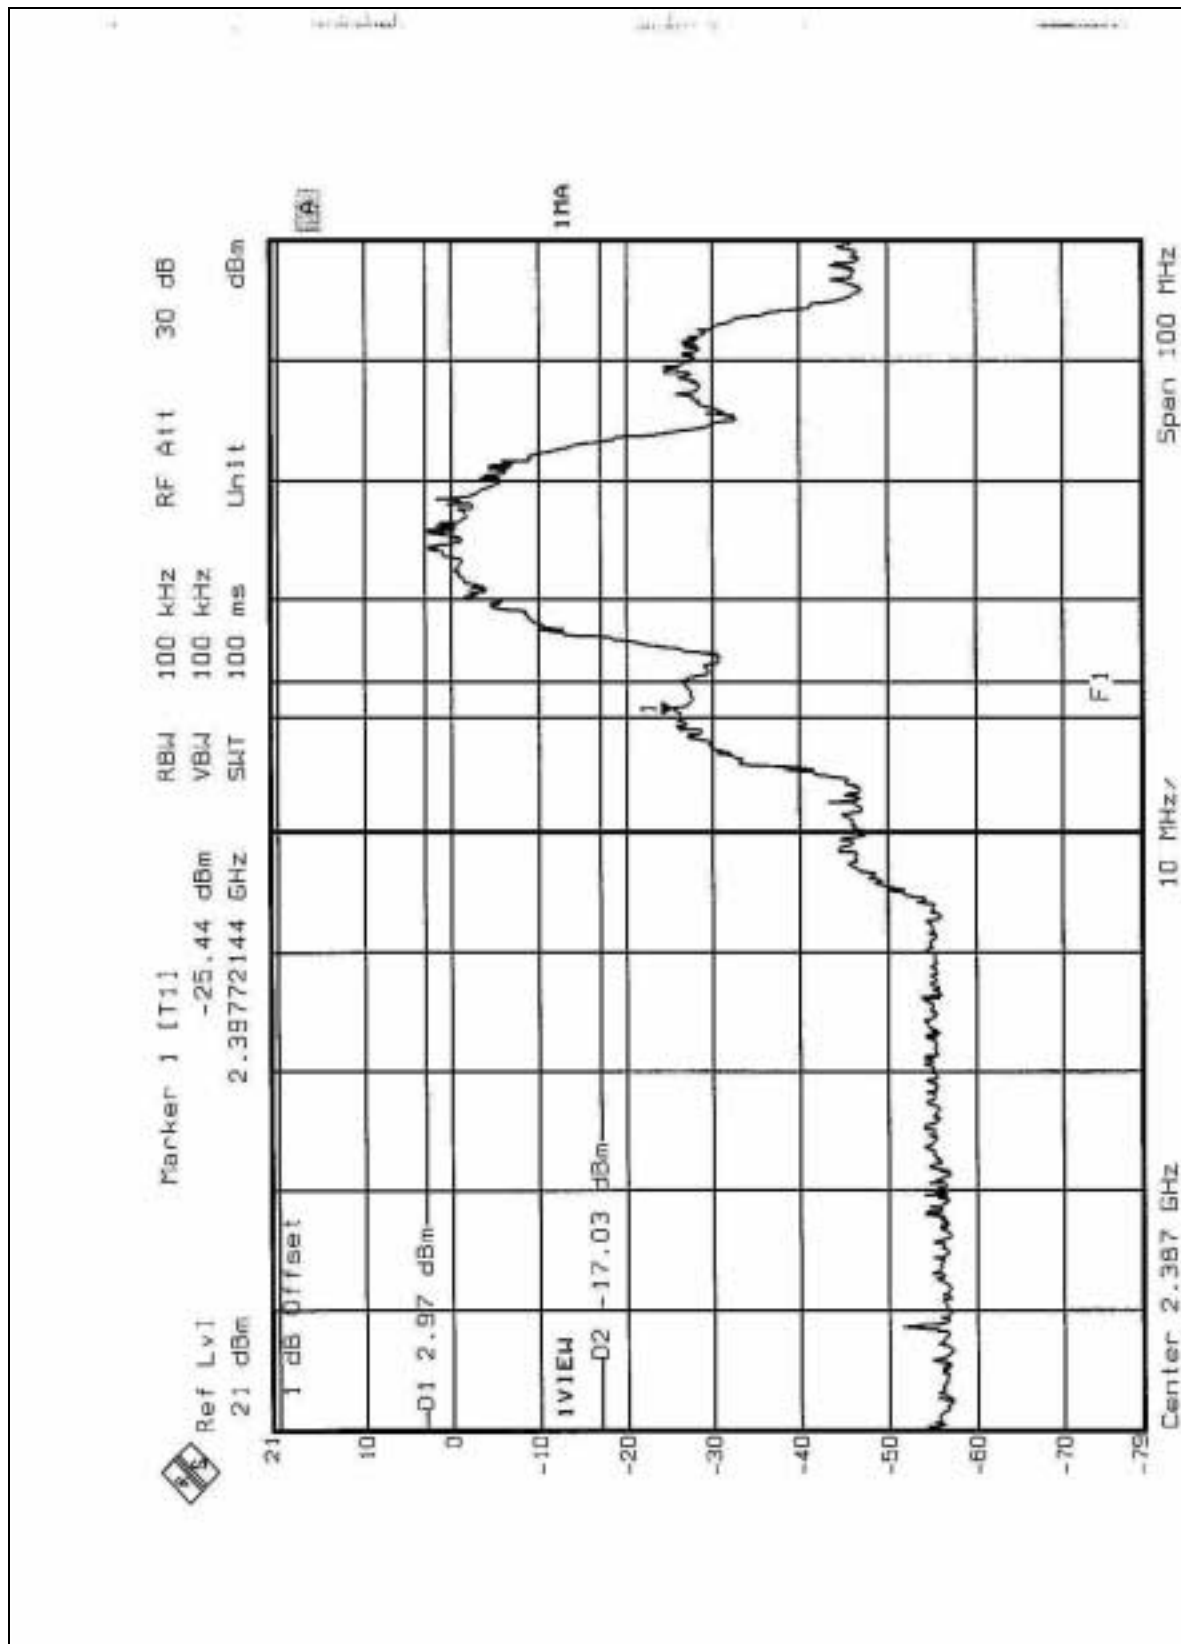



4.7 ANTENNA REQUIREMENT


4.7.1 STANDARD APPLICABLE

For intentional device, according to FCC 47 CFR Section 15.203, an intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. And according to FCC 47 CFR Section 15.247 (b), if transmitting antennas of directional gain greater than 6dBi are used, the power shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6dBi.

4.7.2 ANTENNA CONNECTED CONSTRUCTION

The antenna used in this product is Monopole antenna. The antenna connector is Reversed SMA. The maximum Gain of these antennas is 3dBi only.

5 PHOTOGRAPHS OF THE TEST CONFIGURATION CONDUCTED EMISSION TEST

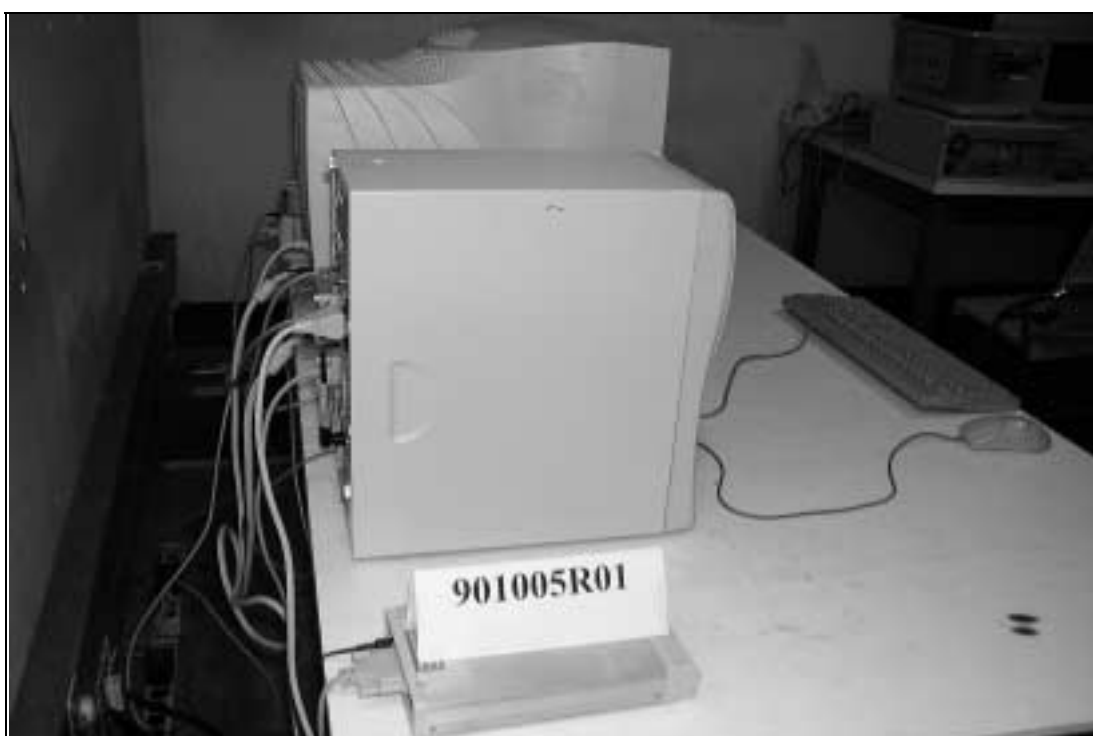

RADIATED EMISSION TEST





6 INFORMATION ON THE TESTING LABORATORIES

We, ADT Corp., were founded in 1988 to provide our best service in EMC and Safety consultation. Our laboratories are accredited and approved by the following approval agencies according to ISO/IEC 17025, Guide 25 or EN 45001:

USA	FCC, NVLAP, UL
Germany	TUV Rheinland
Japan	VCCI
New Zealand	MoC
Norway	NEMKO
R.O.C.	BSMI, DGT, CNLA

Copies of accreditation certificates of our laboratories obtained from approval agencies can be downloaded from our web site:

www.adt.com.tw/index.5/phtml.

If you have any comments, please feel free to contact us at the following:

Lin Kou EMC Lab:

Tel: 886-2-26052180

Fax: 886-2-26052943

Hsin Chu EMC Lab:

Tel: 886-35-935343

Fax: 886-35-935342

Lin Kou Safety Lab:

Tel: 886-2-26093195

Fax: 886-2-26093184

Lin Kou RF&Telecom Lab

Tel: 886-3-3270910

Fax: 886-3-3270892

Email: service@mail.adt.com.tw

Web Site: www.adt.com.tw

The address and road map of all our labs can be found in our web site also.