

# RF Exposure Report

**FCC ID: 2ANYD-SHS2598**

**Report No.** : SSP25040038-2E

**Applicant** : Shenzhen Sanhesheng Electronic CO.,LTD.

**Product Name** : SPIRAL TREE Wireless Charging Desk Lamp

**Model Name** : SHS2598

**Test Standard** : FCC CFR 47 PART 1, 1.1310

**Date of Issue** : 2025-04-19







**Shenzhen CCUT Quality Technology Co., Ltd.**

1F, Building 35, Changxing Technology Industrial Park, Yutang Street, Guangming District, Shenzhen,  
Guangdong, China; (Tel.:+86-755-23406590 website: [www.ccuttest.com](http://www.ccuttest.com))

This test report is limited to the above client company and the product model only. It may not be duplicated without prior permitted by Shenzhen CCUT Quality Technology Co., Ltd.

**Test Report Basic Information**

<b>Applicant</b> .....:	Shenzhen Sanhesheng Electronic CO.,LTD. Room 205, Yuxing Technology Park Building Third Industrial Zone, Address of Applicant.....: Nanchang Community, Xixiang Street, Bao 'an District, Shenzhen, China
<b>Manufacturer</b> .....:	Shenzhen Sanhesheng Electronic CO.,LTD. Room 205, Yuxing Technology Park Building Third Industrial Zone, Address of Manufacturer.....: Nanchang Community, Xixiang Street, Bao 'an District, Shenzhen, China
<b>Product Name</b> .....:	SPIRAL TREE Wireless Charging Desk Lamp
<b>Brand Name</b> .....:	
<b>Main Model</b> .....:	SHS2598
<b>Series Models</b> .....:	SHS2598A, SHS2598B
<b>Test Standard</b> .....:	FCC CFR 47 PART 1, 1.1310 KDB 680106 D01 Wireless Power Transfer v04
<b>Date of Test</b> .....	2025-04-07 to 2025-04-19
<b>Test Result</b> .....:	PASS
<b>Tested By</b> .....	 (Walker Wu)
<b>Reviewed By</b> .....:	 (Lieber Ouyang)
<b>Authorized Signatory</b> .....:	 (Lahm Peng)
<b>Note :</b> This test report is limited to the above client company and the product model only. It may not be duplicated without prior permitted by Shenzhen CCUT Quality Technology Co., Ltd.. All test data presented in this test report is only applicable to presented test sample.	



CONTENTS

1. General Information.....5

    1.1 Product Information .....5

    1.2 Test Setup Information.....6

    1.3 Test Facilities.....6

    1.4 List of Measurement Instruments .....7

    1.5 Measurement Uncertainty.....7

2. RF Exposure.....8

    2.1 Standard and Limit.....8

    2.2 Test Procedures .....8

    2.3 Test Data and Results .....9


Annex A. Test Photos.....11

Revision History

Revision	Issue Date	Description	Revised By
V1.0	2025-04-19	Initial Release	Lahm Peng

## 1. General Information

### 1.1 Product Information

Product Name:	SPIRAL TREE Wireless Charging Desk Lamp
Trade Name:	
Main Model:	SHS2598
Series Models:	SHS2598A, SHS2598B
Rated Voltage:	Input: 5V=3A, 9V=2A, 12V=2.5A Wireless charging output: 5W, 7.5W, 10W, 15W Watch wireless charging output: 3W
Power Adapter:	-
Battery:	-
Test Sample No:	SSP25040038-1
Hardware Version:	V1.0
Software Version:	V1.0
Note 1: The test data is gathered from a production sample, provided by the manufacturer.	
Note 2: The color of appearance and model name of series models listed are different from the main model, but the circuit and the electronic construction are the same, declared by the manufacturer.	

Wireless Specification	
Wireless Standard:	WPC
Operating Frequency:	Wireless charging Output (Phone/Earphone):110.5kHz-205kHz Wireless charging Output (Watch): 310kHz-340kHz
Max. Field Strength:	72.31dBuV/m
Modulation:	FSK
Antenna Gain:	0dBi
Type of Antenna:	Coil Antenna
Type of Device:	<input type="checkbox"/> Portable Device <input checked="" type="checkbox"/> Mobile Device

## 1.2 Test Setup Information

List of Test Modes			
Test Mode	Description		Remark
TM1	Wireless charging 15W + Wireless charging 3W		
TM2	Wireless charging 10W + Wireless charging 3W		
TM3	Wireless charging 7.5W + Wireless charging 3W		
TM4	Wireless charging 5W + Wireless charging 3W		
Note: All modes have been tested and only the worst mode TM1 data is represented in the report.			
List and Details of Auxiliary Cable			
Description	Length (cm)	Shielded/Unshielded	With/Without Ferrite
-	-	-	-
List and Details of Auxiliary Equipment			
Description	Manufacturer	Model	Serial Number
Earphone	HUAWEI	AM115	6901443288229
Watch	Apple	944-50030LW/A	XYOXXOYOX
Adapter	UGREEN	CD289	90324

## 1.3 Test Facilities

Laboratory Name:	<b>Shenzhen CCUT Quality Technology Co., Ltd.</b> 1F, Building 35, Changxing Technology Industrial Park, Yutang Street, Guangming District, Shenzhen, Guangdong, China
CNAS Laboratory No.:	L18863
A2LA Certificate No.:	6893.01
FCC Registration No.:	583813
FCC Designation No.:	CN1373
ISED Registration No.:	CN0164
All measurement facilities used to collect the measurement data are located at 1F, Building 35, Changxing Technology Industrial Park, Yutang Street, Guangming District, Shenzhen, Guangdong, China.	

1.4 List of Measurement Instruments

Description	Manufacturer	Model	Serial Number	Cal. Date	Due. Date
Electromagnetic radiation tester	WAVECONTROL	SMP3	23SL0158	2024-10-16	2025-10-15
Electromagnetic field probe	WAVECONTROL	WP400-3	24WP240067	2024-10-16	2025-10-15
Test Software	WAVECONTROL	SMP	N/A	N/A	N/A

1.5 Measurement Uncertainty

Test Item	Uncertainty
E-field	0.6 dB
H-field	0.6 dB

## 2. RF Exposure

### 2.1 Standard and Limit

The criteria listed in the following table shall be used to evaluate the environment impact of human exposure to radio frequency (RF) radiation as specified in 1.1307(b)


Limits for Maximum Permissible Exposure (MPE)

Frequency range (MHz)	Electric field strength (V/m)	Magnetic field strength (A/m)	Power density (mW/cm <sup>2</sup> )	Averaging time (minutes)
(A) Limits for Occupational/Controlled Exposures				
0.3–3.0	614	1.63	*(100)	6
3.0–30	1842/f	4.89/f	*(900/f <sup>2</sup> )	6
30–300	61.4	0.163	1.0	6
300–1500			f/300	6
1500–100,000			5	6
(B) Limits for General Population/Uncontrolled Exposure				
0.3–1.34	614	1.63	*(100)	30
1.34–30	824/f	2.19/f	*(180/f <sup>2</sup> )	30
30–300	27.5	0.073	0.2	30
300–1500			f/1500	30
1500–100,000			1.0	30

f = frequency in MHz

### 2.2 Test Procedures

- 1) The RF exposure test was performed in anechoic chamber.
- 2) E and H-field measurements should be made with the center of the probe at a distance of 20m surrounding the device and 20 cm above the top surface of the primary/client pair.  
These measurements should be repeated for three different client battery levels, 1%, 50%, and 99%.
- 3) The highest emission level was recorded and compared with limit as soon as measurement of each points were completed.
- 4) The EUT was measured according to the dictates of KDB 680106 D01 v04.

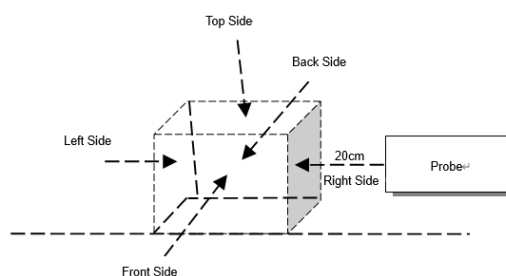

Test Setup Block Diagram



## 2.3 Test Data and Results

All modes including full load, halfload and no-load have been tested, The report reflects data for the worst TM1 mode only.

Test condition 1: Mode 1 operating mode with client device.


Maximum permissible Exposure				
Battery levels	Test sides	Test distance(cm)	E -field(V/m)	H-field(A/m)
<1%	Top	20	2.474	0.324
<1%	Left	20	4.258	0.227
<1%	Right	20	6.348	0.475
<1%	Front	20	3.667	0.176
<1%	Back	20	1.722	0.188
Limit			614	1.63
50% Margin Limit			307	0.815

Maximum permissible Exposure				
Battery levels	Test sides	Test distance(cm)	E -field(V/m)	H-field(A/m)
<50%	Top	20	2.156	0.166
<50%	Left	20	4.376	0.234
<50%	Right	20	6.192	0.235
<50%	Front	20	3.895	0.193
<50%	Back	20	1.377	0.176
Limit			614	1.63
50% Margin Limit			307	0.815

Maximum permissible Exposure				
Battery levels	Test sides	Test distance(cm)	E -field(V/m)	H-field(A/m)
<99%	Top	20	2.743	0.344
<99%	Left	20	4.726	0.181
<99%	Right	20	6.663	0.374
<99%	Front	20	3.543	0.282
<99%	Back	20	2.354	0.213
Limit			614	1.63
50% Margin Limit			307	0.815

## Annex A. Test Photos

### Test View 1

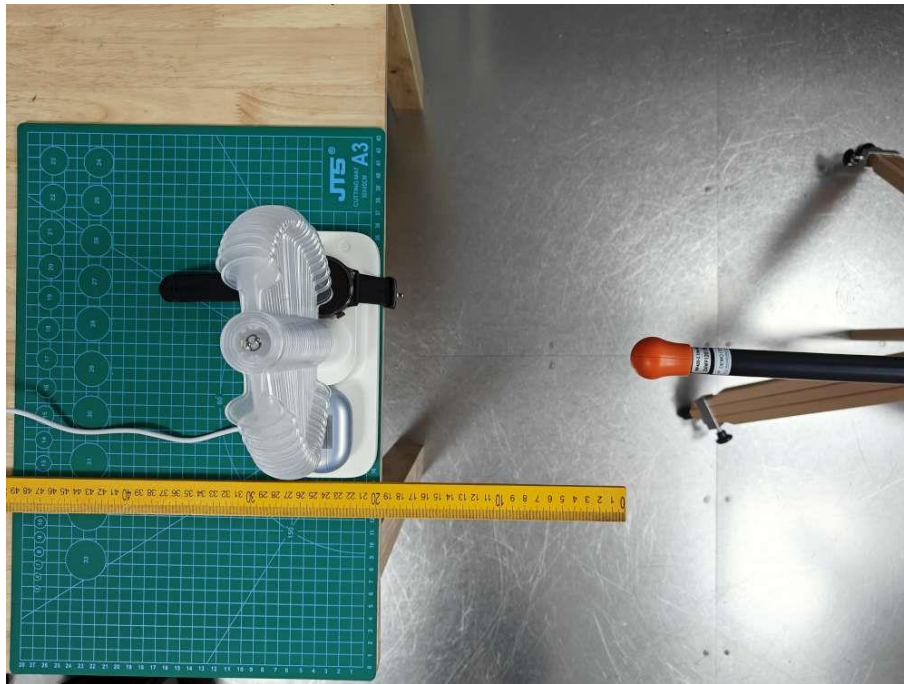

\*\*\*\*\* END OF REPORT \*\*\*\*\*