



Full

TEST REPORT

No. I20D00050-SRD06

For

Client: MobiWire SAS

Production: 4G Smart Phone

Model Name: Mobewire Honaw,Altice S33

Brand Name: MobiWire,Altice

FCC ID: QPN-HONAW

Hardware Version: V00B

Software Version: Honaw32_V01_200407

Issued date: 2020-04-29

NOTE

1. The test results in this test report relate only to the devices specified in this report.
2. This report shall not be reproduced except in full without the written approval of East China Institute of Telecommunications.
3. For the test results, the uncertainty of measurement is not taken into account when judging the compliance with specification, and the results of measurement or the average value of measurement results are taken as the criterion of the compliance with specification directly.

Test Laboratory:

East China Institute of Telecommunications

Add: Block No.4, No.766, Jingang Road, Pudong District, Shanghai, P. R. China

Tel: +86 21 63843300

E-Mail: welcome@ecit.org.cn

Revision Version

Report Number	Revision	Date	Memo
I20D00050-SRD06	00	2020-04-29	Initial creation of test report

CONTENTS

1.	TEST LABORATORY	6
1.1.	TESTING LOCATION	6
1.2.	TESTING ENVIRONMENT	6
1.3.	PROJECT DATA.....	6
1.4.	SIGNATURE	6
2.	CLIENT INFORMATION	7
2.1.	APPLICANT INFORMATION	7
2.2.	MANUFACTURER INFORMATION	7
3.	EQUIPMENT UNDER TEST (EUT) AND ANCILLARY EQUIPMENT (AE)	8
3.1.	ABOUT EUT	8
3.2.	INTERNAL IDENTIFICATION OF EUT USED DURING THE TEST	8
3.3.	INTERNAL IDENTIFICATION OF AE USED DURING THE TEST	8
4.	REFERENCE DOCUMENTS.....	9
4.1.	REFERENCE DOCUMENTS FOR TESTING	9
5.	TEST RESULTS.....	10
5.1.	SUMMARY OF TEST RESULTS.....	10
5.2.	STATEMENTS.....	11
6.	TEST EQUIPMENT UTILIZED	12
7.	TEST ENVIRONMENT	14
8.	MEASUREMENT UNCERTAINTY	15
ANNEX A.	MEASUREMENT RESULTS.....	16
ANNEX A.1.	OUTPUT POWER	16
ANNEX A.2.	EMISSION LIMIT.....	25
ANNEX A.3.	FREQUENCY STABILITY	30
ANNEX A.4.	OCCUPIED BANDWIDTH	32

ANNEX A.5. EMISSION BANDWIDTH.....	38
ANNEX A.6. BAND EDGE COMPLIANCE.....	43
ANNEX A.7. CONDUCTED SPURIOUS EMISSION.....	49
ANNEX A.8. PEAK-TO-AVERAGE POWER RATIO.....	51
ANNEX B. DEVIATIONS FROM PRESCRIBED TEST METHODS.....	52
ANNEX C. DETAILED TEST RESULTS.....	53
ANNEX C.1. MAIN TERMS.....	53
ANNEX C.2. TERMS USED IN CONDITION COLUMN.....	53
ANNEX C.3. TERMS USED IN VERDICT COLUMN.....	53
ANNEX C.4. TERMS USED IN NOTE COLUMN.....	53
ANNEX D. ACCREDITATION CERTIFICATE.....	54

1. Test Laboratory

1.1. Testing Location

Company Name	ECIT Shanghai, East China Institute of Telecommunications
Address	Block No.4, No.766, Jingang Road, Pudong District, Shanghai, P. R. China
Postal Code	201206
Telephone	(+86)-021-63843300
FCC registration No	CN1177

1.2. Testing Environment

Normal Temperature	15°C-35°C
Relative Humidity	25%-75%

1.3. Project data

Project Leader	Yu Anlu
Testing Start Date	2020-04-11
Testing End Date	2020-04-24

1.4. Signature



Liu Yan

(Prepared this test report)



Fan Songyan

(Reviewed this test report)



Zheng Zhongbin

(Approved this test report)

2. Client Information

2.1. Applicant Information

Company Name	MobiWire SAS
Address	79 AVENUE FRANCOIS ARAGO 92017 NANTERRE CEDEX France.
Telephone	+33668018722
Postcode	/

2.2. Manufacturer Information

Company Name	MobiWire SAS
Address	79 AVENUE FRANCOIS ARAGO 92017 NANTERRE CEDEX France.
Telephone	+33668018722
Postcode	/

3. Equipment Under Test (EUT) and Ancillary Equipment (AE)

3.1. About EUT

Production	4G Smart Phone
Model name	Mobiwire Honaw,Altice S33
LTE Frequency Band	Band 1/2/3/7/8/20
Extreme Temperature	-10/+55℃
Nominal Voltage	3.80V
Extreme High Voltage	4.35 V
Extreme Low Voltage	3.60V
Maximum of Antenna Gain	LTE Band2:-2dBi; LTE Band7: -0.5dBi;

Note:

- Photographs of EUT are shown in ANNEX A of this test report.
- The value of the antenna gain is provided by the customer. For specific antenna information, please check the antenna specifications of the customer.

3.2. Internal Identification of EUT used during the test

EUT ID*	SN or IMEI	HW Version	SW Version	Date of receipt
N02	356290110003487 356290110003495	V00B	Honaw32_V01_200407	2020-04-08
N06	356290110003149 356290110003156	V00B	Honaw32_V01_200407	2020-04-08
N08	356290110002885 356290110002893	V00B	Honaw32_V01_200407	2020-04-08

*EUT ID: is used to identify the test sample in the lab internally.

3.3. Internal Identification of AE used during the test

AE ID*	Description	SN
AE1	RF cable	---

*AE ID: is used to identify the test sample in the lab internally.

4. Reference Documents

4.1. Reference Documents for testing

The following documents listed in this section are referred for testing.

Reference	Title	Version
FCC Part 2	FREQUENCY ALLOCATIONS AND RADIO TREATY MATTERS; GENERAL RULES AND REGULATIONS	2018-10-01
FCC Part 24	PERSONAL COMMUNICATIONS SERVICES	2018-10-01
FCC Part 27	MISCELLANEOUS WIRELESS COMMUNICATIONS SERVICES	2018-10-01
ANSI/TIA-603-E	Land Mobile FM or PM Communications Equipment Measurement and Performance Standards	2016
ANSI C63.26	American National Standard of Procedures for Compliance Testing of Licensed Transmitters Used in Licensed Radio	2015
KDB 971168 D01	Measurement Guidance for Certification of Licensed Digital Transmitters	v03r01

5. Test Results

5.1. Summary of Test Results

LTE Band 2

Items	Test Name	Clause in FCC rules	Section in this report	Verdict
1	Output Power	24.232(c)	A.1	P
2	Emission Limit	2.1051, 24.238(a)	A.2	P
3	Frequency Stability	2.1055, 24.235	A.3	P
4	Occupied Bandwidth	2.1049(h)(i)	A.4	P
5	Emission Bandwidth	24.238(a)	A.5	P
6	Band Edge Compliance	24.238(a)	A.6	P
7	Conducted Spurious Emission	2.1057, 24.238	A.7	P
8	Peak to Average Power Ratio	24.232 (d)	A.8	P

LTE Band 7

Items	Test Name	Clause in FCC rules	Section in this report	Verdict
1	Output Power	27.50(h)(2)	A.1	P
2	Emission Limit	2.1051, 27.53(m)	A.2	P
3	Frequency Stability	2.1055,27.54	A.3	P
4	Occupied Bandwidth	2.1049(h)(i)	A.4	P
5	Emission Bandwidth	27.53(m)	A.5	P
6	Band Edge Compliance	27.53(m)	A.6	P
7	Conducted Spurious Emission	2.1057, 27.53(m)	A.7	P
8	Peak to Average Power Ratio	27.50(a)	A.8	P

Note: please refer to Annex C in this test report for the detailed test results.

The following terms are used in the above table.

P	Pass,the EUT complies with the essential requirements in the standard.
NM	Not measure, the test was not measured by ECIT.
NA	Not applicable, the test was not applicable.
F	Fail, the EUT does not comply with the essential requirements in the standard.

5.2. Statements

The Mobewire Honaw,Altice S33 is a new product for testing.

ECIT only performed test cases which identified with P/NM/NA/F results in Annex C.

ECIT has verified that the compliance of the tested device specified in section 5 of this test report is successfully evaluated according to the procedure and test methods as defined in type certification requirement listed in section 5 of this test report.

6. Test Equipment Utilized

Climate chamber

No.	Equipment	Model	Serial Number	Manufacturer	Calibration date	Cal.interval
1	Climate chamber	SH-641	92012011	ESPEC	2019-05-10	2 years

Radiated emission test system

The test equipment and ancillaries used are as follows.

No.	Equipment	Model	Serial Number	Manufacturer	Calibration date	Cal.interval
1	Universal Radio Communication Tester	CMW500	104178	R&S	2019-05-10	1 year
2	Test Receiver	ESU40	100307	R&S	2019-05-10	1 year
3	TRILOG Antenna	VULB9163	VULB9163-515	Schwarzbeck	2020-02-28	2 years
4	Double Ridged Guide Antenna	ETS-3117	135890	ETS	2020-02-28	2 years
5	2-Line V-Network	ENV216	101380	R&S	2019-05-10	1 year
6	RF Signal Generator	SMF100A	102314	R&S	2019-05-10	1 year
7	Amplifier	SCU08	10146	R&S	2019-05-10	1 year

Conducted test system

No.	Name	Type	SN	Manufacture	Calibration date	Cal.interv al
1	Vector Signal Analyser	FSQ40	200063	R&S	2019-05-10	1 year
2	Wireless communication comprehensive tester	CMW500	148904	R&S	2019-05-10	1 year
3	DC Power Supply	ZUP60-14	LOC-220Z 006-0007	TDL-Lambda	2019-05-10	1 year

Anechoic chamber

Fully anechoic chamber by ETS

7. Test Environment

Shielding Room1 (6.0 meters×3.0 meters×2.7 meters) did not exceed following limits along the conducted RF performance testing:

Temperature	Min. = 15 °C, Max. = 35 °C
Relative humidity	Min. = 20%, Max. = 75 %
Shielding effectiveness	> 100 dB
Ground system resistance	< 0.5 Ω

Control room did not exceed following limits along the EMC testing:

Temperature	Min. = 15 °C, Max. = 35 °C
Relative humidity	Min. =25 %, Max. =75 %
Shielding effectiveness	> 100 dB
Electrical insulation	> 10 kΩ
Ground system resistance	< 0.5 Ω

Fully-anechoic chamber1 (6.9 meters×10.9 meters×5.4 meters) did not exceed following limits along the EMC testing:

Temperature	Min. = 15 °C, Max. = 35 °C
Relative humidity	Min. = 25 %, Max. = 75 %
Shielding effectiveness	> 100 dB
Electrical insulation	> 10 kΩ
Ground system resistance	< 0.5 Ω
VSWR	Between 0 and 6 dB, from 1GHz to 18GHz
Site Attenuation Deviation	Between -4 and 4 dB,30MHz to 1GHz
Uniformity of field strength	Between 0 and 6 dB, from 80MHz to 3000 MHz

8. Measurement Uncertainty

Measurement uncertainty for all the testing in this report are within the limit specified in ECIT documents. The detailed measurement uncertainty to see the column, k=2

Measurement Items	Range	Confidence Level	Calculated Uncertainty
Maximum Peak Output Power	30MHz-3600MHz	95%	$\pm 0.544\text{dB}$
EBW and VBW	30MHz-3600MHz	95%	$\pm 62.04\text{Hz}$
Transmitter Spurious Emission-Conducted	30MHz-2GHz	95%	$\pm 0.90\text{dB}$
Transmitter Spurious Emission-Conducted	2GHz-3.6GHz	95%	$\pm 0.88\text{dB}$
Transmitter Spurious Emission-Conducted	3.6GHz-8GHz	95%	$\pm 0.96\text{dB}$
Transmitter Spurious Emission-Conducted	8GHz-20GHz	95%	$\pm 0.94\text{dB}$
Transmitter Spurious Emission-Radiated	9KHz-30MHz	95%	$\pm 5.66\text{dB}$
Transmitter Spurious Emission-Radiated	30MHz-1000MHz	95%	$\pm 4.98\text{dB}$
Transmitter Spurious Emission-Radiated	1000MHz -18000MHz	95%	$\pm 5.06\text{dB}$
Transmitter Spurious Emission-Radiated	18000MHz -40000MHz	95%	$\pm 5.20\text{dB}$
Frequency stability	1MHz-16GHz	95%	$\pm 62.04\text{Hz}$

ANNEX A. MEASUREMENT RESULTS

ANNEX A.1. OUTPUT POWER

A.1.1. Summary

During the process of testing, the EUT was controlled via Rhode & Schwarz Digital Radio Communication tester (CMW500) to ensure max power transmission and proper modulation.

In all cases, output power is within the specified limits.

CMW500 setting:

1: CMW500 is connected to the DUT

2; Set RX Expected PEP to 30 dbm

A.1.2. Conducted

A.1.2.1. Method of Measurements

The EUT was set up for the max output power with pseudo random data modulation.

These measurements were done at 3 frequencies (bottom, middle and top of operational frequency range) for each bandwidth.

A.1.2.2 Measurement result

The unit of output power is dBm

LTE band 2

LTE					
Modulation	RB	RB Offset	1.4MHz		
			18607	18900	19193
QPSK	1	Low	21.77	21.80	21.78
		Middle	21.92	21.95	21.88
		High	21.77	21.80	21.76
	50%	Low	21.87	21.88	21.87
		Middle	21.92	21.93	21.91
		High	21.88	21.89	21.86
	100%	/	20.94	20.88	20.87
16QAM	1	Low	21.16	21.12	21.08
		Middle	21.30	21.24	21.21
		High	21.13	21.11	21.08
	50%	Low	20.99	20.94	20.90
		Middle	21.05	20.97	20.94
		High	21.00	20.95	20.90
	100%	/	20.05	20.05	20.05
Modulation	RB	RB Offset	3MHz		
			18615	18900	19185
QPSK	1	Low	21.88	21.87	21.85

		Middle	21.99	22.03	21.97
		High	21.85	21.87	21.83
	50%	Low	20.96	20.89	20.86
		Middle	20.99	20.91	20.88
		High	20.93	20.87	20.85
	100%	/	20.93	20.87	20.86
16QAM	1	Low	21.24	21.22	21.17
		Middle	21.38	21.35	21.23
		High	21.23	21.17	21.07
	50%	Low	20.01	20.05	20.01
		Middle	20.05	20.05	20.02
		High	20.01	20.01	19.98
	100%	/	19.94	19.98	19.94
Modulation	RB	RB Offset	5MHz		
			18625	18900	19175
QPSK	1	Low	21.80	21.80	21.77
		Middle	22.02	22.02	21.97
		High	21.74	21.74	21.76
	50%	Low	20.93	20.89	20.89
		Middle	21.01	20.92	20.91
		High	20.94	20.87	20.84
	100%	/	20.97	20.89	20.90
16QAM	1	Low	21.18	21.09	21.09
		Middle	21.37	21.35	21.30
		High	21.11	21.10	21.06
	50%	Low	19.96	20.00	20.01
		Middle	20.03	20.03	20.02
		High	19.97	19.99	19.95
	100%	/	19.96	19.98	19.97
Modulation	RB	RB Offset	10MHz		
			18650	18900	19150
QPSK	1	Low	21.90	21.92	21.85
		Middle	21.95	22.00	21.98
		High	21.79	21.81	21.83
	50%	Low	20.99	21.00	21.03
		Middle	20.99	20.94	20.94
		High	21.03	20.93	20.89
	100%	/	21.01	20.96	20.97
16QAM	1	Low	21.30	21.21	21.13
		Middle	21.34	21.31	21.29
		High	21.18	21.14	21.12
	50%	Low	19.98	20.06	20.10

		Middle	19.97	20.01	20.02
		High	20.02	20.01	19.97
	100%	/	20.00	20.04	20.04
Modulation	RB	RB Offset	15MHz		
			18675	18900	19125
QPSK	1	Low	21.84	21.84	21.74
		Middle	21.89	21.94	21.89
		High	21.71	21.73	21.75
	50%	Low	20.97	20.97	20.91
		Middle	20.95	20.92	20.94
		High	20.96	20.90	20.87
	100%	/	21.00	20.97	20.93
16QAM	1	Low	21.21	21.22	21.05
		Middle	21.31	21.23	21.18
		High	21.14	21.06	21.03
	50%	Low	19.98	20.05	20.03
		Middle	19.97	20.01	20.04
		High	19.99	20.01	19.98
	100%	/	19.98	20.02	19.99
Modulation	RB	RB Offset	20MHz		
			18700	18900	19100
QPSK	1	Low	21.76	21.68	21.50
		Middle	22.04	21.78	21.92
		High	21.64	21.10	21.18
	50%	Low	21.01	21.15	20.99
		Middle	21.09	21.02	20.99
		High	21.09	21.01	20.75
	100%	/	21.03	21.04	20.93
16QAM	1	Low	21.13	21.19	21.00
		Middle	21.40	21.35	21.27
		High	21.05	20.90	20.89
	50%	Low	20.00	20.15	20.04
		Middle	20.04	20.09	20.05
		High	20.05	20.07	19.90
	100%	/	20.00	20.10	19.98

LTE band 7

LTE					
Modulation	RB	RB Offset	5MHz		
			20775	21100	21425
QPSK	1	Low	22.26	22.67	22.72
		Middle	22.65	23.00	23.03
		High	22.63	22.69	22.81
	50%	Low	21.71	21.81	21.94
		Middle	21.72	21.87	21.99
		High	21.64	21.78	21.85
	100%	/	21.78	21.84	21.96
16QAM	1	Low	21.87	21.90	21.91
		Middle	22.21	22.21	22.11
		High	21.88	21.93	21.73
	50%	Low	20.81	20.82	20.89
		Middle	20.86	20.87	20.95
		High	20.80	20.78	20.84
	100%	/	20.80	20.78	20.88
Modulation	RB	RB Offset	10MHz		
			20800	21100	21400
QPSK	1	Low	22.30	22.78	22.48
		Middle	22.47	22.94	22.71
		High	22.61	22.84	22.45
	50%	Low	21.66	21.94	22.01
		Middle	21.71	21.92	22.03
		High	21.72	21.88	21.82
	100%	/	21.74	21.94	21.98
16QAM	1	Low	21.99	21.99	21.91
		Middle	22.14	22.15	22.10
		High	22.00	22.07	21.69
	50%	Low	20.85	20.88	20.91
		Middle	20.88	20.86	20.94
		High	20.88	20.85	20.87
	100%	/	20.89	20.89	20.90
Modulation	RB	RB Offset	15MHz		
			20825	21100	21375
QPSK	1	Low	22.22	22.70	22.34
		Middle	22.38	22.85	22.58
		High	22.59	22.81	22.43
	50%	Low	21.52	21.89	21.91
		Middle	21.61	21.93	21.98
		High	21.62	21.89	21.72

	100%	/	21.70	21.92	21.90
16QAM	1	Low	21.93	21.88	21.62
		Middle	22.06	22.07	21.93
		High	21.94	22.06	21.66
	50%	Low	20.86	20.87	20.93
		Middle	20.88	20.91	20.97
		High	20.89	20.86	20.93
	100%	/	20.87	20.88	20.92
Modulation	RB	RB Offset	20MHz		
			20850	21100	21350
QPSK	1	Low	22.03	22.63	22.30
		Middle	22.57	23.10	22.71
		High	22.62	22.85	22.34
	50%	Low	21.57	22.09	21.67
		Middle	21.78	22.13	21.95
		High	21.82	22.02	21.75
	100%	/	21.69	22.06	21.79
16QAM	1	Low	21.70	21.84	21.60
		Middle	22.21	22.35	22.11
		High	21.89	22.13	21.67
	50%	Low	20.84	21.04	21.05
		Middle	20.98	21.10	21.16
		High	21.01	20.98	21.08
	100%	/	20.92	21.02	21.03

A.1.3 Radiated

A.1.3.1 Description

This is the test for the maximum radiated power from the EUT.

Rule Part 24.232(b) specifies, "Mobile/portable stations are limited to 2 watts e.i.r.p. Peak power" and 24.232(c) specifies that "Peak transmit power must be measured over any interval of continuous transmission using instrumentation calibrated in terms of an rms-equivalent voltage."

Rule Part 27.50(d) specifies "Fixed, mobile, and portable (handheld) stations operating in the 1710–1755 MHz band are limited to 1 watt EIRP".


Rule Part 27.50(h)(2) specifies "Mobile stations are limited to 2.0 watts EIRP".

Rule Part 27.50(c) specifies "Portable stations (hand-held de-vices) are limited to 3 watts ERP".


A.1.3.2 Method of Measurement

The measurements procedures in TIA-603E-2016 are used.

1. EUT was placed on a 1.5 meter high non-conductive stand at a 3 meter test distance from the receive antenna. A receiving antenna was placed on the antenna mast 3 meters from the EUT for emission measurements. The height of receiving antenna is 1.5m. The test setup refers to figure below. Detected emissions were maximized at each frequency by rotating the EUT through 360° and adjusting the receiving antenna polarization. The radiated emission measurements of all transmit frequencies in three channels (High, Middle, Low) were measured with peak detector.

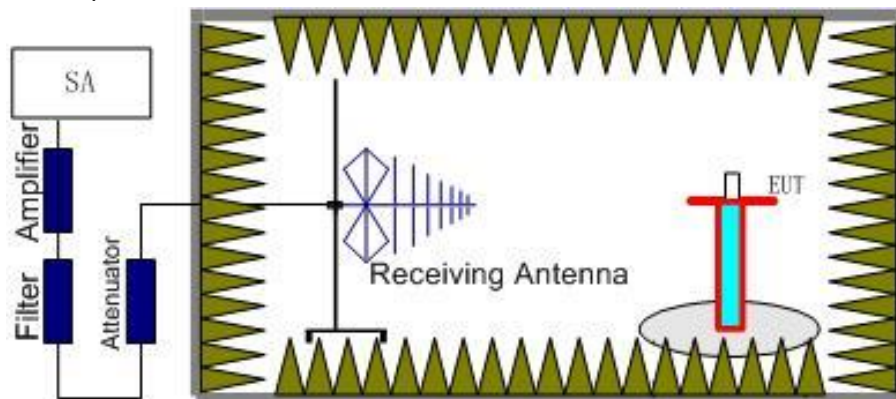

2. The EUT is then put into continuously transmitting mode at its maximum power level during the test. And the maximum value of the receiver should be recorded as (Pr).
3. The EUT shall be replaced by a substitution antenna. The test setup refers to figure below.

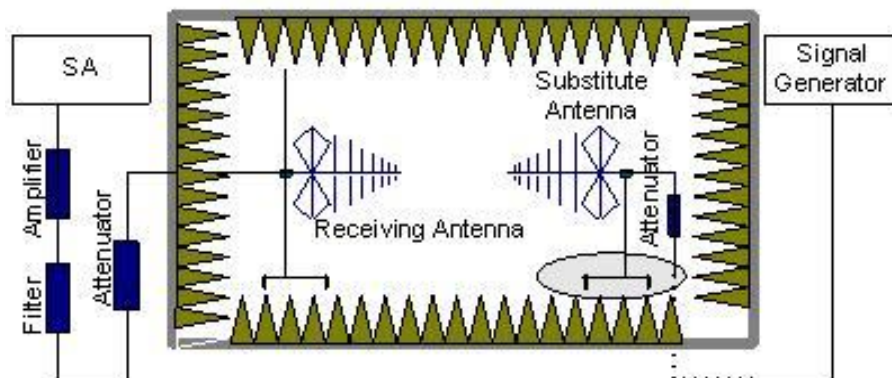

In the chamber, a substitution antenna for the frequency band of interest is placed at the reference point of the chamber. An RF signal source for the frequency band of interest is connected to the substitution antenna with a cable that has been constructed to not interfere with the radiation pattern of the antenna. A power (P_{Mea}) is applied to the input of the substitution antenna. Adjust the level of the signal generator output until the value of the receiver reaches the previously recorded (P_r). The power of signal source (P_{Mea}) is recorded. The test should be performed by rotating the test item and adjusting the receiving antenna polarization.

4. An amplifier should be connected to the Signal Source output port. And the cable should be connected between the amplifier and the substitution antenna.
The cable loss (P_{cl}), the substitution antenna Gain (G_a) and the amplifier Gain (P_{Ag}) should be recorded after test.

The measurement results are obtained as described below:

$$\text{Power (EIRP)} = P_{Mea} + P_{Ag} - P_{cl} + G_a$$

5. This value is EIRP since the measurement is calibrated using an antenna of known gain (unit dBi) and known input power.
6. ERP can be calculated from EIRP by subtracting the gain of the dipole, $ERP = EIRP - 2.15\text{dBi}$.

A.1.3.3 Measurement result

LTE Band 2- EIRP 24. 232(b)

Limits: $\leq 33\text{dBm}$ (2W)

LTE Band 2

Bandwidth	Modulation	Channel	EIRP (dBm)	Limit (dBm)	Polarization
1.4MHz	QPSK	18607	19.17	33.00	H
		18900	19.19	33.00	H
		19193	19.18	33.00	H
	16QAM	18607	18.56	33.00	H
		18900	18.51	33.00	H
		19193	18.47	33.00	H
3MHz	QPSK	18615	19.28	33.00	H
		18900	19.27	33.00	H
		19185	19.24	33.00	H
	16QAM	18615	18.63	33.00	H
		18900	18.61	33.00	H
		19185	18.57	33.00	H
5MHz	QPSK	18625	19.19	33.00	H
		18900	19.20	33.00	H
		19175	19.17	33.00	H
	16QAM	18625	18.58	33.00	H
		18900	18.49	33.00	H
		19175	18.49	33.00	H
10MHz	QPSK	18650	19.29	33.00	H

	16QAM	18900	19.32	33.00	H
		19150	19.25	33.00	H
		18650	18.70	33.00	H
		18900	18.61	33.00	H
		19150	18.53	33.00	H
15MHz	QPSK	18675	19.23	33.00	H
		18900	19.23	33.00	H
		19125	19.14	33.00	H
	16QAM	18675	18.61	33.00	H
		18900	18.61	33.00	H
		19125	18.44	33.00	H
20MHz	QPSK	18700	19.15	33.00	H
		18900	19.07	33.00	H
		19100	18.90	33.00	H
	16QAM	18700	18.53	33.00	H
		18900	18.58	33.00	H
		19100	18.39	33.00	H

LTE Band 7- EIRP 27.50(h)(2)

Limits: ≤33 dBm (2W)

Bandwidth	Modulation	Channel	EIRP (dBm)	Limit (dBm)	Polarization
5MHz	QPSK	20775	19.65	33.00	H
		21100	20.07	33.00	H
		21425	20.12	33.00	H
	16QAM	20775	19.27	33.00	H
		21100	19.29	33.00	H
		21425	19.31	33.00	H
10MHz	QPSK	20800	19.70	33.00	H
		21100	20.17	33.00	H
		21400	19.88	33.00	H
	16QAM	20800	19.38	33.00	H
		21100	19.38	33.00	H
		21400	19.30	33.00	H
15MHz	QPSK	20825	19.62	33.00	H
		21100	20.09	33.00	H
		21375	19.73	33.00	H
	16QAM	20825	19.32	33.00	H
		21100	19.28	33.00	H
		21375	19.01	33.00	H
20MHz	QPSK	20850	19.42	33.00	H

		21100	20.03	33.00	H
		21350	19.7	33.00	H
	16QAM	20850	19.09	33.00	H
		21100	19.24	33.00	H
		21350	18.99	33.00	H

ANALYZER SETTINGS:

RBW = VBW = 8MHz for occupied bandwidths equal to or less than 5MHz.

RBW = VBW = 20MHz for occupied bandwidths equal to or greater than 10MHz.

ANNEX A.2. EMISSION LIMIT

Reference

FCC: CFR 2.1051, 24.238(a), 27.53(g), 27.53(h), 27.53(m).


A.2.1 Measurement Method

The measurements procedures in TIA-603E-2016 are used. This measurement is carried out in fully-anechoic chamber FAC-3.


The spectrum was scanned from 30 MHz to the 10th harmonic of the highest frequency generated within the equipment, which is the transmitted carrier. The resolution bandwidth is set 1MHz as outlined in Part 24.238(a), Part 27.53(g), Part 27.53(h), Part 27.53(m). The spectrum was scanned with the mobile station transmitting at carrier frequencies that pertain to low, mid and high channels of the LTE Bands 1/2/3/7/8/20.

The procedure of radiated spurious emissions is as follows:

- Below 1 GHz, EUT was placed on a 0.8 meter high non-conductive stand at a 3 meter test distance from the receive antenna. Above 1 GHz, EUT was placed on a 1.5 meter high non-conductive stand at a 3 meter test distance from the receive antenna. EUT was placed on a 1.5 meter high non-conductive stand at a 3 meter test distance from the receive antenna. A receiving antenna was placed on the antenna mast 3 meters from the EUT for emission measurements. The height of receiving antenna is 1.5m. The test setup refers to figure below. Detected emissions were maximized at each frequency by rotating the EUT through 360° and adjusting the receiving antenna polarization. The radiated emission measurements of all non-harmonic and harmonics of the transmit frequency through the 10th harmonic were measured with peak detector.

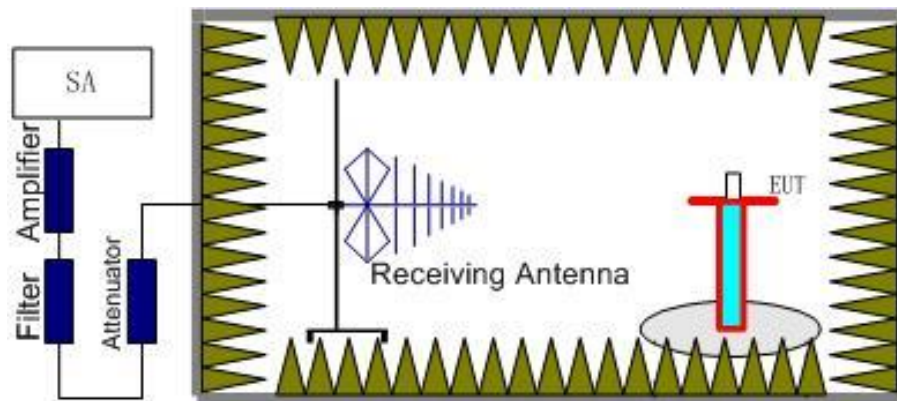

- The EUT is then put into continuously transmitting mode at its maximum power level during the test. And the maximum value of the receiver should be recorded as (Pr).
- The EUT shall be replaced by a substitution antenna. The test setup refers to figure below.

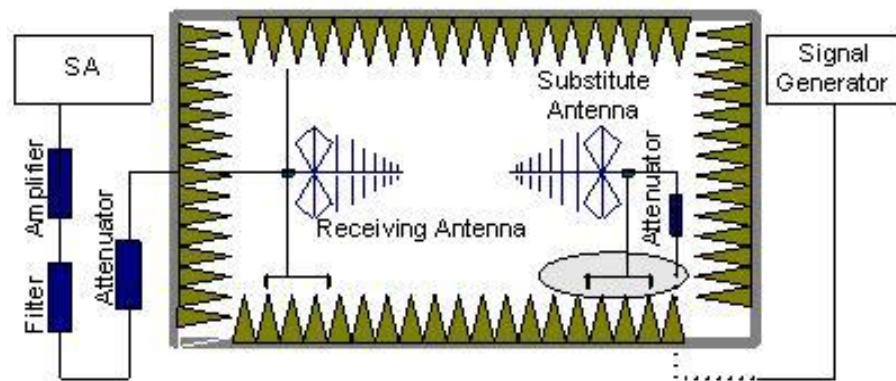

In the chamber, an substitution antenna for the frequency band of interest is placed at the reference point of the chamber. An RF Signal source for the frequency band of interest is connected to the substitution antenna with a cable that has been constructed to not interfere with the radiation pattern of the antenna. A power (P_{Mea}) is applied to the input of the substitution antenna. Adjust the level of the signal generator output until the value of the receiver reaches the previously recorded (P_r). The power of signal source (P_{Mea}) is recorded. The test should be performed by rotating the test item and adjusting the receiving antenna polarization.

4. The Path loss (P_{pl}) between the Signal Source with the Substitution Antenna and the Substitution Antenna Gain (G_a) should be recorded after test.

An amplifier should be connected in for the test.

The Path loss (P_{pl}) is the summation of the cable loss and the gain of the amplifier.

The measurement results are obtained as described below:

$$\text{Power (EIRP)} = P_{Mea} - P_{pl} + G_a$$

5. This value is EIRP since the measurement is calibrated using an antenna of known gain (unit: dBi) and known input power.
6. ERP can be calculated from EIRP by subtracting the gain of the dipole, $ERP = EIRP - 2.15\text{dBi}$.

A.2.2 Measurement Limit

Part 24.238(a), Part 27.53(g), Part 27.53(h), Part 27.53(m) all specify that the power of any emission outside of the authorized operating frequency ranges must be attenuated below the transmitting power (P) by a factor of at least $43 + 10 \log(P)$ dB. The specification that emissions shall be attenuated below the transmitter power (P) by at least $43 + 10 \log(P)$ dB, translates in the relevant power range (1 to 0.001 W) to -13 dBm. At 1 W the specified minimum attenuation becomes 43 dB and relative to a 30 dBm (1 W) carrier becomes a limit of -13 dBm. At 0.001 W (0 dBm) the minimum attenuation is 13 dB, which again yields a limit of -13 dBm. In this way a translation of the specification from relative to absolute terms is carried out.

A.2.3 Measurement Results

7. Radiated emissions measurements were made only at the upper, middle, and lower carrier frequencies of the LTE Bands 1/2/3/7/8/20. It was decided that measurements at these three carrier frequencies would be sufficient to demonstrate compliance with emissions limits because it was seen that all the significant spurs occur well outside the band and no radiation

was seen from a carrier in one block of the LTE Bands 1/2/3/7/8/20. into any of the other blocks. The equipment must still, however, meet emissions requirements with the carrier at all frequencies over which it is capable of operating and it is the manufacturer's responsibility to verify this. The evaluated frequency range is from 30MHz to 26GHz.

RSE-LTE2-L-N08

Frequency (MHz)	PMea (dBm)	Pcl (dBm)	Ga (dBi)	Peak EIRP (dBm)	Limit (dBm)	Polarization
3704.8	-55.03	6.6	7.7	-53.93	-13	V
5557.6	-50.45	8.2	9.5	-49.15	-13	H
7414.8	-54.03	9.7	14.6	-49.13	-13	H
9249.6	-54.93	10.6	18.5	-47.03	-13	V
11142.8	-51.1	12.1	18.5	-44.7	-13	V
12957.2	-48.16	13.2	20.2	-41.16	-13	V

RSE-LTE2-M-N08

Frequency (MHz)	PMea (dBm)	Pcl (dBm)	Ga (dBi)	Peak EIRP (dBm)	Limit (dBm)	Polarization
3759.6	-56.42	6.6	7.7	-55.32	-13	V
5640.0	-53.26	8.3	10.5	-51.06	-13	H
7528.0	-53.63	9.7	14.6	-48.73	-13	H
9399.2	-54.74	10.7	18.6	-46.84	-13	V
11429.8	-49.58	12.1	18.1	-43.58	-13	V
13207.8	-48.22	13.0	21.8	-39.42	-13	H

RSE-LTE2-H-N08

Frequency (MHz)	PMea (dBm)	Pcl (dBm)	Ga (dBi)	Peak EIRP (dBm)	Limit (dBm)	Polarization
3812.0	-54.63	6.7	7.7	-53.63	-13	H
5722.4	-52.49	8.5	10.5	-50.49	-13	H
7618.8	-54.45	9.7	14.6	-49.55	-13	V
9520.0	-53.88	10.7	18.6	-45.98	-13	V
11502.6	-49.19	12.3	18.1	-43.39	-13	V
13319.8	-47.49	13.6	21.8	-39.29	-13	H

RSE-LTE7-L-N08

Frequency (MHz)	PMea (dBm)	Pcl (dBm)	Ga (dBi)	Peak EIRP (dBm)	Limit (dBm)	Polarization
3700.0	-50.85	6.6	7.7	-49.75	-13	H
4985.2	-44.85	7.8	9.0	-43.65	-13	V
6292.8	-47.59	8.8	10.8	-45.59	-13	H
7480.0	-48.43	9.7	14.6	-43.53	-13	V
10044.8	-46.79	11.2	17.6	-40.39	-13	V
12692.2	-37.65	12.7	19.2	-31.15	-13	H

RSE-LTE7-M-N08

Frequency (MHz)	PMea (dBm)	Pcl (dBm)	Ga (dBi)	Peak EIRP (dBm)	Limit (dBm)	Polarization
3600.8	-45.59	6.5	4.7	-47.39	-13	H
5060.0	-44.82	7.8	9.0	-43.62	-13	H
7544.0	-48.04	9.7	14.6	-43.14	-13	V
10170.8	-44.73	11.3	17.4	-38.63	-13	V
12524.2	-40.97	12.7	18.7	-34.97	-13	H
15037.2	-39.15	14.4	24.4	-29.15	-13	V

RSE-LTE7-H-N08

Frequency (MHz)	PMea (dBm)	Pcl (dBm)	Ga (dBi)	Peak EIRP (dBm)	Limit (dBm)	Polarization
3943.6	-51.32	6.8	7.7	-50.42	-13	V
5137.6	-46.13	7.9	8.7	-45.33	-13	H
6561.6	-47.46	9.0	11.5	-44.96	-13	V
7692.8	-48.68	9.8	15.3	-43.18	-13	V
10462.4	-43.6	11.6	17.1	-38.1	-13	H
13502.5	-41.38	13.7	23.4	-31.68	-13	H

ANNEX A.3. FREQUENCY STABILITY

Reference

FCC: CFR Part 2.1055,24.235, 27.54.

A.3.1 Method of Measurement

In order to measure the carrier frequency under the condition of AFC lock, it is necessary to make measurements with the EUT in a “call mode”. This is accomplished with the use of R&S CMW500 DIGITAL RADIO COMMUNICATION TESTER.

1. Measure the carrier frequency at room temperature.
2. Subject the EUT to overnight soak at -30°C.
3. With the EUT, powered via nominal voltage, connected to the CMW500 and in a simulated call on middle channel for LTE band 2,4,5,7,12,13,17, measure the carrier frequency. These measurements should be made within 2 minutes of Powering up the EUT, to prevent significant self-warming.
4. Repeat the above measurements at 10°C increments from -30°C to +50°C. Allow at least 1.5 hours at each temperature, unpowered, before making measurements.
5. Re-measure carrier frequency at room temperature with nominal voltage. Vary supply voltage from minimum voltage to maximum voltage, in 0.1Volt increments re-measuring carrier frequency at each voltage. Pause at nominal voltage for 1.5 hours unpowered, to allow any self-heating to stabilize, before continuing.
6. Subject the EUT to overnight soak at +50°C.
7. With the EUT, powered via nominal voltage, connected to the CMW500 and in a simulated call on the centre channel, measure the carrier frequency. These measurements should be made within 2 minutes of Powering up the EUT, to prevent significant self-warming.
8. Repeat the above measurements at 10 °C decrements from +50°C to -30°C. Allow at least 1.5 hours at each temperature, unpowered, before making measurements.
9. At all temperature levels hold the temperature to +/- 0.5°C during the measurement procedure.

A.3.2 Measurement Limit

According to the JTC standard the frequency stability of the carrier shall be accurate to within 0.1 ppm of the received frequency from the base station. This accuracy is sufficient to meet Sec. 24.235, Frequency Stability. The frequency stability shall be sufficient to ensure that the fundamental emission stays within the authorized frequency block. As this transceiver is considered "Hand carried, battery powered equipment" Section 2.1055(d) (2) applies. This requires that the lower voltage for frequency stability testing be specified by the manufacturer. This transceiver is specified to operate with an input voltage of between 3.5VDC and 4.4VDC, with a nominal voltage of 3.85VDC. Operation above or below these voltage limits is prohibited by transceiver software in order to prevent improper operation as well as to protect components from overstress. For the purposes of measuring frequency stability these voltage limits are to be used.

A.3.3 Measurement results

LTE Band 2, 1.4MHz bandwidth (worst case of all bandwidths)

Frequency Error vs Voltage

Voltage (V)	Frequency error (Hz)		Frequency error (ppm)	
	QPSK	16QAM	QPSK	16QAM
3.60	-14.119	-23.360	0.008	0.012
3.80	-15.292	-28.439	0.008	0.015
4.35	-13.719	-22.588	0.007	0.012

Frequency Error vs Temperature

Temperature (°C)	Frequency error (Hz)		Frequency error (ppm)	
	QPSK	16QAM	QPSK	16QAM
50°	-11.630	-27.394	0.006	0.015
40°	-14.334	-31.600	0.008	0.017
30°	-15.721	-27.266	0.008	0.015
20°	-15.507	-31.729	0.008	0.017
10°	-15.593	-23.861	0.008	0.013
0°	-10.772	-29.082	0.006	0.015
- 10°	-14.091	-28.625	0.007	0.015
- 20°	-12.059	-18.082	0.006	0.010
- 30°	-17.467	-26.650	0.009	0.014

LTE Band 7, 5MHz bandwidth (worst case of all bandwidths)

Frequency Error vs Voltage

Voltage (V)	Frequency error (Hz)		Frequency error (ppm)	
	QPSK	16QAM	QPSK	16QAM
3.60	-16.150	-18.096	0.006	0.007
3.80	11.659	-21.558	0.005	0.009
4.35	-15.306	21.887	0.006	0.009

Frequency Error vs Temperature

Temperature (°C)	Frequency error (Hz)		Frequency error (ppm)	
	QPSK	16QAM	QPSK	16QAM
50°	-9.613	16.937	0.004	0.007
40°	-12.918	19.212	0.005	0.008
30°	-17.996	19.956	0.007	0.008
20°	-18.325	-19.841	0.007	0.008
10°	-9.899	17.552	0.004	0.007
0°	-16.108	15.693	0.006	0.006
- 10°	-18.182	-20.299	0.007	0.008
- 20°	-13.161	-14.720	0.005	0.006
- 30°	-16.637	18.282	0.007	0.007

ANNEX A.4. OCCUPIED BANDWIDTH

Reference



FCC: CFR Part 2.1049(h)(i)

A.4.1 Occupied Bandwidth Results

Occupied bandwidth measurements are only provided for selected frequencies in order to reduce the amount of submitted data. Data were taken at the extreme and mid frequencies of the US Cellular/PCS frequency bands. The table below lists the measured 99% BW. Spectrum analyzer plots are included on the following pages.





The measurement method is from KDB 971168 4:

- The spectrum analyzer center frequency is set to the nominal EUT channel center frequency. The frequency span for the spectrum analyzer shall be set wide enough to capture all modulation products including the emission skirts (i.e., two to five times the OBW).
- The nominal IF filter bandwidth (3 dB RBW) shall be in the range of 1 to 5 % of the anticipated OBW, and the VBW shall be at least 3 times the RBW.
- Set the reference level of the instrument as required to keep the signal from exceeding the maximum input mixer level for linear operation. In general, the peak of the spectral envelope must be at least $10\log(\text{OBW} / \text{RBW})$ below the reference level.
- Set the detection mode to peak, and the trace mode to max hold.
- Use the 99 % power bandwidth function of the spectrum analyzer and report the measured bandwidth.

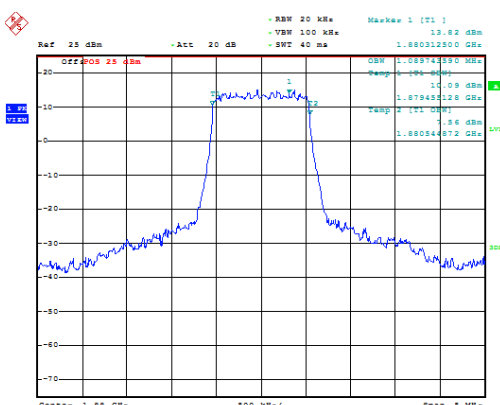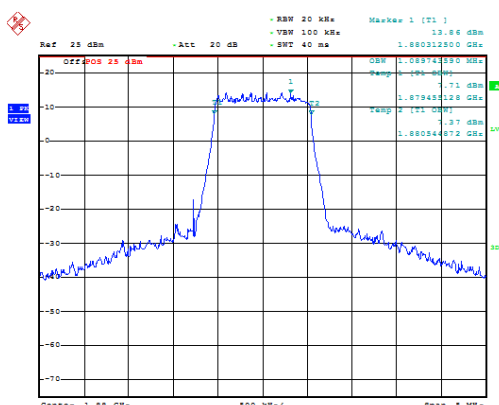
Frequency(MHz)	Occupied Bandwidth (99%)(MHz)	
1880.0	QPSK	16QAM
	1.09	1.09
LTE band 2, 1.4MHz Bandwidth, QPSK (99% BW)	LTE band 2, 1.4MHz Bandwidth, 16QAM (99% BW)	
		

Frequency(MHz)	Occupied Bandwidth (99%)(MHz)	
1880.0	QPSK	16QAM
	2.69	2.69
LTE band 2, 3MHz Bandwidth, QPSK (99% BW)	LTE band 2, 3MHz Bandwidth, 16QAM (99% BW)	
<p>Ref: 25 dBm, Att: 20 dB, RBW: 30 kHz, VSW: 200 kHz, SWT: 40 ms, Marker: 1 [T1], Center: 1.88 GHz, Span: 10 MHz, Date: 14.MAR.2020 14:04:30</p>	<p>Ref: 25 dBm, Att: 20 dB, RBW: 30 kHz, VSW: 200 kHz, SWT: 40 ms, Marker: 1 [T1], Center: 1.88 GHz, Span: 10 MHz, Date: 14.MAR.2020 14:05:08</p>	
Frequency(MHz)	Occupied Bandwidth (99%)(MHz)	
1880.0	QPSK	16QAM
	4.50	4.50
LTE band 2, 5MHz Bandwidth, QPSK (99% BW)	LTE band 2, 5MHz Bandwidth, 16QAM (99% BW)	
<p>Ref: 25 dBm, Att: 20 dB, RBW: 30 kHz, VSW: 200 kHz, SWT: 40 ms, Marker: 1 [T1], Center: 1.88 GHz, Span: 10 MHz, Date: 14.MAR.2020 14:06:33</p>	<p>Ref: 25 dBm, Att: 20 dB, RBW: 30 kHz, VSW: 200 kHz, SWT: 40 ms, Marker: 1 [T1], Center: 1.88 GHz, Span: 10 MHz, Date: 14.MAR.2020 14:07:12</p>	

Page Number: 34 of 54
Report Issued Date: Apr.29.2020

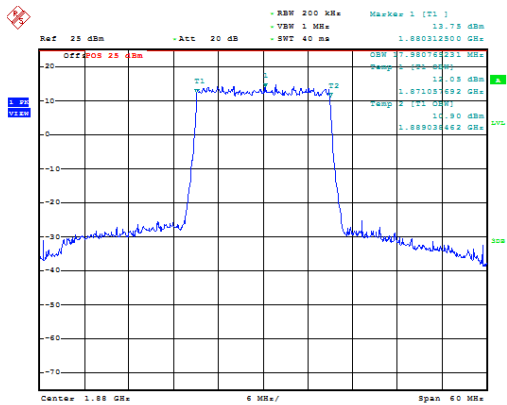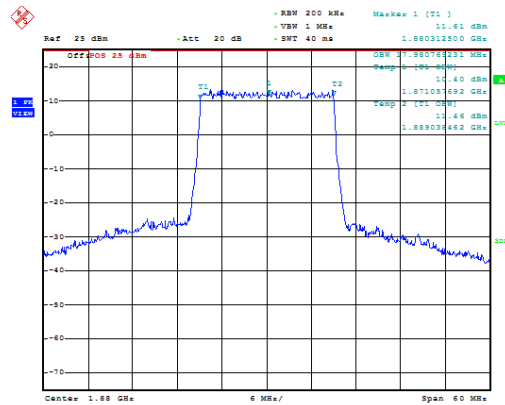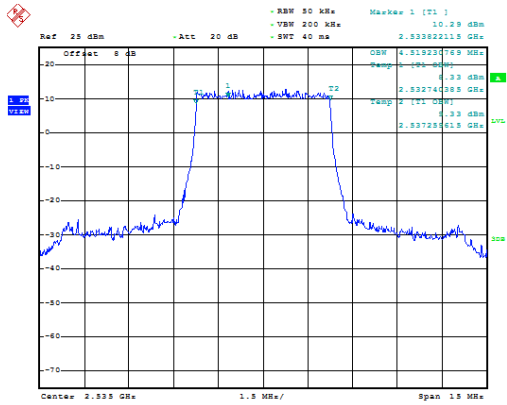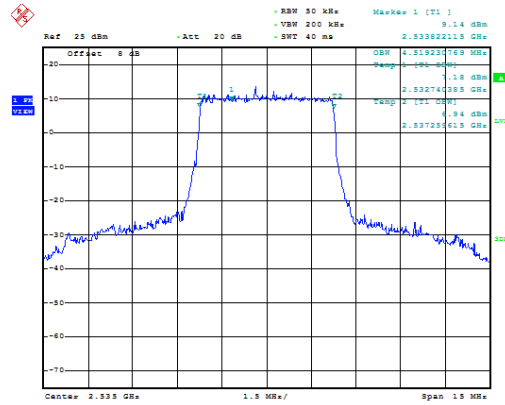Frequency(MHz)	Occupied Bandwidth (99%)(MHz)	
1880.0	QPSK	16QAM
	17.98	17.98
LTE band 2, 20MHz Bandwidth, QPSK (99% BW)	LTE band 2, 20MHz Bandwidth, 16QAM (99% BW)	
 <p>Ref: 25 dBm, Att: 20 dB, SWT: 40 ms, Center: 1.88 GHz, Span: 60 MHz, Date: 14.MAR.2020 14:22:36</p>	 <p>Ref: 25 dBm, Att: 20 dB, SWT: 40 ms, Center: 1.88 GHz, Span: 60 MHz, Date: 14.MAR.2020 14:23:19</p>	
Frequency(MHz)	Occupied Bandwidth (99%)(MHz)	
2535.0	QPSK	16QAM
	4.52	4.52
LTE band 7, 5MHz Bandwidth, QPSK (99% BW)	LTE band 7, 5MHz Bandwidth, 16QAM (99% BW)	
 <p>Ref: 25 dBm, Att: 20 dB, SWT: 40 ms, Center: 2.535 GHz, Span: 15 MHz, Date: 14.MAR.2020 14:00:42</p>	 <p>Ref: 25 dBm, Att: 20 dB, SWT: 40 ms, Center: 2.535 GHz, Span: 15 MHz, Date: 14.MAR.2020 14:01:21</p>	

Page Number: 36 of 54
Report Issued Date: Apr.29.2020

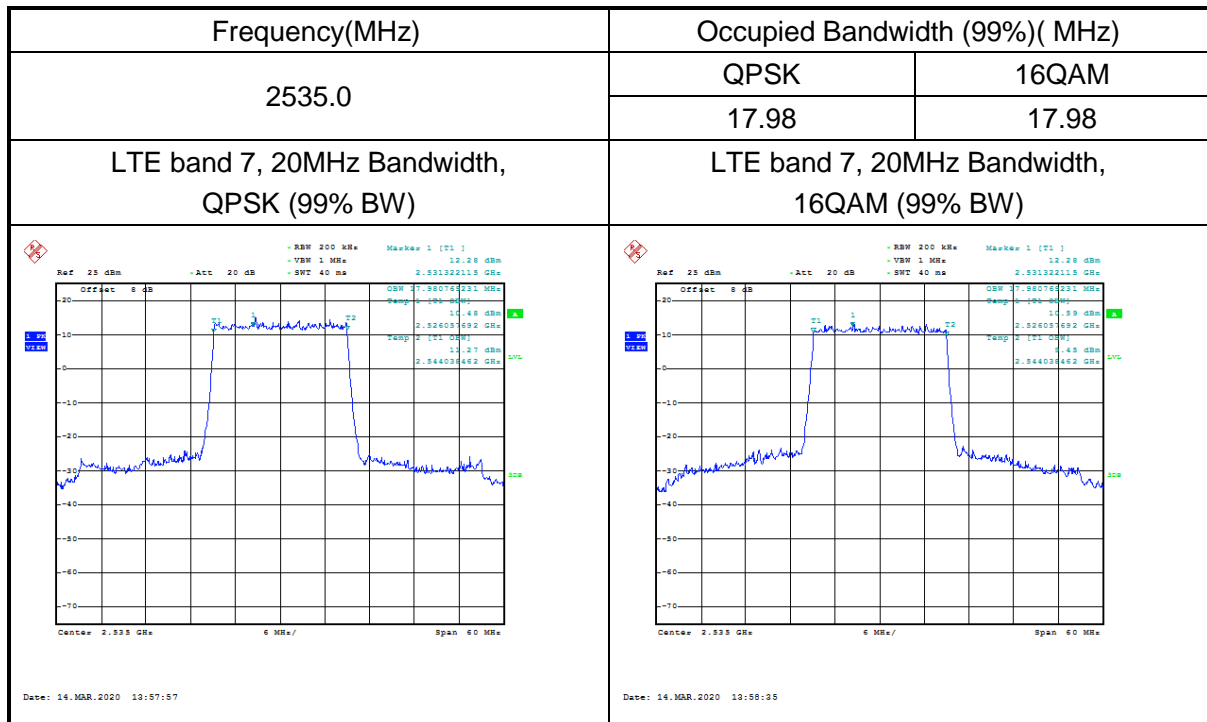

ANNEX A.5. EMISSION BANDWIDTH





Reference





FCC: CFR Part24.238(a), 27.53(g),27.53(h), 27.53(m)

A.5.1Emission Bandwidth Results





The emission bandwidth is defined as the width of the signal between two points, one below the carrier center frequency and one above the carrier center frequency, outside of which all emissions are attenuated at least 26 dB below the transmitter power. Table below lists the measured -26dBc BW.





Spectrum analyzer plots are included on the following pages.

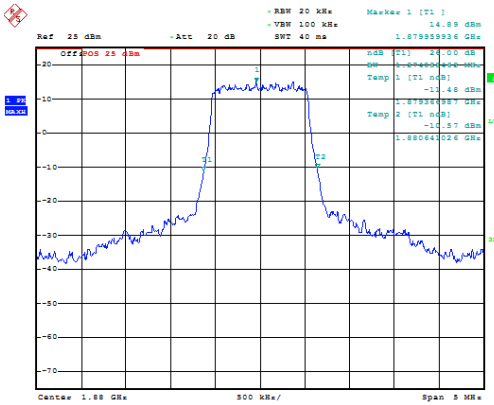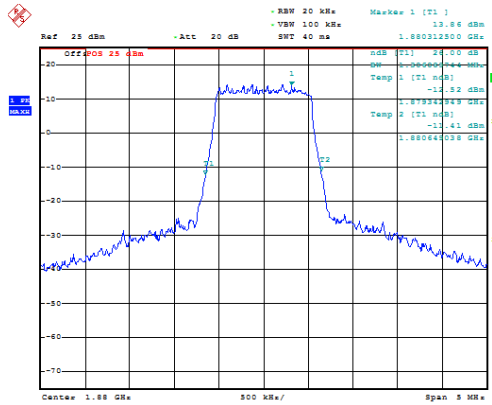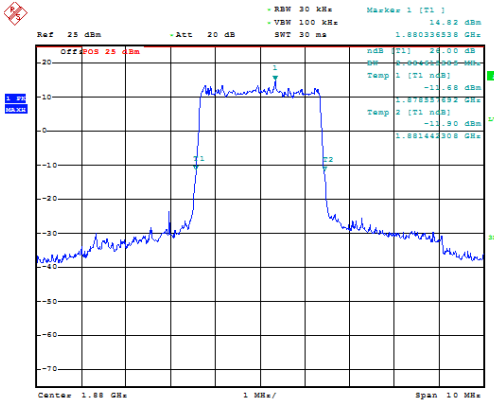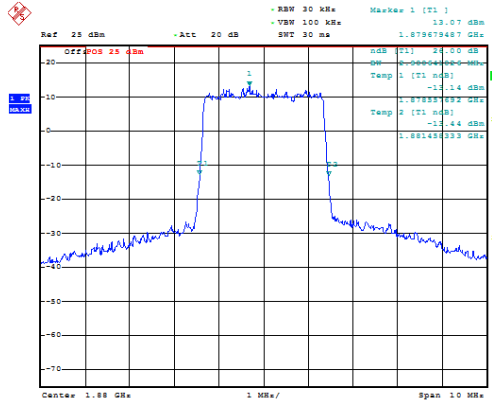Frequency(MHz)	Occupied Bandwidth (-26dBc)(MHz)	
1880.0	QPSK	16QAM
	1.28	1.31
LTE band 2, 1.4MHz Bandwidth, QPSK (-26dBc BW)	LTE band 2, 1.4MHz Bandwidth, 16QAM (-26dBc BW)	
		
Date: 14.MAR.2020 11:09:11	Date: 14.MAR.2020 11:09:16	
Frequency(MHz)	Occupied Bandwidth (-26dBc)(MHz)	
1880.0	QPSK	16QAM
	2.88	2.90
LTE band 2, 3MHz Bandwidth, QPSK (-26dBc BW)	LTE band 2, 3MHz Bandwidth, 16QAM (-26dBc BW)	
		
Date: 14.MAR.2020 10:49:39	Date: 14.MAR.2020 10:49:42	

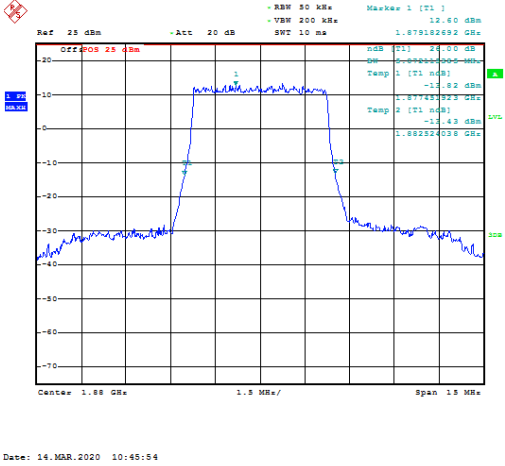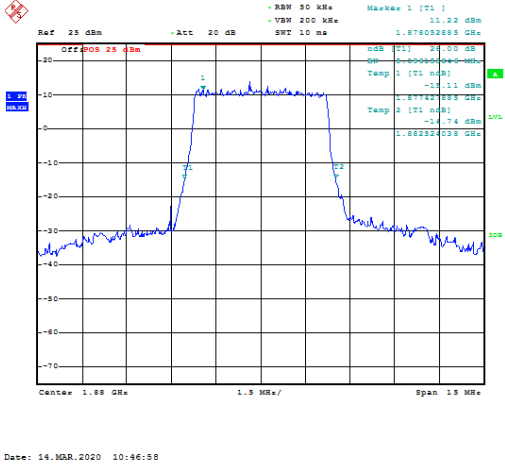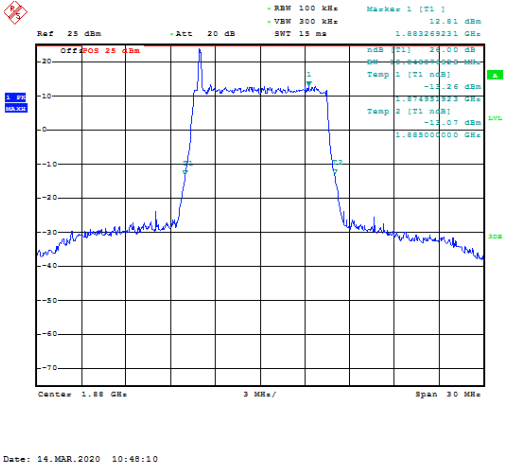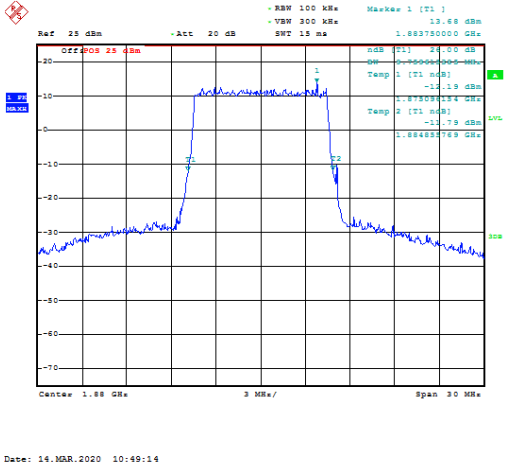Frequency(MHz)		Occupied Bandwidth (-26dBc)(MHz)	
1880.0		QPSK	16QAM
		5.07	5.10
LTE band 2, 5MHz Bandwidth, QPSK (-26dBc BW)		LTE band 2, 5MHz Bandwidth, 16QAM (-26dBc BW)	
			
Frequency(MHz)		Occupied Bandwidth (-26dBc)(MHz)	
1880.0		QPSK	16QAM
		10.05	9.76
LTE band 2, 10MHz Bandwidth, QPSK (-26dBc BW)		LTE band 2, 10MHz Bandwidth, 16QAM (-26dBc BW)	
			

Frequency(MHz)	Occupied Bandwidth (-26dBc)(MHz)	
1880.0	QPSK	16QAM
	15.07	15.07
LTE band 2, 15MHz Bandwidth, QPSK (-26dBc BW)	LTE band 2, 15MHz Bandwidth, 16QAM (-26dBc BW)	
Frequency(MHz)	Occupied Bandwidth (-26dBc)(MHz)	
1880.0	QPSK	16QAM
	20.00	20.09
LTE band 2, 20MHz Bandwidth, QPSK (-26dBc BW)	LTE band 2, 20MHz Bandwidth, 16QAM (-26dBc BW)	

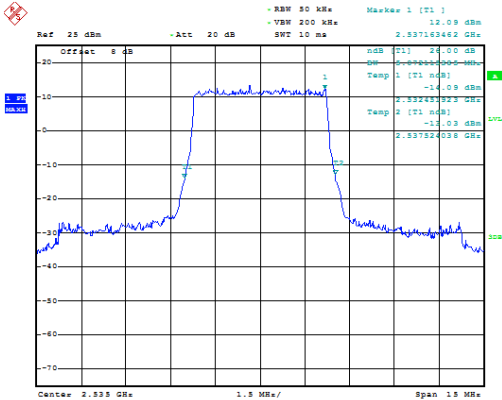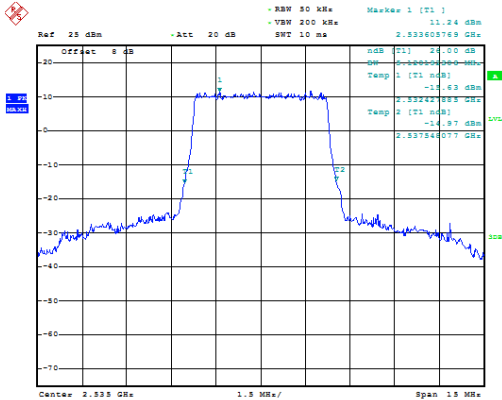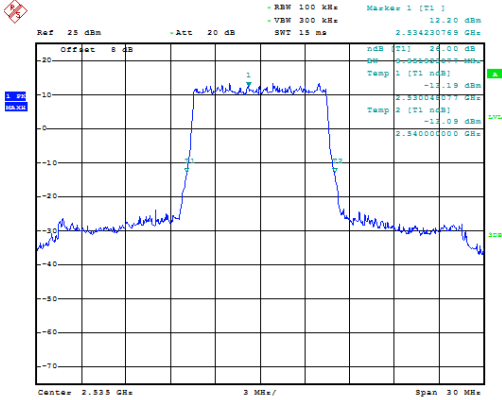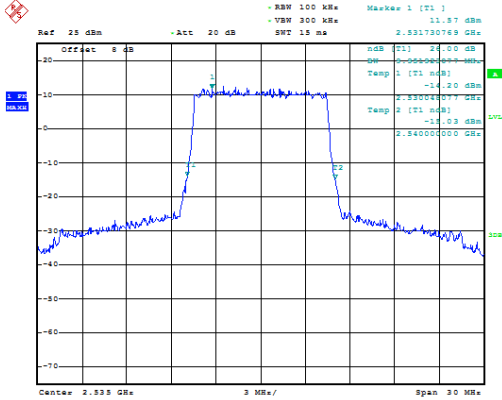Frequency(MHz)		Occupied Bandwidth (-26dBc)(MHz)	
2535.0		QPSK	16QAM
		5.07	5.12
LTE band 7, 5MHz Bandwidth, QPSK (-26dBc BW)		LTE band 7, 5MHz Bandwidth, 16QAM (-26dBc BW)	
 <p>Date: 14.MAR.2020 10:26:30</p>		 <p>Date: 14.MAR.2020 10:27:24</p>	
Frequency(MHz)		Occupied Bandwidth (-26dBc)(MHz)	
2535.0		QPSK	16QAM
		9.95	9.95
LTE band 7, 10MHz Bandwidth, QPSK (-26dBc BW)		LTE band 7, 10MHz Bandwidth, 16QAM (-26dBc BW)	
 <p>Date: 14.MAR.2020 10:21:46</p>		 <p>Date: 14.MAR.2020 10:22:50</p>	

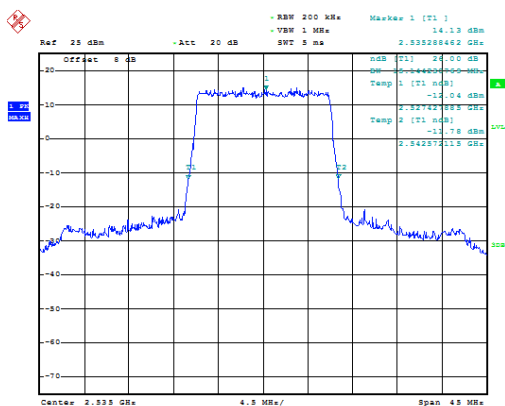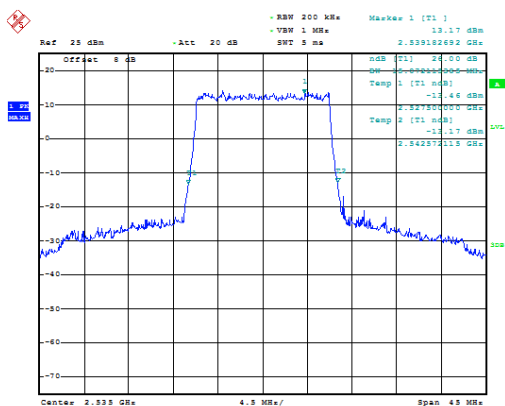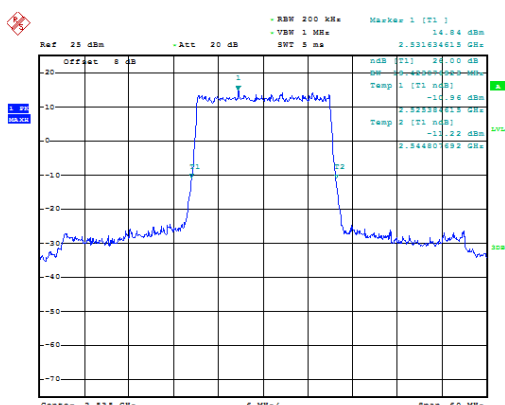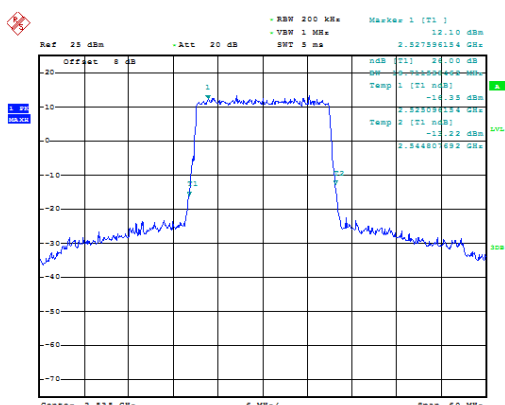Frequency(MHz)	Occupied Bandwidth (-26dBc)(MHz)	
2535.0	QPSK	16QAM
	15.14	15.07
LTE band 7, 15MHz Bandwidth, QPSK (-26dBc BW)	LTE band 7, 15MHz Bandwidth, 16QAM (-26dBc BW)	
		
Date: 14.MAR.2020 10:29:44	Date: 14.MAR.2020 10:30:48	
Frequency(MHz)	Occupied Bandwidth (-26dBc)(MHz)	
2535.0	QPSK	16QAM
	19.42	19.71
LTE band 7, 20MHz Bandwidth, QPSK (-26dBc BW)	LTE band 7, 20MHz Bandwidth, 16QAM (-26dBc BW)	
		
Date: 14.MAR.2020 10:32:49	Date: 14.MAR.2020 10:32:49	

ANNEX A.6. BAND EDGE COMPLIANCE

Reference

FCC: CFR Part 24.238(a), 27.53(g),27.53(h), 27.53(m)

A.6.1 Measurement limit


Part 24.238(a), 27.53(g),27.53(h), 27.53(m) state that on any frequency outside frequency band of the US Cellular/PCS spectrum, the power of any emission shall be attenuated below the transmitter power (P, in Watts) by at least $43+10\log(P)$ dB. For all power levels +30 dBm to 0 dBm, this becomes a constant specification limit of -13 dBm.

According to KDB 971168 6, a relaxation of the reference bandwidth is often provided for measurements within a specified frequency range at the edge of the authorized frequency block/band. This is often implemented by permitting the use of a narrower RBW (typically limited to a minimum RBW of 1% of the OBW) for measuring the out-of-band emissions without a requirement to integrate the result over the full reference bandwidth.

Part 27.53(m) states that for mobile digital stations, the attenuation factor shall be not less than $40 + 10 \log(P)$ dB on all frequencies between the channel edge and 5 megahertz from the channel edge, $43 + 10 \log(P)$ dB on all frequencies between 5 megahertz and X megahertz from the channel edge, and $55 + 10 \log(P)$ dB on all frequencies more than X megahertz from the channel edge, where X is the greater of 6 megahertz or the actual emission bandwidth as defined in paragraph (m)(6) of this section. In addition, the attenuation factor shall not be less than $43 + 10 \log(P)$ dB on all frequencies between 2490.5 MHz and 2496 MHz and $55 + 10 \log(P)$ dB at or below 2490.5 MHz. Mobile Satellite Service licensees operating on frequencies below 2495 MHz may also submit a documented interference complaint against BRS licensees operating on channel BRS Channel 1 on the same terms and conditions as adjacent channel BRS or EBS licensees.


A.6.2 Measurement result

Only worst case result is given below

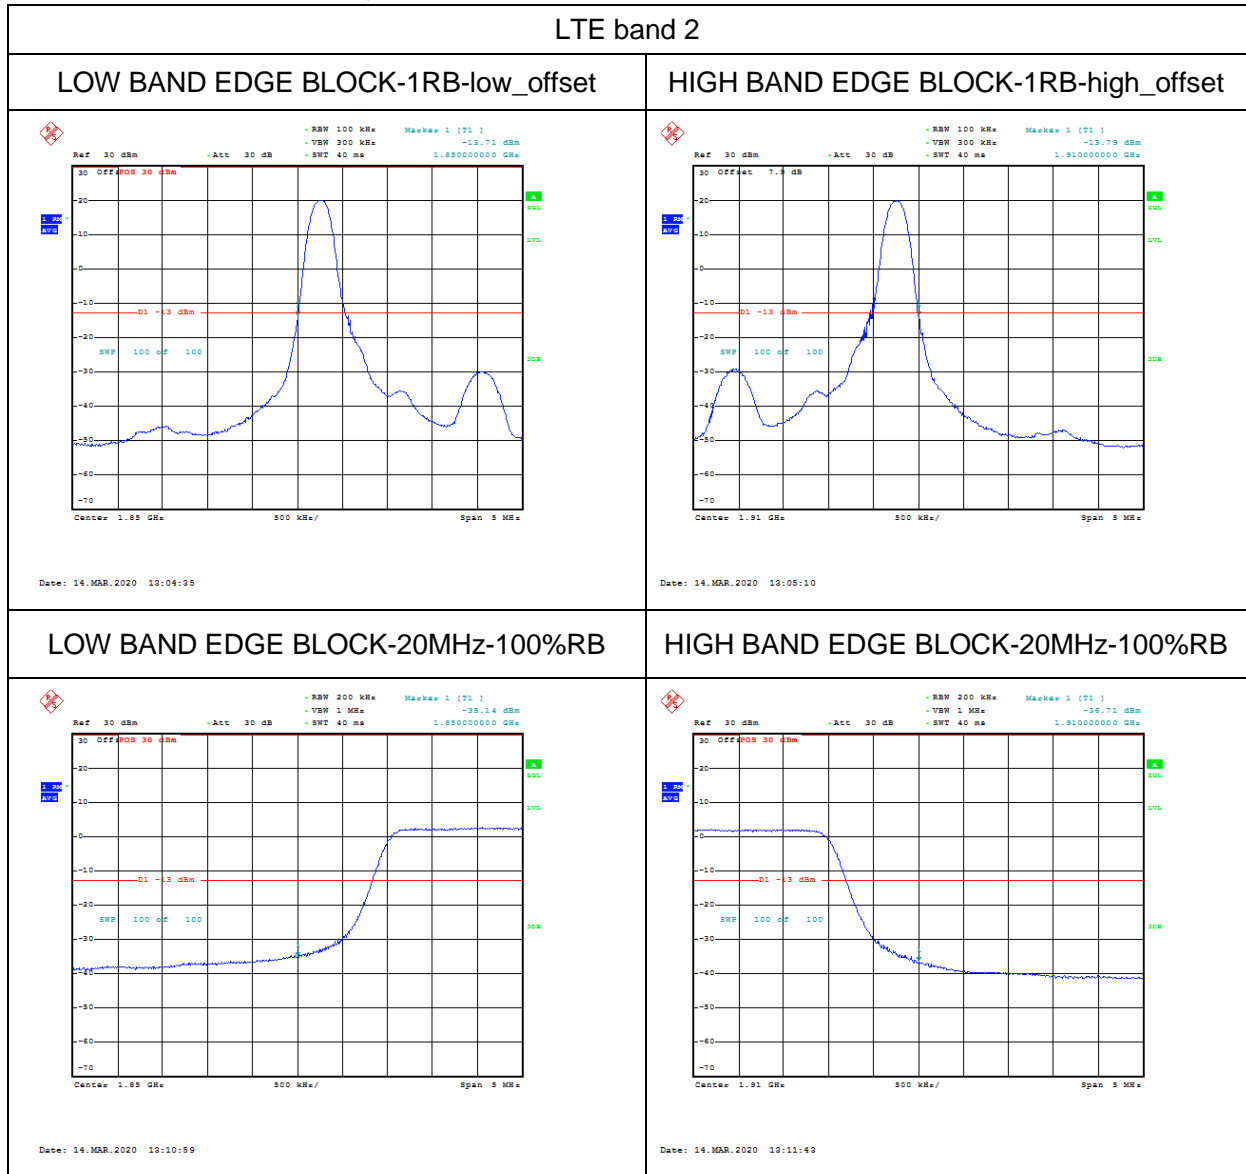


LTE band 7

LOW BAND EDGE BLOCK-1RB- high_offset

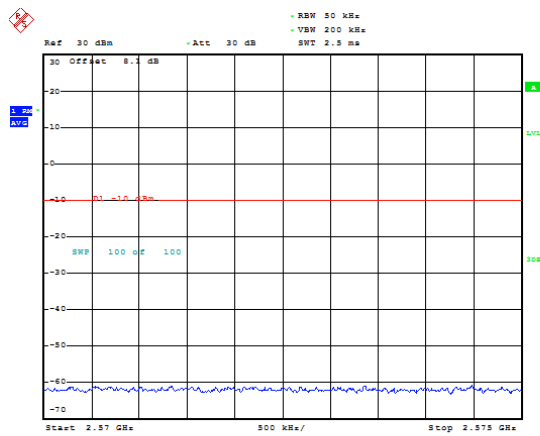


Date: 14.MAR.2020 10:15:52

HIGH BAND EDGE BLOCK-1RB-high_offset

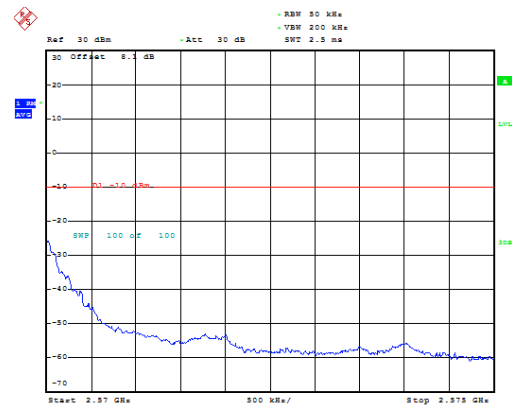


Date: 14.MAR.2020 10:24:59

LOW BAND EDGE BLOCK-1RB- high_offset

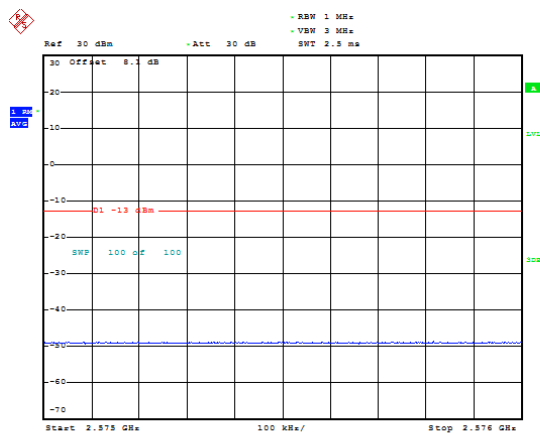


Date: 14.MAR.2020 10:15:57

HIGH BAND EDGE BLOCK-1RB-high_offset

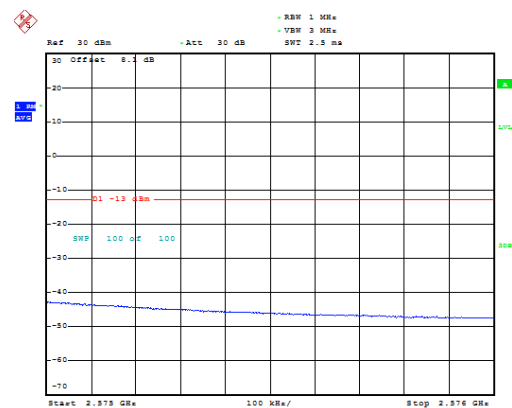


Date: 14.MAR.2020 10:25:23

LOW BAND EDGE BLOCK-1RB- high_offset

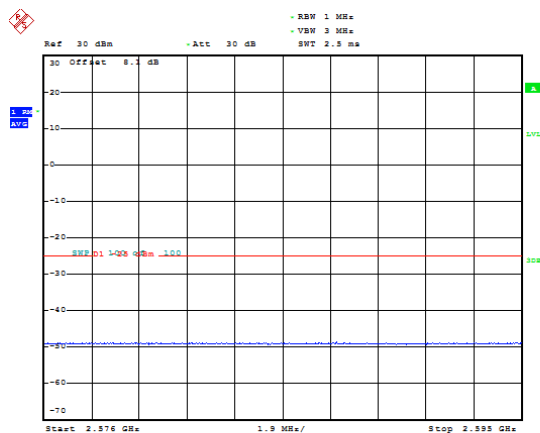


Date: 14.MAR.2020 10:16:21


HIGH BAND EDGE BLOCK-1RB-high_offset

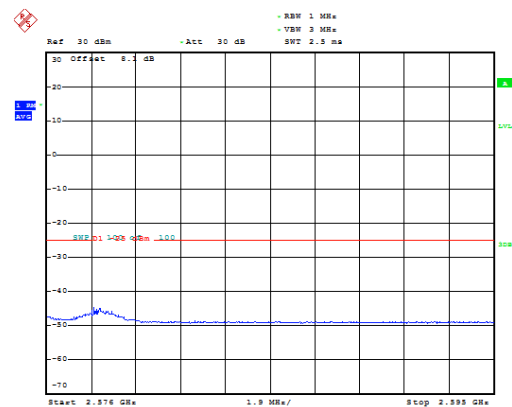

Date: 14.MAR.2020 10:25:48

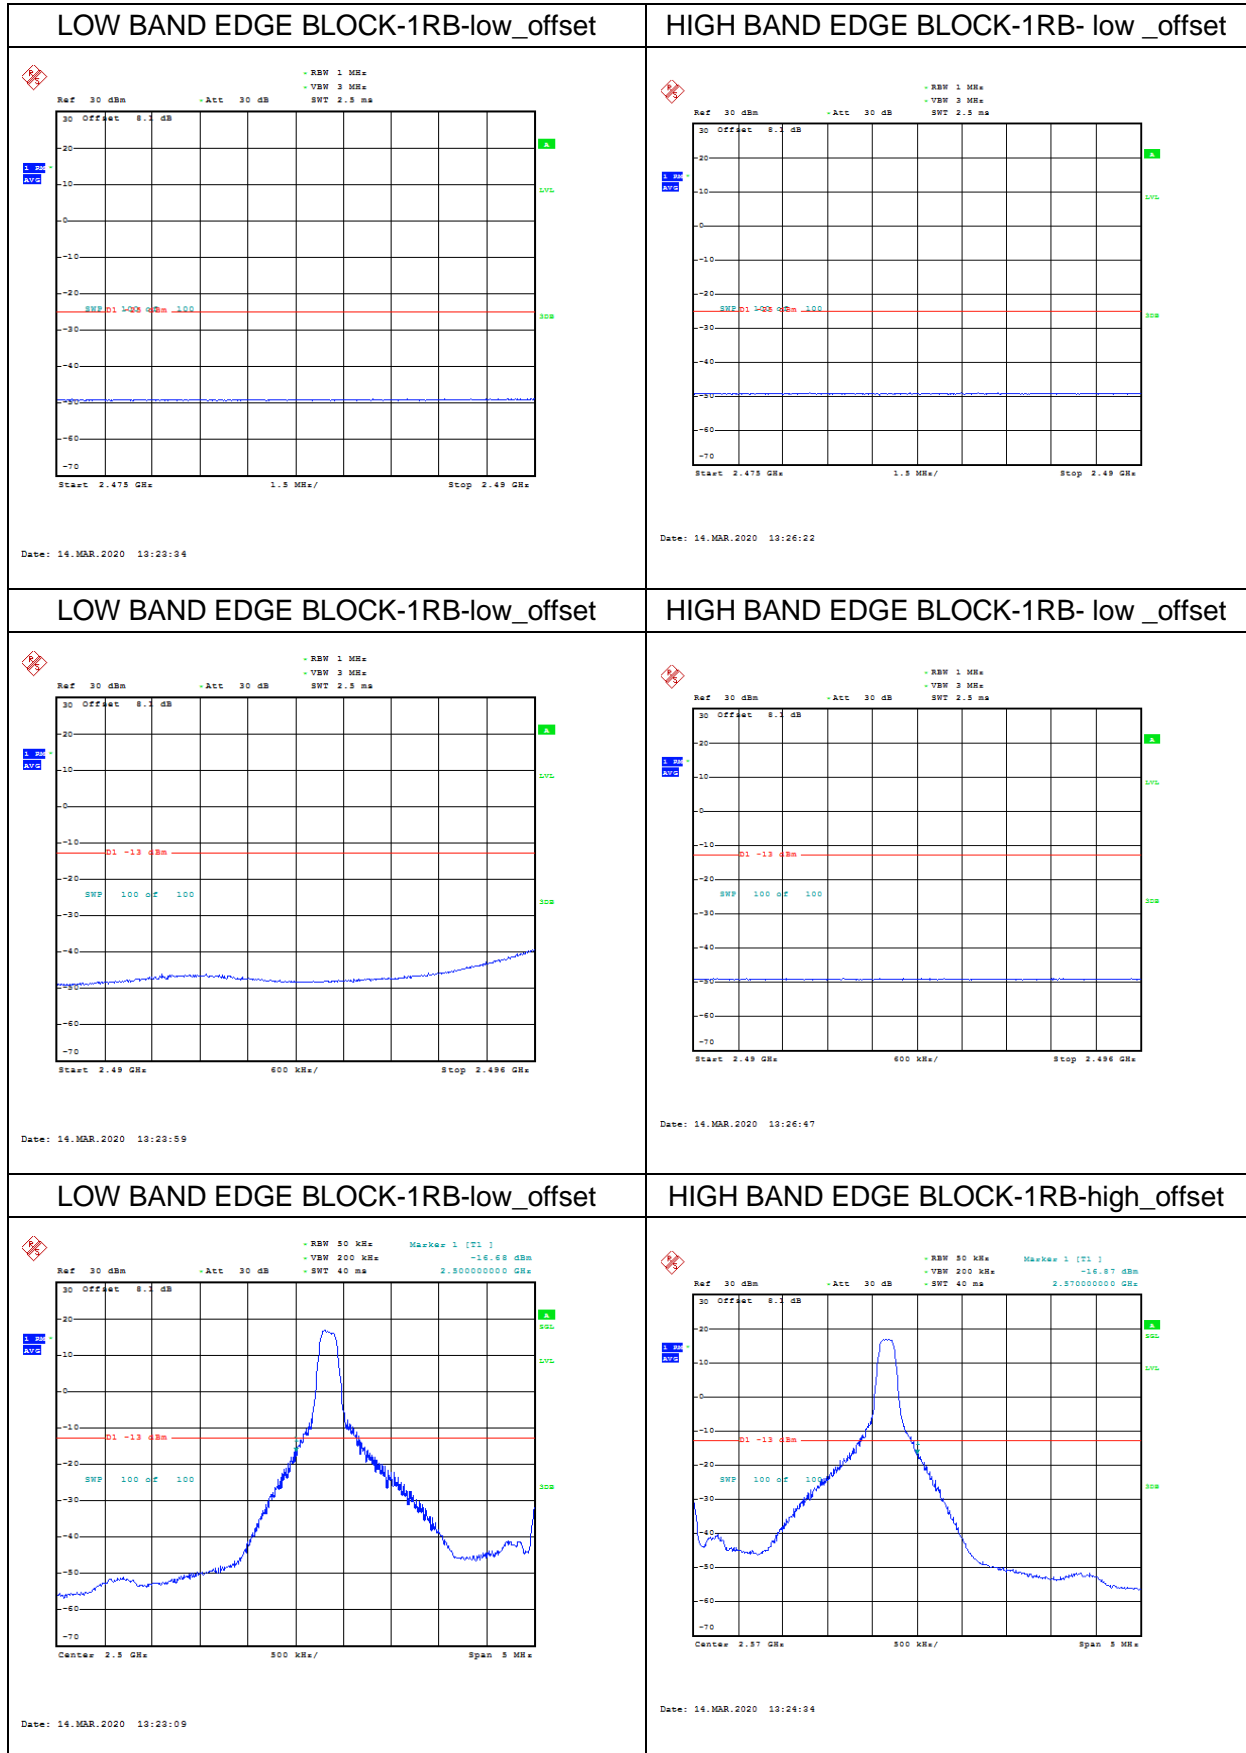


LOW BAND EDGE BLOCK-20MHz-100%RB

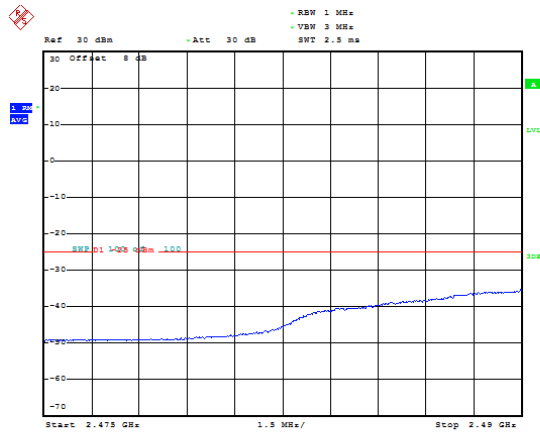


Date: 14.MAR.2020 19:31:21

HIGH BAND EDGE BLOCK-20MHz-100%RB

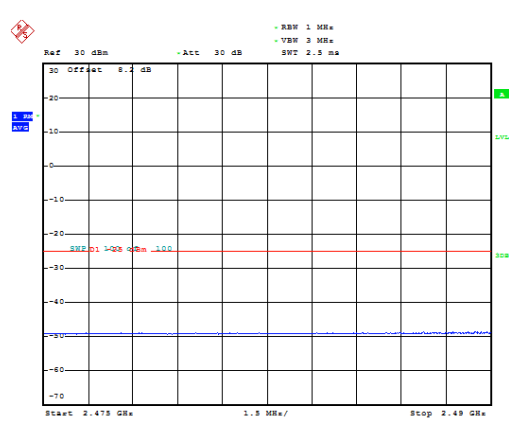


Date: 14.MAR.2020 19:34:26

LOW BAND EDGE BLOCK-20MHz-100%RB

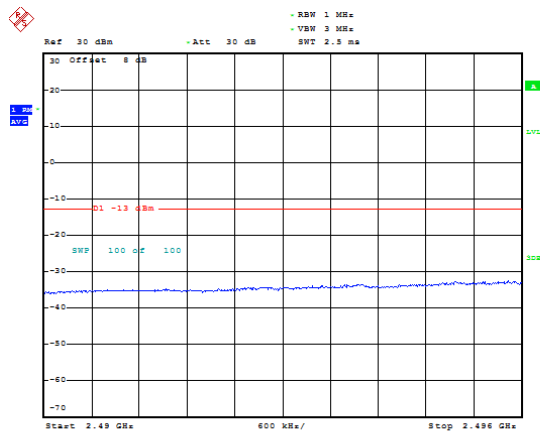


Date: 14.MAR.2020 19:31:46

HIGH BAND EDGE BLOCK-20MHz-100%RB

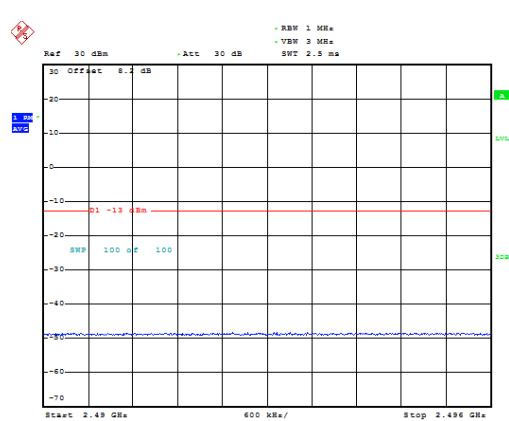


Date: 14.MAR.2020 19:34:51

LOW BAND EDGE BLOCK-20MHz-100%RB

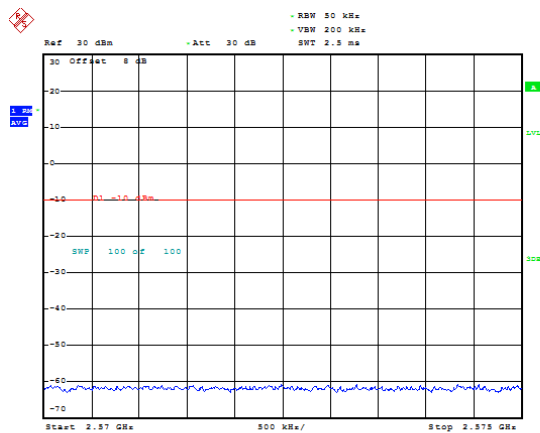


Date: 14.MAR.2020 19:32:11

HIGH BAND EDGE BLOCK-20MHz-100%RB

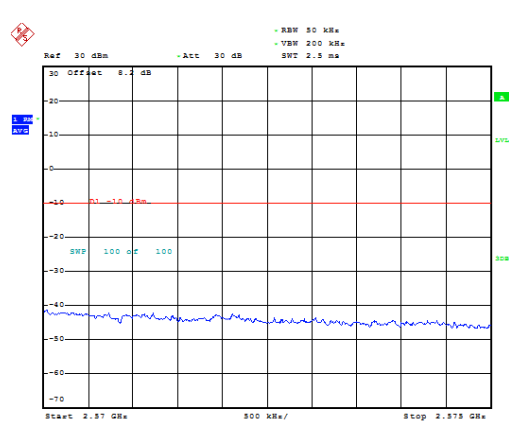


Date: 14.MAR.2020 19:35:16

LOW BAND EDGE BLOCK-20MHz-100%RB

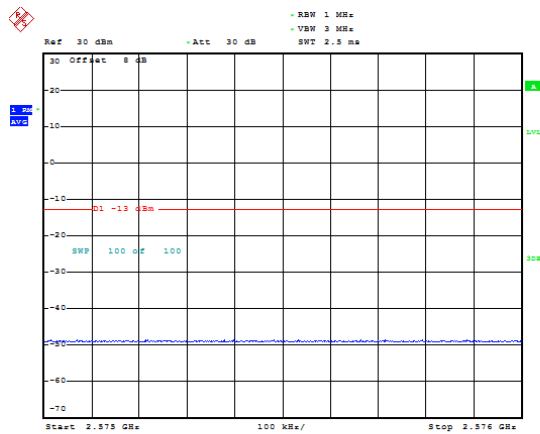


Date: 14.MAR.2020 19:32:56

HIGH BAND EDGE BLOCK-20MHz-100%RB

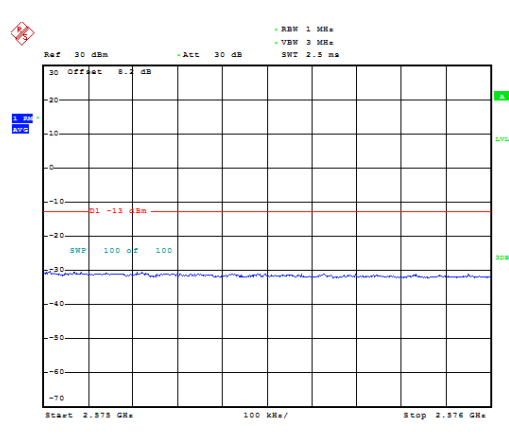


Date: 14.MAR.2020 19:35:41

LOW BAND EDGE BLOCK-20MHz-100%RB

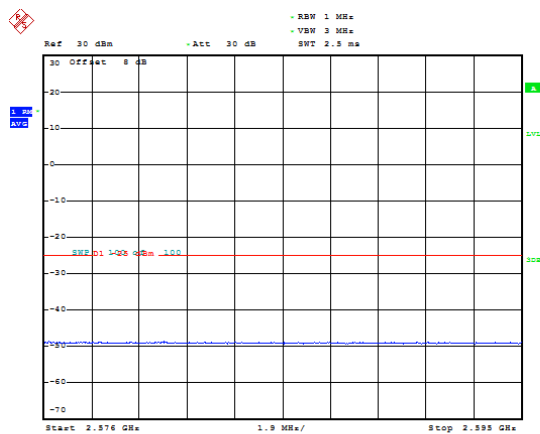


Date: 14.MAR.2020 19:39:01

HIGH BAND EDGE BLOCK-20MHz-100%RB

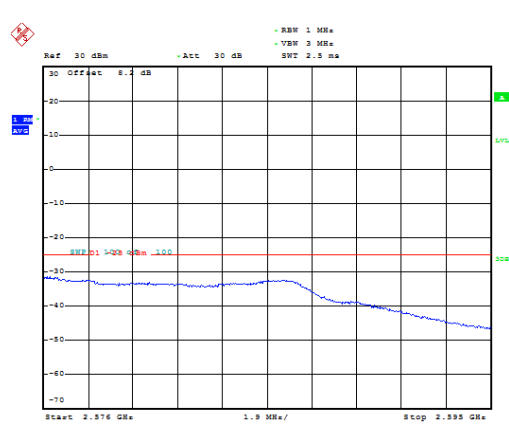


Date: 14.MAR.2020 19:36:06

LOW BAND EDGE BLOCK-20MHz-100%RB

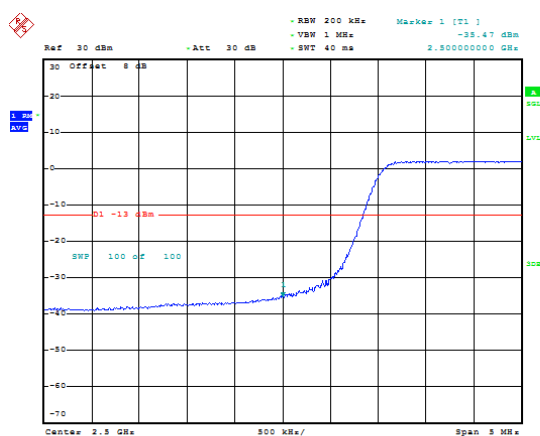

Date: 14.MAR.2020 19:30:57

HIGH BAND EDGE BLOCK-20MHz-100%RB

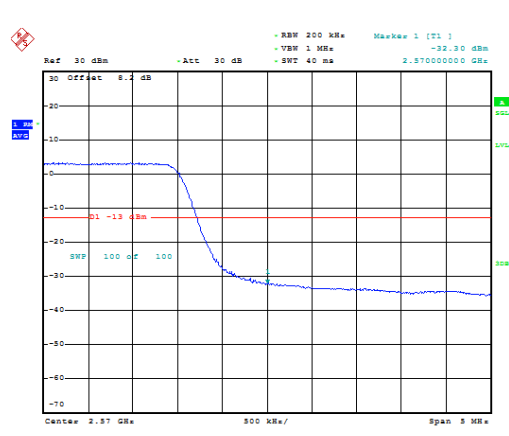

Date: 14.MAR.2020 19:34:01

ANNEX A.7. CONDUCTED SPURIOUS EMISSION

Reference

FCC: CFR Part 24.238(a), 27.53(g),27.53(h), 27.53(m)

A.7.1 Measurement Method

The following steps outline the procedure used to measure the conducted emissions from the EUT.

1. Determine frequency range for measurements: From CFR 2.1057 the spectrum should be investigated from the lowest radio frequency generated in the equipment up to at least the 10th harmonic of the carrier frequency. For the mobile station equipment tested, this equates to a frequency range of 13 MHz to 9 GHz, data taken from 10 MHz to 25 GHz.
2. Determine EUT transmit frequencies: below outlines the band edge frequencies pertinent to conducted emissions testing.
3. The number of sweep points of spectrum analyzer is set to 30001 which is greater than span/RBW.

A. 7.2 Measurement Limit


Part 24.238(a), 27.53(g),27.53(h), 27.53(m) specify that the power of any emission outside of the authorized operating frequency ranges must be attenuated below the transmitting power (P) by a factor of at least $43 + 10 \log(P)$ dB.

The specification that emissions shall be attenuated below the transmitter power (P) by at least $43 + 10 \log (P)$ dB, translates in the relevant power range (1 to 0.001 W) to -13 dBm. At 1 W the specified minimum attenuation becomes 43 dB and relative to a 30 dBm (1 W) carrier becomes a limit of -13 dBm. At 0.001 W (0 dBm) the minimum attenuation is 13 dB, which again yields a limit of -13 dBm. In this way a translation of the specification from relative to absolute terms is carried out.

Part 27.53(m)(4) specifies for mobile digital stations, the attenuation factor shall be not less than $40 + 10 \log (P)$ dB on all frequencies between the channel edge and 5 megahertz from the channel edge, $43 + 10 \log (P)$ dB on all frequencies between 5 megahertz and X megahertz from the channel edge, and $55 + 10 \log (P)$ dB on all frequencies more than X megahertz from the channel edge, where X is the greater of 6 megahertz or the actual emission bandwidth as defined in paragraph (m)(6) of this section. In addition, the attenuation factor shall not be less than $43 + 10 \log (P)$ dB on all frequencies between 2490.5 MHz and 2496 MHz and $55 + 10 \log (P)$ dB at or below 2490.5 MHz. Mobile Satellite Service licensees operating on frequencies below 2495 MHz may also submit a documented interference complaint against BRS licensees operating on channel BRS Channel 1 on the same terms and conditions as adjacent channel BRS or EBS licensees.

A. 7.3 Measurement result

Only worst case result is given below

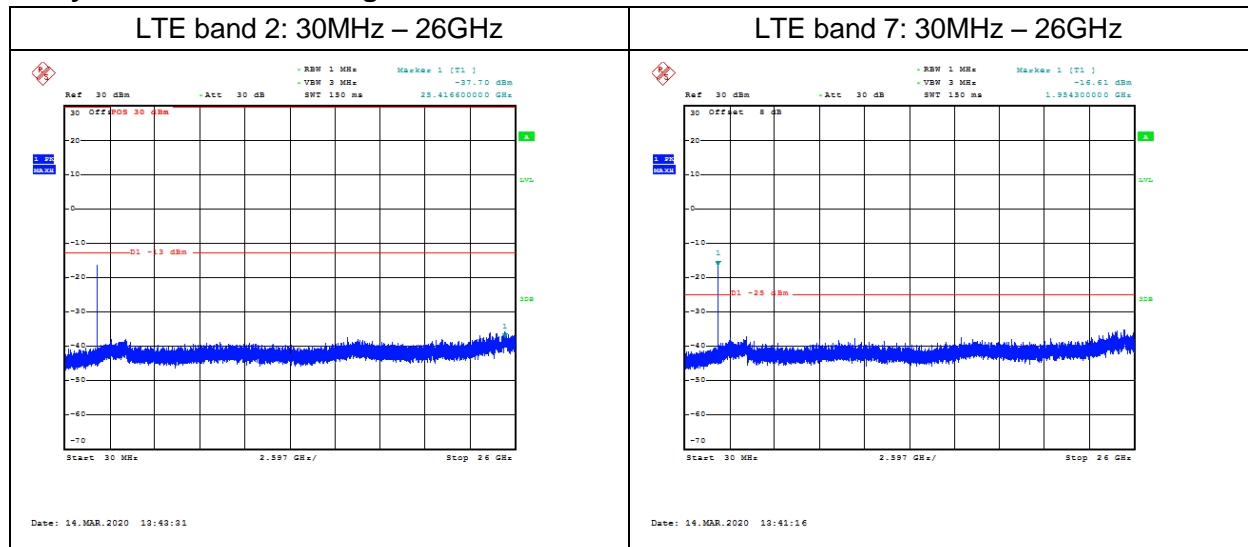

ANNEX A.8. PEAK-TO-AVERAGE POWER RATIO

Reference

FCC: CFR Part 24.232 (d), 27.50(a)

The peak-to-average power ratio (PAPR) of the transmitter output power must not exceed 13 dB. The PAPR measurements should be made using either an instrument with complementary cumulative distribution function (CCDF) capabilities to determine that PAPR will not exceed 13 dB for more than 0.1 percent of the time or other Commission approved procedure. The measurement must be performed using a signal corresponding to the highest PAPR expected during periods of continuous transmission.

According to KDB 971168 5.7:

- Refer to instrument's analyzer instruction manual for details on how to use the power statistics/CCDF function;
- Set resolution/measurement bandwidth \geq signal's occupied bandwidth;
- Set the number of counts to a value that stabilizes the measured CCDF curve;
- Set the measurement interval to 1 ms
- Record the maximum PAPR level associated with a probability of 0.1%

A.8.1 Measurement limit

Not exceed 13 dB

A.8.2 Measurement results

LTE band 2, 20MHz

Frequency(MHz)	PAPR(dB)	
1880.0	QPSK	16QAM
	4.94	6.28

LTE band 7, 20MHz

Frequency(MHz)	PAPR(dB)	
2535.0	QPSK	16QAM
	5.00	6.38

ANNEX B. Deviations from Prescribed Test Methods

No deviation from Prescribed Test Methods.

ANNEX C. Detailed Test Results**ANNEX C.1. Main Terms**

Verdict	Verdict of each test cases.
Test cases	Test cases identification number and description in ETSI EN 300 328 test specification and ETSI specification.

ANNEX C.2. Terms used in Condition column

Tnom	Normal temperature
Tmin	Low temperature
Tmax	High temperature
Vnom	Normal voltage

ANNEX C.3. Terms used in Verdict column

P	Pass,the EUT complies with the essential requirements in the standard.
NM	Not measure, the test was not measured by ECIT.
NA	Not applicable, the test was not applicable.
F	Fail, the EUT does not comply with the essential requirements in the standard.

ANNEX C.4. Terms used in Note column

EUT ID	EUT ID (e.g N01, N02.....) is used to identify the EUT tested used for each test cases as specified in section 3 of this test report.
Lab Code	Lab code is used to identify the subcontracted lab if this test cases is performed in the subcontracted lab.

Subcontracted test lab code: N/A

ANNEX D. Accreditation Certificate



*****END OF REPORT*****