

Test Report

FCC ID: LDKBRB4K1779
AIR-AP4800-B-K9

IC: 2461N-BRB4K1779
AIR-AP4800-A-K9

Bluetooth Low Energy (BLE)

2400-2483.5 MHz

Against the following Specifications:

CFR47 Part 15.247
RSS-247
RSS-Gen
LP0002



Cisco Systems

170 West Tasman Drive
San Jose, CA 95134

Author: Jose Aguirre Tested By: Jose Aguirre	Approved By: Gerard Thorpe Title: Manager, Engineering Revision: 1

This report replaces any previously entered test report under EDCS – 12749690. This test report has been electronically authorized and archived using the CISCO Engineering Document Control system.

This test report has been electronically authorized and archived using the CISCO Engineering Document Control system.

SECTION 1: OVERVIEW	3
SECTION 2: ASSESSMENT INFORMATION	4
2.1 GENERAL.....	4
2.2 DATE OF TESTING.....	6
2.3 REPORT ISSUE DATE.....	6
2.4 TESTING FACILITIES.....	6
2.5 EQUIPMENT ASSESSED (EUT).....	6
2.6 EUT DESCRIPTION.....	7
SECTION 3: RESULT SUMMARY	8
3.1 RESULTS SUMMARY TABLE.....	8
SECTION 4: SAMPLE DETAILS	10
4.1 SAMPLE DETAILS.....	10
4.2 SYSTEM DETAILS.....	10
4.3 MODE OF OPERATION DETAILS.....	10
APPENDIX A: EMISSION TEST RESULTS	11
CONDUCTED TEST SETUP DIAGRAM.....	11
TARGET MAXIMUM CHANNEL POWER.....	11
A.1 6DB BANDWIDTH.....	12
A.2 99% AND 26DB BANDWIDTH.....	15
A.3 MAXIMUM CONDUCTED OUTPUT POWER.....	18
A.4 POWER SPECTRAL DENSITY.....	21
A.5 CONDUCTED SPURIOUS EMISSIONS.....	24
A.6 CONDUCTED BANDEDGE.....	31
APPENDIX B: EMISSION TEST RESULTS	40
RADIATED EMISSION SETUP DIAGRAM-BELOW 1G.....	40
B.1 RADIATED SPURIOUS EMISSIONS.....	41
B.2 RECEIVER SPURIOUS EMISSIONS.....	48
B.3 RADIATED EMISSIONS 30MHZ TO 1GHZ.....	51
B.4 AC CONDUCTED EMISSIONS.....	54
APPENDIX C: LIST OF TEST EQUIPMENT USED TO PERFORM THE TEST	57
APPENDIX E: ABBREVIATION KEY AND DEFINITIONS	60



Section 1: Overview

The samples were assessed against the tests under the requirements of the following specifications:

Emission
CFR47 Part 15.247 RSS247 Issue 2: Feb 2017 RSS-Gen Issue 4 Amendment 1: Mar 15, 2018

Measurements were made in accordance with

- ANSI C63.10:2013
- FCC KDB 662911 D01 v02r01
- KDB 558074 DO1: DTS measurement guidance v04 (May 2, 2017)

Section 2: Assessment Information

2.1 General

This report contains an assessment of an apparatus against Electromagnetic Compatibility Standards based upon tests carried out on the samples submitted. The testing was performed by and for the use of Cisco systems Inc:

With regard to this assessment, the following points should be noted:

- a) The results contained in this report relate only to the items tested and were obtained in the period between the date of the initial assessment and the date of issue of the report. Manufactured products will not necessarily give identical results due to production and measurement tolerances.
- b) The apparatus was set up and exercised using the configuration and modes of operation defined in this report only.
- c) Where relevant, the apparatus was only assessed using the susceptibility criteria defined in this report and the Test Assessment Plan (TAP).
- d) All testing was performed under the following environmental conditions:

Temperature	15°C to 35°C (54°F to 95°F)
Atmospheric Pressure	860mbar to 1060mbar (25.4" to 31.3")
Humidity	10% to 75*%

*[Where applicable] For ESD testing the humidity limits used were 30% to 60% and for EFT/B tests the humidity limits used were 25% to 75%.
- e) All AC testing was performed at one or more of the following supply voltages:
110V 60 Hz (+/-20%)

Units of Measurement

The units of measurements defined in the appendices are reported in specific terms, which are test dependent. Where radiated measurements are concerned these are defined at a particular distance. Basic voltage measurements are defined in units of [dBuV]

As an example, the basic calculation for all measurements is as follows:

$$\text{Emission level [dBuV]} = \text{Indicated voltage level [dBuV]} + \text{Cable Loss [dB]} + \text{Other correction factors [dB]}$$

The combinations of correction factors are dependent upon the exact test configurations [see test equipment lists for further details] and may include:-

Antenna Factors, Pre Amplifier Gain, LISN Loss, Pulse Limiter Loss and Filter Insertion Loss..

Note: to convert the results from dBuV/m to uV/m use the following formula:-

$$\text{Level in uV/m} = \text{Common Antilogarithm} [(X \text{ dBuV/m})/20] = Y \text{ uV/m}$$

Measurement Uncertainty Values

voltage and power measurements	± 2 dB
conducted EIRP measurements	± 1.4 dB
radiated measurements	± 3.2 dB
frequency measurements	± 2.4 10 ⁻⁷
temperature measurements	± 0.54°
humidity measurements	± 2.3%
DC and low frequency measurements	± 2.5%

Where relevant measurement uncertainty levels have been estimated for tests performed on the apparatus. This uncertainty represents an expanded uncertainty expressed at approximately the 95% confidence level using a coverage factor of k=2.

Radiated emissions (expanded uncertainty, confidence interval 95%)

30 MHz - 300 MHz	+/- 3.8 dB
300 MHz - 1000 MHz	+/- 4.3 dB
1 GHz - 10 GHz	+/- 4.0 dB
10 GHz - 18GHz	+/- 8.2 dB
18GHz - 26.5GHz	+/- 4.1 dB
26.5GHz - 40GHz	+/- 3.9 dB

Conducted emissions (expanded uncertainty, confidence interval 95%)

30 MHz – 40GHz	+/- 0.38 dB
----------------	-------------

A product is considered to comply with a requirement if the nominal measured value is below the limit line. The product is considered to not be in compliance in case the nominal measured value is above the limit line.

This report must not be reproduced except in full, without written approval of Cisco Systems.

2.2 Date of testing

08-Jan-18 - 28-Feb-18

2.3 Report Issue Date

22-Mar-18

Cisco uses an electronic system to issue, store and control the revision of test reports. This system is called the Engineering Document Control System 12749690. The actual report issue date is embedded into the original file on EDCS. Any copies of this report, either electronic or paper, that are not on EDCS must be considered uncontrolled.

2.4 Testing facilities

This assessment was performed by:

Testing Laboratory

Cisco Systems, Inc.,
125 West Tasman Drive
San Jose, CA 95134, USA

Registration Numbers for Industry Canada

Cisco System Site	Address	Site Identifier
Building P, 10m Chamber	125 West Tasman Dr San Jose, CA 95134	Company #: 2461N-2
Building P, 5m Chamber	125 West Tasman Dr San Jose, CA 95134	Company #: 2461N-1
Building I, 5m Chamber	285 W. Tasman Drive San Jose, California 95134	Company #: 2461M-1

Test Engineers

Jose Aguirre

2.5 Equipment Assessed (EUT)

AIR-AP4800-A-K9

2.6 EUT Description

The Cisco Aironet 802.11ac Dual Band Access Point with Bluetooth LE supports the following modes of operation. The modes are further defined in the radio Theory of Operation. The modes included in this report represent the worst case data for all modes. Data is recorded at the lowest supported data rate for each mode. This report covers operation on channel 1-11.

GFSK 1Mbps

The following antennas are supported by this product series.
The data included in this report represent the worst case data for all antennas.

Radio	Frequency	HOST PID Part Number - Please align Host(s) with antenna(s)	ANTENNA PID Part Number	Antenna Type	Antenna Gain (includes antenna cable loss)
2.4 GHz BLE	2.4 GHz	TX/RX: Internal	BLE	Single port, single band omni	2.5 dBi

Section 3: Result Summary

3.1 Results Summary Table

Conducted emissions

Basic Standard	Technical Requirements / Details	Result
FCC 15.247 RSS-247 LP0002:3.10.1(6.2.1)	6dB Bandwidth: Systems using digital modulation techniques may operate in the 2400-2483.5MHz band. The minimum 6dB bandwidth shall be at least 500 kHz.	Pass
FCC 15.247 RSS-247	99% & 26 dB Bandwidth: The 99% occupied bandwidth is the frequency bandwidth such that, below its lower and above its upper frequency limits, the mean powers are each equal to 0.5% of the total mean power of the given emission. There is no limit for 99% OBW. The 26 dB emission is the width of the emission that is constrained by the frequencies associated with the two outermost amplitude points (upper and lower frequencies) that are attenuated by 26 dB relative to the maximum level measured in the fundamental emission.	Pass
FCC 15.247 RSS-247 LP0002:3.10.1(2.3)	Output Power: 15.247 The maximum conducted output power of the intentional radiator for systems using digital modulation in the 2400-2483.5 MHz band shall not exceed 1 Watt (30dBm). If transmitting antennas of directional gain greater than 6 dBi are used, the maximum conducted output power shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi. RSS-247 For DTSs employing digital modulation techniques operating in the band 2400-2483.5 MHz, the maximum peak conducted output power shall not exceed 1W. Except as provided in Section 5.4(5), the e.i.r.p. shall not exceed 4 W.	Pass
FCC 15.247 RSS-247 LP0002:3.10.1(6.2.2)	Power Spectral Density: For digitally modulated systems, the power spectral density conducted from the intentional radiator to the antenna shall not be greater than 8 dBm in any 3 kHz band during any time interval of continuous transmission.	Pass
FCC 15.247 RSS-247 LP0002:3.10.1(5)/2.8	Conducted Spurious Emissions / Band-Edge: In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided the transmitter demonstrates compliance with the peak conducted power limits. If the transmitter complies with the conducted power limits based on the use of RMS averaging over a time interval, as permitted under paragraph (b)(3) of this section, the attenuation required under this paragraph shall be 30 dB instead of 20 dB. Attenuation below the general limits specified in §15.209(a) is not required	Pass
FCC 15.247 RSS-247 FCC 15.205 RSS-Gen	Restricted band: Unwanted emissions falling within the restricted bands, as defined in FCC 15.205 (a) and RSS-Gen 8.10 must also comply with the radiated emission limits specified in FCC 15.209 (a) and RSS-Gen 8.9.	Pass

Radiated Emissions (General requirements)

Basic Standard	Technical Requirements / Details	Result
FCC 15.209 RSS-Gen LP0002	<p>TX Spurious Emissions: Except as provided elsewhere in this subpart, the emissions from an intentional radiator shall not exceed the field strength levels specified in the filed strength limits table in this section. Unwanted emissions falling within the restricted bands, as defined in FCC 15.205 (a) and RSS-Gen 8.10 must also comply with the radiated emission limits specified in FCC 15.209 (a) and RSS-Gen 8.9.</p>	Pass
RSS-Gen LP0002	<p>RX Spurious Emissions: RSS-Gen 8.9 Except when the requirements applicable to a given device state otherwise, emissions from licence-exempt transmitters shall comply with the field strength limits shown in Table 4 and Table 5 below. Additionally, the level of any transmitter emission shall not exceed the level of the transmitter's fundamental emission. RSS-Gen 8.10 Unwanted emissions that fall into restricted bands of Table 6 shall comply with the limits specified in RSS-Gen; and (c) Unwanted emissions that do not fall within the restricted frequency bands of Table 6 shall comply either with the limits specified in the applicable RSS or with those specified in this RSS-Gen.</p>	Pass
FCC 15.207 RSS-Gen LP0002	<p>AC conducted Emissions: Except when the requirements applicable to a given device state otherwise, for any radio apparatus equipped to operate from the public utility AC power supply, either directly or indirectly (such as with a battery charger), the radio frequency voltage of emissions conducted back onto the AC power lines in the frequency range of 0.15 MHz to 30 MHz shall not exceed the limits shown in the table in these sections. The more stringent limit applies at the frequency range boundaries.</p>	Pass

* MPE calculation is recorded in a separate report

Section 4: Sample Details

Note: Each sample was evaluated to ensure that its condition was suitable to be used as a test sample prior to the commencement of testing.

4.1 Sample Details

Sample No.	Equipment Details	Manufacturer	Hardware Rev.	Firmware Rev.	Software Rev.	Serial Number
S01	AIR-AP4800-A-K9	Cisco Systems	P2	9.1.8.1	8.7.1.48	FOC21291N04
S02*	AIR-PWR50 Pn: 341-100460-01	Delta	A0	NA	NA	DAB2016S1GQ

(*) S02 is support equipment Power supply for EUT S01

4.2 System Details

System #	Description	Samples
1	AIR-AP4800-A-K9	S01
2	AIR-PWR50 Pn: 341-100460-01	S02

4.3 Mode of Operation Details


Mode#	Description	Comments
1	Continuous Transmitting	Continuous Transmitting $\geq 98\%$ duty cycle

Measurements were made in accordance with

- ANSI C63.10:2013
- FCC KDB 662911 D01 v02r01
- KDB 558074 DO1: DTS measurement guidance v04 (May 2, 2017)

Appendix A: Emission Test Results

Conducted Test Setup Diagram

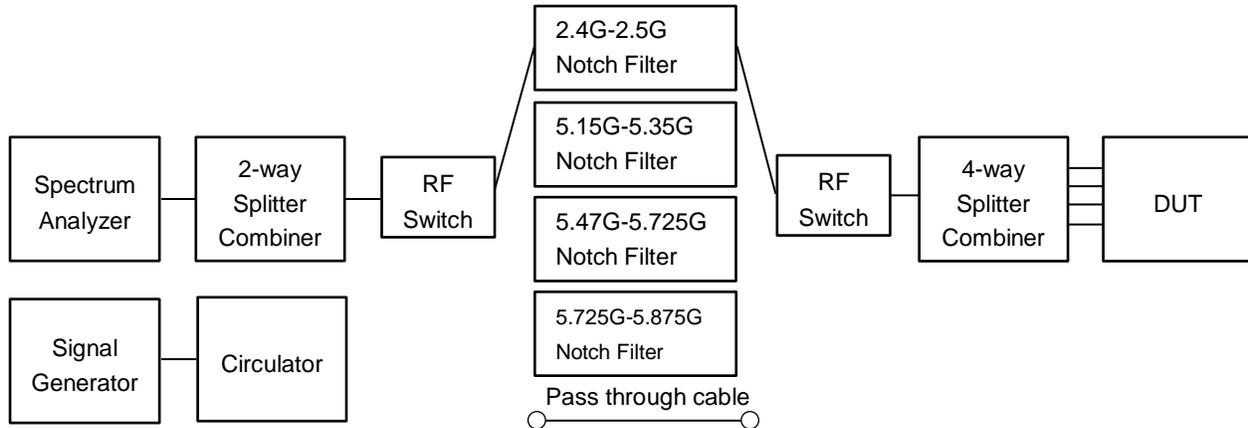

Target Maximum Channel Power

The following table details the maximum supported Total Channel Power for all operating modes.

Operating Mode	Maximum Channel Power (dBm EIRP)		
	Frequency (MHz)		
	2402	2426	2480
BLE GFSK, 1 Mbps	8	8	8

A.1 6dB Bandwidth

15.247 / RSS-247 / LP0002:3.10.1(6.2.1) Systems using digital modulation techniques may operate in the 2400-2483.5MHz band. The minimum 6dB bandwidth shall be at least 500 kHz.

Test Procedure

Ref. KDB 558074 D01 DTS Meas Guidance v03r05
ANSI C63.10: 2013

6 BW

Test Procedure

1. Set the radio in the continuous transmitting mode.
2. Allow the trace to stabilize.
3. Setting the x-dB bandwidth mode to -6dB within the measurement set up function.
4. Select the automatic OBW measurement function of an instrument to perform bandwidth measurement.
5. Capture graphs and record pertinent measurement data.

Ref. KDB 558074 D01 DTS Meas Guidance v03r05
ANSI C63.10: 2013 section 11.8.2 Option 2

6 BW

Test parameters

X dB BW = 6dB (using the OBW function of the spectrum analyzer)
Span = Large enough to capture the entire EBW
RBW = 100 KHz
VBW ≥ 3 x RBW
Sweep = Auto couple
Detector = Peak or where practical sample shall be used
Trace = Max. Hold

System Number	Description	Samples	System under test	Support equipment
1	EUT	S01	<input checked="" type="checkbox"/>	<input type="checkbox"/>
	Support	S02	<input type="checkbox"/>	<input checked="" type="checkbox"/>

Tested By :

Jose Aguirre

Date of testing:

08-Jan-18 - 08-Jan-18


Test Result : PASS

See Appendix C for list of test equipment




Frequency (MHz)	Mode	Data Rate (Mbps)	6dB BW (MHz)	Limit (kHz)	Margin (MHz)
2402	GFSK, 1 Mbps	1	0.7	>500	0.2
2426	GFSK, 1 Mbps	1	0.7	>500	0.2
2480	GFSK, 1 Mbps	1	0.7	>500	0.2

6dB Bandwidth, 2402 MHz, GFSK, 1 Mbps

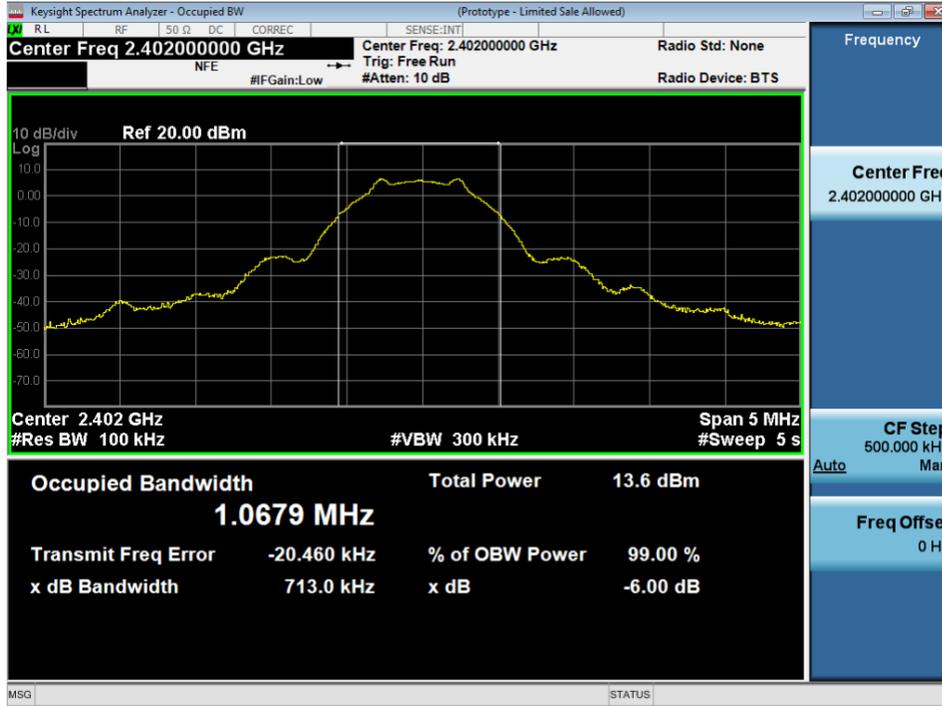



6dB Bandwidth, 2426 MHz, GFSK, 1 Mbps

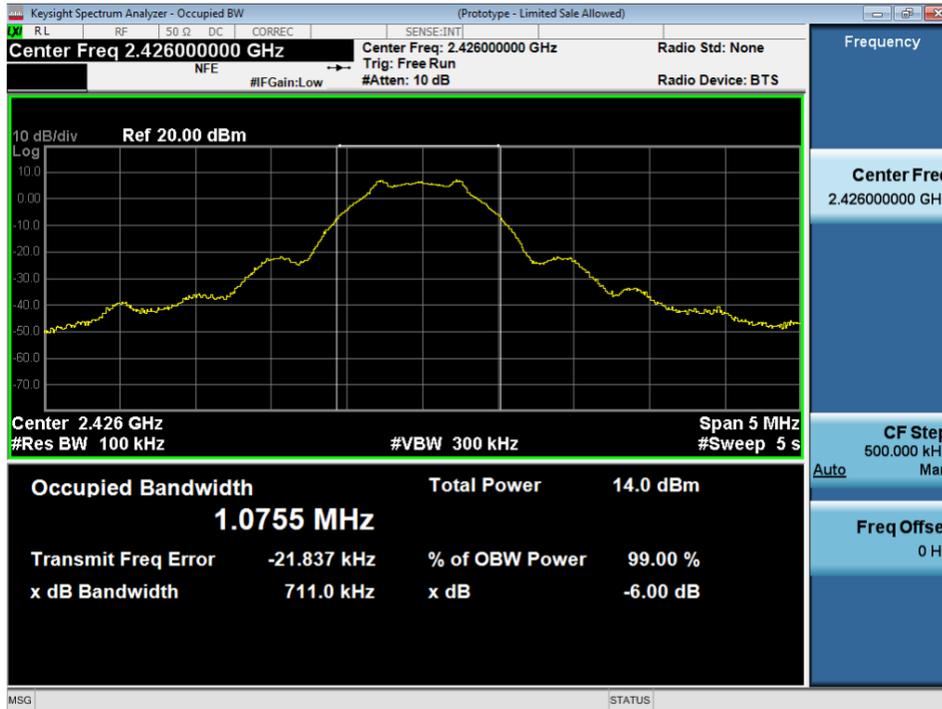

6dB Bandwidth, 2480 MHz, GFSK, 1 Mbps



A.2 99% and 26dB Bandwidth

The 99% occupied bandwidth is the frequency bandwidth such that, below its lower and above its upper frequency limits, the mean powers are each equal to 0.5% of the total mean power of the given emission. There is no limit for 99% OBW.

The 26 dB emission is the width of the emission that is constrained by the frequencies associated with the two outermost amplitude points (upper and lower frequencies) that are attenuated by 26 dB relative to the maximum level measured in the fundamental emission.

Test Procedure

Ref. ANSI C63.10: 2013

26 BW & 99% BW

Test Procedure

1. Set the radio in the continuous transmitting mode.
2. Allow the trace to stabilize.
3. Setting the x-dB bandwidth mode to -26dB & OBW to 99% within the measurement set up function.
4. Select the automatic OBW measurement function of an instrument to perform bandwidth measurement.
5. Capture graphs and record pertinent measurement data.

Ref. ANSI C63.10: 2013 section 6.9.3

26 BW & 99% BW

Test parameters

X dB BW = -26dB (using the OBW function of the spectrum analyzer)

OBW = 99%

Span = 1.5 to 5 times the OBW

RBW = 1% to 5% of the OBW

VBW \geq 3 x RBW

Sweep = Auto couple

Detector = Peak or where practical sample shall be used

Trace = Max. Hold

System Number	Description	Samples	System under test	Support equipment
1	EUT	S01	<input checked="" type="checkbox"/>	<input type="checkbox"/>
	Support	S02	<input type="checkbox"/>	<input checked="" type="checkbox"/>

Tested By :

Jose Aguirre

Date of testing:

08-Jan-18 - 08-Jan-18

Test Result : PASS

See Appendix C for list of test equipment



Frequency (MHz)	Mode	Data Rate (Mbps)	26dB BW (MHz)	99% BW (MHz)
2402	GFSK, 1 Mbps	1	1.3	1.047
2426	GFSK, 1 Mbps	1	1.3	1.059
2480	GFSK, 1 Mbps	1	1.3	1.059

26dB / 99% Bandwidth, 2402 MHz, GFSK, 1 Mbps



26dB / 99% Bandwidth, 2426 MHz, GFSK, 1 Mbps





26dB / 99% Bandwidth, 2480 MHz, GFSK, 1 Mbps



A.3 Maximum Conducted Output Power

15.247 / RSS-247 section 5.4 / LP0002:3.10.1(2.3) The maximum conducted output power of the intentional radiator for systems using digital modulation in the 2400-2483.5 MHz band shall not exceed 1 Watt (30dBm). If transmitting antennas of directional gain greater than 6 dBi are used, the maximum conducted output power shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

As an alternative to a peak power measurement, compliance can be based on a measurement of the maximum conducted output power. The maximum conducted output power is the total transmit power delivered to all antennas and antenna elements, averaged across all symbols in the signaling alphabet when the transmitter is operating at its maximum power control level. Power must be summed across all antennas and antenna elements. The average must not include any time intervals during which the transmitter is off or transmitting at a reduced power level. If multiple modes of operation are implemented, the maximum conducted output power is the highest total transmit power occurring in any mode.

The maximum supported antenna gain is 2.5dBi. The peak correlated gain for each mode is listed in the table below.

Test Procedure

Ref. KDB 558074 D01 DTS Meas Guidance v03r05
ANSI C63.10: 2013

Maximum Conducted Output power Test Procedure
<ol style="list-style-type: none"> 1. Set the radio in the continuous transmitting mode at full power 2. Compute power by integrating the spectrum across the EBW (or alternatively entire 99% OBW) of the signal using the instrument's band power measurement function. The integration shall be performed using the spectrum analyzer band-power measurement function with band limits set equal to the EBW or the OBW band edges. 3. Capture graphs and record pertinent measurement data.

Ref. 558074 D01 DTS Meas Guidance v03r05 section 9.2 Method AVGSA-1
ANSI C63.10: 2013 section 11.9.2 Method AVGSA-1

Maximum Conducted Output power Test parameters
Span = >1.5 times the OBW RBW = 3MHz VBW ≥ 3 x RBW Sweep = Auto couple Detector = Peak Allow trace to fully stabilize Use peak marker function to determine the Peak amplitude level

The "measure-and-sum technique" is used for measuring in-band transmit power of a device. In the measure-and-sum approach, the conducted emission level is measured at each antenna port. The measured results at the various antenna ports are then summed mathematically to determine the total emission level from the device. Summing is performed in linear power units. (See ANSI C63.10 section 14.3 for Guidance)

System Number	Description	Samples	System under test	Support equipment
1	EUT	S01	<input checked="" type="checkbox"/>	<input type="checkbox"/>
	Support	S02	<input type="checkbox"/>	<input checked="" type="checkbox"/>

Tested By : Jose Aguirre	Date of testing: 08-Jan-18 - 08-Jan-18
Test Result : PASS	

See Appendix C for list of test equipment




Frequency (MHz)	Mode	Tx Paths	Correlated Antenna Gain (dBi)	Tx 1 Max Power (dBm)	Total Tx Channel Power (dBm)	Limit (dBm) EIRP	Margin (dB)
2402	GFSK, 1 Mbps	1	2.5	6.2	8.7	36	27.3
2426	GFSK, 1 Mbps	1	2.5	6.2	8.7	36	27.3
2480	GFSK, 1 Mbps	1	2.5	6.1	8.6	36	27.4


Maximum Transmit Power, 2402 MHz, GFSK, 1 Mbps



Maximum Transmit Power, 2426 MHz, GFSK, 1 Mbps

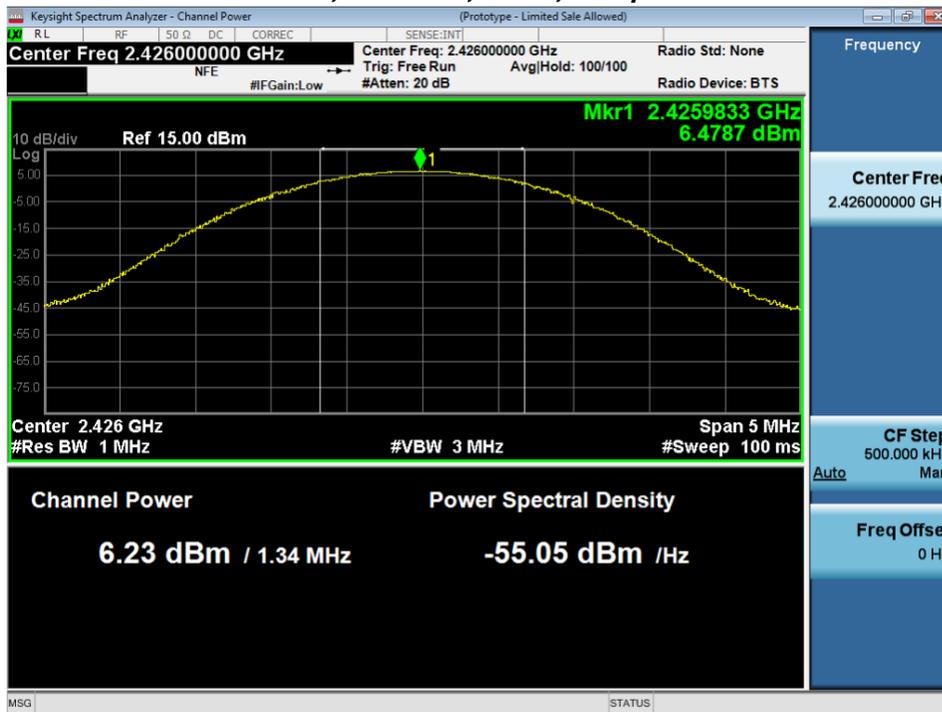

Maximum Transmit Power, 2480 MHz, GFSK, 1 Mbps

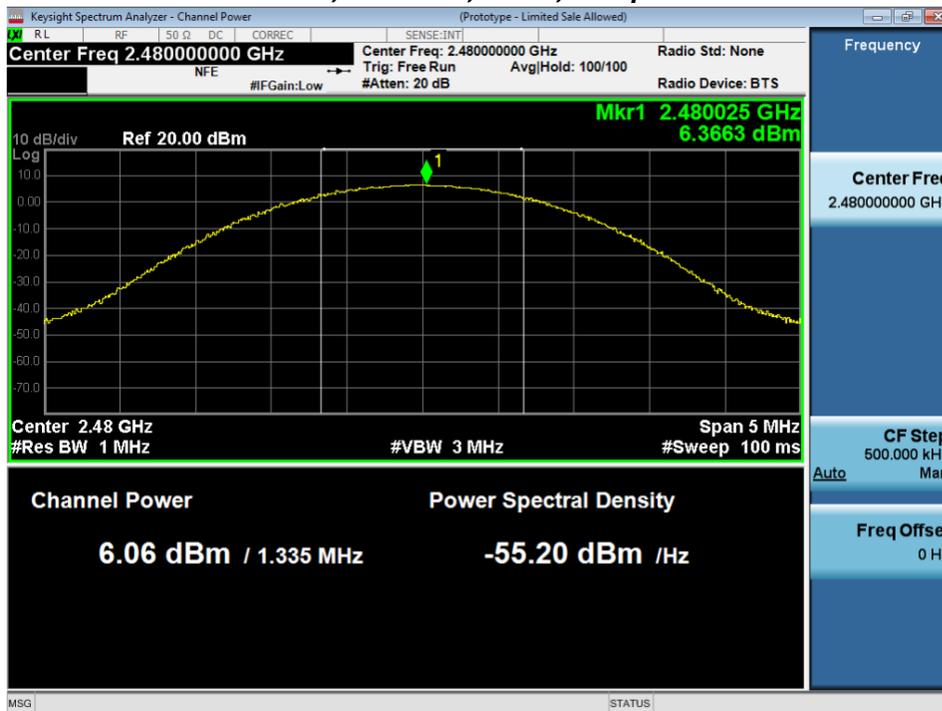

A.4 Power Spectral Density

15.247 / RSS-247 / LP0002:3.10.1(6.2.2) For digitally modulated systems, the peak power spectral density conducted from the intentional radiator to the antenna shall not be greater than 8 dBm in any 3 kHz band during any time interval of continuous transmission.

Test Procedure

Ref. KDB 558074 D01 DTS Meas Guidance v03r05
ANSI C63.10: 2013

Power Spectral Density Test Procedure
1. Set the radio in the continuous transmitting mode at full power 2. Configure Spectrum analyzer as per test parameters below and Peak search marker 3. Capture graphs and record pertinent measurement data.

Ref. 558074 D01 DTS Meas Guidance v03r05 section 10.2 Peak PSD
ANSI C63.10: 2013 section 11.10.2 Peak PSD

Power Spectral Density Test parameters
Span = >1.5 times the OBW RBW = 3 kHz ≤ RBW ≤ 100 kHz. VBW ≥ 3 x RBW Sweep = Auto couple Detector = Peak Allow trace to fully stabilize Use peak marker function to determine the Peak amplitude level

The "Measure and add 10 log(N) dB technique", where N is the number of outputs, is used for measuring in-band Power Spectral Density. (See ANSI C63.10 section 14.3.2.3)

System Number	Description	Samples	System under test	Support equipment
1	EUT	S01	<input checked="" type="checkbox"/>	<input type="checkbox"/>
	Support	S02	<input type="checkbox"/>	<input checked="" type="checkbox"/>


Tested By : Jose Aguirre	Date of testing: 08-Jan-18 - 08-Jan-18
Test Result : PASS	

See Appendix C for list of test equipment




Frequency (MHz)	Mode	Data Rate (Mbps)	Antenna Gain dBi	PSD / Antenna (dBm/3kHz)	Total PSD (dBm/3kHz)	Limit (dBm/3kHz)	Margin (dB)
2402	GFSK, 1 Mbps	1	2.5	-3.0	-0.5	8.0	8.5
2426	GFSK, 1 Mbps	1	2.5	-3.5	-1.0	8.0	9.0
2480	GFSK, 1 Mbps	1	2.5	-3.0	-0.5	8.0	8.5

Power Spectral Density, 2402 MHz, GFSK, 1 Mbps

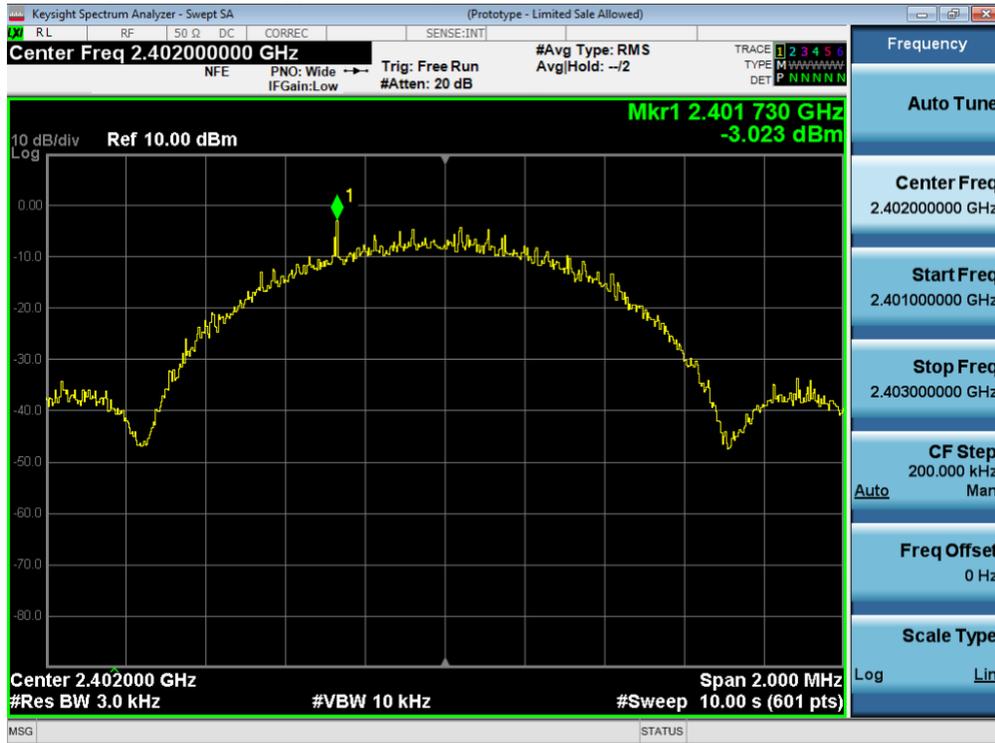

Power Spectral Density, 2426 MHz, GFSK, 1 Mbps

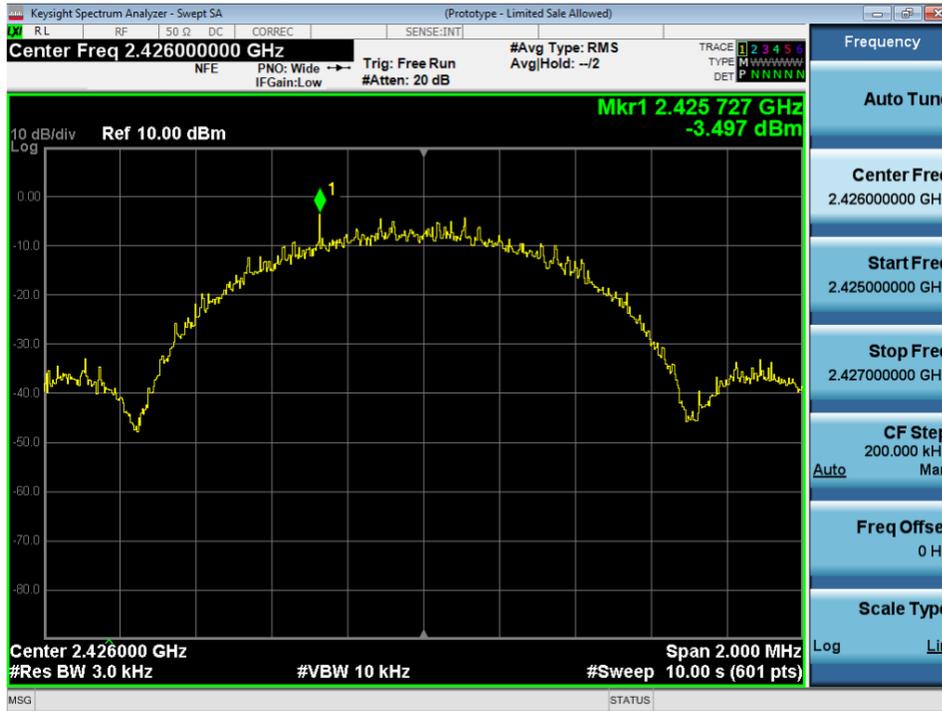

Power Spectral Density, 2480 MHz, GFSK, 1 Mbps



A.5 Conducted Spurious Emissions

15.205 / 15.209 / LP0002 - Radiated emissions which fall in the restricted bands, as defined in Section 15.205(a), must also comply with the radiated emission limits specified in Section 15.209(a) (see Section 15.205(c)).

RSS-Gen 8.9: Except when the requirements applicable to a given device state otherwise, emissions from licence-exempt transmitters shall comply with the field strength limits shown in Table 4 and Table 5 below. Additionally, the level of any transmitter emission shall not exceed the level of the transmitter's fundamental emission.

RSS-Gen 8.10 (b) Unwanted emissions that fall into restricted bands of Table 6 shall comply with the limits specified in RSS-Gen; and **(c)** Unwanted emissions that do not fall within the restricted frequency bands of Table 6 shall comply either with the limits specified in the applicable RSS or with those specified in this RSS-Gen.

Use formula below to substitute conducted measurements in place of radiated measurements

$$E[\text{dB}\mu\text{V}/\text{m}] = \text{EIRP}[\text{dBm}] - 20 \log(d[\text{meters}]) + 104.77, \text{ where } E = \text{field strength and } d = 3 \text{ meter}$$

- 1) Average Plot, Limit= -41.25 dBm eirp
- 2) Peak plot, Limit = -21.25 dBm eirp

Test Procedure

Ref. KDB 558074 D01 DTS Meas Guidance v03r05
ANSI C63.10: 2013

Conducted Spurious Emissions

Test Procedure

1. Connect the antenna port(s) to the spectrum analyzer input.
2. Place the radio in continuous transmit mode
3. Configure Spectrum analyzer as per test parameters below (be sure to enter all losses between the transmitter output and the spectrum analyzer).
4. Use the peak marker function to determine the maximum spurs amplitude level.
5. The "measure-and-sum technique" is used for measuring in-band transmit power of a device. In the measure-and-sum approach, the conducted emission level is measured at each antenna port. The measured results at the various antenna ports are then summed mathematically to determine the total emission level from the device. Summing is performed in linear power units. The worst case output is recorded. (see ANSI C63.10 2013 section 14.3.2.2)
6. Capture graphs and record pertinent measurement data.

Ref. 558074 D01 DTS Meas Guidance v03r05 section 11.1b, 11.2-3, 12.2.4 & 12.2.5.3
ANSI C63.10: 2013 section 11.10.3 & 11.12.2.4 & 11.12.2.5.3

Conducted Spurious Emissions

Test parameters

RBW = 1 MHz
VBW ≥ 3 x RBW for Peak, 1kHz for Average
Sweep = Auto couple
Detector = Peak
Trace = Max Hold.

KDB: 558074 D01 DTS Meas Guidance v03r05 section 12.2.2 © add the max antenna gain + ground reflection factor (4.7 dB for frequencies between 30 MHz and 1000 MHz, and 0 dB for frequencies > 1000 MHz).


System Number	Description	Samples	System under test	Support equipment
1	EUT	S01	<input checked="" type="checkbox"/>	<input type="checkbox"/>
	Support	S02	<input type="checkbox"/>	<input checked="" type="checkbox"/>

Tested By : Jose Aguirre	Date of testing: 08-Jan-18 - 08-Jan-18
Test Result : PASS	


See Appendix C for list of test equipment



Conducted Spurs Average, All Antennas

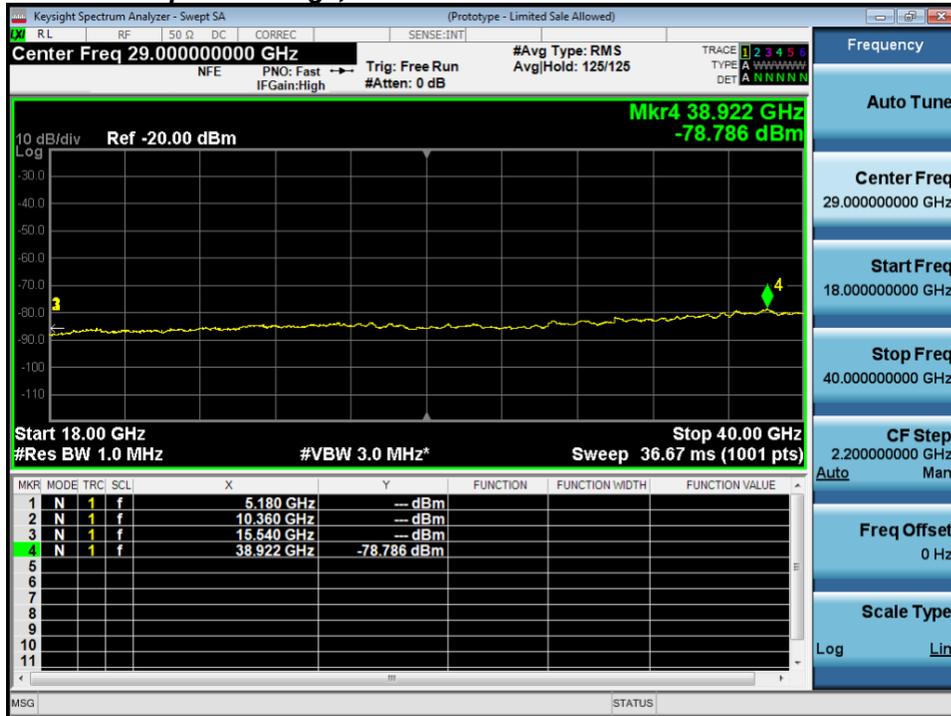

Conducted Spurs Peak, All Antennas

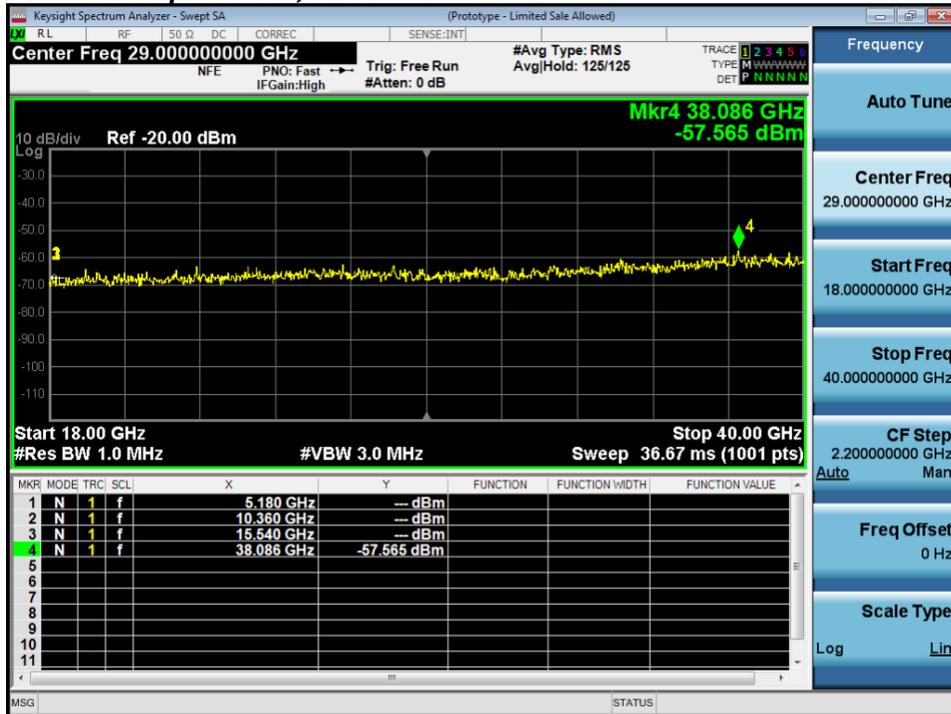


There are no emissions seen above 18GHz. The plots above are representative of all channels tested.



Average


Frequency (MHz)	Mode	Tx Paths	Correlated Antenna Gain (dBi)	Tx 1 Spur Power (dBm)	Total Conducted Spur (dBm)	Limit (dBm)	Margin (dB)
2402	GFSK, 1 Mbps	1	2.5	-65	-62.5	-41.25	21.25
2426	GFSK, 1 Mbps	1	2.5	-64	-61.5	-41.25	20.25
2480	GFSK, 1 Mbps	1	2.5	-64.4	-61.9	-41.25	20.65

Conducted Spurs Average, 2402 MHz, GFSK, 1 Mbps

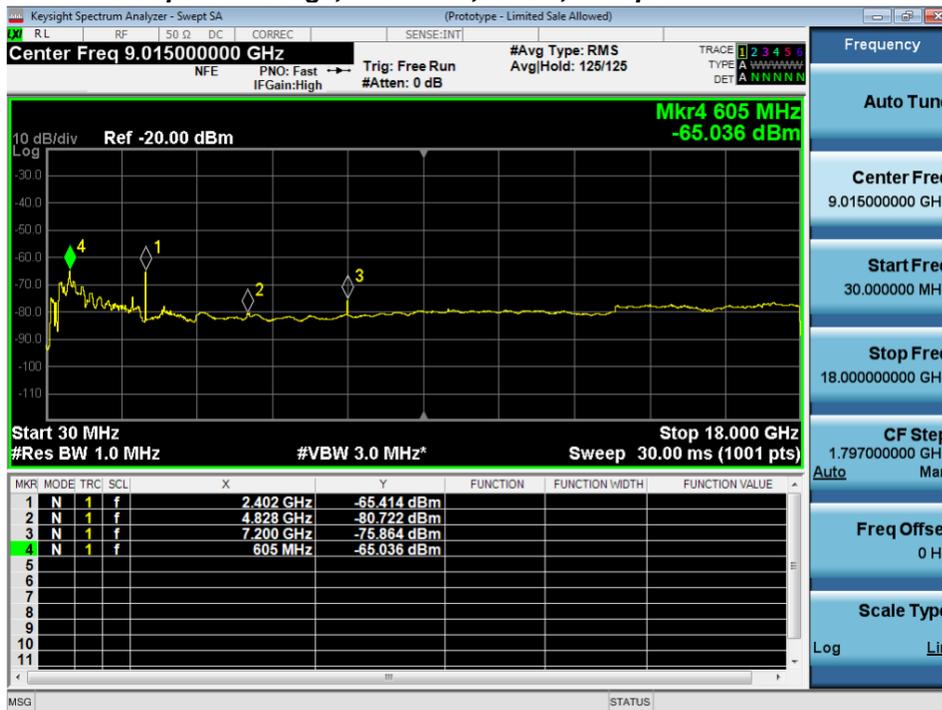




Conducted Spurs Average, 2426 MHz, GFSK, 1 Mbps

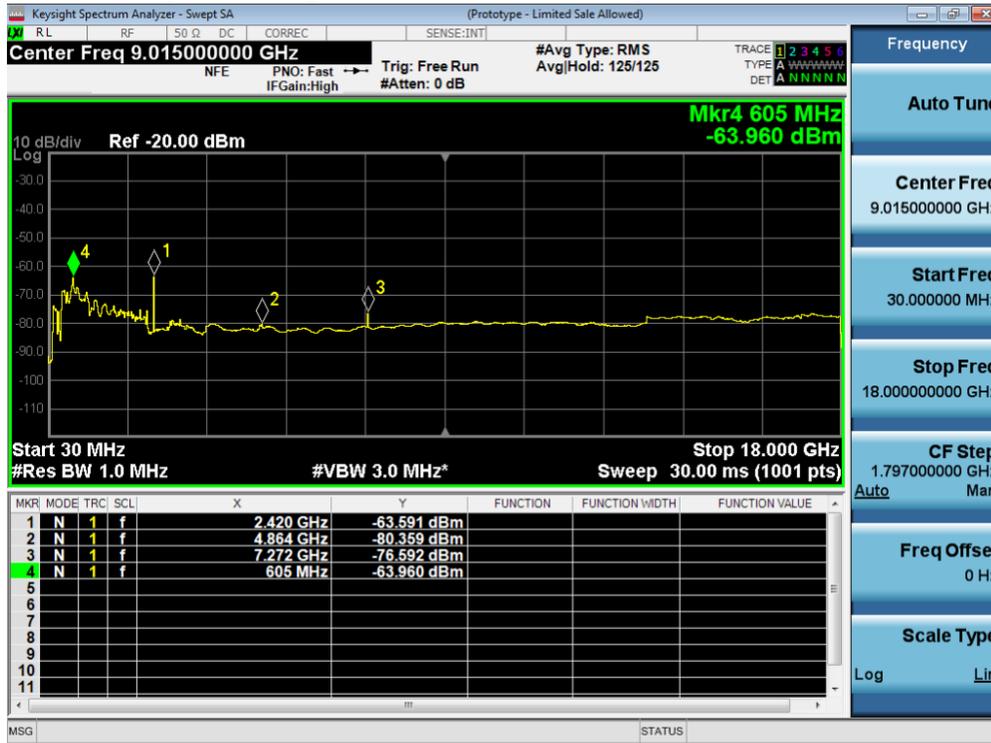

Conducted Spurs Average, 2480 MHz, GFSK, 1 Mbps

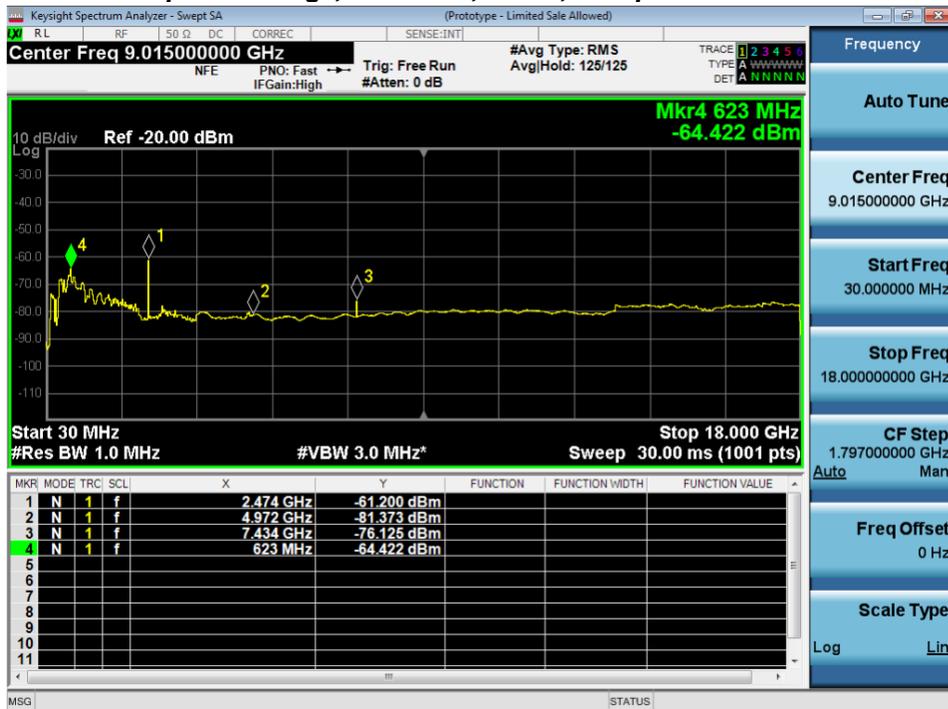





Peak

Frequency (MHz)	Mode	Tx Paths	Correlated Antenna Gain (dBi)	Tx 1 Spur Power (dBm)	Total Conducted Spur (dBm)	Limit (dBm)	Margin (dB)
2402	GFSK, 1 Mbps	1	2.5	-51.9	-49.4	-21.25	28.15
2426	GFSK, 1 Mbps	1	2.5	-50.5	-48	-21.25	26.75
2480	GFSK, 1 Mbps	1	2.5	-51.6	-49.1	-21.25	27.85


Conducted Spurs Peak, 2402 MHz, GFSK, 1 Mbps

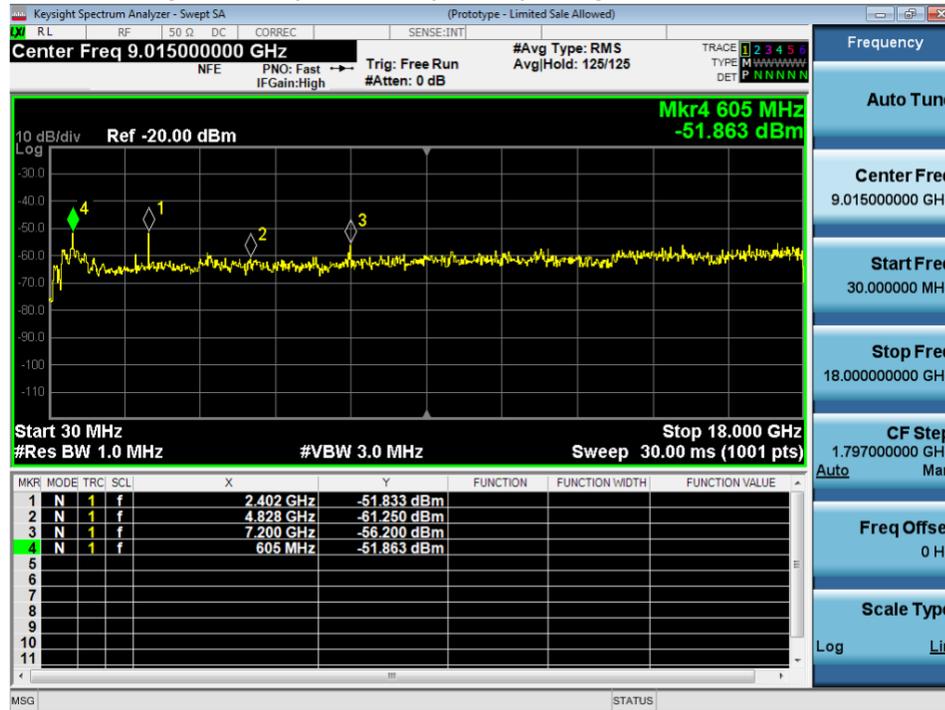

Conducted Spurs Peak, 2426 MHz, GFSK, 1 Mbps

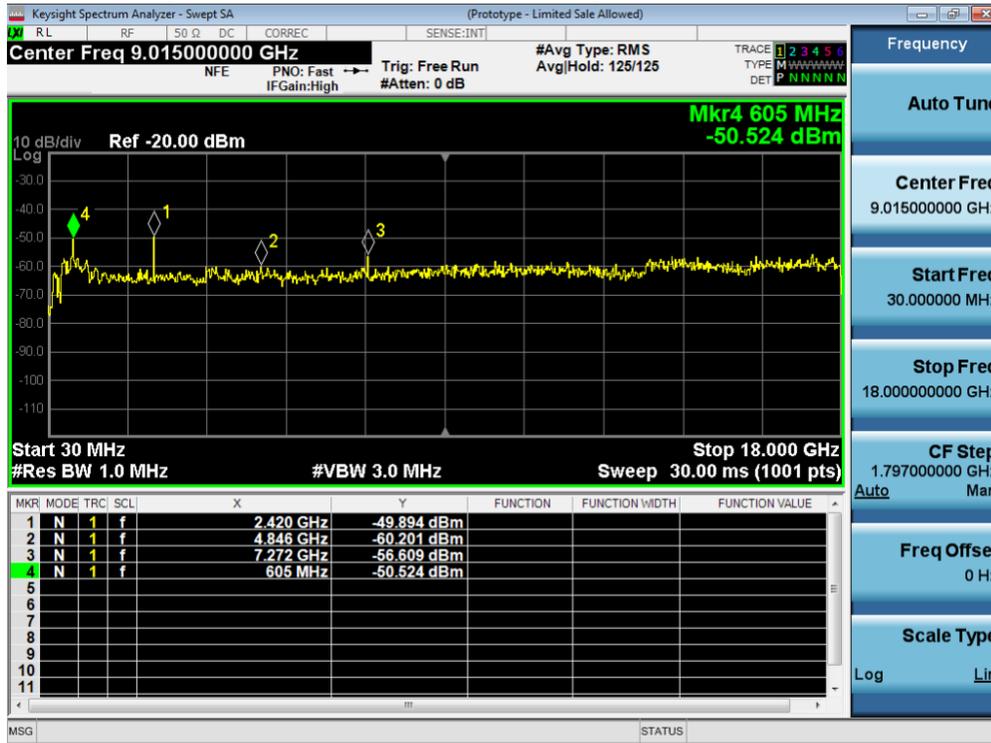

Conducted Spurs Peak, 2480 MHz, GFSK, 1 Mbps

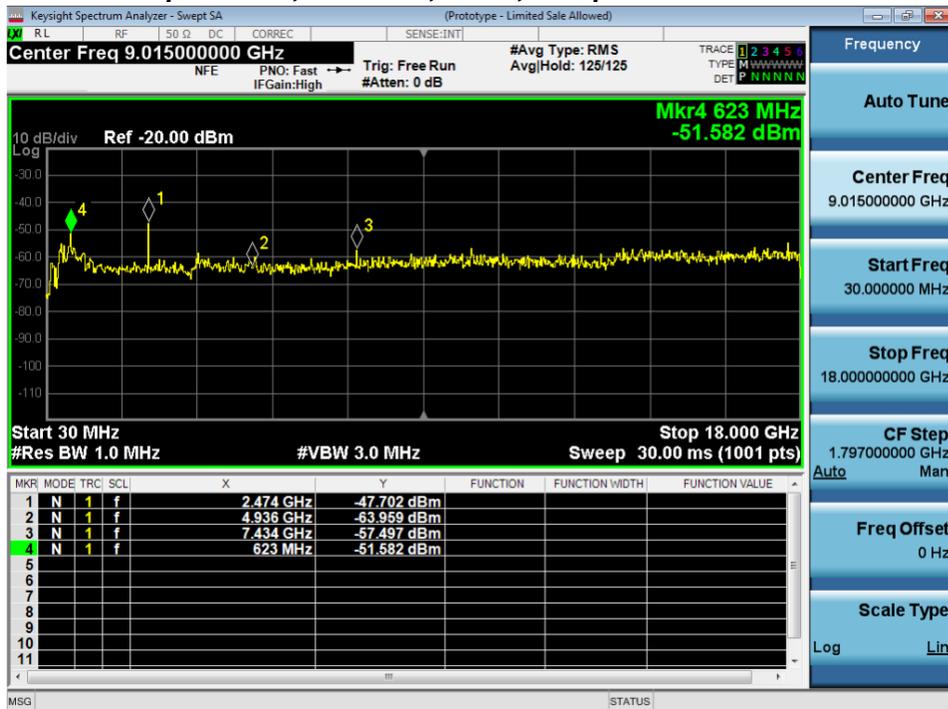

A.6 Conducted Bandedge

15.205 / 15.247 / RSS-Gen / RSS-247 / LP0002:3.10.1(5) & 2.8 In any 100 kHz bandwidth outside the frequency band in which the digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 30 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power.

Radiated emissions which fall in the restricted bands, as defined in Section 15.205(a), and RSS-Gen 8.10 must also comply with the radiated emission limits specified in Section 15.209(a) (see Section 15.205(c)) and RSS-Gen 8.9..

Test Procedure

Ref. KDB 558074 D01 DTS Meas Guidance v03r05
ANSI C63.10: 2013

Conducted Band edge Test Procedure	
1. Connect the antenna port(s) to the spectrum analyzer input. 2. Place the radio in continuous transmit mode. Use the procedures in KDB 558074 D01 DTS Meas Guidance v03r05 to substitute conducted measurements in place of radiated measurements. 3. Configure Spectrum analyzer as per test parameters below below (be sure to enter all losses between the transmitter output and the spectrum analyzer). 4. Place a marker at the end of the restricted band closest to the transmit frequency to show compliance. Also measure any emissions in the restricted bands.. 5. The “measure-and-sum technique” is used for measuring in-band transmit power of a device. In the measure-and-sum approach, the conducted emission level is measured at each antenna port. The measured results at the various antenna ports are then summed mathematically to determine the total emission level from the device. Summing is performed in linear power units. The worst case output is recorded. 6. Place a marker at the end of the restricted band closest to the transmit frequency to show compliance. Also measure any emissions in the restricted bands 7. Capture graphs and record pertinent measurement data.	
Conducted Bandedge	Conducted Bandedge
Test parameters non-restricted Band KDB 558074 D01 v03r05 section 11.1b, 11.2-3, also see ANSI C63.10: 2013 section 11.10.3	Test parameters restricted Band KDB 558074 D01 v03r05 section 12.2.4 & 12.2.5.3 also see ANSI C63.10: 2013 section 11.12.4 & 11.12.5.3
RBW = 100 kHz VBW ≥ 3 x RBW Sweep = Auto couple Detector = Peak Trace = Max Hold.	RBW = 1 MHz VBW ≥ 3 x RBW for Peak, 100Hz for Average Sweep = Auto couple Detector = Peak Trace = Max Hold.

System Number	Description	Samples	System under test	Support equipment
1	EUT	S01	<input checked="" type="checkbox"/>	<input type="checkbox"/>
	Support	S02	<input type="checkbox"/>	<input checked="" type="checkbox"/>

Tested By : Jose Aguirre	Date of testing: 08-Jan-18 - 08-Jan-18
Test Result : PASS	

See Appendix C for list of test equipment

Restricted Band Average

Frequency (MHz)	Mode	Tx Paths	Correlated Antenna Gain (dBi)	Tx 1 Bandedge Level (dBm)	Total Tx Bandedge Level (dBm)	Limit (dBm)	Margin (dB)
2402	GFSK, 1 Mbps	1	2.5	-61.6	-59.1	-41.25	17.85
2480	GFSK, 1 Mbps	1	2.5	-54.8	-52.3	-41.25	11.05

Conducted Bandedge Average, 2402 MHz, GFSK, 1 Mbps



Conducted Bandedge Average, 2480 MHz, GFSK, 1 Mbps






Restricted Band Peak

Frequency (MHz)	Mode	Tx Paths	Correlated Antenna Gain (dBi)	Tx 1 Bandedge Level (dBm)	Total Tx Bandedge Level (dBm)	Limit (dBm)	Margin (dB)
2402	GFSK, 1 Mbps	1	2.5	-55.5	-53.0	-21.25	31.75
2480	GFSK, 1 Mbps	1	2.5	-46.1	-43.6	-21.25	22.35

Conducted Bandedge Peak, 2402 MHz, GFSK, 1 Mbps

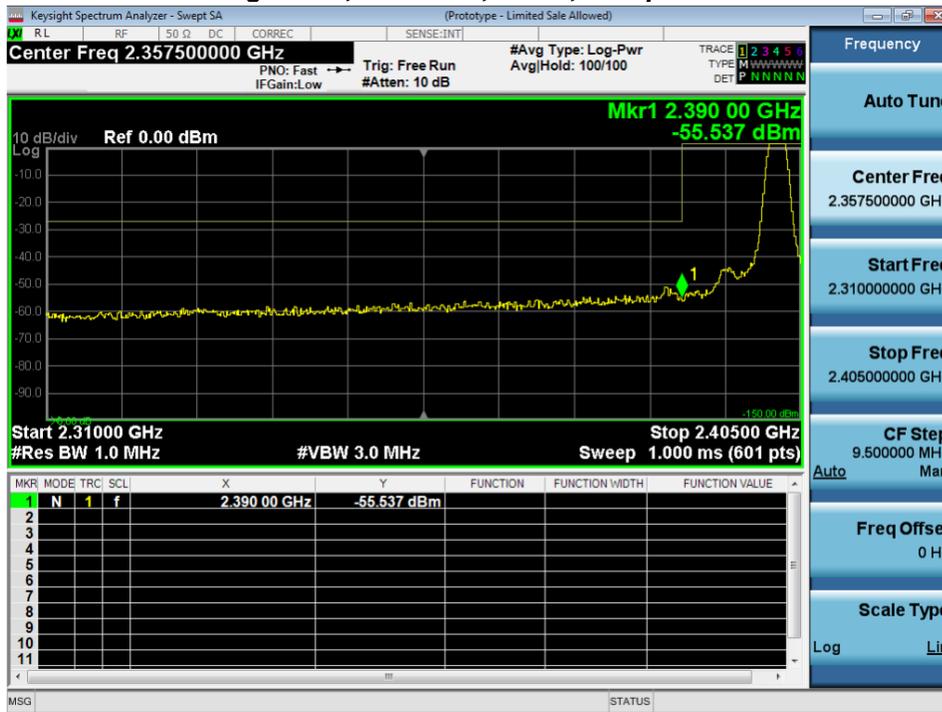

Conducted Bandedge Peak, 2480 MHz, GFSK, 1 Mbps





Non-Restricted Band

Frequency (MHz)	Mode	Data Rate (Mbps)	Conducted Bandedge Delta (dB)	Limit (dBc)	Margin (dB)
2402	GFSK, 1 Mbps	1	47.1	>30	17.1
2480	GFSK, 1 Mbps	1	53.9	>30	23.9

Conducted Bandedge Delta, 2402 MHz, GFSK, 1 Mbps



Conducted Bandedge Delta, 2480 MHz, GFSK, 1 Mbps



A.7 Duty Cycle

The zero-span mode on a spectrum analyzer or EMI receiver if the response time and spacing between bins on the sweep are sufficient to permit accurate measurements of the ON and OFF times of the transmitted signal:

- 1) Set the center frequency of the instrument to the center frequency of the transmission.
- 2) Set $RBW \geq OBW$ if possible; otherwise, set RBW to the largest available value.
- 3) Set $VBW \geq RBW$. Set detector = peak or average.

Add $[10 \log (1 / D)]$, where D is the duty cycle, to the measured value where it is needed
 For example, add $[10 \log (1/0.25)] = 6 \text{ dB}$ if the duty cycle is 25%

Duty Cycle worst case



The Duty cycle is 100%




Title: Physical Test Arrangement Photograph

This is a dual band 2.4GHz / 5GHz device. All ports in this test set up photo are connected as all testing is automated. Section 2.6 of this test report given an overview of the different Tx antenna combinations used by this device.


Appendix B: Emission Test Results

Testing Laboratory: Cisco Systems, Inc., 125 West Tasman Drive, San Jose, CA 95134, USA

Radiated Emission Setup Diagram-Below 1G

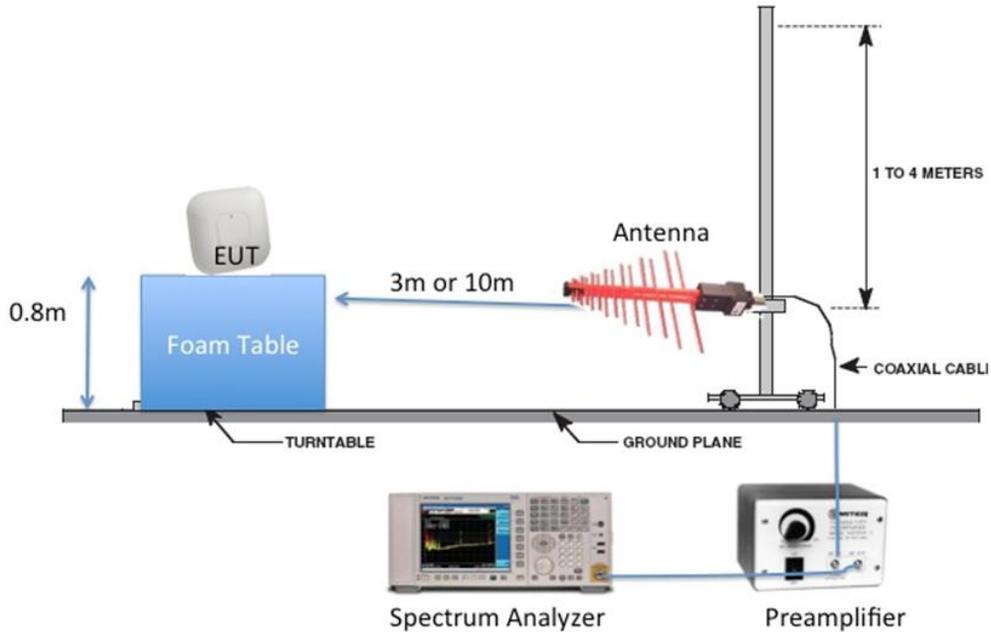

Radiated Emission Setup Diagram-Above 1G

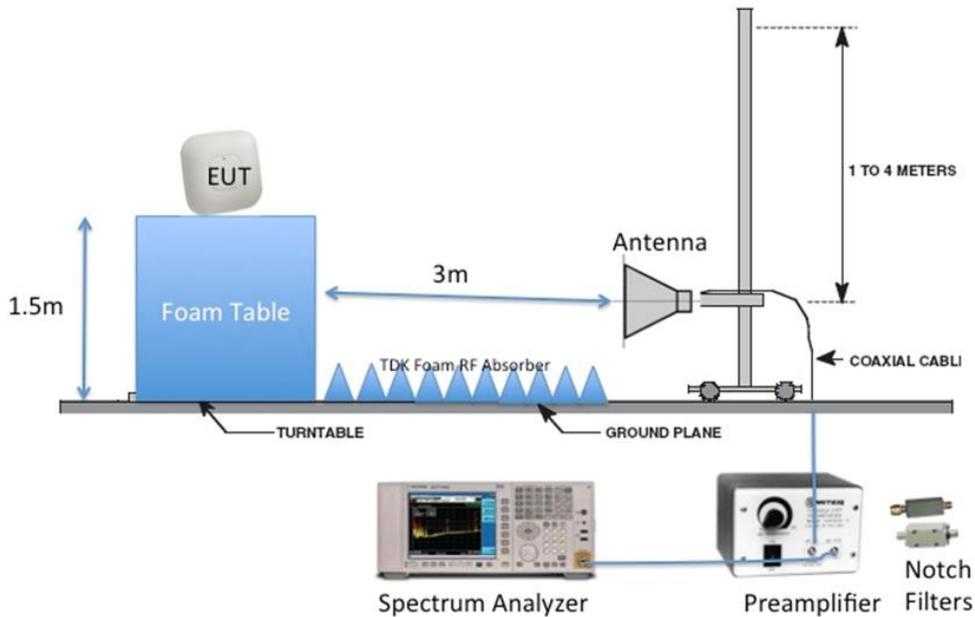

B.1 Radiated Spurious Emissions

15.205 / RSS-Gen / LP0002:3.10.1(5)/2.8 Radiated emissions which fall in the restricted bands, as defined in Section 15.205(a) and RSS-Gen 8.10, must also comply with the radiated emission limits specified in Section 15.209(a) (see Section 15.205(c)) and RSS-Gen 8.9.

Ref. ANSI C63.10: 2013 section 4.1.4.2.2, 4.1.4.2.3, 6.6.4 & 11.12.2

Using Vasona, configure the spectrum analyzer as shown below (be sure to enter all losses between the transmitter output and the spectrum analyzer). Place the radio in continuous transmit mode.

Span:	1GHz – 18 GHz
Reference Level:	80 dBuV
Attenuation:	10 dB
Sweep Time:	Coupled
Resolution Bandwidth:	1MHz
Video Bandwidth:	3 MHz
Detector:	Peak and Average (RMS)

Terminate the access Point RF ports with 50 ohm loads.

Maximize Turntable (find worst case table angle), Maximize Antenna (find worst case height)

Save 2 plots: 1) Average plot, Limit= 54dBuV/m @3m
 2) Peak plot, Limit = 74dBuV/m @3m

Place a marker at the end of the restricted band closest to the transmit frequency to show compliance.
 Also measure any emissions in the restricted bands.

This report represents the worst case data for all supported operating modes and antennas. There are no measurable emissions above 18 GHz.

System Number	Description	Samples	System under test	Support equipment
1	EUT	S01	<input checked="" type="checkbox"/>	<input type="checkbox"/>
	Support	S02	<input type="checkbox"/>	<input checked="" type="checkbox"/>


Tested By : Jose Aguirre	Date of testing: 08-Jan-18 - 28-Feb-18
Test Result : PASS	

See Appendix C for list of test equipment



B.1.A Transmitter Radiated Spurious Emissions-Average Worst Case


Frequency (MHz)	Mode	Data Rate (Mbps)	Spurious Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (MHz)
2402	GFSK 1Mbps	1	49	54	5.0
2426	GFSK 1Mbps	1	49	54	5.0
2480	GFSK 1Mbps	1	49.6	54	5.4

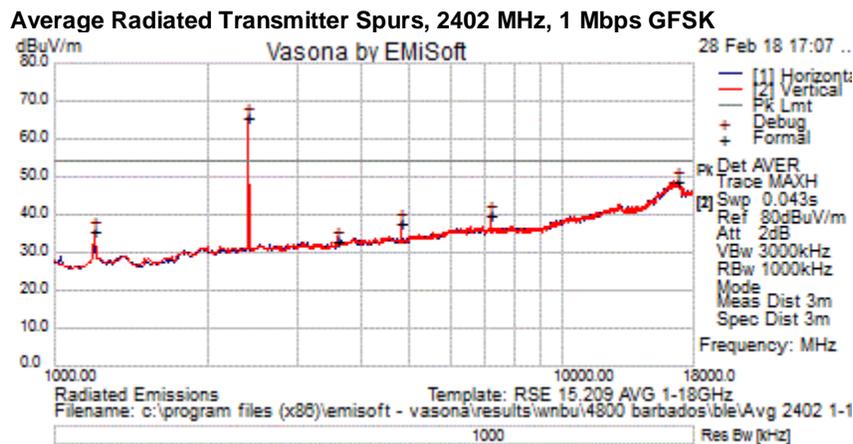


Frequency MHz	Raw dBuV	Cable Loss	AF dB	Level dBuV/m	Measurement Type	Pol	Hgt cm	Azt Deg	Limit dBuV/m	Margin dB	Pass /Fail
16756.875	28	14.3	6.7	49	RMS	V	150	0	54	-5	Pass
7205.207	31.7	8.8	-0.4	40	RMS	V	150	360	54	-14	Pass
7205.207	31.7	8.8	-0.4	40	RMS	H	150	360	54	-14	Pass
4803.691	34.3	6.7	-3.2	37.9	RMS	V	150	360	54	-16.2	Pass
4803.691	34.3	6.7	-3.2	37.9	RMS	H	150	360	54	-16.2	Pass
1200.031	41	3	-8.1	35.9	RMS	V	150	0	54	-18.1	Pass
3600.06	31.5	5.7	-4	33.1	RMS	V	150	360	54	-20.9	Pass
3600.06	31.5	5.7	-4	33.1	RMS	H	150	360	54	-20.9	Pass



Average Radiated Transmitter Spurs, 2426 MHz, 1 Mbps GFSK

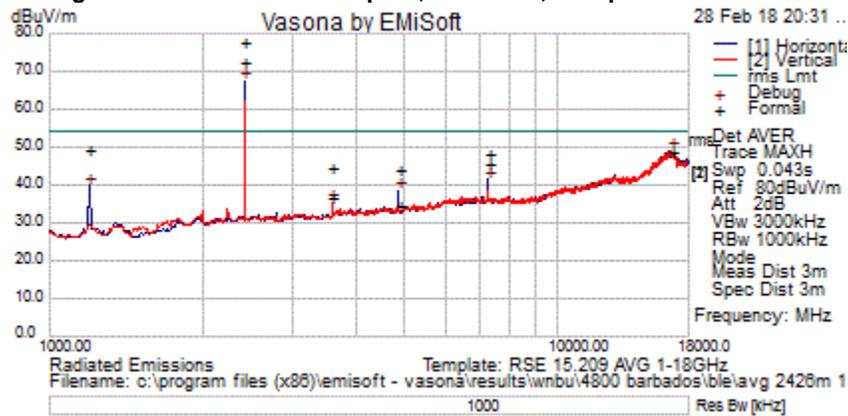


Average Radiated Transmitter Spurs, 2480 MHz, 1 Mbps GFSK

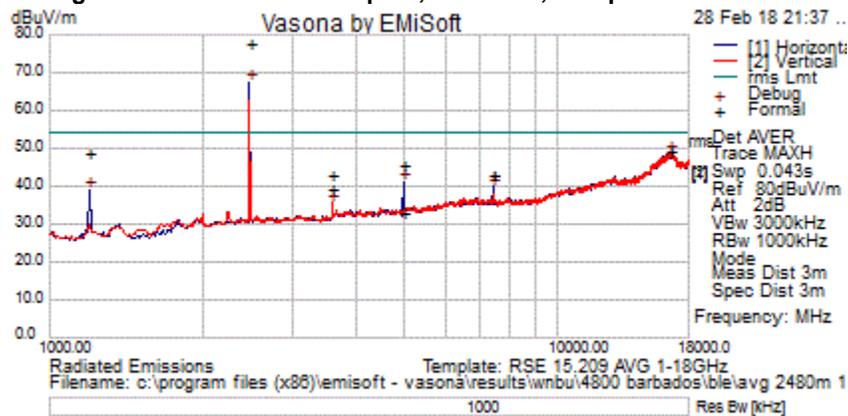



Average Radiated Transmitter Spurs, All rates, All Modes

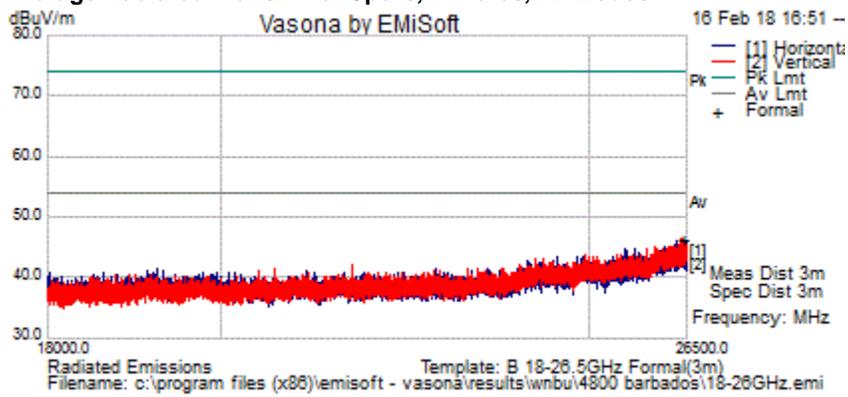


No emissions seen above 18GHz . the plot above is representative of all modes tested.



B.1.P Transmitter Radiated Spurious Emissions-Peak Worst Case

Frequency (MHz)	Mode	Data Rate (Mbps)	Spurious Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (MHz)
2402	GFSK 1Mbps	1	58.6	74	-15.4
2426	GFSK 1Mbps	1	58.9	74	-15.1
2480	GFSK 1Mbps	1	59.5	74	-14.5


Peak Radiated Transmitter Spurs, 2402 MHz, 1 Mbps GFSK

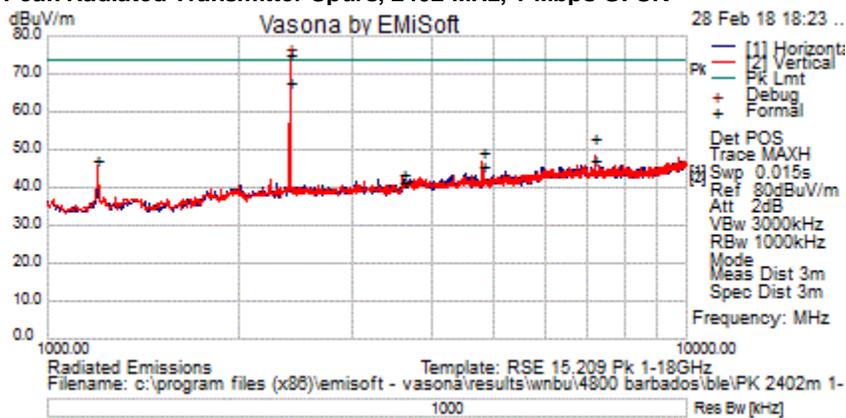

Frequency MHz	Raw dBuV	Cable Loss	AF dB	Level dBuV/m	Measurement Type	Pol	Hgt cm	Azt Deg	Limit dBuV/m	Margin dB	Pass /Fail
7205.207	44.7	8.8	-0.4	53.1	Peak Max	V	195	164	74	-20.9	Pass
16756.875	37.6	14.3	6.7	58.6	Peak Max	V	101	164	74	-15.4	Pass
4803.691	45.8	6.7	-3.2	49.4	Peak Max	V	194	164	74	-24.6	Pass
1200.031	52.3	3	-8.1	47.2	Peak Max	V	194	189	74	-26.8	Pass
7205.207	38.9	8.8	-0.4	47.3	Peak Max	H	191	50	74	-26.7	Pass
4803.691	42.1	6.7	-3.2	45.6	Peak Max	H	162	45	74	-28.4	Pass
3600.06	41.9	5.7	-4	43.6	Peak Max	V	180	104	74	-30.4	Pass
3600.06	40	5.7	-4	41.7	Peak Max	H	143	248	74	-32.3	Pass




Peak Radiated Transmitter Spurs, 2426 MHz, 1 Mbps GFSK

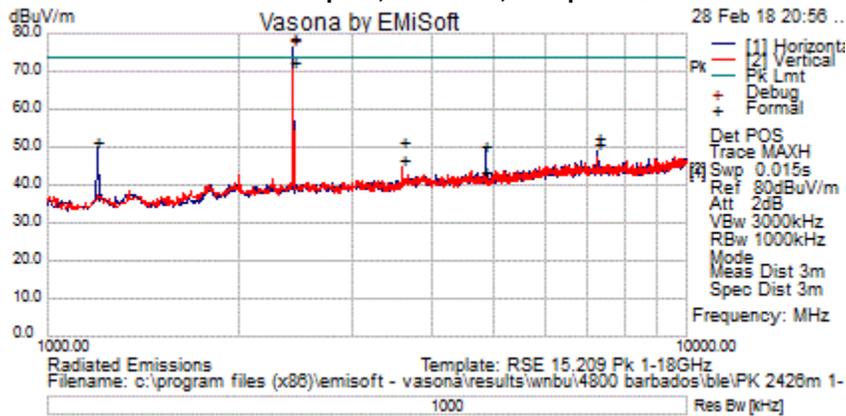


Frequency MHz	Raw dBuV	Cable Loss	AF dB	Level dBuV/m	Measurement Type	Pol	Hgt cm	Azt Deg	Limit dBuV/m	Margin dB	Pass /Fail
1199.969	56.8	3	-8.1	51.8	Peak Max	H	177	329	74	-22.2	Pass
16693.125	38.4	14.3	6.2	58.9	Peak Max	H	171	61	74	-15.1	Pass
7277.375	44	8.8	-0.4	52.5	Peak Max	H	194	224	74	-21.5	Pass
7277.375	42.3	8.8	-0.4	50.8	Peak Max	V	175	266	74	-23.2	Pass
3599.839	49.7	5.7	-4	51.3	Peak Max	V	127	262	74	-22.7	Pass
4852.091	46.9	6.8	-3.3	50.3	Peak Max	H	101	237	74	-23.7	Pass
3599.839	45.1	5.7	-4	46.8	Peak Max	H	131	294	74	-27.2	Pass
4852.091	40.1	6.8	-3.3	43.5	Peak Max	V	111	308	74	-30.5	Pass

Peak Radiated Transmitter Spurs, 2480 MHz, 1 Mbps GFSK

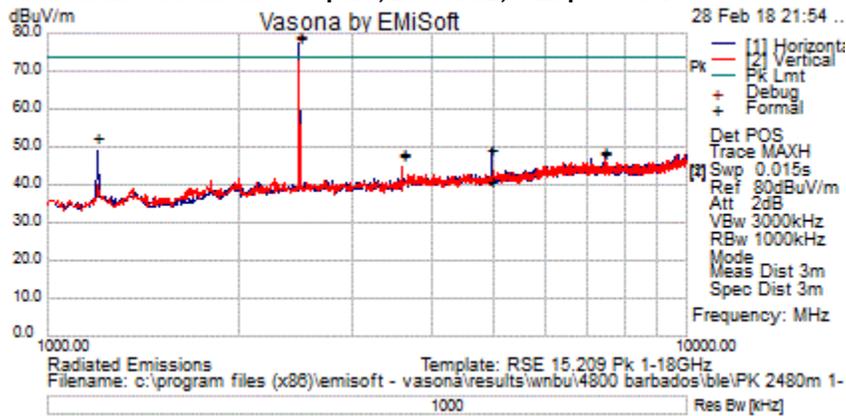


Frequency MHz	Raw dBuV	Cable Loss	AF dB	Level dBuV/m	Measurement Type	Pol	Hgt cm	Azt Deg	Limit dBuV/m	Margin dB	Pass /Fail
16565.625	38.5	14.2	6.8	59.5	Peak Max	H	114	49	74	-14.5	Pass
1200.031	57.8	3	-8.1	52.7	Peak Max	H	147	314	74	-21.3	Pass
4960.266	45.6	6.9	-3.2	49.3	Peak Max	H	174	204	74	-24.7	Pass
3600.089	46.3	5.7	-4	48	Peak Max	V	180	254	74	-26	Pass
7439.118	39.8	8.9	-0.2	48.5	Peak Max	H	164	246	74	-25.5	Pass
7439.118	40.2	8.9	-0.2	48.9	Peak Max	V	172	251	74	-25.1	Pass
3600.089	46.9	5.7	-4	48.5	Peak Max	H	172	284	74	-25.5	Pass
4960.266	37.2	6.9	-3.2	40.9	Peak Max	V	110	305	74	-33.1	Pass

Peak Radiated Transmitter Spurs, All rates, All Modes

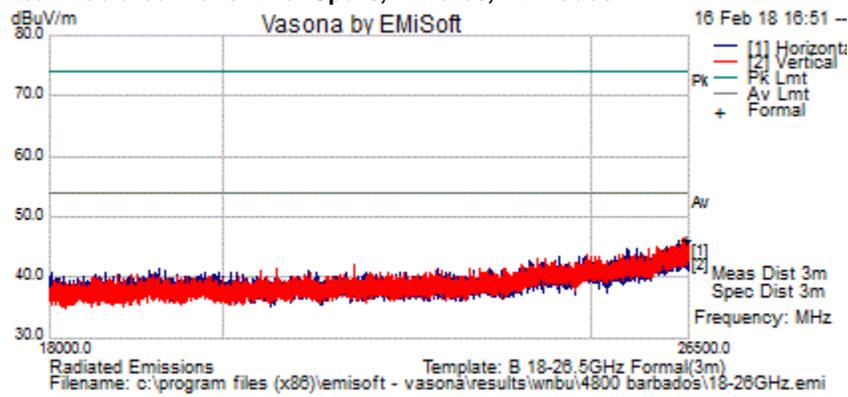

No emissions seen above 18GHz. The plot above is representative of all modes tested.

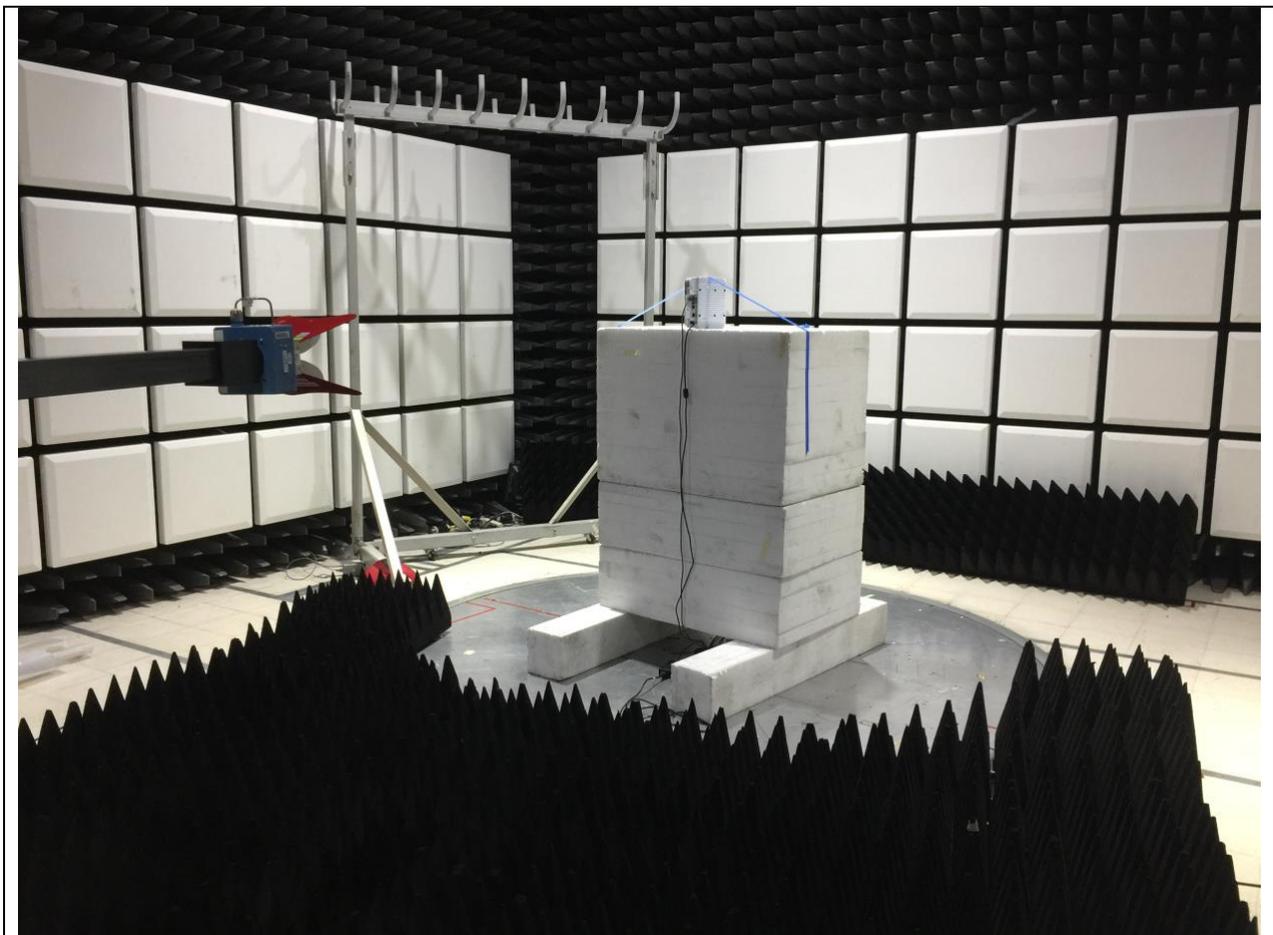

Title: Radiated Emissions Configuration Photograph

B.2 Receiver Spurious Emissions

RSS-Gen Receivers are required to comply with the limits of spurious emissions as set out in this section. Receiver emission measurements are to be performed as per the normative test method referenced in Section 3.

Radiated emissions which fall in the restricted bands, as defined in RSS-Gen section 8.10, must also comply with the radiated emission limits specified in RSS-Gen section 8.9.

For emissions at frequencies below 1 GHz, measurements shall be performed using a CISPR quasi-peak detector and the related measurement bandwidth. At frequencies above 1 GHz, measurements shall be performed using a linear average detector with a minimum resolution bandwidth of 1 MHz.

Ref. RSS-Gen section 8.9 & 8.10

ANSI C63.10: 2013 section 4.1.4.2.2, 4.1.4.2.3, 6.6.4 & 11.12.2

Using Vasona, configure the spectrum analyzer as shown below (be sure to enter all losses between the transmitter output and the spectrum analyzer). Place the radio in continuous transmit mode.

Span:	1GHz – 18 GHz
Reference Level:	80 dBuV
Attenuation:	10 dB
Sweep Time:	Coupled
Resolution Bandwidth:	1MHz
Video Bandwidth:	3MHz
Detector:	Peak / Average

Radiated emission measurements shall be performed with the receiver antenna connected to the receiver antenna terminals.

Maximize Turntable (find worst case table angle), Maximize Antenna (find worst case height)

Save plot: 1) Average Plot (Vertical and Horizontal), Limit= 54dBuV/m @3m
2) Peak Plot (Vertical and Horizontal), Limit= 74dBuV/m @3m

This report represents the worst case data for all supported operating modes and antennas. There are no measurable emissions above 18 GHz.

System Number	Description	Samples	System under test	Support equipment
1	EUT	S01	<input checked="" type="checkbox"/>	<input type="checkbox"/>
	Support	S02	<input type="checkbox"/>	<input checked="" type="checkbox"/>


Tested By : Jose Aguirre	Date of testing: 08-Jan-18 - 28-Feb-18
Test Result : PASS	

See Appendix C for list of test equipment



B.2.A Receiver Radiated Spurious Emissions (Average Measurements)


Average Radiated Receiver Spurs, All Rates, All Modes, (1-18GHz) Horizontal

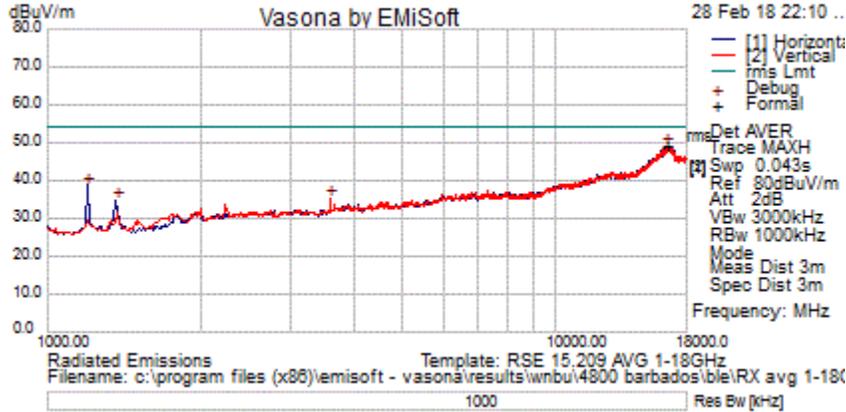


Frequency MHz	Raw dBuV	Cable Loss	AF dB	Level dBuV/m	Measurement Type	P ol	Hgt cm	Azt Deg	Limit dBuV/m	Margin dB	Pass /Fail
16438.125	29.21	14.17	6.05	49.43	RMS Max	V	110	126	54	-4.57	Pass
1200	43.9	3.02	-8.1	38.82	RMS Max	H	150	0	54	-15.18	Pass
1371.938	39.18	3.25	-7.67	34.76	RMS Max	H	150	0	54	-19.24	Pass
3599.98	33.64	5.68	-4	35.32	RMS Max	V	150	360	54	-18.68	Pass

B.2.A Receiver Radiated Spurious Emissions (Peak Measurements)

Peak Radiated Receiver Spurs, All Rates, All Modes, (1-18GHz) Horizontal

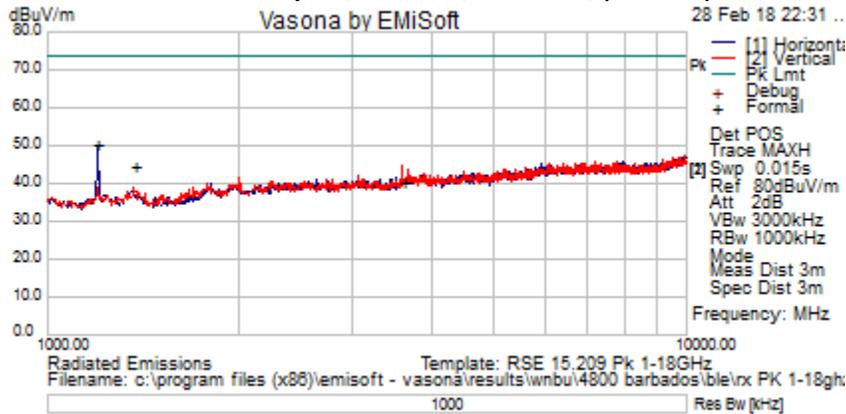

Frequency MHz	Raw dBuV	Cable Loss	AF dB	Level dBuV/m	Measurement Type	P ol	Hgt cm	Azt Deg	Limit dBuV/m	Margin dB	Pass /Fail
16438.125	38.32	14.17	6.05	58.55	Peak Max	V	110	126	74	-15.45	Pass
1200	55.32	3.02	-8.1	50.24	Peak Max	H	150	0	74	-23.77	Pass
3599.98	38.94	5.68	-4	40.62	Peak Max	V	150	360	74	-33.38	Pass
1371.938	49.1	3.25	-7.67	44.68	Peak Max	H	150	0	74	-29.32	Pass

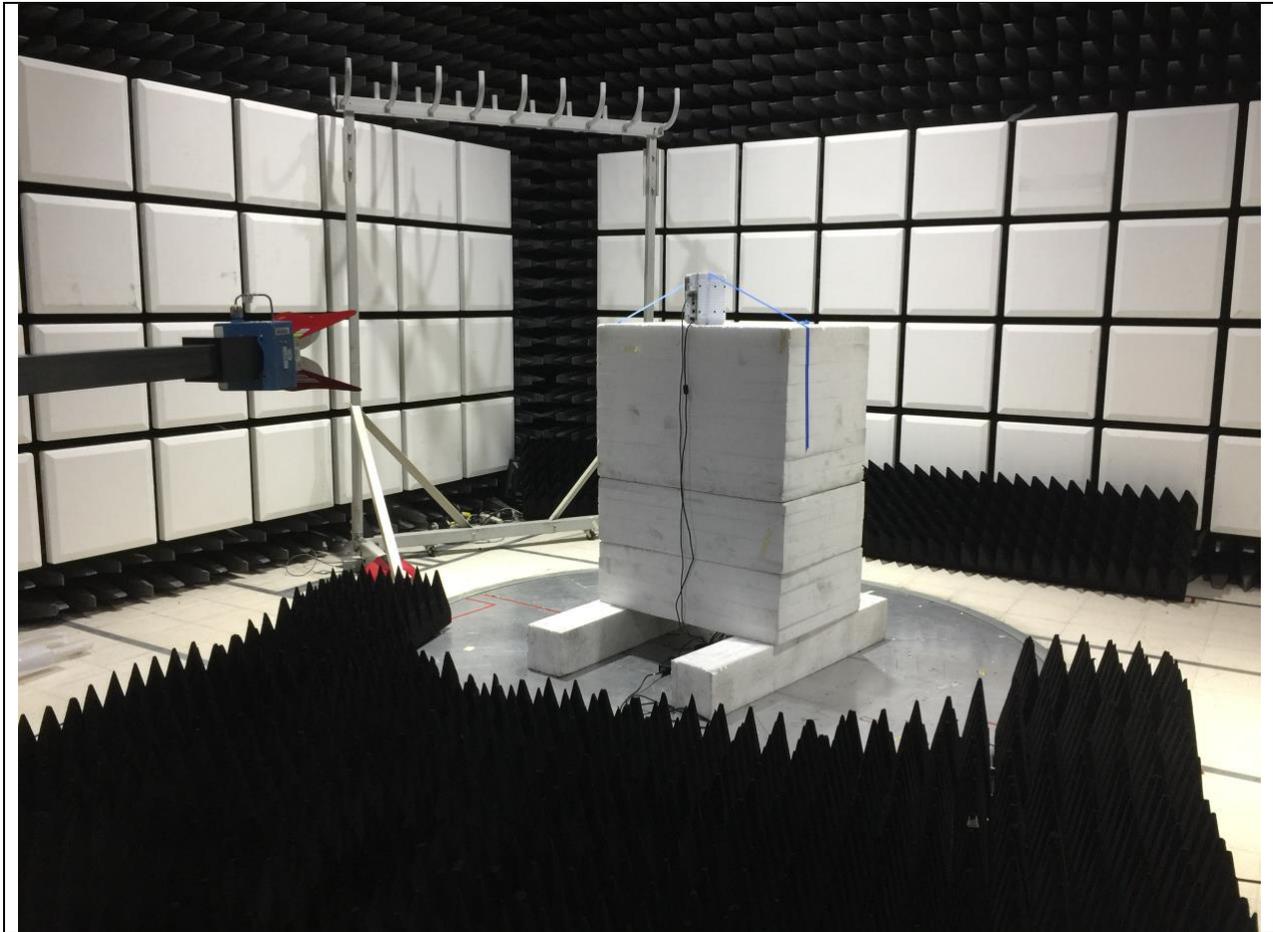

Title: Radiated Emissions Configuration Photograph

B.3 Radiated Emissions 30MHz to 1GHz

15.205 / 15.209 / RSS-Gen / LP0002:3.10.1(5)/2.8 Radiated emissions which fall in the restricted bands, as defined in Section 15.205(a), must also comply with the radiated emission limits specified in Section 15.209(a) (see Section 15.205(c)) and RSS-Gen section 8.9.

Ref. ANSI C63.10: 2013 section 6.5

Using Vasona, configure the spectrum analyzer as shown below (be sure to enter all losses between the transmitter output and the spectrum analyzer). Place the radio in continuous transmit mode.

Span:	30MHz – 1GHz
Reference Level:	80 dBuV
Attenuation:	10 dB
Sweep Time:	Coupled
Resolution Bandwidth:	100kHz
Video Bandwidth:	300kHz
Detector:	Peak for Pre-scan, Quasi-Peak

Compliance shall be determined using CISPR quasi-peak detection; however, peak detection is permitted as an alternative to quasi-peak detection.

Terminate the access Point RF ports with 50 ohm loads.


Maximize Turntable (find worst case table angle), Maximize Antenna (find worst case height)

This report represents the worst case data for all supported operating modes and antennas.

System Number	Description	Samples	System under test	Support equipment
1	EUT	S01	<input checked="" type="checkbox"/>	<input type="checkbox"/>
	Support	S02	<input type="checkbox"/>	<input checked="" type="checkbox"/>

Tested By : Jose Aguirre	Date of testing: 16-Feb-18
Test Result : PASS	

See Appendix C for list of test equipment

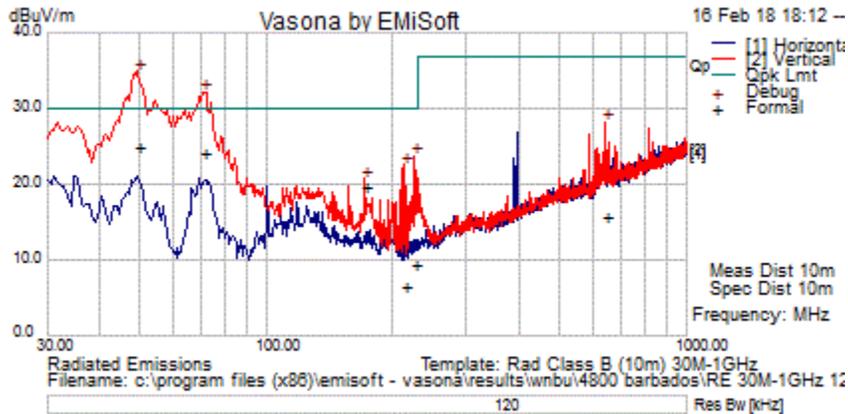

Test Results Table

Frequency MHz	Raw dBuV	Cable Loss	AF dB	Level dBuV/m	Measurement Type	Pol	Hgt cm	Azt Deg	Limit dBuV/m	Margin dB	Pass /Fail
213.304	21.6	1.6	-16.6	6.6	Quasi Max	V	122	25	30	-23.4	Pass
644.369	21.7	2.8	-8.6	15.8	Quasi Max	V	240	25	37	-21.2	Pass
225.013	23.8	1.6	-16.1	9.3	Quasi Max	V	172	28	30	-20.7	Pass
71.218	42.8	0.9	-19.5	24.2	Quasi Max	V	192	128	30	-5.8	Pass
171.816	33.9	1.4	-15.6	19.7	Quasi Max	V	284	245	30	-10.3	Pass
49.436	43.5	0.8	-19.4	24.9	Quasi Max	V	202	338	30	-5.1	Pass



Title: Radiated Emissions Configuration Photograph

B.4 AC Conducted Emissions

FCC 15.207 (a) & RSS-Gen 8.8 / LP0002:2.3 Except when the requirements applicable to a given device state otherwise, for any radio apparatus equipped to operate from the public utility AC power supply, either directly or indirectly (such as with a battery charger), the radio frequency voltage of emissions conducted back onto the AC power lines in the frequency range of 0.15 MHz to 30 MHz shall not exceed the limits shown in the table in these sections. The more stringent limit applies at the frequency range boundaries.

Measurement Procedure

Accordance with ANSI C63.10:2013 section 6.2


Using Vasona, configure the spectrum analyzer as shown below (be sure to enter all losses between the transmitter output and the spectrum analyzer). Place the radio in continuous transmit mode.

Span:	150 KHz – 30 MHz
Attenuation:	10 dB
Sweep Time:	Coupled
Resolution Bandwidth:	9 KHz
Video Bandwidth:	30 KHz
Detector:	Quasi-Peak / Average

System Number	Description	Samples	System under test	Support equipment
1	EUT	S01	<input checked="" type="checkbox"/>	<input type="checkbox"/>
	Support	S02	<input type="checkbox"/>	<input checked="" type="checkbox"/>


Tested By : Jose Aguirre	Date of testing: 12-Mar-18
Test Result : PASS	

See separate EMC test report for test data.

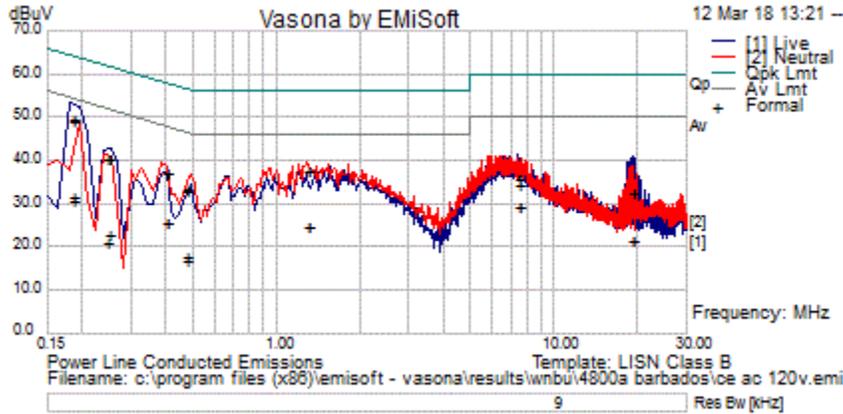

Test Results Table

Frequency MHz	Raw dBuV	Cable Loss	Factors dB	Level dBuV	Measurement Type	Line	Limit dBuV	Margin dB	Pass /Fail
0.405	17.1	20.1	0	37.2	Quasi Peak	Live	57.8	-20.6	Pass
0.185	28.4	20.9	0.1	49.3	Quasi Peak	Live	64.2	-14.9	Pass
1.297	17.9	19.9	0	37.9	Quasi Peak	Live	56	-18.1	Pass
0.477	13.4	19.9	0	33.4	Quasi Peak	Live	56.4	-23	Pass
0.25	20.1	20.5	0	40.7	Quasi Peak	Live	61.8	-21.1	Pass
7.45	14	20.1	0.1	34.3	Quasi Peak	Live	60	-25.7	Pass
19.18	12	20.4	0.3	32.7	Quasi Peak	Live	60	-27.3	Pass
0.186	28.6	20.9	0.1	49.5	Quasi Peak	Neutral	64.2	-14.7	Pass
7.445	15.5	20.1	0.1	35.8	Quasi Peak	Neutral	60	-24.2	Pass
0.248	19.7	20.6	0	40.3	Quasi Peak	Neutral	61.8	-21.5	Pass
19.166	11.8	20.4	0.3	32.5	Quasi Peak	Neutral	60	-27.5	Pass
1.297	17.7	19.9	0	37.7	Quasi Peak	Neutral	56	-18.3	Pass
0.405	16.9	20.1	0	37	Quasi Peak	Neutral	57.7	-20.7	Pass
0.478	13.1	19.9	0	33	Quasi Peak	Neutral	56.4	-23.3	Pass
0.405	5.5	20.1	0	25.6	Average	Live	47.8	-22.1	Pass
0.185	10	20.9	0.1	31	Average	Live	54.2	-23.3	Pass
1.297	4.8	19.9	0	24.8	Average	Live	46	-21.2	Pass
0.477	-2	19.9	0	18	Average	Live	46.4	-28.4	Pass
0.25	2.1	20.5	0	22.7	Average	Live	51.8	-29.1	Pass
7.45	8.9	20.1	0.1	29.2	Average	Live	50	-20.8	Pass
19.18	1	20.4	0.3	21.7	Average	Live	50	-28.3	Pass
0.186	10.6	20.9	0.1	31.5	Average	Neutral	54.2	-22.7	Pass
7.445	9.1	20.1	0.1	29.3	Average	Neutral	50	-20.7	Pass
0.248	0.2	20.6	0	20.8	Average	Neutral	51.8	-31	Pass
19.166	0.7	20.4	0.3	21.4	Average	Neutral	50	-28.6	Pass
1.297	4.6	19.9	0	24.6	Average	Neutral	46	-21.4	Pass
0.405	5.4	20.1	0	25.4	Average	Neutral	47.7	-22.3	Pass
0.478	-3.2	19.9	0	16.8	Average	Neutral	46.4	-29.6	Pass

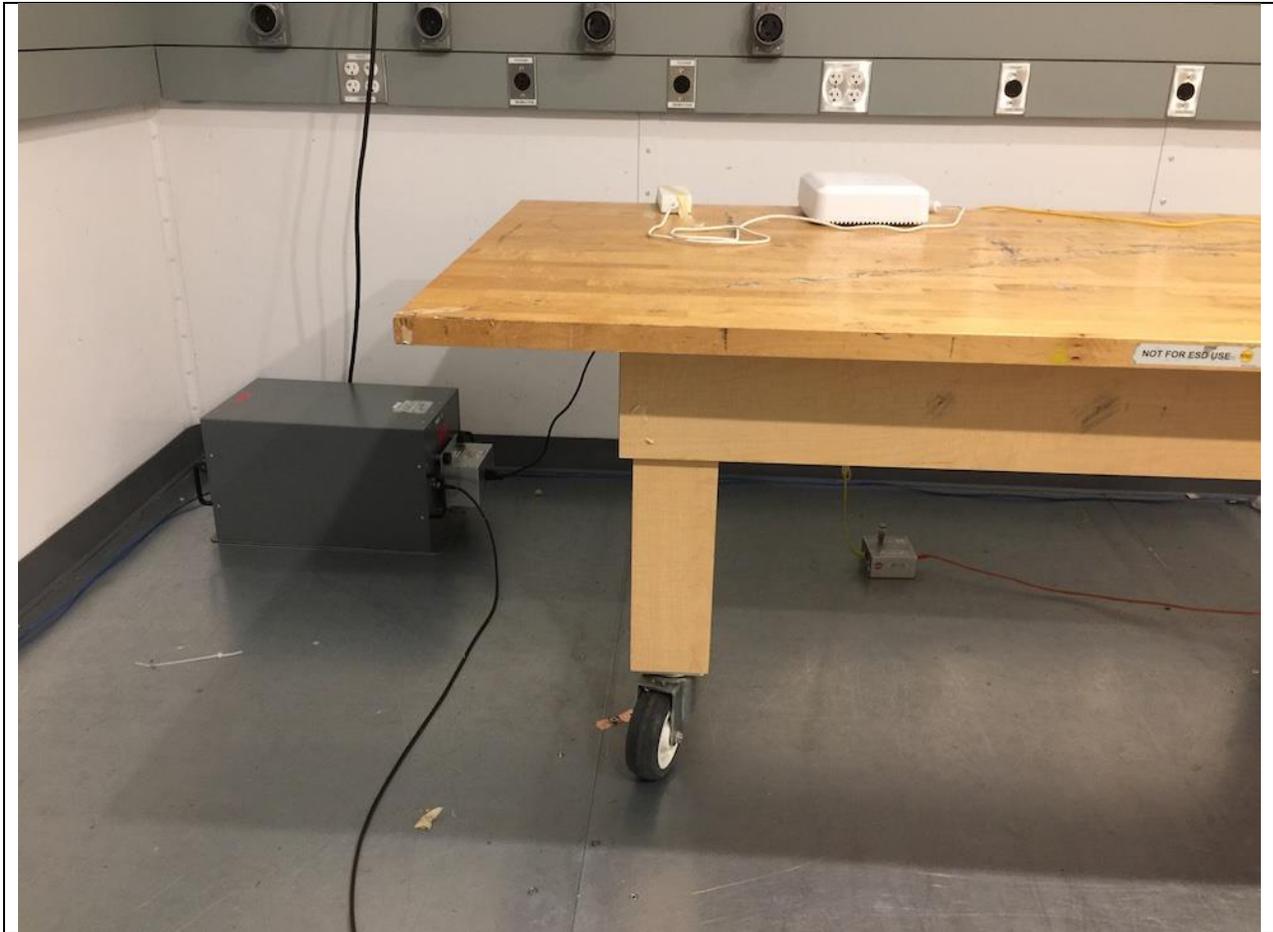

Title: Conducted Emissions Configuration Photograph

Appendix C: List of Test Equipment Used to perform the test

Test Equipment used for Radiated Emissions					
Equip No	Model Manufacturer	Description	Last Cal	Next Cal	Test Item
CIS047410	N9038A Agilent	MXE EMI Receiver 20Hz to 26.5 Ghz	31-Mar-17	31-Mar-18	B,2
CIS032806	JB1 Sunol Sciences	Combination Antenna	7-Jun-17	7-Jun-18	B.2
CIS021117	UFB311A-0-2484-520520 Micro-Coax	RF Coaxial Cable, to 18GHz, 248.4 in	16-Aug-17	16-Aug-18	B.1, B3
CIS049563	Sucoflex 106A Huber + Suhner	N Type Cable 18GHz	21-Aug-17	21-Aug-18	B,2
CIS042000	E4440A Agilent	Spectrum Analyzer	22-Aug-17	22-Aug-18	B.1, B3
CIS041979	1840 Cisco	18-40GHz EMI Test Head/Verification Fixture	30-Aug-17	30-Aug-18	B.1, B3
CIS008447	NSA 10m Chamber Cisco	NSA 10m Chamber	17-Oct-17	17-Oct-18	B,2
CIS045098	TH0118 Cisco	Mast Mount Preamp Array, 1-18GHz	1-Nov-17	1-Nov-18	B.1, B.3
CIS055937	Sucoflex 106PA Huber + Suhner	N-Type 8m 18GHz Antenna Cable	10-Nov-17	10-Nov-18	B.1, B3
CIS030443	UFB311A-0-1560-520520 Micro-Coax	RF Coaxial Cable, to 18GHz, 156 In.	10-Nov-17	10-Nov-18	B,2
CIS008024	SF106A Huber + Suhner	3 meter Sucoflex cable	10-Nov-17	10-Nov-18	B,2
CIS044940	ESU40 Rohde & Schwarz	EMI Test Receiver, 20Hz-40GHz	28-Nov-17	28-Nov-18	B.1, B3
CIS037581	3117 ETS-Lindgren	Double Ridged Waveguide Horn Antenna	7-Dec-17	7-Dec-18	B.1, B3
CIS043124	Above 1GHz Site Cal Cisco	Above 1GHz Cisp Site Verification	1-Nov-17	1-Nov-18	B.1, B3
CIS056158	Sucoflex104PEA Huber + Suhner	RF N Type Cable 18GHz 2m	18-Jan-18	18-Jan-19	B,2
CIS021116	UFB311A-0-3540-520520 Micro-Coax	RF Coaxial Cable, to 18GHz, 354 in	19-Feb-18	19-Feb-19	B.2
CIS037236	50CB-015 JFW	GPIB Control Box	Cal not Req		B.1, B.3
CIS034075	RSG 2000 Schaffner	Reference Spectrum Generator, 1-18GHz	Cal not Req		B.1, B.3
CIS027233	CNE V York	Comparison Noise Emitter	Cal not Req		B,2

Test Equipment used for AC Mains Conducted Emissions						
Equip No	Manufacturer	Model	Description	Last Cal	Next Cal	Test Item
45167	Stanley 33-428		8m Tape Measure	Cal not req	Cal not req	B.4
5687	Fluke 73 III		Digital Multimeter	11/1/2017	11/1/2018	B.4
45999	FCC F-090527-1009-2		Lisn Adapter	6/8/2017	6/8/2018	B.4
45050	Rohde & Schwarz ESCI		EMI Test Receiver	11/16/2017	11/16/2018	B.4
45998	FCC F-090527-1009-1		Line Impedance Stabilization Network	6/8/2017	6/8/2018	B.4
37229	Coleman RG-223		25ft BNC cable	4/12/2017	4/12/2018	B.4
49559	Bird 5-T-MB		5W 50 Ohm BNC Termination 4GHz	8/10/2017	8/10/2018	B.4
18963	York CNE V		Comparison Noise Emitter, 30 - 1000MHz	Cal not req	Cal not req	B.4
54228	Newport iBTHP-5-DB9		5 inch Temp/RH/Press Sensor w/20ft cable	2/10/2018	2/10/2019	B.4
46006	FCC F-090527-1009-1		Line Impedance Stabilization Network	6/8/2017	6/8/2018	B.4
8510	FCC FCC-450B-2.4-N		Instrumentation Limiter	5/16/2017	5/16/2018	B.4
46007	FCC F-090527-1009-2		Lisn Adapter	6/8/2017	6/8/2018	B.4
49531	TTE H785-150K-50-21378		High Pass Filter	5/3/2017	5/3/2018	B.4

Test Equipment used for RF Conducted Tests					
Equip No	Model Manufacturer	Description	Last Cal	Next Cal	Test Item
CIS053615	N9030A-550 Keysight	PXA Signal Analyzer 50 GHz	4-Apr-17	4-Apr-18	Appendix A
CIS055352	BRC50704-02 Micro-Tronics	Notch Filter 5.42 - 5.725GHz	5-Apr-17	5-Apr-18	Appendix A
CIS055579	BWS20-W2 Aeroflex	SMA 20dB Attenuator	20-Jul-17	20-Jul-18	Appendix A
CIS055577	BWS20-W2 Aeroflex	SMA 20dB Attenuator	20-Jul-17	20-Jul-18	Appendix A
CIS055353	BRC50703-02 Micro-Tronics	Notch Filter 5.15 - 5.35GHz	27-Jul-17	27-Jul-18	Appendix A
CIS055112	BRM50702-02 Micro-Tronics	Reject Band Filter	27-Jul-17	27-Jul-18	Appendix A
CIS054693	BRC50705-02 Micro-Tronics	Band Reject Filter	27-Jul-17	27-Jul-18	Appendix A
CIS054620	RA08-S1S1-12 Megaphase	SMA cable 12"	27-Jul-17	27-Jul-18	Appendix A
CIS054619	RA08-S1S1-12 Megaphase	SMA cable 12"	27-Jul-17	27-Jul-18	Appendix A
CIS054617	RA08-S1S1-12 Megaphase	SMA cable 12"	27-Jul-17	27-Jul-18	Appendix A
CIS054616	RA08-S1S1-12 Megaphase	SMA cable 12"	27-Jul-17	27-Jul-18	Appendix A
CIS054615	RA08-S1S1-12 Megaphase	SMA cable 12"	27-Jul-17	27-Jul-18	Appendix A
CIS054614	RA08-S1S1-12 Megaphase	SMA cable 12"	27-Jul-17	27-Jul-18	Appendix A
CIS054611	RA08-S1S1-12 Megaphase	SMA cable 12"	27-Jul-17	27-Jul-18	Appendix A
CIS054610	RA08-S1S1-12 MegaPhase	SMA cable 12"	27-Jul-17	27-Jul-18	Appendix A
CIS054633	F120-S1S1-48 Megaphase	SMA cable 48"	21-Sep-17	21-Sep-18	Appendix A
CIS054634	F120-S1S1-48 Megaphase	SMA cable 48"	29-Sep-17	29-Sep-18	Appendix A
CIS055929	SMSM-A2PH-012 Dynawave	12" SMA Cable	23-Oct-17	23-Oct-18	Appendix A
CIS055921	SMSM-A2PH-012 Dynawave	12" SMA Cable	23-Oct-17	23-Oct-18	Appendix A
CIS055868	SMSM-A2PH-024 Dynawave	24" SMA Cable	23-Oct-17	23-Oct-18	Appendix A
CIS055170	RFLT4WDC40GK RF Lambda	4 Way Power Divider 40GHz	22-Dec-17	22-Dec-18	Appendix A
CIS055872	SMSM-A2PH-024 Dynawave	24" SMA Cable	27-Jul-17	27-Jul-18	Appendix A
CIS055867	SMSM-A2PH-024 Dynawave	24" SMA Cable	27-Jul-17	27-Jul-18	Appendix A

Appendix E: Abbreviation Key and Definitions

The following table defines abbreviations used within this test report.

Abbreviation	Description	Abbreviation	Description
EMC	Electro Magnetic Compatibility	°F	Degrees Fahrenheit
EMI	Electro Magnetic Interference	°C	Degrees Celsius
EUT	Equipment Under Test	Temp	Temperature
ITE	Information Technology Equipment	S/N	Serial Number
TAP	Test Assessment Schedule	Qty	Quantity
ESD	Electro Static Discharge	emf	Electromotive force
EFT	Electric Fast Transient	RMS	Root mean square
EDCS	Engineering Document Control System	Qp	Quasi Peak
Config	Configuration	Av	Average
CIS#	Cisco Number (unique identification number for Cisco test equipment)	Pk	Peak
Cal	Calibration	kHz	Kilohertz (1x10 ³)
EN	European Norm	MHz	MegaHertz (1x10 ⁶)
IEC	International Electro technical Commission	GHz	Gigahertz (1x10 ⁹)
CISPR	International Special Committee on Radio Interference	H	Horizontal
CDN	Coupling/Decoupling Network	V	Vertical
LISN	Line Impedance Stabilization Network	dB	decibel
PE	Protective Earth	V	Volt
GND	Ground	kV	Kilovolt (1x10 ³)
L1	Line 1	μV	Microvolt (1x10 ⁻⁶)
L2	Line2	A	Amp
L3	Line 3	μA	Micro Amp (1x10 ⁻⁶)
DC	Direct Current	mS	Milli Second (1x10 ⁻³)
RAW	Uncorrected measurement value, as indicated by the measuring device	μS	Micro Second (1x10 ⁻⁶)
RF	Radio Frequency	μS	Micro Second (1x10 ⁻⁶)
SLCE	Signal Line Conducted Emissions	m	Meter
Meas dist	Measurement distance	Spec dist	Specification distance
N/A or NA	Not Applicable	SL	Signal Line (or Telecom Line)
P	Power Line	L	Live Line
N	Neutral Line	R	Return
S	Supply	AC	Alternating Current

End