



HCT Co., Ltd.

74, Seoicheon-ro 578beon-gil, Majang-myeon, Icheon-si, Gyeonggi-do, 17383 KOREA
Tel. +82 31 634 6300 Fax. +82 31 645 6401

SAR TEST REPORT

Applicant Name:

SAMSUNG Electronics Co., Ltd.

129, Samsung-ro, Yeongtong-gu, Suwon-Si, Gyeonggi-do, 16677 Rep.
of Korea

Date of Issue: May.14, 2022

Test Report No.: HCT-SR-2204-FC004-R2

Test Site: HCT CO., LTD.

FCC ID:

A3LSMG736B

Equipment Type:

Mobile Phone

Application Type

Certification

FCC Rule Part(s):

CFR §2.1093

Model Name:

SM-G736B/DS

Additional Model Name:

SM-G736B

Date of Test:

Mar.29, 2022 ~Apr. 22, 2022

This device has been shown to be capable of compliance for localized specific absorption rate (SAR) for uncontrolled environment/general population exposure limits specified in FCC KDB procedures and had been tested in accordance with the measurement procedures specified in FCC KDB procedures.

I attest to the accuracy of data. All measurements reported herein were performed by me or were made under my supervision and are correct to the best of my knowledge and belief. I assume full responsibility for the completeness of these measurements and vouch for the qualifications of all persons taking them.

Tested By

Jinnyeong, Choi
Test Engineer
SAR Team
Certification Division

Reviewed By

YunJeang, Heo
Technical Manager
SAR Team
Certification Division

This report only responds to the tested sample and may not be reproduced, except in full, without written approval of the HCT Co., Ltd.

REVISION HISTORY

The revision history for this test report is shown in table.

Revision No.	Date of Issue	Description
0	May.02, 2022	Initial Release
1	May. 12, 2022	RevisedU-NII-5 Frequency Range
2	May. 14, 2022	Sec 14.5, 14.6 Revised

This test results were applied only to the test methods required by the standard.

The above Test Report is not related to the accredited test result by (KS Q) ISO/IEC 17025 and KOLAS(Korea Laboratory Accreditation Scheme), which signed the ILAC-MRA.

Table of Contents

1. Test Regulations	4
2. Test Location.....	5
3. Information of the EUT	5
4. Device Under Test Description.....	7
5. Introduction.....	21
6. Description of test equipment.....	22
7. SAR Measurement Procedure	23
8. Description of Test Position	25
9. RF Exposure Limits	30
10. FCC SAR General Measurement Procedures	31
11. Output Power Specifications.....	38
12. System Verification	128
13. SAR Test Data Summary.....	132
14. Simultaneous SAR Analysis.....	150
15. SAR Measurement Variability and Uncertainty	171
16. Measurement Uncertainty.....	172
17. SAR Test Equipment	173
18. Conclusion	175
19. References	176
Appendix A. DUT Ant. Information & SETUP PHOTO	178

Appendix A. DUT Ant. Information & Test SETUP PHOTO

Appendix B. SAR Test Plots

Appendix C. Dipole Verification Plots

Appendix D. SAR Tissue Characterization

Appendix E. SAR System Validation

Appendix F. Probe Calibration Data

Appendix G. Dipole Calibration Data

Appendix H. Power reduction verification

Appendix I. DLCA Power Measurement

1. Test Regulations

The tests documented in this report were performed in accordance with FCC CFR § 2.1093, IEEE 1528-2013, ANSI C63.26-2015 the following FCC Published RF exposure KDB procedures:

- FCC KDB Publication 941225 D01 3G SAR Procedures v03r01
- FCC KDB Publication 941225 D06 Hot Spot SAR v02r01
- FCC KDB Publication 941225 D05 SAR for LTE Devices v02r05
- FCC KDB Publication 941225 D05A LTE Rel.10 KDB Inquiry sheet v01r02
- FCC KDB Publication 248227 D01 802.11 WLANSAR v02r02
- FCC KDB Publication 447498 D01 General SAR Guidance v06
- FCC KDB Publication 648474 D04 Handset SAR v01r03
- FCC KDB Publication 616217 D04 v01r02 (Proximity Sensor)
- FCC KDB Publication 865664 D01 SAR measurement 100 MHz to 6 GHz v01r04
- FCC KDB Publication 865664 D02 SAR Reporting v01r02
- FCC KDB Publication 690783 D01 SAR Listings on Grants v01r03
- FCC KDB Publication 971168 D01 Power Meas License Digital Systems v03r01

In Addition to the above, the following information was used.

- October 2013 TCB Workshop Notes (GPRS testing criteria)
- October 2014 TCB Workshop Notes (Overlapping LTE Bands)
- April 2015 TCB Workshop Notes (Simultaneous transmission summation clarified)
- October 2016 TCB Workshop Notes (Bluetooth Duty Factor)
- November 2017 TCBC Workshop Notes (LTE Carrier Aggregation)
- April 2018 TCBC Workshop Notes (LTE DL CA SAR Test Exclusion)
- November 2019 TCBC Workshop Notes (SPLSR Hotspot Combination)

2. Test Location

2.1 Test Laboratory

Company Name	HCT Co., Ltd.
Address	74, Seoicheon-ro 578beon-gil, Majang-myeon, Icheon-si, Gyeonggi-do, 17383 KOREA
Telephone	031-645-6300
Fax.	031-645-6401

2.2 Test Facilities

Our laboratories are accredited and approved by the following approval agencies according to ISO/IEC 17025.

Korea	National Radio Research Agency (Designation No. KR0032)
	KOLAS (Testing No. KT197)

3. Information of the EUT

3.1 General Information of the EUT

Model Name	SM-G736B/DS
Equipment Type	Mobile Phone
FCC ID	A3LSMG736B
Additional Model Name	SM-G736B
Application Type	Certification
Applicant	SAMSUNG Electronics Co., Ltd.

3.2 Attestation of test result of device under test

The Highest Reported SAR						
Band	Tx. Frequency	Equipment Class	Reported SAR (W/kg)			
			1g Head	1g Body-Worn	1g Hotspot	10g Extremity
GSM/GPRS/EDGE 850	824.2 MHz ~ 848.8 MHz	PCE	0.53	0.50	0.45	N/A
GSM/GPRS/EDGE 1900	1 850.2 MHz~ 1 909.8 MHz	PCE	0.34	0.26	0.30	N/A
UMTS Band 5	826.4 MHz~ 846.6 MHz	PCE	0.39	0.39	0.91	N/A
UMTS Band 4	1 712.4 MHz~ 1 752.6 MHz	PCE	0.22	0.27	0.47	N/A
UMTS Band 2	1 852.4 MHz~ 1 907.6 MHz	PCE	0.42	0.35	0.66	N/A
LTE Band 2 (PCS)	1 850.7 MHz~ 1 909.3 MHz	PCE	0.48	0.62	0.67	2.53
LTE Band 4 (AWS)	1 710.7 MHz~ 1 754.3 MHz	PCE	N/A	N/A	N/A	N/A
LTE Band 5 (Cell)	824.7 MHz~ 848.3 MHz	PCE	N/A	N/A	N/A	N/A
LTE Band 12	699.7 MHz~ 715.3 MHz	PCE	0.25	0.31	0.66	N/A
LTE Band 17	706.5 MHz~ 713.5 MHz	PCE	N/A	N/A	N/A	N/A
LTE Band 26(Cell)	814.7 MHz~ 848.3 MHz	PCE	0.37	0.42	0.80	N/A
LTE Band 41	2 498.5 MHz ~ 2 687.5 MHz	PCE	0.19	0.45	0.89	N/A
LTE Band 66 (AWS)	1 710.7 MHz ~ 1 779.3 MHz	PCE	0.40	0.56	0.49	N/A
802.11b	2 412 MHz~ 2 472 MHz	DTS	<0.10	0.81	0.43	N/A
U-NII-1	5 180 MHz~ 5 240 MHz	NII	N/A	N/A	N/A	N/A
U-NII-2A	5 260 MHz~ 5 320 MHz	NII	<0.10	0.50	N/A	2.18
U-NII-2C	5 500 MHz~ 5 720 MHz	NII	0.15	0.43	N/A	2.47
U-NII-3	5 745 MHz~ 5 825 MHz	NII	0.11	0.37	0.77	N/A
Bluetooth	2 402 MHz~ 2 480 MHz	DSS	<0.10	0.39	0.83	N/A
Simultaneous SAR per KDB 690783 D01v01r03			0.71	1.58	1.59	3.79
Date(s) of Tests:	Mar. 29, 2022 ~ Apr. 22, 2022					

4. Device Under Test Description

4.1 DUT specification

Device Wireless specification overview		
Band& Mode	Operating Mode	Tx Frequency
GSM/GPRS/EDGE 850	Voice / Data	824.2 MHz~ 848.8 MHz
GSM/GPRS/EDGE 1900	Voice / Data	1 850.2 MHz~ 1 909.8 MHz
UMTS Band 5	Voice / Data	826.4 MHz~ 846.6 MHz
UMTS Band 4	Voice / Data	1 712.4 MHz~ 1 752.6 MHz
UMTS Band 2	Voice / Data	1 852.4 MHz~ 1 907.6 MHz
LTE Band 2 (PCS)	Voice / Data	1 850.7 MHz~ 1 909.3 MHz
LTE Band 4 (AWS)	Voice / Data	1 710.7 MHz~ 1 754.3 MHz
LTE Band 5 (Cell)	Voice / Data	824.7 MHz~ 848.3 MHz
LTE Band 12	Voice / Data	699.7 MHz~ 715.3 MHz
LTE Band 17	Voice / Data	706.5 MHz~ 713.5 MHz
LTE Band 26	Voice / Data	814.7 MHz~ 848.3 MHz
LTE Band 41	Voice / Data	2 498.5 MHz ~ 2 687.5 MHz
LTE Band 66 (AWS)	Voice / Data	1 710.7 MHz ~ 1 779.3 MHz
U-NII-1	Voice / Data	5 180 MHz ~ 5 240 MHz
U-NII-2A	Voice / Data	5 260 MHz ~ 5 320 MHz
U-NII-2C	Voice / Data	5 500 MHz ~ 5 720 MHz
U-NII-3	Voice / Data	5 745 MHz ~ 5 825 MHz
U-NII-5	Voice / Data	5 955 MHz~ 6 415 MHz
U-NII-6	Voice / Data	6 435 MHz~ 6 525 MHz
U-NII-7	Voice / Data	6 535 MHz~ 6 875 MHz
U-NII-8	Voice / Data	6 895 MHz~ 7 115 MHz
2.4 GHz WLAN	Voice / Data	2 412 MHz~ 2 472 MHz
Bluetooth	Data	2 402 MHz ~ 2 480 MHz
NFC	Data	13.56 MHz
Device Description		
HW version	REV1.0	
SW version	G736B.001	
Device Serial Numbers	Mode	Serial Number
	GSM850 / GSM1900 / UMTS B5 / LTE B5	VC01579M
	UMTS B2 / UMTS B4 / LTE B2 /LTE B41 / LTE B66	VC01523M
	LTE B5 / LTE B12 / LTE B26	VC01612M
	2.4GHz WLAN	VCI0420M
	Bluetooth/ 5GHz WLAN / 6GHz WLAN	VCI0409M, VDC0389M
	The manufacturer has confirmed that the devices tested have the same physical, mechanical and thermal characteristics are within operational tolerances expected for production units.	

4.2 Power Reduction for SAR

This device utilizes power reduction mechanisms for some wireless modes and bands for SAR compliance under hotspot conditions and under some conditions when the device is being used in close proximity to the user's hand. All hotspot SAR evaluations for this device were performed at the maximum allowed output power when Hotspot is enabled. FCC KDB Publication 616217 D04v01r02 Sec.6 was used as a guideline for selection SAR test distances for device when being used in phablet use conditions.

This device uses an independent fixed level power reduction mechanism for WLAN operations when during all voice or VoIP held to ear scenarios. Per FCC Guidance, the held-to-ear exposure conditions were evaluated at reduced power according to the head SAR positions described in IEEE 1528-2013.

Detailed descriptions of the power reduction mechanism are included in the operational description.

The reduced powers for the power reduction mechanisms were conformed via conducted power measurements at the RF Port.

4.3 Nominal and Maximum Output Power Specifications

This device operates using the following maximum output power specifications. SAR values were scaled to the maximum allowed power to determine compliance per KDB publication 447498 D01v06.

4.3.12G/3G/4G/5G Nominal and Maximum Output Power

A. GSM Modes

Maximum Output Power

Mode / Band		Voice	Burst Average GMSK (dBm)				Burst Average 8-PSK (dBm)			
		1 Tx Slot	1 Tx Slot	2 Tx Slot	3 Tx Slot	4 Tx Slot	1 Tx Slot	2 Tx Slot	3 Tx Slot	4 Tx Slot
GSM/GPRS/EDGE 850	Maximum	33.00	33.00	32.00	30.00	27.50	27.00	25.50	23.50	22.00
	Nominal	32.00	32.00	31.00	29.00	26.50	26.00	24.50	22.50	21.00
GSM/GPRS/EDGE1900	Maximum	31.50	31.50	29.50	27.50	25.00	26.50	25.00	23.00	22.00
	Nominal	30.50	30.50	28.50	26.50	24.00	25.50	24.00	22.00	21.00

(Tolerance: Nominal +1dB ~-1.5dB)

Hotspot Mode / Earjack Insert Mode

Mode / Band		Voice	Burst Average GMSK (dBm)				Burst Average 8-PSK (dBm)			
		1 Tx Slot	1 Tx Slot	2 Tx Slot	3 Tx Slot	4 Tx Slot	1 Tx Slot	2 Tx Slot	3 Tx Slot	4 Tx Slot
GSM/GPRS/EDGE 850	Maximum	31.00	31.00	29.50	27.50	25.50	27.00	25.50	23.50	22.00
	Nominal	30.00	30.00	28.50	26.50	24.50	26.00	24.50	22.50	21.00
GSM/GPRS/EDGE1900	Maximum	28.50	28.50	26.50	24.50	22.50	26.50	25.00	23.00	22.00
	Nominal	27.50	27.50	25.50	23.50	21.50	25.50	24.00	22.00	21.00

(Tolerance: Nominal +1dB ~-1.5dB)

Grip Sensor on

Mode / Band		Voice	Burst Average GMSK (dBm)				Burst Average 8-PSK (dBm)			
		1 Tx Slot	1 Tx Slot	2 Tx Slot	3 Tx Slot	4 Tx Slot	1 Tx Slot	2 Tx Slot	3 Tx Slot	4 Tx Slot
GSM/GPRS/EDGE1900	Maximum	28.50	28.50	26.50	24.50	22.50	26.50	25.00	23.00	22.00
	Nominal	27.50	27.50	25.50	23.50	21.50	25.50	24.00	22.00	21.00

(Tolerance: Nominal +1dB ~-1.5dB)

B. UMTSModes

Maximum Output Power

Mode/Band		ModulatedAverage(dBm)			
		3GPPUMTS	3GPPHSDPA	3GPPHSUPA	DC-HSDPA
UMTS Band 5 (850 MHz)	Maximum	24.50	23.50	23.50	23.00
	Nominal	23.50	22.50	22.50	22.00
UMTS Band 4 (1700 MHz)	Maximum	24.00	23.50	23.50	23.50
	Nominal	23.00	22.50	22.50	22.50
UMTS Band 2 (1900 MHz)	Maximum	24.00	23.50	23.50	23.50
	Nominal	23.00	22.50	22.50	22.50

(Tolerance: Nominal +1dB ~-1.5dB)

Hotspot Mode / Grip Sensor on/ Earjack Insert Mode

Mode/Band		ModulatedAverage(dBm)			
		3GPPUMTS	3GPPHSDPA	3GPPHSUPA	DC-HSDPA
UMTS Band 4 (1700 MHz)	Maximum	22.00	21.50	21.50	21.50
	Nominal	21.00	20.50	20.50	20.50
UMTS Band 2 (1900 MHz)	Maximum	22.00	21.50	21.50	21.50
	Nominal	21.00	20.50	20.50	20.50

(Tolerance: Nominal +1dB ~-1.5dB)

C. LTE Modes

Mode / Band		Modulated Average (dBm)		
		Max.	Hotspot Mode	Grip Sensor on Earjack Insert Mode
LTE Band 2 (PCS)	Maximum	25.00	22.00	22.00
	Nominal	24.00	21.00	21.00
LTE Band 4 (AWS)	Maximum	25.00	22.00	22.00
	Nominal	24.00	21.00	21.00
LTE Band 5 (Cell)	Maximum	25.00		
	Nominal	24.00		
LTE Band 12	Maximum	25.00		
	Nominal	24.00		
LTE Band 17	Maximum	25.00		
	Nominal	24.00		
LTE Band 26(Cell)	Maximum	25.00		
	Nominal	24.00		
LTE TDD Band 41	Maximum	25.00		
	Nominal	24.00		
LTE Band 66 (AWS)	Maximum	25.00	22.00	22.00
	Nominal	24.00	21.00	21.00

(Tolerance: Nominal +1dB ~-1.5dB)

4.3.2 Maximum output power

2.4 GHz, 5 GHz WIFI

Mode	SISO(ANT 1)						SISO(ANT 2)						MIMO						
	a	b	g	n	ac	ax (SU)	a	b	g	n	ac	ax (SU)	a	b	g	n	ac	ax (SU)	
2.4GHz								15 Ch6:16 Ch12 :5 Ch13:0	16 Ch11:15 Ch12:5 Ch13:0	16 Ch11: 15 Ch12: 5 Ch13: 0		16 Ch11:14 Ch12 :5 Ch13:0		18 Ch6:1 9 Ch12 : 8 Ch13: 3	19 Ch11: 18 Ch12 : 8 Ch13: 3	19 Ch11:18 Ch12 :8 Ch13:3		19 Ch11:17 Ch12 :8 Ch13:3	
5GHZ (20MHz)	16 Ch40,48 :15 ch36,64,165 :10 Ch100:13												19 Ch40,48 :18 ch36,64,165 :13 Ch100:16			19 Ch40,48 :18 ch36,64,165 :13 Ch100:16	18 ch36,64,165 :13 Ch100:16	17 ch36 : 13.5 ch40,48 : 17.5 ch64,165 :1 3 Ch100:14	
5GHZ (40MHz)																	17 ch38 :13 Ch62 :13 Ch102 :16 Ch159 :13	17 ch38 :13 Ch62 :13 Ch102 :16 Ch159 :13	17 ch38 :13.5 ch46 : 17.5 Ch62,159 :1 3 Ch102 :14
5GHZ (80MHz)																		15 Ch42 :13 Ch58 :13 Ch106:14 Ch155 :13	15 Ch42 :13.5 Ch58,106,1 55 :13
5GHZ (160MHz)																		14.5 Ch50 : 2	14.5 Ch50 : 2.5
6-7GHZ (20MHz)	4																		7 Ch93,185 :6 .5
6-7GHZ (40MHz)																			7.5
6-7GHZ (80MHz)																			7.5
6-7GHZ (160MHz)																			7.5

(Upper Tolerance: Target +1dB)

802.11ax RU Tx Power

Tones	MIMO (ANT1+2) /in dBm				
	2.4G	5G/20Mhz	5G/40Mhz	5G/80Mhz	5G/160Mhz
	Ch & RU index	Ch & RU index	Ch & RU index	Ch & RU index	Ch & RU index
26T	15 Ch1 : 14 Ch12 :8 Ch13:1	13 ch36~48 : 10 ch100 : 14	13 ch38~46 :10 ch102 : 14	13 Ch42 : 10.5	12.5 Ch50 : 2.5
52T	15 Ch1 : 14 Ch12 :8 Ch13:3	14 ch36~48 :13 ch64,165:13 ch100 : 14.5	14 ch38~46 :13.5 ch62,159:13 Ch102:15	14 Ch42 :13.5 Ch58,106,155 :13	13.5 Ch50 : 2.5
106T	15 Ch1 : 14 Ch12 :8 Ch13:3	14 ch36 :13.5 ch40,48 :14.5 ch64,165:13 ch100 : 14.5	14 ch38 :13.5 ch46 :14.5 Ch62,159:13 Ch102:15	14 Ch42 :13.5 Ch58,106,155 :13	13.5 Ch50 : 2.5
242T	19 Ch1,10,11 : 14 Ch2,9 : 15 Ch3,8 : 16 Ch12 :8 Ch13:3	17 ch36 :13.5 ch40,48 :17.5 ch64,165:13 Ch100:14	17 ch38 :13.5 ch46 :17.5 ch62,159:13 Ch102:14	17 Ch42 :13.5 Ch58,106,155 :13	13.5 Ch50 : 2.5
484T			17 ch38 :13.5 ch46 :17.5 Ch62,159 :13 Ch102 :14	17 Ch42 :13.5 Ch58,106,155 :13	13.5 Ch50 : 2.5
996T				15 Ch42 :13.5 Ch58,106,155 :13	14.5 Ch50 : 2.5

(Upper Tolerance: Target +1 dB)

4.3.3 Reduced output power

2.4 GHz, 5 GHz WIFI (Receiver Active)

Mode	SISO(ANT 1)						SISO(ANT 2)						MIMO					
	a	b	g	n	ac	ax (SU)	a	b	g	n	ac	ax (SU)	a	b	g	n	ac	ax (SU)
2.4GHz								12 Ch12:5 Ch13:0	12 Ch12:5 Ch13:0	12 Ch12:5 Ch13:0		12 Ch12:5 Ch13:0		15 Ch12:8 Ch13:3	15 Ch12:8 Ch13:3	15 Ch12:8 Ch13:3		15 Ch12:8 Ch13:3
5GHZ (20MHz)	10												13				13	13
5GHZ (40MHz)																	13	13
5GHZ (80MHz)																		13
5GHZ (160MHz)																		12.5 Ch50 :2

(Upper Tolerance: Target +1 dB)

802.11ax RU Tx Power (Receiver Active)

Tones	MIMO (ANT1+2) /in dBm				
	2.4G	5G/20Mhz	5G/40Mhz	5G/80Mhz	5G/160Mhz
	Ch & RU index	Ch & RU index	Ch & RU index	Ch & RU index	Ch & RU index
26T	15 Ch1 : 14 Ch12 : 8 Ch13:1	13 ch36~48 : 10	13 ch38~46 : 7	13 Ch42 : 10	12.5 Ch50 :2
52T	15 Ch1 : 14 Ch12 : 8 Ch13:3	13	13	13	12.5 Ch50 :2
106T	15 Ch1 : 14 Ch12 : 8 Ch13:3	13	13	13	12.5 Ch50 :2
242T	15 Ch1 : 14 Ch12 : 8 Ch13:3	13	13	13	12.5 Ch50 :2
484T			13	13	12.5 Ch50 :2
996T				13	12.5 Ch50 :2

(Upper Tolerance: Target +1 dB)

2.4 GHz, 5 GHz WIFI (Hotspot)

Mode	SISO(ANT 1)						SISO(ANT 2)						MIMO					
	a	b	g	n	ac	ax (SU)	a	b	g	n	ac	ax (SU)	a	b	g	n	ac	ax (SU)
2.4GHz								10 Ch12:5 Ch13:0	10 Ch12:5 Ch13:0	10 Ch12:5 Ch13:0		10 Ch12:5 Ch13:0		13 Ch12:8 Ch13:3	13 Ch12:8 Ch13:3	13 Ch12:8 Ch13:3		13 Ch12:8 Ch13:3

(Upper Tolerance: Target +1 dB)

802.11ax RU Tx Power (Hotspot)

Tones	MIMO (ANT1+2) /in dBm				
	2.4G				
	Ch & RU index				
26T	13 Ch12 :8 Ch13:1				
52T	13 Ch12 :8 Ch13:3				
106T	13 Ch12 :8 Ch13:3				
242T	13 Ch12 :8 Ch13:3				

(Upper Tolerance: Target +1 dB)

4.3.4 Maximum Bluetooth Power

Mode / Band		Modulated Average (dBm)		
		2 402 MHz	2 441 MHz	2 480 MHz
Bluetooth (1Mbps)	Maximum	14.5	14.5	14.5
	Nominal	13.5	13.5	13.5
Bluetooth (EDR)	Maximum	13.5	13.5	13.5
	Nominal	12.5	12.5	12.5

Mode / Band		Modulated Average (dBm)
Bluetooth (LE)	Maximum	9.0
	Nominal	8.0

(Upper Tolerance: Target +1dB)

4.4 LTE Information

Item.	Description
Frequency Range	LTE Band 2 (PCS)
	1 850.7 MHz~ 1 909.3 MHz
	LTE Band 4 (AWS)
	1 710.7 MHz~ 1 754.3 MHz
	LTE Band 5 (Cell)
	824.7 MHz~ 848.3 MHz
	LTE Band 12
	699.7 MHz~ 715.3 MHz
Channel Bandwidths	LTE Band 17
	706.5 MHz~ 713.5 MHz
	LTE Band 26 (Cell)
	814.7 MHz~ 848.3 MHz
	LTE TDD Band 41
	2 498.5 MHz ~ 2 687.5 MHz
	LTE Band 66 (AWS)
	1 710.7 MHz ~ 1 779.3 MHz
	LTE Band 2 (PCS)
	1.4 MHz, 3 MHz, 5 MHz, 10 MHz, 15 MHz, 20 MHz
	LTE Band 4 (AWS)
	1.4 MHz, 3 MHz, 5 MHz, 10 MHz, 15 MHz, 20 MHz
	LTE Band 5 (Cell)
	1.4 MHz, 3 MHz, 5 MHz, 10 MHz
	LTE Band 12
	1.4 MHz, 3 MHz, 5 MHz, 10 MHz
	LTE Band 17
	5 MHz, 10 MHz
	LTE Band 26 (Cell)
	1.4 MHz, 3 MHz, 5 MHz, 10 MHz, 15 MHz
	LTE TDD Band 41
	5 MHz, 10 MHz, 15 MHz, 20 MHz
	LTE Band 66 (AWS)
	1.4 MHz, 3 MHz, 5 MHz, 10 MHz, 15 MHz, 20 MHz

Ch. No.&Freq.(MHz)	Low	Mid	High
LTE Band 2 (PCS)	1.4 MHz	1 850.7 (18607)	1 880.0 (18900)
	3 MHz	1 851.5 (18615)	1 880.0 (18900)
	5 MHz	1 852.5 (18625)	1 880.0 (18900)
	10 MHz	1 855.0 (18650)	1 880.0 (18900)
	15 MHz	1 857.5 (18675)	1 880.0 (18900)
	20 MHz	1 860.0 (18700)	1 880.0 (18900)
LTE Band 4 (AWS)	1.4 MHz	1 710.7 (19957)	1 732.5 (20175)
	3 MHz	1 711.5 (19965)	1 732.5 (20175)
	5 MHz	1 712.5 (19975)	1 732.5 (20175)
	10 MHz	1 715.0 (20000)	1 732.5 (20175)
	15 MHz	1 717.5 (20025)	1 732.5 (20175)
	20 MHz		1 732.5 (20175)
LTE Band 5 (Cell)	1.4 MHz	824.7 (20407)	836.5 (20525)
	3 MHz	825.5 (20415)	836.5 (20525)
	5 MHz	826.5 (20425)	836.5 (20525)
	10 MHz		836.5 (20525)
LTE Band 12	1.4 MHz	699.7 (23017)	707.5 (23095)
	3 MHz	700.5 (23025)	707.5 (23095)
	5 MHz	701.5 (23035)	707.5 (23095)
	10 MHz		707.5 (23095)
LTE Band 17	5 MHz		710.0(23790)
	10 MHz		710.0(23790)
LTE Band 26 (Cell)	1.4 MHz	814.7 (26697)	831.5 (26865)
	3 MHz	815.5 (26705)	831.5 (26865)
	5 MHz	816.5 (26715)	831.5 (26865)
	10 MHz	819.0 (26740)	831.5 (26865)
	15 MHz		831.5 (26865)

Ch. No.&Freq.(MHz)		Low		Mid		High	
LTE Band 66 (AWS)	1.4 MHz	1 710.7 (131979)		1 745 (132322)		1 779.3 (132665)	
	3 MHz	1 711.5 (131987)		1 745 (132322)		1 778.5 (132657)	
	5 MHz	1 712.5 (131997)		1 745 (132322)		1 777.5 (132647)	
	10 MHz	1 715.0 (132022)		1 745 (132322)		1 775.0 (132622)	
	15 MHz	1 717.5 (132047)		1 745 (132322)		1 772.5 (132597)	
	20 MHz	1 720.0 (132072)		1 745 (132322)		1 770.0 (132572)	
LTE TDD Band 41	5 MHz	2506.0(39750)	2549.5(40185)	2593.0(40620)	2636.5(41055)	2680.0(41490)	
	10 MHz	2506.0(39750)	2549.5(40185)	2593.0(40620)	2636.5(41055)	2680.0(41490)	
	15 MHz	2506.0(39750)	2549.5(40185)	2593.0(40620)	2636.5(41055)	2680.0(41490)	
	20 MHz	2506.0(39750)	2549.5(40185)	2593.0(40620)	2636.5(41055)	2680.0(41490)	
UE Category		LTE Rel. 15 DL: Category 18, UL: Category 18					
Modulations Supported in UL		QPSK, 16QAM, 64QAM, 256QAM					
LTE MPR Permanently implemented per 3GPP TS 36.101 section 6.2.3		Yes					
A-MPR disabled for SAR Testing.		Yes					
LTE Carrier Aggregation		Down-Link CA	This device supports DL-link Carrier aggregations Inter-band & Intra-band DL 2CA, DL 3CA, DL 4CA Detailed information of Down-Link CA are included in the Appendix.I and Technical Description document				
LTE Release information		This device does not support full CA features on 3GPP Release 15. It supports carrier aggregation, downlink MIMO. All other uplink communications are identical to te release 8 specifications. The following LTE Release 15 Features are not supported: Relay, Hetnet, Enhanced eICI, MDH, cross-carrier Scheduling, Enhanced SC-FDMA.					

4.5 DUT Antenna Locations

The overall dimensions of this device are > 9 X 5 cm. A diagram showing device antenna can be found in SAR_setup_photos. Since the diagonal dimension of this device is > 160 mm and < 200 mm, it is considered a “phablet”.

This model allows users to exchange data or media files with other Bluetooth enabled devices using Bluetooth, which means they can connect to other Bluetooth enabled devices via Bluetooth tethering. Therefore, SAR test was performed for additional simultaneous transmissions.

Head and Bluetooth Tethering SAR were evaluated for BT BR tethering applications.

Antenna	Mode	Rear	Front	Left	Right	Bottom	Top
Main 1	GSM/GPRS/EDGE 850	Yes	Yes	Yes	Yes	Yes	No
Main 2	GSM/GPRS/EDGE 1900	Yes	Yes	Yes	No	Yes	No
Main 1	UMTS Band 5	Yes	Yes	Yes	Yes	Yes	No
Main 2	UMTS Band 4	Yes	Yes	Yes	No	Yes	No
Main 2	UMTS Band 2	Yes	Yes	Yes	No	Yes	No
Main 2	LTE Band 2 (PCS)	Yes	Yes	Yes	No	Yes	No
Main 2	LTE Band 4 (AWS)	Yes	Yes	Yes	No	Yes	No
Main 1	LTE Band 12	Yes	Yes	Yes	Yes	Yes	No
Main 1	LTE Band 17	Yes	Yes	Yes	Yes	Yes	No
Main 1	LTE Band 26 (Cell)	Yes	Yes	Yes	Yes	Yes	No
Main 2	LTE TDD Band 41	Yes	Yes	Yes	No	Yes	No
Main 2	LTE Band 66 (AWS)	Yes	Yes	Yes	No	Yes	No
Sub 2	2.4 GHz WLAN 1 5 GHz/6 GHz WLAN 2	Yes	Yes	Yes	No	No	Yes
Sub 3	5 GHz/6 GHz WLAN 1	Yes	Yes	Yes	No	No	Yes
Sub 4	2.4 GHz WLAN 2	Yes	Yes	Yes	No	No	Yes
Sub 2	Bluetooth	Yes	Yes	Yes	No	No	Yes

Particular EUT edges were not required to be evaluated for Bluetooth Tethering and Hotspot SAR if the edges were > 25 mm from the transmitting antenna according to FCC KDB 941225 D06v02r01 on page 2.

The distance between the transmit antennas and the edges of the device are included in the filing.

- Note: All test configurations are based on front view position.

4.6 Near Field Communications (NFC) Antenna

This EUT has NFC operations. The NFC antenna is integrated into the device for this model. Therefore, all SAR tests were performed with the device which already incorporates the NFC antenna. A diagram showing the location of the NFC antenna can be found in SAR _ Setup_ photos.

4.7 SAR Summation Scenario

According to FCC KDB 447498 D01v06, transmitters are considered to be transmitting simultaneously when there is overlapping transmission, with the exception of transmissions during network hand-offs with maximum hand-off duration less than 30 seconds. Possible transmission paths for the EUT are shown below paths and are mode in same rectangle to indicate communication modes which share the same path. Modes which share the same transmission path cannot transmit simultaneously with one another.

This device contains multiple transmitters that may operate simultaneously, and therefore requires a simultaneous transmission analysis according to FCC KDB 447498 D01v06.

Simultaneous Transmission Scenarios				
Applicable Combination	Head	BodyWorn	Hotspot	Extremity
GSM Voice + Bluetooth	Yes^	Yes	N/A	Yes
GSM Voice + Bluetooth + WLAN6E MIMO	Yes^	Yes	N/A	Yes
GSM Voice + Bluetooth + 5GHz WLAN MIMO	Yes^	Yes	N/A	Yes
GSM Voice + Bluetooth + 2.4GHz WLAN Ant 2	Yes^	Yes	N/A	Yes
GSM Voice + 2.4 WLAN MIMO	Yes	Yes	N/A	Yes
GSM Voice + 5GHz WLAN MIMO	Yes	Yes	N/A	Yes
GSM Voice+ WLAN6E MIMO	Yes	Yes	N/A	Yes
GSM GPRS/EDGE+ Bluetooth	Yes^*	Yes	Yes^	Yes
GSM GPRS/EDGE + Bluetooth + WLAN6E MIMO	Yes^*	Yes	Yes^	Yes
GSM GPRS/EDGE + Bluetooth + 5GHz WLAN MIMO	Yes^*	Yes	Yes^	Yes
GSM GPRS/EDGE + Bluetooth + 2.4GHz WLAN Ant 2	Yes^*	Yes	Yes^	Yes
GSM GPRS/EDGE + 2.4 WLAN MIMO	Yes*	Yes	Yes	Yes
GSM GPRS/EDGE + 5GHz WLAN MIMO	Yes*	Yes	Yes	Yes
GSM GPRS/EDGE + WLAN6E MIMO	Yes*	Yes	Yes	Yes
UMTS + Bluetooth	Yes^	Yes	Yes^	Yes
UMTS + Bluetooth + WLAN6E MIMO	Yes^	Yes	Yes^	Yes
UMTS + Bluetooth + 5GHz WLAN MIMO	Yes^	Yes	Yes^	Yes
UMTS + Bluetooth + 2.4GHz WLAN Ant 2	Yes^	Yes	Yes^	Yes
UMTS + 2.4 WLAN MIMO	Yes	Yes	Yes	Yes
UMTS + 5GHz WLAN MIMO	Yes	Yes	Yes	Yes
UMTS + WLAN6E MIMO	Yes	Yes	Yes	Yes
LTE + Bluetooth	Yes^	Yes	Yes^	Yes
LTE + Bluetooth + WLAN6E MIMO	Yes^	Yes	Yes^	Yes
LTE + Bluetooth + 5GHz WLAN MIMO	Yes^	Yes	Yes^	Yes
LTE + Bluetooth + 2.4GHz WLAN Ant 2	Yes^	Yes	Yes^	Yes
LTE + 2.4 WLAN MIMO	Yes*	Yes	Yes	Yes
LTE + 5GHz WLAN MIMO	Yes*	Yes	Yes	Yes
LTE + WLAN6E MIMO	Yes*	Yes	Yes	Yes

Note:

- Bluetooth cannot transmit simultaneously with 2.4GHz WLAN.
- 5GHz WLAN can transmit simultaneously with Bluetooth
- UMTS +WLAN scenario also represents the UMTS Voice/DATA + WLAN hotspot scenario.
- VoIP is supported in GPRS/EDGE.
- The highest reported SAR for each exposure condition is used for SAR summation purpose.
- WLANHotspot is supported for 2.4 GHz/ UNII-3 of 5 GHz WLAN.
- Per the manufacture, WIFI Direct is not expected to be used in conjunction with a held to ear or body-worn accessory voice call. Therefore, there are no simultaneous transmission scenarios involving WIFI direct beyond that listed in the above table
- This device supports Bluetooth tethering. ^ BluetoothTetheringis considered.
- * Pre-installed VOIP applications areconsidered.
- This device supports VoLTE/ VoWiFi.

4.8 SAR Test Considerations

4.8.1 WiFi

Since wireless router operations are not allowed by the chipset firmware using U-NII-1, U-NII-2A & U-NII-2C WiFi, WiFi Hotspot SAR test and combinations are considered only 2.4 GHz and U-NII-3 for SAR with respected to wireless router configurations according to FCC KDB 941225 D06v02r01.

Since U-NII-1 and U-NII-2A bands have the same maximum output power and the highest reported SAR for U-NII-2A is less than 1.2 W/kg for 1g SAR and is less than 3.0 W/kg for 10g SAR, SAR is not required for U-NII-1 band according to FCC KDB 248227D01v02r02.

This device supports IEEE 802.11 ac with the following features:

- a) Up to 160MHz Bandwidth only for 5/6 GHz
- b) Up to 20MHz Bandwidth only for 2.4 GHz
- c) 2Tx Antenna output
- d) Up to 1024 QAM is supported
- e) TDWR and Band gap channels are supported for 5/6 GHz
- f) Straddle channels are supported.

Per FCC KDB Publication 648474 D04v01r03, this device is considered a "phablet" since the diagonal dimension is greater than 160mm and less than 200mm. Phablet SAR tests are required when wireless router mode does not apply or if wireless router 1g SAR > 1.2 W/kg. Because wireless router operations are not supported for U-NII-1, U-NII-2A & U-NII-2C WLAN, phablet SAR tests were performed. Phablet SAR was not evaluated for 2.4 GHz WIFI, 2.4 GHz Bluetooth, and U-NII-3 WLAN operations since wireless router 1g SAR was < 1.2 W/kg.

This device supports 6GHz WLAN operations. RF Exposure assessment for these bands can be found in the WIFI 6E RF exposure Report.

4.8.2 Licensed Transmitter(s)

GSM/GPRS/EDGE DTM is not supported for US Bands. Therefore, the GSM Voice modes in this report do not transmit simultaneously with GPRS/EDGE Data.

LTE SAR for the higher modulations and lower Bandwidths were not tested since the maximum average output power of all required channels and configurations was not more than 0.5 dB higher than the highest Bandwidth; and the reported LTE SAR for the highest Bandwidth was less than 1.45 W/kg for all configurations according to FCC KDB 941225 D05v02r05.

Per FCC KDB 648474 D04v01r03, this device is considered a "Phablet" since the diagonal dimension is greater than 160 mm and less than 200 mm. Therefore, extremity SAR tests are required when wireless router mode does not apply or if wireless router 1g SAR > 1.2 W/kg. When hotspot mode applies, 10g SAR required only for the surfaces and edges with hotspot mode scaled to the maximum output power (including tolerance) is 1g SAR > 1.2 W/kg.

This Device supports 64QAM on the uplink and 256QAM on the downlink for LTE Operations. Conducted powers for 64QAM uplink configurations were measured per section 5.1 of FCC KDB 941225 D05v02r05. SAR was not required for 64QAM since the highest maximum output power for 64QAM is ≤ 0.5dB higher than the same configuration in QPSK and the reported SAR for QPSK configuration is ≤ 1.45 W/Kg, per section 5.2.4 for FCC KDB 941225 D05v02r05.

This device supports downlink 4x4 MIMO operations for some LTE Bands. Per May 2017 TCB Workshop Notes, SAR for 4x4 DL MIMO was not needed since the maximum average output power in 4x4 DL MIMO mode was not more than 0.25 dB higher than the maximum output power with 4x4 DL MIMO inactive.

This device supports LTE capabilities with overlapping transmission frequency ranges. When the supported frequency range of LTE Band falls completely within an LTE Band with a larger transmission frequency range, both LTE bands have the same target power or the band with the larger transmission frequency range has a higher target power and both LTE bands share the same transmission path and signal characteristics, SAR was only tested for the band with the larger transmission frequency range.

LTE Band 4 (1 710.7 MHz ~ 1 754.3 MHz) is covered by LTE Band 66 (1 710.7 MHz ~ 1 779.3 MHz) each both LTE bands have the same target powers

LTE Band 17 (706.5 MHz~ 713.5 MHz) is covered by LTE Band 12 (699.7 MHz~ 715.3 MHz) each both LTE bands have the same target powers

LTE Band 5 (824.7 MHz~ 848.3 MHz) is covered by LTE Band 26 (814.7 MHz~ 848.3 MHz) each both LTE bands have the same target powers

This device supports LTE Carrier Aggregation (CA) in the downlink. All uplink communications are identical to Release 8 specifications. Per FCC KDB publication 941225 D05A v01r02, SAR for LTE DL CA operations was not needed since the maximum average output power in LTE CA mode was not >0.25 dB higher than the maximum output power when downlink carrier aggregation was inactive.

This device is only capable of QPSK HSUPA in the uplink. Therefore, no additional SAR tests are required beyond that described for devices with HSUPA in KDB 941225 D01v03r01.

Per FCC KDB 941225 D01v03r01, 12.2 kbps RMC is the primary mode and HSPA (HSUPA/HSDPA with RMC) is the secondary mode.

Per FCC KDB 941225 D01v03r01, The SAR test exclusion is applied to the secondary mode by the following equation.

$$\text{Adjusted SAR} = \text{Highest Reported SAR} \times \frac{\text{Secondary Max tune - up (mW)}}{\text{Primary Max tune tune - up(mW)}} \leq 1.2 \text{ W/kg.}$$

Based on the highest Reported SAR, the secondary mode is not required.

Per FCC KDB 690783 1 D01 SAR Listings on Grants v01r03 and KDB 447498 D01 General RF Exposure Guidance v06 The SAR numbers listed must be consistent with the highest reported test results required by the published RF exposure KDB procedures. When the measured SAR is not at the maximum tune-up tolerance limit or maximum output power allowed for production units, the measured results are scaled to the maximum conditions to determine compliance; the scaled results are referred to as the reported SAR.

The Reported SAR = The Measured SAR $\times \frac{\text{Maximum tune-up(mW)}}{\text{Measured Conducted Power(mW)}}$

The Reported SAR for WLAN and Bluetooth

The Reported SAR = The Measured SAR $\times \frac{\text{Maximum tune-up(mW)}}{\text{Measured Conducted Power(mW)}}$ x Duty factor

FCC KDB 447498 D01v06 General RF Exposure Guidance introduces a new formula for calculating the SAR a Peak Location Separation Ratio(SPLSR) between pairs of simultaneously transmitting antennas:

$$SPLSR_i = (SAR_1 + SAR_2)^{1.5} / R_i$$

Where:

SAR_1 is the highest measured or estimated SAR for the first of a pair of simultaneous transmitting antennas, in a specific test operating mode and exposure condition

SAR_2 is the highest measured or estimated SAR for the second of a pair of simultaneous transmitting antennas, in the same test operating mode and exposure condition as the first

R_i is the separation distance between the pair of simultaneous transmitting antennas, When the SAR is measured, for both antennas in the pair, it is determined by the actual x, y and z coordinates in the 1-g SAR for each SAR peak location, based on the extrapolated and interpolated result in the zoom scan measurement, using the formula of $[(X_1 - X_2)^2 + (Y_1 - Y_2)^2 + (Z_1 - Z_2)^2]$

In order for a pair of simultaneous transmitting antennas with the sum 1-g of SAR > 1.6 W/kg and with the sum 10-g of SAR > 4W/Kg to qualify for exemption from Simultaneous Transmission SAR measurements, it has to satisfy the condition of:

$$(SAR_1 + SAR_2)^{1.5} / R_i \leq 0.04 \text{ for 1g SAR and } (SAR_1 + SAR_2)^{1.5} / R_i \leq 0.1 \text{ for 10g SAR.}$$

5. Introduction

The FCC has adopted the guidelines for evaluating the environmental effects of radio frequency radiation in ET Docket 93-62 on Aug. 6, 1996 to protect the public and workers from the potential hazards of RF emissions due to FCC-regulated portable devices.

The safety limits used for the environmental evaluation measurements are based on the criteria published by the American National Standards Institute (ANSI) for localized specific absorption rate (SAR) in IEEE/ANSI C95.1-1992 Standard for Safety Levels with Respect to Human Exposure to Radio Frequency Electromagnetic Fields, 3 kHz to 300 GHz. 1992 by the Institute of Electrical and Electronics Engineers, Inc., New York 10017. The measurement procedure described in IEEE/ANSI C95.3-1992 Recommended Practice for the Measurement of Potentially Hazardous Electromagnetic Fields - RF and Microwave is used for guidance in measuring SAR due to the RF radiation exposure from the Equipment Under Test (EUT). These criteria for SAR evaluation are similar to those recommended by the National Council on Radiation Protection and Measurements (NCRP) in Biological Effects and Exposure Criteria for Radio Frequency Electromagnetic Fields," NCRP Report No. 86 NCRP, 1986, Bethesda, MD 20814. SAR is a measure of the rate of energy absorption due to exposure to an RF transmitting source. SAR values have been related to threshold levels for potential biological hazards.

SAR Definition

Specific Absorption Rate (SAR) is defined as the time derivative of the incremental electromagnetic energy (dW) absorbed by (dissipated in) an incremental mass (dm) contained in a volume element (dV) of a given density (ρ). It is also defined as the rate of RF energy absorption per unit mass at a point in an absorbing body.

$$SAR = \frac{d}{dt} \left(\frac{dW}{dm} \right)$$

Figure 1. SAR Mathematical Equation
SAR is expressed in units of Watts per Kilogram (W/kg)

Where:

- = conductivity of the tissue-simulant material (S/m)
- = mass density of the tissue-simulant material (kg/m³)
- = Total RMS electric field strength (V/m)

NOTE: The primary factors that control rate of energy absorption were found to be the wavelength of the incident field in relations to the dimensions and geometry of the irradiated organism, the orientation of the organism in relation to the polarity of field vectors, the presence of reflecting surfaces, and whether conductive contact is made by the organism with a ground plane.

6. Description of test equipment

6.1 SAR MEASUREMENT SETUP

These measurements are performed using the DASY4 automated dosimetric assessment system. It is made by Schmid & Partner Engineering AG (SPEAG) in Zurich, Switzerland. It consists of high precision robotics system (Staubli), robot controller, Pentium III computer, near-field probe, probe alignment sensor, and the generic twin phantom containing the brain equivalent material. The robot is a six-axis industrial robot performing precise movements to position the probe to the location (points) of maximum electromagnetic field (EMF) (see Figure.2).

A cell controller system contains the power supply, robot controller, teach pendant (Joystick), and remote control, is used to drive the robot motors. The PC with Windows XP or Windows 7 is working with SAR Measurement system DASY4 & DASY5, A/D interface card, monitor, mouse, and keyboard. The Staubli Robot is connected to the cell controller to allow software manipulation of the robot. A data acquisition electronic (DAE) circuit performs the signal amplification, signal multiplexing, AD-conversion, offset measurements, mechanical surface detection, collision detection, etc. is connected to the Electro-optical coupler (EOC). The EOC performs the conversion from the optical into digital electric signal of the DAE and transfers data to the PC plug-in card.

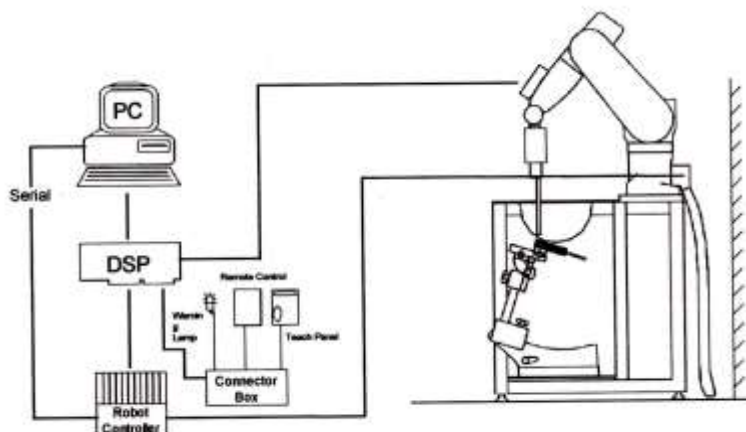


Figure 2. HCT SAR Lab. Test Measurement Set-up

The DAE consists of a highly sensitive electrometer-grade preamplifier with auto-zeroing, a channel and gain-switching multiplexer, a fast 16 bit AD-converter and a command decoder and control logic unit. Transmission to the PC-card is accomplished through an optical downlink for data and status information and an optical uplink for commands and clock lines. The mechanical probe mounting device includes two different sensor systems for frontal and sidewise probe contacts. They are also used for mechanical surface detection and probe collision detection. The robot uses its own controller with a built in VME-bus computer. The system is described in detail in.

7. SAR Measurement Procedure

The evaluation was performed using the following procedure compliant to FCC KDB Publication 865664 D01v01r04 and IEEE 1528-2013.

1. The SAR distribution at the exposed side of the head or body was measured at a distance no more than 5.0 mm from the inner surface of the shell. The area covered the entire dimension of the DUT's head and body area and the horizontal grid resolution was depending on the FCC KDB 865664 D01v01r04 table 4-1 & IEEE 1528-2013.
2. Based on step, the area of the maximum absorption was determined by sophisticated interpolations routines implemented in DASY software. When an Area Scan has measured all reachable point. DASY system computes the field maximal found in the scanned are, within a range of the maximum. SAR at this fixed point was measured and used as a reference value.
3. Around this point, a volume was assessed according to the measurement resolution and volume size requirements of FCC KDB 865664 D01v01r04 table 4-1 and IEEE 1528-2013. On the basis of this data set, the spatial peak SAR value was evaluated with the following procedure (reference from the DASY manual.)
 - a. The data at the surface were extrapolated, since the center of the dipoles is no more than 2.7 mm away from the tip of the probe (it is different from the probe type) and the distance between the surface and the lowest measuring point is 1.2 mm. The extrapolation was based on a least square algorithm. A polynomial of the fourth order was calculated through the points in z-axes. This polynomial was then used to evaluate the points between the surface and the probe tip.
 - b. The maximum interpolated value was searched with a straight-forward algorithm. Around this maximum the SAR values averaged over the spatial volumes (1 g or 10 g) were computed using the 3D-Spline interpolation algorithm. The 3D-spline is composed of three one-dimensional splines with the "Not a knot" condition (in x, y, and z directions. The volume was integrated with the trapezoidal algorithm. One thousand points (10 x 10 x 10) were interpolated to calculate the average.
 - c. All neighboring volumes were evaluated until no neighboring volume with a higher average value was found.
4. The SAR reference value, at the same location as step 2, was re-measured after the zoom scan. If the value changed by more than 5 %, the SAR evaluation and drift measurements were repeated.


Area scan and zoom scan resolution setting follow KDB 865664 D01v01r04 quoted below.

			≤ 3 GHz	> 3 GHz
Maximum distance from closest measurement point (geometric center of probe sensors) to phantom surface			5±1 mm	·δ·ln(2)±0.5 mm
Maximum probe angle from probe axis to phantom surface normal at the measurement location			30°±1°	20°±1°
Maximum area scan Spatial resolution: Δx _{Area} , Δy _{Area}			≤ 2 GHz: ≤15 mm 2-3 GHz: ≤12 mm	3-4 GHz: ≤12 mm 4-6 GHz: ≤10 mm
			When the x or y dimension of the test device, in the measurement plane orientation, is smaller than the above, the measurement resolution must be ≤ the corresponding x or y dimension of the test device with at least one measurement point on the test device.	
Maximum zoom scan Spatial resolution: Δx _{zoom} , Δy _{zoom}			≤ 2 GHz: ≤8mm 2-3 GHz: ≤5mm*	3-4 GHz: ≤5 mm* 4-6 GHz: ≤4 mm*
Maximum zoom scan Spatial resolution normal to phantom surface	uniform grid: Δz _{zoom} (n)		≤ 5 mm	3-4 GHz: ≤4 mm 4-5 GHz: ≤3 mm 5-6 GHz: ≤2 mm
	graded grid	Δz _{zoom} (1): between 1 st two Points closest to phantom surface	≤ 4 mm	3-4 GHz: ≤3 mm 4-5 GHz: ≤2.5 mm 5-6 GHz: ≤2 mm
		Δz _{zoom} (n>1): between subsequent Points	≤1.5·Δz _{zoom} (n-1)	
Minimum zoom scan volume	x, y, z		≥ 30 mm	3-4 GHz: ≥28 mm 4-5 GHz: ≥25 mm 5-6 GHz: ≥22 mm
Note: δ is the penetration depth of a plane-wave at normal incidence to the tissue medium; see draft standard IEEE P1528-2011 for details. * When zoom scan is required and the reported SAR from the area scan based 1-g SAR estimation procedures of KDB 447498 is ≤ 1.4 W/kg, ≤ 8 mm, ≤ 7 mm and ≤ 5 mm zoom scan resolution may be applied, respectively, for 2 GHz to 3 GHz, 3 GHz to 4 GHz and 4 GHz to 6 GHz.				

8. Description of Test Position

8.1 EAR REFERENCE POINT

Figure 8-2 shows the front, back and side views of the SAM phantom. The center-of-mouth reference point is labeled “M”, the left ear reference point (ERP) is marked “LE”, and the right ERP is marked “RE.” Each ERP is on the B-M (back-mouth) line located 15 mm behind the entrance-to-ear-canal (EEC) point, as shown in Figure 6-1. The Reference Plane is defined as passing through the two ear reference point and point M. The line N-F (Neck-Front), also called the Reference Pivoting Line, is not perpendicular to the reference plane (See Figure 5-1), Line B-M is perpendicular to the N-F line. Both N-F and B-M lines are marked on the external phantom shell to facilitate handset positioning.

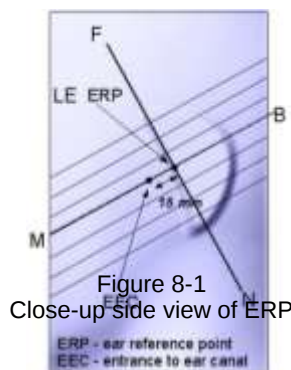

8.2 HANDSET REFERENCE POINTS

Two imaginary lines on the handset were established: the vertical centerline and the horizontal line. The device under test was placed in a normal operating position with the acoustic output located along the “vertical centerline” on the front of the device aligned to the “ear reference point”(see Figure 8-3). The acoustic output was then located at the same level as the center of the ear reference point. The device under test was positioned so that the “vertical centerline” was bisecting the front surface of the handset at its top and bottom edges, positioning the “ear reference point” on the outer surface of the both the left and right head phantoms on the ear reference point.



Figure 8-2
Front, back and side views of SAM Twin Phantom

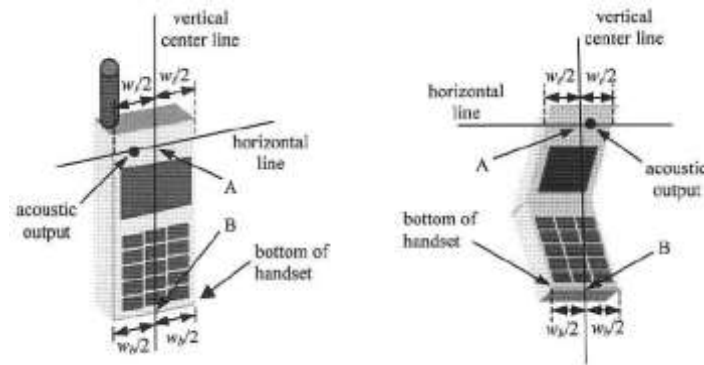


Figure 6-3. Handset vertical and horizontal reference lines

8.3 Device Holder

The device holder is made out of low-loss POM material having the following dielectric parameter; relative permittivity $\epsilon=3$ and loss tangent $\sigma=0.02$.

8.4 Position for cheek

Figure 6.4. shows cheek or touch position. The reference points for the right ear (RE), left ear (LE), and mouth (M), which establish the Reference Plane for handset positioning, are indicated.

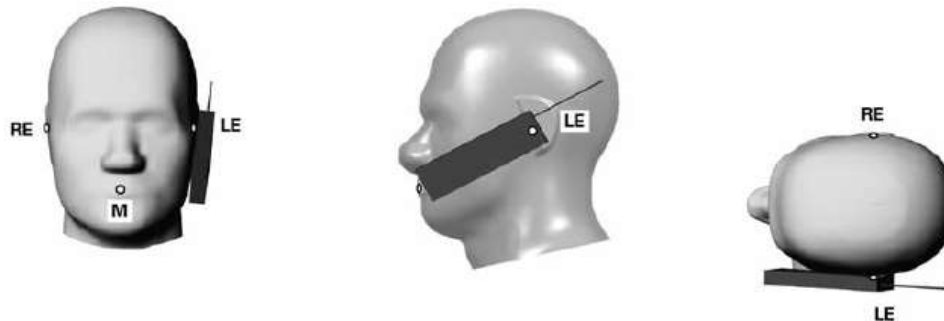


Figure 8.4 Cheek/ Touch position of the wireless device

8.5 Definition of the “tilted” position

Figure 6.5. shows tilted position. Place the device in the cheek position. Then while maintaining the orientation of the device, retract the device parallel to the reference plane far enough away from the phantom to enable a rotation of the device by 15°.



Figure 8.5. Tilt 15° position of the wireless device

8.6 Body-Worn Accessory Configurations

Body-worn operating configurations are tested with the belt-dips and holsters attached to the device and positioned against a flat phantom in a normal use configuration (see Figure 6-6). Per FCC KDB Publication 648474 D04v01r03 Body-worn accessory exposure is typically related to voice mode operations when handsets are carried in Body-worn accessories. The Body-worn accessory procedures in FCC KDB Publication 447498 D01v06 should be used to test for Body-worn accessory SAR compliance, without a headset connected to it.. When the reported SAR for a body- worn accessory, measured without a headset connected to the handset, is > 1.2 W/kg, the highest reported SAR configuration for that wireless mode and frequency Band should be repeated for that body- worn accessory with a headset attached to the handset.



Figure 8-6
Sample Body-Worn Diagram

Accessories for Body-worn operation configurations are divided into two categories: those that do not contain metallic components and those that do contain metallic components. When multiple accessories that do not contain metallic components are supplied with the device, the device is tested with only the accessory that dictates the closest spacing to the body. Then multiple accessories that contain metallic components are tested with the device with each accessory. If multiple accessories share an identical metallic component (i.e. the same metallic belt-dip used with different holsters with no other metallic components) only the accessory that dictates the closest spacing to the body is tested.

8.7 Wireless Router Configurations

Some battery-operated handsets have the capability to transmit and receive user data through simultaneous transmission of WIFI simultaneously with a separate licensed transmitter. The FCC has provided guidance in FCC KDB Publication 941225 D06v02r01 where SAR test considerations for handsets (L x W≥9cmx5 cm) are based on a composite test separation distance of 10 mm from the front back and edges of the device containing transmitting antennas within 2.5 cm of their edges, determined from general mixed use conditions for this type of devices. Since the hotspot SAR results may overlap with the Body-worn accessory SAR requirements, the more conservative configurations can be considered, thus excluding some Body-worn accessory SAR tests.

When the user enables the personal wireless router functions for the handset actual operations include simultaneous transmission of both the WIFI transmitter and another licensed transmitter. Both transmitters often do not transmit at the same transmitting frequency and thus cannot be evaluated for SAR under actual use conditions due to the limitations of the SAR assessment probes. Therefore, SAR must be evaluated for each frequency transmission and mode separately and spatially summed with the WIFI transmitter according to FCC KDB Publication 447498 D01v06 publication procedures. The Portable Hotspot feature on the handset was NOT activated during SAR assessments, to ensure the SAR measurements were evaluated for a single transmission frequency RF signal at a time.

8.8 Extremity Exposure Configurations

Devices that are designed or intended for use on extremities or mainly operated in extremity only exposure conditions: i.e., hands, wrists, feet and ankles, may require extremity SAR evaluation. When the device also operates in close proximity to the user's body, SAR compliance for the body is also required. The 1-g body and 10-g extremity SAR Exclusion Thresholds found in KDB Publication 447498 D01v06 should be applied to determine SAR test requirements.

For smart phones with a display diagonal dimension > 15.0 cm or an overall diagonal dimension > 16.0 cm that provide similar mobile web access and multimedia support found in mini-tablets or UMPC mini-tablets that support voice calls next to the ear. the phablets procedures outlined in KDB Publication 648474 D04 v01r03 should be applied to evaluate SAR compliance. A device marketed as phablets, regardless of form factors and operating characteristics must be tested as a phablet to determine SAR compliance. In addition to the normally required head and body-worm accessory SAR test procedures required for handsets, the UMPC mini-tablet procedures must also be applied to test the SAR of all surfaces and edges with an antenna ≤25 mm from that surface or edge, in direct contact with the phantom, for 10-g SAR. The UMPC mini-tablet 1-g SAR at 5 mm is not required. When hotspot mode applies, 10-g SAR is required only for the surfaces and edges with hotspot mode scaled to the maximum output power (including tolerance) is 1-g SAR > 1.2 W/kg.

8.9 Additional Test Positions due to Proximity Conditions

This device uses a sensor to reduce output powers in extremity (hand-held) use conditions.

When the sensor detects a user is touching the device on or near to the antenna the device reduces the maximum allowed output power. However, the proximity sensor is not active when the device is moved beyond the sensor triggering distance and the maximum output power is no longer limited. Therefore, an additional exposure condition is needed in the vicinity of the triggering distance to ensure SAR is compliant when the device is allowed to operate at a non-reduced output power level.

FCC KDB 616217 D04 v01r02 Section 6 was used as a guideline for selecting SAR test distances for this device at these additional exposure conditions. The smallest separation distance determined by the sensor triggering and sensor coverage for each applicable edge, minus 1 mm. was used as the test separation distance for SAR testing. Sensor triggering distance summary data is included in below table.

Wireless technologies	Position	§6.2 Triggering Distance (mm)	§6.3 Coverage	§6.4 Tilt Angle	Worst case distance for Phablet SAR (mm)
WWAN(GSM 1900,UMTS B2/B4, LTE B2/B4/B66)	Rear	20	N/A	N/A	19
	Bottom	14	N/A	N/A	13

8.10 Bluetooth tethering Configurations

Per May 2017 TCBC Workshop documents When Bluetooth tethering applies, simultaneous transmission SAR needs consideration.

This model allows users to exchange data or media files with other Bluetooth enabled devices using Bluetooth, which means they can connect to other Bluetooth enabled devices via Bluetooth tethering.

Therefore, SAR test was performed for additional simultaneous transmissions.

Head and Bluetooth tethering SAR were evaluated for BT BR tethering applications.

9. RF Exposure Limits

HUMAN EXPOSURE	UNCONTROLLED ENVIRONMENT General Population (W/kg) or (mW/g)	CONTROLLED ENVIRONMENT Occupational (W/kg) or (mW/g)
SPATIAL PEAK SAR * (Partial Body)	1.6	8.0
SPATIAL AVERAGE SAR ** (Whole Body)	0.08	0.4
SPATIAL PEAK SAR *** (Hands / Feet / Ankle / Wrist)	4.0	20.0

NOTES:

* The Spatial Peak value of the SAR averaged over any 1 g of tissue (defined as a tissue volume in the shape of a cube) and over the appropriate averaging time.

** The Spatial Average value of the SAR averaged over the whole-body.

*** The Spatial Peak value of the SAR averaged over any 10 g of tissue (defined as a tissue volume in the shape of a cube) and over the appropriate averaging time.

Uncontrolled Environments are defined as locations where there is the exposure of individuals who have no knowledge or control of their exposure. The general population/uncontrolled exposure limits are applicable to situations in which the general public may be exposed or in which persons who are exposed as a consequence of their employment may not be made fully aware of the potential for exposure or cannot exercise control over their exposure. Members of the general public would come under this category when exposure is not employment-related; for example, in the case of a wireless transmitter that exposes persons in its vicinity.

Controlled Environments are defined as locations where there is exposure that may be incurred by persons who are aware of the potential for exposure, (i.e. as a result of employment or occupation). In general, occupational/controlled exposure limits are applicable to situations in which persons are exposed as a consequence of their employment, who have been made fully aware of the potential for exposure and can exercise control over their exposure. This exposure category is also applicable when the exposure is of a transient nature due to incidental passage through a location where the exposure levels may be higher than the general population/uncontrolled limits, but the exposed person is fully aware of the potential for exposure and can exercise control over his or her exposure by leaving the area or by some other appropriate means.

10. FCC SAR General Measurement Procedures

Power Measurements for licensed transmitters are performed using a base simulator under digital average power.

10.1 Measured and Reported SAR

Per FCC KDB Publication 447498 D01v06, when SAR is not measured at the maximum power level allowed for production units, the results must be scaled to the maximum tune-up tolerance limit according to the power applied to the individual channels tested to determine compliance. For simultaneous transmission, the measured aggregate SAR must be scaled according to the sum of the differences between the maximum tune-up tolerance and actual power used to test each transmitter. When SAR is measured at or scaled to the maximum tune-up tolerance limit, the results are referred to as Reported SAR. The highest reported SAR results are identified on the grant of equipment authorization according to procedures in KDB 690783 D01v01r03.

10.2 3G SAR Test Reduction Procedure

10.2.1 GSM, GPRS AND EDGE

The following procedures may be considered for each frequency Band to determine SAR test reduction for devices operating in GSM/GPRS/EDGE modes to demonstrate RF exposure compliance. GSM voice mode transmits with 1 time-slot. GPRS and EDGE may transmit up to 4 time slots in the 8 time-slot frame according to the multi-slot class implemented in a device.

10.2.2 SAR Test Reduction

In FCC KDB 941225 D01v03r01, certain transmission modes within a frequency Band and wireless mode evaluated for SAR are defined as primary modes. The equivalent modes considered for SAR test reduction are denoted as secondary modes. When the maximum output power including tune-up tolerance specified for production units in a secondary mode is ≤ 0.25 dB higher than the primary mode or when the highest reported SAR of the primary mode, scaled by the ratio of specified maximum output power and tune-up tolerance of secondary to primary mode, is ≤ 1.2 W/kg, SAR measurements are not required for the secondary mode. These criteria are referred to as the 3G SAR test reduction procedure. When the 3G SAR test reduction procedure is not satisfied, SAR measurements are additionally required for the secondary mode.

SAR test reduction for GPRS and EDGE modes is determined by the source-based time-averaged output power specified for production units, including tune-up tolerance. The data mode with highest specified time-averaged output power should be tested for SAR compliance in the applicable exposure conditions. For modes with the same specified maximum output power and tolerance, the higher number time-slot configuration should be tested

10.2.3 Procedures Used to Establish RF Signal for SAR

The following procedures are according to FCC KDB 941225 D01v03r01-3G SAR Measurement Procedures. The handset was placed into a simulated call using a base station simulator in a shielded chamber. Such test signals offer a consistent means for testing SAR and are recommended for evaluation SAR measurements were taken with a fully charged battery. In order to verify that the device was tested and maintained at full power, this was configured with the base station simulator. The SAR measurement Software calculates a reference point at the start and end of the test to Check for power drifts. If conducted Power deviations of more than 5 % occurred, the tests were repeated.

10.3 SAR Measurement Conditions for UMTS

10.3.1 Output Power Verification

Maximum output power is verified on the High, Middle and Low channels according to the general descriptions in sec. 5.2 of 3GPP TS 34.121, using the appropriate RMC with TPC (transmit power control) set to all “1s” or applying the required inner loop power control procedures to maintain maximum output power while HSUPA is active. Results for all applicable physical channel configurations (DPCCH, DPDCHn and spreading codes, HS-DPCCH etc) are tabulated in this test report. All configurations that are not supported by the DUT or cannot be measured due to technical or equipment limitations are identified.

10.3.2 Body SAR measurements

SAR for body exposure configurations is measured using the 12.2kbps RMC with the TPC bits all “1s”. the 3G SAR test reduction procedure is applied to other spreading codes and multiple DPDCHn configurations supported by the handset with 12.2 kbps RMC as the primary mode. Otherwise, SAR is measured using and applicable RMC configuration with the corresponding spreading code or DPDCHn, for the highest reported SAR configuration in 12.2kbps RMC.

10.3.3 SAR Measurements with Rel. 5 HSDPA

The 3G SAR test reduction procedure is applied to HSDPA body configurations with 12.2 kbps RMC as the primary mode. Otherwise, Body SAR for HSDPA is measured using and FRC with H-SET 1 in Sub-test and a 12.2 kbps RMC without HSDPA. Handsets with both HSDPA and HSUPA are tested according to release 6 HSPA test procedures. 8.4.5 SAR Measurement with Rel.6 HSUPA The 3G SAR test Reduction Procedure is applied to HSPA (HSUPA/HSDPA with RMC) body configurations with 12.2 kbps RMC as the primary mode. Otherwise, Body SAR for HSPA is measured with E-DCH Sub-test 5, Using H-Set 1 and QPSK for FRC and a 12.2kbps RMC configured in Test Loop Mode 1 and Power Control algorithm 2, according to the highest reported body SAR configuration in 12.2 kbps RMC without HSPA. When VOIP applies to head exposure, the 3G SAR test reduction procedure is applied with 12.2 kbps RMC as the primary mode; otherwise, the same HSPA configuration used for body SAR measurements are applied to head exposure testing.

10.3.4 SAR Measurements with Rel. 6 HSUPA


The 3G SAR test reduction procedure is applied to HSPA (HSUPA/HSDPA with RMC) body configurations with 12.2 kbps RMC as the primary mode. Otherwise, Body SAR for HSPA is measured with E-DCH Sub-test 5, using H-Set1 and QPSK for FRC and a 12.2 kbps RMC configured in Test Loop Mode 1 and power control algorithm 2, according to the highest reported body SAR configuration in 12.2 kbps RMC without HSPA.

10.3.5DC-HSDPA

SAR is required for Rel.8 DC-HSDPA when SAR is required for Rel.5 HSDPA; otherwise, the 3G SAR test reduction procedure is applied to DC-HSDPA with 12.2 kbps RMC as the primary mode. Power is measured for DC-HSDPA according to the H-Set 12, FRC configuration in table C.8.1.12 of 3GPP TS34.121-1 to determine SAR test reduction. Primary and secondary serving HS-DSCH Cell are required to perform the power measurement and for the results to be acceptable.

DC-HSDPA Configurations

- ◆ 3GPP specification TS 34.121-1 Release 8. was used for used for DC-HSDPA guidance.
- ◆ H-set 12(QPSK)was conformed to be used during DC-HSDPA measurements.



10.4 SAR Measurement Conditions for LTE

LTE modes are tested according to FCC KDB 941225 D05v02r05 publication. Establishing connections with base station simulators ensure a consistent means for testing SAR and are recommended for evaluation SAR [4]. The R&S CMW500 or Anritsu MT8820C simulators are used for LTE output power measurements and SAR testing. Closed loop power control was used so the UE transmits with maximum output power during SAR testing. SAR tests were performed with the same number of RB and RB offsets transmitting on all TTI frames (maximum TTI).

10.4.1 Spectrum Plots for RB Configurations

A properly configured base station simulator was used for SAR tests and power measurements. Therefore, spectrum plots for RB configurations were not required to be included in this report.

10.4.2 MPR

MPR is permanently implemented for this device by the manufacturer. The specific manufacturer target MPR is indicated alongside the SAR results. MPR is enabled for this device, according to 3GPP TS36. 101 Section 6.2.3 – 6.2.5 under Table 6.2.3-1.

10.4.3 A-MPR

A-MPR (Additional MPR) has been disabled for all SAR tests by setting NS=01 on the base station simulator.

10.4.4 Required RB Size and RB offsets for SAR testing

According to FCC KDB 941225 D05v02r05

- a. Per sec 4.2.1, SAR is required for QPSK 1 RB Allocation for the largest Bandwidth
 - i. The required channel and offset combination with the highest maximum output power is required for SAR.
 - ii. When the reported SAR is ≤ 0.8 W/Kg, testing of the remaining RB offset configurations and required test channels is not required. Otherwise, SAR is required for the remaining required test channels using the RB offset configuration with highest output power for that channel.
 - iii. When the reported SAR for a required test channel is > 1.45 W/kg, SAR is required for all RB offset configurations for that channel.
- b. Per Sec 4.2.2, SAR is required for 50% RB allocation using the largest Bandwidth following the same procedures outlined in Sec 4.2.1.
- c. Per Sec. 4.2.3, QPSK SAR is not required for the 100% allocation when the highest maximum output power for the 100% allocation is less than the highest maximum output power of the 1 RB and 50% RB allocations and the reported SAR for the 1 RB and 50% RB allocations is < 0.8 W/kg.
- d. Per Sec. 4.2.4 and 4.3, SAR test for higher order modulations and lower Bandwidths configurations are not required when the conducted power of the required test configurations determined by Sec. 4.2.1 through 4.2.3 is less than or equal to 1/2 dB higher than the equivalent configuration using QPSK modulation and when the QPSK SAR for those configurations is < 1.45 W/Kg.

10.4.5 Downlink Carrier Aggregation

Conducted power measurements with LTE Carrier aggregation (CA) downlink only active are made in accordance to KDB publication 941225 D05Av01r02. The RRC connection is only handled by one cell, the primary component carrier (PCC) for downlink and uplink communications. After making a data connection to the PCC, the UE device adds secondary component carrier (SCC) on the downlink only. All uplink communications and acknowledgements remain identical to specifications when downlink carrier aggregation is inactive on the PCC. For every supported combination of downlink only carrier aggregation, additional conducted output Powers are measured with downlink carrier aggregation active for the configuration with highest measured maximum conducted power with the downlink carrier aggregation inactive measured among the channel Bandwidth, modulation and RB combinations in each frequency Band. Per FCC KDB Publication 941225 D05Av01r02, no SAR measurements are required for carrier aggregation configurations when the

average output power with downlink only carrier aggregation active is not more than 0.25dB higher than the average output power with downlink only carrier aggregation inactive.

10.4.6 LTE(TDD) Considerations

According to KDB 941225 D05v02r05, for Time-Division Duplex (TDD) systems, SAR must be tested using a fixed periodic duty factor according to the highest transmission duty factor implemented for the device and supported by the defined 3GPP LTE TDD configurations.

SAR was tested with the highest transmission duty factor (63.33 %) using Uplink-downlink configuration 0 and Special subframe configuration 6. LTE TDD Band 41 supports 3GPP TS 36.211 section 4.2 for Type 2 Frame and Table 4.2-2 for uplink-downlink configurations and Table 4.2-1 for Special sub frame configurations.

Table 4.2-1: Configuration of special subframe (lengths of DwPTS/GP/UpPTS)

Special subframe configuration	Normal cyclic prefix in downlink			Extended cyclic prefix in downlink		
	DwPTS	UpPTS		DwPTS	UpPTS	
		Normal cyclic prefix in uplink	Extended cyclic prefix in uplink		Normal cyclic prefix in uplink	Extended cyclic prefix in uplink
0	$6592 \cdot T_s$	$2192 \cdot T_s$	$2560 \cdot T_s$	$7680 \cdot T_s$	$2192 \cdot T_s$	$2560 \cdot T_s$
1	$19760 \cdot T_s$			$20480 \cdot T_s$		
2	$21952 \cdot T_s$			$23040 \cdot T_s$		
3	$24144 \cdot T_s$			$25600 \cdot T_s$		
4	$26336 \cdot T_s$			$7680 \cdot T_s$		
5	$6592 \cdot T_s$	$4384 \cdot T_s$	$5120 \cdot T_s$	$20480 \cdot T_s$	$4384 \cdot T_s$	$5120 \cdot T_s$
6	$19760 \cdot T_s$			$23040 \cdot T_s$		
7	$21952 \cdot T_s$			$12800 \cdot T_s$		
8	$24144 \cdot T_s$			-	-	-
9	$13168 \cdot T_s$			-	-	-

Calculated Duty Cycle – Extended cyclic prefix in uplink $\times (T_s) \times$ no of S + no of U

Table 4.2-2: Uplink-downlink configurations.

Uplink-downlink configuration	Downlink-to-Uplink Switch-point periodicity	Subframe number									
		0	1	2	3	4	5	6	7	8	9
0	5 ms	D	S	U	U	U	D	S	U	U	U
1	5 ms	D	S	U	U	D	D	S	U	U	D
2	5 ms	D	S	U	D	D	D	S	U	D	D
3	10 ms	D	S	U	U	U	D	D	D	D	D
4	10 ms	D	S	U	U	D	D	D	D	D	D
5	10 ms	D	S	U	D	D	D	D	D	D	D
6	5 ms	D	S	U	U	U	D	S	U	U	D

Example for calculated Duty Cycle for Uplink-Downlink Configuration 0:

Calculated Duty Cycle = $(5120 \times (1/(15000 \times 2048))) \times 2 + 0.006)/0.01 = 63.33 \%$

Where

$T_s = 1/(15000 \times 2048)$ seconds

10.4.7 The Call Box Setup for LTE(TDD)

When you Want to Test for LTE TDD, Please Change Frame Structure TDD and TDD Uplink Downlink Configuration 0 and Special Subframe Configuration 6.

2018/01/08 11:00		Idle(Regist)		Phone-2	Phone-1
<Fundamental Measurement> Output Main		Continuous		W-CDMA	LTE
Parameter	Fundamental	UE Report			
Reference Signal not found		UE Power : -21.5 dBm		Parameter	
Power Measurement		(Meas. Count : 11/ 20)		Common	
TX Power		Avg.	Max.	Min.	Limit
Channel Power		*****	*****	*****	20.3 to 25.7 dBm
Modulation Analysis		View		(Meas. Count : 1/ 1)	
Common Parameter		TX1 - Max. Power(QPSK/1 RB)		Physical Channel	
Test Parameter				Call Processing	
Call Processing		On		Scenario Normal	
Frequency		TDD		TX Measurement Setup	
Frame Structure		FDD Hz		RX Measurement Setup	
Channel Bandwidth		TDD 20		Fundamental Measurement	
UL Channel & Frequency		CH = 2593.000000 MHz			
DL Channel & Frequency		40620 CH = 2593.000000 MHz			
Operation Band		41			
Frequency Separation		(0)MHz			
Level		30.0 dBm			
Input Level				1 2 3 4	

2018/01/08 11:01		Idle(Regist)		Phone-2	Phone-1
<Fundamental Measurement> Output Main		Continuous		W-CDMA	LTE
Parameter	Fundamental	UE Report			
Reference Signal not found		UE Power : -21.5 dBm		Parameter	
Power Measurement		(Meas. Count : 11/ 20)		Common	
TX Power		Avg.	Max.	Min.	Limit
Channel Power		*****	*****	*****	20.3 to 25.7 dBm
Modulation Analysis		View		(Meas. Count : 1/ 1)	
MCS Index (-)		5 (QPSK)	(5)	(2216)	-
MCS Index (5)		5 (QPSK)	(5)	(1864)	4
MCS Index (0)		5 (QPSK)	(5)	(2216)	2
MCS Index (1,6)		N/A (-----)	(--)	(-----)	2
CFI		3			
TDD		subframe 0 1 2 3 4 5 6 7 8 9			
Uplink Downlink Configuration		0 : (5ms) D S U U U D S U U U			
Special Subframe Configuration		6			
Physical Channel Parameter					
PSS Power		0.0 dB			
SSS Power		0.0 dB			
PBCH Power		0.0 dB			
PCFICH Power		0.0 dB			
PHICH Power		0.0 dB			
		1 2 3 4			

10.5 SAR Testing with 802.11 Transmitters

The normal network operating configurations of 802.11 transmitters are not suitable for SAR measurements. Unpredictable fluctuations in network traffic and antenna diversity conditions can introduce undesirable variations in SAR results. The SAR for these devices should be measured using chipset based test mode software to ensure the results are consistent and reliable. See KDB Publication 248227 D01v02r02 for more details.

10.5.1 General Device Setup

Chipset based test mode software is hardware dependent and generally varies among manufacturers. The device operating parameters established in test mode for SAR measurements must be identical to those programmed in production units, including output power levels, amplifier gain settings and other RF performance tuning parameters.

A periodic duty factor is required for current generation SAR system to measure SAR. When 802.11 frame gaps are accounted for in the transmission, a maximum transmission duty factor of 92-96% is typically achievable in most test mode configurations. A minimum transmission duty factor of 85% is required to avoid certain hardware and device implementation issues related to wide range SAR scaling. The reported SAR is scaled to 100% transmission duty factor to determine compliance at the maximum tune-up tolerance limit.

10.5.2 U-NII-1 and U-NII-2A

For devices that operate in both U-NII-1 and U-NII2A Bands, when the same maximum output power is specified for both Bands, SAR measurement using OFDM SAR test procedures is not required for U-NII-1 unless the highest reported SAR for U-NII-2A is > 1.2 W/kg for 1g SAR or > 3.0 W/kg for 10g SAR. When different maximum output powers are specified for the Bands, SAR measurement for the U-NII Band with the lower maximum output power is not required unless the highest reported SAR for the U-NII Band with the higher maximum output power, adjusted by the ratio of lower to higher specified maximum output power for the two Bands, is > 1.2 W/kg for 1g SAR or > 3.0 W/kg for 10g SAR.

10.5.3 U-NII-2C and U-NII-3

The frequency range covered by U-NII-2C and U-NII-3 is 380 MHz (5.47 GHz – 5.85 GHz), which requires a minimum of at least two SAR probe calibration frequency points to support SAR measurements. When Terminal Doppler Weather Radar (TDWR) restriction applies, the channels at 5.60 GHz – 5.65 GHz in U-NII-2C Band must be disabled with acceptable mechanisms and documented in the equipment certification.

Unless Band gap channels are permanently disabled, SAR must be considered for these channels.

10.5.4 Initial Test Position Procedure

For exposure conditions with multiple test positions, such as handset operating next to the ear, devices with hotspot mode or UMPC mini-tablet, procedures for initial test position can be applied. Using the transmission mode determined by the DSSS procedure or initial test configuration, area scans are measured for all positions in an exposure condition. The test position with the highest extrapolated (peak) SAR is used as the initial test position. When reported SAR for the initial test position is ≤ 0.4 W/kg for 1g SAR and ≤ 1.0 W/kg for 10g SAR, no additional testing for the remaining test position is required. Otherwise, SAR is evaluated at the subsequent highest peak SAR positions until the reported SAR result is ≤ 0.8 W/kg for 1g SAR and ≤ 2.0 W/kg for 10g SAR or all test positions are measured.

10.5.5 2.4 GHz SAR test Requirements

SAR is measured for 2.4 GHz 802.11b DSSS using either the fixed test position or, when applicable, the initial test position procedure. SAR test reduction is determined according to the following:

- 1) When the reported SAR of the highest measured maximum output power channel for the exposure configuration is ≤ 0.8 W/kg, no further SAR testing is required for 802.11b DSSS is that exposure configuration.
- 2) When the reported SAR is > 0.8 W/kg, SAR is required for that position using the next highest measured output power channel. When any reported SAR is > 1.2 W/kg, SAR is required for the third channel; i.e., all channels require testing.

2.4 GHz 802.11 g/n OFDM are additionally evaluated for SAR if the highest reported SAR for 802.11b, adjusted by the ratio of the OFDM to DSSS specified maximum output power, is > 1.2 W/kg. When SAR is required for OFDM modes in 2.4 GHz Band, the Initial Test Configuration Procedures should be followed.

10.5.6 OFDM Transmission Mode and SAR Test Channel Selection

For the 2.4 GHz and 5 GHz Bands, when the same maximum output power was specified for multiple OFDM transmission mode configurations in a frequency Band or aggregated Band, SAR is measured using the configuration with the largest channel Bandwidth, lowest order modulation and lowest data rate and lowest order 802.11 a/g/n/ac mode. When the maximum output power of a channel is the same for equivalent OFDM configurations; for example, 802.11a, 802.11n and 802.11 ac or 802.11g and 802.11n with the same channel Bandwidth, modulation and data rate etc., the lower order 802.11 mode i.e., 802.11a, then 802.11n and 802.11ac or 802.11g then 802.11n, is used for SAR measurement. When the maximum output power are the same for multiple test channels, either according to the default or additional power measurement requirements, SAR is measured using the channel closest to the middle of the frequency Band or aggregated Band. When there are multiple channels with the same maximum output power, SAR is measured using the higher number channel.

10.5.7 Initial Test Configuration Procedure

For OFDM, in both 2.4 GHz and 5 GHz Bands, an initial test configuration is determined for each frequency Band and aggregated Band, according to the transmission mode with the highest maximum output power specified for SAR measurements. When the same maximum output power is specified for multiple OFDM transmission mode configurations in a frequency Band or aggregated Band, SAR is measured using the configuration(s) with the largest channel Bandwidth, lowest order modulation, and lowest data rate. If the average RF output powers of the highest identical transmission modes are within 0.25 dB of each other, mid channel of the transmission mode with highest average RF output power is the initial test channel. Otherwise, the channel of the transmission mode with the highest average RF output conducted power will be the initial test configuration.

When the reported SAR is ≤ 0.8 W/kg, no additional measurements on other test channels are required. Otherwise, SAR is evaluated using the subsequent highest average RF output channel until the reported SAR result is 1.2 W/kg or all channels are measured. When there are multiple untested channels having the same subsequent highest average RF output power, the channel with higher frequency from the lowest 802.11 mode is considered for SAR measurements.

10.5.8 Subsequent Test Configuration Procedures

For OFDM configurations in each frequency Band and aggregated Band, SAR is evaluated for initial test configuration using the fixed test position or the initial test position on procedure. When the highest reported SAR (for the initial test configuration), adjusted by the ratio of the specified maximum output power of the subsequent test configuration to initial test configuration, is ≤ 1.2 W/kg for 1g SAR and ≤ 3.0 W/kg for 10g SAR, no additional SAR tests for the subsequent test configurations are required.

11. Output Power Specifications

This device operates using the following maximum output power specifications. SAR values were scaled to the maximum allowed power to determine compliance per KDB publication 447498 D01v06.

Licensed Bands

Test Description	Test Procedure Used
Conducted Output Power	- KDB 971168 D01 v03r01 - Section 5.2.4 - ANSI C63.26-2015 - Section 5.2.1 & 5.2.4.2

Test Overview


According to ANSI C63.26-2015 Section 5.2.1 when measuring the maximum RF output power from such devices, control over the EUT must be provided either through special test software (provided by manufacturer specifically for compliance testing, but not accessible by an end user) or through use of a base station emulator, communications test set, call box, or similar instrumentation that is capable of establishing a communications link with the EUT to enable control over variable parameters (e.g., output power, OBW, etc.).

In some cases, these instruments also include basic digital spectrum analyzer and/or power meter capabilities that can be utilized to measure the RF output power if the specified detectors and requirements can be realized and the measurement functions have been calibrated.

Test Procedure

1. The RF port of the EUT was connected to the Communication Tester via an RF cable.
2. Conducted average power was measured using a calibrated Radio Communication Tester.

Test setup

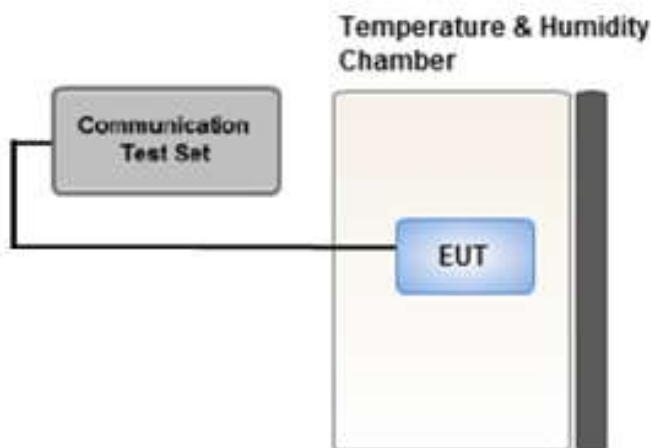

11.1GSM

11.1.1 GSM Maximum Conducted Output Power

Mode / Band		Voice	GPRS(GMSK) Data – CS1(dBm)				EDGE Data (dBm)			
		GSM	GPRS 1 TX Slot	GPRS 2 TX Slot	GPRS 3 TX Slot	GPRS 4 TX Slot	EDGE 1 TX Slot	EDGE 2 TX Slot	EDGE 3 TX Slot	EDGE 4 TX Slot
Maximum		33.00	33.00	32.00	30.00	27.50	27.00	25.50	23.50	22.00
Nominal		32.00	32.00	31.00	29.00	26.50	26.00	24.50	22.50	21.00
GSM 850	128	32.29	32.19	31.38	29.15	26.94	26.21	24.62	22.65	21.60
	190	31.94	31.94	30.92	28.73	26.55	25.94	24.37	22.40	21.47
	251	32.14	32.09	30.89	28.71	26.68	26.07	24.52	22.38	20.75
Maximum		31.50	31.50	29.50	27.50	25.00	26.50	25.00	23.00	22.00
Nominal		30.50	30.50	28.50	26.50	24.00	25.50	24.00	22.00	21.00
GSM 1900	512	30.46	30.52	28.35	26.15	24.08	25.48	24.04	22.04	21.09
	661	30.78	30.78	29.02	26.75	24.71	25.92	24.38	22.46	21.20
	810	30.66	30.68	28.78	26.45	24.27	25.15	24.23	22.26	20.96

GSM Conducted output powers (Burst-Average)

Mode / Band		Voice	GPRS(GMSK) Data – CS1(dBm)				EDGE Data (dBm)			
		GSM	GPRS 1 TX Slot	GPRS 2 TX Slot	GPRS 3 TX Slot	GPRS 4 TX Slot	EDGE 1 TX Slot	EDGE 2 TX Slot	EDGE 3 TX Slot	EDGE 4 TX Slot
Maximum		23.97	23.97	25.98	25.74	24.49	17.97	19.48	19.24	18.99
Nominal		22.97	22.97	24.98	24.74	23.49	16.97	18.48	18.24	17.99
GSM 850	128	23.26	23.16	25.36	24.89	23.93	17.18	18.60	18.39	18.59
	190	22.91	22.91	24.90	24.47	23.54	16.91	18.35	18.14	18.46
	251	23.11	23.06	24.87	24.45	23.67	17.04	18.50	18.12	17.74
Maximum		22.47	22.47	23.48	23.24	21.99	17.47	18.98	18.74	18.99
Nominal		21.47	21.47	22.48	22.24	20.99	16.47	17.98	17.74	17.99
GSM 1900	512	21.43	21.49	22.33	21.89	21.07	16.45	18.02	17.78	18.08
	661	21.75	21.75	23.00	22.49	21.70	16.89	18.36	18.20	18.19
	810	21.63	21.65	22.76	22.19	21.26	16.12	18.21	18.00	17.95

GSM Conducted output powers (Frame-Average)

Note:


Time slot average factor is as follows:

1 Tx slot = 9.03 dB, Frame-Average output power = Burst-Average output power – 9.03 dB

2 Tx slot = 6.02 dB, Frame-Average output power = Burst-Average output power – 6.02 dB

3 Tx slot = 4.26 dB, Frame-Average output power = Burst-Average output power – 4.26 dB

4 Tx slot = 3.01 dB, Frame-Average output power = Burst-Average output power – 3.01 dB



11.1.2 GSM Reduced Conducted Output Power (Hotspot mode activated)

Mode / Band		Voice	GPRS(GMSK) Data – CS1(dBm)				EDGE Data (dBm)			
		GSM	GPRS 1 TX Slot	GPRS 2 TX Slot	GPRS 3 TX Slot	GPRS 4 TX Slot	EDGE 1 TX Slot	EDGE 2 TX Slot	EDGE 3 TX Slot	EDGE 4 TX Slot
Maximum		31.00	31.00	29.50	27.50	25.50				
Nominal		30.00	30.00	28.50	26.50	24.50				
GSM 850	128	29.57	29.70	27.94	26.03	24.22				
	190	29.62	29.65	28.01	25.82	24.20				
	251	29.46	29.52	27.84	25.78	24.25				
Maximum		28.50	28.50	26.50	24.50	22.50	26.50	25.00	23.00	22.00
Nominal		27.50	27.50	25.50	23.50	21.50	25.50	24.00	22.00	21.00
GSM 1900	512	27.15	27.08	25.27	23.09	21.45	25.38	23.90	21.55	21.00
	661	27.69	27.62	25.82	23.64	21.91	25.50	24.26	22.18	21.27
	810	27.51	27.44	25.51	23.38	21.59	25.46	23.86	21.23	20.54

GSM Conducted output powers (Burst-Average)

Mode / Band		Voice	GPRS(GMSK) Data – CS1(dBm)				EDGE Data (dBm)			
		GSM	GPRS 1 TX Slot	GPRS 2 TX Slot	GPRS 3 TX Slot	GPRS 4 TX Slot	EDGE 1 TX Slot	EDGE 2 TX Slot	EDGE 3 TX Slot	EDGE 4 TX Slot
Maximum		21.97	21.97	23.48	23.24	22.49				
Nominal		20.97	20.97	22.48	22.24	21.49				
GSM 850	128	20.54	20.67	21.92	21.77	21.21				
	190	20.59	20.62	21.99	21.56	21.19				
	251	20.43	20.49	21.82	21.52	21.24				
Maximum		19.47	19.47	20.48	20.24	19.49	17.47	18.98	18.74	18.99
Nominal		18.47	18.47	19.48	19.24	18.49	16.47	17.98	17.74	17.99
GSM 1900	512	18.12	18.05	19.25	18.83	18.44	16.35	17.88	17.29	17.99
	661	18.66	18.59	19.80	19.38	18.90	16.47	18.24	17.92	18.26
	810	18.48	18.41	19.49	19.12	18.58	16.43	17.84	16.97	17.53

GSM Conducted output powers (Frame-Average)

Note:


Time slot average factor is as follows:

1 Tx slot = 9.03 dB, Frame-Average output power = Burst-Average output power – 9.03 dB

2 Tx slot = 6.02 dB, Frame-Average output power = Burst-Average output power – 6.02 dB

3 Tx slot = 4.26 dB, Frame-Average output power = Burst-Average output power – 4.26 dB

4 Tx slot = 3.01 dB, Frame-Average output power = Burst-Average output power – 3.01 dB



11.1.3 GSM Reduced Conducted Output Power (Grip back and Ear jack Activated)

Mode / Band		Voice	GPRS(GMSK) Data – CS1(dBm)				EDGE Data (dBm)			
		GSM	GPRS 1 TX Slot	GPRS 2 TX Slot	GPRS 3 TX Slot	GPRS 4 TX Slot	EDGE 1 TX Slot	EDGE 2 TX Slot	EDGE 3 TX Slot	EDGE 4 TX Slot
Maximum		28.50	28.50	26.50	24.50	22.50	26.50	25.00	23.00	22.00
Nominal		27.50	27.50	25.50	23.50	21.50	25.50	24.00	22.00	21.00
GSM 1900	512	27.03	27.05	25.18	23.05	21.42	25.23	24.04	21.58	21.19
	661	27.53	27.41	25.39	23.56	21.93	25.21	24.11	22.03	21.27
	810	27.10	27.07	25.22	23.41	21.58	25.45	23.91	21.51	20.61

GSM Conducted output powers (Burst-Average)


Mode / Band		Voice	GPRS(GMSK) Data – CS1(dBm)				EDGE Data (dBm)			
		GSM	GPRS 1 TX Slot	GPRS 2 TX Slot	GPRS 3 TX Slot	GPRS 4 TX Slot	EDGE 1 TX Slot	EDGE 2 TX Slot	EDGE 3 TX Slot	EDGE 4 TX Slot
Maximum		19.47	19.47	20.48	20.24	19.49	17.47	18.98	18.74	18.99
Nominal		18.47	18.47	19.48	19.24	18.49	16.47	17.98	17.74	17.99
GSM 1900	512	18.00	18.02	19.16	18.79	18.41	16.20	18.02	17.32	18.18
	661	18.50	18.38	19.37	19.30	18.92	16.18	18.09	17.77	18.26
	810	18.07	18.04	19.20	19.15	18.57	16.42	17.89	17.25	17.60

GSM Conducted output powers (Frame-Average)

Note:

Time slot average factor is as follows:

- 1 Tx slot = 9.03 dB, Frame-Average output power = Burst-Average output power – 9.03 dB
- 2 Tx slot = 6.02 dB, Frame-Average output power = Burst-Average output power – 6.02 dB
- 3 Tx slot = 4.26 dB, Frame-Average output power = Burst-Average output power – 4.26 dB
- 4 Tx slot = 3.01 dB, Frame-Average output power = Burst-Average output power – 3.01 dB



11.2 UMTS

HSPA+

This DUT is capable of HSPA+ in downlink. Therefore, the RF conducted power is not measured according to 941225 D01v03r01 3G SAR.

11.2.1 UMTS Maximum Conducted Output Power

UMTS Band 5 Maximum Conducted Output Power

3GPP Release Version	Mode	3GPP 34.121	UMTS Band 5 [dBm]			3GPP MPR
		Subtest	UL4132 DL4357	UL4183 DL4408	UL4233 DL4458	
99	UMTS	12.2 kbps RMC	23.86	23.78	23.76	-
99		12.2 kbps AMR	23.85	23.77	23.74	-
5	HSDPA	Subtest 1	22.80	22.72	22.67	0
5		Subtest 2	22.79	22.70	22.66	0
5		Subtest 3	22.30	22.22	22.19	0.5
5		Subtest 4	22.32	22.21	22.18	0.5
6	HSUPA	Subtest 1	22.81	22.71	22.67	0
6		Subtest 2	20.79	20.73	20.67	2
6		Subtest 3	21.81	21.70	21.68	1
6		Subtest 4	20.79	20.71	20.69	2
6		Subtest 5	22.81	22.69	22.68	0
8	DC-HSDPA	Subtest1	21.92	21.93	21.97	0
8		Subtest2	21.91	21.92	21.95	0
8		Subtest3	21.44	21.41	21.47	0.5
8		Subtest4	21.40	21.42	21.49	0.5

UMTS Average Conducted output powers

UMTS Band 4 Maximum Conducted Output Power

3GPP Release Version	Mode	3GPP 34.121	UMTS Band4 [dBm]			3GPP MPR
		Subtest	UL 1312 DL 1537	UL 1412 DL 1637	UL 1513 DL 1738	
99	UMTS	12.2 kbps RMC	23.69	23.78	23.69	-
99		12.2 kbps AMR	23.68	23.77	23.67	-
5	HSDPA	Subtest 1	22.92	23.07	23.11	0
5		Subtest 2	23.19	23.31	23.24	0
5		Subtest 3	22.19	22.30	22.22	0.5
5		Subtest 4	22.17	22.29	22.23	0.5
6	HSUPA	Subtest 1	23.18	23.30	23.23	0
6		Subtest 2	21.15	21.26	21.22	2
6		Subtest 3	20.64	20.74	20.71	1
6		Subtest 4	20.66	20.77	20.72	2
6		Subtest 5	23.15	23.26	23.22	0
8	DC-HSDPA	Subtest1	22.60	23.01	22.91	0
8		Subtest2	22.57	22.98	22.09	0
8		Subtest3	21.60	21.98	21.92	0.5
8		Subtest4	21.59	21.99	21.87	0.5

UMTS Average Conducted output powers

UMTS Band 2 Maximum Conducted Output Power

3GPP Release Version	Mode	3GPP 34.121	UMTS Band 2 [dBm]			3GPP MPR
		Subtest	UL9262 DL9662	UL9400 DL9800	UL9538 DL9938	
99	UMTS	12.2 kbps RMC	23.15	23.50	23.33	-
99		12.2 kbps AMR	23.14	23.48	23.32	-
5	HSDPA	Subtest 1	22.43	22.83	22.78	0
5		Subtest 2	22.69	23.02	22.91	0
5		Subtest 3	21.68	22.02	21.90	0.5
5		Subtest 4	21.65	22.01	21.87	0.5
6	HSUPA	Subtest 1	22.65	23.01	22.88	0
6		Subtest 2	20.63	21.01	20.89	2
6		Subtest 3	20.13	20.54	20.40	1
6		Subtest 4	20.11	20.15	20.38	2
6		Subtest 5	22.32	23.00	22.90	0
8	DC-HSDPA	Subtest 1	22.05	22.38	22.13	0
8		Subtest2	22.06	22.35	22.22	0
8		Subtest3	21.13	21.47	21.21	0.5
8		Subtest4	21.07	21.38	21.26	0.5

UMTS Average Conducted output powers

DC-HSDPA Configurations

- ◆ 3GPP specification TS 34.121-1 Release 8. was used for used for DC-HSDPA guidance.
- ◆ H-set 12(QPSK)was conformed to be used during DC-HSDPA measurements.



11.2.2 UMTS Reduced Conducted Output Power (Hotspot mode activated)

UMTS Band 4 Hotspot Back-off Power

3GPP Release Version	Mode	3GPP 34.121	UMTS Band4 [dBm]			3GPP MPR
		Subtest	UL 1312 DL 1537	UL 1412 DL 1637	UL 1513 DL 1738	
99	UMTS	12.2 kbps RMC	21.59	21.73	21.64	-
99		12.2 kbps AMR	21.08	21.72	21.62	-
5	HSDPA	Subtest 1	21.15	21.27	21.20	0
5		Subtest 2	21.15	21.25	21.23	0
5		Subtest 3	20.15	20.28	20.22	0.5
5		Subtest 4	20.16	20.25	20.23	0.5
6	HSUPA	Subtest 1	21.15	21.26	21.26	0
6		Subtest 2	18.65	18.70	18.70	2
6		Subtest 3	18.63	18.73	18.70	1
6		Subtest 4	18.65	18.77	18.72	2
6		Subtest 5	21.16	21.27	21.26	0
8	DC-HSDPA	Subtest 1	20.58	20.96	20.86	0
8		Subtest2	20.57	20.93	20.87	0
8		Subtest3	19.57	19.97	19.85	0.5
8		Subtest4	19.55	19.95	19.86	0.5

UMTS Average Conducted output powers


UMTS Band 2 Hotspot Back-off Power

3GPP Release Version	Mode	3GPP 34.121	UMTS Band 2 [dBm]			3GPP MPR
		Subtest	UL9262 DL9662	UL9400 DL9800	UL9538 DL9938	
99	UMTS	12.2 kbps RMC	21.09	21.45	21.30	-
99		12.2 kbps AMR	21.05	21.41	21.29	-
5	HSDPA	Subtest 1	20.66	21.03	20.88	0
5		Subtest 2	20.66	21.01	20.91	0
5		Subtest 3	19.64	20.00	19.90	0.5
5		Subtest 4	19.64	20.01	19.89	0.5
6	HSUPA	Subtest 1	20.62	21.02	20.91	0
6		Subtest 2	18.15	18.51	18.40	2
6		Subtest 3	18.10	18.49	18.38	1
6		Subtest 4	18.13	18.51	18.40	2
6		Subtest 5	20.35	21.01	20.91	0
8	DC-HSDPA	Subtest 1	19.99	20.32	20.25	0
8		Subtest2	20.00	20.37	20.27	0
8		Subtest3	19.07	19.42	19.28	0.5
8		Subtest4	19.03	19.39	19.28	0.5

UMTS Average Conducted output powers

DC-HSDPA Configurations

- ◆ 3GPP specification TS 34.121-1 Release 8. was used for used for DC-HSDPA guidance.
- ◆ H-set 12(QPSK) was conformed to be used during DC-HSDPA measurements.



11.2.3 UMTS Reduced Conducted Output Power – (Grip back Activated/ Ear jack Activated)

UMTS Band 4 Grip Back-off Power


3GPP Release Version	Mode	3GPP 34.121	UMTS Band4 [dBm]			3GPP MPR
		Subtest	UL 1312 DL 1537	UL 1412 DL 1637	UL 1513 DL 1738	
99	UMTS	12.2 kbps RMC	21.63	21.72	21.64	-
99		12.2 kbps AMR	21.48	21.54	21.44	-
5	HSDPA	Subtest 1	21.15	21.29	21.22	0
5		Subtest 2	21.16	21.25	21.23	0
5		Subtest 3	20.14	20.27	20.22	0.5
5		Subtest 4	20.16	20.28	20.21	0.5
6	HSUPA	Subtest 1	21.18	21.30	21.22	0
6		Subtest 2	18.67	18.77	18.70	2
6		Subtest 3	18.64	18.73	18.68	1
6		Subtest 4	18.66	18.70	18.70	2
6		Subtest 5	21.20	21.26	21.26	0
8	DC-HSDPA	Subtest 1	20.58	20.95	20.88	0
8		Subtest2	20.57	20.95	20.85	0
8		Subtest3	19.55	19.96	19.86	0.5
8		Subtest4	19.57	19.95	19.86	0.5

UMTS Average Conducted output powers

UMTS Band 2 Grip back-off Power

3GPP Release Version	Mode	3GPP 34.121	UMTS Band 2 [dBm]			3GPP MPR
		Subtest	UL9262 DL9662	UL9400 DL9800	UL9538 DL9938	
99	UMTS	12.2 kbps RMC	21.11	21.45	21.30	-
99		12.2 kbps AMR	20.91	21.34	21.18	-
5	HSDPA	Subtest 1	20.65	21.03	20.91	0
5		Subtest 2	20.68	21.03	20.89	0
5		Subtest 3	19.65	20.01	19.89	0.5
5		Subtest 4	19.66	20.02	19.91	0.5
6	HSUPA	Subtest 1	20.63	21.04	20.91	0
6		Subtest 2	18.13	18.54	18.42	2
6		Subtest 3	18.13	18.48	18.38	1
6		Subtest 4	18.12	18.49	18.41	2
6		Subtest 5	20.65	21.02	20.94	0
8	DC-HSDPA	Subtest 1	20.03	20.33	20.19	0
8		Subtest 2	19.99	20.37	20.21	0
8		Subtest 3	19.03	19.38	19.24	0.5
8		Subtest 4	19.08	19.38	19.22	0.5

- ◆ 3GPP specification TS 34.121-1 Release 8. was used for used for DC-HSDPA guidance.
- ◆ H-set 12(QPSK) was conformed to be used during DC-HSDPA measurements.



11.3 LTE Maximum Output Power

LTE B4/5/12/17/26 at 20 MHz Bandwidth does not support three non-overlapping channels. Per KDB 941225 D05v02r05, when a device supports overlapping channel assignment in a channel bandwidth configuration, the mid channel of the group of overlapping channels should be selected for testing.

11.3.1 LTE Maximum Conducted Power

[LTE Band 2 Conducted Power]

LTE Band 2 _ 1.4 MHz Bandwidth

Bandwidth	Modulation	RB Size	RB Offset	Max. Average Power [dBm]			MPR Allowed Per 3GPP [dB]	MPR [dB]
				18607 Ch. 1850.7 MHz	18900 Ch. 1880 MHz	19193 Ch. 1909.3 MHz		
1.4 MHz	QPSK	1	0	23.82	23.93	23.69	0	0
		1	3	23.83	23.94	23.75	0	0
		1	5	23.70	23.87	23.57	0	0
		3	0	23.80	24.01	23.77	0	0
		3	1	23.87	23.93	23.93	0	0
		3	3	23.77	23.96	23.83	0	0
	16QAM	6	0	22.84	22.96	22.83	0-1	1
		1	0	23.13	23.30	23.03	0-1	1
		1	3	23.16	23.34	23.02	0-1	1
		1	5	23.06	23.26	22.91	0-1	1
		3	0	23.09	23.22	23.19	0-1	1
		3	1	23.08	23.31	23.17	0-1	1
	64QAM	3	3	23.07	23.26	23.16	0-1	1
		6	0	21.97	22.14	21.94	0-2	2
		1	0	22.27	22.34	22.07	0-2	2
		1	3	22.08	22.25	21.99	0-2	2
		1	5	21.95	22.20	21.97	0-2	2
		3	0	21.99	21.97	22.06	0-2	2
	256QAM	3	1	21.88	22.14	21.98	0-2	2
		3	3	21.94	22.06	21.93	0-2	2
		6	0	20.77	21.05	20.83	0-3	3
		1	0	19.39	19.18	19.23	0-5	5
		1	3	19.16	19.06	19.04	0-5	5
		1	5	18.89	19.15	19.04	0-5	5
		3	0	19.03	19.19	19.06	0-5	5
		3	1	19.02	19.09	19.07	0-5	5
		3	3	19.15	19.11	19.15	0-5	5
		6	0	18.86	18.97	18.96	0-5	5

LTE Band 2 _ 3 MHz Bandwidth

Bandwidth	Modulation	RB Size	RB Offset	Max. Average Power [dBm]			MPR Allowed Per 3GPP [dB]	MPR [dB]
				18615 Ch. 1851.5 MHz	18900 Ch. 1880 MHz	19185 Ch. 1908.5 MHz		
3 MHz	QPSK	1	0	23.90	24.06	23.99	0	0
		1	7	23.99	24.00	23.86	0	0
		1	14	23.87	23.99	23.85	0	0
		8	0	23.01	23.12	23.05	0-1	1
		8	3	23.08	23.15	23.18	0-1	1
		8	7	22.99	23.08	22.93	0-1	1
		15	0	22.92	23.11	23.03	0-1	1
	16QAM	1	0	23.21	23.48	23.18	0-1	1
		1	7	23.13	23.22	22.91	0-1	1
		1	14	23.07	23.32	22.99	0-1	1
		8	0	22.09	22.09	22.11	0-2	2
		8	3	22.05	22.23	22.06	0-2	2
		8	7	21.97	22.17	22.10	0-2	2
		15	0	22.02	22.19	22.02	0-2	2
	64QAM	1	0	22.09	22.12	22.41	0-2	2
		1	7	22.06	22.40	22.26	0-2	2
		1	14	22.11	22.27	22.19	0-2	2
		8	0	21.06	21.22	21.15	0-3	3
		8	3	21.20	21.18	21.08	0-3	3
		8	7	21.08	21.05	20.97	0-3	3
		15	0	21.04	21.04	21.02	0-3	3
	256QAM	1	0	19.06	19.25	19.20	0-5	5
		1	7	19.06	19.23	19.05	0-5	5
		1	14	19.19	19.17	19.10	0-5	5
		8	0	19.02	19.14	19.04	0-5	5
		8	3	19.08	19.12	18.99	0-5	5
		8	7	18.99	19.27	19.00	0-5	5
		15	0	19.01	19.10	19.09	0-5	5

LTE Band 2 _ 5 MHz Bandwidth

Bandwidth	Modulation	RB Size	RB Offset	Max. Average Power [dBm]			MPR Allowed Per 3GPP [dB]	MPR [dB]
				18625 Ch. 1852.5 MHz	18900 Ch. 1880 MHz	19175 Ch. 1907.5 MHz		
5 MHz	QPSK	1	0	23.83	24.04	23.91	0	0
		1	12	23.93	24.14	23.85	0	0
		1	24	23.70	23.96	23.76	0	0
		12	0	23.02	23.14	23.05	0-1	1
		12	6	23.01	23.11	23.01	0-1	1
		12	11	22.92	23.15	22.97	0-1	1
		25	0	22.94	23.06	23.04	0-1	1
	16QAM	1	0	23.25	23.31	23.11	0-1	1
		1	12	23.11	23.26	23.06	0-1	1
		1	24	23.03	23.17	22.98	0-1	1
		12	0	22.13	22.17	22.07	0-2	2
		12	6	22.14	22.08	22.05	0-2	2
		12	11	22.12	22.19	22.06	0-2	2
		25	0	21.93	22.16	22.01	0-2	2
	64QAM	1	0	22.16	22.27	22.31	0-2	2
		1	12	22.16	22.40	22.21	0-2	2
		1	24	22.22	22.31	22.08	0-2	2
		12	0	21.03	21.08	21.17	0-3	3
		12	6	21.02	21.20	21.21	0-3	3
		12	11	20.95	21.03	20.98	0-3	3
		25	0	21.02	21.02	21.03	0-3	3
	256QAM	1	0	19.06	19.14	19.15	0-5	5
		1	12	19.16	19.18	19.21	0-5	5
		1	24	18.98	19.06	19.11	0-5	5
		12	0	19.03	19.11	19.01	0-5	5
		12	6	19.08	19.16	19.06	0-5	5
		12	11	18.97	19.18	19.03	0-5	5
		25	0	18.93	19.14	19.00	0-5	5

LTE Band 2 _ 10 MHz Bandwidth

Bandwidth	Modulation	RB Size	RB Offset	Max. Average Power [dBm]			MPR Allowed Per 3GPP [dB]	MPR [dB]
				18650 Ch. 1855 MHz	18900 Ch. 1880 MHz	19150 Ch. 1905 MHz		
10 MHz	QPSK	1	0	23.44	23.68	23.95	0	0
		1	24	23.88	23.99	23.81	0	0
		1	49	23.57	23.84	23.85	0	0
		25	0	22.88	23.01	22.86	0-1	1
		25	12	23.01	23.15	23.00	0-1	1
		25	24	22.95	23.07	22.96	0-1	1
		50	0	22.97	23.10	22.89	0-1	1
	16QAM	1	0	22.79	22.98	23.35	0-1	1
		1	24	23.04	23.30	23.24	0-1	1
		1	49	22.89	23.09	23.07	0-1	1
		25	0	21.94	22.02	21.88	0-2	2
		25	12	22.12	22.12	21.94	0-2	2
		25	24	22.08	22.08	22.00	0-2	2
		50	0	21.93	22.00	21.86	0-2	2
	64QAM	1	0	21.77	21.97	22.18	0-2	2
		1	24	22.15	22.33	22.19	0-2	2
		1	49	21.92	22.16	22.17	0-2	2
		25	0	20.97	20.99	20.92	0-3	3
		25	12	21.05	21.13	20.99	0-3	3
		25	24	20.92	21.08	20.94	0-3	3
		50	0	20.92	21.14	20.88	0-3	3
	256QAM	1	0	18.75	18.84	18.73	0-5	5
		1	24	18.98	19.24	19.11	0-5	5
		1	49	18.81	18.99	19.04	0-5	5
		25	0	18.93	18.94	18.88	0-5	5
		25	12	18.94	19.12	18.87	0-5	5
		25	24	18.99	19.17	18.93	0-5	5
		50	0	18.82	19.07	18.90	0-5	5

LTE Band 2 _ 15 MHz Bandwidth

Bandwidth	Modulation	RB Size	RB Offset	Max. Average Power [dBm]			MPR Allowed Per 3GPP [dB]	MPR [dB]
				18675 Ch. 1857.5 MHz	18900 Ch. 1880 MHz	19125 Ch. 1902.5 MHz		
15 MHz	QPSK	1	0	23.55	23.79	23.85	0	0
		1	36	23.76	23.83	23.77	0	0
		1	74	23.66	23.89	23.85	0	0
		36	0	22.76	22.85	22.85	0-1	1
		36	18	22.86	22.99	22.87	0-1	1
		36	39	22.84	23.01	22.90	0-1	1
		75	0	22.77	22.88	22.85	0-1	1
	16QAM	1	0	22.92	23.29	23.09	0-1	1
		1	36	23.14	23.21	23.07	0-1	1
		1	74	23.23	23.39	23.53	0-1	1
		36	0	21.81	21.82	21.84	0-2	2
		36	18	21.84	21.91	21.93	0-2	2
		36	39	21.85	22.02	21.88	0-2	2
		75	0	21.86	21.89	21.81	0-2	2
	64QAM	1	0	21.73	22.04	22.06	0-2	2
		1	36	21.95	22.18	22.17	0-2	2
		1	74	21.78	22.25	22.11	0-2	2
		36	0	20.75	20.90	20.82	0-3	3
		36	18	20.86	21.04	20.92	0-3	3
		36	39	20.92	21.06	20.90	0-3	3
		75	0	20.82	20.89	20.88	0-3	3
	256QAM	1	0	18.71	18.70	18.78	0-5	5
		1	36	18.87	18.97	18.93	0-5	5
		1	74	18.90	18.98	18.87	0-5	5
		36	0	18.82	18.83	18.79	0-5	5
		36	18	18.82	18.98	18.86	0-5	5
		36	39	18.85	19.13	18.91	0-5	5
		75	0	18.83	18.85	18.79	0-5	5

LTE Band 2 _ 20 MHz Bandwidth

Bandwidth	Modulation	RB Size	RB Offset	Max. Average Power [dBm]			MPR Allowed Per 3GPP [dB]	MPR [dB]
				18700 Ch. 1860 MHz	18900 Ch. 1880 MHz	19100 Ch. 1900 MHz		
20 MHz	QPSK	1	0	23.63	23.89	23.62	0	0
		1	49	23.76	24.00	23.71	0	0
		1	99	23.89	23.91	23.70	0	0
		50	0	22.65	22.89	22.68	0-1	1
		50	25	22.83	22.95	22.97	0-1	1
		50	49	22.73	22.99	22.92	0-1	1
		100	0	22.78	22.89	22.79	0-1	1
	16QAM	1	0	23.18	23.16	23.36	0-1	1
		1	49	23.26	23.39	23.27	0-1	1
		1	99	23.18	23.34	23.48	0-1	1
		50	0	21.71	21.76	21.70	0-2	2
		50	25	21.78	21.96	21.86	0-2	2
		50	49	21.82	21.95	21.90	0-2	2
		100	0	21.87	21.96	21.80	0-2	2
	64QAM	1	0	22.02	22.07	22.08	0-2	2
		1	49	21.85	22.21	22.05	0-2	2
		1	99	21.92	22.19	22.03	0-2	2
		50	0	20.66	20.81	20.71	0-3	3
		50	25	20.81	21.03	20.93	0-3	3
		50	49	20.77	21.02	20.89	0-3	3
		100	0	20.81	20.90	20.84	0-3	3
	256QAM	1	0	18.52	18.63	18.67	0-5	5
		1	49	18.78	18.99	18.93	0-5	5
		1	99	18.83	18.98	18.67	0-5	5
		50	0	18.74	18.83	18.75	0-5	5
		50	25	18.75	18.99	18.97	0-5	5
		50	49	18.79	19.02	18.88	0-5	5
		100	0	18.77	18.81	18.84	0-5	5

[LTE Band 4 Conducted Power]

LTE Band 4 _ 1.4 MHz Bandwidth

Bandwidth	Modulation	RB Size	RB Offset	Max. Average Power [dBm]			MPR Allowed Per 3GPP [dB]	MPR [dB]
				19957 Ch. 1710.7 MHz	20175 Ch. 1732.5 MHz	20393 Ch. 1754.3 MHz		
1.4 MHz	QPSK	1	0	24.21	24.42	24.26	0	0
		1	3	24.36	24.46	24.25	0	0
		1	5	24.18	24.31	24.08	0	0
		3	0	24.21	24.40	24.22	0	0
		3	1	24.28	24.39	24.28	0	0
		3	3	24.22	24.27	24.17	0	0
		6	0	23.45	23.40	23.31	0-1	1
	16QAM	1	0	23.73	23.87	23.43	0-1	1
		1	3	23.55	23.76	23.58	0-1	1
		1	5	23.46	23.59	23.57	0-1	1
		3	0	23.36	23.53	23.23	0-1	1
		3	1	23.33	23.47	23.37	0-1	1
		3	3	23.38	23.39	23.25	0-1	1
		6	0	22.53	22.55	22.39	0-2	2
	64QAM	1	0	22.46	22.49	22.55	0-2	2
		1	3	22.62	22.47	22.59	0-2	2
		1	5	22.58	22.57	22.42	0-2	2
		3	0	22.54	22.45	22.37	0-2	2
		3	1	22.41	22.50	22.31	0-2	2
		3	3	22.55	22.57	22.37	0-2	2
		6	0	21.42	21.29	21.28	0-3	3
	256QAM	1	0	19.42	19.49	19.42	0-5	5
		1	3	19.44	19.48	19.49	0-5	5
		1	5	19.42	19.38	19.35	0-5	5
		3	0	19.45	19.25	19.25	0-5	5
		3	1	19.38	19.43	19.34	0-5	5
		3	3	19.44	19.27	19.49	0-5	5
		6	0	19.27	19.31	19.40	0-5	5

LTE Band 4 _ 3 MHz Bandwidth

Bandwidth	Modulation	RB Size	RB Offset	Max. Average Power [dBm]			MPR Allowed Per 3GPP [dB]	MPR [dB]
				19965 Ch. 1711.5 MHz	20175 Ch. 1732.5 MHz	20385 Ch. 1753.5 MHz		
3 MHz	QPSK	1	0	24.34	24.42	24.17	0	0
		1	7	24.30	24.41	24.29	0	0
		1	14	24.35	24.36	24.18	0	0
		8	0	23.35	23.47	23.30	0-1	1
		8	3	23.61	23.53	23.42	0-1	1
		8	7	23.48	23.52	23.38	0-1	1
		15	0	23.52	23.46	23.31	0-1	1
	16QAM	1	0	23.91	23.89	23.42	0-1	1
		1	7	23.45	23.71	23.66	0-1	1
		1	14	23.58	23.59	23.65	0-1	1
		8	0	22.50	22.42	22.33	0-2	2
		8	3	22.60	22.49	22.40	0-2	2
		8	7	22.57	22.57	22.36	0-2	2
		15	0	22.53	22.52	22.29	0-2	2
	64QAM	1	0	22.48	22.70	22.63	0-2	2
		1	7	22.47	22.68	22.44	0-2	2
		1	14	22.56	22.71	22.59	0-2	2
		8	0	21.46	21.50	21.30	0-3	3
		8	3	21.60	21.64	21.45	0-3	3
		8	7	21.55	21.59	21.41	0-3	3
		15	0	21.49	21.55	21.32	0-3	3
	256QAM	1	0	19.35	19.43	19.44	0-5	5
		1	7	19.46	19.52	19.53	0-5	5
		1	14	19.45	19.37	19.33	0-5	5
		8	0	19.35	19.29	19.31	0-5	5
		8	3	19.38	19.45	19.39	0-5	5
		8	7	19.37	19.35	19.47	0-5	5
		15	0	19.29	19.30	19.41	0-5	5

LTE Band 4 _ 5 MHz Bandwidth

Bandwidth	Modulation	RB Size	RB Offset	Max. Average Power [dBm]			MPR Allowed Per 3GPP [dB]	MPR [dB]
				19975 Ch. 1712.5 MHz	20175 Ch. 1732.5 MHz	20375 Ch. 1752.5 MHz		
5 MHz	QPSK	1	0	24.26	24.38	24.14	0	0
		1	12	24.40	24.56	24.36	0	0
		1	24	24.30	24.36	24.12	0	0
		12	0	23.33	23.41	23.37	0-1	1
		12	6	23.51	23.51	23.47	0-1	1
		12	11	23.52	23.42	23.35	0-1	1
		25	0	23.49	23.42	23.39	0-1	1
	16QAM	1	0	23.24	23.47	23.27	0-1	1
		1	12	23.78	23.39	23.28	0-1	1
		1	24	23.74	23.64	23.38	0-1	1
		12	0	22.49	22.47	22.17	0-2	2
		12	6	22.61	22.62	22.41	0-2	2
		12	11	22.54	22.54	22.40	0-2	2
		25	0	22.51	22.60	22.41	0-2	2
	64QAM	1	0	22.45	22.64	22.41	0-2	2
		1	12	22.70	22.64	22.54	0-2	2
		1	24	22.58	22.60	22.39	0-2	2
		12	0	21.53	21.57	21.38	0-3	3
		12	6	21.70	21.62	21.57	0-3	3
		12	11	21.53	21.50	21.37	0-3	3
		25	0	21.48	21.51	21.39	0-3	3
	256QAM	1	0	19.44	19.52	19.46	0-5	5
		1	12	19.52	19.53	19.55	0-5	5
		1	24	19.50	19.41	19.37	0-5	5
		12	0	19.45	19.34	19.33	0-5	5
		12	6	19.45	19.53	19.43	0-5	5
		12	11	19.47	19.36	19.56	0-5	5
		25	0	19.35	19.35	19.43	0-5	5

LTE Band 4 _ 10 MHz Bandwidth

Bandwidth	Modulation	RB Size	RB Offset	Max. Average Power [dBm]			MPR Allowed Per 3GPP [dB]	MPR [dB]
				20000 Ch. 1715 MHz	20175 Ch. 1732.5 MHz	20350 Ch. 1750 MHz		
10 MHz	QPSK	1	0	23.81	24.00	23.72	0	0
		1	24	24.40	24.25	24.43	0	0
		1	49	24.16	24.04	24.03	0	0
		25	0	23.36	23.35	23.26	0-1	1
		25	12	23.52	23.51	23.42	0-1	1
		25	24	23.41	23.53	23.26	0-1	1
		50	0	23.43	23.44	23.25	0-1	1
	16QAM	1	0	23.16	23.55	23.22	0-1	1
		1	24	23.61	23.73	23.59	0-1	1
		1	49	23.41	23.57	23.51	0-1	1
		25	0	22.36	22.43	22.22	0-2	2
		25	12	22.61	22.51	22.42	0-2	2
		25	24	22.48	22.42	22.32	0-2	2
		50	0	22.50	22.43	22.33	0-2	2
	64QAM	1	0	22.29	22.28	22.20	0-2	2
		1	24	22.68	22.67	22.64	0-2	2
		1	49	22.26	22.46	22.26	0-2	2
		25	0	21.33	21.44	21.26	0-3	3
		25	12	21.59	21.48	21.49	0-3	3
		25	24	21.49	21.53	21.37	0-3	3
		50	0	21.45	21.44	21.29	0-3	3
	256QAM	1	0	19.43	19.44	19.41	0-5	5
		1	24	19.47	19.45	19.54	0-5	5
		1	49	19.42	19.33	19.36	0-5	5
		25	0	19.44	19.31	19.30	0-5	5
		25	12	19.35	19.43	19.41	0-5	5
		25	24	19.42	19.34	19.53	0-5	5
		50	0	19.34	19.33	19.41	0-5	5

LTE Band 4 _ 15 MHz Bandwidth

Bandwidth	Modulation	RB Size	RB Offset	Max. Average Power [dBm]			MPR Allowed Per 3GPP [dB]	MPR [dB]
				20025 Ch. 1717.5 MHz	20175 Ch. 1732.5 MHz	20325 Ch. 1747.5 MHz		
15 MHz	QPSK	1	0	23.88	23.93	24.05	0	0
		1	36	24.25	24.31	24.29	0	0
		1	74	24.11	24.30	24.22	0	0
		36	0	23.22	23.31	23.24	0-1	1
		36	18	23.38	23.35	23.30	0-1	1
		36	39	23.38	23.44	23.35	0-1	1
		75	0	23.37	23.23	23.21	0-1	1
	16QAM	1	0	23.44	23.39	23.54	0-1	1
		1	36	23.63	23.67	23.55	0-1	1
		1	74	23.50	23.58	23.68	0-1	1
		36	0	22.21	22.22	22.16	0-2	2
		36	18	22.39	22.35	22.28	0-2	2
		36	39	22.41	22.40	22.29	0-2	2
		75	0	22.32	22.37	22.21	0-2	2
	64QAM	1	0	22.35	22.21	22.07	0-2	2
		1	36	22.51	22.55	22.39	0-2	2
		1	74	22.46	22.35	22.43	0-2	2
		36	0	21.26	21.26	21.21	0-3	3
		36	18	21.49	21.36	21.32	0-3	3
		36	39	21.38	21.37	21.37	0-3	3
		75	0	21.31	21.35	21.24	0-3	3
	256QAM	1	0	18.96	18.96	19.13	0-5	5
		1	36	19.18	19.20	19.26	0-5	5
		1	74	19.21	19.14	19.15	0-5	5
		36	0	19.05	19.06	19.15	0-5	5
		36	18	19.28	19.20	19.17	0-5	5
		36	39	19.24	19.32	19.18	0-5	5
		75	0	19.21	19.15	19.20	0-5	5

LTE Band 4 _ 20 MHz Bandwidth

Bandwidth	Modulation	RB Size	RB Offset	Max. Average Power [dBm]			MPR Allowed Per 3GPP [dB]	MPR [dB]
				20050 Ch. 1720 MHz	20175 Ch. 1732.5 MHz	20300 Ch. 1745 MHz		
20MHz	QPSK	1	0	23.85	24.03	24.02	0	0
		1	49	24.12	24.21	24.17	0	0
		1	99	24.25	24.10	24.02	0	0
		50	0	23.18	23.19	23.10	0-1	1
		50	25	23.41	23.42	23.28	0-1	1
		50	49	23.35	23.38	23.39	0-1	1
		100	0	23.30	23.25	23.21	0-1	1
	16QAM	1	0	23.13	23.44	23.44	0-1	1
		1	49	23.45	23.58	23.50	0-1	1
		1	99	23.50	23.26	23.41	0-1	1
		50	0	22.17	22.23	22.11	0-2	2
		50	25	22.41	22.34	22.28	0-2	2
		50	49	22.36	22.39	22.24	0-2	2
		100	0	22.37	22.26	22.14	0-2	2
	64QAM	1	0	21.98	22.26	22.20	0-2	2
		1	49	22.45	22.49	22.50	0-2	2
		1	99	22.52	22.23	22.24	0-2	2
		50	0	21.14	21.16	21.23	0-3	3
		50	25	21.42	21.29	21.27	0-3	3
		50	49	21.41	21.37	21.33	0-3	3
		100	0	21.33	21.31	21.22	0-3	3
	256QAM	1	0	18.96	19.01	19.16	0-5	5
		1	49	19.27	19.30	19.34	0-5	5
		1	99	19.23	19.23	19.17	0-5	5
		50	0	19.14	19.11	19.21	0-5	5
		50	25	19.28	19.23	19.20	0-5	5
		50	49	19.32	19.39	19.23	0-5	5
		100	0	19.24	19.24	19.22	0-5	5

[LTE Band 5 Conducted Power]

LTE Band 5 _ 1.4 MHz Bandwidth

Bandwidth	Modulation	RB Size	RB Offset	Max. Average Power [dBm]			MPR Allowed Per 3GPP [dB]	MPR [dB]
				20407 Ch. 824.7 MHz	20525 Ch. 836.5 MHz	20643 Ch. 848.3 MHz		
1.4 MHz	QPSK	1	0	23.65	23.62	23.79	0	0
		1	3	23.70	23.81	24.08	0	0
		1	5	23.60	23.80	23.85	0	0
		3	0	23.61	23.73	23.68	0	0
		3	1	23.55	23.69	23.70	0	0
		3	3	23.57	23.67	23.66	0	0
		6	0	22.66	22.76	22.78	0-1	1
	16QAM	1	0	22.85	22.99	23.06	0-1	1
		1	3	23.21	23.25	23.42	0-1	1
		1	5	23.11	23.24	23.05	0-1	1
		3	0	22.63	22.84	22.87	0-1	1
		3	1	22.90	22.85	22.90	0-1	1
		3	3	22.67	22.91	22.84	0-1	1
		6	0	21.73	21.99	21.98	0-2	2
	64QAM	1	0	22.86	21.82	21.77	0-2	2
		1	3	22.85	21.99	22.00	0-2	2
		1	5	22.78	22.01	21.99	0-2	2
		3	0	22.74	21.85	21.79	0-2	2
		3	1	22.81	21.86	21.84	0-2	2
		3	3	22.81	21.86	21.81	0-2	2
		6	0	21.77	20.74	20.81	0-3	3
	256QAM	1	0	18.80	18.92	18.99	0-5	5
		1	3	18.63	18.96	19.04	0-5	5
		1	5	18.71	18.86	18.97	0-5	5
		3	0	18.84	18.91	19.07	0-5	5
		3	1	18.84	18.87	18.95	0-5	5
		3	3	18.72	18.97	19.02	0-5	5
		6	0	18.71	18.73	18.86	0-5	5

LTE Band 5 _ 3 MHz Bandwidth

Bandwidth	Modulation	RB Size	RB Offset	Max. Average Power [dBm]			MPR Allowed Per 3GPP [dB]	MPR [dB]
				20415 Ch. 825.5 MHz	20525 Ch. 836.5 MHz	20635 Ch. 847.5 MHz		
3 MHz	QPSK	1	0	23.68	23.77	23.70	0	0
		1	7	23.67	24.11	23.96	0	0
		1	14	23.66	23.83	23.87	0	0
		8	0	22.66	22.78	22.79	0-1	1
		8	3	22.73	23.00	22.99	0-1	1
		8	7	22.80	22.94	22.81	0-1	1
		15	0	22.79	22.84	22.88	0-1	1
	16QAM	1	0	22.92	23.13	23.06	0-1	1
		1	7	23.05	23.22	23.10	0-1	1
		1	14	23.09	23.30	23.12	0-1	1
		8	0	21.82	21.79	21.85	0-2	2
		8	3	21.85	21.93	22.03	0-2	2
		8	7	21.91	21.99	21.89	0-2	2
		15	0	21.83	21.80	21.94	0-2	2
	64QAM	1	0	21.84	21.82	21.81	0-2	2
		1	7	21.98	22.09	21.91	0-2	2
		1	14	22.03	21.71	21.88	0-2	2
		8	0	20.86	20.86	20.80	0-3	3
		8	3	21.10	21.08	21.03	0-3	3
		8	7	20.88	20.87	21.08	0-3	3
		15	0	20.91	20.78	20.99	0-3	3
	256QAM	1	0	18.76	18.85	18.87	0-5	5
		1	7	18.81	18.94	18.93	0-5	5
		1	14	18.81	18.95	18.89	0-5	5
		8	0	18.82	18.90	18.85	0-5	5
		8	3	18.85	18.80	18.94	0-5	5
		8	7	18.92	18.97	19.02	0-5	5
		15	0	18.88	18.83	18.80	0-5	5

LTE Band 5 _ 5 MHz Bandwidth

Bandwidth	Modulation	RB Size	RB Offset	Max. Average Power [dBm]			MPR Allowed Per 3GPP [dB]	MPR [dB]
				20425 Ch. 826.5 MHz	20525 Ch. 836.5 MHz	20625 Ch. 846.5 MHz		
5 MHz	QPSK	1	0	23.64	23.74	23.78	0	0
		1	12	23.64	24.10	23.93	0	0
		1	24	23.65	23.79	23.82	0	0
		12	0	22.76	22.80	22.82	0-1	1
		12	6	22.82	22.74	23.00	0-1	1
		12	11	22.78	22.90	22.90	0-1	1
		25	0	22.76	22.86	22.89	0-1	1
	16QAM	1	0	23.12	23.10	23.20	0-1	1
		1	12	23.05	23.36	23.08	0-1	1
		1	24	23.04	23.22	23.34	0-1	1
		12	0	21.79	21.86	21.82	0-2	2
		12	6	21.91	21.77	22.09	0-2	2
		12	11	21.86	21.99	21.97	0-2	2
		25	0	21.83	21.85	21.92	0-2	2
	64QAM	1	0	21.66	21.82	21.97	0-2	2
		1	12	21.92	21.78	22.08	0-2	2
		1	24	21.92	21.97	21.88	0-2	2
		12	0	20.76	20.82	20.80	0-3	3
		12	6	20.82	20.75	20.95	0-3	3
		12	11	20.84	20.86	20.96	0-3	3
		25	0	20.83	20.75	20.84	0-3	3
	256QAM	1	0	18.46	18.80	18.99	0-5	5
		1	12	18.78	18.90	18.99	0-5	5
		1	24	18.76	18.84	18.84	0-5	5
		12	0	18.74	18.78	18.85	0-5	5
		12	6	18.79	18.75	18.99	0-5	5
		12	11	18.82	18.91	18.86	0-5	5
		25	0	18.77	18.93	18.98	0-5	5

LTE Band 5 _ 10 MHz Bandwidth

Bandwidth	Modulation	RB Size	RB Offset	Max. Average Power [dBm]	MPR Allowed Per 3GPP [dB]	MPR [dB]
				20525 Ch. 836.5 MHz		
10 MHz	QPSK	1	0	23.90	0	0
		1	24	23.76	0	0
		1	49	23.63	0	0
		25	0	22.74	0-1	1
		25	12	22.82	0-1	1
		25	24	22.92	0-1	1
		50	0	22.76	0-1	1
	16QAM	1	0	23.13	0-1	1
		1	24	23.08	0-1	1
		1	49	23.08	0-1	1
		25	0	21.81	0-2	2
		25	12	21.84	0-2	2
		25	24	21.92	0-2	2
		50	0	21.82	0-2	2
	64QAM	1	0	22.02	0-2	2
		1	24	21.85	0-2	2
		1	49	22.15	0-2	2
		25	0	20.89	0-3	3
		25	12	20.87	0-3	3
		25	24	20.88	0-3	3
		50	0	20.79	0-3	3
	256QAM	1	0	18.60	0-5	5
		1	24	18.91	0-5	5
		1	49	18.67	0-5	5
		25	0	18.83	0-5	5
		25	12	18.87	0-5	5
		25	24	18.78	0-5	5
		50	0	18.85	0-5	5

[LTE Band 12 Conducted Power]

LTE Band 12 _ 1.4 MHz Bandwidth

Bandwidth	Modulation	RB Size	RB Offset	Max. Average Power [dBm]			MPR Allowed Per 3GPP [dB]	MPR [dB]
				23017 Ch. 699.7 MHz	23095 Ch. 707.5 MHz	23173 Ch. 715.3 MHz		
1.4 MHz	QPSK	1	0	24.33	24.04	23.71	0	0
		1	3	24.32	24.36	23.80	0	0
		1	5	24.27	23.98	23.73	0	0
		3	0	24.34	24.07	23.72	0	0
		3	1	24.37	24.08	23.76	0	0
		3	3	24.35	24.05	23.69	0	0
		6	0	23.37	23.19	22.85	0-1	1
	16QAM	1	0	23.70	23.39	22.92	0-1	1
		1	3	23.82	23.42	23.27	0-1	1
		1	5	23.70	23.36	22.98	0-1	1
		3	0	23.52	23.36	22.96	0-1	1
		3	1	23.52	23.44	23.02	0-1	1
		3	3	23.37	23.36	22.96	0-1	1
		6	0	22.50	22.45	22.00	0-2	2
	64QAM	1	0	22.55	22.19	22.03	0-2	2
		1	3	22.63	22.62	21.99	0-2	2
		1	5	22.51	22.21	21.86	0-2	2
		3	0	22.54	22.09	21.84	0-2	2
		3	1	22.58	22.33	21.89	0-2	2
		3	3	22.51	22.01	21.50	0-2	2
		6	0	21.66	21.21	20.86	0-3	3
	256QAM	1	0	19.66	19.34	18.76	0-5	5
		1	3	19.32	19.33	18.91	0-5	5
		1	5	19.56	19.23	18.66	0-5	5
		3	0	19.61	19.39	19.09	0-5	5
		3	1	19.56	19.24	18.89	0-5	5
		3	3	19.67	19.19	18.81	0-5	5
		6	0	19.40	19.11	18.78	0-5	5

LTE Band 12 _ 3 MHz Bandwidth

Bandwidth	Modulation	RB Size	RB Offset	Max. Average Power [dBm]			MPR Allowed Per 3GPP [dB]	MPR [dB]
				23025 Ch. 700.5 MHz	23095 Ch. 707.5 MHz	23165 Ch. 714.5 MHz		
3 MHz	QPSK	1	0	24.44	24.22	23.87	0	0
		1	7	24.49	24.23	23.87	0	0
		1	14	24.41	24.18	23.74	0	0
		8	0	23.62	23.27	22.99	0-1	1
		8	3	23.59	23.37	22.93	0-1	1
		8	7	23.46	23.23	22.86	0-1	1
		15	0	23.50	23.19	22.94	0-1	1
	16QAM	1	0	23.96	23.65	23.36	0-1	1
		1	7	23.76	23.50	23.14	0-1	1
		1	14	23.89	23.40	23.33	0-1	1
		8	0	22.66	22.41	22.06	0-2	2
		8	3	22.65	22.33	22.08	0-2	2
		8	7	22.48	22.29	21.89	0-2	2
		15	0	22.52	22.24	21.98	0-2	2
	64QAM	1	0	22.55	22.45	21.88	0-2	2
		1	7	22.66	22.12	21.82	0-2	2
		1	14	22.29	22.23	21.79	0-2	2
		8	0	21.65	21.37	21.09	0-3	3
		8	3	21.67	21.49	21.03	0-3	3
		8	7	21.59	21.24	20.90	0-3	3
		15	0	21.52	21.25	20.98	0-3	3
	256QAM	1	0	19.66	19.25	19.14	0-5	5
		1	7	19.50	19.35	18.91	0-5	5
		1	14	19.39	19.22	18.87	0-5	5
		8	0	19.48	19.49	19.03	0-5	5
		8	3	19.51	19.32	18.93	0-5	5
		8	7	19.44	19.16	19.00	0-5	5
		15	0	19.41	19.20	18.95	0-5	5

LTE Band 12 _ 5 MHz Bandwidth

Bandwidth	Modulation	RB Size	RB Offset	Max. Average Power [dBm]			MPR Allowed Per 3GPP [dB]	MPR [dB]
				23035 Ch. 701.5 MHz	23095 Ch. 707.5 MHz	23155 Ch. 713.5 MHz		
5 MHz	QPSK	1	0	24.35	24.24	24.01	0	0
		1	12	24.50	24.29	23.97	0	0
		1	24	24.24	24.12	23.77	0	0
		12	0	23.53	23.36	23.04	0-1	1
		12	6	23.45	23.32	23.06	0-1	1
		12	11	23.39	23.16	22.89	0-1	1
		25	0	23.47	23.17	23.04	0-1	1
	16QAM	1	0	23.90	23.55	23.38	0-1	1
		1	12	23.70	23.46	23.26	0-1	1
		1	24	23.76	23.47	23.20	0-1	1
		12	0	22.48	22.39	22.10	0-2	2
		12	6	22.64	22.29	22.18	0-2	2
		12	11	22.47	22.23	21.93	0-2	2
		25	0	22.42	22.34	22.03	0-2	2
	64QAM	1	0	22.63	22.31	22.08	0-2	2
		1	12	22.72	22.45	22.20	0-2	2
		1	24	22.38	22.11	21.91	0-2	2
		12	0	21.50	21.25	21.06	0-3	3
		12	6	21.44	21.37	21.03	0-3	3
		12	11	21.43	21.15	20.82	0-3	3
		25	0	21.48	21.22	20.94	0-3	3
	256QAM	1	0	19.77	19.30	18.98	0-5	5
		1	12	19.60	19.34	19.05	0-5	5
		1	24	19.42	19.15	18.94	0-5	5
		12	0	19.56	19.29	18.97	0-5	5
		12	6	19.30	19.34	19.06	0-5	5
		12	11	19.38	19.17	18.86	0-5	5
		25	0	19.44	19.19	18.95	0-5	5

LTE Band 12 _ 10 MHz Bandwidth

Bandwidth	Modulation	RB Size	RB Offset	Max. Average Power [dBm]	MPR Allowed Per 3GPP [dB]	MPR [dB]
				23095 Ch. 707.5 MHz		
10 MHz	QPSK	1	0	24.13	0	0
		1	24	24.19	0	0
		1	49	24.03	0	0
		25	0	23.36	0-1	1
		25	12	23.24	0-1	1
		25	24	23.13	0-1	1
		50	0	23.11	0-1	1
	16QAM	1	0	23.78	0-1	1
		1	24	23.53	0-1	1
		1	49	23.30	0-1	1
		25	0	22.14	0-2	2
		25	12	22.16	0-2	2
		25	24	22.12	0-2	2
		50	0	22.08	0-2	2
	64QAM	1	0	22.62	0-2	2
		1	24	22.41	0-2	2
		1	49	22.13	0-2	2
		25	0	21.33	0-3	3
		25	12	21.23	0-3	3
		25	24	21.18	0-3	3
		50	0	21.25	0-3	3
	256QAM	1	0	19.11	0-5	5
		1	24	19.37	0-5	5
		1	49	19.01	0-5	5
		25	0	19.14	0-5	5
		25	12	19.31	0-5	5
		25	24	19.02	0-5	5
		50	0	19.22	0-5	5

[LTE Band 17 Conducted Power]

LTE Band 17 _ 5 MHz Bandwidth

Bandwidth	Modulation	RB Size	RB Offset	Max. Average Power [dBm]			MPR Allowed Per 3GPP [dB]	MPR [dB]
				23755ch. 706.5 MHz	23790ch. 710 MHz	23825ch. 713.5 MHz		
5 MHz	QPSK	1	0	24.11	23.97	23.82	0	0
		1	12	24.34	24.17	24.00	0	0
		1	24	23.95	23.83	23.67	0	0
		12	0	23.27	23.09	22.95	0-1	1
		12	6	23.26	23.11	22.89	0-1	1
		12	11	23.17	23.08	22.79	0-1	1
		25	0	23.14	23.03	22.89	0-1	1
	16QAM	1	0	23.35	23.46	23.29	0-1	1
		1	12	23.62	23.51	23.18	0-1	1
		1	24	23.47	23.33	23.11	0-1	1
		12	0	22.32	22.22	21.87	0-2	2
		12	6	22.29	22.09	21.96	0-2	2
		12	11	22.17	22.08	21.76	0-2	2
		25	0	22.15	22.01	21.97	0-2	2
	64QAM	1	0	22.36	22.30	22.10	0-2	2
		1	12	22.29	22.21	21.95	0-2	2
		1	24	22.11	22.21	21.88	0-2	2
		12	0	21.28	21.08	20.88	0-3	3
		12	6	21.35	21.00	20.99	0-3	3
		12	11	21.19	21.08	20.74	0-3	3
		25	0	21.18	20.99	20.88	0-3	3
	256QAM	1	0	19.40	19.41	19.19	0-5	5
		1	12	19.31	19.38	19.07	0-5	5
		1	24	19.16	18.91	19.12	0-5	5
		12	0	19.24	19.28	19.14	0-5	5
		12	6	19.16	19.21	19.09	0-5	5
		12	11	19.13	19.00	18.85	0-5	5
		25	0	19.02	19.12	19.04	0-5	5

LTE Band17 _ 10 MHz Bandwidth

Bandwidth	Modulation	RB Size	RB Offset	Max. Average Power [dBm]			MPR Allowed Per 3GPP [dB]	MPR [dB]
				23780 ch. 709 MHz	23790ch. 710 MHz	23800 ch. 711 MHz		
10MHz	QPSK	1	0	24.17	24.12	24.21	0	0
		1	24	23.92	23.85	23.89	0	0
		1	49	23.85	23.84	23.64	0	0
		25	0	23.28	23.15	23.08	0-1	1
		25	12	23.21	23.08	23.10	0-1	1
		25	24	22.94	22.97	22.86	0-1	1
		50	0	22.97	23.00	23.03	0-1	1
	16QAM	1	0	23.50	23.56	23.53	0-1	1
		1	24	23.40	23.28	23.26	0-1	1
		1	49	23.04	23.05	23.09	0-1	1
		25	0	22.35	22.20	22.15	0-2	2
		25	12	22.25	22.12	22.17	0-2	2
		25	24	22.14	22.08	21.95	0-2	2
		50	0	22.15	22.07	22.03	0-2	2
	64QAM	1	0	22.54	22.45	22.41	0-2	2
		1	24	22.22	22.32	22.06	0-2	2
		1	49	21.96	21.83	21.87	0-2	2
		25	0	21.25	21.26	21.22	0-3	3
		25	12	21.28	21.09	21.19	0-3	3
		25	24	21.09	21.02	20.96	0-3	3
		50	0	21.13	21.04	21.02	0-3	3
	256QAM	1	0	19.45	19.43	19.26	0-5	5
		1	24	19.34	19.44	19.15	0-5	5
		1	49	19.19	18.94	19.13	0-5	5
		25	0	19.25	19.33	19.16	0-5	5
		25	12	19.26	19.21	19.17	0-5	5
		25	24	19.18	19.01	18.95	0-5	5
		50	0	19.10	19.16	19.06	0-5	5

[LTE Band 26 Conducted Power]

LTE Band 26 _ 1.4 MHz Bandwidth

Bandwidth	Modulation	RB Size	RB Offset	Max. Average Power [dBm]			MPR Allowed Per 3GPP [dB]	MPR [dB]
				26697 Ch. 814.7 MHz	26865 Ch. 831.5 MHz	27033 Ch. 848.3 MHz		
1.4 MHz	QPSK	1	0	23.66	23.68	23.75	0	0
		1	3	23.77	23.87	23.71	0	0
		1	5	23.59	23.67	23.67	0	0
		3	0	23.57	23.62	23.68	0	0
		3	1	23.69	23.69	23.72	0	0
		3	3	23.57	23.63	23.66	0	0
		6	0	22.75	22.76	22.84	0-1	1
	16QAM	1	0	22.93	22.91	23.07	0-1	1
		1	3	23.04	23.19	23.28	0-1	1
		1	5	23.02	23.05	23.07	0-1	1
		3	0	22.79	22.76	22.78	0-1	1
		3	1	22.81	22.75	22.94	0-1	1
		3	3	22.70	22.79	22.84	0-1	1
		6	0	21.88	21.82	21.85	0-2	2
	64QAM	1	0	21.98	21.89	21.92	0-2	2
		1	3	21.93	22.05	22.01	0-2	2
		1	5	21.91	21.95	21.99	0-2	2
		3	0	21.84	21.81	21.96	0-2	2
		3	1	21.82	21.88	21.85	0-2	2
		3	3	21.80	21.94	21.96	0-2	2
		6	0	20.72	20.65	20.89	0-3	3
	256QAM	1	0	18.46	18.49	18.69	0-5	5
		1	3	18.79	18.86	19.06	0-5	5
		1	5	18.63	18.67	18.80	0-5	5
		3	0	18.66	18.65	18.80	0-5	5
		3	1	18.68	18.78	18.95	0-5	5
		3	3	18.73	18.73	18.90	0-5	5
		6	0	18.66	18.63	18.84	0-5	5

LTE Band 26 _ 3 MHz Bandwidth

Bandwidth	Modulation	RB Size	RB Offset	Max. Average Power [dBm]			MPR Allowed Per 3GPP [dB]	MPR [dB]
				26705 Ch. 815.5 MHz	26865 Ch. 831.5 MHz	27025 Ch. 847.5 MHz		
3 MHz	QPSK	1	0	23.70	23.73	23.83	0	0
		1	7	23.95	23.97	23.85	0	0
		1	14	23.68	23.75	23.77	0	0
		8	0	22.74	22.77	22.85	0-1	1
		8	3	22.88	22.75	23.13	0-1	1
		8	7	22.77	22.85	22.93	0-1	1
		15	0	22.79	22.77	22.89	0-1	1
	16QAM	1	0	22.87	23.11	23.21	0-1	1
		1	7	23.21	23.23	23.34	0-1	1
		1	14	23.00	23.23	23.28	0-1	1
		8	0	21.76	21.79	21.94	0-2	2
		8	3	21.86	21.85	21.93	0-2	2
		8	7	21.80	21.93	21.90	0-2	2
		15	0	21.85	21.87	21.90	0-2	2
	64QAM	1	0	21.96	22.06	22.20	0-2	2
		1	7	21.89	22.05	21.98	0-2	2
		1	14	21.99	22.06	21.97	0-2	2
		8	0	20.95	20.81	20.95	0-3	3
		8	3	20.90	20.90	21.02	0-3	3
		8	7	20.78	20.94	20.92	0-3	3
		15	0	20.77	20.83	20.88	0-3	3
	256QAM	1	0	18.44	18.47	18.67	0-5	5
		1	7	18.79	18.92	19.12	0-5	5
		1	14	18.59	18.67	18.75	0-5	5
		8	0	18.66	18.63	18.80	0-5	5
		8	3	18.70	18.73	18.87	0-5	5
		8	7	18.76	18.79	18.89	0-5	5
		15	0	18.70	18.61	18.86	0-5	5

LTE Band 26 _ 5 MHz Bandwidth

Bandwidth	Modulation	RB Size	RB Offset	Max. Average Power [dBm]			MPR Allowed Per 3GPP [dB]	MPR [dB]
				26715 Ch. 816.5 MHz	26865 Ch. 831.5 MHz	27015 Ch. 846.5 MHz		
5 MHz	QPSK	1	0	23.76	23.83	23.90	0	0
		1	12	23.72	23.83	23.88	0	0
		1	24	23.65	23.75	23.81	0	0
		12	0	22.82	22.69	22.92	0-1	1
		12	6	22.75	22.79	22.97	0-1	1
		12	11	22.78	22.88	22.88	0-1	1
		25	0	22.77	22.77	22.89	0-1	1
	16QAM	1	0	23.00	23.12	23.18	0-1	1
		1	12	23.09	23.17	23.20	0-1	1
		1	24	22.89	23.32	23.35	0-1	1
		12	0	21.77	21.80	21.87	0-2	2
		12	6	21.82	21.82	21.94	0-2	2
		12	11	21.82	21.90	21.85	0-2	2
		25	0	21.78	21.81	21.84	0-2	2
	64QAM	1	0	21.87	22.03	22.20	0-2	2
		1	12	21.90	21.98	22.06	0-2	2
		1	24	21.87	22.08	22.03	0-2	2
		12	0	20.80	20.83	20.93	0-3	3
		12	6	20.74	20.90	21.00	0-3	3
		12	11	20.88	20.96	21.00	0-3	3
		25	0	20.73	20.77	20.88	0-3	3
	256QAM	1	0	18.40	18.50	18.74	0-5	5
		1	12	18.83	18.85	19.05	0-5	5
		1	24	18.63	18.66	18.73	0-5	5
		12	0	18.61	18.66	18.87	0-5	5
		12	6	18.69	18.79	18.90	0-5	5
		12	11	18.78	18.77	18.89	0-5	5
		25	0	18.73	18.59	18.83	0-5	5

LTE Band 26 _ 10 MHz Bandwidth

Bandwidth	Modulation	RB Size	RB Offset	Max. Average Power [dBm]			MPR Allowed Per 3GPP [dB]	MPR [dB]
				26740 Ch. 819 MHz	26865 Ch. 831.5 MHz	26990 Ch. 844 MHz		
10 MHz	QPSK	1	0	23.67	23.67	23.94	0	0
		1	24	23.70	23.90	23.83	0	0
		1	49	23.82	23.83	23.78	0	0
		25	0	22.57	22.71	22.86	0-1	1
		25	12	22.74	22.84	22.92	0-1	1
		25	24	22.79	22.89	22.87	0-1	1
		50	0	22.74	22.70	22.79	0-1	1
	16QAM	1	0	23.10	22.97	23.40	0-1	1
		1	24	22.96	23.11	23.12	0-1	1
		1	49	22.93	23.20	23.18	0-1	1
		25	0	21.57	21.70	21.85	0-2	2
		25	12	21.87	21.87	21.90	0-2	2
		25	24	21.77	21.84	21.94	0-2	2
		50	0	21.70	21.67	21.85	0-2	2
	64QAM	1	0	21.97	22.08	22.19	0-2	2
		1	24	21.86	22.02	22.26	0-2	2
		1	49	22.04	22.01	22.10	0-2	2
		25	0	20.61	20.73	20.84	0-3	3
		25	12	20.83	20.84	20.94	0-3	3
		25	24	20.78	20.90	20.97	0-3	3
		50	0	20.75	20.72	20.87	0-3	3
	256QAM	1	0	18.47	18.56	18.76	0-5	5
		1	24	18.89	18.94	19.12	0-5	5
		1	49	18.66	18.75	18.80	0-5	5
		25	0	18.66	18.68	18.89	0-5	5
		25	12	18.77	18.82	18.96	0-5	5
		25	24	18.81	18.80	18.95	0-5	5
		50	0	18.75	18.68	18.90	0-5	5

LTE Band 26 _ 15 MHz Bandwidth

Bandwidth	Modulation	RB Size	RB Offset	Max. Average Power [dBm]	MPR Allowed Per 3GPP [dB]	MPR [dB]
				26865 Ch. 831.5 MHz		
15 MHz	QPSK	1	0	23.64	0	0
		1	36	23.49	0	0
		1	74	23.57	0	0
		36	0	22.60	0-1	1
		36	18	22.69	0-1	1
		36	39	22.75	0-1	1
		75	0	22.61	0-1	1
	16QAM	1	0	22.86	0-1	1
		1	36	22.86	0-1	1
		1	74	22.88	0-1	1
		36	0	21.55	0-2	2
		36	18	21.67	0-2	2
		36	39	21.71	0-2	2
		75	0	21.56	0-2	2
	64QAM	1	0	21.77	0-2	2
		1	36	21.80	0-2	2
		1	74	21.77	0-2	2
		36	0	20.62	0-3	3
		36	18	20.70	0-3	3
		36	39	20.62	0-3	3
		75	0	20.57	0-3	3
	256QAM	1	0	18.48	0-5	5
		1	36	18.86	0-5	5
		1	74	18.71	0-5	5
		36	0	18.61	0-5	5
		36	18	18.74	0-5	5
		36	39	18.73	0-5	5
		75	0	18.60	0-5	5

[LTE Band 41 Conducted Power]

LTE Band 41 _ 5 MHz Bandwidth

Band width	Modulation	RB Size	RB Offset	Max. Average Power [dBm]					MPR Allowed Per GPP [dB]	MPR [dB]
				39750 Ch. 2506.0 MHz	40185 Ch. 2549.5 MHz	40620 Ch. 2593.0 MHz	41055 Ch. 2636.5 MHz	41490 Ch. 2680.0 MHz		
5 MHz	QPSK	1	0	23.95	23.91	24.34	24.23	24.05	0	0
		1	12	23.93	24.03	24.44	24.31	24.07	0	0
		1	24	23.78	23.99	24.35	24.15	23.91	0	0
		12	0	22.88	23.04	23.56	23.43	23.19	0-1	1
		12	6	22.90	22.81	23.33	23.20	23.19	0-1	1
		12	11	22.90	23.12	23.53	23.33	23.18	0-1	1
		25	0	22.90	23.02	23.50	23.40	23.16	0-1	1
	16QAM	1	0	22.99	23.11	23.54	23.44	23.18	0-1	1
		1	12	22.97	23.12	23.54	23.40	23.19	0-1	1
		1	24	22.97	23.11	23.47	23.34	23.11	0-1	1
		12	0	21.91	21.95	22.49	22.33	22.12	0-2	2
		12	6	21.90	22.01	22.47	22.34	22.16	0-2	2
		12	11	21.87	22.04	22.46	22.29	22.10	0-2	2
		25	0	21.86	22.13	22.57	22.45	22.25	0-2	2
	64QAM	1	0	21.63	21.73	22.18	22.16	21.98	0-2	2
		1	12	21.61	21.79	22.23	22.14	21.90	0-2	2
		1	24	21.59	21.76	22.20	22.04	21.86	0-2	2
		12	0	20.95	20.97	21.49	21.36	21.13	0-3	3
		12	6	20.97	21.05	21.50	21.38	21.18	0-3	3
		12	11	20.95	21.06	21.48	21.38	21.15	0-3	3
		25	0	20.95	21.02	21.49	21.40	21.20	0-3	3
	256QAM	1	0	18.82	18.91	19.33	19.37	19.08	0-5	5
		1	12	18.79	19.03	19.39	19.29	19.09	0-5	5
		1	24	18.72	18.97	19.32	19.18	18.91	0-5	5
		12	0	19.04	19.19	19.67	19.54	19.29	0-5	5
		12	6	18.99	19.18	19.68	19.56	19.34	0-5	5
		12	11	19.04	19.26	19.66	19.57	19.31	0-5	5
		25	0	18.92	19.09	19.59	19.49	19.27	0-5	5

LTE Band 41 _ 10 MHz Bandwidth

Band width	Modulation	RB Size	RB Offset	Max. Average Power [dBm]					MPR Allowed Per 3GPP [dB]	MPR [dB]
				39750 Ch. 2506.0 MHz	40185 Ch. 2549.5 MHz	40620 Ch. 2593.0 MHz	41055 Ch. 2636.5 MHz	41490 Ch. 2680.0 MHz		
10 MHz	QPSK	1	0	23.75	23.68	24.08	23.96	23.74	0	0
		1	24	23.73	23.96	24.31	24.19	23.94	0	0
		1	49	23.70	23.71	24.05	23.88	23.65	0	0
		25	0	22.91	22.92	23.35	23.34	23.14	0-1	1
		25	12	22.92	23.06	23.55	23.43	23.19	0-1	1
		25	24	22.87	23.04	23.45	23.28	23.09	0-1	1
		50	0	22.86	23.01	23.48	23.34	23.14	0-1	1
	16QAM	1	0	23.10	22.97	23.42	23.34	23.17	0-1	1
		1	24	22.96	23.22	23.58	23.49	23.35	0-1	1
		1	49	23.01	22.98	23.36	23.22	23.09	0-1	1
		25	0	21.93	22.05	22.47	22.38	22.17	0-2	2
		25	12	21.97	22.14	22.59	22.49	22.26	0-2	2
		25	24	21.90	22.07	22.50	22.36	22.15	0-2	2
		50	0	21.88	22.02	22.52	22.37	22.15	0-2	2
	64QAM	1	0	21.69	21.47	21.94	22.01	21.67	0-2	2
		1	24	21.56	21.80	22.21	22.11	21.94	0-2	2
		1	49	21.53	21.61	21.98	21.82	21.50	0-2	2
		25	0	20.91	21.01	21.44	21.41	21.15	0-3	3
		25	12	20.96	21.13	21.59	21.45	21.23	0-3	3
		25	24	20.90	21.07	21.49	21.36	21.13	0-3	3
		50	0	20.93	21.07	21.52	21.45	21.24	0-3	3
	256QAM	1	0	18.55	18.62	19.06	19.10	18.82	0-5	5
		1	24	18.72	18.97	19.37	19.25	19.00	0-5	5
		1	49	18.50	18.78	19.14	18.89	18.68	0-5	5
		25	0	18.90	19.09	19.46	19.42	19.23	0-5	5
		25	12	18.96	19.14	19.63	19.53	19.28	0-5	5
		25	24	18.84	19.08	19.54	19.41	19.18	0-5	5
		50	0	18.91	19.11	19.54	19.46	19.27	0-5	5

LTE Band 41 _ 15 MHz Bandwidth

Band width	Modulation	RB Size	RB Offset	Max. Average Power [dBm]					MPR Allowed Per 3GPP [dB]	MPR [dB]
				39750 Ch. 2506.0 MHz	40185 Ch. 2549.5 MHz	40620 Ch. 2593.0 MHz	41055 Ch. 2636.5 MHz	41490 Ch. 2680.0 MHz		
15 MHz	QPSK	1	0	23.62	23.56	24.10	24.10	23.68	0	0
		1	36	23.52	23.74	24.21	24.06	23.84	0	0
		1	74	23.54	23.61	24.11	23.84	23.83	0	0
		36	0	22.82	22.83	23.29	23.29	22.98	0-1	1
		36	18	22.82	22.91	23.46	23.33	23.09	0-1	1
		36	39	22.65	22.88	23.38	23.08	23.00	0-1	1
		75	0	22.74	22.81	23.38	23.24	23.02	0-1	1
	16QAM	1	0	23.10	22.93	23.45	23.46	23.15	0-1	1
		1	36	22.95	23.14	23.64	23.50	23.48	0-1	1
		1	74	22.85	22.88	23.45	23.20	23.35	0-1	1
		36	0	21.76	21.80	22.26	22.26	21.97	0-2	2
		36	18	21.76	21.86	22.37	22.28	22.06	0-2	2
		36	39	21.62	21.82	22.34	22.04	21.96	0-2	2
		75	0	21.79	21.83	22.39	22.26	22.04	0-2	2
	64QAM	1	0	21.47	21.30	21.84	21.91	21.53	0-2	2
		1	36	21.37	21.58	22.06	21.95	21.75	0-2	2
		1	74	21.25	21.41	21.86	21.62	21.64	0-2	2
		36	0	20.80	20.88	21.31	21.32	20.99	0-3	3
		36	18	20.82	20.92	21.45	21.31	21.15	0-3	3
		36	39	20.64	20.94	21.40	21.13	21.03	0-3	3
		75	0	20.80	20.88	21.39	21.28	21.08	0-3	3
	256QAM	1	0	18.49	18.54	19.03	19.09	18.63	0-5	5
		1	36	18.59	18.79	19.23	19.12	18.89	0-5	5
		1	74	18.41	18.60	19.05	18.74	18.80	0-5	5
		36	0	18.75	18.85	19.30	19.36	19.03	0-5	5
		36	18	18.83	18.92	19.47	19.37	19.12	0-5	5
		36	39	18.73	18.94	19.43	19.16	19.05	0-5	5
		75	0	18.78	18.87	19.44	19.31	19.06	0-5	5

LTE Band 41 _ 20 MHz Bandwidth

Band width	Modulation	RB Size	RB Offset	Max. Average Power [dBm]					MPR Allowed Per 3GPP [dB]	MPR [dB]
				39750 Ch. 2506.0 MHz	40185 Ch. 2549.5 MHz	40620 Ch. 2593.0 MHz	41055 Ch. 2636.5 MHz	41490 Ch. 2680.0 MHz		
20 MHz	QPSK	1	0	23.66	23.78	23.96	23.98	23.52	0	0
		1	49	23.55	23.79	24.25	24.09	23.87	0	0
		1	99	23.50	23.77	23.90	23.60	23.75	0	0
		50	0	22.82	22.86	23.26	23.30	22.95	0-1	1
		50	25	22.79	22.90	23.44	23.29	23.05	0-1	1
		50	49	22.68	22.95	23.34	23.05	23.00	0-1	1
		100	0	22.73	22.76	23.33	23.21	23.03	0-1	1
	16QAM	1	0	23.13	23.12	23.28	23.25	22.99	0-1	1
		1	49	22.77	23.09	23.60	23.39	23.47	0-1	1
		1	99	22.80	23.00	23.25	23.00	23.27	0-1	1
		50	0	21.84	21.89	22.28	22.33	21.97	0-2	2
		50	25	21.84	21.91	22.45	22.32	22.14	0-2	2
		50	49	21.67	21.95	22.34	22.09	22.05	0-2	2
		100	0	21.73	21.77	22.37	22.27	22.05	0-2	2
	64QAM	1	0	21.49	21.54	21.72	21.84	21.39	0-2	2
		1	49	21.38	21.54	22.06	21.99	21.73	0-2	2
		1	99	21.27	21.54	21.70	21.39	21.52	0-2	2
		50	0	20.85	20.95	21.31	21.34	20.98	0-3	3
		50	25	20.87	20.95	21.50	21.38	21.17	0-3	3
		50	49	20.72	21.02	21.39	21.10	21.05	0-3	3
		100	0	20.77	20.81	21.36	21.24	21.03	0-3	3
	256QAM	1	0	18.35	18.35	18.91	19.02	18.56	0-5	5
		1	49	18.58	18.78	19.21	19.13	18.86	0-5	5
		1	99	18.24	18.40	18.91	18.54	18.74	0-5	5
		50	0	18.75	18.89	19.34	19.42	19.06	0-5	5
		50	25	18.81	18.93	19.49	19.41	19.21	0-5	5
		50	49	18.67	18.91	19.40	19.16	19.10	0-5	5
		100	0	18.74	18.85	19.35	19.25	19.04	0-5	5

Note; LTE Band 41 has 5 required test channels per FCC KDB 447498 D01v06.

[LTE Band 66 Conducted Power]

LTE Band 66 _ 1.4 MHz Bandwidth

Bandwidth	Modulation	RB Size	RB Offset	Max. Average Power [dBm]			MPR Allowed Per 3GPP [dB]	MPR [dB]
				131979Ch. 1710.7 MHz	132322 Ch. 1745 MHz	132665 Ch. 1779.3 MHz		
1.4 MHz	QPSK	1	0	24.22	24.45	24.01	0	0
		1	3	24.07	24.34	24.11	0	0
		1	5	24.12	24.33	23.97	0	0
		3	0	24.11	24.30	24.03	0	0
		3	1	24.19	24.40	23.91	0	0
		3	3	24.09	24.27	24.05	0	0
		6	0	23.23	23.32	23.14	0-1	1
	16QAM	1	0	23.45	23.59	23.41	0-1	1
		1	3	23.50	23.80	23.41	0-1	1
		1	5	23.48	23.63	23.26	0-1	1
		3	0	23.44	23.55	23.37	0-1	1
		3	1	23.43	23.67	23.42	0-1	1
		3	3	23.34	23.64	23.31	0-1	1
		6	0	22.21	22.40	22.11	0-2	2
	64QAM	1	0	22.56	22.72	22.52	0-2	2
		1	3	22.35	22.60	22.34	0-2	2
		1	5	22.35	22.60	22.26	0-2	2
		3	0	22.17	22.43	22.21	0-2	2
		3	1	22.23	22.46	22.26	0-2	2
		3	3	22.14	22.25	22.18	0-2	2
		6	0	21.19	21.37	21.13	0-3	3
	256QAM	1	0	19.28	19.47	19.18	0-5	5
		1	3	19.32	19.34	19.17	0-5	5
		1	5	19.15	19.63	19.21	0-5	5
		3	0	19.26	19.46	19.43	0-5	5
		3	1	19.31	19.52	19.22	0-5	5
		3	3	19.28	19.40	19.17	0-5	5
		6	0	19.11	19.30	19.10	0-5	5

LTE Band 66 _ 3 MHz Bandwidth

Bandwidth	Modulation	RB Size	RB Offset	Max. Average Power [dBm]			MPR Allowed Per 3GPP [dB]	MPR [dB]
				131987 Ch. 1711.5 MHz	132322 Ch. 1745 MHz	132657 Ch. 1778.5 MHz		
3 MHz	QPSK	1	0	24.24	24.43	24.21	0	0
		1	7	24.16	24.40	24.43	0	0
		1	14	24.14	24.33	23.98	0	0
		8	0	23.37	23.50	23.26	0-1	1
		8	3	23.47	23.51	23.43	0-1	1
		8	7	23.28	23.41	23.17	0-1	1
		15	0	23.32	23.43	23.30	0-1	1
	16QAM	1	0	23.42	23.77	23.51	0-1	1
		1	7	23.53	23.66	23.29	0-1	1
		1	14	23.46	23.61	23.24	0-1	1
		8	0	22.36	22.53	22.34	0-2	2
		8	3	22.41	22.63	22.31	0-2	2
		8	7	22.33	22.51	22.30	0-2	2
		15	0	22.33	22.51	22.30	0-2	2
	64QAM	1	0	22.51	22.64	22.38	0-2	2
		1	7	22.39	22.70	22.21	0-2	2
		1	14	22.45	22.54	22.32	0-2	2
		8	0	21.45	21.50	21.23	0-3	3
		8	3	21.57	21.49	21.40	0-3	3
		8	7	21.33	21.42	21.26	0-3	3
		15	0	21.38	21.49	21.32	0-3	3
	256QAM	1	0	19.39	19.69	19.42	0-5	5
		1	7	19.34	19.53	19.47	0-5	5
		1	14	19.36	19.58	19.30	0-5	5
		8	0	19.48	19.54	19.28	0-5	5
		8	3	19.30	19.46	19.24	0-5	5
		8	7	19.32	19.41	19.29	0-5	5
		15	0	19.34	19.43	19.13	0-5	5

LTE Band 66 _ 5 MHz Bandwidth

Bandwidth	Modulation	RB Size	RB Offset	Max. Average Power [dBm]			MPR Allowed Per 3GPP [dB]	MPR [dB]
				131997 Ch. 1712.5 MHz	132322Ch. 1745 MHz	132647 Ch. 1777.5 MHz		
5 MHz	QPSK	1	0	24.26	24.42	24.12	0	0
		1	12	24.29	24.46	24.48	0	0
		1	24	24.20	24.29	24.16	0	0
		12	0	23.18	23.47	23.33	0-1	1
		12	6	23.35	23.43	23.31	0-1	1
		12	11	23.25	23.41	23.30	0-1	1
		25	0	23.40	23.46	23.26	0-1	1
	16QAM	1	0	23.56	23.75	23.38	0-1	1
		1	12	23.51	23.71	23.44	0-1	1
		1	24	23.39	23.55	23.26	0-1	1
		12	0	22.31	22.56	22.26	0-2	2
		12	6	22.38	22.53	22.32	0-2	2
		12	11	22.33	22.49	22.28	0-2	2
		25	0	22.34	22.50	22.21	0-2	2
	64QAM	1	0	22.31	22.74	22.27	0-2	2
		1	12	22.33	22.72	22.42	0-2	2
		1	24	22.50	22.40	22.30	0-2	2
		12	0	21.34	21.53	21.33	0-3	3
		12	6	21.45	21.54	21.23	0-3	3
		12	11	21.37	21.39	21.27	0-3	3
		25	0	21.32	21.45	21.29	0-3	3
	256QAM	1	0	19.36	19.58	19.10	0-5	5
		1	12	19.47	19.64	19.33	0-5	5
		1	24	19.34	19.47	19.24	0-5	5
		12	0	19.28	19.52	19.21	0-5	5
		12	6	19.37	19.42	19.21	0-5	5
		12	11	19.27	19.49	19.21	0-5	5
		25	0	19.27	19.51	19.16	0-5	5

LTE Band 66 _ 10 MHz Bandwidth

Bandwidth	Modulation	RB Size	RB Offset	Max. Average Power [dBm]			MPR Allowed Per 3GPP [dB]	MPR [dB]
				132022 Ch. 1715 MHz	132322 Ch. 1745 MHz	132622 Ch. 1775 MHz		
10 MHz	QPSK	1	0	23.81	23.97	23.71	0	0
		1	24	24.18	24.22	24.00	0	0
		1	49	24.26	24.09	23.82	0	0
		25	0	23.19	23.43	23.13	0-1	1
		25	12	23.31	23.44	23.20	0-1	1
		25	24	23.23	23.41	23.15	0-1	1
		50	0	23.24	23.33	23.16	0-1	1
	16QAM	1	0	23.34	23.44	23.05	0-1	1
		1	24	23.56	23.74	23.31	0-1	1
		1	49	23.46	23.50	23.19	0-1	1
		25	0	22.24	22.38	22.20	0-2	2
		25	12	22.40	22.53	22.25	0-2	2
		25	24	22.29	22.48	22.23	0-2	2
		50	0	22.32	22.38	22.24	0-2	2
	64QAM	1	0	22.07	22.29	22.11	0-2	2
		1	24	22.58	22.76	22.46	0-2	2
		1	49	22.33	22.50	22.22	0-2	2
		25	0	21.19	21.36	21.23	0-3	3
		25	12	21.43	21.51	21.31	0-3	3
		25	24	21.30	21.47	21.22	0-3	3
		50	0	21.32	21.49	21.25	0-3	3
	256QAM	1	0	19.07	19.26	19.08	0-5	5
		1	24	19.30	19.60	19.15	0-5	5
		1	49	19.28	19.33	19.02	0-5	5
		25	0	19.17	19.38	19.11	0-5	5
		25	12	19.39	19.40	19.34	0-5	5
		25	24	19.25	19.36	19.14	0-5	5
		50	0	19.34	19.39	19.23	0-5	5

LTE Band 66 _ 15 MHz Bandwidth

Bandwidth	Modulation	RB Size	RB Offset	Max. Average Power [dBm]			MPR Allowed Per 3GPP [dB]	MPR [dB]
				132047 Ch. 1717.5 MHz	132322 Ch. 1745 MHz	132597 Ch. 1772.5 MHz		
15 MHz	QPSK	1	0	23.97	24.18	24.12	0	0
		1	36	24.21	24.14	24.01	0	0
		1	74	24.08	24.17	24.00	0	0
		36	0	23.17	23.33	23.13	0-1	1
		36	18	23.35	23.33	23.23	0-1	1
		36	39	23.29	23.30	23.02	0-1	1
		75	0	23.23	23.33	23.16	0-1	1
	16QAM	1	0	23.39	23.64	23.64	0-1	1
		1	36	23.62	23.86	23.40	0-1	1
		1	74	23.54	23.59	23.56	0-1	1
		36	0	22.16	22.31	22.18	0-2	2
		36	18	22.25	22.38	22.16	0-2	2
		36	39	22.28	22.33	22.11	0-2	2
		75	0	22.25	22.29	22.18	0-2	2
	64QAM	1	0	22.14	22.32	22.26	0-2	2
		1	36	22.22	22.55	22.29	0-2	2
		1	74	22.38	22.33	22.13	0-2	2
		36	0	21.17	21.31	21.22	0-3	3
		36	18	21.30	21.50	21.22	0-3	3
		36	39	21.27	21.36	21.05	0-3	3
		75	0	21.28	21.36	21.19	0-3	3
	256QAM	1	0	19.03	19.25	18.99	0-5	5
		1	36	19.24	19.37	19.18	0-5	5
		1	74	19.28	19.18	18.94	0-5	5
		36	0	19.18	19.33	19.21	0-5	5
		36	18	19.23	19.31	19.21	0-5	5
		36	39	19.17	19.27	18.98	0-5	5
		75	0	19.25	19.21	19.12	0-5	5

LTE Band 66 _ 20 MHz Bandwidth

Bandwidth	Modulation	RB Size	RB Offset	Max. Average Power [dBm]			MPR Allowed Per 3GPP [dB]	MPR [dB]
				132072 Ch. 1720 MHz	132322 Ch. 1745 MHz	132572 Ch. 1770 MHz		
20 MHz	QPSK	1	0	23.73	23.88	24.07	0	0
		1	49	24.19	24.27	24.00	0	0
		1	99	24.13	24.18	24.10	0	0
		50	0	23.10	23.33	23.24	0-1	1
		50	25	23.37	23.40	23.22	0-1	1
		50	49	23.28	23.34	23.06	0-1	1
		100	0	23.25	23.28	23.19	0-1	1
	16QAM	1	0	23.18	23.28	23.61	0-1	1
		1	49	23.66	23.65	23.48	0-1	1
		1	99	23.49	23.42	23.49	0-1	1
		50	0	22.12	22.24	22.19	0-2	2
		50	25	22.34	22.39	22.26	0-2	2
		50	49	22.32	22.31	22.01	0-2	2
		100	0	22.31	22.35	22.13	0-2	2
	64QAM	1	0	21.91	22.05	22.39	0-2	2
		1	49	22.36	22.58	22.37	0-2	2
		1	99	22.23	22.23	22.27	0-2	2
		50	0	21.18	21.25	21.16	0-3	3
		50	25	21.30	21.40	21.30	0-3	3
		50	49	21.26	21.29	21.05	0-3	3
		100	0	21.22	21.34	21.20	0-3	3
	256QAM	1	0	18.77	18.97	19.02	0-5	5
		1	49	19.25	19.52	19.16	0-5	5
		1	99	19.25	19.12	18.97	0-5	5
		50	0	19.15	19.17	19.09	0-5	5
		50	25	19.26	19.39	19.10	0-5	5
		50	49	19.16	19.32	18.93	0-5	5
		100	0	19.26	19.35	19.07	0-5	5

The EUT enables maximum power reduction in accordance with 3GPP 36.101. The MPR settings are configured during the manufacture process and are not configurable by the network, carrier, or end user.

11.3.2 LTE Reduced Conducted Power(Hotspot activated)

[LTE Band 2 Conducted Power]

LTE Band 2 _ 1.4 MHz Bandwidth

Bandwidth	Modulation	RB Size	RB Offset	Reduced Power [dBm]			MPR Allowed Per 3GPP [dB]	MPR [dB]
				18607 Ch. 1850.7 MHz	18900 Ch. 1880 MHz	19193 Ch. 1909.3 MHz		
1.4 MHz	QPSK	1	0	20.70	21.00	20.74	0	0
		1	3	20.78	20.98	20.80	0	0
		1	5	20.59	20.86	20.71	0	0
		3	0	20.77	20.93	20.79	0	0
		3	1	20.77	20.93	20.76	0	0
		3	3	20.80	20.87	20.69	0	0
		6	0	20.84	20.97	20.88	0	0
	16QAM	1	0	21.06	21.26	21.22	0	0
		1	3	21.20	21.28	21.19	0	0
		1	5	20.93	21.14	21.08	0	0
		3	0	21.02	21.16	20.99	0	0
		3	1	21.00	21.19	21.05	0	0
		3	3	20.97	21.12	20.93	0	0
		6	0	20.99	20.98	20.87	0	0
	64QAM	1	0	21.20	21.15	21.28	0	0
		1	3	21.05	21.24	21.08	0	0
		1	5	21.01	21.18	21.03	0	0
		3	0	20.88	20.99	20.91	0	0
		3	1	20.92	21.06	20.94	0	0
		3	3	20.75	20.94	20.83	0	0
		6	0	20.74	20.91	20.85	0	0
	256QAM	1	0	19.05	19.06	19.02	0-2	2
		1	3	19.20	19.25	18.84	0-2	2
		1	5	18.93	19.04	18.97	0-2	2
		3	0	19.14	19.08	19.07	0-2	2
		3	1	19.07	19.13	19.01	0-2	2
		3	3	18.82	19.05	19.07	0-2	2
		6	0	18.86	18.89	18.96	0-2	2

LTE Band 2 _ 3 MHz Bandwidth

Bandwidth	Modulation	RB Size	RB Offset	Reduced Power [dBm]			MPR Allowed Per 3GPP [dB]	MPR [dB]
				18615 Ch. 1851.5 MHz	18900 Ch. 1880 MHz	19185 Ch. 1908.5 MHz		
3 MHz	QPSK	1	0	20.91	20.92	20.89	0	0
		1	7	20.94	21.00	20.73	0	0
		1	14	20.68	20.74	20.77	0	0
		8	0	20.92	21.10	20.90	0	0
		8	3	20.97	21.07	21.15	0	0
		8	7	20.83	21.04	20.83	0	0
		15	0	20.82	20.97	20.91	0	0
	16QAM	1	0	21.18	21.38	21.19	0	0
		1	7	21.04	21.27	20.96	0	0
		1	14	21.07	21.15	21.20	0	0
		8	0	21.11	21.17	21.03	0	0
		8	3	21.07	21.16	21.11	0	0
		8	7	20.96	21.15	21.01	0	0
		15	0	20.95	21.02	20.94	0	0
	64QAM	1	0	21.28	21.09	21.26	0	0
		1	7	21.13	21.18	21.20	0	0
		1	14	21.03	21.13	21.00	0	0
		8	0	20.99	21.17	21.04	0	0
		8	3	21.01	21.07	21.13	0	0
		8	7	20.97	21.16	21.01	0	0
		15	0	20.91	21.13	21.00	0	0
	256QAM	1	0	19.05	19.15	19.09	0-2	2
		1	7	18.94	19.02	19.01	0-2	2
		1	14	18.92	19.18	18.96	0-2	2
		8	0	18.98	19.14	18.95	0-2	2
		8	3	18.97	19.05	19.05	0-2	2
		8	7	18.89	19.06	18.91	0-2	2
		15	0	18.81	18.97	18.90	0-2	2

LTE Band 2 _ 5 MHz Bandwidth

Bandwidth	Modulation	RB Size	RB Offset	Reduced Power [dBm]			MPR Allowed Per 3GPP [dB]	MPR [dB]
				18625 Ch. 1852.5 MHz	18900 Ch. 1880 MHz	19175 Ch. 1907.5 MHz		
5 MHz	QPSK	1	0	20.64	20.88	20.82	0	0
		1	12	21.02	20.97	20.90	0	0
		1	24	20.62	20.81	20.61	0	0
		12	0	20.87	21.03	20.95	0	0
		12	6	20.95	21.07	20.92	0	0
		12	11	20.86	21.13	20.90	0	0
		25	0	20.94	20.96	20.96	0	0
	16QAM	1	0	21.18	21.29	21.17	0	0
		1	12	21.18	21.30	21.11	0	0
		1	24	21.01	21.20	21.01	0	0
		12	0	21.03	21.14	21.09	0	0
		12	6	21.01	21.12	21.07	0	0
		12	11	21.00	21.10	20.92	0	0
		25	0	20.94	20.93	20.91	0	0
	64QAM	1	0	20.95	21.05	21.06	0	0
		1	12	21.21	21.14	21.05	0	0
		1	24	21.00	21.14	21.08	0	0
		12	0	20.95	21.06	20.91	0	0
		12	6	20.95	21.03	21.00	0	0
		12	11	20.84	21.12	20.97	0	0
		25	0	20.88	20.96	20.88	0	0
	256QAM	1	0	18.94	18.96	19.05	0-2	2
		1	12	18.99	19.16	19.04	0-2	2
		1	24	18.87	19.06	18.87	0-2	2
		12	0	18.94	19.05	19.00	0-2	2
		12	6	18.80	19.03	19.01	0-2	2
		12	11	18.89	19.09	18.94	0-2	2
		25	0	18.89	18.91	18.97	0-2	2

LTE Band 2 _ 10 MHz Bandwidth

Bandwidth	Modulation	RB Size	RB Offset	Reduced Power [dBm]			MPR Allowed Per 3GPP [dB]	MPR [dB]
				18650 Ch. 1855 MHz	18900 Ch. 1880 MHz	19150 Ch. 1905 MHz		
10 MHz	QPSK	1	0	20.32	20.51	20.75	0	0
		1	24	20.79	21.09	20.86	0	0
		1	49	20.57	20.80	20.93	0	0
		25	0	20.85	20.98	20.77	0	0
		25	12	20.91	20.96	20.87	0	0
		25	24	20.80	20.99	20.78	0	0
	16QAM	50	0	20.83	20.95	20.86	0	0
		1	0	20.70	20.76	21.26	0	0
		1	24	21.12	21.34	21.18	0	0
		1	49	20.79	21.09	21.13	0	0
		25	0	20.81	20.89	20.84	0	0
		25	12	20.94	21.10	20.97	0	0
	64QAM	25	24	20.80	20.99	20.78	0	0
		50	0	20.82	20.95	20.70	0	0
		1	0	20.67	20.77	21.07	0	0
		1	24	21.07	21.23	21.20	0	0
		1	49	20.78	20.88	21.27	0	0
		25	0	20.87	20.92	20.81	0	0
	256QAM	25	12	20.97	20.99	20.94	0	0
		25	24	20.84	21.03	20.87	0	0
		50	0	20.83	20.98	20.82	0	0
		1	0	18.68	18.72	18.67	0-2	2
		1	24	18.97	19.26	18.98	0-2	2
		1	49	18.68	19.02	18.74	0-2	2
		25	0	18.78	18.94	18.83	0-2	2
		25	12	18.90	18.94	18.90	0-2	2
		25	24	18.75	19.10	18.83	0-2	2
		50	0	18.76	18.97	18.82	0-2	2

LTE Band 2 _ 15 MHz Bandwidth

Bandwidth	Modulation	RB Size	RB Offset	Reduced Power [dBm]			MPR Allowed Per 3GPP [dB]	MPR [dB]
				18675 Ch. 1857.5 MHz	18900 Ch. 1880 MHz	19125 Ch. 1902.5 MHz		
15 MHz	QPSK	1	0	20.48	20.61	20.73	0	0
		1	36	20.55	20.79	20.70	0	0
		1	74	20.55	20.88	20.69	0	0
		36	0	20.69	20.80	20.71	0	0
		36	18	20.67	20.86	20.81	0	0
		36	39	20.67	20.96	20.71	0	0
		75	0	20.69	20.79	20.79	0	0
	16QAM	1	0	20.87	20.97	21.19	0	0
		1	36	20.97	21.19	21.06	0	0
		1	74	21.01	21.26	21.09	0	0
		36	0	20.66	20.77	20.77	0	0
		36	18	20.72	20.84	20.77	0	0
		36	39	20.68	20.93	20.77	0	0
		75	0	20.71	20.87	20.76	0	0
	64QAM	1	0	20.71	20.91	20.93	0	0
		1	36	20.95	20.88	20.90	0	0
		1	74	20.95	21.01	21.01	0	0
		36	0	20.64	20.84	20.71	0	0
		36	18	20.76	20.90	20.81	0	0
		36	39	20.79	20.99	20.89	0	0
		75	0	20.66	20.81	20.79	0	0
	256QAM	1	0	18.61	18.68	18.77	0-2	2
		1	36	18.66	18.91	18.74	0-2	2
		1	74	18.70	18.88	18.79	0-2	2
		36	0	18.73	18.74	18.68	0-2	2
		36	18	18.79	18.92	18.87	0-2	2
		36	39	18.76	18.97	18.92	0-2	2
		75	0	18.74	18.83	18.78	0-2	2

LTE Band 2 _ 20 MHz Bandwidth

Bandwidth	Modulation	RB Size	RB Offset	Reduced Power [dBm]			MPR Allowed Per 3GPP [dB]	MPR [dB]
				18700 Ch. 1860 MHz	18900 Ch. 1880 MHz	19100 Ch. 1900 MHz		
20 MHz	QPSK	1	0	20.59	20.70	20.59	0	0
		1	49	20.55	20.74	20.70	0	0
		1	99	20.75	20.80	20.67	0	0
		50	0	20.66	20.74	20.55	0	0
		50	25	20.73	20.90	20.83	0	0
		50	49	20.64	20.95	20.71	0	0
		100	0	20.73	20.84	20.74	0	0
	16QAM	1	0	21.05	21.08	21.04	0	0
		1	49	20.95	21.24	21.07	0	0
		1	99	21.17	21.27	21.02	0	0
		50	0	20.60	20.71	20.60	0	0
		50	25	20.79	20.88	20.81	0	0
		50	49	20.70	20.90	20.83	0	0
		100	0	20.65	20.86	20.69	0	0
	64QAM	1	0	20.78	20.87	20.96	0	0
		1	49	20.76	21.09	20.95	0	0
		1	99	20.98	21.09	20.98	0	0
		50	0	20.65	20.71	20.59	0	0
		50	25	20.78	20.88	20.84	0	0
		50	49	20.70	20.99	20.83	0	0
		100	0	20.72	20.89	20.77	0	0
	256QAM	1	0	18.42	18.55	18.58	0-2	2
		1	49	18.58	18.96	18.78	0-2	2
		1	99	18.74	18.94	18.76	0-2	2
		50	0	18.65	18.73	18.64	0-2	2
		50	25	18.76	18.87	18.80	0-2	2
		50	49	18.66	18.91	18.82	0-2	2
		100	0	18.64	18.81	18.69	0-2	2

[LTE Band 4 Conducted Power]

LTE Band 4 _ 1.4 MHz Bandwidth

Bandwidth	Modulation	RB Size	RB Offset	Reduced Power [dBm]			MPR Allowed Per 3GPP [dB]	MPR [dB]
				19957 Ch. 1710.7 MHz	20175 Ch. 1732.5 MHz	20393 Ch. 1754.3 MHz		
1.4 MHz	QPSK	1	0	21.29	21.33	21.21	0	0
		1	3	21.35	21.39	21.23	0	0
		1	5	21.27	21.33	21.23	0	0
		3	0	21.28	21.35	21.23	0	0
		3	1	21.30	21.34	21.24	0	0
		3	3	21.25	21.40	21.19	0	0
		6	0	21.41	21.38	21.29	0	0
	16QAM	1	0	21.69	21.66	21.53	0	0
		1	3	21.66	21.71	21.51	0	0
		1	5	21.58	21.51	21.47	0	0
		3	0	21.40	21.51	21.35	0	0
		3	1	21.50	21.59	21.34	0	0
		3	3	21.29	21.40	21.23	0	0
		6	0	21.51	21.43	21.32	0	0
	64QAM	1	0	21.44	21.57	21.44	0	0
		1	3	21.16	21.68	21.58	0	0
		1	5	20.87	21.61	21.49	0	0
		3	0	21.32	21.55	21.47	0	0
		3	1	21.09	21.45	21.38	0	0
		3	3	20.84	21.58	21.41	0	0
		6	0	21.11	21.41	21.25	0	0
	256QAM	1	0	19.24	19.25	19.24	0-2	2
		1	3	19.64	19.46	19.48	0-2	2
		1	5	19.50	19.38	19.37	0-2	2
		3	0	19.43	19.46	19.39	0-2	2
		3	1	19.57	19.35	19.48	0-2	2
		3	3	19.59	19.61	19.54	0-2	2
		6	0	19.47	19.32	19.52	0-2	2

LTE Band 4 _ 3 MHz Bandwidth

Bandwidth	Modulation	RB Size	RB Offset	Reduced Power [dBm]			MPR Allowed Per 3GPP [dB]	MPR [dB]
				19965 Ch. 1711.5 MHz	20175 Ch. 1732.5 MHz	20385 Ch. 1753.5 MHz		
3 MHz	QPSK	1	0	21.33	21.54	21.25	0	0
		1	7	21.35	21.56	21.38	0	0
		1	14	21.38	21.39	21.27	0	0
		8	0	21.39	21.56	21.26	0	0
		8	3	21.66	21.50	21.31	0	0
		8	7	21.44	21.56	21.41	0	0
		15	0	21.43	21.43	21.33	0	0
	16QAM	1	0	21.73	21.82	21.69	0	0
		1	7	21.37	21.88	21.61	0	0
		1	14	21.63	21.67	21.57	0	0
		8	0	21.33	21.57	21.36	0	0
		8	3	21.52	21.62	21.40	0	0
		8	7	21.53	21.44	21.31	0	0
		15	0	21.52	21.49	21.36	0	0
	64QAM	1	0	21.76	21.80	21.63	0	0
		1	7	21.63	21.69	21.53	0	0
		1	14	21.54	21.66	21.45	0	0
		8	0	21.52	21.60	21.43	0	0
		8	3	21.63	21.57	21.44	0	0
		8	7	21.44	21.53	21.36	0	0
		15	0	21.49	21.46	21.36	0	0
	256QAM	1	0	19.23	19.31	19.26	0-2	2
		1	7	19.59	19.47	19.51	0-2	2
		1	14	19.46	19.42	19.45	0-2	2
		8	0	19.36	19.47	19.46	0-2	2
		8	3	19.58	19.39	19.49	0-2	2
		8	7	19.53	19.65	19.61	0-2	2
		15	0	19.48	19.37	19.50	0-2	2

LTE Band 4 _ 5 MHz Bandwidth

Bandwidth	Modulation	RB Size	RB Offset	Reduced Power [dBm]			MPR Allowed Per 3GPP [dB]	MPR [dB]
				19975 Ch. 1712.5 MHz	20175 Ch. 1732.5 MHz	20375 Ch. 1752.5 MHz		
5 MHz	QPSK	1	0	21.17	21.40	21.28	0	0
		1	12	21.44	21.44	21.34	0	0
		1	24	21.37	21.30	21.19	0	0
		12	0	21.42	21.45	21.34	0	0
		12	6	21.51	21.48	21.49	0	0
		12	11	21.40	21.45	21.36	0	0
		25	0	21.51	21.45	21.37	0	0
	16QAM	1	0	21.64	21.65	21.41	0	0
		1	12	21.70	21.41	21.41	0	0
		1	24	21.66	21.71	21.51	0	0
		12	0	21.40	21.51	21.29	0	0
		12	6	21.50	21.54	21.44	0	0
		12	11	21.52	21.42	21.39	0	0
		25	0	21.51	21.54	21.39	0	0
	64QAM	1	0	21.43	21.63	21.47	0	0
		1	12	21.60	21.69	21.62	0	0
		1	24	21.63	21.68	21.32	0	0
		12	0	21.49	21.56	21.33	0	0
		12	6	21.58	21.56	21.47	0	0
		12	11	21.51	21.53	21.43	0	0
		25	0	21.56	21.51	21.35	0	0
	256QAM	1	0	19.22	19.28	19.24	0-2	2
		1	12	19.55	19.46	19.47	0-2	2
		1	24	19.47	19.47	19.40	0-2	2
		12	0	19.39	19.50	19.40	0-2	2
		12	6	19.53	19.35	19.46	0-2	2
		12	11	19.55	19.56	19.51	0-2	2
		25	0	19.52	19.36	19.43	0-2	2

LTE Band 4 _ 10 MHz Bandwidth

Bandwidth	Modulation	RB Size	RB Offset	Reduced Power [dBm]			MPR Allowed Per 3GPP [dB]	MPR [dB]
				20000 Ch. 1715 MHz	20175 Ch. 1732.5 MHz	20350 Ch. 1750 MHz		
10 MHz	QPSK	1	0	20.95	21.03	20.72	0	0
		1	24	21.45	21.61	21.22	0	0
		1	49	21.15	21.08	21.03	0	0
		25	0	21.25	21.42	21.23	0	0
		25	12	21.46	21.46	21.45	0	0
		25	24	21.38	21.42	21.28	0	0
		50	0	21.41	21.39	21.23	0	0
	16QAM	1	0	21.39	21.50	21.22	0	0
		1	24	21.71	21.81	21.63	0	0
		1	49	21.63	21.64	21.45	0	0
		25	0	21.39	21.42	21.21	0	0
		25	12	21.54	21.47	21.44	0	0
		25	24	21.44	21.53	21.33	0	0
		50	0	21.40	21.42	21.33	0	0
	64QAM	1	0	21.33	21.30	21.10	0	0
		1	24	21.77	21.80	21.50	0	0
		1	49	21.44	21.45	21.35	0	0
		25	0	21.30	21.44	21.25	0	0
		25	12	21.59	21.52	21.51	0	0
		25	24	21.53	21.49	21.37	0	0
		50	0	21.44	21.50	21.41	0	0
	256QAM	1	0	19.29	19.24	19.28	0-2	2
		1	24	19.55	19.49	19.45	0-2	2
		1	49	19.47	19.45	19.38	0-2	2
		25	0	19.38	19.49	19.37	0-2	2
		25	12	19.60	19.36	19.47	0-2	2
		25	24	19.56	19.63	19.59	0-2	2
		50	0	19.49	19.32	19.43	0-2	2

LTE Band 4 _ 15 MHz Bandwidth

Bandwidth	Modulation	RB Size	RB Offset	Reduced Power [dBm]			MPR Allowed Per 3GPP [dB]	MPR [dB]
				20025 Ch. 1717.5 MHz	20175 Ch. 1732.5 MHz	20325 Ch. 1747.5 MHz		
15 MHz	QPSK	1	0	21.03	20.97	20.97	0	0
		1	36	21.26	21.30	21.30	0	0
		1	74	21.19	21.17	21.21	0	0
		36	0	21.24	21.32	21.19	0	0
		36	18	21.36	21.32	21.27	0	0
		36	39	21.46	21.38	21.35	0	0
		75	0	21.28	21.28	21.23	0	0
	16QAM	1	0	21.40	21.34	21.31	0	0
		1	36	21.60	21.60	21.51	0	0
		1	74	21.59	21.60	21.54	0	0
		36	0	21.23	21.26	21.22	0	0
		36	18	21.43	21.34	21.29	0	0
		36	39	21.38	21.37	21.35	0	0
		75	0	21.26	21.37	21.24	0	0
	64QAM	1	0	21.15	21.18	21.10	0	0
		1	36	21.52	21.42	21.32	0	0
		1	74	21.32	21.35	21.30	0	0
		36	0	21.25	21.26	21.16	0	0
		36	18	21.40	21.41	21.32	0	0
		36	39	21.42	21.34	21.27	0	0
		75	0	21.37	21.21	21.29	0	0
	256QAM	1	0	18.93	18.92	18.93	0-2	2
		1	36	19.26	19.18	19.25	0-2	2
		1	74	19.16	19.16	19.06	0-2	2
		36	0	19.14	19.17	19.11	0-2	2
		36	18	19.27	19.06	19.21	0-2	2
		36	39	19.22	19.29	19.30	0-2	2
		75	0	19.22	19.11	19.21	0-2	2

LTE Band 4 _ 20 MHz Bandwidth

Bandwidth	Modulation	RB Size	RB Offset	Reduced Power [dBm]			MPR Allowed Per 3GPP [dB]	MPR [dB]
				20050 Ch. 1720 MHz	20175 Ch. 1732.5 MHz	20300 Ch. 1745 MHz		
20MHz	QPSK	1	0	20.80	20.98	20.93	0	0
		1	49	21.19	21.26	21.12	0	0
		1	99	21.17	21.02	21.00	0	0
		50	0	21.07	21.24	21.26	0	0
		50	25	21.39	21.36	21.32	0	0
		50	49	21.35	21.39	21.29	0	0
		100	0	21.32	21.34	21.20	0	0
	16QAM	1	0	21.25	21.36	21.24	0	0
		1	49	21.59	21.66	21.60	0	0
		1	99	21.46	21.36	21.37	0	0
		50	0	21.14	21.20	21.15	0	0
		50	25	21.36	21.39	21.31	0	0
		50	49	21.43	21.46	21.41	0	0
		100	0	21.35	21.30	21.21	0	0
	64QAM	1	0	21.10	21.05	21.11	0	0
		1	49	21.47	21.39	21.44	0	0
		1	99	21.50	21.34	21.21	0	0
		50	0	21.22	21.24	21.24	0	0
		50	25	21.43	21.37	21.27	0	0
		50	49	21.33	21.32	21.31	0	0
		100	0	21.32	21.34	21.20	0	0
	256QAM	1	0	19.01	19.01	18.99	0-2	2
		1	49	19.35	19.19	19.25	0-2	2
		1	99	19.22	19.18	19.16	0-2	2
		50	0	19.14	19.22	19.16	0-2	2
		50	25	19.32	19.15	19.21	0-2	2
		50	49	19.29	19.35	19.31	0-2	2
		100	0	19.24	19.11	19.23	0-2	2

[LTE Band 66 Conducted Power]

LTE Band 66 _ 1.4 MHz Bandwidth

Bandwidth	Modulation	RB Size	RB Offset	Reduced Power [dBm]			MPR Allowed Per 3GPP [dB]	MPR [dB]
				131979Ch. 1710.7 MHz	132322 Ch. 1745 MHz	132665 Ch. 1779.3 MHz		
1.4 MHz	QPSK	1	0	21.22	21.37	21.09	0	0
		1	3	21.22	21.50	21.04	0	0
		1	5	21.26	21.42	21.00	0	0
		3	0	21.31	21.43	21.07	0	0
		3	1	21.21	21.48	21.06	0	0
		3	3	21.16	21.42	20.96	0	0
	16QAM	6	0	21.26	21.42	21.11	0	0
		1	0	21.54	21.73	21.44	0	0
		1	3	21.57	21.95	21.43	0	0
		1	5	21.56	21.73	21.35	0	0
		3	0	21.46	21.66	21.25	0	0
		3	1	21.42	21.72	21.37	0	0
	64QAM	3	3	21.42	21.72	21.20	0	0
		6	0	21.45	21.53	21.15	0	0
		1	0	21.62	21.82	21.31	0	0
		1	3	21.55	21.84	21.33	0	0
		1	5	21.59	21.71	21.28	0	0
		3	0	21.39	21.61	21.15	0	0
	256QAM	3	1	21.43	21.65	21.29	0	0
		3	3	21.34	21.62	21.10	0	0
		6	0	21.36	21.47	21.15	0	0
		1	0	19.37	19.88	19.27	0-2	2
		1	3	19.38	19.75	19.26	0-2	2
		1	5	19.37	19.61	19.17	0-2	2
		3	0	19.39	19.61	19.46	0-2	2
		3	1	19.57	19.65	19.22	0-2	2
		3	3	19.34	19.60	19.15	0-2	2
		6	0	19.30	19.59	19.17	0-2	2

LTE Band 66 _ 3 MHz Bandwidth

Bandwidth	Modulation	RB Size	RB Offset	Reduced Power [dBm]			MPR Allowed Per 3GPP [dB]	MPR [dB]
				131987 Ch. 1711.5 MHz	132322 Ch. 1745 MHz	132657 Ch. 1778.5 MHz		
3 MHz	QPSK	1	0	21.33	21.51	21.18	0	0
		1	7	21.22	21.63	21.21	0	0
		1	14	21.21	21.38	21.01	0	0
		8	0	21.46	21.52	21.33	0	0
		8	3	21.44	21.69	21.26	0	0
		8	7	21.38	21.47	21.16	0	0
		15	0	21.43	21.52	21.19	0	0
	16QAM	1	0	21.55	21.83	21.56	0	0
		1	7	21.62	21.70	21.36	0	0
		1	14	21.61	21.73	21.36	0	0
		8	0	21.57	21.66	21.27	0	0
		8	3	21.52	21.66	21.26	0	0
		8	7	21.39	21.56	21.18	0	0
		15	0	21.48	21.60	21.26	0	0
	64QAM	1	0	21.48	21.66	21.47	0	0
		1	7	21.44	21.81	21.15	0	0
		1	14	21.53	21.59	21.22	0	0
		8	0	21.61	21.68	21.27	0	0
		8	3	21.50	21.61	21.44	0	0
		8	7	21.51	21.62	21.20	0	0
		15	0	21.41	21.62	21.23	0	0
	256QAM	1	0	19.53	19.77	19.43	0-2	2
		1	7	19.46	19.76	19.30	0-2	2
		1	14	19.44	19.67	19.22	0-2	2
		8	0	19.58	19.63	19.30	0-2	2
		8	3	19.42	19.65	19.20	0-2	2
		8	7	19.41	19.62	19.23	0-2	2
		15	0	19.46	19.54	19.21	0-2	2

LTE Band 66 _ 5 MHz Bandwidth

Bandwidth	Modulation	RB Size	RB Offset	Reduced Power [dBm]			MPR Allowed Per 3GPP [dB]	MPR [dB]
				131997 Ch. 1712.5 MHz	132322Ch. 1745 MHz	132647 Ch. 1777.5 MHz		
5 MHz	QPSK	1	0	21.17	21.56	21.08	0	0
		1	12	21.29	21.63	21.10	0	0
		1	24	21.23	21.39	21.01	0	0
		12	0	21.38	21.49	21.25	0	0
		12	6	21.48	21.54	21.23	0	0
		12	11	21.38	21.42	21.20	0	0
		25	0	21.36	21.52	21.27	0	0
	16QAM	1	0	21.61	21.87	21.44	0	0
		1	12	21.69	21.86	21.38	0	0
		1	24	21.51	21.73	21.23	0	0
		12	0	21.44	21.58	21.28	0	0
		12	6	21.56	21.68	21.31	0	0
		12	11	21.51	21.62	21.25	0	0
		25	0	21.48	21.59	21.20	0	0
	64QAM	1	0	21.43	21.68	21.28	0	0
		1	12	21.63	21.87	21.13	0	0
		1	24	21.53	21.52	21.27	0	0
		12	0	21.41	21.62	21.22	0	0
		12	6	21.56	21.72	21.30	0	0
		12	11	21.53	21.53	21.23	0	0
		25	0	21.42	21.58	21.21	0	0
	256QAM	1	0	19.46	19.62	19.33	0-2	2
		1	12	19.59	19.68	19.31	0-2	2
		1	24	19.48	19.48	19.22	0-2	2
		12	0	19.37	19.63	19.21	0-2	2
		12	6	19.49	19.46	19.20	0-2	2
		12	11	19.35	19.53	19.22	0-2	2
		25	0	19.38	19.50	19.25	0-2	2

LTE Band 66 _ 10 MHz Bandwidth

Bandwidth	Modulation	RB Size	RB Offset	Reduced Power [dBm]			MPR Allowed Per 3GPP [dB]	MPR [dB]
				132022 Ch. 1715 MHz	132322 Ch. 1745 MHz	132622 Ch. 1775 MHz		
10 MHz	QPSK	1	0	20.89	21.01	20.79	0	0
		1	24	21.33	21.58	21.19	0	0
		1	49	21.22	21.33	21.06	0	0
		25	0	21.31	21.50	21.16	0	0
		25	12	21.52	21.54	21.27	0	0
		25	24	21.41	21.38	21.18	0	0
		50	0	21.41	21.49	21.19	0	0
	16QAM	1	0	21.32	21.46	21.02	0	0
		1	24	21.62	21.80	21.51	0	0
		1	49	21.63	21.71	21.25	0	0
		25	0	21.23	21.54	21.21	0	0
		25	12	21.46	21.62	21.26	0	0
		25	24	21.40	21.56	21.22	0	0
		50	0	21.39	21.45	21.19	0	0
	64QAM	1	0	21.15	21.39	21.12	0	0
		1	24	21.54	21.86	21.45	0	0
		1	49	21.45	21.39	21.01	0	0
		25	0	21.36	21.56	21.21	0	0
		25	12	21.58	21.62	21.36	0	0
		25	24	21.46	21.56	21.24	0	0
		50	0	21.47	21.51	21.27	0	0
	256QAM	1	0	19.20	19.34	19.06	0-2	2
		1	24	19.45	19.78	19.29	0-2	2
		1	49	19.40	19.38	19.15	0-2	2
		25	0	19.29	19.41	19.14	0-2	2
		25	12	19.56	19.55	19.31	0-2	2
		25	24	19.36	19.42	19.13	0-2	2
		50	0	19.42	19.41	19.20	0-2	2

LTE Band 66 _ 15 MHz Bandwidth

Bandwidth	Modulation	RB Size	RB Offset	Reduced Power [dBm]			MPR Allowed Per 3GPP [dB]	MPR [dB]
				132047 Ch. 1717.5 MHz	132322 Ch. 1745 MHz	132597 Ch. 1772.5 MHz		
15 MHz	QPSK	1	0	21.02	21.24	21.10	0	0
		1	36	21.24	21.43	21.01	0	0
		1	74	21.28	21.36	21.06	0	0
		36	0	21.28	21.42	21.14	0	0
		36	18	21.38	21.40	21.19	0	0
		36	39	21.44	21.35	21.02	0	0
		75	0	21.39	21.40	21.18	0	0
	16QAM	1	0	21.36	21.48	21.50	0	0
		1	36	21.72	21.80	21.38	0	0
		1	74	21.66	21.69	21.50	0	0
		36	0	21.23	21.39	21.23	0	0
		36	18	21.42	21.47	21.15	0	0
		36	39	21.38	21.43	21.05	0	0
		75	0	21.32	21.37	21.17	0	0
	64QAM	1	0	21.26	21.44	21.43	0	0
		1	36	21.55	21.61	21.32	0	0
		1	74	21.51	21.28	21.06	0	0
		36	0	21.27	21.41	21.22	0	0
		36	18	21.48	21.50	21.18	0	0
		36	39	21.45	21.46	21.15	0	0
		75	0	21.37	21.42	21.19	0	0
	256QAM	1	0	19.15	19.34	19.08	0-2	2
		1	36	19.43	19.62	18.94	0-2	2
		1	74	19.31	19.31	18.97	0-2	2
		36	0	19.26	19.42	19.18	0-2	2
		36	18	19.44	19.42	19.18	0-2	2
		36	39	19.31	19.38	19.09	0-2	2
		75	0	19.37	19.41	19.09	0-2	2

LTE Band 66 _ 20 MHz Bandwidth

Bandwidth	Modulation	RB Size	RB Offset	Reduced Power [dBm]			MPR Allowed Per 3GPP [dB]	MPR [dB]
				132072 Ch. 1720 MHz	132322 Ch. 1745 MHz	132572 Ch. 1770 MHz		
20 MHz	QPSK	1	0	20.75	20.96	21.11	0	0
		1	49	21.26	21.33	21.01	0	0
		1	99	21.11	21.21	20.97	0	0
		50	0	21.16	21.44	21.13	0	0
		50	25	21.40	21.45	21.19	0	0
		50	49	21.35	21.37	20.95	0	0
		100	0	21.33	21.30	21.17	0	0
	16QAM	1	0	21.18	21.39	21.52	0	0
		1	49	21.60	21.83	21.52	0	0
		1	99	21.59	21.63	21.35	0	0
		50	0	21.24	21.32	21.15	0	0
		50	25	21.43	21.50	21.20	0	0
		50	49	21.38	21.40	21.03	0	0
		100	0	21.28	21.39	21.20	0	0
	64QAM	1	0	21.09	21.20	21.39	0	0
		1	49	21.54	21.59	21.18	0	0
		1	99	21.48	21.40	21.20	0	0
		50	0	21.19	21.42	21.19	0	0
		50	25	21.51	21.54	21.18	0	0
		50	49	21.37	21.40	20.98	0	0
		100	0	21.33	21.39	21.27	0	0
	256QAM	1	0	18.94	19.11	18.98	0-2	2
		1	49	19.44	19.60	19.21	0-2	2
		1	99	19.27	19.20	18.93	0-2	2
		50	0	19.15	19.35	19.17	0-2	2
		50	25	19.35	19.46	19.26	0-2	2
		50	49	19.37	19.30	19.01	0-2	2
		100	0	19.32	19.38	19.21	0-2	2

11.3.3 LTE Reduced Conducted Power(Grip Sensor on, Ear jack Activated)

[LTE Band 2 Conducted Power]

LTE Band 2 _ 1.4 MHz Bandwidth

Bandwidth	Modulation	RB Size	RB Offset	Reduced Power [dBm]			MPR Allowed Per 3GPP [dB]	MPR [dB]
				18607 Ch. 1850.7 MHz	18900 Ch. 1880 MHz	19193 Ch. 1909.3 MHz		
1.4 MHz	QPSK	1	0	20.79	20.95	20.74	0	0
		1	3	20.72	20.92	20.85	0	0
		1	5	20.73	20.75	20.68	0	0
		3	0	20.81	20.93	20.81	0	0
		3	1	20.80	20.95	20.83	0	0
		3	3	20.73	20.92	20.70	0	0
		6	0	20.76	20.97	20.83	0	0
	16QAM	1	0	21.03	21.24	21.07	0	0
		1	3	21.01	21.30	21.08	0	0
		1	5	20.94	21.32	21.03	0	0
		3	0	20.75	21.10	21.03	0	0
		3	1	20.94	21.16	21.15	0	0
		3	3	20.76	21.19	21.04	0	0
		6	0	20.91	21.06	20.84	0	0
	64QAM	1	0	21.18	21.25	20.90	0	0
		1	3	20.99	21.17	21.14	0	0
		1	5	20.95	21.17	20.94	0	0
		3	0	20.95	21.04	20.96	0	0
		3	1	20.98	20.99	20.84	0	0
		3	3	20.90	20.95	20.80	0	0
		6	0	20.76	21.00	20.75	0	0
	256QAM	1	0	19.14	18.89	18.98	0-2	2
		1	3	18.94	19.23	18.93	0-2	2
		1	5	18.83	18.90	19.04	0-2	2
		3	0	18.97	19.23	19.00	0-2	2
		3	1	19.05	19.03	18.99	0-2	2
		3	3	18.99	19.16	18.90	0-2	2
		6	0	18.74	18.96	18.85	0-2	2

LTE Band 2 _ 3 MHz Bandwidth

Bandwidth	Modulation	RB Size	RB Offset	Reduced Power [dBm]			MPR Allowed Per 3GPP [dB]	MPR [dB]
				18615 Ch. 1851.5 MHz	18900 Ch. 1880 MHz	19185 Ch. 1908.5 MHz		
3 MHz	QPSK	1	0	20.84	20.96	20.93	0	0
		1	7	20.79	20.95	20.77	0	0
		1	14	20.75	20.94	20.80	0	0
		8	0	20.93	21.11	20.92	0	0
		8	3	20.90	20.97	20.98	0	0
		8	7	21.01	21.01	20.80	0	0
		15	0	20.85	20.99	20.94	0	0
	16QAM	1	0	21.17	21.44	21.11	0	0
		1	7	21.06	21.32	21.09	0	0
		1	14	21.06	21.11	21.07	0	0
		8	0	21.03	21.08	21.03	0	0
		8	3	21.13	21.22	21.02	0	0
		8	7	20.94	21.10	20.95	0	0
		15	0	20.87	21.10	20.99	0	0
	64QAM	1	0	21.11	21.09	21.20	0	0
		1	7	21.24	21.23	21.00	0	0
		1	14	21.03	21.19	21.06	0	0
		8	0	21.05	21.11	20.98	0	0
		8	3	21.07	21.22	21.14	0	0
		8	7	20.97	21.05	20.86	0	0
		15	0	20.93	21.06	20.96	0	0
	256QAM	1	0	18.99	19.22	19.19	0-2	2
		1	7	19.02	19.19	19.10	0-2	2
		1	14	18.98	19.15	18.97	0-2	2
		8	0	19.00	19.11	18.97	0-2	2
		8	3	18.99	19.05	18.99	0-2	2
		8	7	18.92	19.15	19.11	0-2	2
		15	0	18.89	18.99	19.05	0-2	2

LTE Band 2 _ 5 MHz Bandwidth

Bandwidth	Modulation	RB Size	RB Offset	Reduced Power [dBm]			MPR Allowed Per 3GPP [dB]	MPR [dB]
				18625 Ch. 1852.5 MHz	18900 Ch. 1880 MHz	19175 Ch. 1907.5 MHz		
5 MHz	QPSK	1	0	20.75	20.91	20.84	0	0
		1	12	20.84	20.93	20.85	0	0
		1	24	20.64	20.87	20.75	0	0
		12	0	20.90	20.99	20.90	0	0
		12	6	20.97	21.10	20.96	0	0
		12	11	20.86	21.05	20.90	0	0
		25	0	20.86	20.96	20.96	0	0
	16QAM	1	0	21.08	21.36	21.19	0	0
		1	12	21.20	21.31	21.14	0	0
		1	24	21.02	21.16	20.91	0	0
		12	0	20.99	21.04	21.01	0	0
		12	6	21.12	21.13	21.06	0	0
		12	11	20.98	21.20	21.04	0	0
		25	0	20.86	21.06	20.93	0	0
	64QAM	1	0	21.04	21.18	20.97	0	0
		1	12	20.94	21.28	21.08	0	0
		1	24	21.01	21.19	21.01	0	0
		12	0	20.91	21.07	20.99	0	0
		12	6	21.03	21.10	20.95	0	0
		12	11	20.87	21.08	20.91	0	0
		25	0	20.77	21.00	20.89	0	0
	256QAM	1	0	19.02	19.13	18.85	0-2	2
		1	12	18.97	19.21	19.07	0-2	2
		1	24	18.90	19.07	19.01	0-2	2
		12	0	18.97	19.09	19.02	0-2	2
		12	6	19.04	19.07	19.04	0-2	2
		12	11	18.92	19.13	18.97	0-2	2
		25	0	18.93	19.03	18.99	0-2	2

LTE Band 2 _ 10 MHz Bandwidth

Bandwidth	Modulation	RB Size	RB Offset	Reduced Power [dBm]			MPR Allowed Per 3GPP [dB]	MPR [dB]
				18650 Ch. 1855 MHz	18900 Ch. 1880 MHz	19150 Ch. 1905 MHz		
10 MHz	QPSK	1	0	20.43	20.43	20.83	0	0
		1	24	20.79	21.03	20.90	0	0
		1	49	20.43	20.68	20.78	0	0
		25	0	20.83	20.91	20.78	0	0
		25	12	20.90	20.97	20.86	0	0
		25	24	20.78	21.01	20.90	0	0
		50	0	20.86	20.99	20.79	0	0
	16QAM	1	0	20.86	20.86	21.14	0	0
		1	24	21.05	21.48	21.44	0	0
		1	49	20.87	20.95	21.04	0	0
		25	0	20.87	20.90	20.83	0	0
		25	12	20.93	21.02	20.96	0	0
		25	24	20.81	20.98	20.82	0	0
		50	0	20.71	20.91	20.82	0	0
	64QAM	1	0	20.75	20.91	21.08	0	0
		1	24	21.09	21.21	21.14	0	0
		1	49	20.82	21.06	21.15	0	0
		25	0	20.88	20.93	20.79	0	0
		25	12	20.89	21.10	20.88	0	0
		25	24	20.85	20.97	20.90	0	0
		50	0	20.87	20.95	20.85	0	0
	256QAM	1	0	18.65	18.76	18.67	0-2	2
		1	24	18.89	19.15	19.03	0-2	2
		1	49	18.67	18.87	18.83	0-2	2
		25	0	18.79	18.96	18.86	0-2	2
		25	12	18.94	19.13	18.89	0-2	2
		25	24	18.73	18.92	18.77	0-2	2
		50	0	18.86	18.92	18.79	0-2	2

LTE Band 2 _ 15 MHz Bandwidth

Bandwidth	Modulation	RB Size	RB Offset	Reduced Power [dBm]			MPR Allowed Per 3GPP [dB]	MPR [dB]
				18675 Ch. 1857.5 MHz	18900 Ch. 1880 MHz	19125 Ch. 1902.5 MHz		
15 MHz	QPSK	1	0	20.50	20.74	20.76	0	0
		1	36	20.69	20.85	20.72	0	0
		1	74	20.62	20.82	20.66	0	0
		36	0	20.62	20.73	20.74	0	0
		36	18	20.71	20.79	20.83	0	0
		36	39	20.77	20.98	20.77	0	0
		75	0	20.67	20.87	20.71	0	0
	16QAM	1	0	20.88	21.07	21.04	0	0
		1	36	20.86	21.21	21.03	0	0
		1	74	20.94	21.32	21.10	0	0
		36	0	20.68	20.79	20.71	0	0
		36	18	20.76	20.88	20.80	0	0
		36	39	20.76	20.98	20.80	0	0
		75	0	20.68	20.89	20.78	0	0
	64QAM	1	0	20.74	20.93	20.88	0	0
		1	36	20.87	21.07	20.78	0	0
		1	74	20.80	21.14	20.88	0	0
		36	0	20.66	20.77	20.76	0	0
		36	18	20.79	21.01	20.88	0	0
		36	39	20.79	20.91	20.84	0	0
		75	0	20.70	20.89	20.77	0	0
	256QAM	1	0	18.65	18.66	18.67	0-2	2
		1	36	18.62	18.92	18.86	0-2	2
		1	74	18.80	18.86	18.80	0-2	2
		36	0	18.68	18.79	18.79	0-2	2
		36	18	18.74	18.89	18.81	0-2	2
		36	39	18.76	18.94	18.87	0-2	2
		75	0	18.70	18.88	18.80	0-2	2

LTE Band 2 _ 20 MHz Bandwidth

Bandwidth	Modulation	RB Size	RB Offset	Reduced Power [dBm]			MPR Allowed Per 3GPP [dB]	MPR [dB]
				18700 Ch. 1860 MHz	18900 Ch. 1880 MHz	19100 Ch. 1900 MHz		
20 MHz	QPSK	1	0	20.64	20.85	20.74	0	0
		1	49	20.61	20.87	20.66	0	0
		1	99	20.69	20.76	20.73	0	0
		50	0	20.59	20.75	20.49	0	0
		50	25	20.73	20.84	20.76	0	0
		50	49	20.72	20.90	20.84	0	0
		100	0	20.63	20.71	20.70	0	0
	16QAM	1	0	21.05	21.14	21.08	0	0
		1	49	21.02	21.31	21.04	0	0
		1	99	21.03	21.25	21.16	0	0
		50	0	20.58	20.74	20.63	0	0
		50	25	20.70	20.90	20.75	0	0
		50	49	20.72	20.90	20.74	0	0
		100	0	20.73	20.85	20.78	0	0
	64QAM	1	0	20.93	20.84	20.88	0	0
		1	49	20.84	21.05	20.93	0	0
		1	99	20.96	21.04	20.95	0	0
		50	0	20.58	20.72	20.66	0	0
		50	25	20.73	20.89	20.86	0	0
		50	49	20.82	20.90	20.74	0	0
		100	0	20.65	20.85	20.78	0	0
	256QAM	1	0	18.46	18.49	18.58	0-2	2
		1	49	18.74	18.98	18.86	0-2	2
		1	99	18.69	18.89	18.85	0-2	2
		50	0	18.57	18.73	18.68	0-2	2
		50	25	18.69	18.90	18.86	0-2	2
		50	49	18.70	18.91	18.85	0-2	2
		100	0	18.67	18.93	18.79	0-2	2

[LTE Band 4 Conducted Power]

LTE Band 4 _ 1.4 MHz Bandwidth

Bandwidth	Modulation	RB Size	RB Offset	Reduced Power [dBm]			MPR Allowed Per 3GPP [dB]	MPR [dB]
				19957 Ch. 1710.7 MHz	20175 Ch. 1732.5 MHz	20393 Ch. 1754.3 MHz		
1.4 MHz	QPSK	1	0	21.27	21.38	21.18	0	0
		1	3	21.37	21.38	21.20	0	0
		1	5	21.25	21.33	21.17	0	0
		3	0	21.30	21.39	21.23	0	0
		3	1	21.31	21.31	21.25	0	0
		3	3	21.26	21.26	21.26	0	0
		6	0	21.36	21.42	21.32	0	0
	16QAM	1	0	21.47	21.83	21.52	0	0
		1	3	21.66	21.74	21.50	0	0
		1	5	21.66	21.78	21.57	0	0
		3	0	21.42	21.44	21.40	0	0
		3	1	21.38	21.46	21.35	0	0
		3	3	21.41	21.53	21.25	0	0
		6	0	21.42	21.47	21.41	0	0
	64QAM	1	0	21.39	21.63	21.70	0	0
		1	3	21.14	21.80	21.58	0	0
		1	5	21.52	21.69	21.46	0	0
		3	0	20.80	21.54	21.41	0	0
		3	1	20.78	21.52	21.46	0	0
		3	3	20.76	21.63	21.47	0	0
		6	0	21.32	21.35	21.30	0	0
	256QAM	1	0	19.29	19.27	19.32	0-2	2
		1	3	19.62	19.47	19.49	0-2	2
		1	5	19.37	19.31	19.43	0-2	2
		3	0	19.43	19.37	19.37	0-2	2
		3	1	19.51	19.44	19.46	0-2	2
		3	3	19.51	19.57	19.49	0-2	2
		6	0	19.40	19.46	19.39	0-2	2

LTE Band 4 _ 3 MHz Bandwidth

Bandwidth	Modulation	RB Size	RB Offset	Reduced Power [dBm]			MPR Allowed Per 3GPP [dB]	MPR [dB]
				19965 Ch. 1711.5 MHz	20175 Ch. 1732.5 MHz	20385 Ch. 1753.5 MHz		
3 MHz	QPSK	1	0	21.31	21.35	21.28	0	0
		1	7	21.35	21.56	21.27	0	0
		1	14	21.23	21.47	21.21	0	0
		8	0	21.41	21.44	21.28	0	0
		8	3	21.65	21.49	21.42	0	0
		8	7	21.49	21.55	21.36	0	0
		15	0	21.45	21.49	21.27	0	0
	16QAM	1	0	21.59	21.77	21.51	0	0
		1	7	21.39	21.64	21.34	0	0
		1	14	21.74	21.68	21.54	0	0
		8	0	21.47	21.57	21.35	0	0
		8	3	21.57	21.54	21.44	0	0
		8	7	21.45	21.53	21.35	0	0
		15	0	21.45	21.50	21.33	0	0
	64QAM	1	0	21.69	21.75	21.54	0	0
		1	7	21.55	21.59	21.40	0	0
		1	14	21.64	21.71	21.58	0	0
		8	0	21.47	21.49	21.46	0	0
		8	3	21.66	21.56	21.39	0	0
		8	7	21.54	21.64	21.55	0	0
		15	0	21.60	21.55	21.32	0	0
	256QAM	1	0	19.26	19.31	19.34	0-2	2
		1	7	19.60	19.48	19.51	0-2	2
		1	14	19.38	19.32	19.45	0-2	2
		8	0	19.36	19.38	19.35	0-2	2
		8	3	19.56	19.41	19.43	0-2	2
		8	7	19.55	19.50	19.50	0-2	2
		15	0	19.45	19.42	19.35	0-2	2

LTE Band 4 _ 5 MHz Bandwidth

Bandwidth	Modulation	RB Size	RB Offset	Reduced Power [dBm]			MPR Allowed Per 3GPP [dB]	MPR [dB]
				19975 Ch. 1712.5 MHz	20175 Ch. 1732.5 MHz	20375 Ch. 1752.5 MHz		
5 MHz	QPSK	1	0	21.24	21.27	21.16	0	0
		1	12	21.42	21.51	21.38	0	0
		1	24	21.28	21.38	21.18	0	0
		12	0	21.32	21.45	21.26	0	0
		12	6	21.49	21.48	21.37	0	0
		12	11	21.40	21.36	21.36	0	0
		25	0	21.47	21.47	21.43	0	0
	16QAM	1	0	21.81	21.83	21.48	0	0
		1	12	21.80	21.45	21.55	0	0
		1	24	21.59	21.71	21.37	0	0
		12	0	21.34	21.51	21.31	0	0
		12	6	21.57	21.56	21.39	0	0
		12	11	21.49	21.42	21.39	0	0
		25	0	21.49	21.53	21.37	0	0
	64QAM	1	0	21.55	21.67	21.24	0	0
		1	12	21.62	21.58	21.50	0	0
		1	24	21.49	21.56	21.46	0	0
		12	0	21.45	21.55	21.40	0	0
		12	6	21.61	21.48	21.56	0	0
		12	11	21.48	21.56	21.40	0	0
		25	0	21.48	21.49	21.42	0	0
	256QAM	1	0	19.24	19.33	19.25	0-2	2
		1	12	19.66	19.47	19.51	0-2	2
		1	24	19.38	19.36	19.45	0-2	2
		12	0	19.43	19.36	19.31	0-2	2
		12	6	19.54	19.44	19.44	0-2	2
		12	11	19.53	19.54	19.51	0-2	2
		25	0	19.47	19.40	19.39	0-2	2

LTE Band 4 _ 10 MHz Bandwidth

Bandwidth	Modulation	RB Size	RB Offset	Reduced Power [dBm]			MPR Allowed Per 3GPP [dB]	MPR [dB]
				20000 Ch. 1715 MHz	20175 Ch. 1732.5 MHz	20350 Ch. 1750 MHz		
10 MHz	QPSK	1	0	20.91	21.04	20.91	0	0
		1	24	21.20	21.42	21.49	0	0
		1	49	21.12	21.16	21.04	0	0
		25	0	21.29	21.42	21.13	0	0
		25	12	21.56	21.46	21.44	0	0
		25	24	21.33	21.44	21.28	0	0
		50	0	21.41	21.44	21.31	0	0
	16QAM	1	0	21.39	21.40	21.20	0	0
		1	24	21.61	21.67	21.54	0	0
		1	49	21.56	21.46	21.27	0	0
		25	0	21.40	21.40	21.28	0	0
		25	12	21.57	21.47	21.41	0	0
		25	24	21.44	21.44	21.31	0	0
		50	0	21.42	21.36	21.33	0	0
	64QAM	1	0	21.28	21.28	21.12	0	0
		1	24	21.55	21.54	21.54	0	0
		1	49	21.50	21.41	21.26	0	0
		25	0	21.38	21.44	21.24	0	0
		25	12	21.57	21.51	21.49	0	0
		25	24	21.44	21.47	21.36	0	0
		50	0	21.44	21.48	21.33	0	0
	256QAM	1	0	19.25	19.33	19.24	0-2	2
		1	24	19.59	19.47	19.53	0-2	2
		1	49	19.44	19.31	19.44	0-2	2
		25	0	19.38	19.34	19.37	0-2	2
		25	12	19.54	19.49	19.45	0-2	2
		25	24	19.58	19.55	19.46	0-2	2
		50	0	19.39	19.43	19.37	0-2	2

LTE Band 4 _ 15 MHz Bandwidth

Bandwidth	Modulation	RB Size	RB Offset	Reduced Power [dBm]			MPR Allowed Per 3GPP [dB]	MPR [dB]
				20025 Ch. 1717.5 MHz	20175 Ch. 1732.5 MHz	20325 Ch. 1747.5 MHz		
15 MHz	QPSK	1	0	21.14	21.12	20.91	0	0
		1	36	21.25	21.28	21.25	0	0
		1	74	21.23	21.12	21.20	0	0
		36	0	21.20	21.34	21.20	0	0
		36	18	21.37	21.37	21.36	0	0
		36	39	21.43	21.48	21.38	0	0
		75	0	21.28	21.29	21.17	0	0
	16QAM	1	0	21.41	21.34	21.34	0	0
		1	36	21.69	21.56	21.52	0	0
		1	74	21.59	21.57	21.60	0	0
		36	0	21.16	21.22	21.20	0	0
		36	18	21.43	21.41	21.32	0	0
		36	39	21.36	21.36	21.38	0	0
		75	0	21.31	21.37	21.29	0	0
	64QAM	1	0	21.17	21.17	21.17	0	0
		1	36	21.40	21.55	21.24	0	0
		1	74	21.39	21.44	21.38	0	0
		36	0	21.26	21.31	21.24	0	0
		36	18	21.41	21.34	21.34	0	0
		36	39	21.41	21.37	21.37	0	0
		75	0	21.32	21.28	21.25	0	0
	256QAM	1	0	18.99	18.99	18.99	0-2	2
		1	36	19.28	19.17	19.20	0-2	2
		1	74	19.16	19.10	19.14	0-2	2
		36	0	19.05	19.13	19.04	0-2	2
		36	18	19.25	19.16	19.13	0-2	2
		36	39	19.24	19.23	19.12	0-2	2
		75	0	19.18	19.14	19.11	0-2	2

LTE Band 4 _ 20 MHz Bandwidth

Bandwidth	Modulation	RB Size	RB Offset	Reduced Power [dBm]			MPR Allowed Per 3GPP [dB]	MPR [dB]
				20050 Ch. 1720 MHz	20175 Ch. 1732.5 MHz	20300 Ch. 1745 MHz		
20MHz	QPSK	1	0	20.86	20.97	21.07	0	0
		1	49	21.21	21.26	21.17	0	0
		1	99	21.19	20.97	21.17	0	0
		50	0	21.09	21.24	21.19	0	0
		50	25	21.41	21.34	21.29	0	0
		50	49	21.31	21.41	21.29	0	0
		100	0	21.33	21.26	21.18	0	0
	16QAM	1	0	21.22	21.30	21.31	0	0
		1	49	21.64	21.67	21.66	0	0
		1	99	21.67	21.50	21.33	0	0
		50	0	21.15	21.23	21.16	0	0
		50	25	21.37	21.32	21.27	0	0
		50	49	21.45	21.30	21.31	0	0
		100	0	21.37	21.30	21.21	0	0
	64QAM	1	0	21.11	21.09	21.03	0	0
		1	49	21.55	21.29	21.52	0	0
		1	99	21.41	21.36	21.25	0	0
		50	0	21.23	21.23	21.22	0	0
		50	25	21.42	21.39	21.31	0	0
		50	49	21.40	21.40	21.33	0	0
		100	0	21.32	21.29	21.24	0	0
	256QAM	1	0	19.02	19.04	19.04	0-2	2
		1	49	19.38	19.26	19.25	0-2	2
		1	99	19.16	19.10	19.18	0-2	2
		50	0	19.14	19.14	19.11	0-2	2
		50	25	19.29	19.21	19.21	0-2	2
		50	49	19.28	19.30	19.22	0-2	2
		100	0	19.18	19.18	19.13	0-2	2

[LTE Band 66 Conducted Power]

LTE Band 66 _ 1.4 MHz Bandwidth

Bandwidth	Modulation	RB Size	RB Offset	Reduced Power [dBm]			MPR Allowed Per 3GPP [dB]	MPR [dB]
				131979Ch. 1710.7 MHz	132322 Ch. 1745 MHz	132665 Ch. 1779.3 MHz		
1.4 MHz	QPSK	1	0	21.27	21.36	20.92	0	0
		1	3	21.34	21.48	21.05	0	0
		1	5	21.15	21.35	20.85	0	0
		3	0	21.20	21.34	21.01	0	0
		3	1	21.32	21.50	20.98	0	0
		3	3	21.20	21.38	20.95	0	0
	16QAM	6	0	21.29	21.44	21.06	0	0
		1	0	21.51	21.71	21.32	0	0
		1	3	21.52	21.82	21.39	0	0
		1	5	21.49	21.69	21.41	0	0
		3	0	21.47	21.56	21.29	0	0
		3	1	21.45	21.65	21.46	0	0
	64QAM	3	3	21.33	21.69	21.28	0	0
		6	0	21.47	21.46	21.12	0	0
		1	0	21.61	21.72	21.29	0	0
		1	3	21.27	21.70	21.32	0	0
		1	5	21.56	21.71	21.22	0	0
		3	0	21.16	21.56	21.16	0	0
	256QAM	3	1	20.66	21.67	21.25	0	0
		3	3	20.69	21.47	21.12	0	0
		6	0	20.63	21.43	21.21	0	0
		1	0	19.60	20.01	19.32	0-2	2
		1	3	19.31	19.66	19.31	0-2	2
		1	5	19.35	19.45	19.14	0-2	2
		3	0	19.38	19.59	19.17	0-2	2
		3	1	19.47	19.69	19.25	0-2	2
		3	3	19.41	19.76	19.27	0-2	2
		6	0	19.31	19.45	19.17	0-2	2

LTE Band 66 _ 3 MHz Bandwidth

Bandwidth	Modulation	RB Size	RB Offset	Reduced Power [dBm]			MPR Allowed Per 3GPP [dB]	MPR [dB]
				131987 Ch. 1711.5 MHz	132322 Ch. 1745 MHz	132657 Ch. 1778.5 MHz		
3 MHz	QPSK	1	0	21.39	21.42	21.04	0	0
		1	7	21.22	21.49	21.23	0	0
		1	14	21.25	21.53	21.02	0	0
		8	0	21.40	21.52	21.18	0	0
		8	3	21.37	21.54	21.44	0	0
		8	7	21.41	21.50	21.20	0	0
		15	0	21.44	21.53	21.20	0	0
	16QAM	1	0	21.69	21.81	21.45	0	0
		1	7	21.62	21.75	21.36	0	0
		1	14	21.52	21.67	21.32	0	0
		8	0	21.53	21.66	21.30	0	0
		8	3	21.47	21.68	21.38	0	0
		8	7	21.48	21.53	21.27	0	0
		15	0	21.49	21.63	21.26	0	0
	64QAM	1	0	21.64	21.66	21.37	0	0
		1	7	21.58	21.64	21.32	0	0
		1	14	21.63	21.47	21.25	0	0
		8	0	21.49	21.70	21.30	0	0
		8	3	21.53	21.66	21.39	0	0
		8	7	21.51	21.53	21.24	0	0
		15	0	21.53	21.57	21.24	0	0
	256QAM	1	0	19.41	19.72	19.36	0-2	2
		1	7	19.49	19.67	19.25	0-2	2
		1	14	19.30	19.62	19.11	0-2	2
		8	0	19.42	19.65	19.36	0-2	2
		8	3	19.55	19.62	19.30	0-2	2
		8	7	19.41	19.57	19.21	0-2	2
		15	0	19.40	19.55	19.24	0-2	2

LTE Band 66 _ 5 MHz Bandwidth

Bandwidth	Modulation	RB Size	RB Offset	Reduced Power [dBm]			MPR Allowed Per 3GPP [dB]	MPR [dB]
				131997 Ch. 1712.5 MHz	132322Ch. 1745 MHz	132647 Ch. 1777.5 MHz		
5 MHz	QPSK	1	0	21.24	21.48	21.10	0	0
		1	12	21.26	21.53	21.20	0	0
		1	24	21.29	21.44	20.96	0	0
		12	0	21.36	21.56	21.24	0	0
		12	6	21.41	21.56	21.27	0	0
		12	11	21.40	21.43	21.24	0	0
		25	0	21.39	21.51	21.16	0	0
	16QAM	1	0	21.56	21.79	21.46	0	0
		1	12	21.64	21.74	21.41	0	0
		1	24	21.72	21.85	21.28	0	0
		12	0	21.41	21.66	21.31	0	0
		12	6	21.53	21.59	21.27	0	0
		12	11	21.46	21.56	21.16	0	0
		25	0	21.41	21.52	21.23	0	0
	64QAM	1	0	21.41	21.62	21.32	0	0
		1	12	21.41	21.67	21.38	0	0
		1	24	21.54	21.70	21.17	0	0
		12	0	21.31	21.66	21.31	0	0
		12	6	21.39	21.57	21.28	0	0
		12	11	21.47	21.54	21.16	0	0
		25	0	21.45	21.53	21.20	0	0
	256QAM	1	0	19.16	19.66	19.38	0-2	2
		1	12	19.53	19.67	19.24	0-2	2
		1	24	19.52	19.61	19.21	0-2	2
		12	0	19.41	19.53	19.21	0-2	2
		12	6	19.45	19.58	19.21	0-2	2
		12	11	19.45	19.55	19.21	0-2	2
		25	0	19.53	19.55	19.18	0-2	2

LTE Band 66 _ 10 MHz Bandwidth

Bandwidth	Modulation	RB Size	RB Offset	Reduced Power [dBm]			MPR Allowed Per 3GPP [dB]	MPR [dB]
				132022 Ch. 1715 MHz	132322 Ch. 1745 MHz	132622 Ch. 1775 MHz		
10 MHz	QPSK	1	0	20.90	21.05	20.70	0	0
		1	24	21.21	21.64	21.03	0	0
		1	49	21.12	21.32	20.81	0	0
		25	0	21.34	21.46	21.17	0	0
		25	12	21.43	21.50	21.29	0	0
		25	24	21.38	21.49	21.16	0	0
		50	0	21.31	21.51	21.10	0	0
	16QAM	1	0	21.26	21.68	21.16	0	0
		1	24	21.75	21.98	21.36	0	0
		1	49	21.67	21.67	21.21	0	0
		25	0	21.36	21.52	21.25	0	0
		25	12	21.51	21.57	21.27	0	0
		25	24	21.44	21.49	21.26	0	0
		50	0	21.44	21.49	21.18	0	0
	64QAM	1	0	21.16	21.30	21.12	0	0
		1	24	21.62	21.84	21.37	0	0
		1	49	21.40	21.57	21.08	0	0
		25	0	21.38	21.51	21.26	0	0
		25	12	21.52	21.66	21.28	0	0
		25	24	21.46	21.58	21.26	0	0
		50	0	21.48	21.49	21.16	0	0
	256QAM	1	0	19.13	19.34	19.10	0-2	2
		1	24	19.44	19.82	19.24	0-2	2
		1	49	19.36	19.44	19.03	0-2	2
		25	0	19.32	19.52	19.07	0-2	2
		25	12	19.49	19.59	19.24	0-2	2
		25	24	19.32	19.46	19.21	0-2	2
		50	0	19.38	19.52	19.24	0-2	2

LTE Band 66 _ 15 MHz Bandwidth

Bandwidth	Modulation	RB Size	RB Offset	Reduced Power [dBm]			MPR Allowed Per 3GPP [dB]	MPR [dB]
				132047 Ch. 1717.5 MHz	132322 Ch. 1745 MHz	132597 Ch. 1772.5 MHz		
15 MHz	QPSK	1	0	20.91	21.32	21.16	0	0
		1	36	21.26	21.50	21.01	0	0
		1	74	21.20	21.26	21.12	0	0
		36	0	21.26	21.45	21.16	0	0
		36	18	21.40	21.43	21.11	0	0
		36	39	21.37	21.43	21.04	0	0
		75	0	21.31	21.42	21.11	0	0
	16QAM	1	0	21.47	21.63	21.56	0	0
		1	36	21.74	21.85	21.42	0	0
		1	74	21.62	21.69	21.36	0	0
		36	0	21.24	21.42	21.19	0	0
		36	18	21.45	21.51	21.19	0	0
		36	39	21.38	21.45	21.06	0	0
		75	0	21.34	21.40	21.17	0	0
	64QAM	1	0	21.33	21.43	21.29	0	0
		1	36	21.37	21.72	21.27	0	0
		1	74	21.52	21.32	21.19	0	0
		36	0	21.29	21.42	21.24	0	0
		36	18	21.51	21.54	21.21	0	0
		36	39	21.38	21.50	21.12	0	0
		75	0	21.31	21.42	21.23	0	0
	256QAM	1	0	19.21	19.25	19.06	0-2	2
		1	36	19.37	19.58	19.11	0-2	2
		1	74	19.23	19.38	19.03	0-2	2
		36	0	19.24	19.46	19.13	0-2	2
		36	18	19.34	19.42	19.20	0-2	2
		36	39	19.38	19.40	19.03	0-2	2
		75	0	19.34	19.43	19.11	0-2	2

LTE Band 66 _ 20 MHz Bandwidth

Bandwidth	Modulation	RB Size	RB Offset	Reduced Power [dBm]			MPR Allowed Per 3GPP [dB]	MPR [dB]
				132072 Ch. 1720 MHz	132322 Ch. 1745 MHz	132572 Ch. 1770 MHz		
20 MHz	QPSK	1	0	20.77	21.20	21.23	0	0
		1	49	21.24	21.38	21.04	0	0
		1	99	21.09	21.24	21.02	0	0
		50	0	21.14	21.44	21.18	0	0
		50	25	21.43	21.46	21.16	0	0
		50	49	21.34	21.40	21.03	0	0
		100	0	21.25	21.42	21.19	0	0
	16QAM	1	0	21.25	21.37	21.51	0	0
		1	49	21.74	21.84	21.35	0	0
		1	99	21.62	21.52	21.37	0	0
		50	0	21.23	21.35	21.15	0	0
		50	25	21.39	21.44	21.20	0	0
		50	49	21.37	21.47	20.99	0	0
		100	0	21.28	21.33	21.17	0	0
	64QAM	1	0	21.03	21.11	21.26	0	0
		1	49	21.43	21.65	21.32	0	0
		1	99	21.32	21.42	21.24	0	0
		50	0	21.20	21.44	21.18	0	0
		50	25	21.42	21.46	21.20	0	0
		50	49	21.38	21.50	21.05	0	0
		100	0	21.35	21.39	21.22	0	0
	256QAM	1	0	19.00	19.15	18.92	0-2	2
		1	49	19.41	19.59	19.25	0-2	2
		1	99	19.34	19.21	18.90	0-2	2
		50	0	19.19	19.32	19.10	0-2	2
		50	25	19.38	19.50	19.20	0-2	2
		50	49	19.33	19.38	19.00	0-2	2
		100	0	19.34	19.34	19.14	0-2	2

11.5 WIFI Conducted Power measurement method


Un-Licensed Bands (DTS Band)

Test Description	Test Procedure Used
Conducted Output Power	- KDB 558074 v05 - Section 8.3.2.3 - ANSI 63.10-2013 - Section 11.9.2.3

Test Procedure

1. Measure the duty cycle.
2. Measure the average power of the transmitter. This measurement is an average over both the on and off periods of the transmitter.
3. Add $10 \log (1/x)$, where x is the duty cycle, to the measured power in order to compute the average power during the actual transmission times.

Test setup




Un-Licensed Bands(NII Band)

Test Description	Test Procedure Used
Conducted Output Power	- KDB 789033 D02 v02r01 - Section E.3.a

Test Procedure

1. Measure the duty cycle.
2. Measure the average power of the transmitter. This measurement is an average over both the on and off periods of the transmitter.
3. Add $10 \log (1/x)$, where x is the duty cycle, to the measured power in order to compute the average power during the actual transmission times.

Test setup



11.5.1 IEEE 802.11 (2.4 GHz) Maximum Conducted Power

Ant.1

Mode	Frequency [MHz]	Channel	IEEE 802.11 (2.4 GHz) Average Conducted Power [dBm]
802.11b	2 412	1	15.44
	2 437	6	16.30
	2 462	11	15.37
	2 467	12	5.55
	2 472	13	0.15
802.11g	2 412	1	16.14
	2 437	6	15.94
	2 462	11	14.82
	2 467	12	5.98
	2 472	13	0.30
802.11n (HT20)	2 412	1	16.23
	2 437	6	15.99
	2 462	11	14.94
	2 467	12	5.99
	2 472	13	0.19
802.11ax	2 412	1	16.11
	2 437	6	15.80
	2 462	11	13.86
	2 467	12	5.23
	2 472	13	-0.59

Ant.2

Mode	Frequency [MHz]	Channel	IEEE 802.11 (2.4 GHz) Average Conducted Power [dBm]
802.11b	2 412	1	15.03
	2 437	6	16.15
	2 462	11	15.11
	2 467	12	4.05
	2 472	13	0.32
802.11g	2 412	1	15.79
	2 437	6	15.99
	2 462	11	15.18
	2 467	12	5.92
	2 472	13	0.95
802.11n (HT20)	2 412	1	15.80
	2 437	6	15.99
	2 462	11	15.25
	2 467	12	5.95
	2 472	13	0.91
802.11ax	2 412	1	15.79
	2 437	6	16.16
	2 462	11	13.95
	2 467	12	3.65
	2 472	13	-0.51

MIMO

Mode	Frequency [MHz]	Channel	IEEE 802.11 (2.4 GHz) Average Conducted Power [dBm]
802.11b	2 412	1	18.25
	2 437	6	19.24
	2 462	11	18.25
	2 467	12	7.88
	2 472	13	3.24
802.11g	2 412	1	18.98
	2 437	6	18.98
	2 462	11	18.01
	2 467	12	8.96
	2 472	13	3.65
802.11n (HT20)	2 412	1	19.03
	2 437	6	19.00
	2 462	11	18.11
	2 467	12	8.98
	2 472	13	3.57

11.5.2 IEEE 802.11 (2.4 GHz) Reduced Conducted Power (Held to ear VOIP)
Ant.1

Mode	Frequency [MHz]	Channel	IEEE 802.11 (2.4 GHz) Reduced Average Conducted Power [dBm]
802.11b	2 412	1	12.50
	2 437	6	12.31
	2 462	11	12.44
802.11g	2 412	1	12.03
	2 437	6	11.76
	2 462	11	12.10
802.11n (HT20)	2 412	1	11.79
	2 437	6	11.43
	2 462	11	11.79
802.11ax	2 412	1	12.23
	2 437	6	11.91
	2 462	11	12.26

Ant.2

Mode	Frequency [MHz]	Channel	IEEE 802.11 (2.4 GHz) Reduced Average Conducted Power [dBm]
802.11b	2 412	1	12.13
	2 437	6	11.76
	2 462	11	12.21
802.11g	2 412	1	11.57
	2 437	6	11.42
	2 462	11	11.79
802.11n (HT20)	2 412	1	11.24
	2 437	6	11.14
	2 462	11	11.47
802.11ax	2 412	1	11.44
	2 437	6	11.27
	2 462	11	11.58

MIMO

Mode	Frequency [MHz]	Channel	IEEE 802.11 (2.4 GHz) Reduced Average Conducted Power [dBm]
802.11b	2 412	1	15.33
	2 437	6	15.06
	2 462	11	15.34
802.11g	2 412	1	14.81
	2 437	6	14.60
	2 462	11	14.95
802.11n (HT20)	2 412	1	14.54
	2 437	6	14.30
	2 462	11	14.65
802.11ax	2 412	1	14.87
	2 437	6	14.62
	2 462	11	14.95

11.5.3 IEEE 802.11 (2.4 GHz) Hotspot Conducted Power

Ant.1

Mode	Frequency [MHz]	Channel	IEEE 802.11 (2.4 GHz) Reduced Average Conducted Power [dBm]
802.11b	2 412	1	9.56
	2 437	6	9.22
	2 462	11	9.58
802.11g	2 412	1	9.49
	2 437	6	9.29
	2 462	11	9.53
802.11n (HT20)	2 412	1	9.26
	2 437	6	9.03
	2 462	11	9.21
802.11ax	2 412	1	9.13
	2 437	6	8.54
	2 462	11	8.76

Ant.2

Mode	Frequency [MHz]	Channel	IEEE 802.11 (2.4 GHz) Reduced Average Conducted Power [dBm]
802.11b	2 412	1	9.48
	2 437	6	9.60
	2 462	11	9.59
802.11g	2 412	1	9.97
	2 437	6	9.96
	2 462	11	9.95
802.11n (HT20)	2 412	1	9.61
	2 437	6	9.72
	2 462	11	9.73
802.11ax	2 412	1	9.34
	2 437	6	9.05
	2 462	11	8.97

MIMO

Mode	Frequency [MHz]	Channel	IEEE 802.11 (2.4 GHz) Reduced Average Conducted Power [dBm]
802.11b	2 412	1	12.48
	2 437	6	12.37
	2 462	11	12.55
802.11g	2 412	1	12.74
	2 437	6	12.64
	2 462	11	12.75
802.11n (HT20)	2 412	1	12.45
	2 437	6	12.40
	2 462	11	12.49
802.11ax	2 412	1	12.25
	2 437	6	11.82
	2 462	11	11.88

11.5.4 IEEE 802.11 (5 GHz) Maximum Conducted Power

Ant.1

Mode	Frequency [MHz]	Channel	IEEE 802.11 (5 GHz) Average Conducted Power [dBm]
802.11a (20 MHz BW)	5 180	36	9.96
	5 200	40	16.04
	5 220	44	16.01
	5 240	48	16.18
	5 260	52	15.66
	5 280	56	15.89
	5 300	60	15.74
	5 320	64	9.45
	5 500	100	12.80
	5 600	120	15.47
	5 620	124	15.30
	5 720	144	15.14
	5 745	149	15.23
	5 765	153	15.76
	5 785	157	15.10
	5 805	161	15.50
	5 825	165	9.35

Ant.2

Mode	Frequency [MHz]	Channel	IEEE 802.11 (5 GHz) Average Conducted Power [dBm]
802.11a (20 MHz BW)	5 180	36	9.31
	5 200	40	15.34
	5 220	44	15.80
	5 240	48	15.45
	5 260	52	16.21
	5 280	56	15.90
	5 300	60	16.19
	5 320	64	9.23
	5 500	100	11.87
	5 600	120	15.31
	5 620	124	15.38
	5 720	144	14.80
	5 745	149	14.83
	5 765	153	15.30
	5 785	157	14.82
	5 805	161	15.95
	5 825	165	9.74

MIMO

Mode	Frequency [MHz]	Channel	IEEE 802.11 (5 GHz) Average Conducted Power [dBm]
802.11a (20 MHz BW)	5 180	36	12.66
	5 200	40	18.71
	5 220	44	18.92
	5 240	48	18.84
	5 260	52	18.95
	5 280	56	18.91
	5 300	60	18.98
	5 320	64	12.35
	5 500	100	15.37
	5 600	120	18.40
	5 620	124	18.35
	5 720	144	17.98
	5 745	149	18.04
	5 765	153	18.55
	5 785	157	17.97
	5 805	161	18.74
	5 825	165	12.56

11.5.5 IEEE 802.11 (5 GHz) Reduced Conducted Power (Held to ear VOIP)

Ant.1

Mode	Frequency [MHz]	Channel	IEEE 802.11 (5 GHz) Average Conducted Power [dBm]
802.11ac_80 MHz	5 210	42	10.43
	5 290	58	10.16
	5 530	106	10.98
	5 610	122	9.50
	5 690	138	10.43
	5 775	155	10.47
	5 855	171	10.38

Ant.2

Mode	Frequency [MHz]	Channel	IEEE 802.11 (5 GHz) Average Conducted Power [dBm]
802.11ac_80 MHz	5 210	42	9.32
	5 290	58	10.18
	5 530	106	9.79
	5 610	122	10.29
	5 690	138	10.01
	5 775	155	9.03
	5 855	171	10.08


MIMO

Mode	Frequency [MHz]	Channel	IEEE 802.11 (5 GHz) Average Conducted Power [dBm]
802.11ac_80 MHz	5 210	42	12.92
	5 290	58	13.18
	5 530	106	13.44
	5 610	122	12.93
	5 690	138	13.24
	5 775	155	12.82
	5 855	171	13.25

Justification for test configurations for WLAN per KDB Publication 248227 D01v02r02:

- Power measurements were performed for the transmission mode configuration with the highest maximum output power specified for production units.
- For transmission mode with the same maximum output power specification, powers were measured for the largest channel Bandwidth, lowest order modulation and lowest data rate.
- For transmission modes with identical maximum specified output power, channel Bandwidth, modulation and data rates, power measurements were required for all identical configurations.
- For each transmission mode configuration, powers were measured for the highest and lowest channels; and at the mid-Band channel(s) when there were at least 3 channels supported. For configurations with multiple mid-Band channels, due to an even number of channels, both channels were measured.

Test Configuration



11.6 Bluetooth

Maximum Conducted Power


The Burst averaged-conducted power

Mode	Channel	Bluetooth Power [dBm]
DH5	0	14.02
	39	13.01
	78	14.07
2-DH5	0	13.38
	39	12.33
	78	13.26
3-DH5	0	13.37
	39	12.35
	78	13.27

Per October 2016 TCB Workshop Notes:

When call box and Bluetooth protocol are used for Bluetooth SAR measurement, time-domain plot is required to identify duty factor for supporting the test setup and result.

Bluetooth duty cycle was measured using Bluetooth tester equipment (CBT / R&S) with Bluetooth DH5 mode.

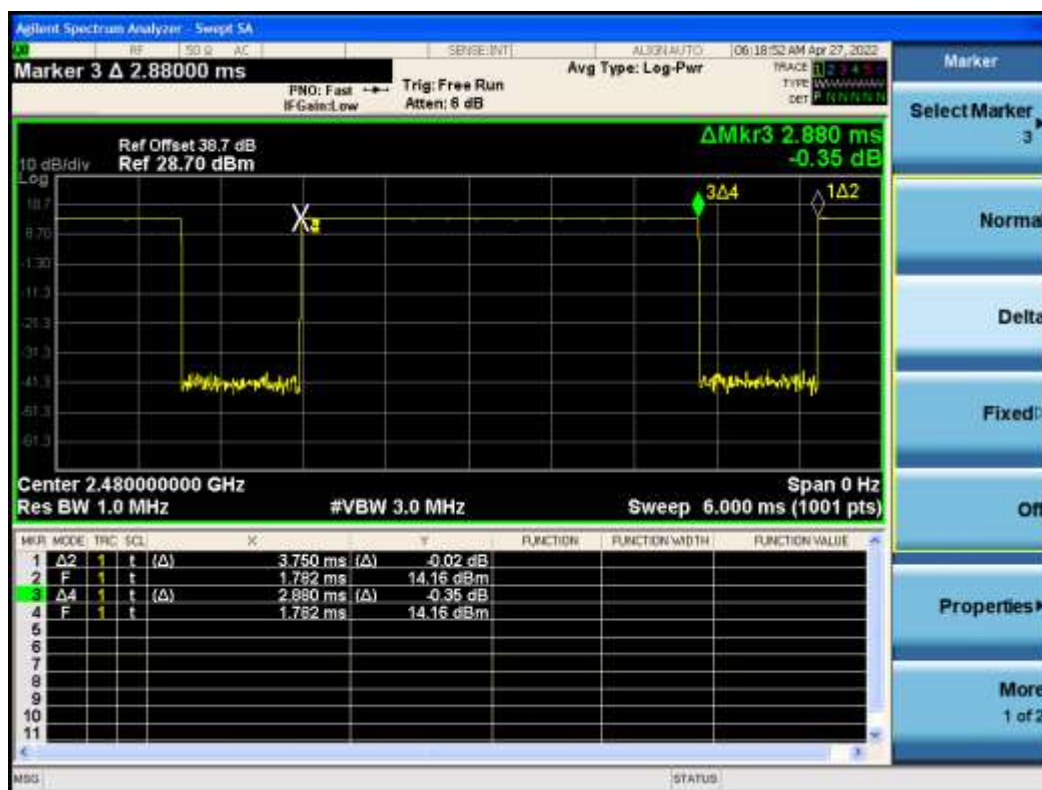

BluetoothDuty Cycle [BDR]

Duty Cycle = (BT-On time /BT-Full time) =(2.880/3.750) = 0.765 (DH5) / Duty factor= 1/Duty cycle : 1.307

12. System Verification

12.1 Tissue Verification

The body simulating material is calibrated by HCT using the DAKS 3.5 to determine the conductivity and permittivity.

Table for Head Tissue Verification									
Date of Tests	Tissue Temp. (°C)	Tissue Type	Freq. (MHz)	Measured Conductivity σ (S/m)	Measured Dielectric Constant, ϵ	Target Conductivity σ (S/m)	Target Dielectric Constant, ϵ	% dev σ	% dev ϵ
03/31/2022	19.8	750H	705	0.848	43.270	0.889	42.174	+ 4.83	- 2.53
			710	0.852	43.196	0.890	42.148	+ 4.46	- 2.43
			750	0.898	42.615	0.893	41.940	- 0.56	- 1.58
04/01/2022	20.6	835H	820	0.907	40.585	0.899	41.577	- 0.88	+ 2.44
			835	0.925	40.348	0.900	41.500	- 2.70	+ 2.86
			850	0.941	40.119	0.916	41.500	- 2.66	+ 3.44
03/29/2022	19.1	835H	820	0.907	40.687	0.899	41.577	- 0.88	+ 2.19
			835	0.924	40.450	0.900	41.500	- 2.60	+ 2.60
			850	0.940	40.223	0.916	41.500	- 2.55	+ 3.17
04/05/2022	20.4	835H	820	0.905	40.484	0.899	41.577	- 0.66	+ 2.70
			835	0.922	40.248	0.900	41.500	- 2.39	+ 3.11
			850	0.938	40.017	0.916	41.500	- 2.35	+ 3.71
04/12/2022	21.3	1800H	1710	1.326	41.681	1.348	40.144	+ 1.66	- 3.69
			1750	1.368	41.515	1.371	40.080	+ 0.22	- 3.46
			1800	1.423	41.281	1.400	40.000	- 1.62	- 3.10
04/07/2022	20.4	1800H	1710	1.289	41.687	1.348	40.144	+ 4.58	- 3.70
			1750	1.330	41.516	1.371	40.080	+ 3.08	- 3.46
			1800	1.384	41.289	1.400	40.000	+ 1.16	- 3.12
04/06/2022	20.4	1900H	1850	1.386	41.484	1.400	40.000	+ 1.01	- 3.58
			1900	1.438	41.301	1.400	40.000	- 2.64	- 3.15
			1910	1.446	41.271	1.400	40.000	- 3.18	- 3.08
04/07/2022	20.4	1900H	1850	1.366	41.489	1.400	40.000	+ 2.49	- 3.59
			1900	1.418	41.301	1.400	40.000	- 1.27	- 3.15
			1910	1.426	41.269	1.400	40.000	- 1.82	- 3.07
04/06/2022	20.4	1900H	1850	1.387	41.498	1.400	40.000	+ 0.94	- 3.61
			1900	1.438	41.310	1.400	40.000	- 2.64	- 3.17
			1910	1.446	41.278	1.400	40.000	- 3.18	- 3.10
04/11/2022	21.4	2600H	2500	1.864	38.248	1.855	39.140	- 0.48	+ 2.33
			2550	1.913	38.040	1.909	39.070	- 0.21	+ 2.71
			2600	1.962	37.793	1.964	39.010	+ 0.10	+ 3.22

Table for Head Tissue Verification									
Date of Tests	Tissue Temp. (°C)	Tissue Type	Freq. (MHz)	Measured Conductivity σ (S/m)	Measured Dielectric Constant, ϵ	Target Conductivity σ (S/m)	Target Dielectric Constant, ϵ	% dev σ	% dev ϵ
04/19/2022	20.0	2450H	2400	1.786	39.266	1.756	39.290	- 1.68	+ 0.06
			2450	1.827	39.303	1.800	39.200	- 1.48	- 0.26
			2500	1.869	39.372	1.855	39.140	- 0.75	- 0.59
04/01/2022	18.9	2450H	2400	1.792	39.093	1.756	39.290	- 2.01	+ 0.50
			2450	1.834	39.171	1.800	39.200	- 1.85	+ 0.07
			2500	1.879	39.276	1.855	39.140	- 1.28	- 0.35
04/15/2022	21.4	2450H	2400	1.784	39.293	1.756	39.290	- 1.57	- 0.01
			2450	1.825	39.325	1.800	39.200	- 1.37	- 0.32
			2500	1.867	39.384	1.855	39.140	- 0.64	- 0.62
04/18/2022	18.9	2450H	2400	1.792	39.205	1.756	39.290	- 2.01	+ 0.22
			2450	1.833	39.246	1.800	39.200	- 1.80	- 0.12
			2500	1.875	39.323	1.855	39.140	- 1.07	- 0.47
04/13/2022	20.5	5250H	5180	4.547	37.232	4.635	36.010	+ 1.94	- 3.28
			5250	4.662	37.094	4.706	35.930	+ 0.94	- 3.14
			5280	4.720	37.045	4.737	35.894	+ 0.36	- 3.11
			5320	4.808	37.009	4.778	35.846	- 0.62	- 3.14
04/14/2022	20.5	5600H	5500	4.889	36.520	4.963	35.640	+ 1.51	- 2.41
			5600	4.944	36.255	5.065	35.530	+ 2.45	- 2.00
04/15/2022	21.4	5750H	5750	5.216	36.100	5.219	35.360	+ 0.06	- 2.05
			5800	5.194	36.109	5.270	35.300	+ 1.46	- 2.24
			5825	5.189	36.094	5.296	35.270	+ 2.06	- 2.28

* Phablet SAR

Table for Head Tissue Verification									
Date of Tests	Tissue Temp. (°C)	Tissue Type	Freq. (MHz)	Measured Conductivity σ (S/m)	Measured Dielectric Constant, ϵ	Target Conductivity σ (S/m)	Target Dielectric Constant, ϵ	% dev σ	% dev ϵ
04/09/2022	20.8	1900H	1850	1.372	40.903	1.400	40.000	+ 2.04	- 2.21
			1900	1.425	40.739	1.400	40.000	- 1.75	- 1.81
			1910	1.432	40.703	1.400	40.000	- 2.23	- 1.73

*VolumeSAR

Table for Head Tissue Verification									
Date of Tests	Tissue Temp. (°C)	Tissue Type	Freq. (MHz)	Measured Conductivity σ (S/m)	Measured Dielectric Constant, ϵ	Target Conductivity σ (S/m)	Target Dielectric Constant, ϵ	% dev σ	% dev ϵ
04/20/2022	20.5	2450H	2400	1.793	39.198	1.756	39.290	- 2.06	+ 0.23
			2450	1.834	39.237	1.800	39.200	- 1.85	- 0.09
			2500	1.876	39.317	1.855	39.140	- 1.12	- 0.45
04/21/2022	21.2	2450H	2400	1.793	39.194	1.756	39.290	- 2.06	+ 0.24
			2450	1.834	39.234	1.800	39.200	- 1.85	- 0.09
			2500	1.875	39.312	1.855	39.140	- 1.07	- 0.44
04/22/2022	21.0	5750H	5750	5.239	36.417	5.219	35.360	- 0.38	- 2.90
			5800	5.193	36.478	5.270	35.300	+ 1.48	- 3.23
			5825	5.172	36.449	5.296	35.270	+ 2.40	- 3.23

12.2 System Verification

Input Power: 50 mW

Freq. [MHz]	Date	Probe (S/N)	Dipole (S/N)	Liquid	Amb. Temp. [°C]	Liquid Temp. [°C]	1 W Target SAR _{1g} (SPEAG) [W/kg]	50mW Measured SAR _{1g} [W/kg]	1 W Normalized SAR _{1g} [W/kg]	Deviation [%]	Limit [%]
750	03/31/2022	3972	1014	Head	19.9	19.8	8.55	0.431	8.62	+ 0.82	± 10
835	04/01/2022	3972	4d165	Head	19.7	19.6	9.68	0.505	10.10	+ 4.34	± 10
835	03/29/2022	7309		Head	19.2	19.1	9.68	0.495	9.90	+ 2.27	± 10
835	04/05/2022	3076		Head	20.5	20.4	9.68	0.477	9.54	- 1.45	± 10
1 800	04/12/2022	3076	2d015	Head	21.4	21.3	38.8	1.950	39.00	+ 0.52	± 10
1 800	04/07/2022	3076		Head	20.5	20.4	38.8	1.930	38.60	- 0.52	± 10
1 900	04/06/2022	3076	5d032	Head	20.5	20.4	41.2	2.130	42.60	+ 3.40	± 10
1 900	04/07/2022	3076		Head	20.5	20.4	41.2	2.130	42.60	+ 3.40	± 10
1 900	04/06/2022	3076		Head	20.5	20.4	41.2	2.140	42.80	+ 3.88	± 10
2 450	04/19/2022	7702	965	Head	20.1	20.0	53.3	2.580	51.6	- 3.19	± 10
2 450	04/01/2022	7370		Head	19.0	18.9	53.3	2.720	54.40	+ 2.06	± 10
2 450	04/15/2022	7370		Head	21.5	21.4	53.3	2.870	57.4	+ 7.69	± 10
2 450	04/18/2022	7370		Head	21.2	21.1	53.3	2.740	54.8	+ 2.81	± 10
2 600	04/11/2022	3076	1106	Head	21.5	21.4	56.3	2.870	57.40	+ 1.95	± 10
5 250	04/13/2022	7370	1107	Head	20.6	20.5	80.6	4.380	87.60	+ 8.68	± 10
5 600	04/14/2022	7370		Head	20.6	20.5	84.2	4.580	91.60	+ 8.79	± 10
5 750	04/15/2022	7370		Head	21.5	21.4	80.9	4.330	86.60	+ 7.05	± 10

System Verification Results – Phablet SAR

Input Power: 50 mW

Freq.	Date	Probe (S/N)	Dipole (S/N)	Liquid	Amb. Temp.	Liquid Temp.	1 W Target SAR _{10g} (SPEAG)	50mW Measured SAR _{10g}	1 W Normalized SAR _{10g}	Deviation	Limit
[MHz]					[°C]	[°C]	[W/kg]	[W/kg]	[W/kg]	[%]	[%]
1 900	04/08/2022	3076	5d032	Head	20.6	20.5	21.4	1.06	21.2	- 0.93	± 10

System Verification Results – Volume SAR

Input Power: 50 mW

Freq.	Date	Probe (S/N)	Dipole (S/N)	Liquid	Amb. Temp.	Liquid Temp.	1 W Target SAR _{1g} (SPEAG)	50mW Measured SAR _{1g}	1 W Normalized SAR _{1g}	Deviation	Limit
[MHz]					[°C]	[°C]	[W/kg]	[W/kg]	[W/kg]	[%]	[%]
2 450	04/20/2022	7370	965	Head	20.6	20.5	53.3	2.810	56.20	+ 5.44	± 10
2 450	04/21/2022	7370	965	Head	21.3	21.2	53.3	2.740	54.80	+ 2.81	± 10
5 750	04/22/2022	7370	1107	Head	21.1	21.0	80.9	4.270	85.40	+ 5.56	± 10

12.3 System Verification Procedure

SAR measurement was prior to assessment, the system is verified to the $\pm 10\%$ of the specifications at each frequency Band by using the system verification kit. (Graphic Plots Attached)

- Cabling the system, using the verification kit equipment.
- Generate about 50 mW Input level from the signal generator to the Dipole Antenna.
- Dipole antenna was placed below the flat phantom.
- The measured one-gram SAR at the surface of the phantom above the dipole feed-point should be within 10 % of the target reference value.
- The results are normalized to 1 W input power.

Note;

SAR Verification was performed according to the FCC KDB 865664 D01v01r04.

13. SAR Test Data Summary

13.1 SAR Measurement Results

GSM 850 Head SAR											
Frequency		Mode	Tune-Up Limit	Meas. Power	Power Drift	Test Position	Duty Cycle	Meas. SAR	Scaling Factor	Scaled SAR	Plot No.
MHz	Ch.		(dB)	(dB)	(dB)			(W/kg)		(W/kg)	
836.6	190	GSM	33.0	31.94	-0.13	Left Cheek	1:8.30	0.262	1.276	0.334	-
836.6	190	GSM	33.0	31.94	-0.14	Left Tilt	1:8.30	0.153	1.276	0.195	-
836.6	190	GSM	33.0	31.94	-0.11	Right Cheek	1:8.30	0.277	1.276	0.353	-
836.6	190	GSM	33.0	31.94	-0.17	Right Tilt	1:8.30	0.162	1.276	0.207	-
836.6	190	GPRS 2TX	32.0	30.92	-0.10	Left Cheek	1:4.15	0.376	1.282	0.482	-
836.6	190	GPRS 2TX	32.0	30.92	0.04	Left Tilt	1:4.15	0.227	1.282	0.291	-
836.6	190	GPRS 2TX	32.0	30.92	-0.16	Right Cheek	1:4.15	0.414	1.282	0.531	1
836.6	190	GPRS 2TX	32.0	30.92	0.10	Right Tilt	1:4.15	0.238	1.282	0.305	-
ANSI/ IEEE C95.1 - 2005- Safety Limit Spatial Peak Uncontrolled Exposure/ General Population						Head 1.6 W/kg Averaged over 1 gram					

GSM 1900 Head SAR											
Frequency		Mode	Tune-Up Limit	Meas. Power	Power Drift	Test Position	Duty Cycle	Meas. SAR	Scaling Factor	Scaled SAR	Plot No.
MHz	Ch.		(dB)	(dB)	(dB)			(W/kg)		(W/kg)	
1880.0	661	GSM	31.5	30.78	0.16	Left Cheek	1:8.30	0.249	1.180	0.294	-
1880.0	661	GSM	31.5	30.78	-0.04	Left Tilt	1:8.30	0.101	1.180	0.119	-
1880.0	661	GSM	31.5	30.78	0.10	Right Cheek	1:8.30	0.193	1.180	0.228	-
1880.0	661	GSM	31.5	30.78	-0.06	Right Tilt	1:8.30	0.124	1.180	0.146	-
1880.0	661	GPRS 2TX	29.5	29.02	0.13	Left Cheek	1:4.15	0.300	1.117	0.335	2
1880.0	661	GPRS 2TX	29.5	29.02	0.03	Left Tilt	1:4.15	0.120	1.117	0.134	-
1880.0	661	GPRS 2TX	29.5	29.02	0.14	Right Cheek	1:4.15	0.225	1.117	0.251	-
1880.0	661	GPRS 2TX	29.5	29.02	0.03	Right Tilt	1:4.15	0.144	1.117	0.161	-
ANSI/ IEEE C95.1 - 2005- Safety Limit Spatial Peak Uncontrolled Exposure/ General Population						Head 1.6 W/kg Averaged over 1 gram					

UMTS Band 5 Head SAR

Frequency		Mode	Tune-Up Limit	Meas. Power	Power Drift	Test Position	Duty Cycle	Meas. SAR	Scaling Factor	Scaled SAR	Plot No.
MHz	Ch.		(dB)	(dB)	(dB)			(W/kg)		(W/kg)	
836.6	4183	RMC	24.5	23.78	-0.16	Left Cheek	1:1	0.286	1.180	0.337	-
836.6	4183	RMC	24.5	23.78	0.06	Left Tilt	1:1	0.160	1.180	0.189	-
836.6	4183	RMC	24.5	23.78	0.01	Right Cheek	1:1	0.326	1.180	0.385	3
836.6	4183	RMC	24.5	23.78	-0.11	Right Tilt	1:1	0.175	1.180	0.207	-
ANSI/ IEEE C95.1 - 2005– Safety Limit Spatial Peak Uncontrolled Exposure/ General Population						Head 1.6 W/kg (mW/g) Averaged over 1 gram					

UMTS Band 4 Head SAR.

Frequency		Mode	Tune-Up Limit	Meas. Power	Power Drift	Test Position	Duty Cycle	Meas. SAR	Scaling Factor	Scaled SAR	Plot No.
MHz	Ch.		(dB)	(dB)	(dB)			(W/kg)		(W/kg)	
1732.4	1412	RMC	24.0	23.78	0.10	Left Cheek	1:1	0.212	1.052	0.223	4
1732.4	1412	RMC	24.0	23.78	0.06	Left Tilt	1:1	0.148	1.052	0.156	-
1732.4	1412	RMC	24.0	23.78	0.11	Right Cheek	1:1	0.192	1.052	0.202	-
1732.4	1412	RMC	24.0	23.78	0.11	Right Tilt	1:1	0.121	1.052	0.127	-
ANSI/ IEEE C95.1 - 2005– Safety Limit Spatial Peak Uncontrolled Exposure/ General Population						Head 1.6 W/kg (mW/g) Averaged over 1 gram					

UMTS Band 2 Head SAR

Frequency		Mode	Tune-Up Limit	Meas. Power	Power Drift	Test Position	Duty Cycle	Meas. SAR	Scaling Factor	Scaled SAR	Plot No.
MHz	Ch.		(dB)	(dB)	(dB)			(W/kg)		(W/kg)	
1880.0	9400	RMC	24.0	23.50	0.14	Left Cheek	1:1	0.377	1.122	0.423	5
1880.0	9400	RMC	24.0	23.50	0.11	Left Tilt	1:1	0.143	1.122	0.160	-
1880.0	9400	RMC	24.0	23.50	0.01	Right Cheek	1:1	0.296	1.122	0.332	-
1880.0	9400	RMC	24.0	23.50	-0.04	Right Tilt	1:1	0.165	1.122	0.185	-
ANSI/ IEEE C95.1 - 2005– Safety Limit Spatial Peak Uncontrolled Exposure/ General Population						Head 1.6 W/kg (mW/g) Averaged over 1 gram					

LTE Band 2 Head SAR

Frequency		Mode	Band width	Tune-Up Limit	Meas. Power	Power Drift	Test Position	MPR	RB Size	RB Offset	Duty Cycle	Meas. SAR	Scaling Factor	Scaled SAR	Plot No.
MHz	Ch.		(MHz)	(dBm)	(dBm)	(dB)		(dB)				(W/kg)		(W/kg)	
1880	18900	QPSK	20	25.0	24.00	0.12	Left Cheek	0	1	49	1:1	0.383	1.259	0.482	6
1880	18900	QPSK	20	24.0	22.99	0.11	Left Cheek	1	50	49	1:1	0.328	1.262	0.414	-
1880	18900	QPSK	20	25.0	24.00	0.09	Left Tilt	0	1	49	1:1	0.147	1.259	0.185	-
1880	18900	QPSK	20	24.0	22.99	0.19	Left Tilt	1	50	49	1:1	0.114	1.262	0.144	-
1880	18900	QPSK	20	25.0	24.00	0.14	Right Cheek	0	1	49	1:1	0.288	1.259	0.363	-
1880	18900	QPSK	20	24.0	22.99	0.13	Right Cheek	1	50	49	1:1	0.237	1.262	0.299	-
1880	18900	QPSK	20	25.0	24.00	0.02	Right Tilt	0	1	49	1:1	0.170	1.259	0.214	-
1880	18900	QPSK	20	24.0	22.99	0.10	Right Tilt	1	50	49	1:1	0.136	1.262	0.172	-
ANSI/ IEEE C95.1 - 2005- Safety Limit Spatial Peak Uncontrolled Exposure/ General Population							Head 1.6 W/kg Averaged over 1 gram								

LTE Band 12 Head SAR

Frequency		Mode	Band width	Tune-Up Limit	Meas. Power	Power Drift	Test Position	MPR	RB Size	RB Offset	Duty Cycle	Meas. SAR	Scaling Factor	Scaled SAR	Plot No.
MHz	Ch.		(MHz)	(dBm)	(dBm)	(dB)		(dB)				(W/kg)		(W/kg)	
707.5	23095	QPSK	10	25.0	24.19	-0.03	Left Cheek	0	1	24	1:1	0.182	1.205	0.219	-
707.5	23095	QPSK	10	24.0	23.36	0.15	Left Cheek	1	25	0	1:1	0.138	1.159	0.160	-
707.5	23095	QPSK	10	25.0	24.19	-0.19	Left Tilt	0	1	24	1:1	0.076	1.205	0.092	-
707.5	23095	QPSK	10	24.0	23.36	-0.05	Left Tilt	1	25	0	1:1	0.061	1.159	0.071	-
707.5	23095	QPSK	10	25.0	24.19	-0.12	Right Cheek	0	1	24	1:1	0.210	1.205	0.253	7
707.5	23095	QPSK	10	24.0	23.36	-0.14	Right Cheek	1	25	0	1:1	0.173	1.159	0.201	-
707.5	23095	QPSK	10	25.0	24.19	-0.09	Right Tilt	0	1	24	1:1	0.107	1.205	0.129	-
707.5	23095	QPSK	10	24.0	23.36	-0.14	Right Tilt	1	25	0	1:1	0.086	1.159	0.100	-
ANSI/ IEEE C95.1 - 2005- Safety Limit Spatial Peak Uncontrolled Exposure/ General Population							Head 1.6 W/kg Averaged over 1 gram								

LTE Band 26 Head SAR

Frequency		Mode	Band width	Tune-Up Limit	Meas. Power	Power Drift	Test Position	MPR	RB Size	RB Offset	Duty Cycle	Meas. SAR	Scaling Factor	Scaled SAR	Plot No.
MHz	Ch.		(MHz)	(dBm)	(dBm)	(dB)		(dB)				(W/kg)		(W/kg)	
831.5	26865	QPSK	15	25.0	23.64	-0.11	Left Cheek	0	1	0	1:1	0.237	1.368	0.324	-
831.5	26865	QPSK	15	24.0	22.75	-0.16	Left Cheek	1	36	39	1:1	0.204	1.334	0.272	-
831.5	26865	QPSK	15	25.0	23.64	-0.10	Left Tilt	0	1	0	1:1	0.121	1.368	0.166	-
831.5	26865	QPSK	15	24.0	22.75	0.05	Left Tilt	1	36	39	1:1	0.111	1.334	0.148	-
831.5	26865	QPSK	15	25.0	23.64	-0.17	Right Cheek	0	1	0	1:1	0.270	1.368	0.369	8
831.5	26865	QPSK	15	24.0	22.75	-0.10	Right Cheek	1	36	39	1:1	0.252	1.334	0.336	-
831.5	26865	QPSK	15	25.0	23.64	-0.18	Right Tilt	0	1	0	1:1	0.139	1.368	0.190	-
831.5	26865	QPSK	15	24.0	22.75	-0.14	Right Tilt	1	36	39	1:1	0.138	1.334	0.184	-
ANSI/ IEEE C95.1 - 2005- Safety Limit Spatial Peak Uncontrolled Exposure/ General Population							Head 1.6 W/kg Averaged over 1 gram								

LTE Band 41 Head SAR

Frequency		Mode	Band width	Tune-Up Limit	Meas. Power	Power Drift	Test Position	MPR	RB Size	RB Offset	Duty Cycle	Meas. SAR	Scaling Factor	Scaled SAR	Plot No.
MHz	Ch.		(MHz)	(dBm)	(dBm)	(dB)		(dB)				(W/kg)		(W/kg)	
2593	40620	QPSK	20	25.0	24.25	0.17	Left Cheek	0	1	49	1:1.58	0.160	1.189	0.190	9
2593	40620	QPSK	20	24.0	23.44	0.13	Left Cheek	1	50	25	1:1.58	0.131	1.138	0.149	-
2593	40620	QPSK	20	25.0	24.25	-0.16	Left Tilt	0	1	49	1:1.58	0.051	1.189	0.061	-
2593	40620	QPSK	20	24.0	23.44	-0.18	Left Tilt	1	50	25	1:1.58	0.042	1.138	0.048	-
2593	40620	QPSK	20	25.0	24.25	0.11	Right Cheek	0	1	49	1:1.58	0.143	1.189	0.170	-
2593	40620	QPSK	20	24.0	23.44	0.13	Right Cheek	1	50	25	1:1.58	0.118	1.138	0.134	-
2593	40620	QPSK	20	25.0	24.25	0.14	Right Tilt	0	1	49	1:1.58	0.090	1.189	0.107	-
2593	40620	QPSK	20	24.0	23.44	0.07	Right Tilt	1	50	25	1:1.58	0.072	1.138	0.082	-
ANSI/ IEEE C95.1 - 2005– Safety Limit Spatial Peak Uncontrolled Exposure/ General Population							Head 1.6 W/kg Averaged over 1 gram								

LTE Band 66 Head SAR

Frequency		Mode	Band width	Tune-Up Limit	Meas. Power	Power Drift	Test Position	MPR	RB Size	RB Offset	Duty Cycle	Meas. SAR	Scaling Factor	Scaled SAR	Plot No.
MHz	Ch.		(MHz)	(dBm)	(dBm)	(dB)		(dB)				(W/kg)		(W/kg)	
1745	132322	QPSK	20	25.0	24.27	0.16	Left Cheek	0	1	49	1:1	0.341	1.183	0.403	10
1745	132322	QPSK	20	24.0	23.40	0.16	Left Cheek	1	50	25	1:1	0.285	1.148	0.327	-
1745	132322	QPSK	20	25.0	24.27	0.11	Left Tilt	0	1	49	1:1	0.210	1.183	0.248	-
1745	132322	QPSK	20	24.0	23.40	0.18	Left Tilt	1	50	25	1:1	0.170	1.148	0.195	-
1745	132322	QPSK	20	25.0	24.27	-0.04	Right Cheek	0	1	49	1:1	0.322	1.183	0.381	-
1745	132322	QPSK	20	24.0	23.40	0.11	Right Cheek	1	50	25	1:1	0.248	1.148	0.285	-
1745	132322	QPSK	20	25.0	24.27	0.10	Right Tilt	0	1	49	1:1	0.154	1.183	0.182	-
1745	132322	QPSK	20	24.0	23.40	0.04	Right Tilt	1	50	25	1:1	0.129	1.148	0.148	-
ANSI/ IEEE C95.1 - 2005– Safety Limit Spatial Peak Uncontrolled Exposure/ General Population							Head 1.6 W/kg Averaged over 1 gram								

DTS Head SAR																
Frequency		Mode	Band width (MHz)	Data Rate (Mbps)	Tune-Up Limit (dBm)	Meas. Power (dBm)	Power Drift (dB)	Test Position	Ant. Config.	Duty Cycle	Area Scan Peak SAR (W/kg)	Meas. SAR (W/kg)	Scaling Factor	Scaling Factor (Duty)	Scaled SAR (W/kg)	Plot No.
MHz	Ch.															
2462	11	802.11b	20	1	13.0	12.21	-0.07	Left Cheek	Ant.2	98.8	0.0614	0.012	1.199	1.012	0.015	-
2462	11	802.11b	20	1	13.0	12.21	0.02	Left Tilt	Ant.2	98.8	0.0728	0.014	1.199	1.012	0.017	-
2462	11	802.11b	20	1	13.0	12.21	0.05	Right Cheek	Ant.2	98.8	0.0727	0.035	1.199	1.012	0.042	-
2462	11	802.11b	20	1	13.0	12.21	0.14	Right Tilt	Ant.2	98.8	0.0340	0.014	1.199	1.012	0.017	-
2462	11	802.11b	20	1	16.0	15.34	-0.04	Left Cheek	MIMO	98.8	0.104	0.037	1.199	1.012	0.045	-
2462	11	802.11b	20	1	16.0	15.34	-0.03	Left Tilt	MIMO	98.8	0.0617	0.034	1.199	1.012	0.041	-
2462	11	802.11b	20	1	16.0	15.34	-0.04	Right Cheek	MIMO	98.8	0.117	0.063	1.199	1.012	0.076	11
2462	11	802.11b	20	1	16.0	15.34	0.05	Right Tilt	MIMO	98.8	0.0699	0.041	1.199	1.012	0.050	-
ANSI/ IEEE C95.1 - 2005– Safety Limit Spatial Peak Uncontrolled Exposure/ General Population									Head 1.6 W/kg Averaged over 1 gram							

NII Head SAR																
Frequency		Mode	Band width (MHz)	Data Rate (Mbps)	Tune-Up Limit (dBm)	Meas. Power (dBm)	Power Drift (dB)	Test Position	Ant. Config.	Duty Cycle	Area Scan Peak SAR (W/kg)	Meas. SAR (W/kg)	Scaling Factor	Scaling Factor (Duty)	Scaled SAR (W/kg)	Plot No.
MHz	Ch.															
5290	58	802.11ac	80	MCS0	11.0	13.18	0.00	Left Cheek	MIMO	89.3	0.171	0.044	1.213	1.120	0.060	-
5290	58	802.11ac	80	MCS0	11.0	13.18	0.00	Left Tilt	MIMO	89.3	0.305	0.059	1.213	1.120	0.080	-
5290	58	802.11ac	80	MCS0	11.0	13.18	-0.00	Right Cheek	MIMO	89.3	0.180	0.064	1.213	1.120	0.087	-
5290	58	802.11ac	80	MCS0	11.0	13.18	0.00	Right Tilt	MIMO	89.3	0.181	0.058	1.213	1.120	0.079	-
5530	106	802.11ac	80	MCS0	11.0	13.44	-0.00	Left Cheek	MIMO	89.3	0.188	0.081	1.321	1.120	0.120	-
5530	106	802.11ac	80	MCS0	11.0	13.44	0.09	Left Tilt	MIMO	89.3	0.285	0.101	1.321	1.120	0.149	-
5530	106	802.11ac	80	MCS0	11.0	13.44	-0.07	Right Cheek	MIMO	89.3	0.498	0.103	1.321	1.120	0.152	12
5530	106	802.11ac	80	MCS0	11.0	13.44	-0.09	Right Tilt	MIMO	89.3	0.201	0.091	1.321	1.120	0.135	-
5775	155	802.11ac	80	MCS0	11.0	12.82	0.03	Left Cheek	MIMO	89.3	0.184	0.051	1.574	1.120	0.090	-
5775	155	802.11ac	80	MCS0	11.0	12.82	0.00	Left Tilt	MIMO	89.3	0.195	0.043	1.574	1.120	0.076	-
5775	155	802.11ac	80	MCS0	11.0	12.82	-0.00	Right Cheek	MIMO	89.3	0.259	0.062	1.574	1.120	0.109	-
5775	155	802.11ac	80	MCS0	11.0	12.82	0.00	Right Tilt	MIMO	89.3	0.257	0.053	1.574	1.120	0.093	-
ANSI/ IEEE C95.1 - 2005– Safety Limit Spatial Peak Uncontrolled Exposure/ General Population									Head 1.6 W/kg Averaged over 1 gram							

DSS Head SAR											
Frequency		Mode	Tune-Up Limit (dBm)	Meas. Power (dBm)	Power Drift (dB)	Test Position	Meas. SAR (W/kg)	Scaling Factor	Scaling Factor (Duty)	Scaled SAR (W/kg)	Plot No.
MHz	Ch.										
2480	78	Bluetooth DH5	14.5	14.07	-0.03	Left Cheek	0.00832	1.104	1.307	0.012	-
2480	78	Bluetooth DH5	14.5	14.07	0.02	Left Tilt	0.00845	1.104	1.307	0.012	-
2480	78	Bluetooth DH5	14.5	14.07	0.01	Right Cheek	0.016	1.104	1.307	0.023	13
2480	78	Bluetooth DH5	14.5	14.07	-0.05	Right Tilt	0.014	1.104	1.307	0.020	-
ANSI/ IEEE C95.1 - 2005– Safety Limit Spatial Peak Uncontrolled Exposure/ General Population						Head 1.6 W/kg (mW/g) Averaged over 1 gram					

13.2 Body-worn SAR Measurement Results

GSM/ UMTS Body-Worn SAR												
Frequency		Mode	Tune-Up Limit	Meas. Power	Power Drift	Test Position	Duty Cycle	Distance	Meas. SAR	Scaling Factor	Scaled SAR	Plot No.
Mhz	Ch.		(dB)	(dB)	(dB)			(mm)	(W/kg)		(W/kg)	
836.6	190	GSM850 VOICE	33.0	31.94	0.01	Rear	1:8.30	15	0.327	1.276	0.417	-
836.6	190		33.0	31.94	-0.04	Front	1:8.30	15	0.271	1.276	0.346	-
836.6	190	GSM850 GPRS 2TX	32.0	30.92	-0.11	Rear	1:4.15	15	0.387	1.282	0.496	14
836.6	190		32.0	30.92	0.14	Front	1:4.15	15	0.361	1.282	0.463	-
1880.0	661	GSM1900 VOICE	31.5	30.78	0.13	Rear	1:8.30	15	0.148	1.180	0.175	-
1880.0	661		31.5	30.78	-0.06	Front	1:8.30	15	0.201	1.180	0.237	-
1880.0	661	GSM1900 GPRS 2TX	29.5	29.02	-0.04	Rear	1:4.15	15	0.189	1.117	0.211	-
1880.0	661		29.5	29.02	-0.00	Front	1:4.15	15	0.230	1.117	0.257	15
1880.0	9400	UMTS Band 2 RMC	24.0	23.50	-0.19	Rear	1:1	15	0.255	1.122	0.286	-
1880.0	9400		24.0	23.50	0.11	Front	1:1	15	0.315	1.122	0.353	16
1732.4	1412	UMTS Band 4 RMC	24.0	23.78	0.15	Rear	1:1	15	0.257	1.052	0.270	17
1732.4	1412		24.0	23.78	-0.10	Front	1:1	15	0.213	1.052	0.224	-
836.6	4183	UMTS Band 5 RMC	24.5	23.78	0.04	Rear	1:1	15	0.326	1.180	0.385	-
836.6	4183		24.5	23.78	0.03	Front	1:1	15	0.326	1.180	0.385	18
ANSI/ IEEE C95.1 - 2005– Safety Limit Spatial Peak Uncontrolled Exposure/ General Population						Body 1.6 W/kg Averaged over 1 gram						

LTE Band Bodyworn SAR

Frequency		Mode	Band width	Tune- Up Limit	Meas. Power	Power Drift	Test Position	MPR	RB Size	RB offset	Duty Cycle	Distance	Meas. SAR	Scaling	Scaled SAR	Plot No.
Mhz	Ch.		(Mhz)	(dBm)	(dBm)	(dB)		(dB)				(mm)	(W/kg)	Factor	(W/kg)	
1880.0	18900	LTE 2 QPSK	20	25.0	24.00	-0.18	Rear	0	1	49	1:1	15	0.350	1.259	0.441	-
1880.0	18900		20	24.0	22.99	-0.14	Rear	1	50	49	1:1	15	0.289	1.262	0.365	-
1880.0	18900		20	25.0	24.00	0.08	Front	0	1	49	1:1	15	0.494	1.259	0.622	19
1880.0	18900		20	24.0	22.99	0.05	Front	1	50	49	1:1	15	0.412	1.262	0.520	-
707.5	23095	LTE 12 QPSK	10	25.0	24.19	0.01	Rear	0	1	24	1:1	15	0.218	1.205	0.263	-
707.5	23095		10	24.0	23.36	0.01	Rear	1	25	0	1:1	15	0.175	1.159	0.203	-
707.5	23095		10	25.0	24.19	0.05	Front	0	1	24	1:1	15	0.254	1.205	0.306	20
707.5	23095		10	24.0	23.36	-0.01	Front	1	25	0	1:1	15	0.198	1.159	0.229	-
831.5	26865	LTE 26 QPSK	15	25.0	23.64	0.02	Rear	0	1	0	1:1	15	0.284	1.368	0.389	-
831.5	26865		15	24.0	22.75	-0.03	Rear	1	36	39	1:1	15	0.255	1.334	0.340	-
831.5	26865		15	25.0	23.64	-0.04	Front	0	1	0	1:1	15	0.308	1.368	0.421	21
831.5	26865		15	24.0	22.75	0.02	Front	1	36	39	1:1	15	0.240	1.334	0.320	-
2593.0	40620	LTE 41 QPSK	20	25.0	24.25	-0.19	Rear	0	1	49	1:1.58	15	0.303	1.189	0.360	-
2593.0	40620		20	24.0	23.44	0.07	Rear	1	50	25	1:1.58	15	0.254	1.138	0.289	-
2593.0	40620		20	25.0	24.25	0.15	Front	0	1	49	1:1.58	15	0.381	1.189	0.453	22
2593.0	40620		20	24.0	23.44	0.18	Front	1	50	25	1:1.58	15	0.315	1.138	0.358	-
1745.0	132322	LTE 66 QPSK	20	25.0	24.27	-0.02	Rear	0	1	49	1:1	15	0.348	1.183	0.412	-
1745.0	132322		20	24.0	23.40	0.01	Rear	1	50	25	1:1	15	0.288	1.148	0.331	-
1745.0	132322		20	25.0	24.27	0.05	Front	0	1	49	1:1	15	0.470	1.183	0.556	23
1745.0	132322		20	24.0	23.40	0.05	Front	1	50	25	1:1	15	0.385	1.148	0.442	-
ANSI/ IEEE C95.1 - 2005– Safety Limit Spatial Peak Uncontrolled Exposure/ General Population								Body 1.6 W/kg Averaged over 1 gram								

DTS Bodyworn SAR

Frequency		Mode	Band width	Data Rate	Tune-Up Limit	Meas. Power	Power Drift	Test Position	Ant. Config.	Duty Cycle	Distance	Area Scan Peak SAR	Meas. SAR	Scaling Factor	Scaling Factor	Scaled SAR	Plot No.
MHz	Ch.		(MHz)	(Mbps)	(dBm)	(dBm)	(dB)										
2 437	6	802.11b	20	1	17.0	16.15	-0.07	Rear	Ant.2	98.8	15	0.823	0.462	1.216	1.012	0.569	-
2 437	6	802.11b	20	1	17.0	16.15	-0.04	Front	Ant.2	98.8	15	0.0232	0.014	1.216	1.012	0.017	-
2 437	6	802.11b	20	1	17.0	16.15	-0.05	Rear	MIMO	98.8	15	1.180	0.657	1.216	1.012	0.809	24
2 412	1	802.11b	20	1	16.0	15.03	-0.11	Rear	MIMO	98.8	15	1.01	0.525	1.250	1.012	0.664	-
2 462	11	802.11b	20	1	16.0	15.11	0.13	Rear	MIMO	98.8	15	0.865	0.441	1.227	1.012	0.548	-
2 437	6	802.11b	20	1	17.0	16.15	-0.02	Front	MIMO	98.8	15	0.0516	0.030	1.216	1.012	0.037	-
ANSI/ IEEE C95.1 - 2005- Safety Limit Spatial Peak Uncontrolled Exposure/ General Population									Body 1.6 W/kg Averaged over 1 gram								

NII Bodyworn SAR

Frequency		Mode	Band width	Data Rate	Tune-Up Limit	Meas. Power	Power Drift	Test Position	Ant. Config.	Duty Cycle	Distance	Area Scan Peak SAR	Meas. SAR	Scaling Factor	Scaling Factor	Scaled SAR	Plot No.
MHz	Ch.		(MHz)	(Mbps)	(dBm)	(dBm)	(dB)										
5300	60	802.11a	20	6	17.0	15.74	-0.08	Rear	MIMO	93.3	15	0.757	0.351	1.337	1.072	0.503	25
5300	60	802.11a	20	6	17.0	15.74	0.01	Front	MIMO	93.3	15	0.134	0.062	1.337	1.072	0.089	-
5720	144	802.11a	20	6	17.0	15.31	0.07	Rear	MIMO	93.3	15	0.610	0.270	1.476	1.072	0.427	-
5720	144	802.11a	20	6	17.0	15.31	-0.01	Front	MIMO	93.3	15	0.106	0.026	1.476	1.072	0.041	-
5805	161	802.11a	20	6	17.0	15.50	-0.02	Rear	MIMO	93.3	15	0.550	0.244	1.413	1.072	0.369	-
5805	161	802.11a	20	6	17.0	15.50	-0.02	Front	MIMO	93.3	15	0.0976	0.026	1.413	1.072	0.039	-
ANSI/ IEEE C95.1 - 2005- Safety Limit Spatial Peak Uncontrolled Exposure/ General Population									Body 1.6 W/kg Averaged over 1 gram								

DSS Body-Worn SAR

Frequency		Mode	Tune-Up Limit	Meas. Power	Power Drift	Test Position	Distance	Meas. SAR	Scaling Factor	Scaling Factor	Scaled SAR	Plot No.
MHz	Ch.		(dBm)	(dBm)	(dB)							
2480	78	Bluetooth DH5	14.5	14.07	-0.09	Rear	15	0.269	1.104	1.307	0.388	26
2480	78	Bluetooth DH5	14.5	14.07	0.00	Front	15	0.00102	1.104	1.307	0.001	-
ANSI/ IEEE C95.1 - 2005- Safety Limit Spatial Peak Uncontrolled Exposure/ General Population							Body 1.6 W/kg Averaged over 1 gram					

13.3 Hotspot SAR Measurement Results

GSM 850 Hotspot SAR

Frequency		Mode	Tune-Up Limit	Meas. Power	Power Drift	Test Position	Duty Cycle	Distance (mm)	Meas. SAR	Scaling Factor	Scaled SAR	Plot No.
MHz	Ch.		(dB)	(dB)	(dB)				(W/kg)		(W/kg)	
836.6	190	GPRS 2TX	29.5	28.01	0.06	Rear	1:4.15	10	0.318	1.409	0.448	27
836.6	190	GPRS 2TX	29.5	28.01	0.16	Front	1:4.15	10	0.210	1.409	0.296	-
836.6	190	GPRS 2TX	29.5	28.01	0.09	Left	1:4.15	10	0.144	1.409	0.203	-
836.6	190	GPRS 2TX	29.5	28.01	0.03	Right	1:4.15	10	0.251	1.409	0.354	-
836.6	190	GPRS 2TX	29.5	28.01	0.06	Bottom	1:4.15	10	0.311	1.409	0.438	-
ANSI/ IEEE C95.1 - 2005- Safety Limit Spatial Peak Uncontrolled Exposure/ General Population						Body 1.6 W/kg Averaged over 1 gram						

GSM 1900 Hotspot SAR

Frequency		Mode	Tune-Up Limit	Meas. Power	Power Drift	Test Position	Duty Cycle	Distance (mm)	Meas. SAR	Scaling Factor	Scaled SAR	Plot No.
MHz	Ch.		(dB)	(dB)	(dB)				(W/kg)		(W/kg)	
1880	661	GPRS 2TX	26.5	25.82	-0.05	Rear	1:4.15	10	0.258	1.169	0.302	28
1880	661	GPRS 2TX	26.5	25.82	0.11	Front	1:4.15	10	0.231	1.169	0.270	-
1880	661	GPRS 2TX	26.5	25.82	-0.14	Left	1:4.15	10	0.073	1.169	0.085	-
1880	661	GPRS 2TX	26.5	25.82	0.03	Bottom	1:4.15	10	0.124	1.169	0.145	-
ANSI/ IEEE C95.1 - 2005- Safety Limit Spatial Peak Uncontrolled Exposure/ General Population						Body 1.6 W/kg Averaged over 1 gram						

UMTS Band 5 Hotspot SAR

Frequency		Mode	Tune-Up Limit	Meas. Power	Power Drift	Test Position	Duty Cycle	Distance	Meas. SAR	Scaling Factor	Scaled SAR	Plot No.
MHz	Ch.		(dB)	(dB)	(dB)			(mm)	(W/kg)		(W/kg)	
836.6	4183	RMC	24.5	23.78	0.17	Rear	1:1	10	0.708	1.180	0.835	-
826.4	4132	RMC	24.5	23.86	-0.01	Rear	1:1	10	0.619	1.159	0.717	-
846.6	4233	RMC	24.5	23.76	0.00	Rear	1:1	10	0.767	1.186	0.910	29
836.6	4183	RMC	24.5	23.78	-0.13	Front	1:1	10	0.302	1.180	0.356	-
836.6	4183	RMC	24.5	23.78	0.15	Left	1:1	10	0.213	1.180	0.251	-
836.6	4183	RMC	24.5	23.78	-0.02	Right	1:1	10	0.309	1.180	0.365	-
836.6	4183	RMC	24.5	23.78	0.02	Bottom	1:1	10	0.403	1.180	0.476	-
ANSI/ IEEE C95.1 - 2005- Safety Limit Spatial Peak Uncontrolled Exposure/ General Population						Body 1.6 W/kg Averaged over 1 gram						

UMTS Band 4 Hotspot SAR

Frequency		Mode	Tune-Up Limit	Meas. Power	Power Drift	Test Position	Duty Cycle	Distance	Meas. SAR	Scaling Factor	Scaled SAR	Plot No.
Mhz	Ch.		(dB)	(dB)	(dB)			(mm)	(W/kg)		(W/kg)	
1732.4	1412	RMC	22.0	21.73	0.08	Rear	1:1	10	0.329	1.064	0.350	-
1732.4	1412	RMC	22.0	21.73	0.02	Front	1:1	10	0.260	1.064	0.277	-
1732.4	1412	RMC	22.0	21.73	0.18	Left	1:1	10	0.095	1.064	0.101	-
1732.4	1412	RMC	22.0	21.73	0.12	Bottom	1:1	10	0.442	1.064	0.470	30

ANSI/ IEEE C95.1 - 2005– Safety Limit
Spatial Peak
Uncontrolled Exposure/ General Population

Body
1.6 W/kg
Averaged over 1 gram

UMTS Band 2 Hotspot SAR

Frequency		Mode	Tune-Up Limit	Meas. Power	Power Drift	Test Position	Duty Cycle	Distance	Meas. SAR	Scaling Factor	Scaled SAR	Plot No.
Mhz	Ch.		(dB)	(dB)	(dB)			(mm)	(W/kg)		(W/kg)	
1880	9400	RMC	22.0	21.45	0.02	Rear	1:1	10	0.322	1.135	0.365	-
1880	9400	RMC	22.0	21.45	0.03	Front	1:1	10	0.327	1.135	0.371	-
1880	9400	RMC	22.0	21.45	0.10	Left	1:1	10	0.119	1.135	0.135	-
1880	9400	RMC	22.0	21.45	0.11	Bottom	1:1	10	0.583	1.135	0.662	31

ANSI/ IEEE C95.1 - 2005– Safety Limit
Spatial Peak
Uncontrolled Exposure/ General Population

Body
1.6 W/kg
Averaged over 1 gram

Note: * Data entry indicate Variability measurement.

LTE Band 2 Hotspot SAR

Frequency		Mode	Band width	Tune-Up Limit	Meas. Power	Power Drift	Test Position	MPR	RB Size	RB Offset	Duty Cycle	Distance	Meas. SAR	Scaling Factor	Scaled SAR	Plot No.
Mhz	Ch.		(MHz)	(dBm)	(dBm)	(dB)		(dB)				(mm)	(W/kg)		(W/kg)	
1880	18900	QPSK	20	22.0	20.80	-0.00	Rear	0	1	99	1:1	10	0.256	1.318	0.337	-
1880	18900	QPSK	20	22.0	20.95	0.05	Rear	0	50	49	1:1	10	0.277	1.274	0.353	-
1880	18900	QPSK	20	22.0	20.80	0.14	Front	0	1	99	1:1	10	0.354	1.318	0.467	-
1880	18900	QPSK	20	22.0	20.95	0.10	Front	0	50	49	1:1	10	0.358	1.274	0.456	-
1880	18900	QPSK	20	22.0	20.80	0.04	Left	0	1	99	1:1	10	0.202	1.318	0.266	-
1880	18900	QPSK	20	22.0	20.95	-0.06	Left	0	50	49	1:1	10	0.208	1.274	0.265	-
1880	18900	QPSK	20	22.0	20.80	-0.10	Bottom	0	1	99	1:1	10	0.490	1.318	0.646	-
1880	18900	QPSK	20	22.0	20.95	-0.02	Bottom	0	50	49	1:1	10	0.527	1.274	0.671	32

ANSI/ IEEE C95.1 - 2005– Safety Limit
Spatial Peak
Uncontrolled Exposure/ General Population

Body
1.6 W/kg
Averaged over 1 gram

LTE Band 12 Hotspot SAR

Frequency		Mode	Band width	Tune-Up Limit	Meas. Power	Power Drift	Test Position	MPR	RB Size	RB Offset	Duty Cycle	Distance	Meas. SAR	Scaling Factor	Scaled SAR	Plot No.
Mhz	Ch.		(Mhz)	(dBm)	(dBm)	(dB)		(dB)				(mm)	(W/kg)		(W/kg)	
707.5	23095	QPSK	10	25.0	24.19	-0.02	Rear	0	1	24	1:1	10	0.548	1.205	0.660	33
707.5	23095	QPSK	10	24.0	23.36	-0.03	Rear	1	25	0	1:1	10	0.448	1.159	0.519	-
707.5	23095	QPSK	10	25.0	24.19	-0.00	Front	0	1	24	1:1	10	0.206	1.205	0.248	-
707.5	23095	QPSK	10	24.0	23.36	-0.04	Front	1	25	0	1:1	10	0.165	1.159	0.191	-
707.5	23095	QPSK	10	25.0	24.19	0.01	Left	0	1	24	1:1	10	0.090	1.205	0.108	-
707.5	23095	QPSK	10	24.0	23.36	0.02	Left	1	25	0	1:1	10	0.070	1.159	0.081	-
707.5	23095	QPSK	10	25.0	24.19	0.06	Right	0	1	24	1:1	10	0.167	1.205	0.201	-
707.5	23095	QPSK	10	24.0	23.36	0.04	Right	1	25	0	1:1	10	0.136	1.159	0.158	-
707.5	23095	QPSK	10	25.0	24.19	0.12	Bottom	0	1	24	1:1	10	0.150	1.205	0.181	-
707.5	23095	QPSK	10	24.0	23.36	0.13	Bottom	1	25	0	1:1	10	0.137	1.159	0.159	-
ANSI/ IEEE C95.1 - 2005– Safety Limit Spatial Peak Uncontrolled Exposure/ General Population								Body 1.6 W/kg Averaged over 1 gram								

LTE Band 26 Hotspot SAR

Frequency		Mode	Band width	Tune-Up Limit	Meas. Power	Power Drift	Test Position	MPR	RB Size	RB Offset	Duty Cycle	Distance	Meas. SAR	Scaling Factor	Scaled SAR	Plot No.
Mhz	Ch.		(Mhz)	(dBm)	(dBm)	(dB)		(dB)				(mm)	(W/kg)		(W/kg)	
831.5	26865	QPSK	15	25.0	23.64	0.03	Rear	0	1	0	1:1	10	0.584	1.368	0.799	34
831.5	26865	QPSK	15	24.0	22.75	0.01	Rear	1	36	39	1:1	10	0.544	1.334	0.726	-
831.5	26865	QPSK	15	25.0	23.64	-0.02	Front	0	1	0	1:1	10	0.249	1.368	0.341	-
831.5	26865	QPSK	15	24.0	22.75	-0.01	Front	1	36	39	1:1	10	0.221	1.334	0.295	-
831.5	26865	QPSK	15	25.0	23.64	-0.02	Left	0	1	0	1:1	10	0.148	1.368	0.202	-
831.5	26865	QPSK	15	24.0	22.75	-0.01	Left	1	36	39	1:1	10	0.131	1.334	0.175	-
831.5	26865	QPSK	15	25.0	23.64	0.07	Right	0	1	0	1:1	10	0.237	1.368	0.324	-
831.5	26865	QPSK	15	24.0	22.75	0.04	Right	1	36	39	1:1	10	0.220	1.334	0.293	-
831.5	26865	QPSK	15	25.0	23.64	0.17	Bottom	0	1	0	1:1	10	0.322	1.368	0.440	-
831.5	26865	QPSK	15	24.0	22.75	0.12	Bottom	1	36	39	1:1	10	0.311	1.334	0.415	-
ANSI/ IEEE C95.1 - 2005– Safety Limit Spatial Peak Uncontrolled Exposure/ General Population								Body 1.6 W/kg Averaged over 1 gram								

LTE Band 41 Hotspot SAR																
Frequency		Mode	Band width	Tune-Up Limit	Meas. Power	Power Drift	Test Position	MPR	RB Size	RB Offset	Duty Cycle	Distance	Meas. SAR	Scaling Factor	Scaled SAR	Plot No.
Mhz	Ch.															
2593.0	40620	QPSK	20	25.0	24.25	0.19	Rear	0	1	49	1:1.58	10	0.637	1.189	0.757	-
2506.0	39750	QPSK	20	25.0	23.66	0.10	Rear	0	1	0	1:1.58	10	0.480	1.361	0.653	-
2549.5	40185	QPSK	20	25.0	23.79	-0.06	Rear	0	1	49	1:1.58	10	0.492	1.321	0.650	-
2636.5	41055	QPSK	20	25.0	24.09	0.12	Rear	0	1	49	1:1.58	10	0.635	1.233	0.783	-
2680.0	41490	QPSK	20	25.0	23.87	0.14	Rear	0	1	49	1:1.58	10	0.579	1.297	0.751	-
2593.0	40620	QPSK	20	24.0	23.44	-0.15	Rear	1	50	25	1:1.58	10	0.482	1.138	0.549	-
2593.0	40620	QPSK	20	24.0	23.33	0.11	Rear	1	100	0	1:1.58	10	0.474	1.167	0.553	-
2593.0	40620	QPSK	20	25.0	24.25	0.12	Front	0	1	49	1:1.58	10	0.590	1.189	0.702	-
2506.0	39750	QPSK	20	25.0	23.66	0.12	Front	0	1	0	1:1.58	10	0.554	1.361	0.754	-
2549.5	40185	QPSK	20	25.0	23.79	0.13	Front	0	1	49	1:1.58	10	0.572	1.321	0.756	-
2636.5	41055	QPSK	20	25.0	24.09	0.15	Front	0	1	49	1:1.58	10	0.653	1.233	0.805	-
2680.0	41490	QPSK	20	25.0	23.87	0.18	Front	0	1	49	1:1.58	10	0.685	1.297	0.888	35
2593.0	40620	QPSK	20	24.0	23.44	0.11	Front	1	50	25	1:1.58	10	0.59	1.138	0.671	-
2506.0	39750	QPSK	20	24.0	22.82	0.03	Front	1	50	0	1:1.58	10	0.392	1.312	0.514	-
2549.5	40185	QPSK	20	24.0	22.95	0.14	Front	1	50	49	1:1.58	10	0.437	1.274	0.557	-
2636.5	41055	QPSK	20	24.0	23.30	0.15	Front	1	50	0	1:1.58	10	0.479	1.175	0.563	-
2680.0	41490	QPSK	20	24.0	23.05	0.12	Front	1	50	25	1:1.58	10	0.537	1.245	0.669	-
2593.0	40620	QPSK	20	24.0	23.33	0.15	Front	1	100	0	1:1.58	10	0.405	1.167	0.473	-
2593.0	40620	QPSK	20	25.0	24.25	0.01	Left	0	1	49	1:1.58	10	0.247	1.189	0.294	-
2593.0	40620	QPSK	20	24.0	23.44	0.06	Left	1	50	25	1:1.58	10	0.202	1.138	0.230	-
2593.0	40620	QPSK	20	25.0	24.25	-0.12	Bottom	0	1	49	1:1.58	10	0.565	1.189	0.672	-
2506.0	39750	QPSK	20	25.0	23.66	-0.14	Bottom	0	1	0	1:1.58	10	0.557	1.361	0.758	-
2549.5	40185	QPSK	20	25.0	23.79	-0.13	Bottom	0	1	49	1:1.58	10	0.506	1.321	0.668	-
2636.5	41055	QPSK	20	25.0	24.09	-0.14	Bottom	0	1	49	1:1.58	10	0.551	1.233	0.679	-
2680.0	41490	QPSK	20	25.0	23.87	-0.13	Bottom	0	1	49	1:1.58	10	0.521	1.297	0.676	-
2593.0	40620	QPSK	20	24.0	23.44	-0.10	Bottom	1	50	25	1:1.58	10	0.466	1.138	0.530	-
2593.0	40620	QPSK	20	24.0	23.33	-0.12	Bottom	1	100	0	1:1.58	10	0.455	1.167	0.531	-
ANSI/ IEEE C95.1 - 2005– Safety Limit Spatial Peak Uncontrolled Exposure/ General Population								Body 1.6 W/kg Averaged over 1 gram								

LTE Band 66 Hotspot SAR																
Frequency		Mode	Band width	Tune-Up Limit	Meas. Power	Power Drift	Test Position	MPR	RB Size	RB Offset	Duty Cycle	Distance	Meas. SAR	Scaling Factor	Scaled SAR	Plot No.
Mhz	Ch.															
1745	132322	QPSK	20	22.0	21.33	-0.15	Rear	0	1	49	1:1	10	0.324	1.167	0.378	-
1745	132322	QPSK	20	22.0	21.45	-0.04	Rear	0	50	25	1:1	10	0.339	1.135	0.385	-
1745	132322	QPSK	20	22.0	21.33	-0.03	Front	0	1	49	1:1	10	0.361	1.167	0.421	-
1745	132322	QPSK	20	22.0	21.45	-0.05	Front	0	50	25	1:1	10	0.373	1.135	0.423	-
1745	132322	QPSK	20	22.0	21.33	0.00	Left	0	1	49	1:1	10	0.182	1.167	0.212	-
1745	132322	QPSK	20	22.0	21.45	-0.14	Left	0	50	25	1:1	10	0.122	1.135	0.138	-
1745	132322	QPSK	20	22.0	21.33	-0.12	Bottom	0	1	49	1:1	10	0.394	1.167	0.460	-
1745	132322	QPSK	20	22.0	21.45	-0.05	Bottom	0	50	25	1:1	10	0.434	1.135	0.493	36
ANSI/ IEEE C95.1 - 2005– Safety Limit Spatial Peak Uncontrolled Exposure/ General Population								Body 1.6 W/kg Averaged over 1 gram								

DTS Hotspot SAR

Frequency		Mode	Band width	Data Rate	Tune-Up Limit	Meas. Power	Power Drift	Test Position	Ant. Config.	Duty Cycle	Distance	Area Scan Peak SAR	Meas. SAR	Scaling Factor	Scaling Factor	Scaled SAR	Plot No.
MHz	Ch.		(MHz)	(Mbps)	(dBm)	(dBm)	(dB)				(mm)	(W/kg)	(W/kg)		(Duty)	(W/kg)	
2 437	6	802.11b	20	1	11.0	9.60	0.09	Rear	Ant.2	98.8	10	0.343	0.186	1.380	1.012	0.260	-
2 437	6	802.11b	20	1	11.0	9.60	0.00	Front	Ant.2	98.8	10	0.00502	0.00133	1.380	1.012	0.002	-
2 437	6	802.11b	20	1	11.0	9.60	0.01	Left	Ant.2	98.8	10	0.00978	0.00305	1.380	1.012	0.004	-
2 437	6	802.11b	20	1	11.0	9.60	0.00	Top	Ant.2	98.8	10	0.000	0.000	1.380	1.012	0.000	-
2 462	11	802.11b	20	1	13.0	12.55	-0.08	Rear	MIMO	98.8	10	0.608	0.303	1.387	1.012	0.425	37
2 462	11	802.11b	20	1	13.0	12.55	0.00	Front	MIMO	98.8	10	0.0323	0.00906	1.387	1.012	0.013	-
2 462	11	802.11b	20	1	13.0	12.55	0.02	Left	MIMO	98.8	10	0.0360	0.022	1.387	1.012	0.031	-
2 462	11	802.11b	20	1	13.0	12.55	0.01	Top	MIMO	98.8	10	0.00995	0.0000457	1.387	1.012	0.000	-
ANSI/ IEEE C95.1 - 2005– Safety Limit Spatial Peak Uncontrolled Exposure/ General Population									Body 1.6 W/kg Averaged over 1 gram								

NII Hotspot SAR

Frequency		Mode	Band width	Data Rate	Tune-Up Limit	Meas. Power	Power Drift	Test Position	Ant. Config.	Duty Cycle	Distance	Area Scan Peak SAR	Meas. SAR	Scaling Factor	Scaling Factor	Scaled SAR	Plot No.
MHz	Ch.		(MHz)	(Mbps)	(dBm)	(dBm)	(dB)				(mm)	(W/kg)	(W/kg)		(Duty)	(W/kg)	
5805	161	802.11a	20	6	17.0	15.50	0.03	Rear	MIMO	93.3	10	1.180	0.509	1.413	1.072	0.771	38
5805	161	802.11a	20	6	17.0	15.50	0.02	Front	MIMO	93.3	10	0.134	0.053	1.413	1.072	0.080	-
5805	161	802.11a	20	6	17.0	15.50	-0.09	Left	MIMO	93.3	10	0.843	0.370	1.413	1.072	0.560	-
5805	161	802.11a	20	6	17.0	15.50	0.06	Top	MIMO	93.3	10	0.700	0.310	1.413	1.072	0.469	-
ANSI/ IEEE C95.1 - 2005– Safety Limit Spatial Peak Uncontrolled Exposure/ General Population									Body 1.6 W/kg Averaged over 1 gram								

DSS Hotspot SAR

Frequency		Mode	Tune-Up Limit	Meas. Power	Power Drift	Test Position	Distance	Meas. SAR	Scaling Factor	Scaling Factor	Scaled SAR	Plot No.
MHz	Ch.		(dBm)	(dBm)	(dB)		(mm)	(W/kg)		(Duty)	(W/kg)	
2480	78	Bluetooth DH5	14.5	14.07	0.07	Rear	10	0.578	1.104	1.307	0.834	39
2402	0	Bluetooth DH5	14.5	14.02	-0.06	Rear	10	0.329	1.117	1.307	0.480	-
2441	39	Bluetooth DH5	14.5	13.01	0.05	Rear	10	0.295	1.409	1.307	0.543	-
2480	78	Bluetooth DH5	14.5	14.07	0.00	Front	10	0.00351	1.104	1.307	0.005	-
2480	78	Bluetooth DH5	14.5	14.07	-0.09	Left	10	0.033	1.104	1.307	0.048	-
2480	78	Bluetooth DH5	14.5	14.07	0.03	Top	10	0.017	1.104	1.307	0.025	-
ANSI/ IEEE C95.1 - 2005– Safety Limit Spatial Peak Uncontrolled Exposure/ General Population							Body 1.6 W/kg Averaged over 1 gram					

13.4 Phablet SAR Measurement Considerations

Per FCC KDB 648474 D04v01r03, this device is considered a “Phablet” since the diagonal dimension is greater than 160 mm and less than 200 mm. Therefore, extremity SAR tests are required when wireless router mode does not apply or if wireless router 1g SAR >1.2 W/kg. When hotspot mode applies, 10g SAR required only for the surfaces and edges with hotspot mode scaled to the maximum output power (including tolerance) is 1g SAR > 1.2 W/kg.

13.5 Phablet SAR Measurement Results

LTE Band 2 Phablet SAR 10g																	
Frequency		Mode	Band Width	Tune-Up Limit	Meas. Power	Power Drift	Test Position	Sensor	MPR	RB Size	RB Offset	Duty Cycle	Distance	Meas. SAR	Scaling Factor	Scaled SAR	Plot No.
MHz	Ch.			(dB)	(dB)	(dB)			(dB)				(mm)	(W/kg)		(W/kg)	
1880	18900	QPSK	20	22.0	20.87	0.01	Rear	ON	0	1	49	1:1	0	1.020	1.297	1.323	-
1880	18900	QPSK	20	22.0	20.90	0.04	Rear	ON	0	50	49	1:1	0	1.020	1.288	1.314	-
1880	18900	QPSK	20	25.0	24.00	0.17	Front	N/A	0	1	49	1:1	0	1.980	1.259	2.493	40
1860	18700	QPSK	20	25.0	23.89	0.18	Front	N/A	0	1	99	1:1	0	1.910	1.291	2.466	-
1900	19100	QPSK	20	25.0	23.71	0.14	Front	N/A	0	1	49	1:1	0	1.880	1.346	2.530	41
1880	18900	QPSK	20	24.0	22.99	0.12	Front	N/A	1	50	49	1:1	0	1.650	1.262	2.082	-
1860	18700	QPSK	20	24.0	22.83	0.10	Front	N/A	1	50	25	1:1	0	1.580	1.309	2.068	-
1900	19100	QPSK	20	24.0	22.97	0.19	Front	N/A	1	50	25	1:1	0	1.580	1.268	2.003	-
1880	18900	QPSK	20	24.0	22.89	0.18	Front	N/A	1	100	0	1:1	0	1.550	1.291	2.001	-
1880	18900	QPSK	20	25.0	24.00	0.16	Left	N/A	0	1	49	1:1	0	1.060	1.259	1.335	-
1 880	18900	QPSK	20	24.0	22.99	0.07	Left	N/A	1	50	49	1:1	0	0.865	1.274	1.091	-
1 880	18900	QPSK	20	22.0	20.87	0.11	Bottom	ON	0	1	49	1:1	0	1.050	1.297	1.362	-
1 880	18900	QPSK	20	22.0	20.90	0.18	Bottom	ON	0	50	49	1:1	0	1.090	1.306	1.404	-
1 880	18900	QPSK	20	25.0	24.00	-0.09	Rear	OFF	0	1	49	1:1	19	0.174	1.259	0.219	-
1 880	18900	QPSK	20	24.0	22.99	-0.07	Rear	OFF	1	50	49	1:1	19	0.142	1.274	0.179	-
1 880	18900	QPSK	20	25.0	24.00	0.08	Bottom	OFF	0	1	49	1:1	13	0.465	1.259	0.585	-
1 880	18900	QPSK	20	24.0	22.99	0.08	Bottom	OFF	1	50	49	1:1	13	0.380	1.274	0.389	-
ANSI/ IEEE C95.1 - 2005 – Safety Limit Spatial Peak Uncontrolled Exposure/ General Population								Hand 4.0 W/kg Averaged over 10 gram									



NII Phablet SAR 10g																
Frequency		Mode	Band width	Data Rate	Tune-Up Limit	Meas. Power	Power Drift	Test	Duty	Distance	Area Scan	Meas. SAR	Scaling	Scaling	Scaled	Plot No.
Mhz	Ch.		(Mhz)	(Mbps)	(dBm)	(dBm)	(dB)	Position	Cycle	(mm)	(W/kg)	(W/kg)	Factor	Factor (Duty)	(W/kg)	
5300	60	802.11a	20	6	17.0	15.74	0.08	Rear	93.3	0	18.200	1.520	1.337	1.072	2.178	-
5260	52	802.11a	20	6	17.0	15.66	0.01	Rear	93.3	0	16.600	1.420	1.361	1.072	2.072	-
5300	60	802.11a	20	6	17.0	15.74	0.00	Front	93.3	0	2.020	0.228	1.337	1.072	0.327	-
5300	60	802.11a	20	6	17.0	15.74	0.09	Left	93.3	0	7.800	0.677	1.337	1.072	0.970	-
5300	60	802.11a	20	6	17.0	15.74	0.07	Top	93.3	0	1.460	0.260	1.337	1.072	0.373	-
5600	120	802.11a	20	6	17.0	15.31	0.00	Rear	93.3	0	19.300	1.560	1.476	1.072	2.468	42
5620	124	802.11a	20	6	17.0	15.30	-0.04	Rear	93.3	0	23.600	1.500	1.479	1.072	2.378	-
5600	120	802.11a	20	6	17.0	15.31	0.00	Front	93.3	0	1.150	0.110	1.476	1.072	0.176	-
5600	120	802.11a	20	6	17.0	15.31	0.08	Left	93.3	0	3.230	0.321	1.476	1.072	0.508	-
5600	120	802.11a	20	6	17.0	15.31	-0.02	Top	93.3	0	1.410	0.223	1.476	1.072	0.353	-
ANSI/ IEEE C95.1 - 2005 – Safety Limit Spatial Peak Uncontrolled Exposure/ General Population										Hand 4.0 W/kg Averaged over 10 gram						

13.6 SAR Test Notes

General Notes:

1. The test data reported are the worst-case SAR values according to test procedures specified in IEEE 1528-2013, FCC KDB Procedure.
2. Batteries are fully charged at the beginning of the SAR measurements. A standard battery was used for all SAR measurements.
3. Liquid tissue depth was at least 15.0 cm for all frequencies.
4. The manufacturer has confirmed that the device(s) tested have the same physical, mechanical and thermal characteristics and are within operational tolerances expected for production units.
5. SAR results were scaled to the maximum allowed power to demonstrate compliance per FCC KDB 447498 D01v06.
6. Device was tested using a fixed spacing for body-worn accessory testing. A separation distance of 15 mm was considered because the manufacturer has determined that there will be body-worn accessories available in the marketplace for users to support this separation distance.
7. Per FCC KDB 648474 D04v01r03, SAR was evaluated without a headset connected to the device. Since the standalone reported SAR was 1.2 W/kg, no additional SAR evaluation using a headset cable were required.
8. Per KDB 648474 D04v01r03, this device is considered a "Phablet" since the diagonal dimension is > 160 mm and < 200 mm. When hotspot mode applies, extremity SAR is required only for the surfaces and edges with hotspot mode scaled to the maximum output power (with tolerance) is 1 g SAR > 1.2 W/kg.
9. Per FCC KDB 865664 D01v01r04, variability SAR measurement were performed when the measured SAR results for a frequency Band were greater than or equal to 0.8 W/kg for 1g SAR and >2 for 10g SAR Please see Section 15 for variability analysis.
10. This device utilizes power reduction for some wireless mode and technologies, as outlined in sec. 4 The maximum output power allowed for each transmitter and exposure condition was evaluated for SAR compliance based on expected use conditions and simultaneous scenarios.
11. During SAR testing for the Hotspot conditions per KDB 941225 D06v02r01, the actual portable hotspotoperation (with actual simultaneous transmission of a transmitter with WiFi) was not activated.

GSM/GPRS Test Notes:

1. This EUT'S GSM and GPRS device class is B.
2. This device supports GPRS VOIP in the head and the body-worn configurations therefore GPRS was additionally evaluated for head and body-worn compliance.
3. Justification for reduced test configurations per KDB 941225 D01v03r01: The source-based time-averaged output power was evaluated for all multi-slot operations. The multi-slot configuration with the highest frame averaged output power including tolerance was evaluated for SAR.
4. Per FCC KDB 447498 D01v06, if the reported (scaled) SAR measured at the middle channel or highest output power channel for each test configuration is 0.8 W/kg then testing at the other channels is not required for such test configuration(s). When the maximum output power variation across the required test channels is 1/2 dB, instead of the middle channel, the highest output power channel must be used.

UMTS Notes:

1. The 12.2 kbps RMC mode is the primary mode per KDB 941225 D01v03r01.
2. UMTS SAR was tested under RMC 12.2 kbps with HSPA inactive per KDB publication 941225 D01v03r01. AMR and HSPA SAR was not required per the 3G Test Reduction Procedure in KDB Publication 941225 D01v03r01.
3. Per FCC KDB 447498 D01v06, if the reported (scaled) SAR measured at the middle channel or highest output power channel for each test configuration is 0.8 W/kg then testing at the other channels is not required for such test configuration(s). When the maximum output power variation across the

channel highest output power channel was used.

LTE Notes:

1. LTE Considerations: LTE test configurations are determined according to SAR Evaluation Consideration for LTE Devices in FCC KDB 941225 D05v02r05.
2. According to FCC KDB 941225 D05v02r05:
When the reported SAR is 0.8 W/kg, testing of the 100% RB allocation and required test channels is not required. Otherwise, SAR is required for the remaining required test channels using the 1RB, 50%RB and 100%RB allocation with highest output power for that channel.
Only one channel, and as reported SAR values for 1RB allocation and 50%RB allocation were less than 1.45W/Kg only the highest power RB offset for each allocation was required.
3. MPR is permanently implemented for this device by the manufacturer. The specific manufacturer target MPR is indicated alongside the SAR results. MPR is enabled for this device, according to target MPR is indicated alongside the SAR results.
4. When Power reduction is applied, MPR is 0 for some modes.
5. A-MPR was disabled for all SAR tests by setting NS=01 on the base station simulator.
6. Per FCC KDB Publication 447498 D01v06, if the reported (scaled) LTE TDD Band 41 SAR measured at the highest output power channel for each test configuration is 0.6 W/kg then testing at the other channels is not required for such test configurations.
7. TDD LTE (Power Class 3) was tested using UL-DL configuration 0 with 6 UL sub frames and 2S subframes using extended cyclic prefix only and special sub frame configuration 6. SAR tests were performed at maximum output power and worst-case transmission duty factor in extended cyclic prefix. Per 3GPP 36.211 Sec. 4, the duty factor using extended cyclic prefix is 0.633(cf=1.58).
8. Per KDB 941225 D05Av01r02, SAR for LTE Carrier Aggregation operations was not needed because the maximum average output power in LTE CA mode was not > 0.25 dB higher than the maximum output power when downlink CA was not activated.
9. SAR test reduction is applied using the following criteria:
Start with the largest channel Bandwidth and measure SAR for QPSK with 1 RB, and 50% RB allocation, using the RB offset and required test channel combination with the highest maximum output power among RB offsets at the upper edge, middle and lower edge of each required test channel. When the reported SAR is >0.8 W/kg, testing for other Channels is performed at the highest output power level for 1RB, and 50% RB configuration for that channel. Testing for 100% RB configuration is performed at the highest output power level for 100% RB configuration across the Low, Mid and High Channel when the highest reported SAR for 1 RB and 50% RB are >0.8 W/kg, testing for the remaining required channels is not needed because the reported SAR for 100% RB Allocation <1.45 W/kg. Testing for 16-QAM modulation is not required because the reported SAR for QPSK is <1.45 W/kg and its output power is not more than 0.5 dB higher than that a QPSK. Testing for the other channel Bandwidths is not required because the reported SAR for the highest channel Bandwidth is <1.45 W/kg and its output power is not more than 0.5 dB higher than that of the highest channel Bandwidth.

WLAN Notes:

1. For held-to-ear and hotspot operations, the initial test position procedures were applied. For initial test position, the highest extrapolated peak SAR will be used. When reported SAR for the initial test position is ≤ 0.4 W/kg for 1g SAR and ≤ 1.0 W/kg for 10g SAR, no additional testing for the remaining test positions was required. Otherwise, SAR is evaluated at the subsequent highest peak SAR positions until the reported SAR results is ≤ 0.8 W/kg for 1g SAR and ≤ 2.0 W/kg for 10g SAR or all test position are measured.
2. Per KDB 2482227 D01v02r02 justification for test configurations of 2.4 GHz WiFi Single transmission chain operations, the highest measured maximum output power channel for DSSS was selected for SAR measurement. SAR for OFDM modes (2.4 GHz 802.11 g/n) was not required due to the maximum allowed powers and the highest reported DSSS SAR.
3. Per KDB 2482227 D01v02r02 justification for test configurations of 5 GHz WiFi Single transmission chain operations, the initial test configuration was selected according to the transmission mode with the highest maximum allowed powers. Other transmission mode was not investigated since the highest reported SAR for initial test configuration adjusted by the ration of maximum output powers is less than 1.2 W/kg for 1g SAR and less than 3.0 W/kg for 10 g SAR.
4. When the maximum reported 1g averaged SAR is ≤ 0.8 W/kg, SAR testing on additional channels was not required. Otherwise, SAR for the next highest output power channel was required until the reported SAR result was ≤ 1.20 W/kg or all test channels were measured.
5. The device was configured to transmit continuously at the required data rated, channel Bandwidth and signal modulation, using the highest transmission duty factor supported by the test mode tools. The reported SAR was scaled to the 100% transmission duty factor to determine compliance. Procedures used to measure the duty factor are identical to that in the associated WLAN test reports.

Bluetooth Notes:

1. Bluetooth SAR was measured with the device connected to a call box with hopping disabled with DH5 operation and Tx Tests mode type. Per October 2016 TCBC Workshop Notes, the reported SAR was scaled to 100% transmission duty factor to determine compliance. Please see sec.11 for the time-domain plot and calculation for duty factor of the device.
2. Head and Bluetooth tethering SAR were evaluated for BT BR tethering applications.

14. Simultaneous SAR Analysis

This device is containing transmitters that may operate simultaneously. Therefore, simultaneous transmission analysis is required. Per KDB Publication 447498 D01v06 4.3.2, simultaneous transmission SAR test exclusion may be applied when the sum of 1g SAR and 10g SAR for all the simultaneous transmitting antennas in a specific a physical test configuration is $\leq 1.6\text{W/kg}$ for 1g SAR and $\leq 4\text{ W/kg}$ for 10g SAR. The different test positions in an exposure condition may be considered collectively to determine SAR exclusion according to the sum of 1g or 10g SAR.

14.1 Head SAR Simultaneous Transmission Analysis.

Simultaneous Transmission Summation Scenario (Head SAR)											
Band		Main SAR	Bluetooth SAR	6 GHz MIMO WLAN SAR	5 GHz MIMO WLAN SAR	2.4 GHz MIMO WLAN SAR	Σ 1-g SAR	Σ 1-g SAR	Σ 1-g SAR	Σ 1-g SAR	SPLSR
		(W/kg)	(W/kg)	(W/kg)	(W/kg)	(W/kg)	(W/kg)	(W/kg)	(W/kg)	(W/kg)	(Yes/No)
		1	2	3	4	5	1+2	1+2+3	1+2+4	1+2+5	
GSM850	Left Touch	0.334	0.012	0.027	0.120	0.045	0.346	0.373	0.466	0.391	No
	Left Tilt	0.195	0.012	0.028	0.149	0.041	0.207	0.235	0.356	0.248	No
	Right Touch	0.353	0.023	0.047	0.152	0.076	0.376	0.423	0.528	0.452	No
	Right Tilt	0.207	0.020	0.040	0.135	0.050	0.227	0.267	0.362	0.277	No
GPRS850	Left Touch	0.482	0.012	0.027	0.120	0.045	0.494	0.521	0.614	0.539	No
	Left Tilt	0.291	0.012	0.028	0.149	0.041	0.303	0.331	0.452	0.344	No
	Right Touch	0.531	0.023	0.047	0.152	0.076	0.554	0.601	0.706	0.630	No
	Right Tilt	0.305	0.020	0.040	0.135	0.050	0.325	0.365	0.460	0.375	No
GSM1900	Left Touch	0.294	0.012	0.027	0.120	0.045	0.306	0.333	0.426	0.351	No
	Left Tilt	0.119	0.012	0.028	0.149	0.041	0.131	0.159	0.280	0.172	No
	Right Touch	0.228	0.023	0.047	0.152	0.076	0.251	0.298	0.403	0.327	No
	Right Tilt	0.146	0.020	0.040	0.135	0.050	0.166	0.206	0.301	0.216	No
GPRS1900	Left Touch	0.335	0.012	0.027	0.120	0.045	0.347	0.374	0.467	0.392	No
	Left Tilt	0.134	0.012	0.028	0.149	0.041	0.146	0.174	0.295	0.187	No
	Right Touch	0.251	0.023	0.047	0.152	0.076	0.274	0.321	0.426	0.350	No
	Right Tilt	0.161	0.020	0.040	0.135	0.050	0.181	0.221	0.316	0.231	No
UMTS Band 5	Left Touch	0.337	0.012	0.027	0.120	0.045	0.349	0.376	0.469	0.394	No
	Left Tilt	0.189	0.012	0.028	0.149	0.041	0.201	0.229	0.350	0.242	No
	Right Touch	0.385	0.023	0.047	0.152	0.076	0.408	0.455	0.560	0.484	No
	Right Tilt	0.207	0.020	0.040	0.135	0.050	0.227	0.267	0.362	0.277	No
UMTS Band 4	Left Touch	0.223	0.012	0.027	0.120	0.045	0.235	0.262	0.355	0.280	No
	Left Tilt	0.156	0.012	0.028	0.149	0.041	0.168	0.196	0.317	0.209	No
	Right Touch	0.202	0.023	0.047	0.152	0.076	0.225	0.272	0.377	0.301	No
	Right Tilt	0.127	0.020	0.040	0.135	0.050	0.147	0.187	0.282	0.197	No
UMTS Band 2	Left Touch	0.423	0.012	0.027	0.120	0.045	0.435	0.462	0.555	0.480	No
	Left Tilt	0.16	0.012	0.028	0.149	0.041	0.172	0.200	0.321	0.213	No
	Right Touch	0.332	0.023	0.047	0.152	0.076	0.355	0.402	0.507	0.431	No
	Right Tilt	0.185	0.020	0.040	0.135	0.050	0.205	0.245	0.340	0.255	No
LTE Band 2	Left Touch	0.482	0.012	0.027	0.120	0.045	0.494	0.521	0.614	0.539	No
	Left Tilt	0.185	0.012	0.028	0.149	0.041	0.197	0.225	0.346	0.238	No
	Right Touch	0.363	0.023	0.047	0.152	0.076	0.386	0.433	0.538	0.462	No
	Right Tilt	0.214	0.020	0.040	0.135	0.050	0.234	0.274	0.369	0.284	No
LTE Band 12	Left Touch	0.219	0.012	0.027	0.120	0.045	0.231	0.258	0.351	0.276	No
	Left Tilt	0.092	0.012	0.028	0.149	0.041	0.104	0.132	0.253	0.145	No
	Right Touch	0.253	0.023	0.047	0.152	0.076	0.276	0.323	0.428	0.352	No
	Right Tilt	0.129	0.020	0.040	0.135	0.050	0.149	0.189	0.284	0.199	No

Simultaneous Transmission Summation Scenario (Head SAR)											
Band		Main SAR	Bluetooth SAR	6 GHz MIMO WLAN SAR	5 GHz MIMO WLAN SAR	2.4 GHz Ant2 WLAN SAR	Σ 1-g SAR	Σ 1-g SAR	Σ 1-g SAR	Σ 1-g SAR	SPLSR
		(W/kg)	(W/kg)	(W/kg)	(W/kg)	(W/kg)	(W/kg)	(W/kg)	(W/kg)	(W/kg)	(Yes/No)
		1	2	3	4	5	1+2	1+2+3	1+2+4	1+2+5	
LTE Band 26	Left Touch	0.324	0.012	0.027	0.120	0.045	0.336	0.363	0.456	0.381	No
	Left Tilt	0.166	0.012	0.028	0.149	0.041	0.178	0.206	0.327	0.219	No
	Right Touch	0.369	0.023	0.047	0.152	0.076	0.392	0.439	0.544	0.468	No
	Right Tilt	0.190	0.020	0.040	0.135	0.050	0.210	0.250	0.345	0.260	No
LTE Band 41	Left Touch	0.190	0.012	0.027	0.120	0.045	0.202	0.229	0.322	0.247	No
	Left Tilt	0.061	0.012	0.028	0.149	0.041	0.073	0.101	0.222	0.114	No
	Right Touch	0.170	0.023	0.047	0.152	0.076	0.193	0.240	0.345	0.269	No
	Right Tilt	0.107	0.020	0.040	0.135	0.050	0.127	0.167	0.262	0.177	No
LTE Band 66	Left Touch	0.403	0.012	0.027	0.120	0.045	0.415	0.442	0.535	0.460	No
	Left Tilt	0.248	0.012	0.028	0.149	0.041	0.260	0.288	0.409	0.301	No
	Right Touch	0.381	0.023	0.047	0.152	0.076	0.404	0.451	0.556	0.480	No
	Right Tilt	0.182	0.020	0.040	0.135	0.050	0.202	0.242	0.337	0.252	No

14.2 Body-Worn SAR Simultaneous Transmission Analysis.

Simultaneous Transmission Summation Scenario (Body-Worn SAR) – Distance: 15 mm												
Band	Main SAR	Bluetooth SAR	6 GHz MIMO WLAN SAR	5 GHz MIMO WLAN SAR	2.4 GHz Ant2 WLAN SAR	2.4 GHz MIMO WLAN SAR	Σ 1-g SAR	Σ 1-g SAR	Σ 1-g SAR	Σ 1-g SAR	Σ 1-g SAR	SPLSR
	(W/kg)	(W/kg)	(W/kg)	(W/kg)	(W/kg)	(W/kg)	(W/kg)	(W/kg)	(W/kg)	(W/kg)	(W/kg)	(Yes/No)
	1	2	3	4	5	6	1+2	1+2+3	1+2+4	1+2+5	1+6	
GSM850	0.417	0.388	0.090	0.503	0.569	0.809	0.805	0.895	1.308	1.374	1.226	No
GPRS850	0.496	0.388	0.090	0.503	0.569	0.809	0.884	0.974	1.387	1.453	1.305	No
GSM1900	0.237	0.388	0.090	0.503	0.569	0.809	0.625	0.715	1.128	1.194	1.046	No
GPRS1900	0.257	0.388	0.090	0.503	0.569	0.809	0.645	0.735	1.148	1.214	1.066	No
UMTS Band 5	0.385	0.388	0.090	0.503	0.569	0.809	0.773	0.863	1.276	1.342	1.194	No
UMTS Band 4	0.270	0.388	0.090	0.503	0.569	0.809	0.658	0.748	1.161	1.227	1.079	No
UMTS Band 2	0.353	0.388	0.090	0.503	0.569	0.809	0.741	0.831	1.244	1.310	1.162	No
LTE Band 2	0.622	0.388	0.090	0.503	0.569	0.809	1.010	1.100	1.513	1.579	1.431	No
LTE Band 12	0.306	0.388	0.090	0.503	0.569	0.809	0.694	0.784	1.197	1.263	1.115	No
LTE Band 26	0.421	0.388	0.090	0.503	0.569	0.809	0.809	0.899	1.312	1.378	1.23	No
LTE Band 41	0.453	0.388	0.090	0.503	0.569	0.809	0.841	0.931	1.344	1.410	1.262	No
LTE Band 66	0.556	0.388	0.090	0.503	0.569	0.809	0.944	1.034	1.447	1.513	1.365	No

14.3 Hotspot SAR Simultaneous Transmission Analysis.

Simultaneous Transmission Summation Scenario (Hotspot SAR) – Distance: 10 mm

Band		Main SAR	Bluetooth SAR	5 GHz MIMO WLAN SAR	2.4 GHz Ant2 WLAN SAR	2.4 GHz MIMO WLAN SAR	Σ 1-g SAR	Σ 1-g SAR	Σ 1-g SAR	Σ 1-g SAR	Σ 1-g SAR	SPLSR
		(W/kg)	(W/kg)	(W/kg)	(W/kg)	(W/kg)	(W/kg)	(W/kg)	(W/kg)	(W/kg)	(W/kg)	(Yes/No)
		1	2	3	4	5	1+2	1+3	1+2+3	1+2+4	1+5	
GSM850	Rear	0.448	0.834	0.771	0.260	0.425	1.282	1.219	2.053	1.542	0.873	Yes
	Front	0.296	0.005	0.080	0.002	0.013	0.301	0.376	0.381	0.303	0.309	No
	Left	0.203	0.048	0.560	0.004	0.031	0.251	0.763	0.811	0.255	0.234	No
	Right	0.354					0.354	0.354	0.354	0.354	0.354	No
	Top		0.025	0.469	0.000	0.000	0.025	0.469	0.494	0.025	0.000	No
	Bottom	0.438					0.438	0.438	0.438	0.438	0.438	No
GSM1900	Rear	0.302	0.834	0.771	0.260	0.425	1.136	1.073	1.907 (Hybrid Pass)	1.396	0.727	Yes
	Front	0.270	0.005	0.080	0.002	0.013	0.275	0.350	0.355	0.277	0.283	No
	Left	0.085	0.048	0.560	0.004	0.031	0.133	0.645	0.693	0.137	0.116	No
	Right						0.000	0.000	0.000	0.000	0.000	No
	Top		0.025	0.469	0.000	0.000	0.025	0.469	0.494	0.025	0.000	No
	Bottom	0.145					0.145	0.145	0.145	0.145	0.145	No
UMTS Band 5	Rear	0.910	0.834	0.771	0.260	0.425	1.744	1.681	2.515	2.004	1.335	Yes
	Front	0.356	0.005	0.080	0.002	0.013	0.361	0.436	0.441	0.363	0.369	No
	Left	0.251	0.048	0.560	0.004	0.031	0.299	0.811	0.859	0.303	0.282	No
	Right	0.365					0.365	0.365	0.365	0.365	0.365	No
	Top		0.025	0.469	0.000	0.000	0.025	0.469	0.494	0.025	0.000	No
	Bottom	0.476					0.476	0.476	0.476	0.476	0.476	No
UMTS Band 4	Rear	0.350	0.834	0.771	0.260	0.425	1.184	1.121	1.955 (Hybrid Pass)	1.444	0.775	Yes
	Front	0.277	0.005	0.080	0.002	0.013	0.282	0.357	0.362	0.284	0.290	No
	Left	0.101	0.048	0.560	0.004	0.031	0.149	0.661	0.709	0.153	0.132	No
	Right						0.000	0.000	0.000	0.000	0.000	No
	Top		0.025	0.469	0.000	0.000	0.025	0.469	0.494	0.025	0.000	No
	Bottom	0.470					0.470	0.470	0.470	0.470	0.470	No
UMTS Band 2	Rear	0.365	0.834	0.771	0.260	0.425	1.199	1.136	1.970 (Hybrid Pass)	1.459	0.790	Yes
	Front	0.371	0.005	0.080	0.002	0.013	0.376	0.451	0.456	0.378	0.384	No
	Left	0.135	0.048	0.560	0.004	0.031	0.183	0.695	0.743	0.187	0.166	No
	Right						0.000	0.000	0.000	0.000	0.000	No
	Top		0.025	0.469	0.000	0.000	0.025	0.469	0.494	0.025	0.000	No
	Bottom	0.662					0.662	0.662	0.662	0.662	0.662	No

Simultaneous Transmission Summation Scenario (Hotspot SAR) – Distance: 10 mm												
Band		Main SAR	Bluetooth SAR	5 GHz MIMO WLAN SAR	2.4 GHz Ant2 WLAN SAR	2.4 GHz MIMO WLAN SAR	Σ 1-g SAR	Σ 1-g SAR	Σ 1-g SAR	Σ 1-g SAR	Σ 1-g SAR	SPLSR
		(W/kg)	(W/kg)	(W/kg)	(W/kg)	(W/kg)	(W/kg)	(W/kg)	(W/kg)	(W/kg)	(W/kg)	(Yes/No)
		1	2	3	4	5	1+2	1+3	1+2+3	1+2+4	1+5	
LTE Band 2	Rear	0.353	0.834	0.771	0.260	0.425	1.187	1.124	1.958	1.447	0.778	Yes
	Front	0.467	0.005	0.08	0.002	0.013	0.472	0.547	0.552	0.474	0.480	No
	Left	0.266	0.048	0.56	0.004	0.031	0.314	0.826	0.874	0.318	0.297	No
	Right						0.000	0.000	0.000	0.000	0.000	No
	Top		0.025	0.469	0.000	0.000	0.025	0.469	0.494	0.025	0.000	No
	Bottom	0.671					0.671	0.671	0.671	0.671	0.671	No
LTE Band 12	Rear	0.660	0.834	0.771	0.260	0.425	1.494	1.431	2.265	1.754	1.085	Yes
	Front	0.248	0.005	0.08	0.002	0.013	0.253	0.328	0.333	0.255	0.261	No
	Left	0.108	0.048	0.56	0.004	0.031	0.156	0.668	0.716	0.160	0.139	No
	Right	0.201					0.201	0.201	0.201	0.201	0.201	No
	Top		0.025	0.469	0.000	0.000	0.025	0.469	0.494	0.025	0.000	No
	Bottom	0.181					0.181	0.181	0.181	0.181	0.181	No
LTE Band 26	Rear	0.799	0.834	0.771	0.260	0.425	1.633	1.570	2.404	1.893	1.224	Yes
	Front	0.341	0.005	0.08	0.002	0.013	0.346	0.421	0.426	0.348	0.354	No
	Left	0.202	0.048	0.56	0.004	0.031	0.250	0.762	0.810	0.254	0.233	No
	Right	0.324					0.324	0.324	0.324	0.324	0.324	No
	Top		0.025	0.469	0.000	0.000	0.025	0.469	0.494	0.025	0.000	No
	Bottom	0.440					0.440	0.440	0.440	0.440	0.440	No
LTE Band 41	Rear	0.783	0.834	0.771	0.260	0.425	1.617	1.554	2.388	1.877	1.208	Yes
	Front	0.888	0.005	0.08	0.002	0.013	0.893	0.968	0.973	0.895	0.901	No
	Left	0.294	0.048	0.56	0.004	0.031	0.342	0.854	0.902	0.346	0.325	No
	Right						0.000	0.000	0.000	0.000	0.000	No
	Top		0.025	0.469	0.000	0.000	0.025	0.469	0.494	0.025	0.000	No
	Bottom	0.758					0.758	0.758	0.758	0.758	0.758	No
LTE Band 66	Rear	0.385	0.834	0.771	0.260	0.425	1.219	1.156	1.990	1.479	0.810	Yes
	Front	0.423	0.005	0.08	0.002	0.013	0.428	0.503	0.508	0.430	0.436	No
	Left	0.212	0.048	0.56	0.004	0.031	0.260	0.772	0.820	0.264	0.243	No
	Right						0.000	0.000	0.000	0.000	0.000	No
	Top		0.025	0.469	0.000	0.000	0.025	0.469	0.494	0.025	0.000	No
	Bottom	0.493					0.493	0.493	0.493	0.493	0.493	No

14.4 Phablet SAR Simultaneous Transmission Analysis.

Simultaneous Transmission Summation Scenario (Phablet SAR)							
Band		WWAN SAR (10g)	5 GHz WLAN SAR (10g)	6 GHz WLAN SAR (10g)	Σ 10-g SAR	Σ 10-g SAR	SPLSR
		(W/kg)	(W/kg)	(W/kg)	(W/kg)	(W/kg)	(Yes/No)
		1	2	3	1+2	1+3	
LTE Band 2	Rear	1.323	2.468	0.216	3.791	1.539	No
	Front	2.530	0.327	0.017	2.857	2.547	No
	Left	1.335	0.970	0.072	2.305	1.407	No
	Right				0.000	0.000	No
	Top		0.373	0.028	0.373	0.028	No
	Bottom	1.404			1.404	1.404	No

14.5 SAR to Peak Location Separation Ratio (SPLSR)

FCC KDB 447498 D01v06 General RF Exposure Guidance introduces a new formula for calculating the SAR a Peak Location Separation Ratio(SPLSR) between pairs of simultaneously transmitting antennas:

$$SPLSR_i = (SAR_1 + SAR_2)^{1.5} / R_i$$

Where:

SAR₁ is the highest measured or estimated SAR for the first of a pair of simultaneous transmitting antennas, in a specific test operating mode and exposure condition

SAR₂ is the highest measured or estimated SAR for the second of a pair of simultaneous transmitting antennas, in the same test operating mode and exposure condition as the first

R_i is the separation distance between the pair of simultaneous transmitting antennas, When the SAR is measured, for both antennas in the pair, it is determined by the actual x, y and z coordinates in the 1-g SAR for each SAR peak location, based on the extrapolated and interpolated result in the zoom scan measurement, using the formula of $[(X_1 - X_2)^2 + (Y_1 - Y_2)^2 + (Z_1 - Z_2)^2]$

In order for a pair of simultaneous transmitting antennas with the sum 1-g of SAR > 1.6 W/kg and with the sum 10-g of SAR > 4 W/Kg to qualify for exemption from Simultaneous Transmission SAR measurements, it has to satisfy the condition of:

$$(SAR_1 + SAR_2)^{1.5} / R_i \leq 0.04 \text{ for 1g SAR and } (SAR_1 + SAR_2)^{1.5} / R_i \leq 0.1 \text{ for 10g SAR}$$

SPLSR Evaluation

Mode/Band	X(mm)	Y(mm)	Z(mm)	Reported SAR [W/kg]
GSM 850	-0.0365	-0.087	-0.205	0.448
GSM 1900	0.004	-0.072	-0.204	0.296
UMTS Band 5	-0.0295	-0.0855	-0.208	0.910
UMTS Band 4	0.0025	-0.077	-0.204	0.350
UMTS Band 2	0.001	-0.077	-0.204	0.365
LTE Band 2	0.016	-0.0735	-0.205	0.353
LTE Band 12	-0.0365	-0.085	-0.206	0.660
LTE Band 26	-0.038	-0.0835	-0.206	0.799
LTE Band 41	0.0142	-0.0784	-0.205	0.783
LTE Band 66	0.0175	-0.0735	-0.205	0.385
2.4G Ant.2 WLAN	0.0022	0.0456	-0.206	0.260
2.4G MIMO WLAN	-0.0062	0.0496	-0.206	0.425
5G MIMO WLAN	0.012	0.074	-0.206	0.771
Bluetooth	-0.0038	0.0504	-0.206	0.834

Postion	Max Mode		Sum 1g SAR	Peak SAR Separation Distance	SPLSR	Plot No.
			[W/kg]			
	1	2	1+2	[mm]		
Rear	UMTS Band 5	Bluetooth	1.744	138.32	0.016	#1
Rear	UMTS Band 5	5GHz MIMO WLAN	1.681	164.82	0.013	#2
Rear	LTE Band 26	Bluetooth	1.633	138.20	0.015	#3
Rear	LTE Band 41	Bluetooth	1.617	130.06	0.015	#4

Postion	Max Mode			Sum 1g SAR	1+2 Peak SAR Separation	1+3 Peak SAR Separation	2+3 Peak SAR Separation	SPLSR			Hybrid SPLSR
				[W/kg]	Distance	Distance	Distance				
	1	2	3	1+2+3	[mm]	[mm]	[mm]	1+2	1+3	2+3	
Rear	GSM 850	Bluetooth	5GHz MIMO WLAN	2.053	141.240	145.710	15.800	0.010	0.009	0.121	Yes
	GSM 1900			1.907	122.660	122.680	15.800	0.009	0.009	0.121	Yes
	UMTS Band 5			2.515	138.320	142.100	15.800	0.016	0.015	0.121	Yes
	UMTS Band 4			1.955	127.570	127.770	15.800	0.009	0.009	0.121	Yes
	UMTS Band 2			1.970	127.510	127.890	15.800	0.009	0.009	0.121	Yes
	LTE Band 2			1.958	125.480	123.970	15.800	0.009	0.009	0.121	Yes
	LTE Band 12			2.265	125.720	124.030	15.800	0.014	0.014	0.121	Yes
	LTE Band 26			2.404	138.200	142.930	15.800	0.014	0.014	0.121	Yes
	LTE Band 41			2.388	130.060	128.820	15.800	0.015	0.015	0.121	Yes
	LTE Band 66			1.990	125.720	124.030	15.800	0.010	0.010	0.121	Yes
	UMTS Band 5	Bluetooth	2.4G Ant.2 WLAN	2.004	138.320	134.890	7.683	0.016	0.009	0.136	Yes
	LTE Band 12			1.754	139.290	136.210	7.683	0.012	0.006	0.136	Yes
	LTE Band 26			1.836	138.200	135.210	7.683	0.014	0.008	0.136	Yes
	LTE Band 41			1.877	130.050	124.580	7.683	0.015	0.009	0.136	Yes

SPLSR Combination

This Procedure can only be applied when simultaneous transmission SAR is $> 1.6 \text{ W/kg}$, it does not meet SPLSR criteria, and antenna pair is co-located

Test Procedure:

1.Perform enlarged zoom scan/volume scan on the co-located antenna pair to determine 1g aggregate SAR:

Enlarged zoom Scan/Volume scan Result Body

Configuration	Band	Measured SAR	Volume SAR	Scaled factor	Combined 1g SAR(W/kg)	Plot No.
5GHz MIMO WLAN+ Bluetooth	5GHz MIMO WLAN	0.509	0.381	1.515	1.22	#5
	Bluetooth	0.578	0.739	1.443		
2.4GHz Ant 2 WLAN+ Bluetooth	2.4GHz Ant 2 WLAN	0.186	0.181	1.397	1.20	#6
	Bluetooth	0.578	0.739	1.443		

2. Apply SPLSR procedure for the spatially separated antenna and aggregate SAR distribution of the co-located antenna pair

-The Peak location of aggregate SAR distribution Body

Mode/Band	X(mm)	Y(mm)	Z(mm)
5G MIMO WLAN + Bluetooth	-6	51	-207
2.4G Ant 2 WLAN + Bluetooth	-2	49	-207


3. Hybrid Volume SAR Simultaneous

Postion	Max Mode		Sum 1g SAR	Hybrid SPLSR
			[W/kg]	
	1	2	1+2	
Rear	GSM 850	5GHz MIMO WLAN + Bluetooth	1.668	Yes
	GSM 1900		1.522	NO
	UMTS Band 5		2.130	Yes
	UMTS Band 4		1.570	NO
	UMTS Band 2		1.585	NO
	LTE Band 2		1.573	NO
	LTE Band 12		1.880	Yes
	LTE Band 26		2.019	Yes
	LTE Band 41		2.003	Yes
	LTE Band 66		1.605	Yes
	UMTS Band 5	2.4G Ant.2 WLAN + Bluetooth	2.110	Yes
	LTE Band 12		1.860	Yes
	LTE Band 26		1.999	Yes
	LTE Band 41		1.983	Yes


Postion	Max Mode		Sum 1g SAR	1+2 Peak SAR Separation Distance	SPLSR	Plot
			[W/kg]			
	1	2	1+2	[mm]	1+2	
Rear	GSM 850	5GHz MIMO WLAN + Bluetooth	1.668	141.340	0.015	#7
	UMTS Band 5		2.130	138.520	0.022	#8
	LTE Band 12		1.880	139.380	0.018	#9
	LTE Band 26		2.019	138.260	0.021	#10
	LTE Band 41		2.003	130.980	0.022	#11
	LTE Band 66		1.605	126.710	0.016	#12
	UMTS Band 5	2.4G Ant.2 WLAN + Bluetooth	2.110	137.890	0.022	#13
	LTE Band 12		1.860	138.370	0.018	#14
	LTE Band 26		1.999	137.310	0.021	#15
	LTE Band 41		1.983	128.440	0.022	#16

SPLSR Plot


#1 UMTS Band 5 + Bluetooth

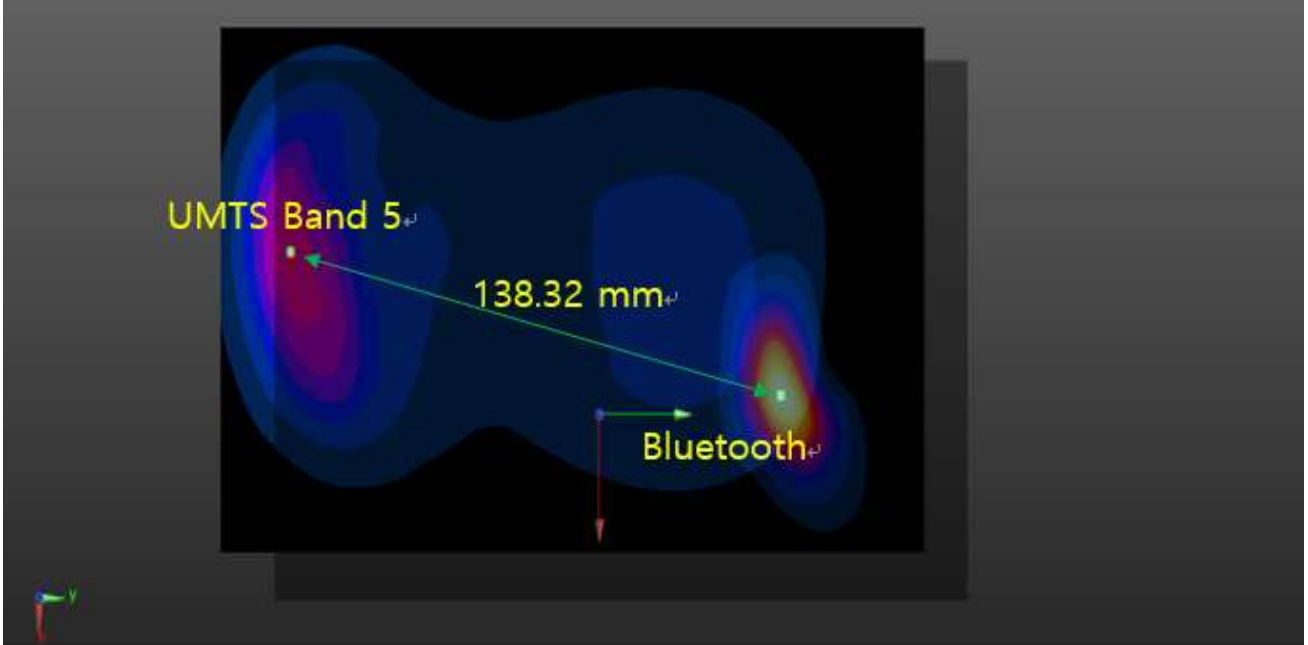


#2 UMTS Band 5 + 5GHz MIMO WLAN


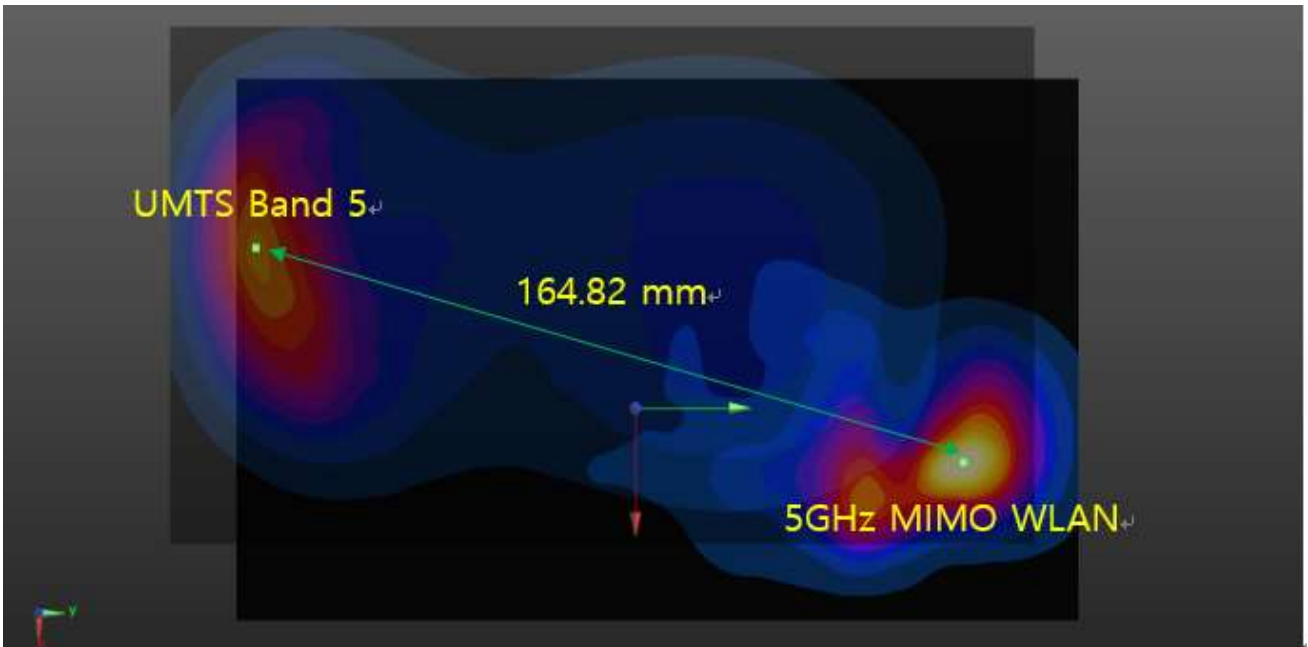


#3 LTE Band 26 + Bluetooth

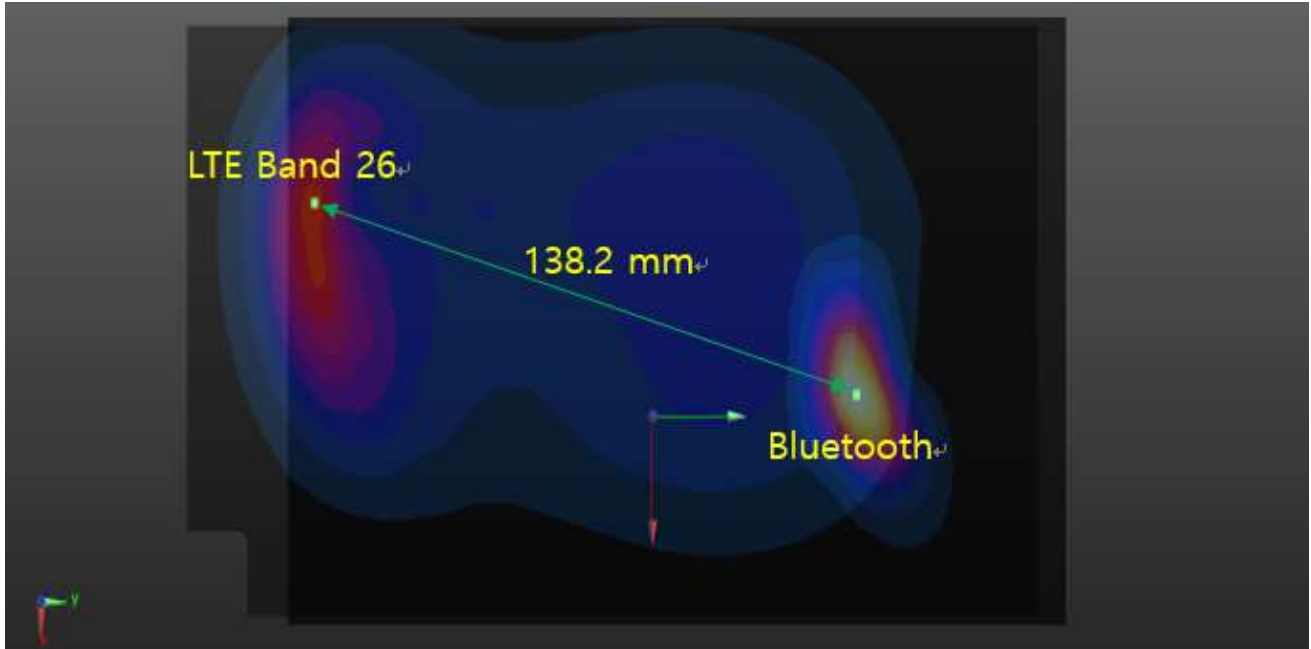


#4 LTE Band 41 + Bluetooth

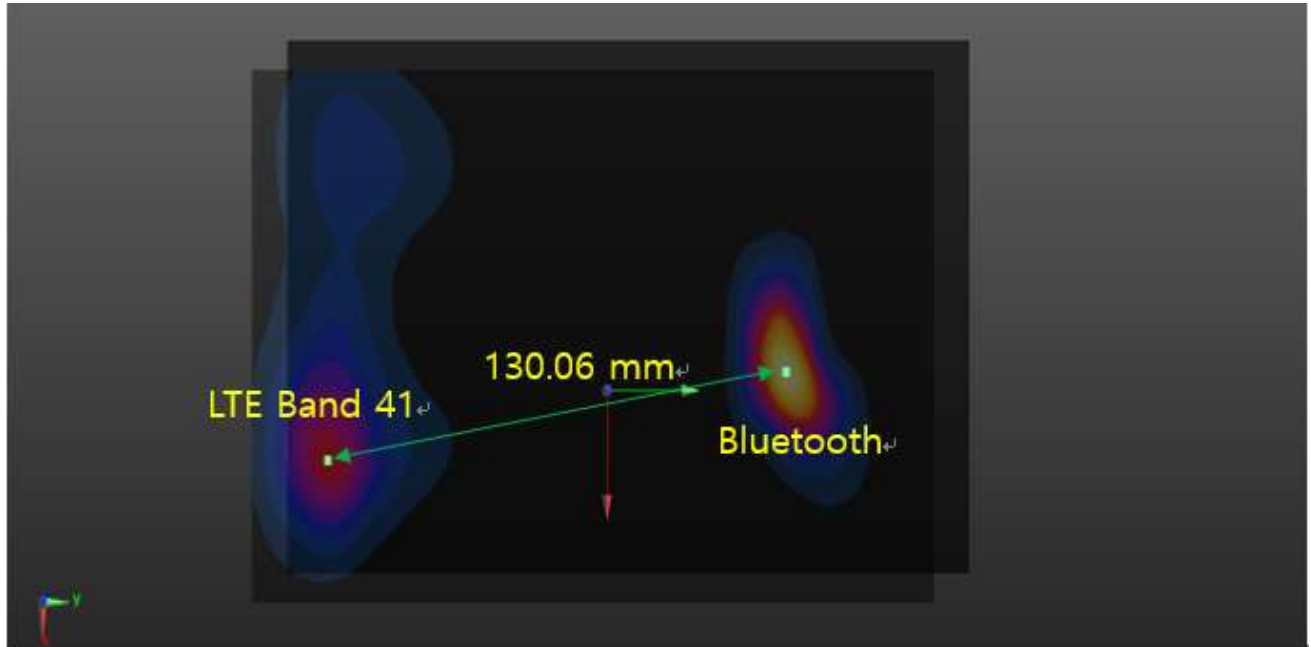

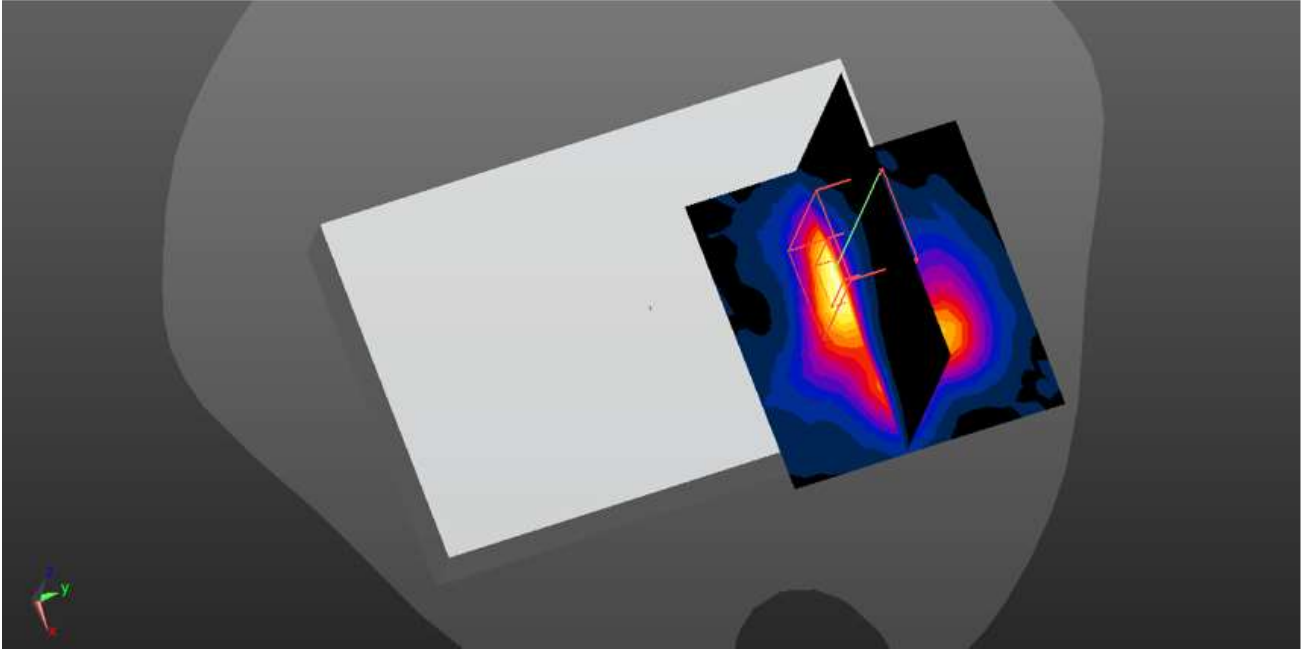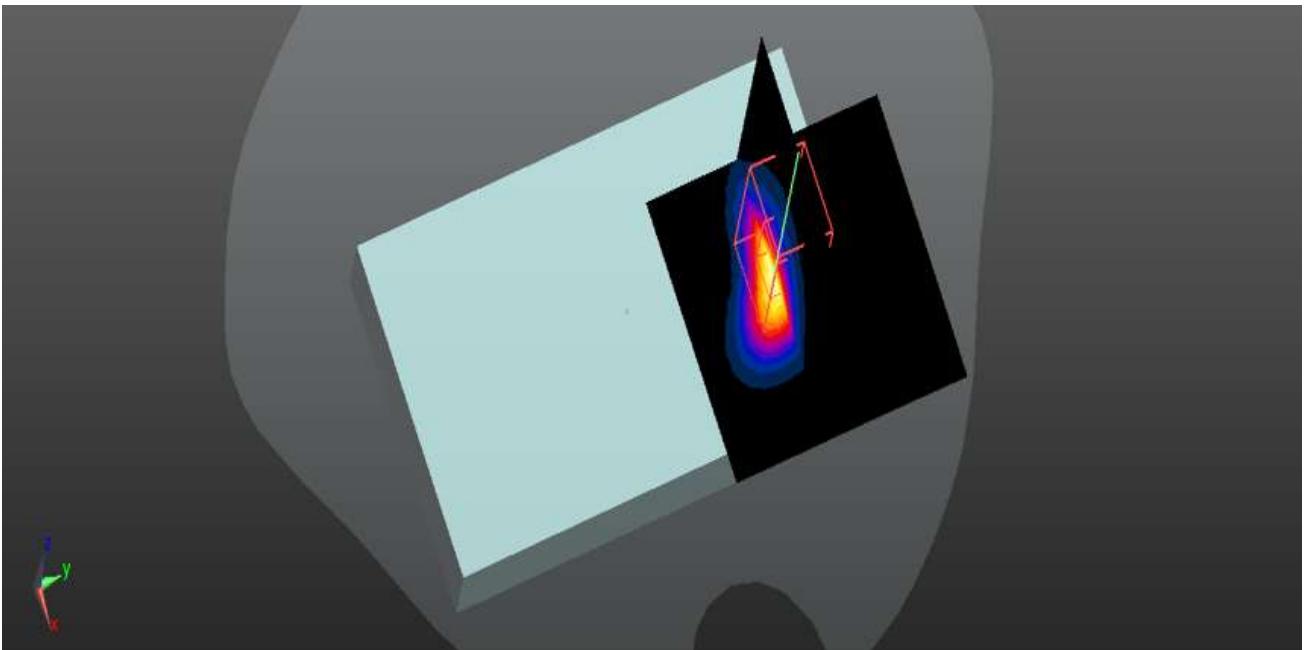
#5 Bluetooth + 5GHz MIMO WLAN**#6 Bluetooth + 2.4G Ant.2 WLAN**


#7 GSM 850 + 5GHz MIMO WLAN + Bluetooth

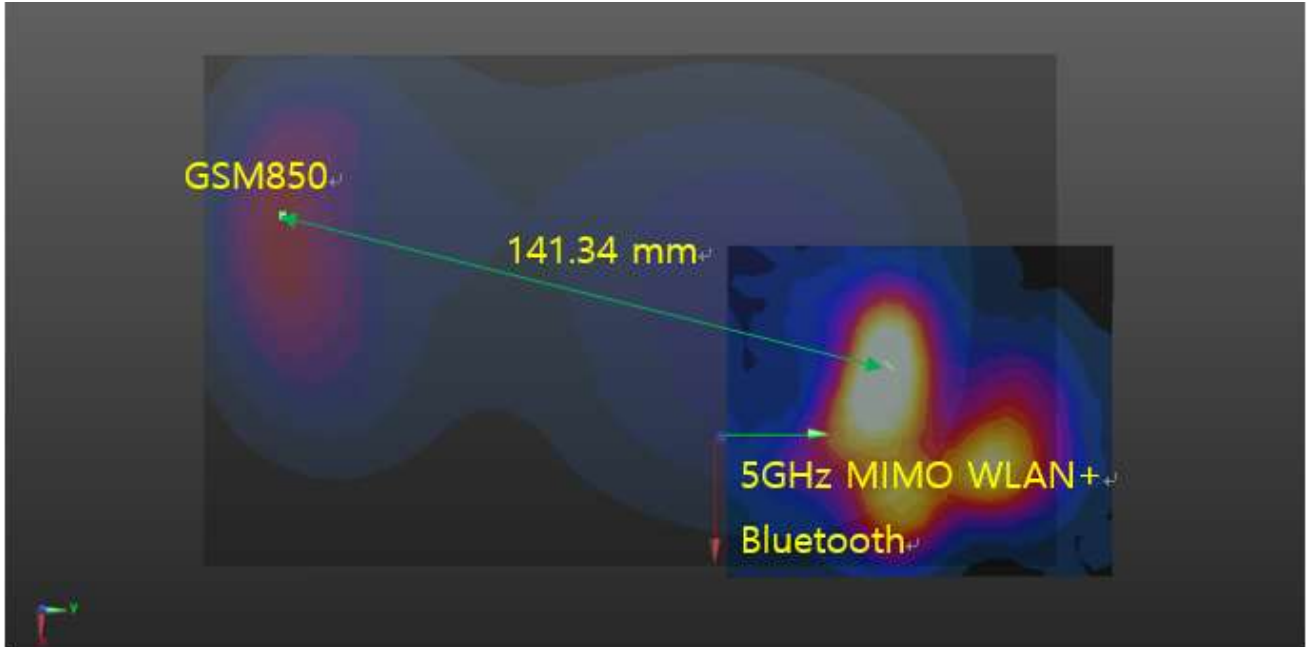


#8 UMTS Band 5 + 5GHz MIMO WLAN + Bluetooth

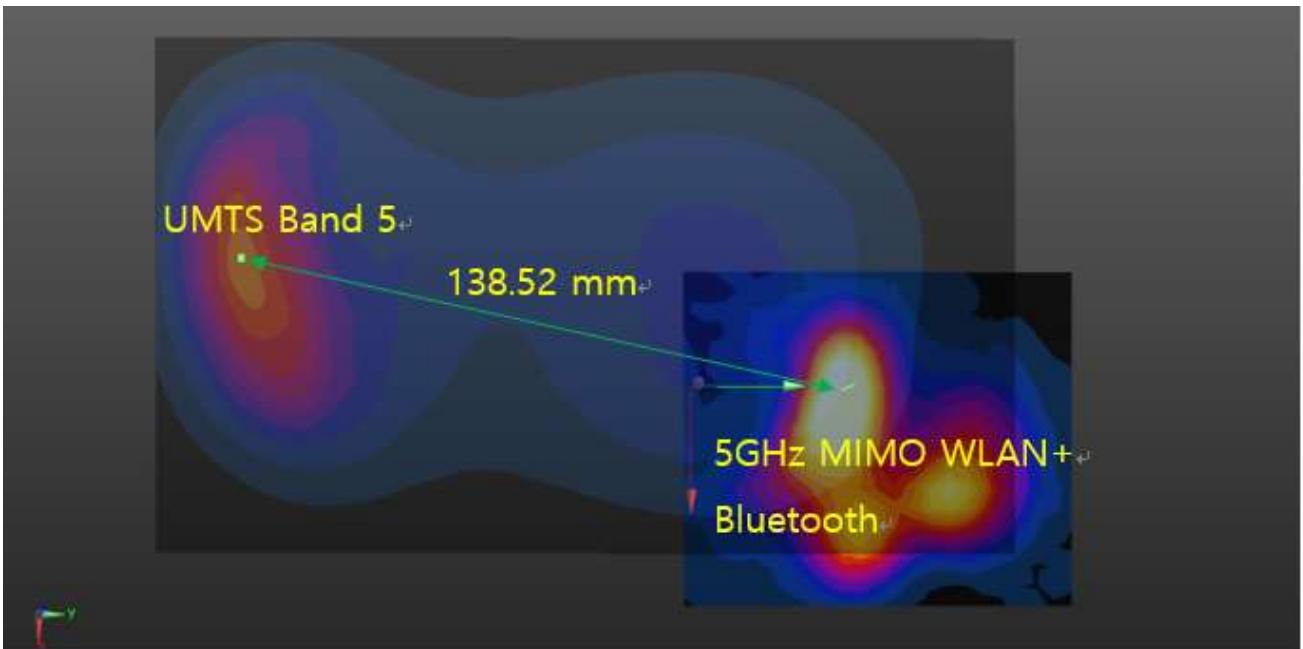


#9 LTE Band 12 + 5GHz MIMO WLAN + Bluetooth

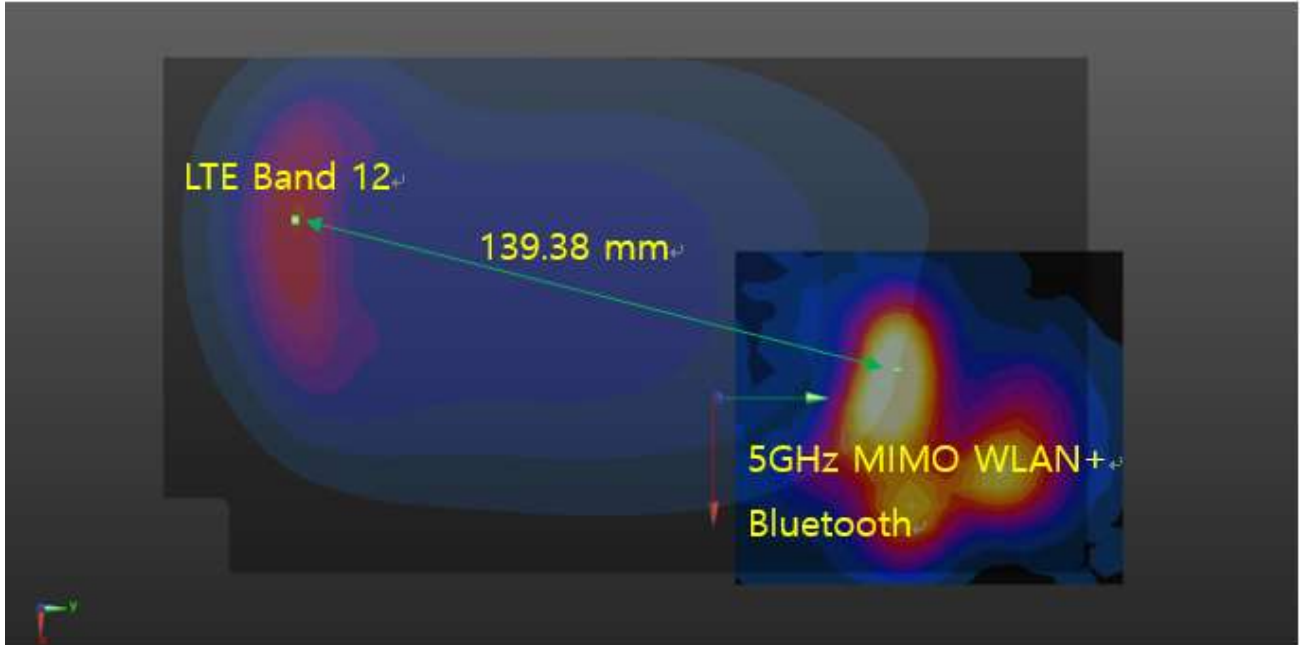


#10 LTE Band 26 + 5GHz MIMO WLAN + Bluetooth

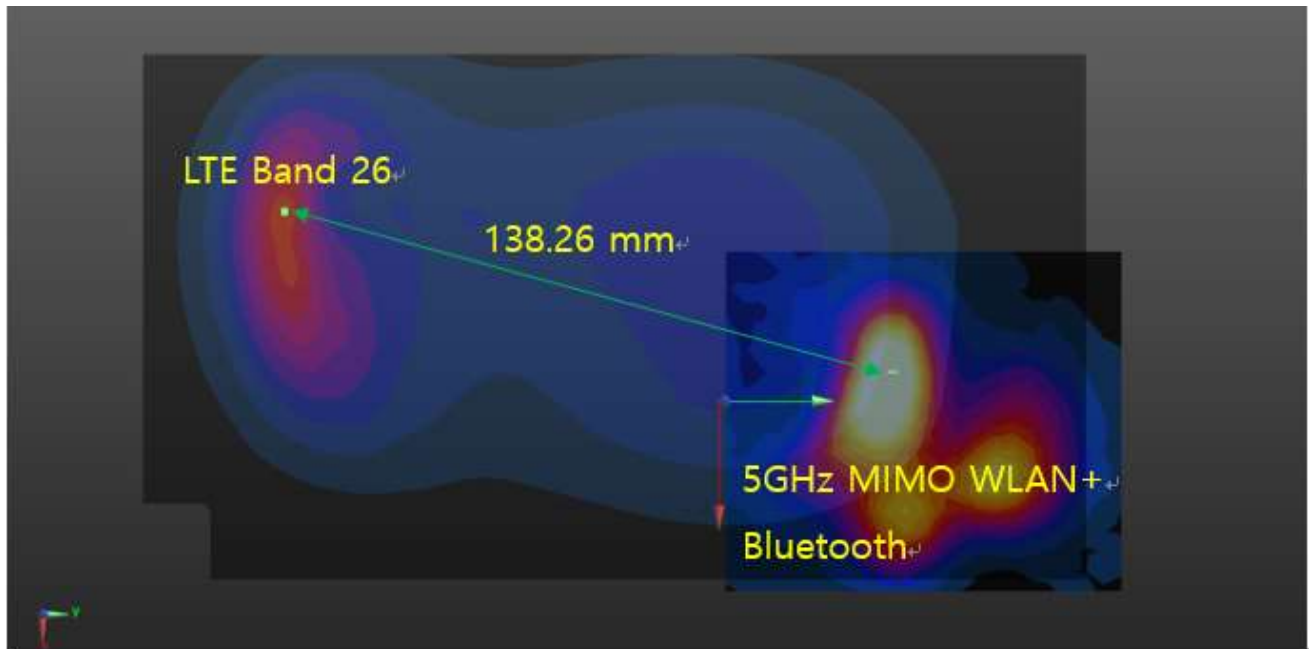


#11 LTE Band 41 + 5GHz MIMO WLAN + Bluetooth

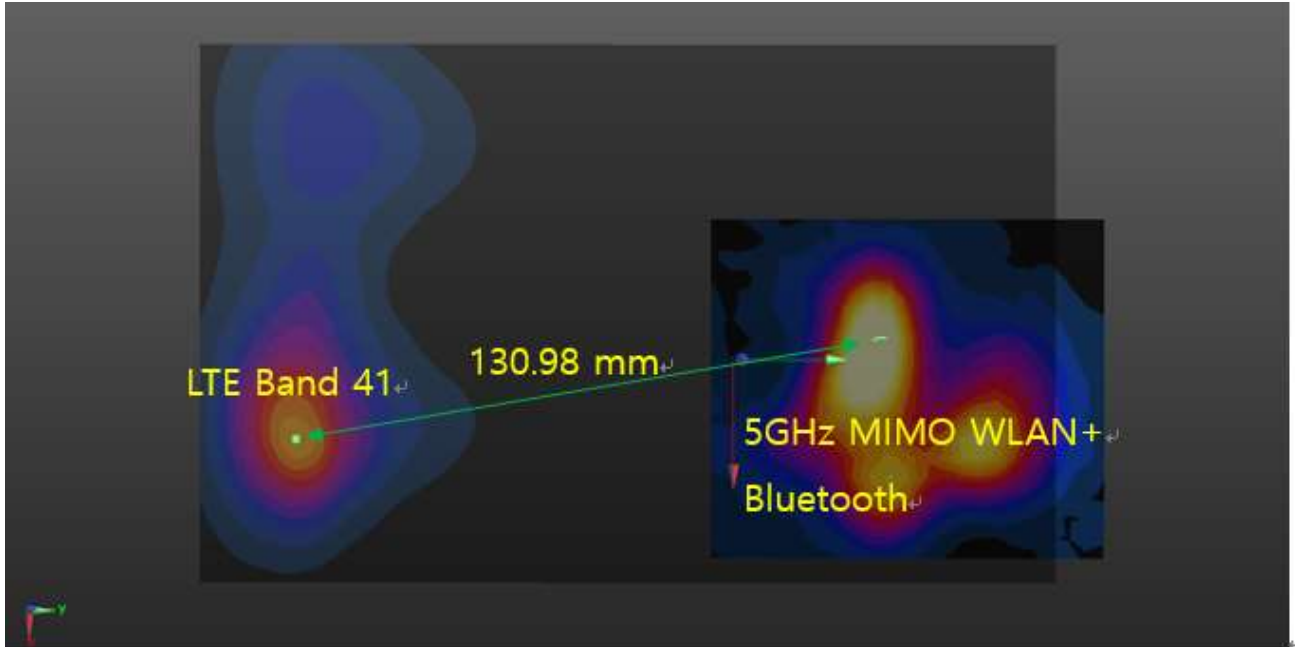


#12 LTE Band 66 + 5GHz MIMO WLAN + Bluetooth

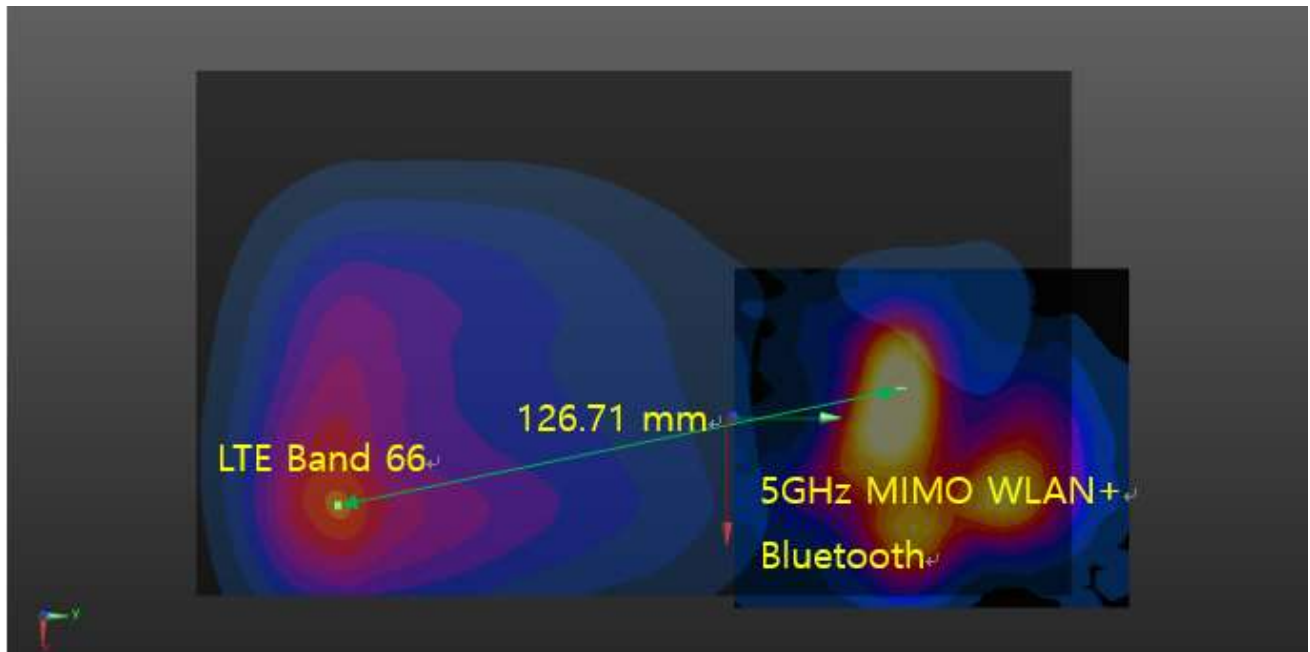


#13 UMTS Band 5 + 2.4G Ant.2 WLAN + Bluetooth

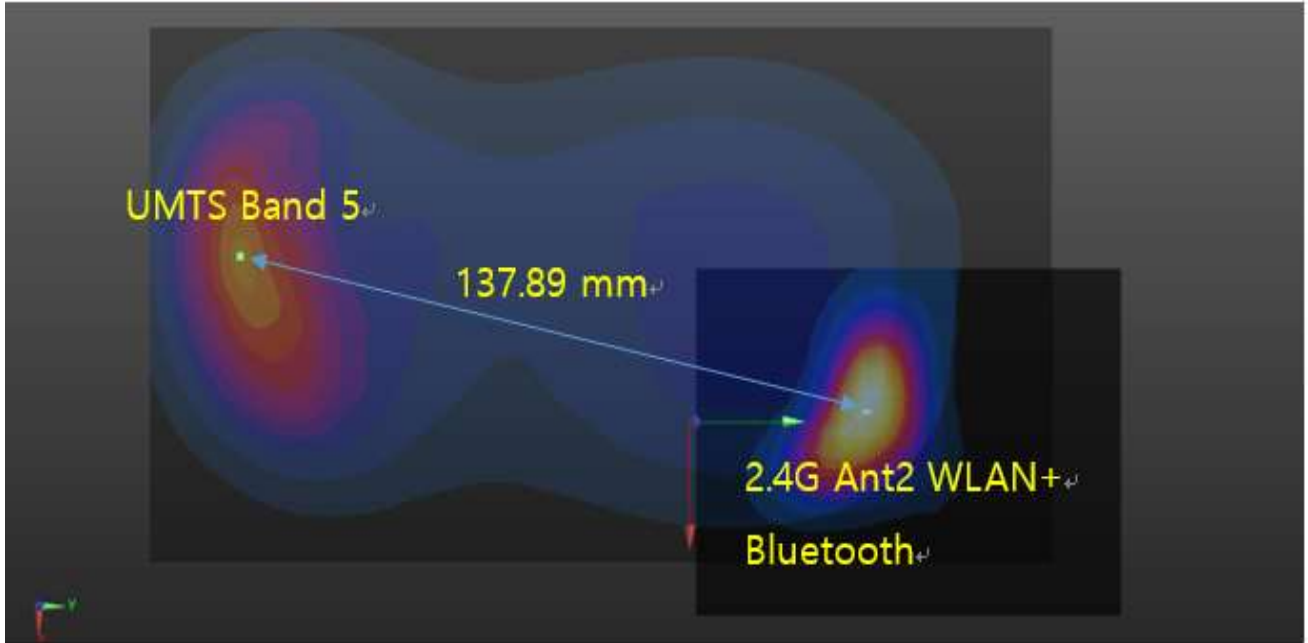


#14 LTE Band 12 + 2.4G Ant.2 WLAN + Bluetooth

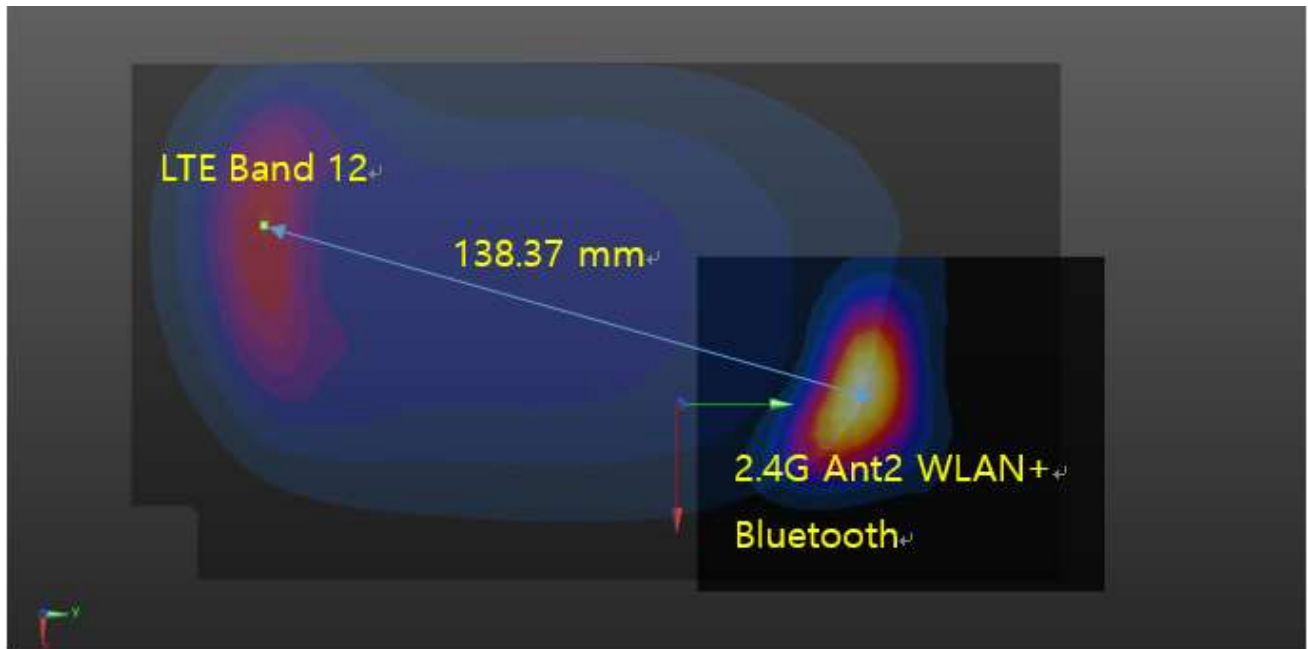

#15 LTE Band 26 + 2.4G Ant.2 WLAN + Bluetooth

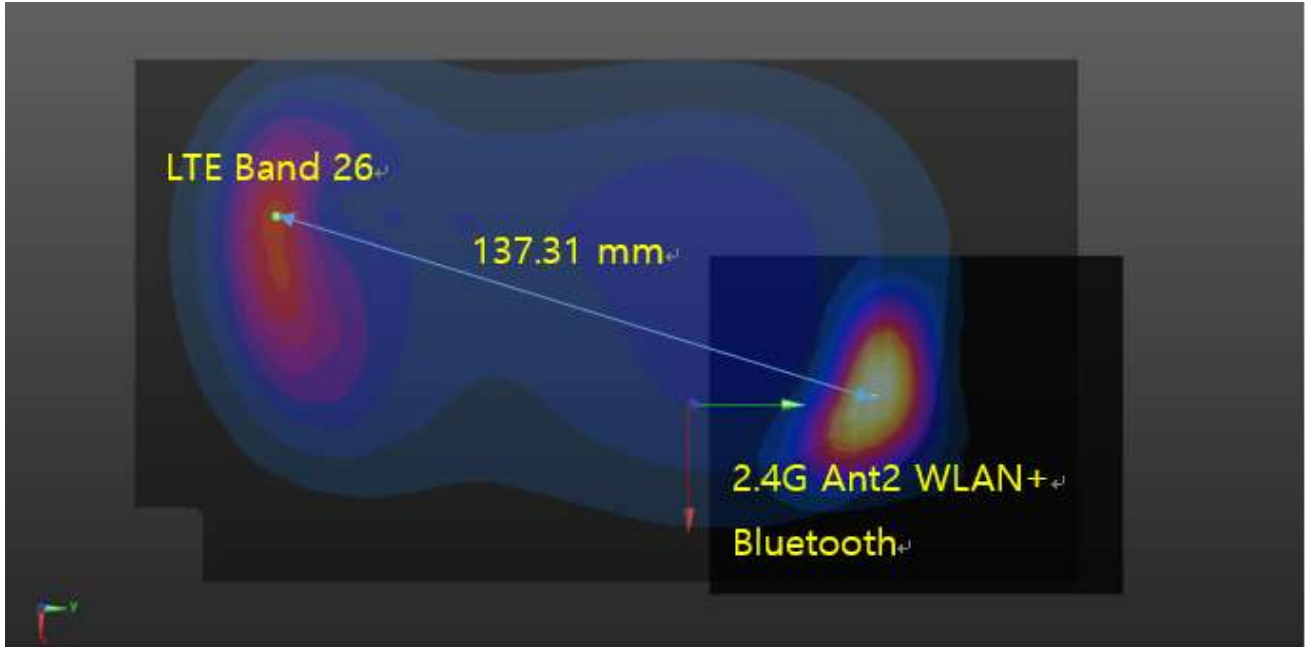

#16 LTE Band 41 + 2.4G Ant.2 WLAN + Bluetooth

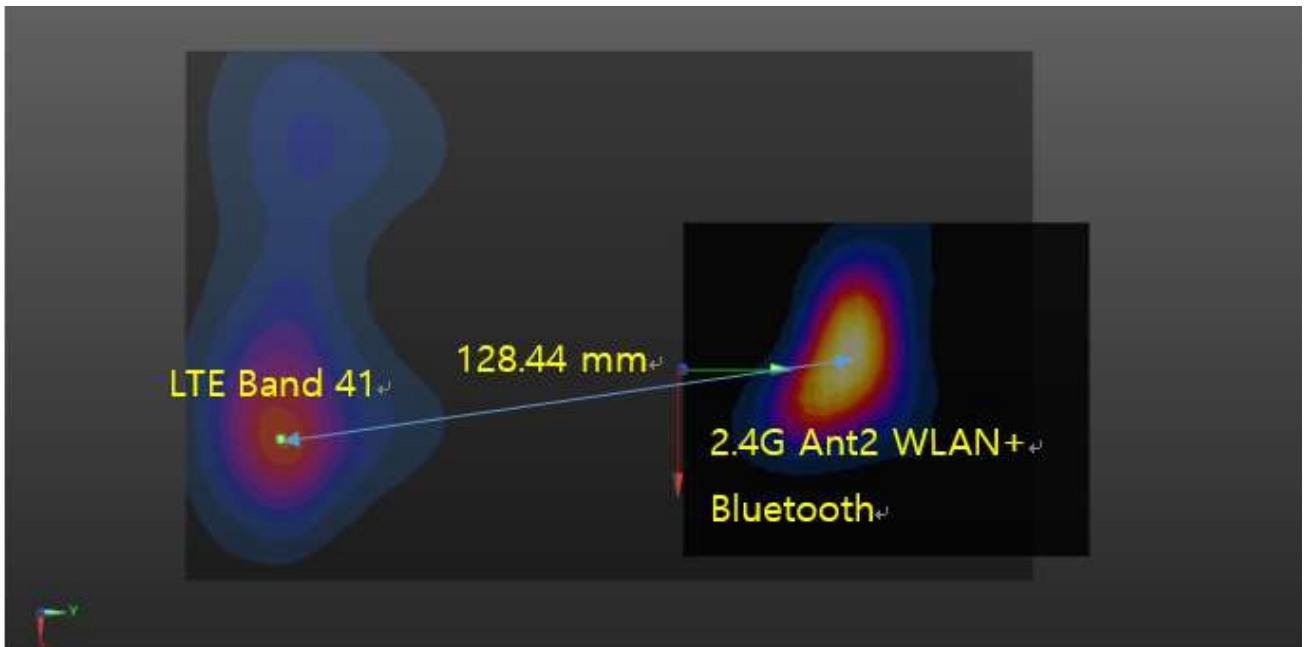

14.6 Simultaneous Transmission Conclusion

The above numerical summed SAR Results are sufficient to determine that simultaneous transmission cases will not exceed the SAR Limit and therefore measured volumetric simultaneous SAR summation is required per FCC KDB Publication 447498 D01v06 and IEEE1528-2013.

15. SAR Measurement Variability and Uncertainty

In accordance with KDB procedure 865664 D01v01r04 SAR measurement 100 MHz to 6 GHz, SAR additional measurements are repeated after the completion of all measurements requiring the same head or body tissue-equivalent medium in a frequency Band. The test device should be returned to ambient conditions (normal room temperature) with the battery fully charged before it is re-mounted on the device holder for the repeated measurement(s) to minimize any unexpected variations in the repeated results.

SAR Measurement variability was assessed using the following procedures for each frequency Band:

- 1) Repeated measurement is not required when the original highest measured SAR is < 0.80 W/kg for 1g SAR or < 2.0 W/kg for 10g SAR; steps 2) through 4) do not apply.
- 2) When the original highest measured 1g SAR is ≥ 0.80 W/kg or 10g SAR ≥ 2.0 W/kg, repeat that measurement once.
- 3) Perform a second repeated measurement only if the ratio of largest to smallest SAR for the original and first repeated measurements is > 1.20 or when the original or repeated measurement is ≥ 1.45 W/kg for 1g SAR or ≥ 3.625 W/kg for 10g SAR ($\sim 10\%$ from the 1-g SAR limit).
- 4) Perform a third repeated measurement only if the original, first or second repeated measurement is ≥ 1.5 W/kg for 1g SAR or ≥ 3.75 W/kg for 10g SAR and the ratio of largest to smallest SAR for the original, first and second repeated measurements is > 1.20 .

SAR measurement variability Results

Frequency		Mode/Band	Configuration	Measured SAR (W/kg)	Repeated SAR (W/kg)	SAR Ratio
MHz	Channel					
1880.0	9400	UMTS Band 2 Hotspot	Rear	0.918	0.888	1.03

16. Measurement Uncertainty

The measured SAR was <1.5 W/Kg for 1g SAR and <3.75 W/Kg For 10g SAR for all frequency Bands. Therefore, per KDB Publication 865664 D01v01r04, the extended measurement uncertainty analysis per IEEE1528-2013 was not required.

17. SAR Test Equipment

Manufacturer	Type / Model	S/N	Calib. Date	Calib.Interval	Calib.Due
SPEAG	SAM Phantom	-	N/A	N/A	N/A
Staubli	CS8Cspeag-TX90	F12/5K9GA1/C/01	N/A	N/A	N/A
Staubli	CS8Cspeag-TX60	F/20/0018446/C/001	N/A	N/A	N/A
Staubli	CS8Cspeag-TX90	F13/5R4XF1/C/01	N/A	N/A	N/A
Staubli	CS8Cspeag-TX90	F13/5SD0A1/C/01	N/A	N/A	N/A
Staubli	TX90 XLspeag	F12/5K9GA1/A/01	N/A	N/A	N/A
Staubli	TX60 Lspeag	F/20/0018446/A/001	N/A	N/A	N/A
Staubli	TX90 XLspeag	F13/5R4XF1/A/01	N/A	N/A	N/A
Staubli	TX90 Xlspeag	F13/5SD0A1/A/01	N/A	N/A	N/A
Staubli	Teach Pendant (Joystick) D2114210603	S-1206 0513	N/A	N/A	N/A
Staubli	Teach Pendant (Joystick) D21142608A	020885	N/A	N/A	N/A
Staubli	Teach Pendant (Joystick)D21142605	S-1338 1332	N/A	N/A	N/A
Staubli	Teach Pendant (Joystick)D21142605	001729	N/A	N/A	N/A
TESTO	175-H1/Thermometer	40331939309	01/04/2022	Annual	01/04/2023
TESTO	175-H1/Thermometer	44606559906	04/15/2022	Annual	04/15/2023
TESTO	175-H1/Thermometer	40332651310	01/04/2022	Annual	01/04/2023
TESTO	608-H1/Thermometer	83348029	05/06/2021	Annual	05/06/2022
SPEAG	DAE4	1629	07/26/2021	Annual	07/26/2022
SPEAG	DAE4	1686	06/21/2021	Annual	06/21/2022
SPEAG	DAE4	648	06/02/2021	Annual	06/02/2022
SPEAG	DAE4	1422	05/19/2021	Annual	05/19/2022
SPEAG	E-Field Probe ES3DV3	3076	07/28/2021	Annual	07/28/2022
SPEAG	E-Field Probe EX3DV4	7309	04/20/2021	Annual	04/20/2022
SPEAG	E-Field Probe EX3DV4	3972	05/21/2021	Annual	05/21/2022
SPEAG	E-Field Probe EX3DV4	7370	08/26/2021	Annual	08/26/2022
SPEAG	E-Field Probe EX3DV4	7702	01/20/2022	Annual	01/20/2023
SPEAG	Dipole D750V3	1014	06/01/2021	Annual	06/01/2022
SPEAG	Dipole D835V2	4d165	08/03/2021	Annual	08/03/2022
SPEAG	Dipole D1800V2	2d015	07/30/2021	Annual	07/30/2022
SPEAG	Dipole D1900V2	5d032	01/28/2022	Annual	01/28/2023
SPEAG	Dipole D2450V2	965	06/15/2021	Annual	06/15/2022
SPEAG	Dipole D2600V2	1106	07/30/2021	Annual	07/30/2022
SPEAG	Dipole D5GHzV2	1107	07/22/2021	Annual	07/22/2022
Agilent	Power Meter E4419B	MY40330223	10/06/2021	Annual	10/06/2022
Agilent	Power Sensor 8481A	SG1091286	10/06/2021	Annual	10/06/2022
Agilent	Power Sensor 8481A	MY41090675	10/06/2021	Annual	10/06/2022
SPEAG	DAKS 3.5	1038	03/28/2022	Annual	03/28/2023
H.P	Network Analyzer /8753ES	JP39240221	01/05/2022	Annual	01/05/2023
Agilent	WIRELESS COMMUNICATION E5515C	MY48360252	07/23/2021	Annual	07/23/2022
R&S	Wireless Communication Test Set CMW500	115733	04/14/2022	Annual	04/14/2023
Agilent	Signal Generator N5182A	MY47070230	05/10/2021	Annual	05/10/2022
Agilent	11636B/Power Divider	58698	02/24/2022	Annual	02/24/2023
OSI	Power Divider	#1	06/24/2021	Annual	06/24/2022
OSI	Power Divider	#2	06/24/2021	Annual	06/24/2022
OSI	Power Divider	#3	06/24/2021	Annual	06/24/2022
OSI	Power Divider	#4	06/24/2021	Annual	06/24/2022
EMPOWER	RF Power Amplifier	1084	06/25/2021	Annual	06/25/2022
EMPOWER	RF Power Amplifier	1011	10/06/2021	Annual	10/06/2022
MICRO LAB	LP Filter / LA-15N	10453	10/06/2021	Annual	10/06/2022
MICRO LAB	LP Filter / LA-30N	-	10/06/2021	Annual	10/06/2022
MICRO LAB	LP Filter / LA-60N	32011	10/06/2021	Annual	10/06/2022
HP	Attenuator (3dB) 333340A	02427	09/06/2021	Annual	09/06/2022
HP	Attenuator (20dB) 8493C	09271	09/06/2021	Annual	09/17/2022
Agilent	Directional Bridge 86205A	3140A03878	05/28/2021	Annual	05/28/2022
Agilent	MXA Signal Analyzer N9020A	MY50510407	10/22/2021	Annual	10/22/2022

Manufacturer	Type / Model	S/N	Calib. Date	Calib.Interval	Calib.Due
ROHDE&SCHWARZ	BLUETOOTH TESTER CBT	100272	02/08/2022	Annual	02/08/2023
Anritsu	Radio Communication Tester MT8820C	6201074225	02/24/2022	Annual	02/24/2023
Anritsu	Radio Communication Tester MT8821C	6201502997	07/08/2021	Annual	07/08/2022
Anritsu	Radio Communication Tester MT8821C	6262044720	12/20/2021	Annual	12/20/2022

* The E-field probe was calibrated by SPEAG, by the waveguide technique procedure. Dipole Verification measurement is performed by HCT Lab. before each test. The brain/body simulating material is calibrated by HCT using the DAKS 3.5 to determine the conductivity and permittivity (dielectric constant) of the brain/body-equivalent material.

18. Conclusion

The SAR measurement indicates that the EUT complies with the RF radiation exposure limits of the ANSI/IEEE C95.1 - 2005.

These measurements were taken to simulate the RF effects exposure under worst-case conditions. Precise laboratory measures were taken to assure repeatability of the tests. The results and statements relate only to the item(s) tested.

Please note that the absorption and distribution of electromagnetic energy in the body are very complex phenomena that depend on the mass, shape, and size of the body, the orientation of the body with respect to the field vectors, and the electrical properties of both the body and the environment. Other variables that may play a substantial role in possible biological effects are those that characterize the environment (e.g. ambient temperature, air velocity, relative humidity, and body insulation) and those that characterize the individual (e.g. age, gender, activity level, debilitation, or disease). Because various factors may interact with one another to vary the specific biological outcome of an exposure to electromagnetic fields, any protection guide should consider maximal amplification of biological effects as a result of field-body interactions, environmental conditions, and physiological variables.

19. References

- [1] Federal Communications Commission, ET Docket 93-62, Guidelines for Evaluating the Environmental Effects of Radio frequency Radiation, Aug. 1996.
- [2] ANSI/IEEE C95.1 - 2005 , American National Standard safety levels with respect to human exposure to radio frequency electromagnetic fields, 300 kHz to 300 GHz, New York: IEEE, Sept. 1992
- [3] ANSI/IEEE C 95.1 - 2005, American National Standard safety levels with respect to human exposure to radio frequency electromagnetic fields, 3 kHz to 300 GHz, New York: IEEE, 2006
- [4] ANSI/IEEE C95.3 - 2002, IEEE Recommended Practice for the Measurement of Potentially Hazardous Electromagnetic Fields - RF and Microwave, New York: December 2002.
- [5] IEEE Standards Coordinating Committee 34 – IEEE Std. 1528-2013, IEEE Recommended Practice or Determining the Peak Spatial-Average Specific Absorption Rate (SAR) in the Human Body from Wireless Communications Devices
- [6] NCRP, National Council on Radiation Protection and Measurements, Biological Effects and Exposure Criteria for Radio Frequency Electromagnetic Fields, NCRP Report No. 86, 1986. Reprinted Feb. 1995.
- [7] T. Schmid, O. Egger, N. Kuster, Automated E-field scanning system for dosimetric assessments, IEEE Transaction on Microwave Theory and Techniques, vol. 44, Jan. 1996, pp. 105-113.
- [8] K. Pokovic, T. Schmid, N. Kuster, Robust setup for precise calibration of E-field probes in tissue simulating liquids at mobile communications frequencies, ICECOM97, Oct. 1997, pp. 120-124.
- [9] K. Pokovic, T. Schmid, and N. Kuster, E-field Probe with improved isotropy in brain simulating liquids, Proceedings of the ELMAR, Zadar, Croatia, June 23-25, 1996, pp. 172-175.
- [10] Schmid& Partner Engineering AG, Application Note: Data Storage and Evaluation, June 1998, p2.
- [11] V. Hombach, K. Meier, M. Burkhardt, E. Kuhn, N. Kuster, The Dependence of EM Energy Absorption upon Human Head Modeling at 900 MHz, IEEE Transaction on Microwave Theory and Techniques, vol. 44 no. 10, Oct. 1996, pp. 1865-1873.
- [12] N. Kuster and Q. Balzano, Energy absorption mechanism by biological bodies in the near field of dipole antennas above 300 MHz, IEEE Transaction on Vehicular Technology, vol. 41, no. 1, Feb. 1992, pp. 17-23.
- [13] G. Hartsgrrove, A. Kraszewski, A. Surowiec, Simulated Biological Materials for Electromagnetic Radiation Absorption Studies, University of Ottawa, Bioelectro magnetics, Canada: 1987, pp. 29-36.
- [14] Q. Balzano, O. Garay, T. Manning Jr., Electromagnetic Energy Exposure of Simulated Users of Portable Cellular Telephones, IEEE Transactions on Vehicular Technology, vol. 44, no.3, Aug. 1995.
- [15] W. Gander, Computer mathematick, Birkhaeuser, Basel, 1992.
- [16] W.H. Press, S.A. Teukolsky, W.T. Vetterling, and B.P. Flannery, Numerical Recepies in C, The Art of Scientific Computing, Second edition, Cambridge University Press, 1992.
- [17] N. Kuster, R. Kastle, T. Schmid, Dosimetric evaluation of mobile communications equipment with known precision, IEEE Transaction on Communications, vol. E80-B, no. 5, May 1997, pp. 645-652.
- [18] CENELEC CLC/SC111B, European Prestandard (prENV 50166-2), Human Exposure to Electromagnetic Fields High-frequency: 10 kHz-300 GHz, Jan. 1995.
- [19] Prof. Dr. Niels Kuster, ETH, EidgenØssische Technische Hochschule ZØrich, Dosimetric Evaluation of the Cellular Phone.
- [20] IEC 62209-1, Human exposure to radio frequency fields from hand-held and body-mounted wireless communication devices – Human models, instrumentation and procedures – Part 1: Procedure to determine the

specific absorption rate (SAR) for hand-held devices used in close proximity to the ear (frequency range of 300 MHz to 3 GHz), July. 2016..

[21] IEC 62209-2, Human exposure to radio frequency fields from hand-held and body-mounted wireless communication devices – Human models, instrumentation, and procedures – Part 2: Procedure to determine the specific absorption rate (SAR) for wireless communication devices used in close proximity to the human body (frequency range of 30 MHz to 6 GHz) Mar. 2010.

[22] Industry Canada RSS-102 Radio Frequency Exposure Compliance of Radio Communication Apparatus (All Frequency Band) Issue 5, March 2015.

[23] Health Canada Safety Code 6 Limits of Human Exposure to Radio Frequency Electromagnetic Fields in the Frequency Range from 3 kHz – 300 GHz, 2009

[24] FCC SAR Test procedures for 2G-3G Devices, Mobile Hotspot and UMPC Device KDB 941225 D01.

[25] SAR Measurement Guidance for IEEE 802.11 transmitters, KDB 248227 D01v02r02

[26] SAR Evaluation of Handsets with Multiple Transmitters and Antennas KDB 648474 D03, D04.

[27] SAR Evaluation for Laptop, Notebook, Netbook and Tablet computers KDB 616217 D04.

[28] SAR Measurement and Reporting Requirements for 100 MHz – 6 GHz, KDB 865664 D01, D02.

[29] FCC General RF Exposure Guidance and SAR procedures for Dongles, KDB 447498 D01,D02.

Appendix A. DUT Ant. Information & SETUP PHOTO

Please refer to test DUT Ant. Information & setup photo file no. as follows:

Report No.
HCT-SR-2204-FC004-R1-P