

# FCC Test Report

Report No.: AGC01559220304FE03

FCC ID	:	2AANZEBSK-E
APPLICATION PURPOSE	:	Original Equipment
PRODUCT DESIGNATION	:	2-IN-1 Wireless Speaker & Earbuds
BRAND NAME	:	EDGEWOOD
MODEL NAME	:	NOR-EBSK-GRN, NOR-EBSK, NOR-EBSK-XXX, EW-EBSK-GRN, EW-EBSK, EW-EBSK-XXX
APPLICANT	:	DGL Group LTD.
DATE OF ISSUE	:	Mar. 14, 2022
STANDARD(S)	:	FCC Part 15.247
<b>REPORT VERSION</b>	:	V1.0



Any report having not been signed by authorized approver, or having been altered without authorization, or having not been stamped by the "Dedicated Testing/Inspection Stamp" is deemed to be invalid. Copying or excerpting portion of, or altering the content of the report is not permitted without the written authorization of AGC. The test results presented in the report apply only to the tested sample. Any objections to report issued by AGC should be submitted to AGC within 15days after the issuance of the test report. Further enquiry of validity or verification of the test report should be addressed to AGC by agc01@agccert.com.

 Attestation of Global Compliance(Shenzhen)Co., Ltd

 Attestation of Global Compliance(Shenzhen)Std & Tech Co., Ltd

 Tel: +86-755 2523 4088
 E-mail: agc@agccert.com
 Web: http://www.agccert.com/



## **REPORT REVISE RECORD**

Report Version	Revise Time	Issued Date	Valid Version	Notes
V1.0	/	Mar. 14, 2022	Valid	Initial Release



## TABLE OF CONTENTS

1.	VERIFICATION OF CONFORMITY	. 5
2.	GENERAL INFORMATION	. 6
	2.1. PRODUCT DESCRIPTION	. 6
	2.2. TABLE OF CARRIER FREQUENCYS	. 6
	2.3. RECEIVER INPUT BANDWIDTH	. 7
	2.4. EXAMPLE OF A HOPPING SEQUENCY IN DATA MODE	. 7
	2.5. EQUALLY AVERAGE USE OF FREQUENCIES AND BEHAVIOUR	. 7
	2.6. RELATED SUBMITTAL(S) / GRANT (S)	. 8
	2.7. TEST METHODOLOGY	. 8
	2.8. SPECIAL ACCESSORIES	. 8
	2.9. EQUIPMENT MODIFICATIONS	. 8
	2.10. ANTENNA REQUIREMENT	. 8
3.	MEASUREMENT UNCERTAINTY	. 9
4.	DESCRIPTION OF TEST MODES	10
5.	SYSTEM TEST CONFIGURATION	11
	5.1. CONFIGURATION OF EUT SYSTEM	11
	5.2. EQUIPMENT USED IN TESTED SYSTEM	11
	5.3. SUMMARY OF TEST RESULTS	11
6.	TEST FACILITY	12
7.	PEAK OUTPUT POWER	13
	7.1. MEASUREMENT PROCEDURE	13
	7.2. TEST SET-UP (BLOCK DIAGRAM OF CONFIGURATION)	13
	7.3. LIMITS AND MEASUREMENT RESULT	14
8.	20DB BANDWIDTH	19
	8.1. MEASUREMENT PROCEDURE	19
	8.2. TEST SET-UP (BLOCK DIAGRAM OF CONFIGURATION)	19
	8.3. LIMITS AND MEASUREMENT RESULTS	20
9.	CONDUCTED SPURIOUS EMISSION	25
	9.1. MEASUREMENT PROCEDURE	25



9.2. TEST SET-UP (BLOCK DIAGRAM OF CONFIGURATION) 9.3. MEASUREMENT EQUIPMENT USED 9.4. LIMITS AND MEASUREMENT RESULT	25
9.4. LIMITS AND MEASUREMENT RESULT	
10.1. MEASUREMENT PROCEDURE 10.2. TEST SETUP 10.3. LIMITS AND MEASUREMENT RESULT 10.4. TEST RESULT	48 49
11. NUMBER OF HOPPING FREQUENCY	59
<ul> <li>11.1. MEASUREMENT PROCEDURE</li> <li>11.2. TEST SETUP (BLOCK DIAGRAM OF CONFIGURATION)</li> <li>11.3. MEASUREMENT EQUIPMENT USED</li> <li>11.4. LIMITS AND MEASUREMENT RESULT</li></ul>	59 59
12. TIME OF OCCUPANCY (DWELL TIME)	60
12.1. MEASUREMENT PROCEDURE 12.2. TEST SETUP (BLOCK DIAGRAM OF CONFIGURATION) 12.3. MEASUREMENT EQUIPMENT USED 12.4. LIMITS AND MEASUREMENT RESULT	60 60
13. FREQUENCY SEPARATION	64
13.1. MEASUREMENT PROCEDURE 13.2. TEST SETUP (BLOCK DIAGRAM OF CONFIGURATION) 13.3. MEASUREMENT EQUIPMENT USED 13.4. LIMITS AND MEASUREMENT RESULT	64 64
14. LINE CONDUCTED EMISSION TEST	65
<ul> <li>14.1. LIMITS OF LINE CONDUCTED EMISSION TEST</li></ul>	65 66 66
APPENDIX A: PHOTOGRAPHS OF TEST SETUP	69
APPENDIX B: PHOTOGRAPHS OF EUT	69



## **1. VERIFICATION OF CONFORMITY**

Applicant	DGL Group LTD.
Address	195 Raritan Center Parkway, Edison, NJ 08837, United States
Manufacturer	DGL Group LTD.
Address	195 Raritan Center Parkway, Edison, NJ 08837, United States
Product Designation	2-IN-1 Wireless Speaker & Earbuds
Brand Name	EDGEWOOD
Test Model	NOR-EBSK-GRN
Series Model	NOR-EBSK, NOR-EBSK-XXX, EW-EBSK-GRN, EW-EBSK, EW-EBSK-XXX
Declaration of Difference	(Only the appearance of the color is different, everything else is completely the same. X is just a letter.)
Date of test	Mar. 03, 2022 to Mar. 14, 2022
Deviation	No any deviation from the test method
Condition of Test Sample	Normal
Test Result	Pass
Report Template	AGCRT-US-BR/RF

We hereby certify that:

The above equipment was tested by Attestation of Global Compliance (Shenzhen) Co., Ltd. The test data, data evaluation, test procedures, and equipment configurations shown in this report were made in accordance with the procedures given in ANSI C63.10 (2013) and the energy emitted by the sample EUT tested as described in this report is in compliance with radiated emission limits of FCC PART 15.247.

Bibozha Prepared By Bibo Zhang Mar. 14, 2022 (Project Engineer) Reviewed By Calvin Liu Mar. 14, 2022 (Reviewer) Approved By Max Zhang Mar. 14, 2022 (Authorized Officer)



# 2. GENERAL INFORMATION

## 2.1. PRODUCT DESCRIPTION

The EUT is designed as "2-IN-1 Wireless Speaker & Earbuds". It is designed by way of utilizing the GFSK, Pi/4 DQPSK and 8DPSK technology to achieve the system operation.

A major technical description of EUT is described as following

Operation Frequency	2.402 GHz to 2.480 GHz
RF Output Power	-1.694dBm (Max)
Bluetooth Version	V5.3
Modulation	BR ⊠GFSK, EDR ⊠π /4-DQPSK, ⊠8DPSK BLE □GFSK 1Mbps □GFSK 2Mbps
Number of channels	79
Hardware Version	V1.1
Software Version	V1.0
Antenna Designation	Ceramic antenna(Comply with requirements of the FCC part 15.203)
Antenna Gain	2.25dBi
Power Supply	DC 3.7V by battery or DC 5V by adapter

## 2.2. TABLE OF CARRIER FREQUENCYS

Frequency Band	Channel Number	Frequency
	0	2402 MHz
	1	2403 MHz
	:	:
	38	2440 MHz
2402~2480MHz	39	2441 MHz
	40	2442 MHz
		:
	77	2479 MHz
	78	2480 MHz



## 2.3. RECEIVER INPUT BANDWIDTH

The input bandwidth of the receiver is 1.3MHz, in every connection one Bluetooth device is the master and the other one is slave. The master determines the hopping sequence. The slave follows this sequence. Both devices shift between RX and TX time slot according to the clock of the master. Additionally, the type of connection (e.g. single of multi slot packet) is set up at the beginning of the connection. The master adapts its hopping frequency and its TX/RX timing according to the packet type of the connection. Also, the slave of the connection will use these settings. Repeating of a packet has no influence on the hopping sequence. The hopping sequence generated by the master of the connection will be followed in any case. That means, a repeated packet will not be send on the same frequency, it is send on the next frequency of the hopping sequence.

### 2.4. EXAMPLE OF A HOPPING SEQUENCY IN DATA MODE

Example of a hopping sequence in data mode: 40, 21, 44, 23, 04, 15, 66, 56, 19, 78, 07, 28, 69, 55, 36, 45, 05, 13, 43, 74, 57, 35, 67, 76, 02, 34, 54, 63, 42, 11, 30, 06, 64, 25, 75, 48, 17, 33, 58, 01, 29, 14, 51, 72, 03, 31, 50, 61, 77, 18, 10, 47, 12, 68, 08, 49, 20, 00, 73, 09, 16, 60, 71, 41, 24, 53, 38, 26, 46, 37, 65, 32, 70, 52, 27, 59, 22, 62, 39

### 2.5. EQUALLY AVERAGE USE OF FREQUENCIES AND BEHAVIOUR

The generation of the hopping sequence in connection mode depends essentially on two input values:

1. LAP/UAP of the master of the connection.

2. Internal master clock.

The LAP (lower address part) are the 24 LSB's of the 48 BD\_ADDRESS. The BD\_ADDRESS is an unambiguous number of every Bluetooth unit. The UAP (upper address part) are the 24MSB's of the 48BD\_ADDRESS

The internal clock of a Bluetooth unit is derived from a free running clock which is never adjusted and is never turned off. For behavior action with other units only offset is used. It has no relation to the time of the day. Its resolution is at least half the RX/TX slot length of 312.5us. The clock has a cycle of about one day(23h30). In most case it is implemented as 28 bits counter. For the deriving of the hopping sequence the entire. LAP (24 bits),4LSB's(4bits) (Input 1) and the 27MSB's of the clock (Input 2) are used. With this input values different mathematical procedures (permutations, additions, XOR-operations) are performed to generate the Sequence. This will be done at the beginning of every new transmission.

Regarding short transmissions the Bluetooth system has the following behavior:

The first connection between the two devices is established, a hopping sequence was generated. For Transmitting the wanted data the complete hopping sequence was not used. The connection ended.



The second connection will be established. A new hopping sequence is generated. Due to the fact the Bluetooth clock has a different value, because the period between the two transmission is longer (and it Cannot be shorter) than the minimum resolution of the clock(312.5us). The hopping sequence will always differ from the first one.

## 2.6. RELATED SUBMITTAL(S) / GRANT (S)

This submittal(s) (test report) is intended for **FCC ID: 2AANZEBSK-E** filing to comply with the FCC PART 15.247 requirements.

### 2.7. TEST METHODOLOGY

Both conducted and radiated testing was performed according to the procedures in ANSI C63.10 (2013). Radiated testing was performed at an antenna to EUT distance 3 meters.

### 2.8. SPECIAL ACCESSORIES

Refer to section 5.2.

### 2.9. EQUIPMENT MODIFICATIONS

Not available for this EUT intended for grant.

#### 2.10. ANTENNA REQUIREMENT

This intentional radiator is designed with a permanently attached antenna of an antenna to ensure that no antenna other than that furnished by the responsible party shall be used with the device.

For more information of the antenna, please refer to the APPENDIX B: PHOTOGRAPHS OF EUT.



# **3. MEASUREMENT UNCERTAINTY**

The reported uncertainty of measurement y ±U, where expended uncertainty U is based on a standard

uncertainty multiplied by a coverage factor of k=2, providing a level of confidence of approximately 95%.

Item	Measurement Uncertainty
Uncertainty of Conducted Emission for AC Port	$U_c = \pm 3.1 \text{ dB}$
Uncertainty of Radiated Emission below 1GHz	$U_c = \pm 4.0 \text{ dB}$
Uncertainty of Radiated Emission above 1GHz	$U_c = \pm 4.8 \text{ dB}$
Uncertainty of total RF power, conducted	$U_c = \pm 0.8 \text{ dB}$
Uncertainty of RF power density, conducted	$U_c = \pm 2.6 \text{ dB}$
Uncertainty of spurious emissions, conducted	$U_c = \pm 2 \%$
Uncertainty of Occupied Channel Bandwidth	$U_c = \pm 2 \%$



## **4. DESCRIPTION OF TEST MODES**

NO.	TEST MODE DESCRIPTION
1	Low channel GFSK
2	Middle channel GFSK
3	High channel GFSK
4	Low channel π/4-DQPSK
5	Middle channel π/4-DQPSK
6	High channel π/4-DQPSK
7	Low channel 8DPSK
8	Middle channel 8DPSK
9	High channel 8DPSK
10	Hopping mode GFSK
11	Hopping mode π/4-DQPSK
12	Hopping mode 8DPSK
Nata	

Note:

1. Only the result of the worst case was recorded in the report, if no other cases.

2. For Radiated Emission, 3axis were chosen for testing for each applicable mode.

3. For Conducted Test method, a temporary antenna connector is provided by the manufacture.

Software Setting - 0 E FCC Assist 1.0.1.1 6 帮助(H) 串口设置 设备[COM2]打开成功 串 🛛 COM2(USB Serial Port) 🔻 reply data: 04 0E 04 01 01 FC 00 return code: 0x0 波特率 115200 配置数据发送成功 数据位 8 reply data: 04 0E 04 01 01 FC 00 校验位 None return code: 0x0 • 配置数据发送成功! 停止位 1 • reply data: 04 0E 04 01 reply data: 01 FC 00 04 0E 04 01 01 FC 00 reply data: 04 0E 04 01 01 FC 00 流 控 NoFlow • 关闭 return code: 0x0 配置数据发送成功 BR/EDR BLE reply data: 04 0E 04 01 01 FC 00 MODE TX return code: 0x0 配置数据发送成功! Channel 0 -Transmit\_Power 10 • Packet\_Type 1-DH5 -Hopping ON • Data\_Types Pn9 -Send configuration

清除日志

ary antenna connector is pro



# **5. SYSTEM TEST CONFIGURATION**

### 5.1. CONFIGURATION OF EUT SYSTEM

Radiated Emission Configure:



Conducted Emission Configure:

EUT		AE
-----	--	----

## 5.2. EQUIPMENT USED IN TESTED SYSTEM

Item	Equipment	Model No.	ID or Specification	Remark
1	2-IN-1 Wireless Speaker & Earbuds	NOR-EBSK-GRN	2AANZEBSK-E	EUT
2	2-IN-1 Wireless Speaker & Earbuds	NOR-EBSK-GRN	2AANZEBSK-S	EUT
3	Adapter	ZL-PCB0100020502000	N\A	AE

#### **5.3. SUMMARY OF TEST RESULTS**

FCC RULES	DESCRIPTION OF TEST	RESULT
15.247 (b)(1)	Peak Output Power	Compliant
15.247 (a)(1)	20 dB Bandwidth	Compliant
15.247 (d)	Conducted Spurious Emission	Compliant
15.209	Radiated Emission	Compliant
15.247 (a)(1)(iii)	Number of Hopping Frequency	Compliant
15.247 (a)(1)(iii)	Time of Occupancy	Compliant
15.247 (a)(1)	Frequency Separation	Compliant
15.207	Conducted Emission	Compliant



## 6. TEST FACILITY

Test Site	Attestation of Global Compliance (Shenzhen) Co., Ltd		
Location	1-2/F, Building 19, Junfeng Industrial Park, Chongqing Road, Heping Community, Fuhai Street, Bao'an District, Shenzhen, Guangdong, China		
Designation Number	CN1259		
FCC Test Firm Registration Number	975832		
A2LA Cert. No.	5054.02		
Description	Attestation of Global Compliance (Shenzhen) Co., Ltd is accredited by A2LA		

### TEST EQUIPMENT OF CONDUCTED EMISSION TEST

Equipment	Manufacturer	Model	S/N	Cal. Date	Cal. Due
TEST RECEIVER	R&S	ESPI	101206	May 11, 2021	May 10, 2022
LISN	R&S	ESH2-Z5	100086	Jun. 09, 2021	Jun. 08, 2022
Test software	R&S	ES-K1(Ver.V1.71)	N/A	N/A	N/A

## TEST EQUIPMENT OF RADIATED EMISSION TEST

Equipment	Manufacturer	Model	S/N	Cal. Date	Cal. Due
TEST RECEIVER	R&S	ESCI	10096	May 15, 2021	May 14, 2022
EXA Signal Analyzer	Aglient	N9010A	MY53470504	Nov. 17, 2021	Nov. 16, 2022
2.4GHz Filter	EM Electronics	2400-2500MHz	N/A	Mar. 23, 2020	Mar. 22, 2022
Attenuator	ZHINAN	E-002	N/A	Sep. 03, 2020	Sep. 02, 2022
Horn antenna	SCHWARZBECK	BBHA 9170	#768	Oct. 31, 2021	Oct. 30, 2023
Active loop antenna (9K-30MHz)	ZHINAN	ZN30900C	18051	May 22, 2020	May 21, 2022
Double-Ridged Waveguide Horn	ETS LINDGREN	3117	00034609	Apr. 23, 2021	Apr. 22, 2022
Broadband Preamplifier	ETS LINDGREN	3117PA	00225134	Sep. 03, 2020	Sep. 02, 2022
ANTENNA	SCHWARZBECK	VULB9168	494	Jan. 08, 2021	Jan. 07, 2023
Test software	Tonscend	JS32-RE (Ver.2.5)	N/A	N/A	N/A



# 7. PEAK OUTPUT POWER

## 7.1. MEASUREMENT PROCEDURE


For peak power test:

- 1. Connect EUT RF output port to the Spectrum Analyzer through an RF attenuator
- 2. Span: Approximately five times the 20 dB bandwidth, centered on a hopping channel.
- 3. RBW > 20 dB bandwidth of the emission being measured.
- 4. VBW  $\geq$ RBW.
- 5. Sweep: Auto.
- 6. Detector function: Peak.
- 7. Trace: Max hold.

Allow trace to stabilize. Use the marker-to-peak function to set the marker to the peak of the emission. The indicated level is the peak output power, after any corrections for external attenuators and cables.

## 7.2. TEST SET-UP (BLOCK DIAGRAM OF CONFIGURATION)

## PEAK POWER TEST SETUP

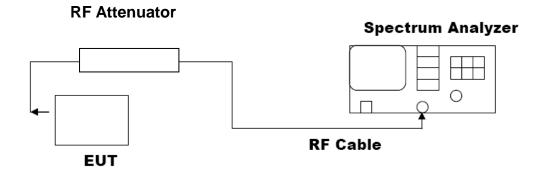





#### 7.3. LIMITS AND MEASUREMENT RESULT

Test Data of Conducted Output Power				
Test Mode	Test Channel (MHz)	Peak Power (dBm)	Limits (dBm)	Pass or Fail
	2402	-2.590	⊴21	Pass
GFSK	2441	-2.822	≪21	Pass
	2480	-3.223	⊴21	Pass
π /4-DQPSK	2402	-1.694	⊴21	Pass
	2441	-1.946	≪21	Pass
	2480	-2.327	\$21	Pass
8DPSK	2402	-2.614	\$21	Pass
	2441	-2.850	⊴21	Pass
	2480	-3.253	\$21	Pass


#### **Test Graphs of Conducted Output Power**

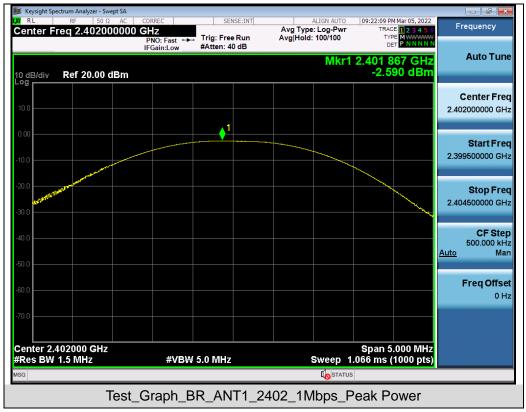




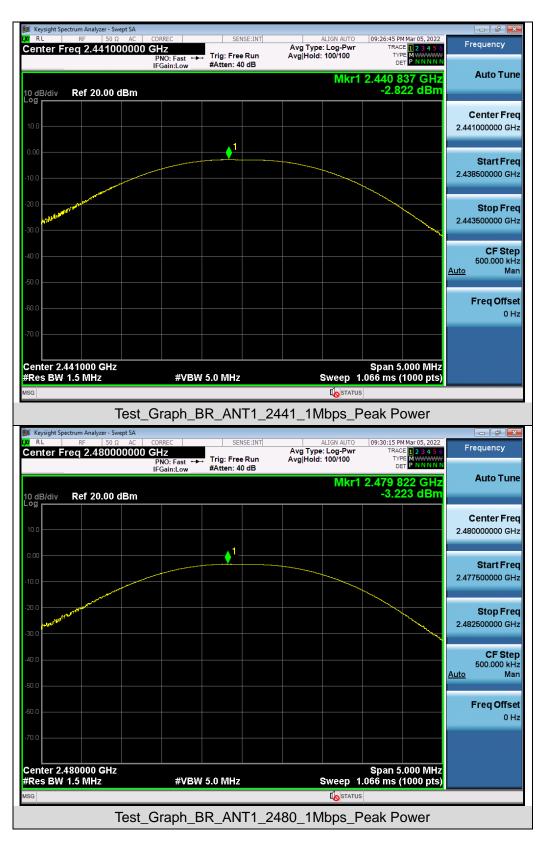




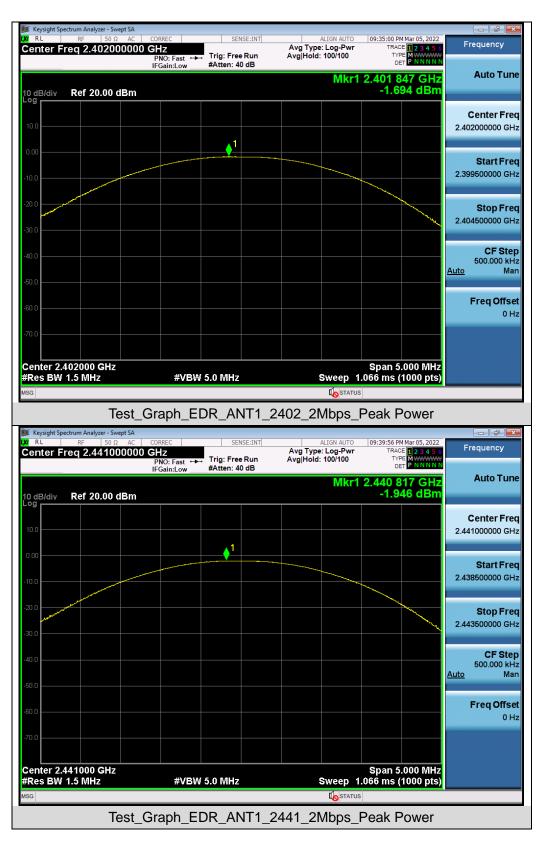



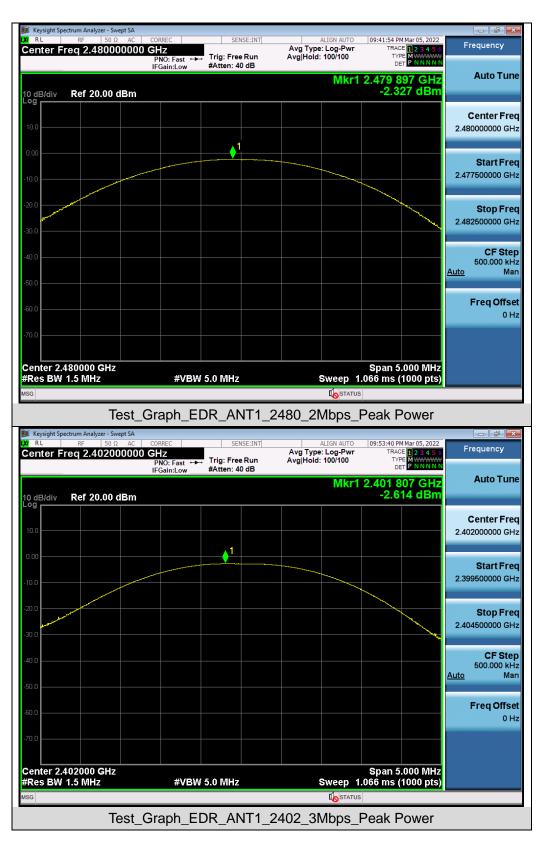



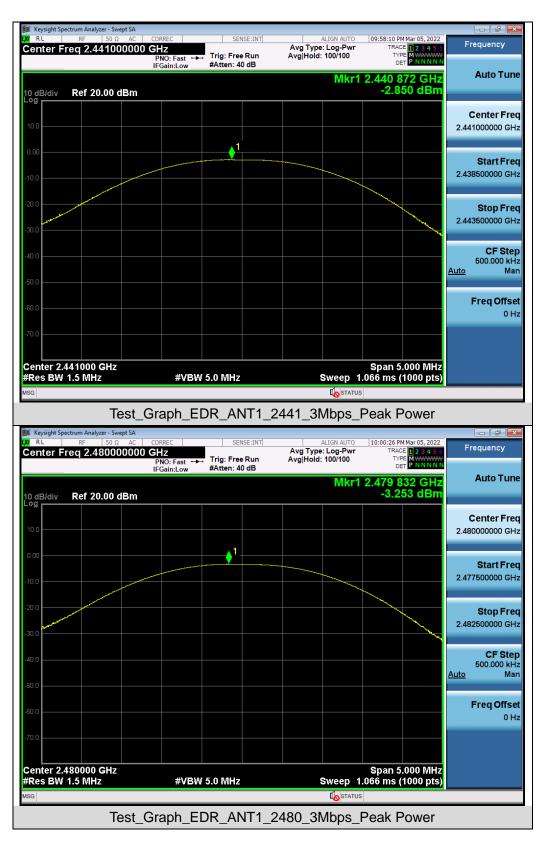




## 8. 20DB BANDWIDTH

### **8.1. MEASUREMENT PROCEDURE**

- 1. Connect EUT RF output port to the Spectrum Analyzer through an RF attenuator
- 2, Set the EUT Work on the top, the middle and the bottom operation frequency individually.
- 3. Set Span = approximately 2 to 5 times the 20 dB bandwidth, centered on a hoping channel The nominal IF filter bandwidth (3 dB RBW) shall be in the range of 1% to 5% of the OBW and video bandwidth (VBW) shall be approximately three times RBW; Sweep = auto; Detector function = peak
- 4. Set SPA Trace 1 Max hold, then View.

## 8.2. TEST SET-UP (BLOCK DIAGRAM OF CONFIGURATION)

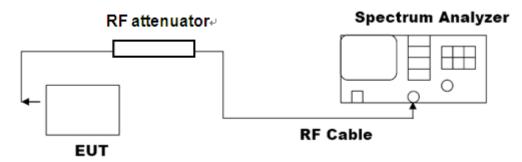




Test Data of Occupied Bandwidth and -20dB Bandwidth					
Test Mode	Test Channel (MHz)	99% Occupied Bandwidth (MHz)	-20dB Bandwidth (MHz)	Limits	Pass or Fail
	2402	0.853	0.951	N/A	Pass
GFSK	2441	0.853	0.951	N/A	Pass
-	2480	0.852	0.953	N/A	Pass
π /4-DQPSK	2402	1.166	1.280	N/A	Pass
	2441	1.166	1.307	N/A	Pass
	2480	1.166	1.280	N/A	Pass
8DPSK	2402	1.191	1.297	N/A	Pass
	2441	1.195	1.298	N/A	Pass
	2480	1.175	1.290	N/A	Pass

#### 8.3. LIMITS AND MEASUREMENT RESULTS

#### Test Graphs of Occupied Bandwidth and -20 Bandwidth

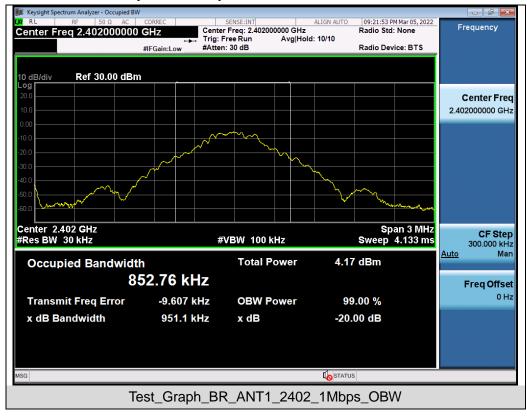
















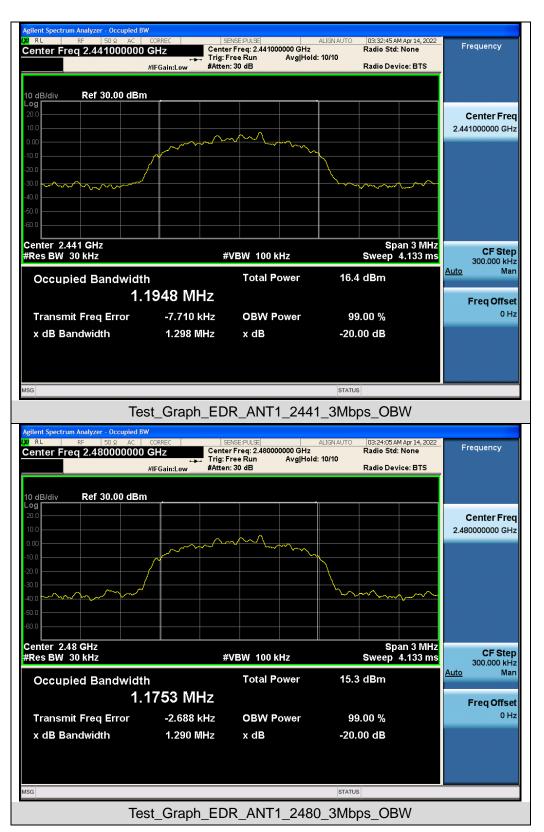



# 9. CONDUCTED SPURIOUS EMISSION

## 9.1. MEASUREMENT PROCEDURE

- 1. Connect EUT RF output port to the Spectrum Analyzer through an RF attenuator
- 2. Set the EUT Work on the top, the Middle and the bottom operation frequency individually.
- Set the Span = wide enough to capture the peak level of the in-band emission and all spurious emissions from the lowest frequency generated in the EUT up through the 10th harmonic.
   RBW = 100 kHz; VBW= 300 kHz; Sweep = auto; Detector function = peak.
- 4. Set SPA Trace 1 Max hold, then View.

### 9.2. TEST SET-UP (BLOCK DIAGRAM OF CONFIGURATION)

The same as described in section 8.2

### 9.3. MEASUREMENT EQUIPMENT USED

The same as described in section 6

## 9.4. LIMITS AND MEASUREMENT RESULT

LIMITS AND MEASUREMENT RESULT			
Applieghte Limite	Measurement Result		
Applicable Limits	Test Data	Criteria	
In any 100 kHz Bandwidth Outside the	At least -20dBc than the limit		
frequency band in which the spread spectrum	Specified on the BOTTOM	PASS	
intentional radiator is operating, the radio frequency	Channel		
power that is produce by the intentional radiator shall be at least 20 dB below that in 100KHz bandwidth within the band that contains the highest level of the desired power. In addition, radiation emissions which fall in the restricted bands, as defined in §15.205(a), must also comply with the radiated emission limits specified in§15.209(a))	At least -20dBc than the limit Specified on the TOP Channel	PASS	





#### Test Graphs of Spurious Emissions in Non-Restricted Frequency Bands



