

April 12, 2002

TIMCO ENGINEERING INC.
P O BOX 370
849 N.W. STATE ROAD 45
NEWBERRY, FLORIDA
USA 32669

Subject: FCC Certification Authorization Application under FCC PART 15, Subpart C, Sec. 15.231(a) - Momentarily Operation at 433.92 MHz.

Product: PT21 Postal Tag
Model No.: PT21
FCC ID: PQGPT21

Dear Sir/Madam

As appointed agent for Lyngsoe Industries Ltd., we would like to submit the application to the Federal Communications Commission for certification of the above product. Please review all necessary files uploaded to FCC OET site for detailed information.

If you have any queries, please do not hesitate to contact us.

Yours truly,



Tri Minh Luu, P. Eng.,
V.P., Engineering

Encl



31040/SIT



A96/TH/0093




00-034

3000 Bristol Circle,
Oakville, Ontario, Canada
L6H 6G4

Telephone (905) 829-1570
Facsimile (905) 829-8050

Website: www.ultratech-labs.com
Email: vic@ultratech-labs.com

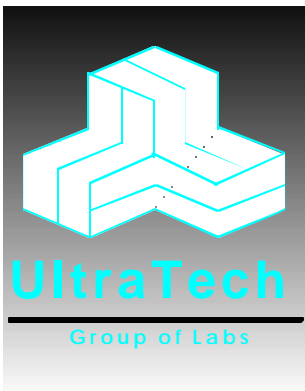

31040/SIT



A96/TH/0093



46390-2049



200093-0



00-034

April 12, 2002

Lyngsoe Industries Ltd.

5570 Kennedy Road, Unit B
Mississauga, Ontario
Canada, L4Z 2A9

Attn.: Don Ferguson

Subject: FCC Certification Application Testing under FCC PART 15, Subpart C, Sec. 15.231(a) - Momentarily Operation at 433.92 MHz.

Product: PT21 Postal Tag
Model No.: PT21
FCC ID: PQGPT21

Dear Mr. Ferguson,

The product sample, as provided by you, has been tested and found to comply with **FCC PART 15, Subpart C, Sec. 15.231(a) - Momentarily Operation at 433.92 MHz.**

Enclosed you will find copies of the engineering report. If you have any queries, please do not hesitate to contact us.

Yours truly,



Tri Minh Luu, P. Eng.,
V.P., Engineering


Encl

3000 Bristol Circle,
Oakville, Ontario, Canada
L6H 6G4

Telephone (905) 829-1570
Facsimile (905) 829-8050

Website: www.ultratech-labs.com
Email: vic@ultratech-labs.com

ENGINEERING TEST REPORT



PT21 Postal Tag Model No.: PT21

FCC ID: PQGPT21

Applicant: **Lyngsoe Industries Ltd.**
5570 Kennedy Road, Unit B
Mississauga, Ontario
Canada, L4Z 2A9

In Accordance With

**FEDERAL COMMUNICATIONS COMMISSION (FCC)
PART 15, SUBPART C
Sec. 15.231(a) - Momentarily Operation at 433.92 MHz**

UltraTech's File No.: LYT-003FTX

This Test report is Issued under the Authority of
Tri M. Luu, Professional Engineer,
Vice President of Engineering
UltraTech Group of Labs



Date: April 12, 2002

Report Prepared by: Tri M. Luu, P.Eng.

Tested by: Hung Trinh, RFI Technician

Issued Date: April 12, 2002

Test Dates: Mar. 22-25, 2002

- *The results in this Test Report apply only to the sample(s) tested, and the sample tested is randomly selected.*
- *This report must not be used by the client to claim product endorsement by NVLAP or any agency of the US Government.*

UltraTech

3000 Bristol Circle, Oakville, Ontario, Canada, L6H 6G4
Telephone (905) 829-1570 Facsimile (905) 829-8050
Website: www.ultrat4ech-labs.com Email: vic@ultratech-labs.com

TABLE OF CONTENTS

| | | |
|-------------------|---|-----------|
| EXHIBIT 1. | SUBMITTAL CHECK LIST..... | 4 |
| EXHIBIT 1. | INTRODUCTION | 5 |
| 1.1. | SCOPE..... | 5 |
| 1.2. | RELATED SUBMITAL(S)/GRANT(S)..... | 5 |
| 1.3. | NORMATIVE REFERENCES | 5 |
| EXHIBIT 2. | PERFORMANCE ASSESSMENT | 6 |
| 2.1. | CLIENT INFORMATION..... | 6 |
| 2.2. | EQUIPMENT UNDER TEST (EUT) INFORMATION | 6 |
| 2.3. | EUT'S TECHNICAL SPECIFICATIONS | 7 |
| 2.4. | LIST OF EUT'S PORTS..... | 7 |
| 2.5. | ANCILLARY EQUIPMENT | 7 |
| 2.6. | GENERAL TEST SETUP..... | 7 |
| EXHIBIT 3. | EUT OPERATING CONDITIONS AND CONFIGURATIONS DURING TESTS | 8 |
| 3.1. | CLIMATE TEST CONDITIONS..... | 8 |
| 3.2. | OPERATIONAL TEST CONDITIONS & ARRANGEMENT FOR TEST S..... | 8 |
| EXHIBIT 4. | SUMMARY OF TEST RESULTS..... | 9 |
| 4.1. | LOCATION OF TESTS | 9 |
| 4.2. | APPLICABILITY & SUMMARY OF EMC EMISSION TEST RESULTS..... | 10 |
| 4.3. | MODIFICATIONS INCORPORATED IN THE EUT FOR COMPLIANCE PURPOSES..... | 10 |
| EXHIBIT 5. | MEASUREMENTS, EXAMINATIONS & TEST DATA FOR EMC EMISSIONS | 11 |
| 5.1. | TEST PROCEDURES..... | 11 |
| 5.2. | MEASUREMENT UNCERTAINTIES..... | 11 |
| 5.3. | MEASUREMENT EQUIPMENT USED:..... | 11 |
| 5.4. | ESSENTIAL/PRIMARY FUNCTIONS AS DECLARED BY THE MANUFACTURER:..... | 11 |
| 5.5. | 433.92 MHZ TRANSMITTER - PROVISIONS OF FCC 15.231(A) FOR PERIODIC OPERATION | 12 |
| 5.5.1. | <i>Engineering Analysis.....</i> | 12 |
| 5.6. | 433.92 MHZ TRANSMITTER - RADIATED EMISSIONS @ 3 METERS, FCC CFR 47, PARA. 15.231(A), 15.209 & 15.205 13 | |
| 5.6.1. | <i>Limits.....</i> | 13 |
| 5.6.2. | <i>Method of Measurements.....</i> | 14 |
| 5.6.3. | <i>Test Equipment List</i> | 14 |
| 5.6.4. | <i>Photograph of Test Setup.....</i> | 14 |
| 5.6.5. | <i>Test Data.....</i> | 15 |
| 5.7. | 433.92 MHZ TRANSMITTER - 20 DB BANDWIDTH @ FCC CFR 47, PARA. 15.231(C)..... | 17 |
| 5.7.1. | <i>Limits.....</i> | 17 |
| 5.7.2. | <i>Method of Measurements.....</i> | 17 |
| 5.7.3. | <i>Test Equipment List</i> | 17 |
| 5.7.4. | <i>Plots.....</i> | 17 |
| 5.7.5. | <i>Test Data.....</i> | 17 |
| EXHIBIT 6. | MEASUREMENT UNCERTAINTY..... | 18 |
| 6.1. | RADIATED EMISSION MEASUREMENT UNCERTAINTY..... | 18 |

ULTRATECH GROUP OF LABS

3000 Bristol Circle, Oakville, Ontario, Canada L6H 6G4

Tel. #: 905-829-1570, Fax. #: 905-829-8050, Email: vic@ultratech-labs.com, Website: <http://www.ultratech-labs.com>

File #: LYT-0031

April 12, 2

- Accreditation: FCC & NVLAP (USA), ACA (Australia), VCCI (Japan), ITI (UK), ACC-LAB (Canada, Europe/APEC/Canada MRA)
- All test results contained in this engineering test report are traceable to National Institute of Standards and Technology (NIST)

| | | |
|-------------------|---|-----------|
| EXHIBIT 7. | MEASUREMENT METHODS..... | 19 |
| 7.1. | GENERAL TEST CONDITIONS | 19 |
| 7.1.1. | <i>Normal temperature and humidity</i> | <i>19</i> |
| 7.1.2. | <i>Normal power source</i> | <i>19</i> |
| 7.1.3. | <i>Operating Condition of Equipment under Test.....</i> | <i>19</i> |
| 7.2. | RADIATED EMISSIONS..... | 20 |

ULTRATECH GROUP OF LABS

3000 Bristol Circle, Oakville, Ontario, Canada L6H 6G4

Tel. #: 905-829-1570, Fax. #: 905-829-8050, Email: vic@ultratech-labs.com, Website: <http://www.ultratech-labs.com>

File #: LYT-0031

April 12, 2012

- Accreditation: FCC & NVLAP (USA), ACA (Australia), VCCI (Japan), ITI (UK), ACC-LAB (Canada, Europe/APEC/Canada MRA)
- All test results contained in this engineering test report are traceable to National Institute of Standards and Technology (NIST)

EXHIBIT 1. SUBMITTAL CHECK LIST

| Annex No. | Exhibit Type | Description of Contents | Quality Check (OK) |
|-----------|---|--|--------------------|
| | Test Report | <ul style="list-style-type: none"> Exhibit 1: Submittal check lists Exhibit 2: Introduction Exhibit 3: Performance Assessment Exhibit 4: EUT Operation and Configuration during Tests Exhibit 5: Summary of test Results Exhibit 6: Measurement Data Exhibit 7: Measurement Uncertainty Exhibit 8: Measurement Methods | OK |
| 1 | Test Report - Plots of Measurement Data | Plots # 1 to 2 | OK |
| 2 | Test Setup Photos | Photos # 1 to 3 | OK |
| 3 | External Photos of EUT | Photos # 1 to 2 | OK |
| 4 | Internal Photos of EUT | Photos of 1 to 2 | OK |
| 5 | Cover Letters | <ul style="list-style-type: none"> Letter from Ultratech for Certification Request Letter from the Applicant to appoint Ultratech to act as an agent Letter from the Applicant to request for Confidentiality Filing | OK OK OK |
| 6 | ID Label/Location Info | <ul style="list-style-type: none"> ID Label Location of ID Label | OK OK |
| 7 | Block Diagrams | <ul style="list-style-type: none"> Block diagrams | OK |
| 8 | Schematic Diagrams | <ul style="list-style-type: none"> 1 Schematic diagram | OK |
| 9 | Parts List/Tune Up Info | Parts List | OK |
| 10 | Operational Description | Operational Description | OK |
| 11 | RF Exposure Info | N/A | N/A |
| 12 | Users Manual | Users Manual | OK |

ULTRATECH GROUP OF LABS

3000 Bristol Circle, Oakville, Ontario, Canada L6H 6G4
Tel. #: 905-829-1570, Fax. #: 905-829-8050, Email: vic@ultratech-labs.com, Website: <http://www.ultratech-labs.com>

File #: LYT-0031
April 12, 2012

- Accreditation: FCC & NVLAP (USA), ACA (Australia), VCCI (Japan), ITI (UK), ACC-LAB (Canada, Europe/APEC/Canada MRA)
- All test results contained in this engineering test report are traceable to National Institute of Standards and Technology (NIST)

EXHIBIT 1. INTRODUCTION

1.1. SCOPE

| | |
|--------------------------------------|--|
| Reference: | FCC Part 15, Subpart C, Section 15.231(a) |
| Title | Telecommunication - Code of Federal Regulations, CFR 47, Part 15 |
| Purpose of Test: | To gain FCC Certification Authorization for Momentarily Operation at 433.92 MHz . |
| Test Procedures | Both conducted and radiated emissions measurements were conducted in accordance with American National Standards Institute ANSI C63.4 - American National Standard for Methods of Measurement of Radio-Noise Emissions from Low-Voltage Electrical and Electronic Equipment in the Range of 9 kHz to 40 GHz. |
| Environmental Classification: | <ul style="list-style-type: none">• Light-industry, Commercial• Industry |

1.2. RELATED SUBMITAL(S)/GRANT(S)

None

1.3. NORMATIVE REFERENCES

| Publication | YEAR | Title |
|------------------------------|--------------|---|
| FCC CFR Parts 0-19 | 2001 | Code of Federal Regulations – Telecommunication |
| ANSI C63.4 | 1992 | American National Standard for Methods of Measurement of Radio-Noise Emissions from Low-Voltage Electrical and Electronic Equipment in the Range of 9 kHz to 40 GHz |
| CISPR 22 & EN 55022 | 1997 1998 | Limits and Methods of Measurements of Radio Disturbance Characteristics of Information Technology Equipment |
| CISPR 16-1 | | Specification for Radio Disturbance and Immunity measuring apparatus and methods |
| FCC Public Notice DA 00-705 | 2000 | Filing and Measurement Guidelines for Frequency Hopping Spread Spectrum Systems |
| FCC Public Notice DA 00-1407 | 2000 | Part 15 Unlicensed Modular Transmitter Approval |

ULTRATECH GROUP OF LABS

3000 Bristol Circle, Oakville, Ontario, Canada L6H 6G4

Tel. #: 905-829-1570, Fax. #: 905-829-8050, Email: vic@ultratech-labs.com, Website: <http://www.ultratech-labs.com>

File #: LYT-0031

April 12, 2012

- Accreditation: FCC & NVLAP (USA), ACA (Australia), VCCI (Japan), ITI (UK), ACC-LAB (Canada, Europe/APEC/Canada MRA)
- All test results contained in this engineering test report are traceable to National Institute of Standards and Technology (NIST)

EXHIBIT 2. PERFORMANCE ASSESSMENT

2.1. CLIENT INFORMATION

| | |
|------------------------|---|
| APPLICANT: | |
| Name: | Lyngsoe Industries Ltd. |
| Address: | 5570 Kennedy Road, Unit B Mississauga, Ontario Canada, L4Z 2A9 |
| Contact Person: | Don Ferguson Phone #: 905 501 1533 Fax #: 905 501 1538 Email Address: dfe@lyngsoe-industries.com |

| | |
|------------------------|---|
| MANUFACTURER: | |
| Name: | Lyngsoe Industries Ltd. |
| Address: | 5570 Kennedy Road, Unit B Mississauga, Ontario Canada, L4Z 2A9 |
| Contact Person: | Don Ferguson Phone #: 905 501 1533 Fax #: 905 501 1538 Email Address: dfe@lyngsoe-industries.com |

2.2. EQUIPMENT UNDER TEST (EUT) INFORMATION

The following information (with the exception of the Date of Receipt) has been supplied by the applicant.

| | |
|---------------------------------------|--|
| Brand Name | Lyngsoe Industries Ltd. |
| Product Name | PT21 Postal Tag |
| Model Name or Number | PT21 |
| Serial Number | Pre-production sample |
| Type of Equipment | Low Power Transmitter (RFID Transponder) |
| Input Power Supply Type | 3 Volt battery |
| Primary User Functions of EUT: | This 433 MHz PT21 Tag is used in a RFID Transponder Identification System. The purpose of a data capture or identification that uses a Transponder as an identification token is: <ul style="list-style-type: none">▪ To automatically identify animate and inanimate objects having attached a Transponder with a unique identifier.▪ To ensure that information is available in a format that can be readily accepted by a computer.▪ To minimize the possibility of errors in the identification process. |
| Composite Devices: | Lyngsoe Exciter, Model E9, FCC ID: PQGE95 |

ULTRATECH GROUP OF LABS

3000 Bristol Circle, Oakville, Ontario, Canada L6H 6G4
Tel. #: 905-829-1570, Fax. #: 905-829-8050, Email: vic@ultratech-labs.com, Website: <http://www.ultratech-labs.com>

File #: LYT-0031
April 12, 2012

- Accreditation: FCC & NVLAP (USA), ACA (Australia), VCCI (Japan), ITI (UK), ACC-LAB (Canada, Europe/APEC/Canada MRA)
- All test results contained in this engineering test report are traceable to National Institute of Standards and Technology (NIST)

2.3. EUT'S TECHNICAL SPECIFICATIONS

| TRANSMITTER @ 433.92 MHz | |
|---------------------------------|--|
| Intended Operating Environment: | ▪ Commercial, light industry & heavy industry |
| RF Output Power Rating: | 0.0 |
| Operating Frequency Range: | 433.92 MHz |
| Duty Cycle: | 27.28% maximum |
| Transmission Duration | 4.9 second maximum |
| 20 dB Bandwidth: | 40.3 kHz |
| Modulation Type: | Pulse modulation with recognition coding |
| Emission Designation: | 40K3PON |
| Oscillator Frequency: | 433.92 MHz |
| CPU Clock: | 3.58 MHz |
| Antenna Connector Type: | • Integral antenna (part of on the printed circuit board) housed inside a plastic enclosure. |

2.4. LIST OF EUT'S PORTS

None

2.5. ANCILLARY EQUIPMENT

None

2.6. GENERAL TEST SETUP

The PT21 Transmitter tag was tested as a standalone device. Please refer to Photo of Test Setup in Annex 2.

ULTRATECH GROUP OF LABS

3000 Bristol Circle, Oakville, Ontario, Canada L6H 6G4
Tel. #: 905-829-1570, Fax. #: 905-829-8050, Email: vic@ultratech-labs.com, Website: <http://www.ultratech-labs.com>

File #: LYT-0031
April 12, 2012

- Accreditation: FCC & NVLAP (USA), ACA (Australia), VCCI (Japan), ITI (UK), ACC-LAB (Canada, Europe/APEC/Canada MRA)
- All test results contained in this engineering test report are traceable to National Institute of Standards and Technology (NIST)

EXHIBIT 3. EUT OPERATING CONDITIONS AND CONFIGURATIONS DURING TESTS

3.1. CLIMATE TEST CONDITIONS

The climate conditions of the test environment are as follows:

| | |
|---------------------|----------------|
| Temperature: | 21°C |
| Humidity: | 51% |
| Pressure: | 102 kPa |
| Power input source: | 3 Volt battery |

3.2. OPERATIONAL TEST CONDITIONS & ARRANGEMENT FOR TESTS

| | |
|----------------------------------|--|
| Operating Modes: | The EUT was set to transmit continuously by means of special setting of jumpers on the printed circuit board for testing purpose only. |
| Special Test Software: | None |
| Special Hardware Used: | None |
| Transmitter Test Antenna: | The EUT is tested with the antenna fitted in a manner typical of normal intended use as an integral antenna equipment. |

| | |
|----------------------------------|------------|
| Transmitter Test Signals: | |
| Frequencies: | 433.92 MHz |

ULTRATECH GROUP OF LABS

3000 Bristol Circle, Oakville, Ontario, Canada L6H 6G4
Tel. #: 905-829-1570, Fax. #: 905-829-8050, Email: vic@ultratech-labs.com, Website: <http://www.ultratech-labs.com>

File #: LYT-0031
April 12, 2012

- Accreditation: FCC & NVLAP (USA), ACA (Australia), VCCI (Japan), ITI (UK), ACC-LAB (Canada, Europe/APEC/Canada MRA)
- All test results contained in this engineering test report are traceable to National Institute of Standards and Technology (NIST)

EXHIBIT 4. SUMMARY OF TEST RESULTS

4.1. LOCATION OF TESTS

All of the measurements described in this report were performed at Ultratech Group of Labs located in the city of Oakville, Province of Ontario, Canada.

- AC Powerline Conducted Emissions were performed in UltraTech's shielded room, 16'(L) by 12'(W) by 12'(H).
- Radiated Emissions were performed at the Ultratech's 3 Meter Open Field Test Site (OFTS) situated in the Town of Oakville, province of Ontario.

The above sites have been calibrated in accordance with ANSI C63.4, and found to be in compliance with the requirements of Sec. 2.948 of the FCC Rules. The descriptions and site measurement data of the Oakville Open Field Test Site has been filed with FCC office (FCC File No.: 31040/SIT 1300B3) and Industry Canada office (Industry Canada File No.: IC2049). Last Date of Site Calibration: Aug. 08, 2001.

ULTRATECH GROUP OF LABS

3000 Bristol Circle, Oakville, Ontario, Canada L6H 6G4
Tel. #: 905-829-1570, Fax. #: 905-829-8050, Email: vic@ultratech-labs.com, Website: <http://www.ultratech-labs.com>

File #: LYT-0031
April 12, 2001

- Accreditation: FCC & NVLAP (USA), ACA (Australia), VCCI (Japan), ITI (UK), ACC-LAB (Canada, Europe/APEC/Canada MRA)
- All test results contained in this engineering test report are traceable to National Institute of Standards and Technology (NIST)

4.2. APPLICABILITY & SUMMARY OF EMC EMISSION TEST RESULTS

| FCC PARAGRAPH. | TEST REQUIREMENTS | COMPLIANCE (YES/NO) |
|-----------------|---|---|
| 15.203 | Antenna Requirement | Yes |
| 15.231(a) | Provisions of FCC 15.231 | Yes |
| 15.231(a) & (b) | Transmitter Radiated Emissions - Fundamental, Harmonic and Spurious | Yes |
| 15.231(c) | 20 dB Bandwidth | Yes |
| 15.107, 15.109 | AC Power Conducted Emissions & Radiated Emissions for Receiver and Digital Circuit Portions | Not applicable for battery operated device. |

4.3. MODIFICATIONS INCORPORATED IN THE EUT FOR COMPLIANCE PURPOSES

None

ULTRATECH GROUP OF LABS

3000 Bristol Circle, Oakville, Ontario, Canada L6H 6G4
Tel. #: 905-829-1570, Fax. #: 905-829-8050, Email: vic@ultratech-labs.com, Website: <http://www.ultratech-labs.com>

File #: LYT-0031
April 12, 2012

- Accreditation: FCC & NVLAP (USA), ACA (Australia), VCCI (Japan), ITI (UK), ACC-LAB (Canada, Europe/APEC/Canada MRA)
- All test results contained in this engineering test report are traceable to National Institute of Standards and Technology (NIST)

EXHIBIT 5. MEASUREMENTS, EXAMINATIONS & TEST DATA FOR EMC EMISSIONS

5.1. TEST PROCEDURES

This section contains test results only. Details of test methods and procedures can be found in Exhibit 8 of this report, ANSI C63-4:1992 and FCC Public Notice @ DA 00-705 (March 30, 2000) – Filing and Measurement Guidelines for Frequency Hopping Spread Spectrum Systems.

5.2. MEASUREMENT UNCERTAINTIES

The measurement uncertainties stated were calculated in accordance with requirements of UKAS Document NIS 81 with a confidence level of 95%. Please refer to Exhibit 7 for Measurement Uncertainties.

5.3. MEASUREMENT EQUIPMENT USED:

The measurement equipment used complied with the requirements of the Standards referenced in the Methods & Procedures ANSI C64-3:1992, FCC 15.209 and CISPR 16-1.

5.4. ESSENTIAL/PRIMARY FUNCTIONS AS DECLARED BY THE MANUFACTURER:

The essential function of the EUT is to correctly communicate data to and from radios over RF link.

ULTRATECH GROUP OF LABS

3000 Bristol Circle, Oakville, Ontario, Canada L6H 6G4
Tel. #: 905-829-1570, Fax. #: 905-829-8050, Email: vic@ultratech-labs.com, Website: <http://www.ultratech-labs.com>

File #: LYT-0031
April 12, 2012

- Accreditation: FCC & NVLAP (USA), ACA (Australia), VCCI (Japan), ITI (UK), ACC-LAB (Canada, Europe/APEC/Canada MRA)
- All test results contained in this engineering test report are traceable to National Institute of Standards and Technology (NIST)

5.5. 433.92 MHZ TRANSMITTER - PROVISIONS OF FCC 15.231(A) FOR PERIODIC OPERATION

5.5.1. Engineering Analysis

| FCC PROVISSIONS | ANALYSIS ON COMPLIANCE |
|--|--|
| Permitted Type of Devices (alarm systems, door opener, remote switches etc ...) | Remote switches |
| Prohibited Type of Devices (radio control of toys) | Not radio control toys |
| Prohibited Transmission Type (voice, video or data continuous transmission) | Recognition codes to identify other particular component as part of the system |
| A Manually Operated Transmitter (shall employ with the switch that automatically deactivate the transmitter within 5 seconds of being released) | The transmitter will send 40 pulses after an automatic activation. The transmission will be automatically deactivated after a maximum duration of 4.9 seconds. Please refer to the attached Technical Description. |
| Periodic Transmissions: at regular predetermined intervals are not permitted. However, polling or supervision transmissions to determine system integrity of transmitter used in security or safety applications are allowed if the periodic rate of transmission does not exceed one transmission of not more than one second duration per hour for the transmitter Internal Radiators which are not employed for radio control purposes during emergencies involving fire, security, and safety of life, when activated to signal an alarm, may operate during the pendency of the alarm condition. | This device is not a periodic transmitter with regular predetermined intervals. |

- Accreditation: FCC & NVLAP (USA), ACA (Australia), VCCI (Japan), ITI (UK), ACC-LAB (Canada, Europe/APEC/Canada MRA)
- All test results contained in this engineering test report are traceable to National Institute of Standards and Technology (NIST)

5.6. 433.92 MHZ TRANSMITTER - RADIATED EMISSIONS @ 3 METERS, FCC CFR 47, PARA. 15.231(A), 15.209 & 15.205

5.6.1. Limits

The RF radiated emissions measured at 3 Meter distance shall not exceed the field strength below:

| Fundamental Frequency (MHz) | Average Field Strength Limits (µV/m) | |
|--------------------------------|--------------------------------------|-------------------|
| | Fundamental | Harmonic/Spurious |
| 260 - 470 MHz | 3750 - 12,500 | 375 - 1250 |

LIMIT @ 433.92 MHz = 80.8 dBuV/m at 3 meters

HARMONIC/SPURIOUS LIMIT (outside restricted bands) = 60.8 dBuV/m

All other emissions inside restricted bands specified in @ 15.205(a) shall not exceed the general radiated emission limits specified in @ 15.209(a)

Remarks:

- Applies to harmonics/spurious emissions that fall in the restricted bands listed in Section 15.205. The maximum permitted average field strength is listed in Section 15.209.
- @ **FCC CFR 47, Para. 15.237(c)** - The emission limits as specified above are based on measurement instrument employing an average detector. The provisions in @ **15.35** for limiting peak emissions apply.

FCC CFR 47, Part 15, Subpart C, Para. 15.205(a) - Restricted Frequency Bands

| MHz | MHz | MHz | GHz |
|-----------------|-------------------|---------------|---------------|
| 0.090 - 0.110 | 162.0125 - 167.17 | 2310 - 2390 | 9.3 - 9.5 |
| 0.49 - 0.51 | 167.72 - 173.2 | 2483.5 - 2500 | 10.6 - 12.7 |
| 2.1735 - 2.1905 | 240 - 285 | 2655 - 2900 | 13.25 - 13.4 |
| 8.362 - 8.366 | 322 - 335.4 | 3260 - 3267 | 14.47 - 14.5 |
| 13.36 - 13.41 | 399.9 - 410 | 3332 - 3339 | 14.35 - 16.2 |
| 25.5 - 25.67 | 608 - 614 | 3345.8 - 3358 | 17.7 - 21.4 |
| 37.5 - 38.25 | 960 - 1240 | 3600 - 4400 | 22.01 - 23.12 |
| 73 - 75.4 | 1300 - 1427 | 4500 - 5250 | 23.6 - 24.0 |
| 108 - 121.94 | 1435 - 1626.5 | 5350 - 5460 | 31.2 - 31.8 |
| 123 - 138 | 1660 - 1710 | 7250 - 7750 | 36.43 - 36.5 |
| 149.9 - 150.05 | 1718.8 - 1722.2 | 8025 - 8500 | Above 38.6 |
| 156.7 - 156.9 | 2200 - 2300 | 9000 - 9200 | |

- Accreditation: FCC & NVLAP (USA), ACA (Australia), VCCI (Japan), ITI (UK), ACC-LAB (Canada, Europe/APEC/Canada MRA)
- All test results contained in this engineering test report are traceable to National Institute of Standards and Technology (NIST)

FCC CFR 47, Part 15, Subpart C, Para. 15.209(a)
-- Field Strength Limits within Restricted Frequency Bands --

| FREQUENCY (MHz) | FIELD STRENGTH LIMITS (microvolts/m) | DISTANCE (Meters) |
|----------------------------|---|------------------------------|
| 0.009 - 0.490 | 2,400 / F (KHz) | 300 |
| 0.490 - 1.705 | 24,000 / F (KHz) | 30 |
| 1.705 - 30.0 | 30 | 30 |
| 30 - 88 | 100 | 3 |
| 88 - 216 | 150 | 3 |
| 216 - 960 | 200 | 3 |
| Above 960 | 500 | 3 |

5.6.2. Method of Measurements

Refer to Exhibit 8, Sec. 7.2 of this test report & ANSI C63-4:1992

Applies to harmonics/spurious that fall in the restricted bands listed in Section 15.205. the maximum permitted average field strength is listed in Section 15.209. A Pre-Amp and highpass filter are used for this measurement.

- For measurements from 9 KHz to 150 KHz, set RBW = 200 Hz, VBW \geq RBW, SWEEP=AUTO.
- For measurements from 150 KHz to 30 MHz, set RBW = 10 KHz, VBW \geq RBW, SWEEP=AUTO.
- For measurements from 30 MHz to 1 GHz, set RBW = 100 KHz, VBW \geq RBW, SWEEP=AUTO.
- For measurement above 1 GHz, set RBW = 1 MHz, VBW = 1 MHz, SWEEP=AUTO.

If the emission is pulsed, modified the unit for continuous operation, then use the settings above for measurements, then correct the reading by subtracting the peak-average correction factor derived from the appropriate duty cycle calculation. See Section 15.35(b) and (c).

5.6.3. Test Equipment List

| Test Instruments | Manufacturer | Model No. | Serial No. | Frequency Range |
|---|---------------------|------------------|--------------------------|-----------------------------|
| Spectrum Analyzer/ EMI Receiver | Hewlett Packard | HP 8593EM | 3412A00103 | 9 kHz – 26.5 GHz |
| Peak Power Meter & Peak Power Sensor | Hewlett Packard | 8900 8481A | 2131A00124 2551A01965 | 0.1-18 GHz 50 Ohms Input |
| Microwave Amplifier | Hewlett Packard | HP 83017A | | 1 GHz to 26.5 GHz |
| Active Loop Antenna | EMCO | 6507 | 8906-1167 | 1 kHz – 30 MHz |
| Log Periodic/Bow-Tie Antenna | EMCO | 3143 | 1029 | 20 - 1000 MHz |
| Horn Antenna | EMCO | 3155 | 9701-5061 | 1 GHz – 18 GHz |

5.6.4. Photograph of Test Setup

Please refer to Photos # 1 through #3 (tested at 3 meter distance) for Measurements data

ULTRATECH GROUP OF LABS

3000 Bristol Circle, Oakville, Ontario, Canada L6H 6G4

Tel. #: 905-829-1570, Fax. #: 905-829-8050, Email: vic@ultratech-labs.com, Website: <http://www.ultratech-labs.com>

File #: LYT-0031

April 12, 2

- Accreditation: FCC & NVLAP (USA), ACA (Australia), VCCI (Japan), ITI (UK), ACC-LAB (Canada, Europe/APEC/Canada MRA)
- All test results contained in this engineering test report are traceable to National Institute of Standards and Technology (NIST)

5.6.5. Test Data

The emissions were scanned from 10 MHz to 5 GHz and all emissions less 30 dB below the limits were recorded.

Notes:

- Transmitter was placed in three different orthogonal position for searching maximum field strength level.
- In the restricted band per FCC 15.205: Limit (2) per 15.209 is applied
- Outside the restricted band per FCC 15.205: Limit (1) per FCC 15.231(a) or Limit (2) per 15.209 whichever allows higher field strength emission, is applied.
- Duty Cycle = 27.28%
- Peak-to-Average factor = $20 \cdot \log(0.2728) = -11.28$ dB
Please refer to Plot #1 in Annex 1 for detailed measurements.

* Emissions fall in FCC restricted bands @ 15.205.

| FREQUENCY (MHz) | Peak E-FIELD @3m (dBuV/m) | Average E-FIELD @3m (dBuV/m) | ANTENNA PLANE (V/H) | Average (1) LIMIT @3m (dBuV/m) | Restricted (2) Band Limits @3m (dBuV/m) | MARGIN (dB) | (Pass/Fail) |
|--------------------|------------------------------------|---------------------------------------|---------------------------|---|--|----------------|-------------|
| 433.92 | 73.2 | 61.9 | V | 80.8 | 46.0 | -18.9 | PASS |
| 433.92 | 67.3 | 56.0 | H | 80.8 | 46.0 | -24.8 | PASS |
| 867.84 | 52.4 | 41.1 | V | 60.8 | 46.0 | -19.7 | PASS |
| 867.84 | 45.7 | 34.4 | H | 60.8 | 46.0 | -26.4 | PASS |
| 1301.76 | 39.6 | 28.3 | V | 60.8 | 54.0 | -25.7 | *PASS |
| 1301.76 | 40.3 | 29.0 | H | 60.8 | 54.0 | -25.0 | PASS |
| 1735.68 | 41.9 | 30.6 | V | 60.8 | 54.0 | -30.2 | PASS |
| 1735.68 | 42.4 | 31.1 | H | 60.8 | 54.0 | -29.7 | PASS |
| 2169.60 | 49.9 | 38.6 | V | 60.8 | 54.0 | -22.2 | PASS |
| 2169.60 | 51.3 | 40.0 | H | 60.8 | 54.0 | -20.8 | PASS |
| 2603.52 | 46.8 | 35.5 | V | 60.8 | 54.0 | -25.3 | PASS |
| 2603.52 | 49.5 | 38.2 | H | 60.8 | 54.0 | -22.6 | PASS |
| 3471.36 | 46.8 | 35.5 | V | 60.8 | 54.0 | -25.3 | PASS |
| 3471.36 | 47.8 | 36.5 | H | 60.8 | 54.0 | -24.3 | PASS |
| 3905.28 | 47.6 | 36.3 | V | 60.8 | 54.0 | -17.7 | *PASS |
| 3905.28 | 47.9 | 36.6 | H | 60.8 | 54.0 | -17.4 | *PASS |
| 4339.20 | 46.9 | 35.6 | V | 60.8 | 54.0 | -18.4 | *PASS |
| 4339.20 | 53.0 | 41.7 | H | 60.8 | 54.0 | -12.3 | *PASS |

ULTRATECH GROUP OF LABS


3000 Bristol Circle, Oakville, Ontario, Canada L6H 6G4

Tel. #: 905-829-1570, Fax. #: 905-829-8050, Email: vic@ultratech-labs.com, Website: <http://www.ultratech-labs.com>

File #: LYT-0031

April 12, 2012

- Accreditation: FCC & NVLAP (USA), ACA (Australia), VCCI (Japan), ITI (UK), ACC-LAB (Canada, Europe/APEC/Canada MRA)
- All test results contained in this engineering test report are traceable to National Institute of Standards and Technology (NIST)

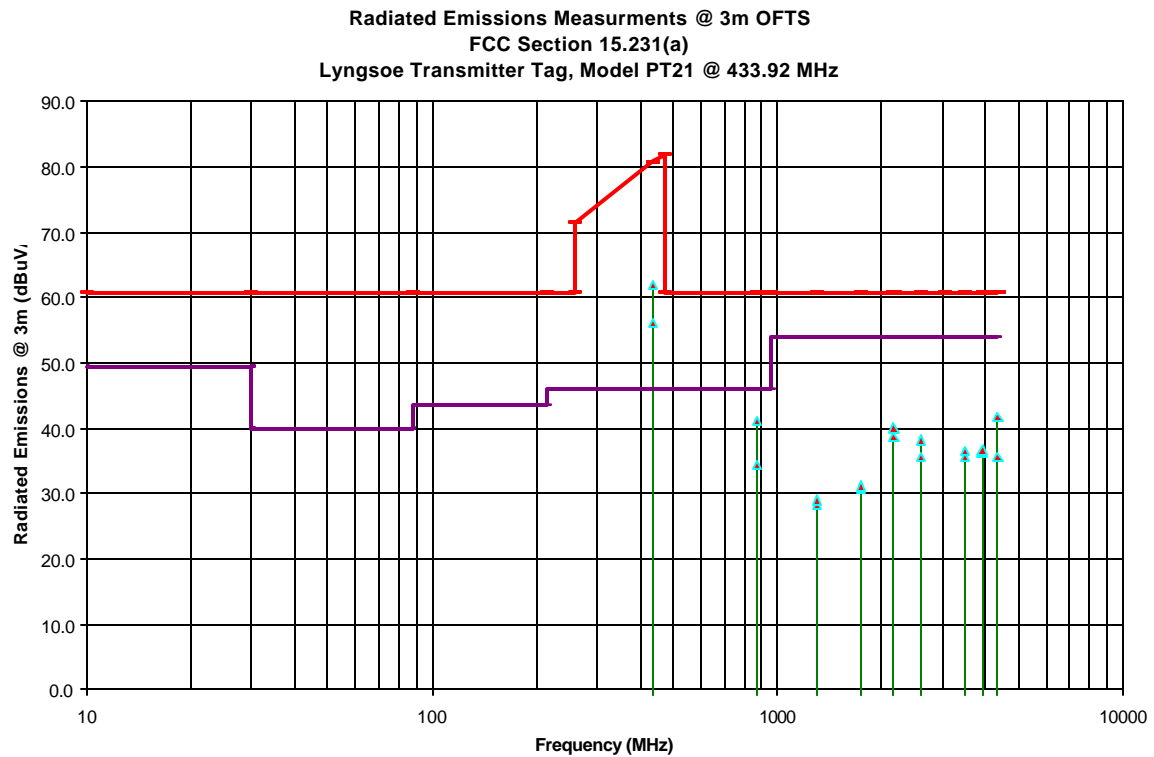

ULTRATECH GROUP OF LABS

3000 Bristol Circle, Oakville, Ontario, Canada L6H 6G4

Tel. #: 905-829-1570, Fax. #: 905-829-8050, Email: vic@ultratech-labs.com, Website: <http://www.ultratech-labs.com>

File #: LYT-0031

April 12, 2012

- Accreditation: FCC & NVLAP (USA), ACA (Australia), VCCI (Japan), ITI (UK), ACC-LAB (Canada, Europe/APEC/Canada MRA)
- All test results contained in this engineering test report are traceable to National Institute of Standards and Technology (NIST)

5.7. 433.92 MHZ TRANSMITTER - 20 DB BANDWIDTH @ FCC CFR 47, PARA. 15.231(C)

5.7.1. Limits

The 20dB bandwidth of the emission shall be no more than 0.25% of the centre frequency for devices operating above 70MHz.

5.7.2. Method of Measurements

Refer to FCC 15.231(a)(c) & ANSI C63-4:1992

The transmitter output was loosely coupled to the spectrum analyzer through a receiving antenna and the bandwidth of bandwidth of the fundamental frequency was measured with the spectrum analyzer with the resolution bandwidth of the spectrum analyzer set per ANSI 63-4:1992, Sec. 13.1.6.2

5.7.3. Test Equipment List

| Test Instruments | Manufacturer | Model No. | Serial No. | Frequency Range |
|------------------------------------|--------------------|-----------|------------|------------------|
| Spectrum Analyzer/ EMI Receiver | Hewlett Packard | HP 8593EM | 3412A00103 | 9 kHz – 26.5 GHz |

5.7.4. Plots

Please refer to Plot # 2 Annex 1 for Measurements data

5.7.5. Test Data

| CHANNEL FREQUENCY (MHz) | 20 dB BANDWIDTH (kHz) | MAXIMUM LIMIT (kHz) | PASS/FAIL |
|-------------------------------|--------------------------|------------------------|-----------|
| 433.92 | 40.3 | 1085 | PASS |

ULTRATECH GROUP OF LABS

3000 Bristol Circle, Oakville, Ontario, Canada L6H 6G4
Tel. #: 905-829-1570, Fax. #: 905-829-8050, Email: vic@ultratech-labs.com, Website: <http://www.ultratech-labs.com>

File #: LYT-0031
April 12, 2012

- Accreditation: FCC & NVLAP (USA), ACA (Australia), VCCI (Japan), ITI (UK), ACC-LAB (Canada, Europe/APEC/Canada MRA)
- All test results contained in this engineering test report are traceable to National Institute of Standards and Technology (NIST)

EXHIBIT 6. MEASUREMENT UNCERTAINTY

The measurement uncertainties stated were calculated in accordance with the requirements of NIST Technical Note 1297 and NIS 81 (1994)

6.1. RADIATED EMISSION MEASUREMENT UNCERTAINTY

| CONTRIBUTION (Radiated Emissions) | PROBABILITY DISTRIBUTION | UNCERTAINTY (\pm dB) | |
|---|-----------------------------|-------------------------|---------------|
| | | 3 m | 10 m |
| Antenna Factor Calibration | Normal (k=2) | ± 1.0 | ± 1.0 |
| Cable Loss Calibration | Normal (k=2) | ± 0.3 | ± 0.5 |
| EMI Receiver specification | Rectangular | ± 1.5 | ± 1.5 |
| Antenna Directivity | Rectangular | ± 0.5 | ± 0.5 |
| Antenna factor variation with height | Rectangular | ± 2.0 | ± 0.5 |
| Antenna phase center variation | Rectangular | 0.0 | ± 0.2 |
| Antenna factor frequency interpolation | Rectangular | ± 0.25 | ± 0.25 |
| Measurement distance variation | Rectangular | ± 0.6 | ± 0.4 |
| Site imperfections | Rectangular | ± 2.0 | ± 2.0 |
| Mismatch: Receiver VRC $\Gamma_1 = 0.2$ Antenna VRC $\Gamma_R = 0.67(\text{Bi}) 0.3 (\text{Lp})$ Uncertainty limits $20\text{Log}(1 \pm \Gamma_1 \Gamma_R)$ | U-Shaped | +1.1 -1.25 | ± 0.5 |
| System repeatability | Std. Deviation | ± 0.5 | ± 0.5 |
| Repeatability of EUT | | - | - |
| Combined standard uncertainty | Normal | +2.19 / -2.21 | +1.74 / -1.72 |
| Expanded uncertainty U | Normal (k=2) | +4.38 / -4.42 | +3.48 / -3.44 |

Calculation for maximum uncertainty when 3m biconical antenna including a factor of k=2 is used:

$$U = 2u_c(y) = 2x(+2.19) = +4.38 \text{ dB} \quad \text{And} \quad U = 2u_c(y) = 2x(-2.21) = -4.42 \text{ dB}$$

ULTRATECH GROUP OF LABS

3000 Bristol Circle, Oakville, Ontario, Canada L6H 6G4

Tel. #: 905-829-1570, Fax. #: 905-829-8050, Email: vic@ultratech-labs.com, Website: <http://www.ultratech-labs.com>

File #: LYT-0031

April 12, 2012

- Accreditation: FCC & NVLAP (USA), ACA (Australia), VCCI (Japan), ITI (UK), ACC-LAB (Canada, Europe/APEC/Canada MRA)
- All test results contained in this engineering test report are traceable to National Institute of Standards and Technology (NIST)

EXHIBIT 7. MEASUREMENT METHODS

7.1. GENERAL TEST CONDITIONS

The following test conditions shall be applied throughout the tests covered in this report.

7.1.1. Normal temperature and humidity

- Normal temperature: +15°C to +35°C
- Relative Humidity: +20% to 75%

The actual values during tests shall be recorded in the test report.

7.1.2. Normal power source

7.1.2.1. Mains Voltage

The nominal test voltage of the equipment to be connected to mains shall be the nominal mains voltage which is the declared voltage or any of the declared voltages for which the equipment was designed.

The frequency of test power source corresponding to the AC mains shall be between 59 Hz and 61 Hz.

7.1.2.2. Battery Power Source.

For operation from battery power sources, the nominal test voltage shall be as declared by the equipment manufacturer. This shall be recorded in the test report.

7.1.3. Operating Condition of Equipment under Test

- All tests were carried out while the equipment operated at the following frequencies:
 - The lowest operating frequency,
 - The middle operating frequency and
 - The highest operating frequency
- Modulation were applied using the Test Data sequence
- The transmitter was operated at the highest output power, or in the case the equipment able to operate at more than one power level, at the lowest and highest output powers

ULTRATECH GROUP OF LABS

3000 Bristol Circle, Oakville, Ontario, Canada L6H 6G4
Tel. #: 905-829-1570, Fax. #: 905-829-8050, Email: vic@ultratech-labs.com, Website: <http://www.ultratech-labs.com>

File #: LYT-0031
April 12, 2012

- Accreditation: FCC & NVLAP (USA), ACA (Australia), VCCI (Japan), ITI (UK), ACC-LAB (Canada, Europe/APEC/Canada MRA)
- All test results contained in this engineering test report are traceable to National Institute of Standards and Technology (NIST)

7.2. RADIATED EMISSIONS

For both conducted and radiated measurements, the spurious emissions were scanned from the lowest frequency generated by the EUT or 10 MHz whichever is lower to 10th harmonic of the highest frequency generated by the EUT.

- The radiated emission measurements were performed at the UltraTech's 3 Meter Open Field Test Site (OFTS) situated in the Town of Oakville, province of Ontario. The Attenuation Characteristics of OFTS have been filed to FCC, Industry Canada, ACA/Austel, NVLap and ITI.
- Radiated emissions measurements were made using the following test instruments:
 1. Calibrated EMCO BiconiLog antenna in the frequency range from 30 MHz to 2000 MHz.
 2. Calibrated Emco Horn antennas in the frequency range above 1000 MHz (1GHz - 40 GHz).
 3. The test is required for any spurious emission or modulation product that falls in a Restricted Band, as defined in Section 15.205. It must be performed with the highest gain of each type of antenna proposed for use with the EUT. Use the following spectrum analyzer settings:
 - RBW = 100 kHz for $f < 1\text{GHz}$ and RBW = 1 MHz for $f \geq 1\text{ GHz}$
 - VBW = RBW
 - Sweep = auto
 - Detector function = peak
 - Trace = max hold
 - Follows the guidelines in ANSI C63.4-1992 with respect to maximizing the emission by rotating the EUT, measuring the emission while the EUT is situated in three orthogonal planes (if appropriate), adjusting the measurement antenna height and polarization, etc.. A pre-amp and highpass filter are required for this test, in order to provide the measuring system with sufficient sensitivity.
 - Allow the trace to stabilize.
 - The peak reading of the emission, after being corrected by the antenna correction factor, cable loss, pre-amp gain, etc.... is the peak field strength which comply with the limit specified in Section 15.35(b)

Calculation of Field Strength:

The field strength is calculated by adding the calibrated antenna factor and cable factor, and subtracting the Amplifier gain (if any) from the measured reading. The basic equation with a sample calculation is as follows:

$$FS = RA + AF + CF - AG$$

| | | | |
|-------|----|---|---------------------------|
| Where | FS | = | Field Strength |
| | RA | = | Receiver/Analyzer Reading |
| | AF | = | Antenna Factor |
| | CF | = | Cable Attenuation Factor |
| | AG | = | Amplifier Gain |

Example: If a receiver reading of 60.0 dBuV is obtained, the antenna factor of 7.0 dB/m and cable factor of 1.0 dB are added, and the amplifier gain of 30 dB is subtracted. The actual field strength will be:

Field Level = $60 + 7.0 + 1.0 - 30 = 38.0\text{ dBuV/m}$.

Field Level = $10^{(38/20)} = 79.43\text{ uV/m}$.

- Submit this test data

ULTRATECH GROUP OF LABS

3000 Bristol Circle, Oakville, Ontario, Canada L6H 6G4
Tel. #: 905-829-1570, Fax. #: 905-829-8050, Email: vic@ultratech-labs.com, Website: <http://www.ultratech-labs.com>

File #: LYT-0031
April 12, 2012

- Accreditation: FCC & NVLAP (USA), ACA (Australia), VCCI (Japan), ITI (UK), ACC-LAB (Canada, Europe/APEC/Canada MRA)
- All test results contained in this engineering test report are traceable to National Institute of Standards and Technology (NIST)

- Now set the VBW to 10Hz, while maintaining all of the other instrument settings. This peak level, once corrected, must comply with the limit specified in Section 15.209. If the dwell time per channel of the hopping signal is less than 100ms, then the reading obtained may be further adjusted by a “duty cycle correction factor”, derived from $10\log(\text{dwell time}/100\text{mS})$ in an effort to demonstrate compliance with the 15.209.
- Submit test data

Maximizing The Radiated Emissions :

- The frequencies of emissions was first detected. Then the amplitude of the emissions was measured at the specified measurement distance using required antenna height, polarization, and detector characteristics.
- During this process, cables and peripheral devices were manipulated within the range of likely configuration.
- For each mode of operation required to be tested, the frequency spectrum was monitored. Variations in antenna heights (from 1 meter to 4 meters above the ground plane), antenna polarization (horizontal plane and vertical plane), cable placement and peripheral placement were explored to produce the highest amplitude signal relative to the limit.

The maximum radiated emission for a given mode of operation was found by using the following step-by-step procedure:

- Step1: Monitor the frequency range of interest at a fixed antenna height and EUT azimuth.
- Step2: Manipulate the system cables to produce highest amplitude signal relative to the limit. Note the amplitude and frequency of the suspect signal.
- Step3: Rotate the EUT 360 degrees to maximize the suspected highest amplitude signal. If the signal or another at a different frequency is observed to exceed the previously noted highest amplitude signal by 1 dB or more, go back to the azimuth and repeat Step 2. Otherwise, orient the EUT azimuth to repeat the highest amplitude observation and proceed.
- Step4: Move the antenna over its full allowable range of travel (1 to 4 meters) to maximize the suspected highest amplitude signal. If the signal or another at a different frequency is observed to exceed the previously noted highest amplitude signal by 1 dB or more, return to Step 2 with the highest amplitude observation and proceed.
- Step5: Change the polarization of the antenna and repeat Step 2 through 4. Compare the resulting suspected highest amplitude signal with that found for the other polarization. Select and note the higher of the two signals. This signal is termed the highest observed signal with respect to the limit for this EUT operational mode.
- Step6: The effects of various modes of operation is examined. This is done by varying the equipment modes as steps 2 through 5 are being performed.
- Step7: After completing steps 1 through 6, record the final highest emission level, frequency, antenna polarization and detector mode of the measuring instrument.

ULTRATECH GROUP OF LABS

3000 Bristol Circle, Oakville, Ontario, Canada L6H 6G4
Tel. #: 905-829-1570, Fax. #: 905-829-8050, Email: vic@ultratech-labs.com, Website: <http://www.ultratech-labs.com>

File #: LYT-0031
April 12, 2012

- Accreditation: FCC & NVLAP (USA), ACA (Australia), VCCI (Japan), ITI (UK), ACC-LAB (Canada, Europe/APEC/Canada MRA)
- All test results contained in this engineering test report are traceable to National Institute of Standards and Technology (NIST)