

FCC PART 15.407 TEST REPORT

For

Winner Wave Limited

4F-5, No.736, Jhongheng Road, Jhonghe Dist., New Taipei City, Taiwan

FCC ID: 2ADFSTYWPR1

Report Type: Original Report	Product Type: Wireless Presentation System
Report Number: <u>RSZ200717003-00C</u>	
Report Date: <u>2020-09-11</u>	
Nancy Wang 	
Reviewed By: <u>RF Engineer</u>	
Prepared By: Bay Area Compliance Laboratories Corp. (Shenzhen) 6/F., West Wing, Third Phase of Wanli Industrial Building, Shihua Road, Futian Free Trade Zone, Shenzhen, Guangdong, China Tel: +86-755-33320018 Fax: +86-755-33320008 www.baclcorp.com.cn	

Note: This report may contain data that are not covered by the A2LA accreditation and are marked with an asterisk "★".

BACL is not responsible for the authenticity of any test data provided by the applicant. Data included from the applicant that may affect test results are marked with an asterisk '*'. Customer model name, addresses, names, trademarks etc. are not considered data.

This report cannot be reproduced except in full, without prior written approval of the Company. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested. This report is valid only with a valid digital signature. The digital signature may be available only under the Adobe software above version 7.0.

TABLE OF CONTENTS

GENERAL INFORMATION.....	4
PRODUCT DESCRIPTION FOR EQUIPMENT UNDER TEST (EUT)	4
OBJECTIVE	4
TEST METHODOLOGY	4
MEASUREMENT UNCERTAINTY	5
TEST FACILITY	5
SYSTEM TEST CONFIGURATION.....	6
DESCRIPTION OF TEST CONFIGURATION	6
EUT EXERCISE SOFTWARE	7
DUTY CYCLE	7
EQUIPMENT MODIFICATIONS	8
SUPPORT EQUIPMENT LIST AND DETAILS	8
EXTERNAL I/O CABLE.....	8
BLOCK DIAGRAM OF TEST SETUP	9
SUMMARY OF TEST RESULTS.....	10
TEST EQUIPMENT LIST	11
§1.1307 (b) (1) & §2.1091- MAXIMUM PERMISSIBLE EXPOSURE (MPE)	13
APPLICABLE STANDARD	13
RESULT	13
FCC §15.203 – ANTENNA REQUIREMENT	15
APPLICABLE STANDARD	15
ANTENNA CONNECTOR CONSTRUCTION	15
FCC §15.407 (b) (6) §15.207 (a) – CONDUCTED EMISSIONS	16
APPLICABLE STANDARD	16
EUT SETUP.....	16
EMI TEST RECEIVER SETUP.....	16
TEST PROCEDURE	16
TEST DATA	17
§15.205 & §15.209 & §15.407(B) (1), (4), (6), (7) – UNDESIRABLE EMISSION	20
APPLICABLE STANDARD	20
EUT SETUP	20
EMI TEST RECEIVER & SPECTRUM ANALYZER SETUP	21
TEST PROCEDURE	21
CORRECTED AMPLITUDE & MARGIN CALCULATION	22
TEST DATA	22
FCC §15.407(a) (1) – 26 dB & 6dB EMISSION BANDWIDTH.....	35
APPLICABLE STANDARD	35
TEST PROCEDURE	35
TEST DATA	36
FCC §15.407(a) (1) (3) – CONDUCTED TRANSMITTER OUTPUT POWER	37
APPLICABLE STANDARD	37
TEST PROCEDURE	37
TEST DATA	38

FCC §15.407(a) (1) (3) - POWER SPECTRAL DENSITY	39
APPLICABLE STANDARD	39
TEST PROCEDURE	39
TEST DATA	40
APPENDIX	41
APPENDIX A1: EMISSION BANDWIDTH	41
APPENDIX A2: OCCUPIED CHANNEL BANDWIDTH	52
APPENDIX A3: MIN EMISSION BANDWIDTH	73
APPENDIX B: MAXIMUM CONDUCTED OUTPUT POWER	84
APPENDIX C: MAXIMUM POWER SPECTRAL DENSITY	86
APPENDIX D: DUTY CYCLE.....	107

GENERAL INFORMATION

Product Description for Equipment under Test (EUT)

Product	Wireless Presentation System
Model	TY-WPR1
Frequency Range	5G Wi-Fi: 5150-5250 MHz; 5725-5850 MHz
Maximum conducted output power	Wi-Fi: 5150-5250 MHz: 11.37dBm (802.11a), 11.44dBm(802.11n20), 11.87 dBm(802.11n40) 11.44dBm (802.11ac20), 11.89dBm(802.11 ac40), 11.41dBm(802.11 ac80) 5725-5850 MHz: 11.70dBm (802.11a), 11.66dBm(802.11n20), 12.20dBm(802.11n40) 11.69dBm (802.11ac20), 12.23dBm(802.11 ac40), 11.89dBm(802.11 ac80)
Modulation Technique	OFDM
Antenna Specification	4.42 dBi
Voltage Range	DC 5.0V from adapter
Date of Test	2020-07-29 to 2020-08-29
Sample serial number	RSZ200717003-RF-S1 (Assigned by BACL, Shenzhen)
Received date	2020-07-17
Sample/EUT Status	Good condition
Adapter information	Model: ICP12-050-2000B Input: AC 100-240V, 50/60Hz, 0.3A Output: DC 5.0V, 2.0A, 10.0W

Objective

This test report is in accordance with Part 2-Subpart J, Part 15-Subparts A and E of the Federal Communication Commissions rules.

The tests were performed in order to determine compliance with FCC Part 15, Subpart E, section 15.203, 15.205, 15.207, 15.209 and 15.407 rules.

Test Methodology

All measurements contained in this report were conducted with ANSI C63.10-2013, American National Standard of Procedures for Compliance Testing of Unlicensed Wireless Devices. And KDB789033D02 General U-NII Test Procedures New Rules v02r01.

All emissions measurement was performed at Bay Area Compliance Laboratories Corp. (Shenzhen). The radiated testing was performed at an antenna-to-EUT distance of 3 meters.

Measurement Uncertainty

Parameter		Uncertainty
Occupied Channel Bandwidth		±5%
RF Output Power with Power meter		±0.73dB
RF conducted test with spectrum		±1.6dB
AC Power Lines Conducted Emissions		±1.95dB
Emissions, Radiated	Below 1GHz	±4.75dB
	Above 1GHz	±4.88dB
Temperature		±1 °C
Humidity		±6%
Supply voltages		±0.4%

Note: The extended uncertainty given in this report is obtained by combining the standard uncertainty times the coverage factor K with the 95% confidence interval. Otherwise required by the applicant or Product Regulations, Decision Rule in this report did not consider the uncertainty.

Test Facility

The Test site used by Bay Area Compliance Laboratories Corp. (Shenzhen) to collect test data is located on the 6/F., West Wing, Third Phase of Wanli Industrial Building, Shihua Road, Futian Free Trade Zone, Shenzhen, Guangdong, China.

The test site has been approved by the FCC under the KDB 974614 D01 and is listed in the FCC Public Access Link (PAL) database, FCC Registration No.: 342867, the FCC Designation No.: CN1221.

The test site has been registered with ISED Canada under ISED Canada Registration Number 3062B.

SYSTEM TEST CONFIGURATION

Description of Test Configuration

The device supports Beamforming and non-beamforming mode for 5G Wi-Fi. And these two modes share the same power declared by the applicant.

The EUT has two antennas for 5G Wi-Fi, it can operate in 802.11a/n20/n40/ac20/ac40/ac80 modes.

For 5150-5250MHz Band, 7 channels are provided to testing:

Channel	Frequency (MHz)	Channel	Frequency (MHz)
36	5180	44	5220
38	5190	46	5230
40	5200	48	5240
42	5210	/	/

For 802.11a, 802.11n20, 802.11ac20 channel 36, 40, 48 were tested; For 802.11n40, 802.11ac40 channel 38,

46 were tested; For 802.11ac80, channel 42 was tested.

For 5725-5850MHz Band, 8 channels are provided to testing:

Channel	Frequency (MHz)	Channel	Frequency (MHz)
149	5745	157	5785
151	5755	159	5795
153	5765	161	5805
155	5775	165	5825

For 802.11a, 802.11n20, 802.11ac20 channel 149, 157, 165 were tested; For 802.11n40, 802.11ac40 channel 151, 159 were tested; For 802.11ac80, channel 155 was tested.

EUT Exercise Software

“REALTEK 11ac 8821CU USB WLAN NIC Massproduction Kit” exercise software was used.

Test frequencies and power level were configured as below:

U-NII	Mode	Frequency (MHz)	Rate (Mbps)	Power Level
5150 – 5250MHz	802.11 a	5180	6	30
		5200	6	30
		5240	6	30
	802.11 n20	5180	MCS0	30
		5200	MCS0	30
		5240	MCS0	30
	802.11 n40	5190	MCS0	30
		5230	MCS0	30
	802.11 ac20	5180	MCS0	30
		5200	MCS0	30
		5240	MCS0	30
	802.11 ac40	5190	MCS0	30
		5230	MCS0	30
	802.11 ac8	5210	MCS0	30
5725 – 5850MHz	802.11 a	5745	6	30
		5785	6	30
		5825	6	30
	802.11 n20	5745	MCS0	30
		5785	MCS0	30
		5825	MCS0	30
	802.11 n40	5755	MCS0	30
		5795	MCS0	30
	802.11 ac20	5745	MCS0	30
		5785	MCS0	30
		5825	MCS0	30
	802.11 ac40	5755	MCS0	30
		5795	MCS0	30
	802.11 ac80	5775	MCS0	30

Note 1: The two antenna ports share the same power level.

Note 2: The worse-case data rates are determined to be as follows for each mode based upon investigations by measuring the output power and PSD across all data rated bandwidths, and modulations. The device supports SISO and MIMO in all modes, per pretest, the MIMO mode was the worst mode for all the modes.

Duty cycle

Test Result: Pass. Please refer to the Appendix.

Equipment Modifications

No modification was made to the EUT tested.


Support Equipment List and Details

Manufacturer	Description	Model	Serial Number
BULL	Socket	GN-212	A37209315081183
DELL	Monitor	ST2420Lb	CN-0X0K27-74261-2AF-090U
SAMSUNG	Monitor	22505	22505
DELL	PC	Latitude E5430	JG3NLV1
Apple	Mobile Phone	ML6N2CH/A	ML6N2CH/A
Panasonic Corporation	Wireless Presentation System	TY-WPB1	TY-WPB1
SAGEM	Wireless Router	SAGEM F@ST™ 2604 White	2604
Rohde & Schwarz	Wideband Radio Communication Tester	CMW500	1201.002K50-146520-wh

External I/O Cable

Cable Description	Length (m)	From Port	To
Unshielded Un-detachable AC Cable	1.0	Socket	LISN
Unshielded Un-detachable DC Cable	1.0	Adapter	EUT
Unshielded Detachable AC Cable	1.0	Monitor	Mains
Unshielded Detachable HDMI Cable	1.0	Monitor	EUT
Unshielded detachable RJ45 cable	10.0	EUT	NET

Block Diagram of Test Setup

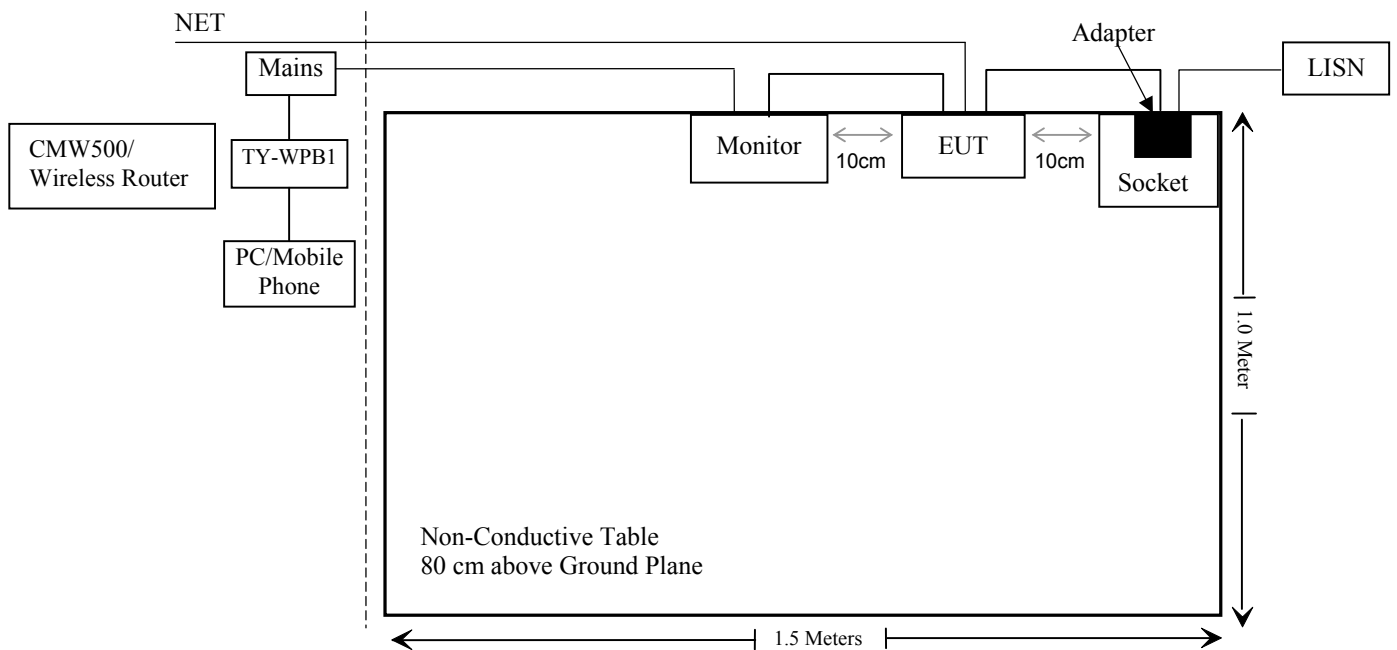

SUMMARY OF TEST RESULTS

FCC Rules	Description of Test	Result
§1.1307 (b) (1) & §2.1091	Maximum Permissible exposure (MPE)	Compliance
§15.203	Antenna Requirement	Compliance
§15.407(b)(6)& §15.207(a)	Conducted Emissions	Compliance
§15.205& §15.209 &§15.407(b) (1), (4),(7)	Undesirable Emission& Restricted Bands	Compliance
§15.407(a) (1), (5),(e)	26 dB Emission Bandwidth & 6dB Bandwidth	Compliance
§15.407(a)(1),(3)	Conducted Transmitter Output Power	Compliance
§15.407 (a)(1),(3)	Power Spectral Density	Compliance

TEST EQUIPMENT LIST

Manufacturer	Description	Model	Serial Number	Calibration Date	Calibration Due Date
Conducted Emissions Test					
Rohde & Schwarz	EMI Test Receiver	ESCI	101120	2020/7/9	2021/7/8
Rohde & Schwarz	LISN	ENV216	101613	2020/1/22	2021/1/21
Rohde & Schwarz	Transient Limiter	ESH3Z2	DE25985	2019/11/29	2020/11/28
Unknown	CE Cable	CE Cable	UF A210B-1-0720-504504	2019/11/29	2020/11/28
Rohde & Schwarz	CE Test software	EMC 32	V8.53.0	NCR	NCR
Radiated Emission Test (Below 1G)					
R&S	EMI Test Receiver	ESR3	102455	2020/08/04	2021/08/03
Sonoma instrument	Pre-amplifier	310 N	186238	2020/08/04	2021/08/03
Sunol Sciences	Broadband Antenna	JB1	A040904-1	2017/12/22	2020/12/21
Unknown	Cable 2	RF Cable 2	F-03-EM197	2019/11/29	2020/11/28
Unknown	Cable	Chamber Cable 1	F-03-EM236	2019/11/29	2020/11/28
Rohde & Schwarz	Auto test software	EMC 32	V9.10	NCR	NCR
Radiated Emission Test (Above 1G)					
Rohde & Schwarz	Spectrum Analyzer	FSV40-N	102259	2020/7/22	2021/7/21
COM-POWER	Pre-amplifier	PA-122	181919	2019/11/29	2020/11/28
Quinstar	Amplifier	QLW-18405536-J0	15964001002	2019/11/29	2020/11/28
Sunol Sciences	Horn Antenna	DRH-118	A052604	2017/12/22	2020/12/21
Insulted Wire Inc.	RF Cable	SPS-2503-3150	02222010	2019/11/29	2020/11/28
Unknown	RF Cable	W1101-EQ1 OUT	F-19-EM005	2019/11/29	2020/11/28
Ducommun technologies	RF Cable	RG-214	1	2019/11/12	2020/11/12
Ducommun technologies	RF Cable	RG-214	2	2019/11/12	2020/11/12
SNSD	Band Reject filter	BSF5150-5850MN-0899-004	5G filter	2020/04/20	2021/04/20
Ducommun Technologies	Horn antenna	ARH-4223-02	1007726-02 1304	2017/12/06	2020/12/05
Ducommun Technologies	Horn Antenna	ARH-2823-02	1007726-03	2017/12/6	2020/12/5

Manufacturer	Description	Model	Serial Number	Calibration Date	Calibration Due Date
RF Conducted Test					
Tonscend Corporation	RF control Unit	JS0806-2	19D8060154	2020/7/10	2021/7/9
Rohde & Schwarz	Signal and Spectrum Analyzer	FSV40	101473	2020/7/22	2021/7/21
Unknown	RF Cable	Unknown	2301 276	2019/11/29	2020/11/28
Ducommun technologies	RF Cable	RG-214	3	Each Time	

* **Statement of Traceability:** Bay Area Compliance Laboratories Corp. (Shenzhen) attests that all calibrations have been performed in accordance to requirements that traceable to National Primary Standards and International System of Units (SI).

§1.1307 (b) (1) & §2.1091- MAXIMUM PERMISSIBLE EXPOSURE (MPE)

Applicable Standard

According to subpart 15.247 (i) and subpart 1.1307 (b)(1), 2.1091 systems operating under the provisions of this section shall be operated in a manner that ensures the public is not exposed to RF energy level in excess of the communication guidelines.

Limits for General Population/Uncontrolled Exposure

Limits for General Population/Uncontrolled Exposure				
Frequency Range (MHz)	Electric Field Strength (V/m)	Magnetic Field Strength (A/m)	Power Density (mW/cm ²)	Averaging Time (Minutes)
0.3-1.34	614	1.63	*(100)	30
1.34-30	824/f	2.19/f	*(180/f ²)	30
30-300	27.5	0.073	0.2	30
300-1500	/	/	f/1500	30
1500-100,000	/	/	1.0	30

f = frequency in MHz

* = Plane-wave equivalent power density

Result

Calculated Formulary:

Predication of MPE limit at a given distance

$$S = \frac{PG}{4\pi R^2}$$

S = power density (in appropriate units, e.g. mW/cm²)

P = power input to the antenna (in appropriate units, e.g., mW).

G = power gain of the antenna in the direction of interest relative to an isotropic radiator, the power gain factor, is normally numeric gain.

R = distance to the center of radiation of the antenna (appropriate units, e.g., cm)

For simultaneously transmit system, the calculated power density should comply with:

$$\sum_i \frac{S_i}{S_{Limit,i}} \leq 1$$

Frequency (MHz)	Antenna Gain		Tune up conducted power		Evaluation Distance (cm)	Power Density (mW/cm ²)	MPE Limit (mW/cm ²)
	(dBi)	(numeric)	(dBm)	(mW)			
2402-2480(BT)	3.05	2.02	6.5	4.47	20	0.002	1
2402-2480(BLE)	3.05	2.02	4.5	2.82	20	0.001	1
5150-5250	4.42	2.77	12.0	15.85	20	0.009	1
5725-5850	4.42	2.77	12.5	17.78	20	0.010	1

Note:

- 1) To maintain compliance with the FCC's RF exposure guidelines, place the equipment at least 20cm from nearby persons.
- 2) Bluetooth and 5GHz Wi-Fi can transmit simultaneously for this device.
- 3) Simultaneous transmitting consideration:

The ratio= $MPE_{DSS}/limit + MPE_{NII}/limit = 0.002 + 0.010 = 0.012 < 1.0$, so simultaneous exposure is not required.

Result: Pass

FCC §15.203 – ANTENNA REQUIREMENT

Applicable Standard

According to § 15.203, an intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the provisions of this section. The manufacturer may design the unit so that a broken antenna can be replaced by the user, but the user of a standard antenna jack or electrical connector is prohibited. The structure and application of the EUT were analyzed to determine compliance with section §15.203 of the rules. §15.203 state that the subject device must meet the following criteria:

- a. Antenna must be permanently attached to the unit.
 - b. Antenna must use a unique type of connector to attach to the EUT.
- Unit must be professionally installed, and installer shall be responsible for verifying that the correct antenna is employed with the unit.

And according to FCC 47 CFR section 15.407 (a), if the transmitting antennas of directional gain greater than 6dBi are used, the transmit power and power spectral density shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

Antenna Connector Construction

The EUT has two external antennas for 5G Wi-Fi, which was permanently attached and the antenna gain is 4.42dBi, fulfill the requirement of this section. Please refer to the EUT photos.


Result: Pass

FCC §15.407 (b) (6) §15.207 (a) – CONDUCTED EMISSIONS

Applicable Standard

FCC §15.207, §15.407(b) (6)

EUT Setup

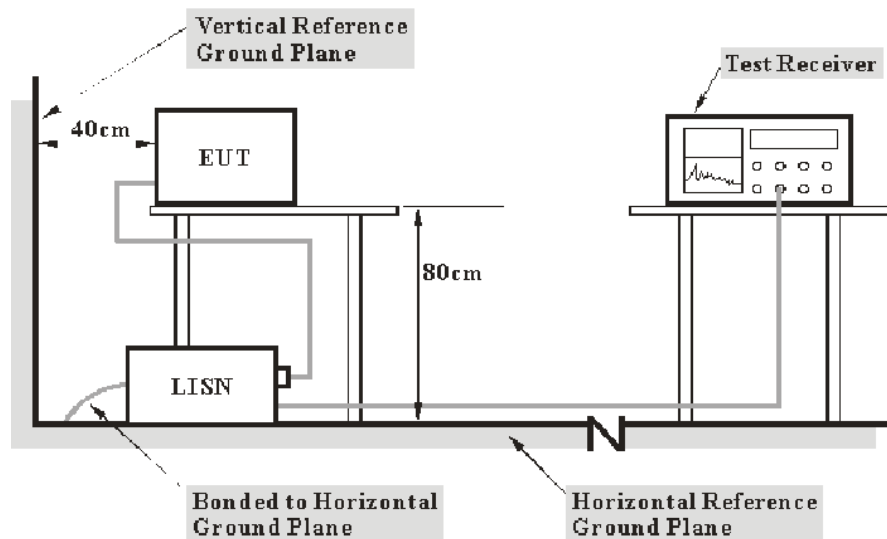

Note: 1. Support units were connected to second LISN.
2. Both of LISNs (AMN) 80 cm from EUT and at the least 80 cm from other units and other metal planes support units.

The setup of EUT is according with per ANSI C63.10-2013 measurement procedure. The specification used was with the FCC Part 15.207 limits.

The spacing between the peripherals was 10 cm.

EMI Test Receiver Setup

The EMI test receiver was set to investigate the spectrum from 150 kHz to 30 MHz.

During the conducted emission test, the EMI test receiver was set with the following configurations:

Frequency Range	IF B/W
150 kHz – 30 MHz	9 kHz

Test Procedure

During the conducted emission test, the adapter was connected to the LISN.

Maximizing procedure was performed on the six (6) highest emissions of the EUT.


All data was recorded in the Quasi-peak and average detection mode.

Test Data**Environmental Conditions**


Temperature:	25 °C
Relative Humidity:	65 %
ATM Pressure:	101.0 kPa

The testing was performed by Haiguo Li on 2020-08-03.

EUT operation mode: Transmitting (the worst case is 5.2G Wi-Fi 802.11n-HT20 Mode, Middle Channel)

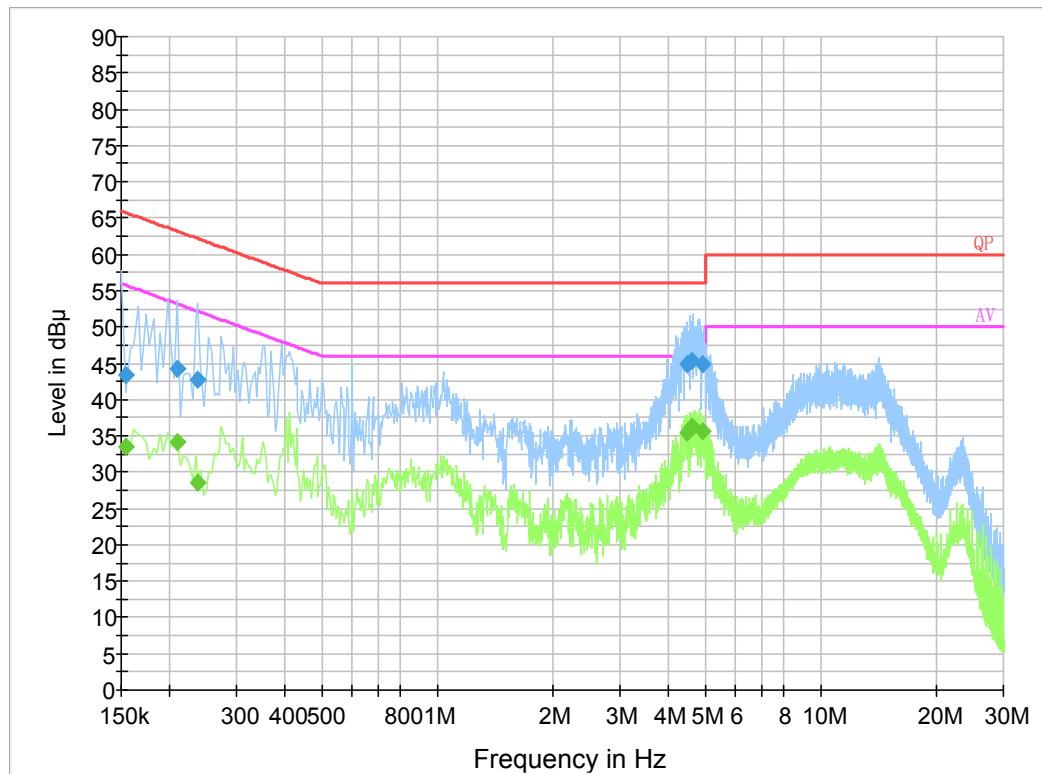AC 120V/60 Hz, Line:

Frequency (MHz)	Corrected Amplitude (dBμV)	Correction Factor (dB)	Limit (dBμV)	Margin (dB)	Detector (PK/Ave./QP)
0.154000	43.4	19.8	65.8	22.4	QP
0.209500	44.3	19.8	63.2	18.9	QP
0.237500	42.7	19.8	62.2	19.5	QP
4.467250	44.9	19.9	56.0	11.1	QP
4.616010	45.4	19.9	56.0	10.6	QP
4.919510	44.9	19.9	56.0	11.1	QP
0.154000	33.5	19.8	55.8	22.3	Ave.
0.209500	34.1	19.8	53.2	19.1	Ave.
0.237500	28.6	19.8	52.2	23.6	Ave.
4.467250	35.4	19.9	46.0	10.6	Ave.
4.616010	36.4	19.9	46.0	9.6	Ave.
4.919510	35.7	19.9	46.0	10.3	Ave.

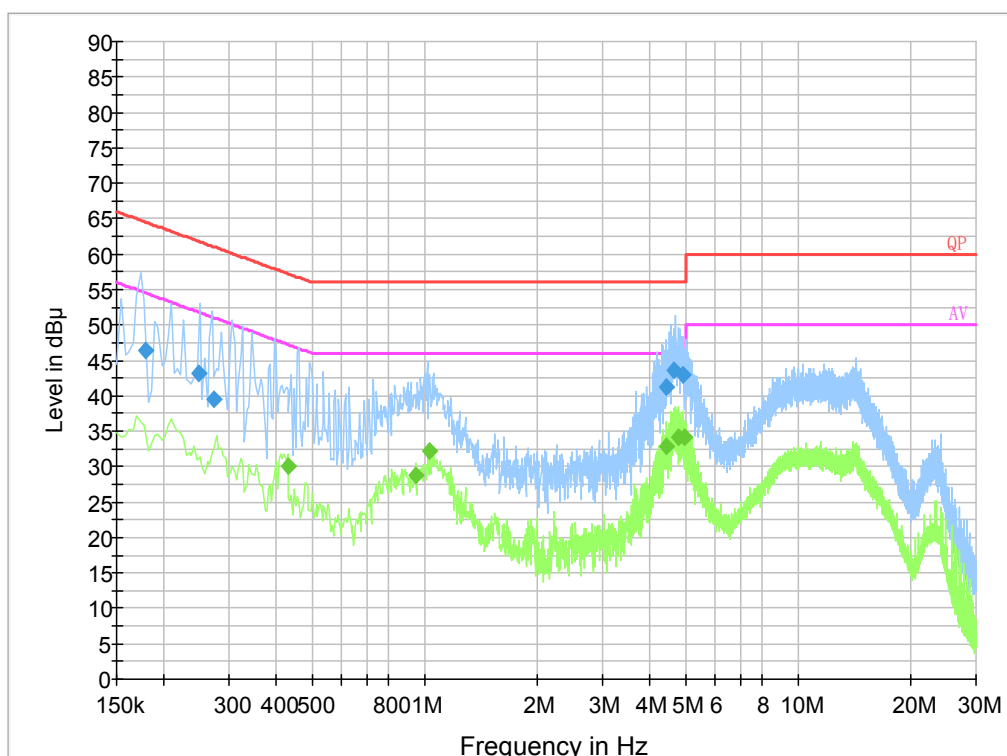AC120V, 60 Hz, Neutral:

Frequency (MHz)	Corrected Amplitude (dBμV)	Correction Factor (dB)	Limit (dBμV)	Margin (dB)	Detector (PK/Ave./QP)
0.178500	46.3	19.8	64.6	18.3	QP
0.249500	43.2	19.8	61.8	18.6	QP
0.273500	39.6	19.7	61.0	21.4	QP
4.423370	41.2	19.9	56.0	14.8	QP
4.655470	43.6	19.9	56.0	12.4	QP
4.927690	43.0	19.9	56.0	13.0	QP
0.430000	30.0	19.8	47.3	17.3	Ave.
0.946000	28.8	19.8	46.0	17.2	Ave.
1.034000	32.3	19.8	46.0	13.7	Ave.
4.442000	32.8	19.9	46.0	13.2	Ave.
4.778000	34.1	19.9	46.0	11.9	Ave.
4.966000	34.1	19.9	46.0	11.9	Ave.

Note:

- 1) Correction Factor = LISN VDF (Voltage Division Factor) + Cable Loss + Transient Limiter Attenuation
- 2) Corrected Amplitude = Reading + Correction Factor
- 3) Margin = Limit – Corrected Amplitude

§15.205 & §15.209 & §15.407(B) (1), (4), (6), (7) – UNDESIRABLE EMISSION**Applicable Standard**

FCC §15.407 (b) (1), (4), (6), (7); §15.209; §15.205;

(b) Undesirable emission limits. Except as shown in paragraph (b)(7) of this section, the maximum emissions outside of the frequency bands of operation shall be attenuated in accordance with the following limits:

(1) For transmitters operating in the 5.15-5.25 GHz band: All emissions outside of the 5.15-5.35 GHz band shall not exceed an e.i.r.p. of -27 dBm/MHz.


(4) For transmitters operating in the 5.725-5.85 GHz band:


(i) All emissions shall be limited to a level of -27 dBm/MHz at 75 MHz or more above or below the band edge increasing linearly to 10 dBm/MHz at 25 MHz above or below the band edge, and from 25 MHz above or below the band edge increasing linearly to a level of 15.6 dBm/MHz at 5 MHz above or below the band edge, and from 5 MHz above or below the band edge increasing linearly to a level of 27 dBm/MHz at the band edge.

Unwanted emissions below 1 GHz must comply with the general field strength limits set forth in §15.209.

EUT Setup

Below 1 GHz:

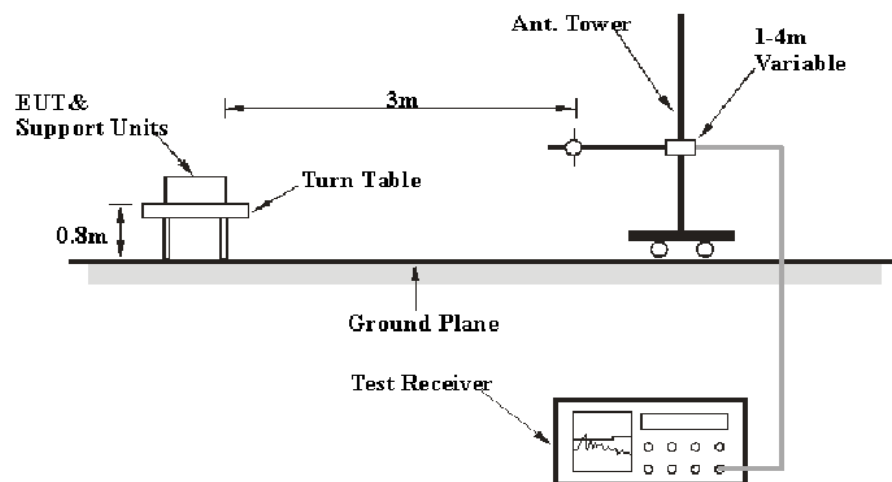

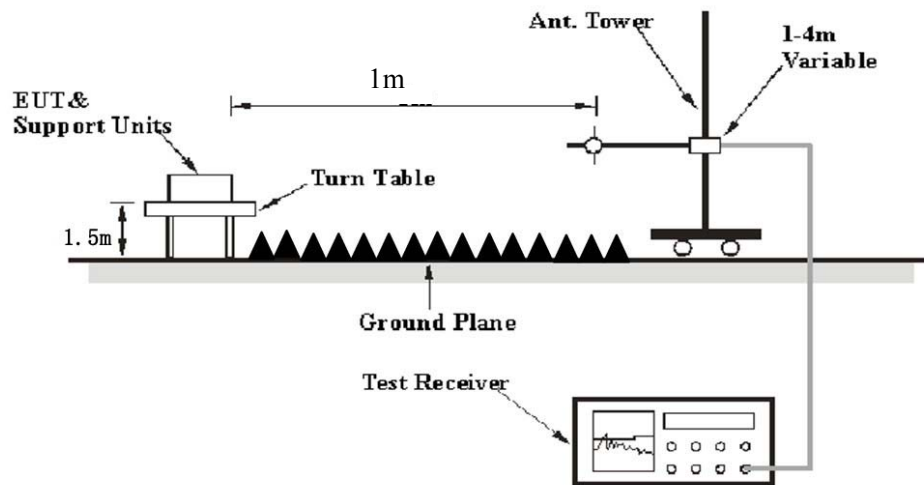Above 1 GHz:

The setup of EUT is according with per ANSI C63.10-2013 measurement procedure. The specification used was with the FCC 15.209 and FCC 15.407 limits.

The external I/O cables were draped along the test table and formed a bundle 30 to 40 cm long in the middle.

EMI Test Receiver & Spectrum Analyzer Setup

The system was investigated from 30 MHz to 40 GHz.

During the radiated emission test, the EMI test receiver & Spectrum Analyzer Setup were set with the following configurations:

Frequency Range	RBW	Video B/W	IF B/W	Measurement
30 MHz – 1000 MHz	100 kHz	300 kHz	120 kHz	QP
Above 1 GHz	1 MHz	3 MHz	/	PK
	1MHz	10 Hz ^{Note 1}	/	Average
	1MHz	> 1/T ^{Note 2}	/	Average

Note 1: when duty cycle is no less than 98%

Note 2: when duty cycle is less than 98%

Test Procedure**Radiated Spurious Emission**

During the radiated emission test, the adapter was connected to the AC floor outlet.

Maximizing procedure was performed on the highest emissions to ensure that the EUT complied with all the installation combinations.

Data was recorded in Quasi-peak detection mode for frequency range of 30 MHz-1GHz, peak and Average detection modes for frequencies above 1GHz.

According to ANSI C63.10-2013,9.4: For field strength measurements made at other than the distance at which the applicable limit is specified, extrapolate the measured field strength to the field strength at the distance specified by the limit using an inverse distance correction factor (20 dB/decade of distance). In some cases, a different distance correction factor may be required;

$$E_{\text{SpecLimit}} = E_{\text{Meas}} + 20 \log \left(\frac{d_{\text{Meas}}}{d_{\text{SpecLimit}}} \right)$$

where

$E_{\text{SpecLimit}}$	is the field strength of the emission at the distance specified by the limit, in dB μ V/m
E_{Meas}	is the field strength of the emission at the measurement distance, in dB μ V/m
d_{Meas}	is the measurement distance, in m
$d_{\text{SpecLimit}}$	is the distance specified by the limit, in m

So the extrapolation factor of 1m is $20 \cdot \log(1/3) = -9.5$ dB

Corrected Amplitude & Margin Calculation

The Corrected Amplitude is calculated by adding the Antenna Factor and Cable Loss, and subtracting the Amplifier Gain from the Meter Reading. The basic equation is as follows:

$$\text{Corrected Amplitude} = \text{Meter Reading} + \text{Antenna Factor} + \text{Cable Loss} - \text{Amplifier Gain}$$

The “**Margin**” column of the following data tables indicates the degree of compliance with the applicable limit. For example, a margin of 7dB means the emission is 7dB below the limit. The equation for margin calculation is as follows:

$$\text{Margin} = \text{Limit} - \text{Corrected Amplitude}$$

Test Data


Environmental Conditions

Temperature:	28 °C
Relative Humidity:	56 %
ATM Pressure:	101.0 kPa

The testing was performed by Harris He on 2020-08-29 for below 1GHz and by Leven Gan on 2020-07-30 for above 1GHz.

EUT operation mode: Transmitting

30 MHz~1 GHz: (the worst case is 5.2G Wi-Fi 802.11n-HT20 Mode, Middle Channel)

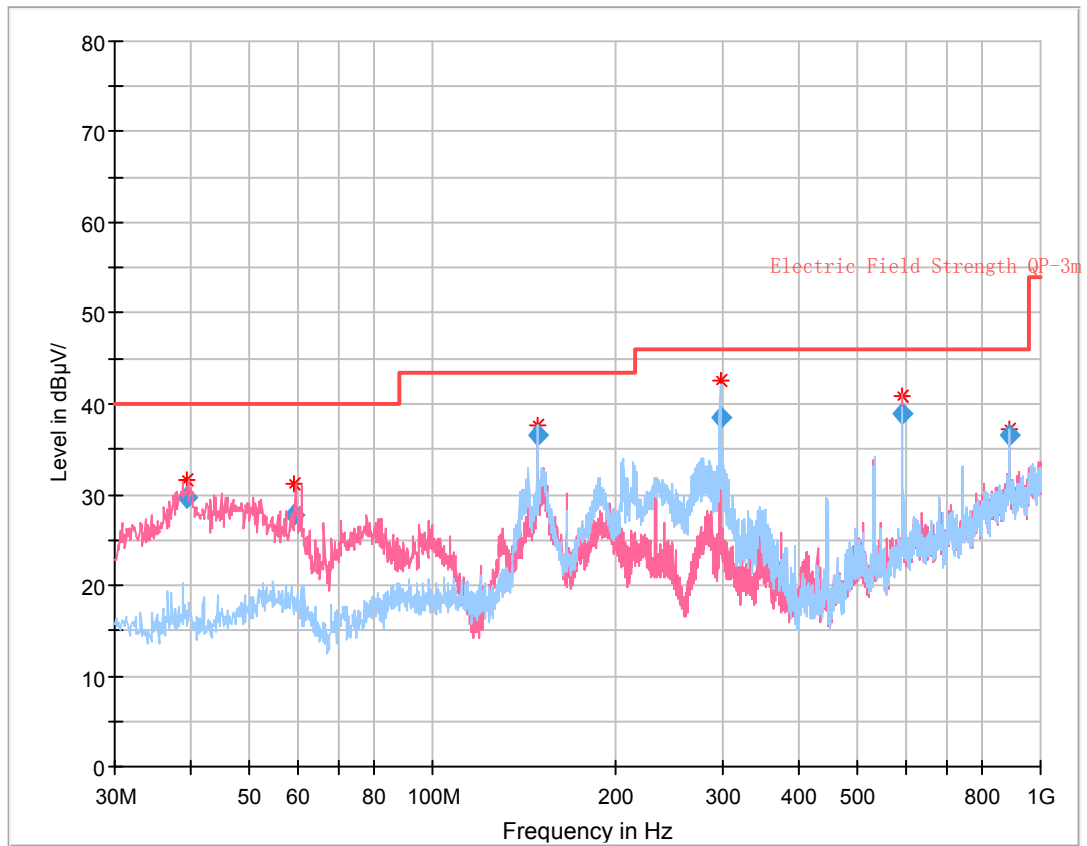

Frequency (MHz)	Corrected Amplitude (dBμV/m)	Antenna height (cm)	Antenna Polarity	Turntable position (degree)	Correction Factor (dB/m)	Limit (dBμV/m)	Margin (dB)
39.422250	29.75	101.0	V	0.0	-13.4	40.00	10.25
59.307375	27.84	110.0	V	334.0	-20.1	40.00	12.16
148.505500	36.65	199.0	H	249.0	-14.2	43.50	6.85
296.970750	38.55	108.0	H	166.0	-10.8	46.00	7.45
594.023000	38.99	102.0	V	20.0	-1.9	46.00	7.01
891.013375	36.60	171.0	H	325.0	4.0	46.00	9.40

1 ~ 40 GHz:

Note: The test distance is 1m, so the correct factor from 3m to 1m is $20\log(3/1)=9.5\text{dB}$ which was added into the final limit.

5150-5250 MHz:

Frequency (MHz)	Receiver		Turntable	Rx Antenna		Corrected Factor (dB/m)	Corrected Amplitude (dBμV/m)	FCC Part 15.407/205/209	
	Reading (dBμV)	PK/QP/Ave.	Degree	Height (m)	Polar (H / V)			Limit (dBμV/m)	Margin (dB)
802.11a									
5180 MHz									
5148.56	31.24	PK	24	1.5	H	38.36	69.60	83.5	13.90
5148.56	17.43	Ave.	24	1.5	H	38.36	55.79	63.5	7.71
5351.47	31.45	PK	178	1.5	H	39.09	70.54	83.5	12.96
5351.47	17.51	Ave.	178	1.5	H	39.09	56.60	63.5	6.90
10360.00	40.92	PK	40	1.7	H	17.42	58.34	77.7	19.36
5200 MHz									
10400.00	41.52	PK	49	1.2	H	17.52	59.04	77.7	18.66
5240 MHz									
5149.41	30.74	PK	282	1.2	H	38.36	69.10	83.5	14.40
5149.41	17.38	Ave.	282	1.2	H	38.36	55.74	63.5	7.76
5350.84	31.77	PK	55	1.7	H	39.09	70.86	83.5	12.64
5350.84	17.85	Ave.	55	1.7	H	39.09	56.94	63.5	6.56
10480.00	41.40	PK	81	2.3	H	17.25	58.65	77.7	19.05
802.11n20									
5180 MHz									
5148.63	31.04	PK	255	2.1	H	38.36	69.40	83.5	14.10
5148.63	17.57	Ave.	255	2.1	H	38.36	55.93	63.5	7.57
5351.61	30.54	PK	146	2.1	H	39.09	69.63	83.5	13.87
5351.61	17.53	Ave.	146	2.1	H	39.09	56.62	63.5	6.88
10360.00	42.22	PK	130	1.5	H	17.42	59.64	77.7	18.06
5200 MHz									
10400.00	42.17	PK	358	2.0	H	17.52	59.69	77.7	18.01
5240 MHz									
5148.71	31.20	PK	273	1.4	H	38.36	69.56	83.5	13.94
5148.71	17.50	Ave.	273	1.4	H	38.36	55.86	63.5	7.64
5352.24	31.34	PK	132	1.8	H	39.09	70.43	83.5	13.07
5352.24	17.52	Ave.	132	1.8	H	39.09	56.61	63.5	6.89
10480.00	41.84	PK	100	2.2	H	17.25	59.09	77.7	18.61

Frequency (MHz)	Receiver		Turntable	Rx Antenna		Corrected Factor (dB/m)	Corrected Amplitude (dBμV/m)	FCC Part 15.407/205/209	
	Reading (dBμV)	PK/QP/Ave.	Degree	Height (m)	Polar (H / V)			Limit (dBμV/m)	Margin (dB)
802.11n40									
5190 MHz									
5149.35	31.27	PK	129	1.7	H	38.36	69.63	83.5	13.87
5149.35	17.84	Ave.	129	1.7	H	38.36	56.20	63.5	7.30
5351.56	32.09	PK	347	1.3	H	39.09	71.18	83.5	12.32
5351.56	17.85	Ave.	347	1.3	H	39.09	56.94	63.5	6.56
10380.00	41.08	PK	80	2.2	H	17.42	58.50	77.7	19.20
5230 MHz									
5148.52	30.84	PK	241	1.9	H	38.36	69.20	83.5	14.30
5148.52	17.47	Ave.	241	1.9	H	38.36	55.83	63.5	7.67
5352.11	30.21	PK	142	2.2	H	39.09	69.30	83.5	14.20
5352.11	17.44	Ave.	142	2.2	H	39.09	56.53	63.5	6.97
10460.00	40.96	PK	39	1.6	H	17.15	58.11	77.7	19.59
802.11ac20									
5180 MHz									
5149.45	31.63	PK	201	1.1	H	38.36	69.99	83.5	13.51
5149.45	17.67	Ave.	201	1.1	H	38.36	56.03	63.5	7.47
5351.00	31.10	PK	320	1.5	H	39.09	70.19	83.5	13.31
5351.00	17.64	Ave.	320	1.5	H	39.09	56.73	63.5	6.77
10360.00	41.64	PK	277	1.5	H	17.42	59.06	77.7	18.64
5200 MHz									
10400.00	41.50	PK	132	1.7	H	17.52	59.02	77.7	18.68
5240 MHz									
5148.63	31.63	PK	201	2.4	H	38.36	69.99	83.5	13.51
5148.63	17.68	Ave.	201	2.4	H	38.36	56.04	63.5	7.46
5352.26	31.10	PK	334	2.3	H	39.09	70.19	83.5	13.31
5352.26	17.60	Ave.	334	2.3	H	39.09	56.69	63.5	6.81
10480.00	41.76	PK	216	1.5	H	17.25	59.01	77.7	18.69
802.11ac40									
5190 MHz									
5148.72	30.62	PK	79	2.2	H	38.36	68.98	83.5	14.52
5148.72	17.47	Ave.	79	2.2	H	38.36	55.83	63.5	7.67
5351.83	31.04	PK	208	1.1	H	39.09	70.13	83.5	13.37
5351.83	17.55	Ave.	208	1.1	H	39.09	56.64	63.5	6.86
10380.00	41.47	PK	157	1.8	H	17.42	58.89	77.7	18.81
5230 MHz									
5147.53	31.17	PK	336	2.1	H	38.36	69.53	83.5	13.97
5147.53	17.63	Ave.	336	2.1	H	38.36	55.99	63.5	7.51
5353.49	32.14	PK	59	2.0	H	39.09	71.23	83.5	12.27
5353.49	17.55	Ave.	59	2.0	H	39.09	56.64	63.5	6.86
10460.00	41.76	PK	358	2.0	H	17.15	58.91	77.7	18.79

Frequency (MHz)	Receiver		Turntable	Rx Antenna		Corrected Factor (dB/m)	Corrected Amplitude (dBμV/m)	FCC Part 15.407/205/209	
	Reading (dBμV)	PK/QP/Ave.	Degree	Height (m)	Polar (H / V)			Limit (dBμV/m)	Margin (dB)
802.11ac80									
5210 MHz									
5149.41	31.73	PK	188	1.3	H	38.36	70.09	83.5	13.41
5149.41	17.66	Ave.	188	1.3	H	38.36	56.02	63.5	7.48
5351.13	31.45	PK	303	2.2	H	39.09	70.54	83.5	12.96
5351.13	17.52	Ave.	303	2.2	H	39.09	56.61	63.5	6.89
10420.00	40.89	PK	243	2.2	H	17.51	58.40	77.7	19.30

5725-5850 MHz:

Frequency (MHz)	Receiver		Turntable Degree	Rx Antenna		Corrected Factor (dB/m)	Corrected Amplitude (dBμV/m)	FCC Part 15.407/205/209	
	Reading (dBμV)	PK/QP/Ave.		Height (m)	Polar (H/V)			Limit (dBμV/m)	Margin (dB)
802.11a									
5745 MHz									
5645.97	32.04	PK	47	1.9	H	39.46	71.50	77.7	6.20
5674.35	31.87	PK	354	2.1	H	39.49	71.36	95.7	24.34
5718.78	31.96	PK	310	1.1	H	39.49	71.45	120	48.55
5723.74	31.28	PK	97	1.5	H	39.49	70.77	128.8	58.03
11490.00	40.33	PK	122	1.1	H	17.47	57.80	83.5	25.70
11490.00	26.38	Ave.	122	1.1	H	17.47	43.85	63.5	19.65
5785 MHz									
11570.00	40.27	PK	46	2.3	H	17.51	57.78	83.5	25.72
11570.00	26.38	Ave.	46	2.3	H	17.51	43.89	63.5	19.61
5825 MHz									
5853.95	34.29	PK	289	2.2	H	39.87	74.16	125.0	50.84
5872.54	33.65	PK	80	1.9	H	39.87	73.52	115.4	41.88
5922.28	33.38	PK	157	1.2	H	39.97	73.35	79.7	6.35
5969.47	34.23	PK	278	1.7	H	39.84	74.07	77.7	3.63
11650.00	40.62	PK	355	1.1	H	16.18	56.80	83.5	26.70
11650.00	26.53	Ave.	355	1.1	H	16.18	42.71	63.5	20.79
802.11n20									
5745 MHz									
5648.82	31.77	PK	51	1.8	H	39.46	71.23	77.7	6.47
5684.66	31.19	PK	70	1.6	H	39.49	70.68	103.4	32.72
5716.86	31.52	PK	149	1.4	H	39.49	71.01	119.4	48.39
5722.32	32.20	PK	97	2.3	H	39.49	71.69	125.6	53.91
11490.00	40.59	PK	49	1.4	H	17.47	58.06	83.5	25.44
11490.00	26.50	Ave.	49	1.4	H	17.47	43.97	63.5	19.53
5785 MHz									
11570.00	40.72	PK	221	1.6	H	17.51	58.23	83.5	25.27
11570.00	26.48	Ave.	221	1.6	H	17.51	43.99	63.5	19.51
5825 MHz									
5853.11	34.26	PK	45	1.7	H	39.87	74.13	126.91	52.78
5855.49	34.51	PK	47	1.8	H	39.87	74.38	120.17	45.79
5923.34	33.95	PK	248	2.2	H	39.97	73.92	78.9	4.98
5971.11	33.68	PK	319	1.7	H	39.84	73.52	77.7	4.18
11650.00	40.62	PK	154	1.3	H	16.18	56.80	83.5	26.70
11650.00	26.88	Ave.	154	1.3	H	16.18	43.06	63.5	20.44

Frequency (MHz)	Receiver		Turntable Degree	Rx Antenna		Corrected Factor (dB/m)	Corrected Amplitude (dBμV/m)	FCC Part 15.407/205/209	
	Reading (dBμV)	PK/QP/Ave.		Height (m)	Polar (H/V)			Limit (dBμV/m)	Margin (dB)
802.11n40									
5755 MHz									
5647.76	31.88	PK	150	1.1	H	39.46	71.34	77.7	6.36
5694.48	31.42	PK	64	1.7	H	39.49	70.91	110.6	39.69
5717.74	31.66	PK	238	1.4	H	39.49	71.15	119.7	48.55
5723.46	31.51	PK	239	1.9	H	39.49	71.00	128.2	57.20
11510.00	40.49	PK	206	1.4	H	17.47	57.96	83.5	25.54
11510.00	26.67	Ave.	206	1.4	H	17.47	44.14	63.5	19.36
5795 MHz									
5853.33	32.99	PK	199	2.2	H	39.87	72.86	124.1	51.24
5873.63	33.56	PK	77	2.1	H	39.87	73.43	115.1	41.67
5920.52	33.77	PK	82	1.4	H	39.97	73.74	81.1	7.36
5967.79	33.76	PK	259	2.1	H	39.84	73.60	77.7	4.10
11590.00	40.82	PK	152	1.9	H	17.51	58.33	83.5	25.17
11590.00	26.75	Ave.	152	1.9	H	17.51	44.26	63.5	19.24
802.11ac20									
5745 MHz									
5645.58	31.75	PK	201	1.2	H	39.46	71.21	77.7	6.49
5684.97	31.77	PK	153	2.0	H	39.49	71.26	103.6	32.34
5718.81	31.94	PK	100	2.0	H	39.49	71.43	119.9	48.47
5722.41	31.94	PK	120	1.9	H	39.49	71.43	125.8	54.37
11490.00	40.87	PK	92	1.9	H	17.47	58.34	83.5	25.16
11490.00	26.77	Ave.	92	1.9	H	17.47	44.24	63.5	19.26
5785 MHz									
11570.00	40.76	PK	149	1.5	H	17.51	58.27	83.5	25.23
11570.00	26.51	Ave.	149	1.5	H	17.51	44.02	63.5	19.48
5825 MHz									
5852.36	34.42	PK	216	1.6	H	39.87	74.29	126.3	52.01
5870.56	34.42	PK	247	2.4	H	39.87	74.29	115.9	41.61
5919.64	33.92	PK	275	1.2	H	39.97	73.89	81.7	7.81
5968.89	33.91	PK	158	2.4	H	39.84	73.75	77.7	3.95
11650.00	40.67	PK	7	1.3	H	16.18	56.85	83.5	26.65
11650.00	26.49	Ave.	7	1.3	H	16.18	42.67	63.5	20.83

Frequency (MHz)	Receiver		Turntable Degree	Rx Antenna		Corrected Factor (dB/m)	Corrected Amplitude (dBμV/m)	FCC Part 15.407/205/209	
	Reading (dBμV)	PK/QP/Ave.		Height (m)	Polar (H/V)			Limit (dBμV/m)	Margin (dB)
802.11ac40									
5755 MHz									
5649.92	31.56	PK	21	1.8	H	39.46	71.02	77.7	6.68
5696.64	30.92	PK	154	1.9	H	39.49	70.41	112.2	41.79
5717.76	31.23	PK	6	1.3	H	39.49	70.72	119.7	48.98
5723.34	31.55	PK	231	1.1	H	39.49	71.04	127.9	56.86
11510.00	40.57	PK	113	1.8	H	17.47	58.04	83.5	25.46
11510.00	26.58	Ave.	113	1.8	H	17.47	44.05	63.5	19.45
5795 MHz									
5854.07	33.57	PK	101	1.4	H	39.87	73.44	122.4	48.96
5871.16	33.78	PK	25	1.5	H	39.87	73.65	115.8	42.15
5918.88	33.78	PK	232	1.3	H	39.97	73.75	82.2	8.45
5973.87	34.09	PK	51	1.0	H	39.84	73.93	77.7	3.77
11590.00	40.77	PK	66	1.7	H	17.51	58.28	83.5	25.22
11590.00	26.64	Ave.	66	1.7	H	17.51	44.15	63.5	19.35
802.11ac80									
5775 MHz									
5646.49	31.42	PK	199	1.9	H	39.46	70.88	77.7	6.82
5689.93	31.78	PK	174	2.4	H	39.49	71.27	107.2	35.93
5719.71	31.78	PK	272	2.3	H	39.49	71.27	120.2	48.93
5722.48	31.68	PK	3	1.0	H	39.49	71.17	125.9	54.73
5853.31	33.86	PK	285	1.3	H	39.87	73.73	124.1	50.37
5868.42	32.99	PK	172	2.1	H	39.87	72.86	116.5	43.64
5919.66	33.67	PK	114	1.4	H	39.97	73.64	81.6	7.96
5974.12	34.17	PK	149	1.7	H	39.84	74.01	77.7	3.69
11550.00	40.86	PK	284	1.2	H	17.51	58.37	83.5	25.13
11550.00	26.75	Ave.	284	1.2	H	17.51	44.26	63.5	19.24

Note:



Corrected Amplitude = Corrected Factor + Reading


Corrected Factor=Antenna factor (RX) + Cable Loss – Amplifier Factor

Margin = Limit- Corr. Amplitude


All other spurious emissions are 20 dB below the limit or are on the system noise floor level.



Peak

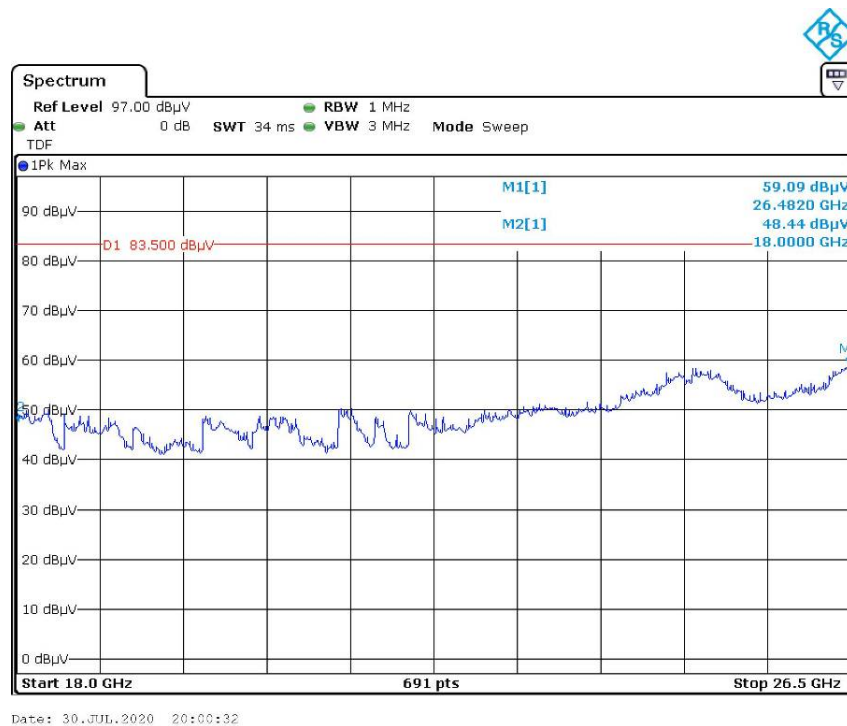
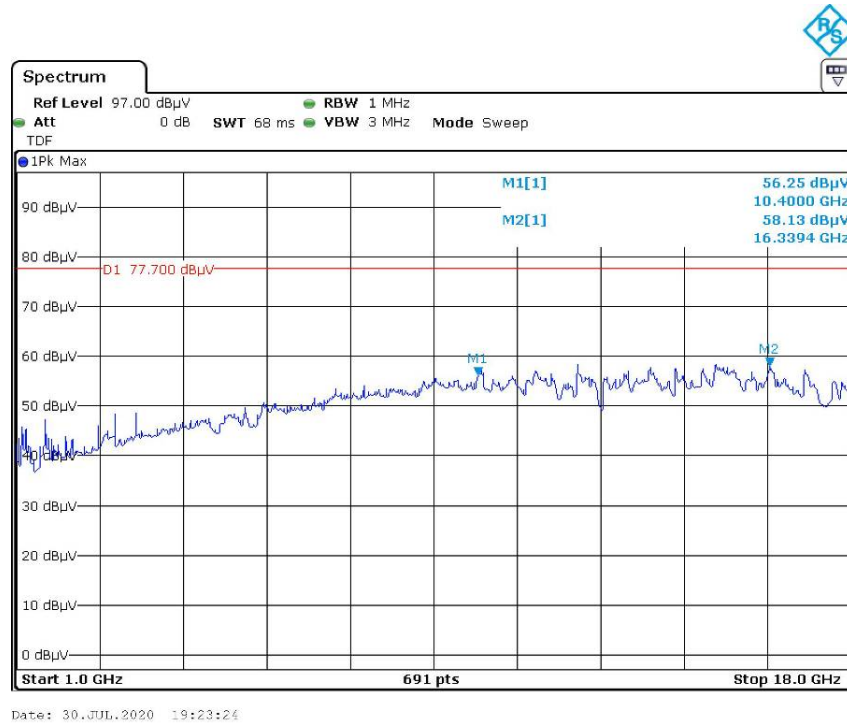
Pre-scan with 802.11n20 5200MHz
Horizontal

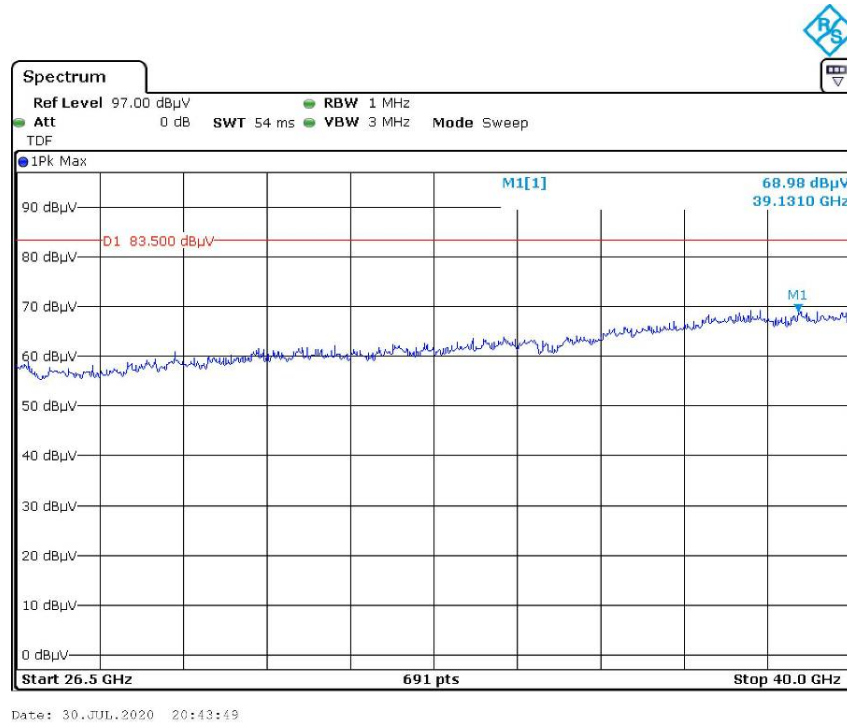



Vertical

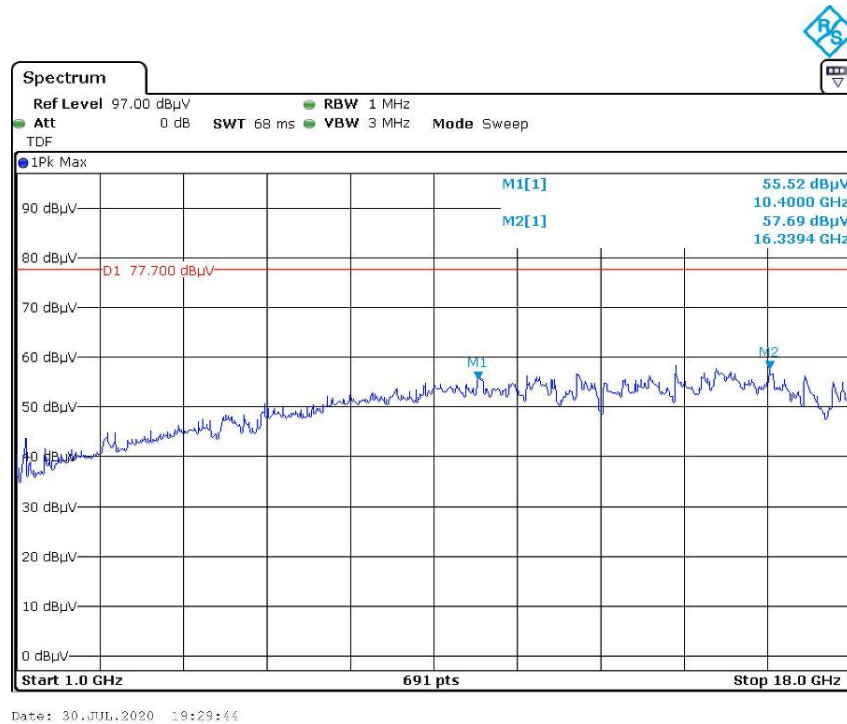

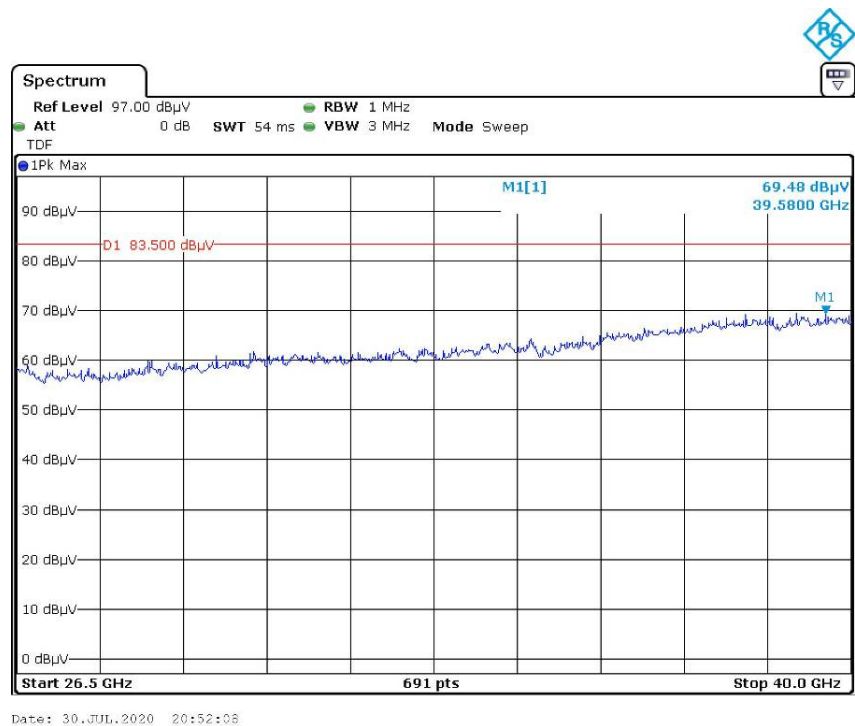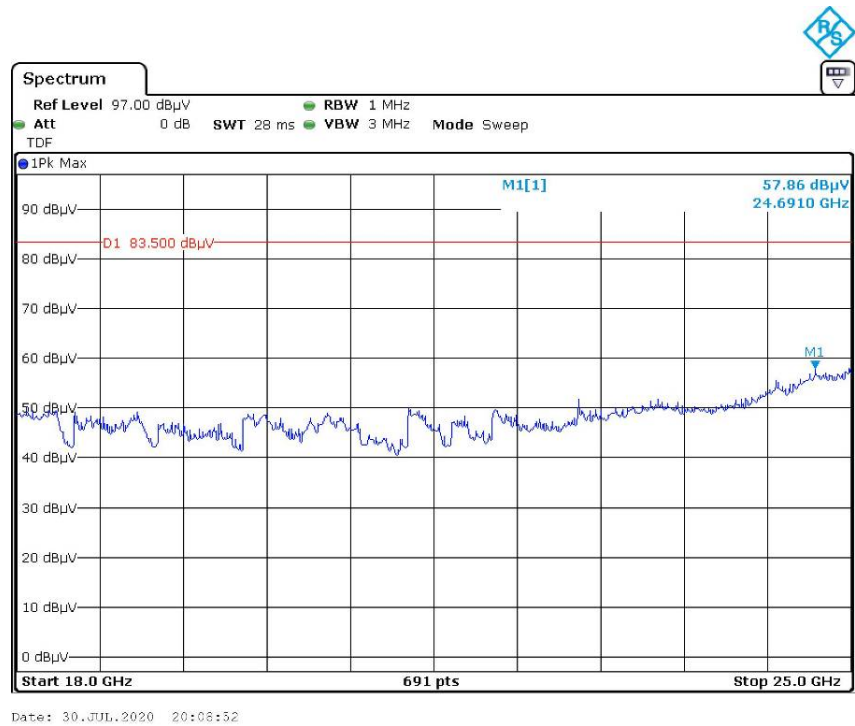

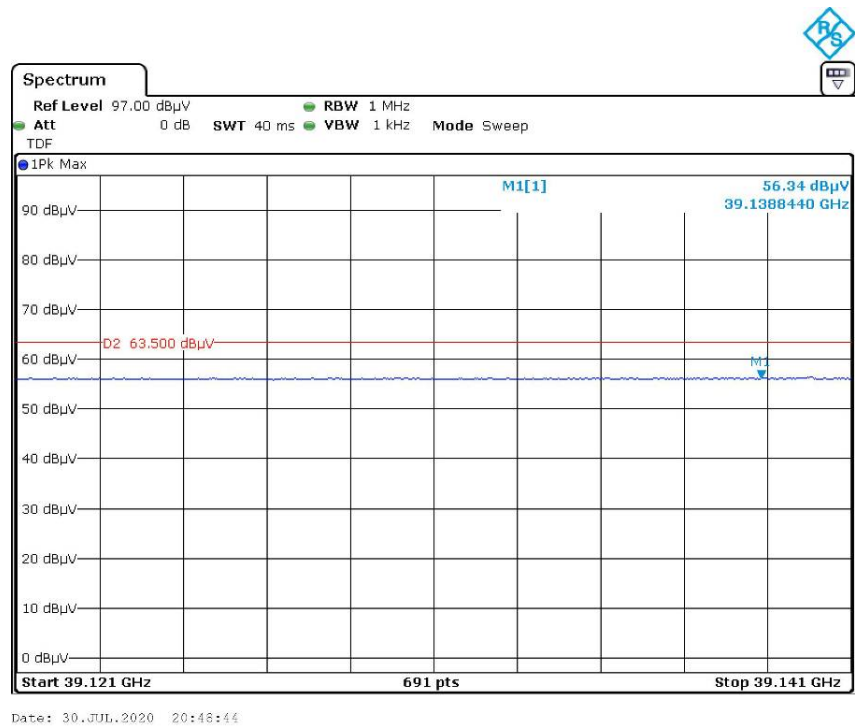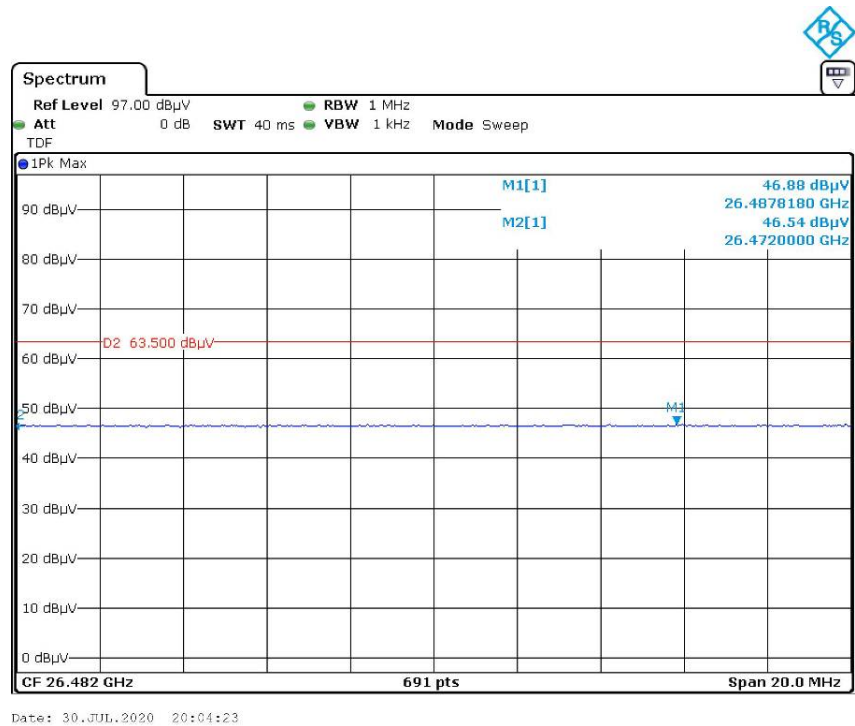Average
Horizontal

Vertical

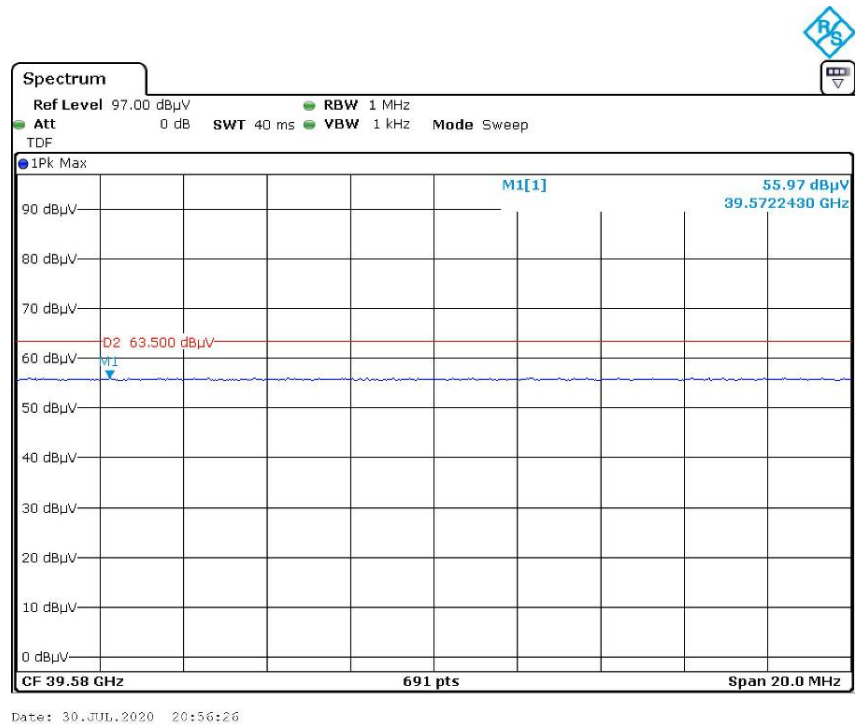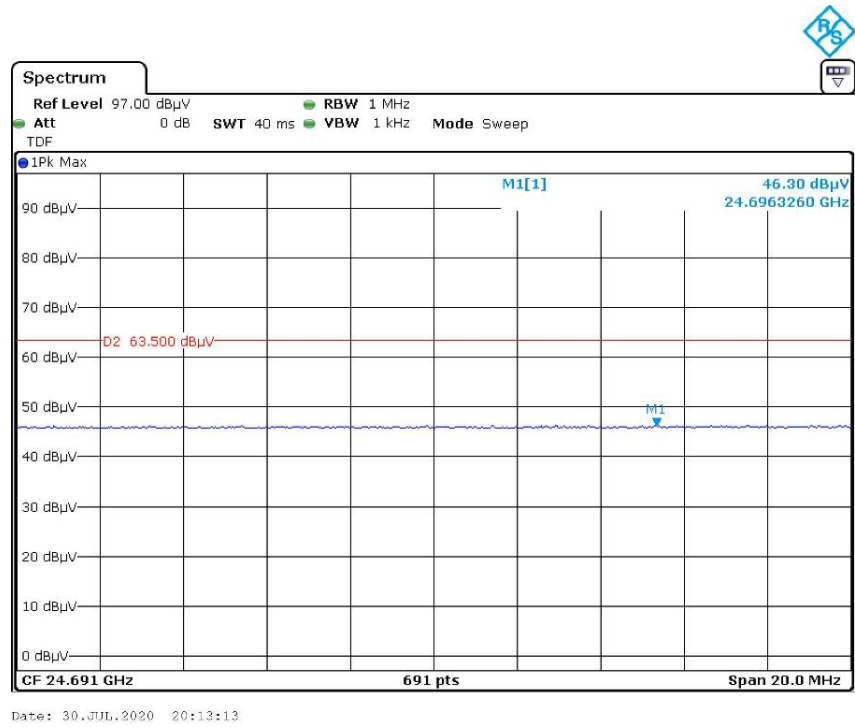

FCC §15.407(a) (1) – 26 dB & 6dB EMISSION BANDWIDTH

Applicable Standard

The maximum power spectral density is measured as a conducted emission by direct connection of a calibrated test instrument to the equipment under test. If the device cannot be connected directly, alternative techniques acceptable to the Commission may be used. Measurements in the 5.725-5.85 GHz band are made over a reference bandwidth of 500 kHz or the 26 dB emission bandwidth of the device, whichever is less. Measurements in the 5.15-5.25 GHz, 5.25-5.35 GHz, and the 5.47-5.725 GHz bands are made over a bandwidth of 1 MHz or the 26 dB emission bandwidth of the device, whichever is less. A narrower resolution bandwidth can be used, provided that the measured power is integrated over the full reference bandwidth.

Within the 5.725-5.85 GHz band, the minimum 6 dB bandwidth of U-NII devices shall be at least 500 kHz.

Test Procedure


1. Emission Bandwidth (EBW)

- a) Set RBW = approximately 1% of the emission bandwidth.
- b) Set the VBW > RBW.
- c) Detector = Peak.
- d) Trace mode = max hold.
- e) Measure the maximum width of the emission that is 26 dB down from the maximum of the emission. Compare this with the RBW setting of the analyzer. Readjust RBW and repeat measurement as needed until the RBW/EBW ratio is approximately 1%.

2. Minimum Emission Bandwidth for the band 5.725-5.85 GHz

Section 15.407(e) specifies the minimum 6 dB emission bandwidth of at least 500 KHz for the band 5.715-5.85 GHz. The following procedure shall be used for measuring this bandwidth:

- a) Set RBW = 100 kHz.
- b) Set the video bandwidth (VBW) $\geq 3 \times$ RBW.
- c) Detector = Peak.
- d) Trace mode = max hold.
- e) Sweep = auto couple.
- f) Allow the trace to stabilize.
- g) Measure the maximum width of the emission that is constrained by the frequencies associated with the two outermost amplitude points (upper and lower frequencies) that are attenuated by 6 dB relative to the maximum level measured in the fundamental emission.



Test Data**Environmental Conditions**

Temperature:	25 °C
Relative Humidity:	52 %
ATM Pressure:	101.0 kPa

The testing was performed by James Fu on 2020-07-29.

EUT operation mode: Transmitting

Test Result: Pass

Please refer to the Appendix

FCC §15.407(a) (1) (3) – CONDUCTED TRANSMITTER OUTPUT POWER


Applicable Standard

For an indoor access point operating in the band 5.15-5.25 GHz, the maximum conducted output power over the frequency band of operation shall not exceed 1 W provided the maximum antenna gain does not exceed 6 dBi. In addition, the maximum power spectral density shall not exceed 17 dBm in any 1 megahertz band. If transmitting antennas of directional gain greater than 6 dBi are used, both the maximum conducted output power and the maximum power spectral density shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

For the band 5.725-5.85 GHz, the maximum conducted output power over the frequency band of operation shall not exceed 1 W. In addition, the maximum power spectral density shall not exceed 30 dBm in any 500-kHz band. If transmitting antennas of directional gain greater than 6 dBi are used, both the maximum conducted output power and the maximum power spectral density shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi. However, fixed point-to-point U-NII devices operating in this band may employ transmitting antennas with directional gain greater than 6 dBi without any corresponding reduction in transmitter conducted power. Fixed, point-to-point operations exclude the use of point-to-multipoint systems, omnidirectional applications, and multiple collocated transmitters transmitting the same information. The operator of the U-NII device, or if the equipment is professionally installed, the installer, is responsible for ensuring that systems employing high gain directional antennas are used exclusively for fixed, point-to-point operations.

Test Procedure

1. Place the EUT on a bench and set it in transmitting mode.
2. Remove the antenna from the EUT and then connect a low loss RF cable from the antenna port to one test equipment.
3. Add a correction factor to the display.



Test Data**Environmental Conditions**

Temperature:	25 °C
Relative Humidity:	52 %
ATM Pressure:	101.0 kPa

The testing was performed by James Fu on 2020-07-29.

EUT operation mode: Transmitting

Test Result: Pass

Please refer to the Appendix

FCC §15.407(a) (1) (3) - POWER SPECTRAL DENSITY

Applicable Standard

For an indoor access point operating in the band 5.15-5.25 GHz, the maximum conducted output power over the frequency band of operation shall not exceed 1 W provided the maximum antenna gain does not exceed 6 dBi. In addition, the maximum power spectral density shall not exceed 17 dBm in any 1 megahertz band. If transmitting antennas of directional gain greater than 6 dBi are used, both the maximum conducted output power and the maximum power spectral density shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

For the band 5.725-5.85 GHz, the maximum conducted output power over the frequency band of operation shall not exceed 1 W. In addition, the maximum power spectral density shall not exceed 30 dBm in any 500-kHz band. If transmitting antennas of directional gain greater than 6 dBi are used, both the maximum conducted output power and the maximum power spectral density shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi. However, fixed point-to-point U-NII devices operating in this band may employ transmitting antennas with directional gain greater than 6 dBi without any corresponding reduction in transmitter conducted power. Fixed, point-to-point operations exclude the use of point-to-multipoint systems, omnidirectional applications, and multiple collocated transmitters transmitting the same information. The operator of the U-NII device, or if the equipment is professionally installed, the installer, is responsible for ensuring that systems employing high gain directional antennas are used exclusively for fixed, point-to-point operations.

Test Procedure

For devices operating in the bands 5.15-5.25 GHz, 5.25-5.35 GHz, and 5.47-5.725 GHz, the above procedures make use of 1 MHz RBW to satisfy directly the 1 MHz reference bandwidth specified in § 15.407(a)(5). For devices operating in the band 5.725-5.85 GHz, the rules specify a measurement bandwidth of 500 kHz. Many spectrum analyzers do not have 500 kHz RBW, thus a narrower RBW may need to be used. The rules permit the use of a RBWs less than 1 MHz, or 500 kHz, “provided that the measured power is integrated over the full reference bandwidth” to show the total power over the specified measurement bandwidth (i.e., 1 MHz, or 500 kHz). If measurements are performed using a reduced resolution bandwidth (< 1 MHz, or < 500 kHz) and integrated over 1 MHz, or 500 kHz bandwidth, the following adjustments to the procedures apply:

- a) Set $RBW \geq 1/T$, where T is defined in section II.B.1.a).
- b) Set $VBW \geq 3 RBW$.
- c) If measurement bandwidth of Maximum PSD is specified in 500 kHz, add $10 \log (500 \text{ kHz}/RBW)$ to the measured result, whereas $RBW (< 500 \text{ kHz})$ is the reduced resolution bandwidth of the spectrum analyzer set during measurement.
- d) If measurement bandwidth of Maximum PSD is specified in 1 MHz, add $10 \log (1\text{MHz}/RBW)$ to the measured result, whereas $RBW (< 1 \text{ MHz})$ is the reduced resolution bandwidth of spectrum analyzer set during measurement.
- e) Care must be taken to ensure that the measurements are performed during a period of continuous transmission or are corrected upward for duty cycle.

Test Data**Environmental Conditions**

Temperature:	25 °C
Relative Humidity:	52 %
ATM Pressure:	101.0 kPa

The testing was performed by James Fu on 2020-07-29.

EUT operation mode: Transmitting

Test Result: Pass

Please refer to the Appendix

APPENDIX


Appendix A1: Emission Bandwidth

Test Result

TestMode	Antenna	Channel	26db EBW [MHz]	Limit[MHz]	Verdict
11AMIMO	Ant1	5180	20.520	---	PASS
	Ant2	5180	20.360	---	PASS
	Ant1	5200	20.920	---	PASS
	Ant2	5200	20.320	---	PASS
	Ant1	5240	20.080	---	PASS
	Ant2	5240	20.280	---	PASS
11N20MIMO	Ant1	5180	21.040	---	PASS
	Ant2	5180	20.600	---	PASS
	Ant1	5200	20.640	---	PASS
	Ant2	5200	20.680	---	PASS
	Ant1	5240	20.720	---	PASS
	Ant2	5240	20.840	---	PASS
11N40MIMO	Ant1	5190	44.800	---	PASS
	Ant2	5190	45.040	---	PASS
	Ant1	5230	44.880	---	PASS
	Ant2	5230	45.280	---	PASS
11AC20MIMO	Ant1	5180	20.920	---	PASS
	Ant2	5180	20.640	---	PASS
	Ant1	5200	20.880	---	PASS
	Ant2	5200	21.000	---	PASS
	Ant1	5240	20.840	---	PASS
	Ant2	5240	20.840	---	PASS
11AC40MIMO	Ant1	5190	44.880	---	PASS
	Ant2	5190	44.480	---	PASS
	Ant1	5230	44.400	---	PASS
	Ant2	5230	44.400	---	PASS
11AC80MIMO	Ant1	5210	84.000	---	PASS
	Ant2	5210	84.320	---	PASS


Test Graphs

11AMIMO Ant1_5180

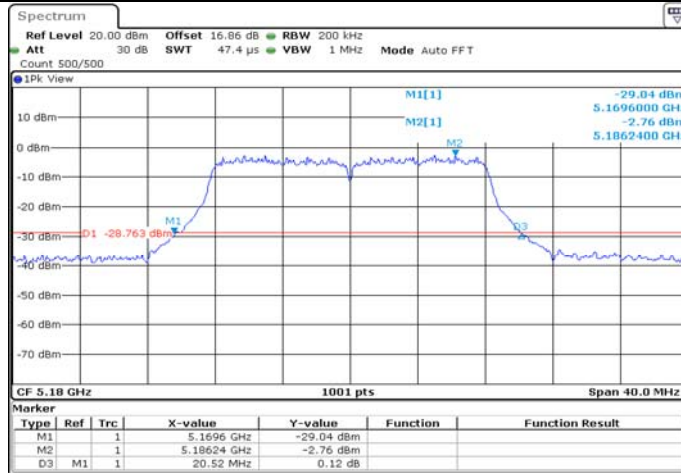


Date: 29.JUL.2020 12:05:16

11AMIMO Ant2_5180

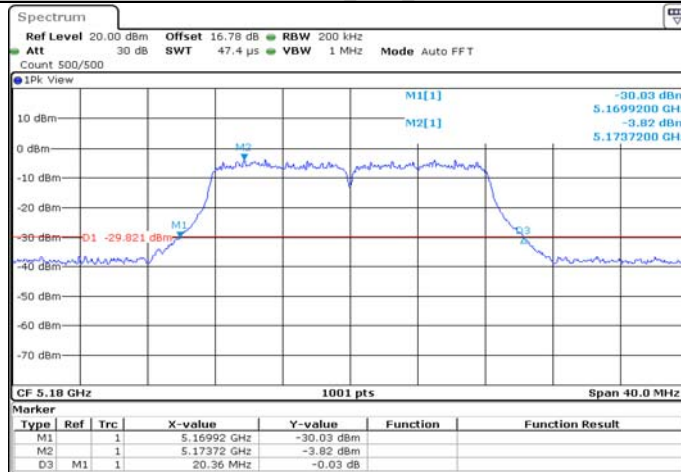


Date: 29.JUL.2020 12:06:15

11AMIMO Ant1_5200

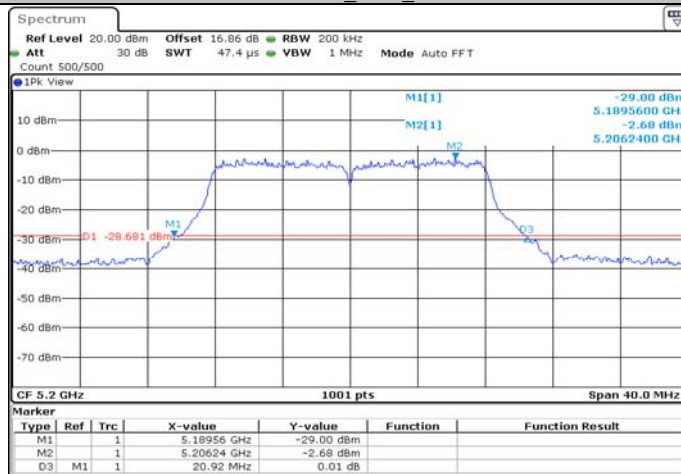


Date: 29.JUL.2020 12:17:21


11AMIMO_Ant2_5200

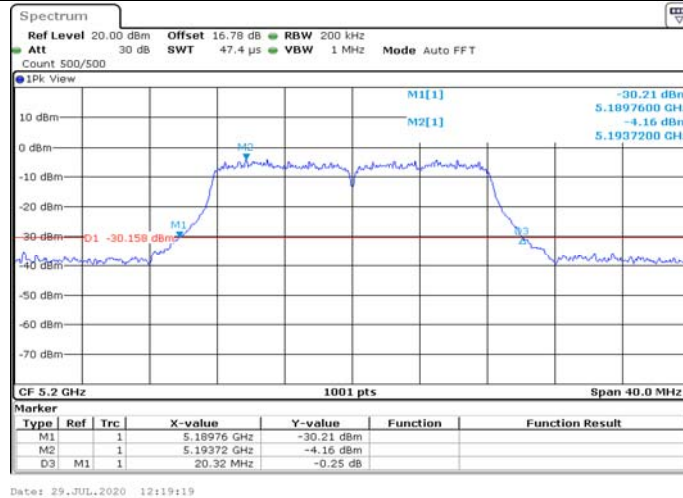


11AMIMO_Ant1_5240

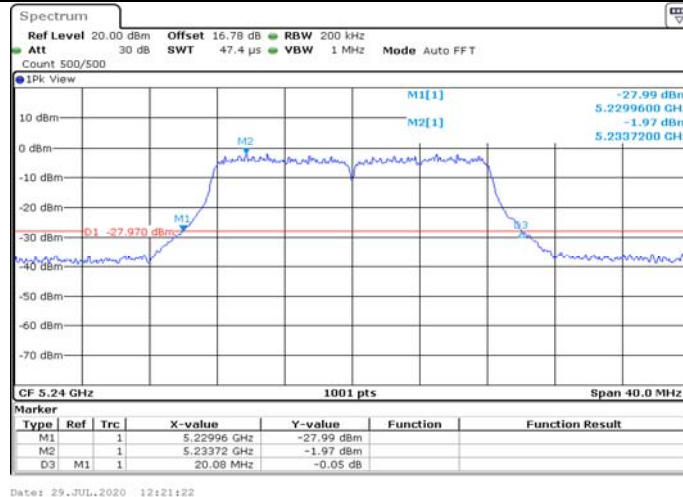

11AMIMO_Ant2_5240

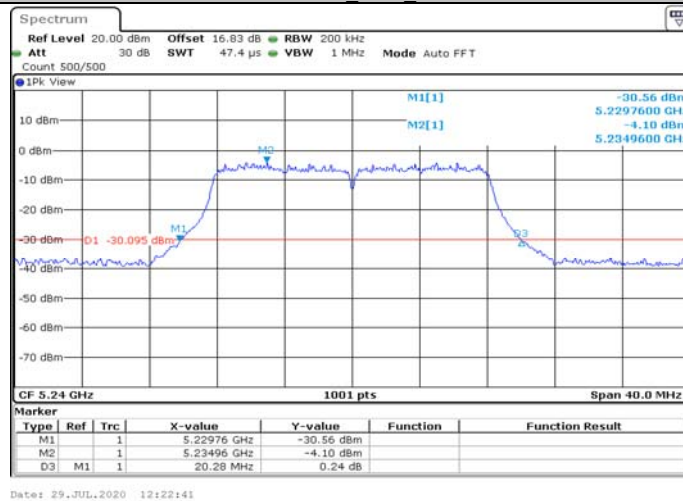


11N20MIMO Ant1 5180

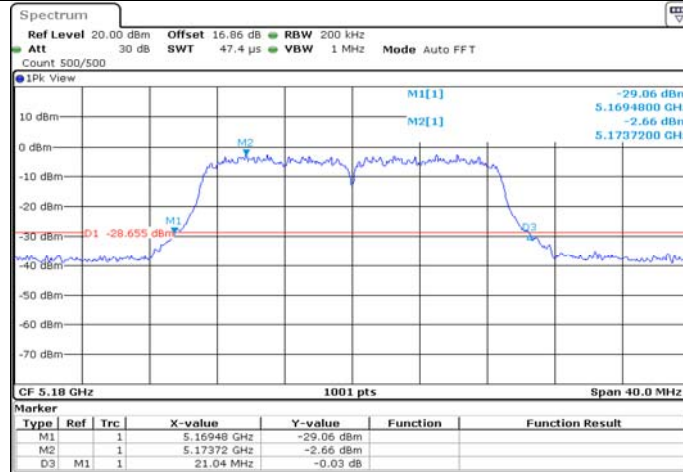


Date: 29_JUL_2020 12:39:19

11N20MIMO Ant2 5180

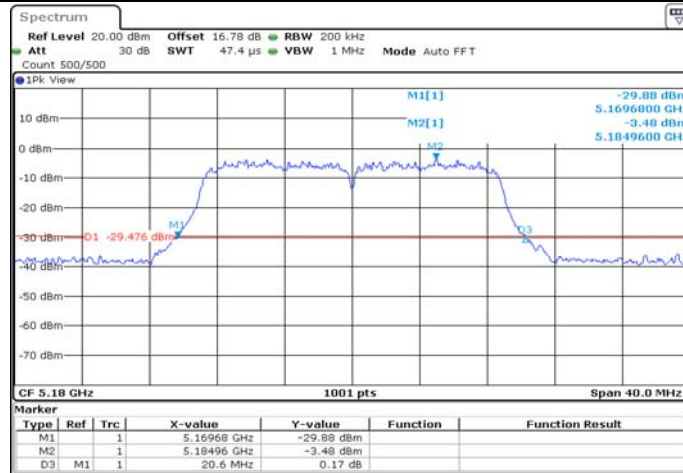


Date: 29_JUL_2020 12:40:27

11N20MIMO Ant1 5200

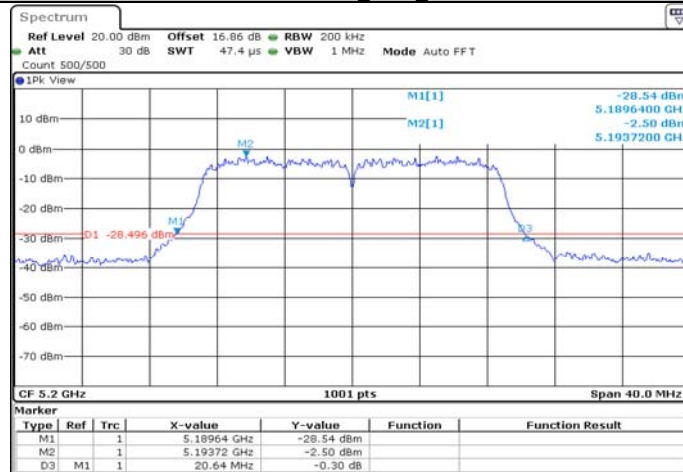


Date: 29_JUL_2020 12:46:09

11N20MIMO Ant2 5200

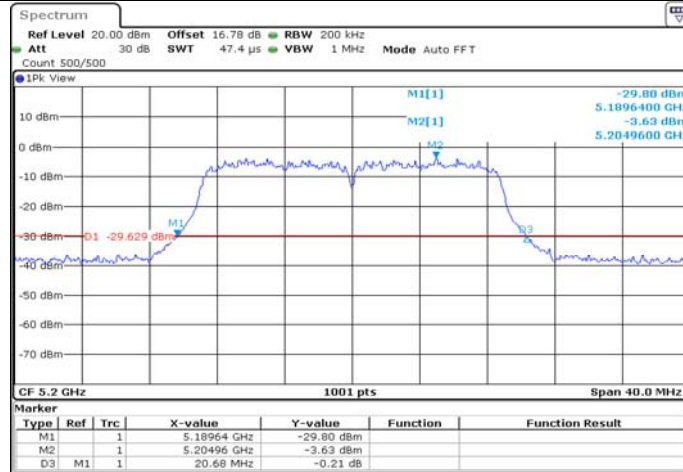


Date: 29_JUL_2020 12:47:46

11N20MIMO Ant1 5240

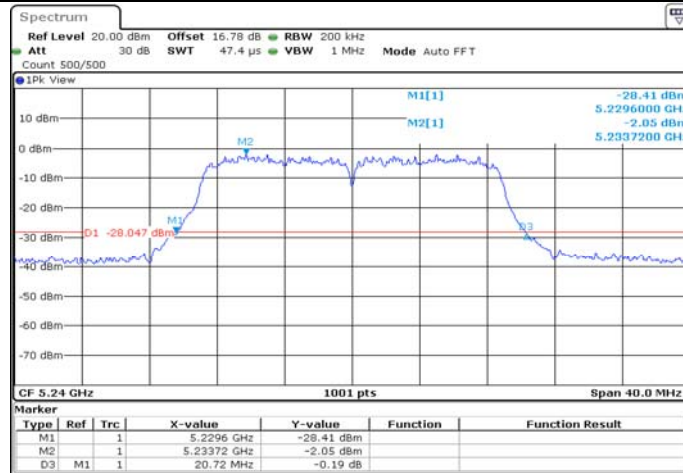


Date: 29_JUL_2020 12:50:07

11N20MIMO Ant2 5240

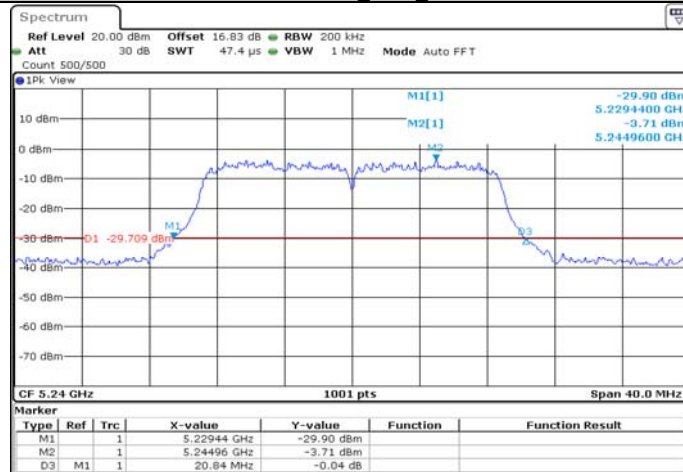


Date: 29_JUL_2020 12:51:02

11N40MIMO Ant1 5190

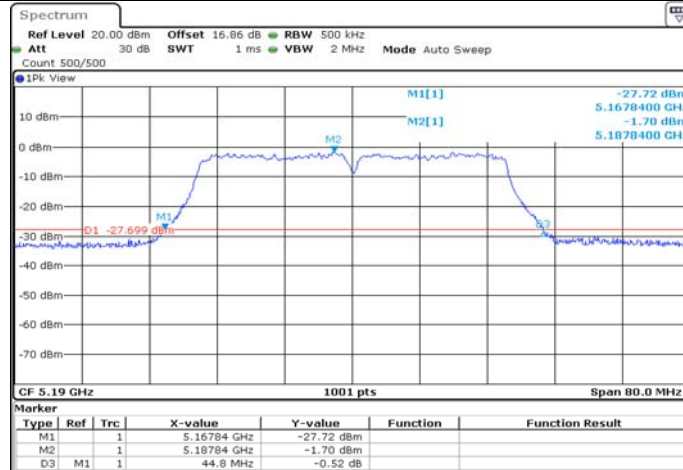


Date: 29.JUL.2020 14:42:02

11N40MIMO Ant2 5190

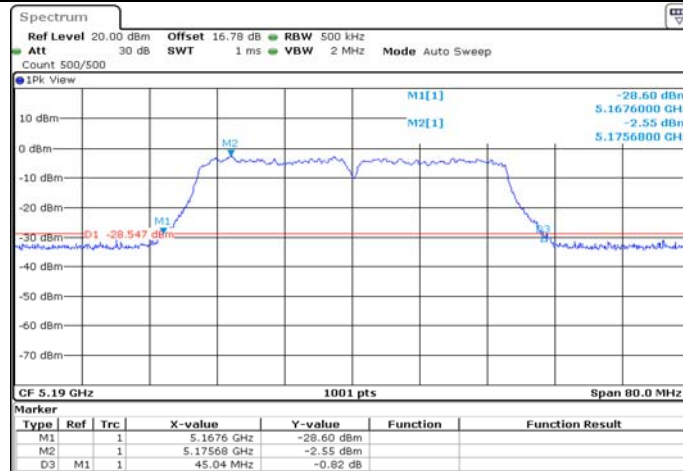


Date: 29.JUL.2020 14:42:49

11N40MIMO Ant1 5230

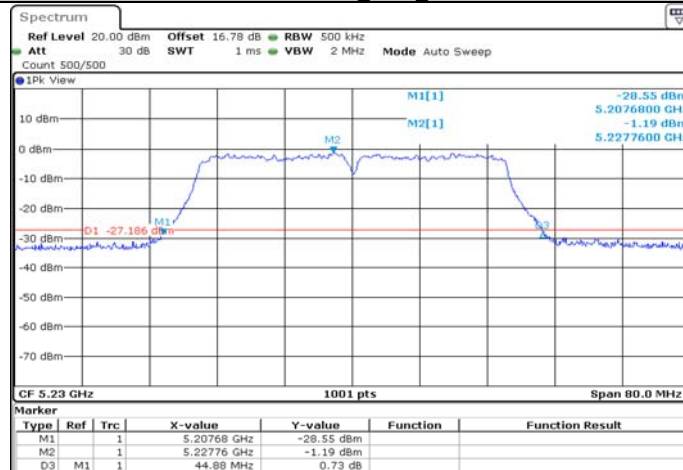


Date: 29.JUL.2020 14:46:51

11N40MIMO Ant2 5230

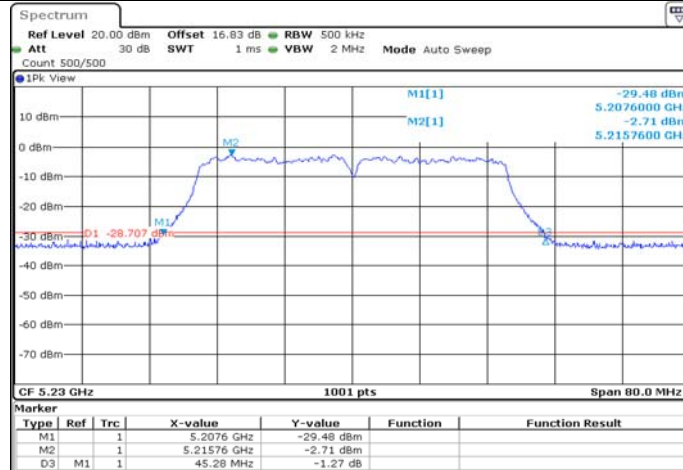


Date: 29_JUL_2020 14:47:58

11AC20MIMO Ant1 5180

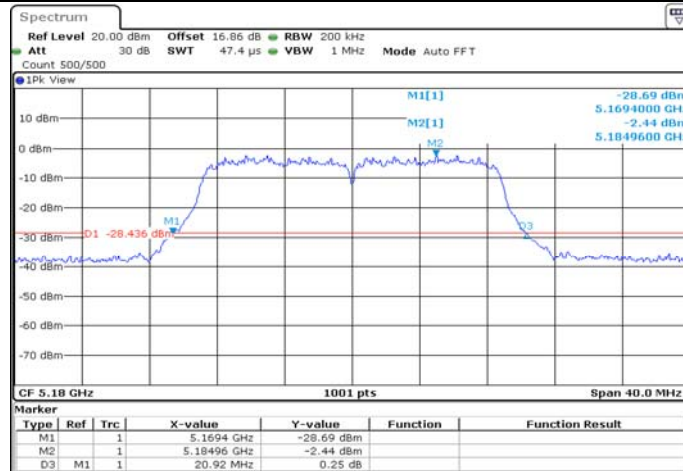


Date: 29_JUL_2020 13:07:32

11AC20MIMO Ant2 5180

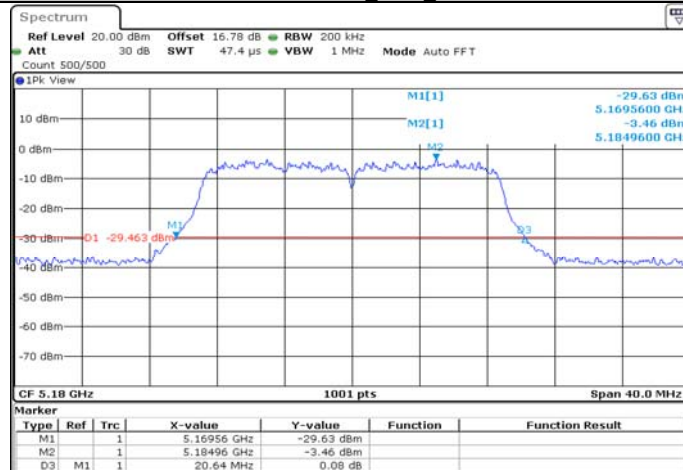


Date: 29_JUL_2020 13:09:00

11AC20MIMO Ant1 5200

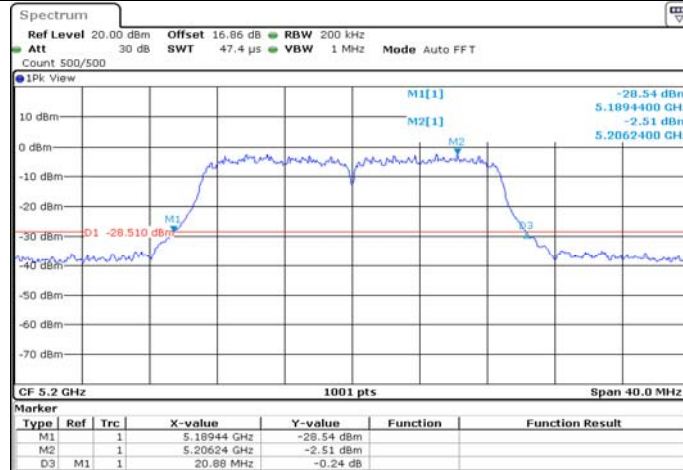


Date: 29_JUL_2020 13:11:14

11AC20MIMO Ant2 5200

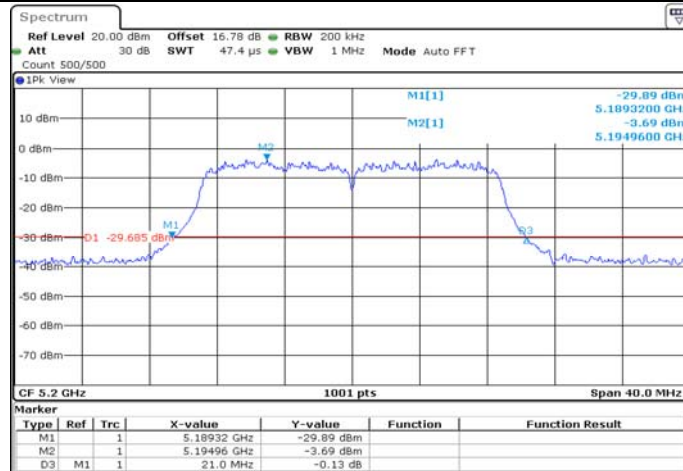


Date: 29_JUL_2020 13:12:10

11AC20MIMO Ant1 5240

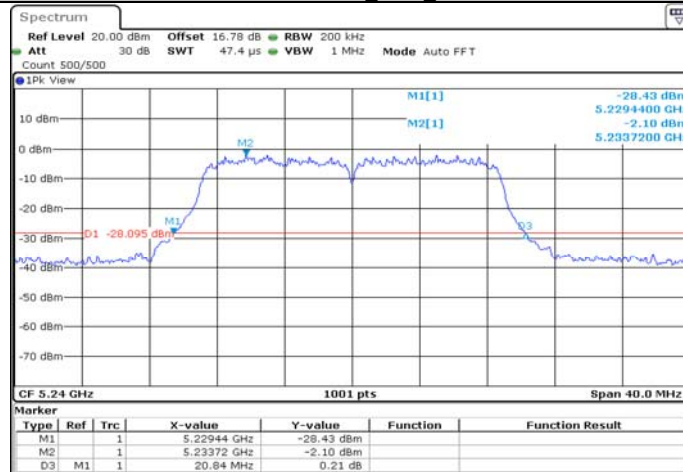


Date: 29_JUL_2020 13:16:27

11AC20MIMO Ant2 5240

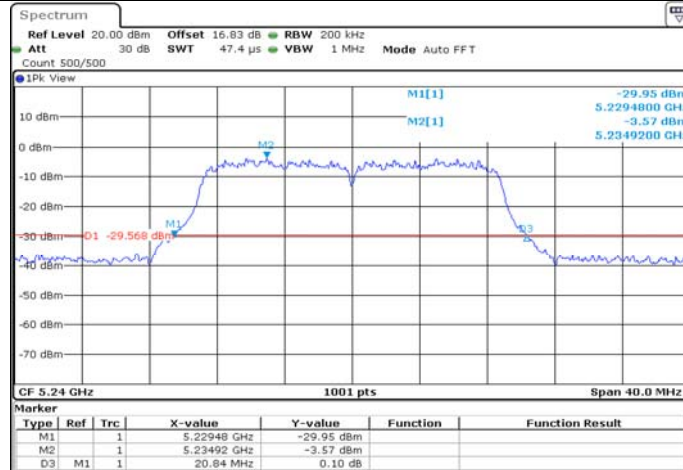


Date: 29.JUL.2020 13:17:23

11AC40MIMO Ant1 5190

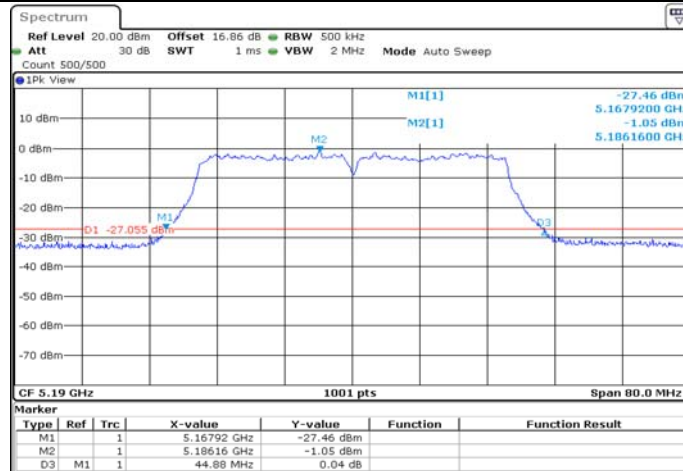


Date: 29.JUL.2020 15:02:36

11AC40MIMO Ant2 5190

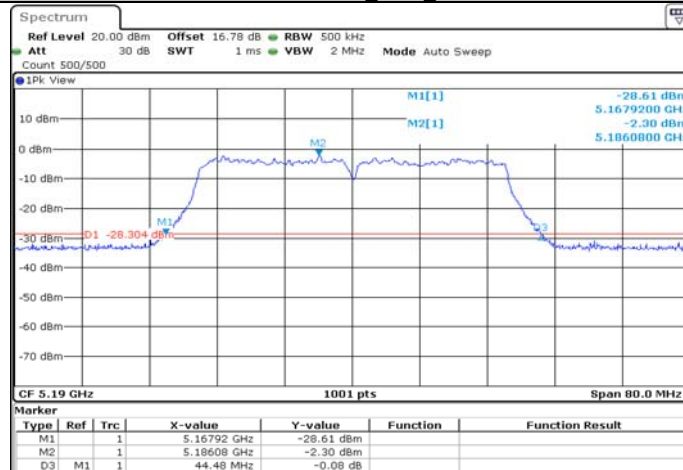


Date: 29.JUL.2020 15:03:41

11AC40MIMO Ant1 5230

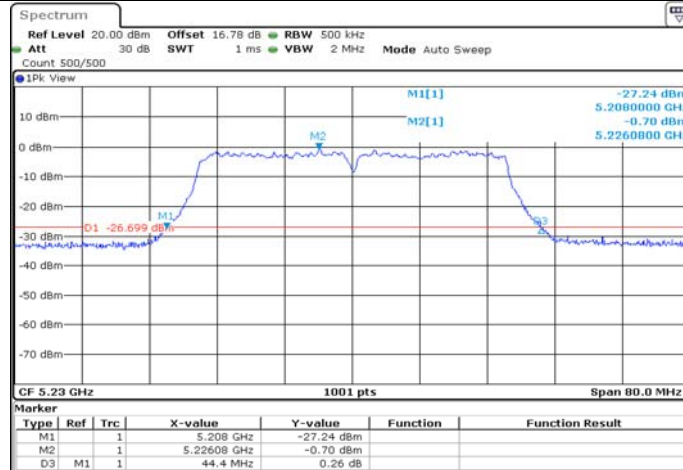


Date: 29.JUL.2020 15:05:46

11AC40MIMO Ant2 5230

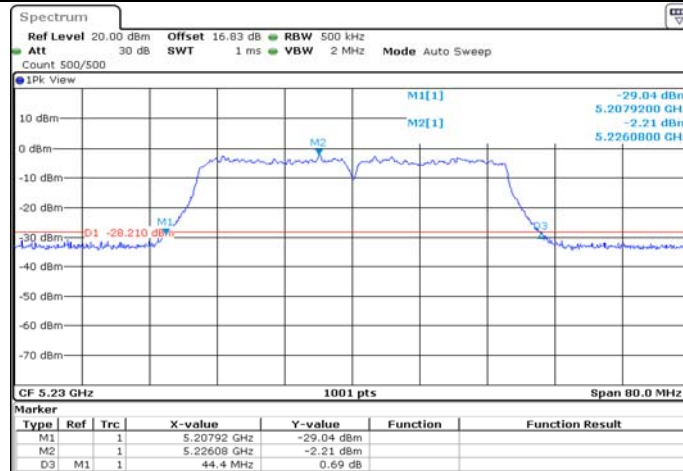


Date: 29.JUL.2020 15:07:10

11AC80MIMO Ant1 5210

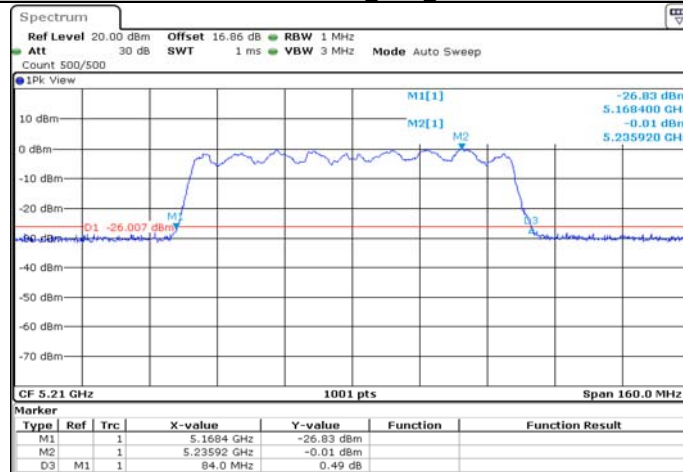

Date: 29.JUL.2020 15:24:49

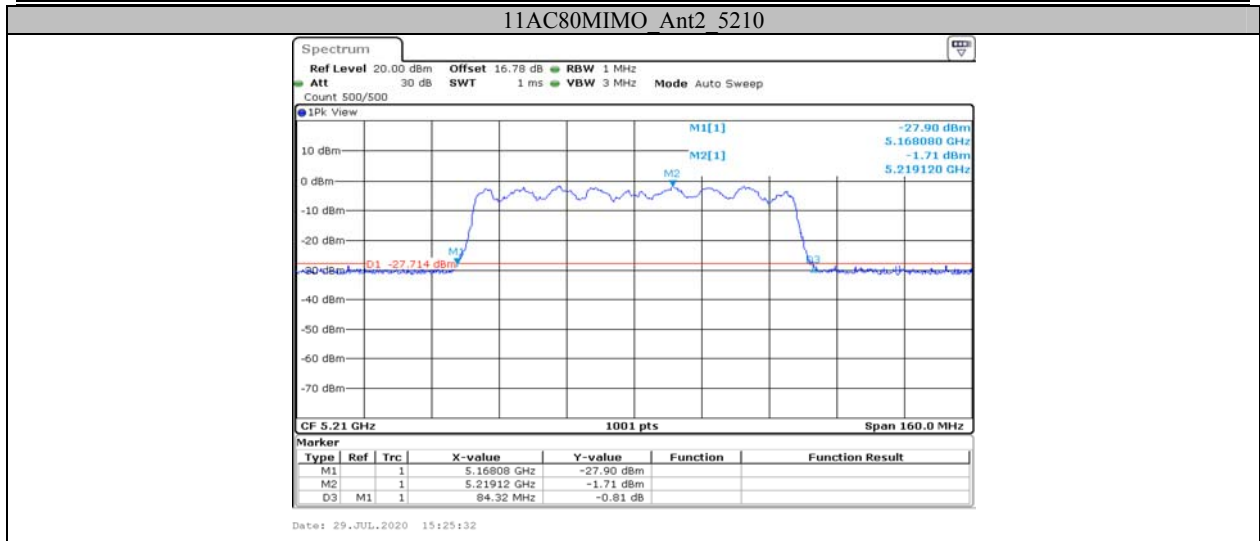

Appendix A2: Occupied channel bandwidth**Test Result**

TestMode	Antenna	Channel	OCB [MHz]	Limit[MHz]	Verdict
11AMIMO	Ant1	5180	17.183	---	PASS
	Ant2	5180	17.183	---	PASS
	Ant1	5200	17.223	---	PASS
	Ant2	5200	17.183	---	PASS
	Ant1	5240	17.183	---	PASS
	Ant2	5240	17.183	---	PASS
	Ant1	5745	17.183	---	PASS
	Ant2	5745	17.223	---	PASS
	Ant1	5785	17.183	---	PASS
	Ant2	5785	17.263	---	PASS
	Ant1	5825	17.183	---	PASS
	Ant2	5825	17.263	---	PASS
11N20MIMO	Ant1	5180	18.062	---	PASS
	Ant2	5180	18.022	---	PASS
	Ant1	5200	18.062	---	PASS
	Ant2	5200	18.062	---	PASS
	Ant1	5240	18.022	---	PASS
	Ant2	5240	18.062	---	PASS
	Ant1	5745	18.102	---	PASS
	Ant2	5745	18.102	---	PASS
	Ant1	5785	18.102	---	PASS
	Ant2	5785	18.102	---	PASS
	Ant1	5825	18.062	---	PASS
	Ant2	5825	18.102	---	PASS
11N40MIMO	Ant1	5190	37.483	---	PASS
	Ant2	5190	37.483	---	PASS
	Ant1	5230	37.403	---	PASS
	Ant2	5230	37.483	---	PASS
	Ant1	5755	37.483	---	PASS
	Ant2	5755	37.562	---	PASS
	Ant1	5795	37.483	---	PASS
	Ant2	5795	37.642	---	PASS
11AC20MIMO	Ant1	5180	18.062	---	PASS
	Ant2	5180	18.022	---	PASS
	Ant1	5200	18.102	---	PASS
	Ant2	5200	18.102	---	PASS
	Ant1	5240	17.183	---	PASS
	Ant2	5240	17.183	---	PASS
	Ant1	5745	18.102	---	PASS
	Ant2	5745	18.102	---	PASS
	Ant1	5785	18.102	---	PASS
	Ant2	5785	18.102	---	PASS
	Ant1	5825	18.102	---	PASS
	Ant2	5825	18.102	---	PASS
11AC40MIMO	Ant1	5190	37.403	---	PASS
	Ant2	5190	37.483	---	PASS
	Ant1	5230	37.403	---	PASS
	Ant2	5230	37.403	---	PASS
	Ant1	5755	37.403	---	PASS
	Ant2	5755	37.562	---	PASS
	Ant1	5795	37.483	---	PASS

	Ant2	5795	37.562	---	PASS
11AC80MIMO	Ant1	5210	76.563	---	PASS
	Ant2	5210	76.404	---	PASS
	Ant1	5775	76.723	---	PASS
	Ant2	5775	76.563	---	PASS

Test Graphs

11AMIMO_Ant1_5180




11AMIMO_Ant2_5180



11AMIMO_Ant1_5200




11AMIMO_Ant2_5200

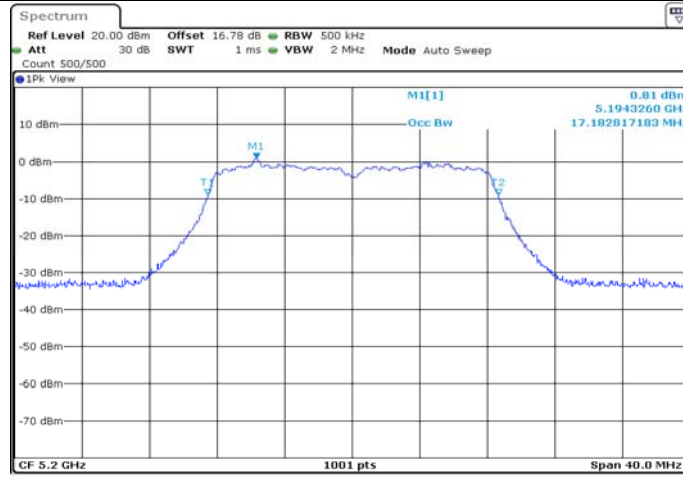


Date: 29.JUL.2020 12:19:31

11AMIMO_Ant1_5240

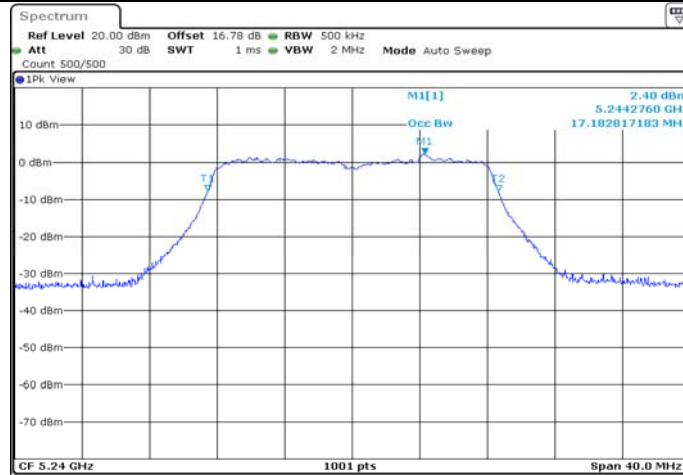

Date: 29.JUL.2020 12:21:33

11AMIMO_Ant2_5240

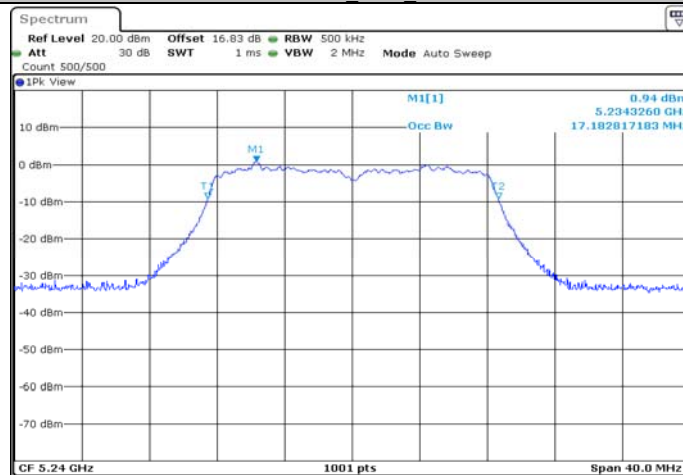

Date: 29.JUL.2020 12:22:53

11AMIMO Ant1 5745




Date: 29.JUL.2020 12:25:30

11AMIMO Ant2 5745




Date: 29.JUL.2020 12:27:02

11AMIMO Ant1 5785

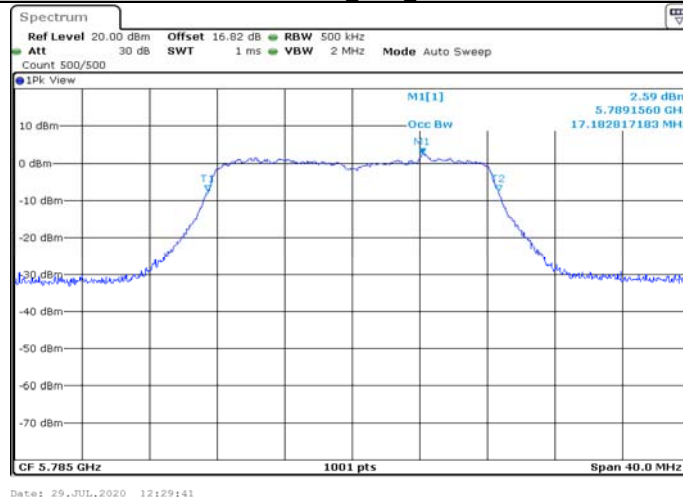


Date: 29.JUL.2020 12:29:41

11AMIMO Ant2_5785

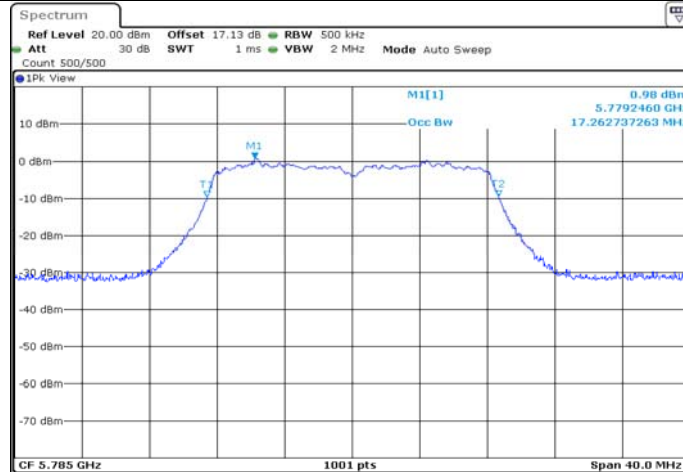


Date: 29_JUL_2020 12:31:07

11AMIMO Ant1_5825

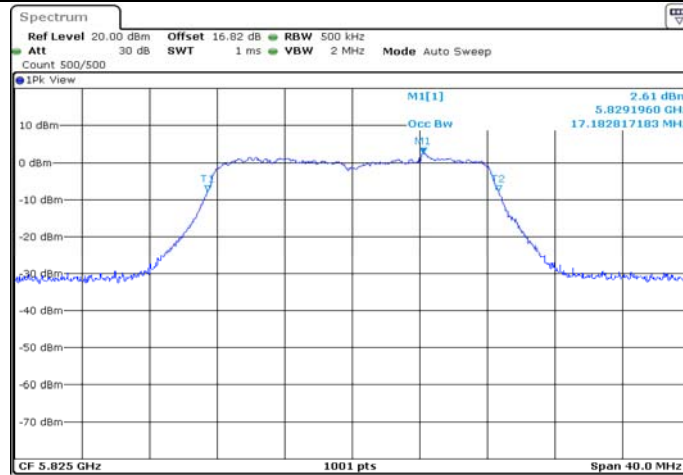


Date: 29_JUL_2020 12:34:49

11AMIMO Ant2_5825

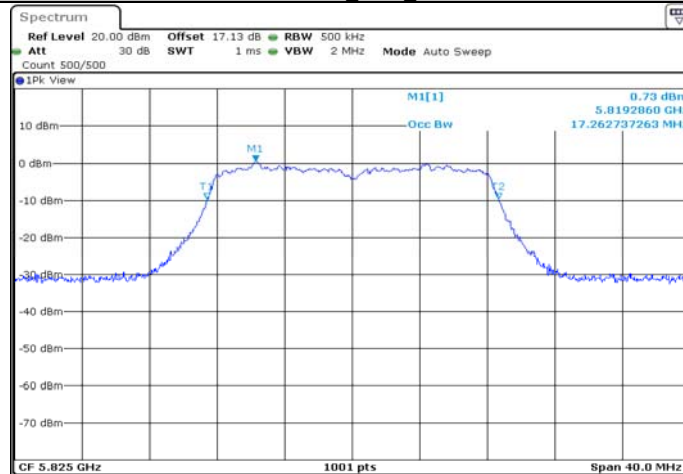

Date: 29_JUL_2020 12:36:15

11N20MIMO Ant1 5180

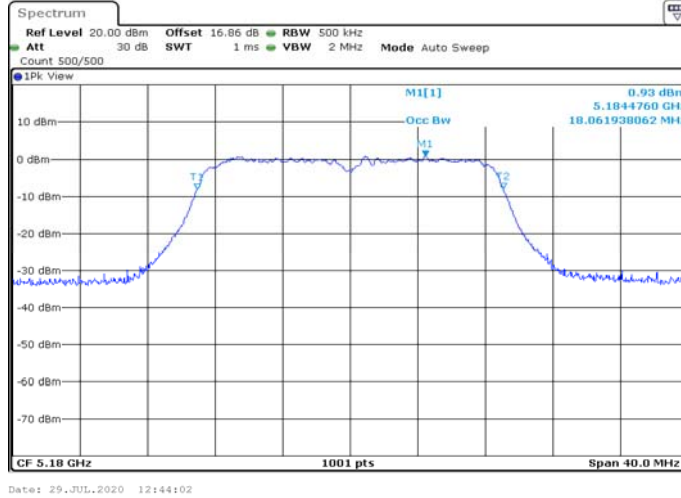

Date: 29.JUL.2020 12:44:02

11N20MIMO Ant2 5180




Date: 29.JUL.2020 12:44:44

11N20MIMO Ant1 5200




Date: 29.JUL.2020 12:46:21

11N20MIMO Ant2 5200

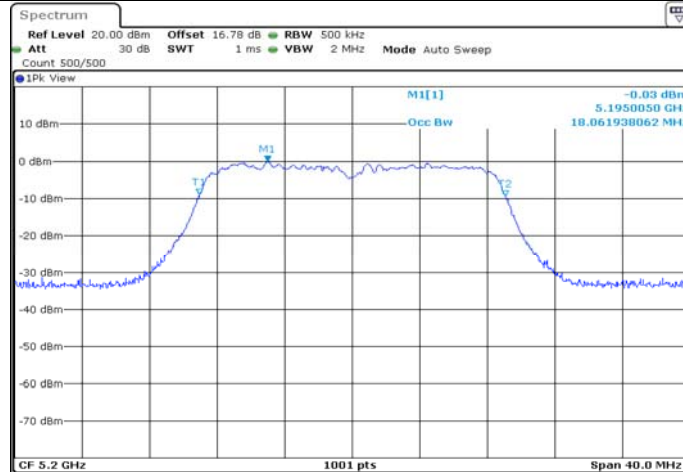


Date: 29.JUL.2020 12:47:58

11N20MIMO Ant1 5240

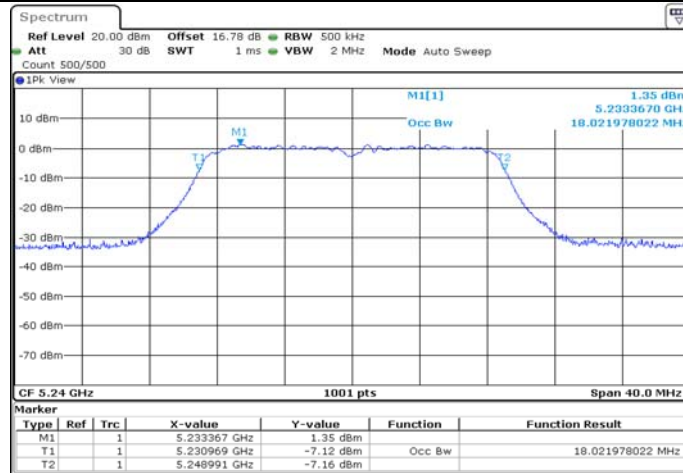


Date: 29.JUL.2020 12:52:30

11N20MIMO Ant2 5240

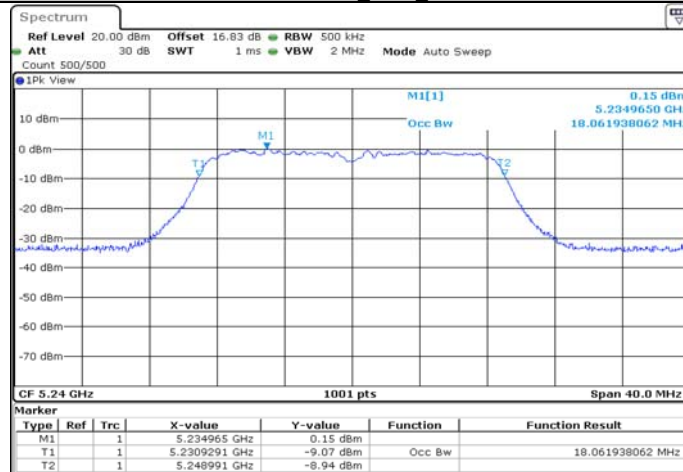

Date: 29.JUL.2020 12:52:47

11N20MIMO Ant1 5745

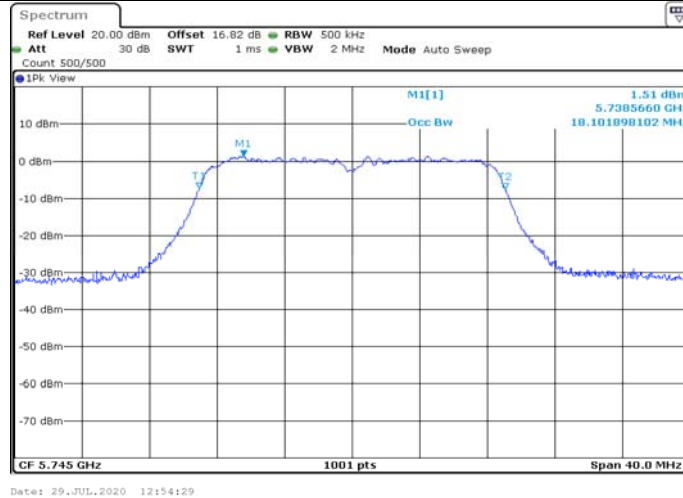


Date: 29.JUL.2020 12:54:29

11N20MIMO Ant2 5745




Date: 29.JUL.2020 12:55:55

11N20MIMO Ant1 5785

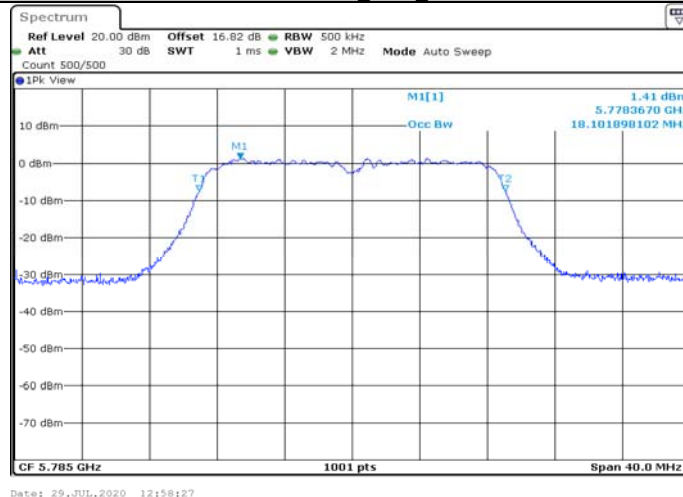


Date: 29.JUL.2020 12:58:27

11N20MIMO Ant2 5785

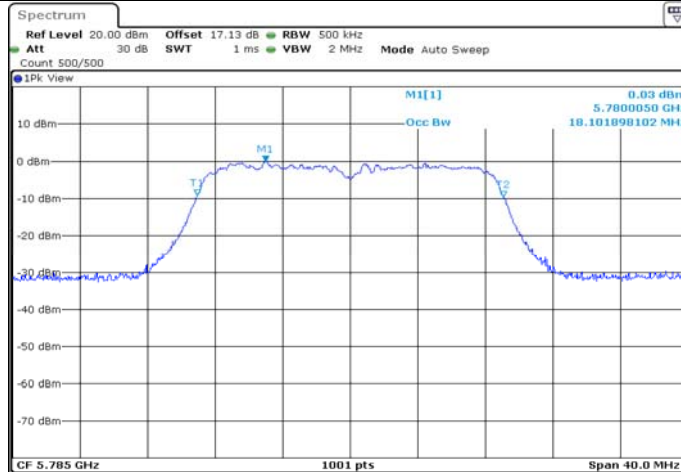


Date: 29.JUL.2020 12:59:49

11N20MIMO Ant1 5825

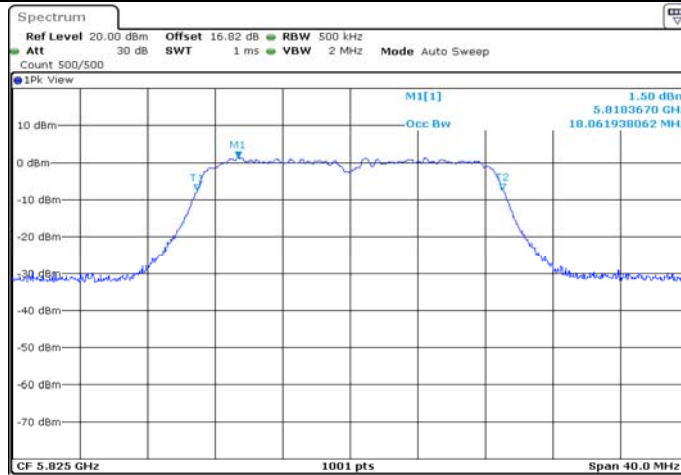

Date: 29.JUL.2020 13:02:06

11N20MIMO Ant2 5825

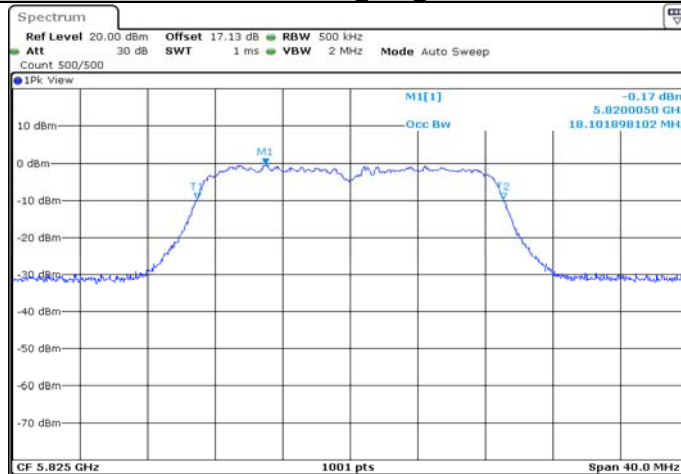

Date: 29.JUL.2020 13:04:24

11N40MIMO Ant1 5190




11N40MIMO Ant2 5190



11N40MIMO Ant1 5230



11N40MIMO Ant2 5230

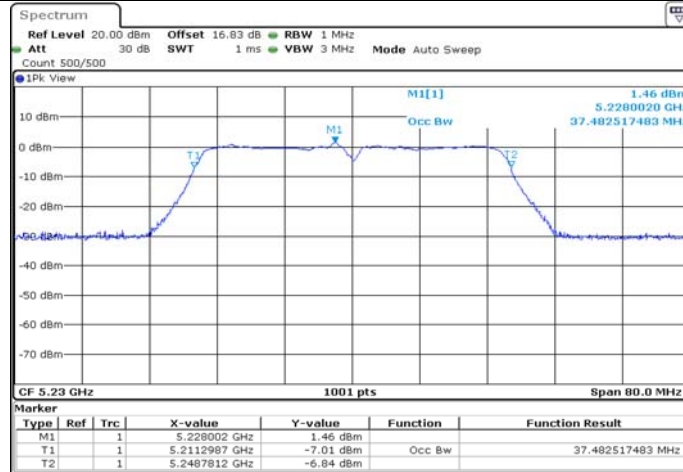

11N40MIMO Ant1 5755



11N40MIMO Ant2 5755



11N40MIMO Ant1 5795




11N40MIMO Ant2 5795



11AC20MIMO Ant1 5180




11AC20MIMO_Ant2_5180

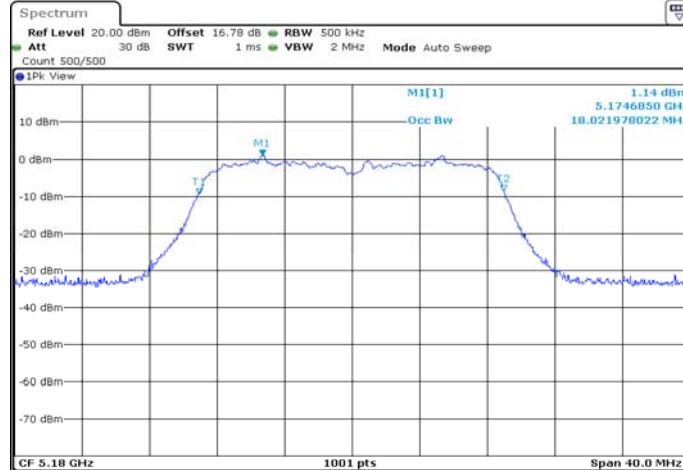


Date: 29.JUL.2020 13:09:11

11AC20MIMO_Ant1_5200

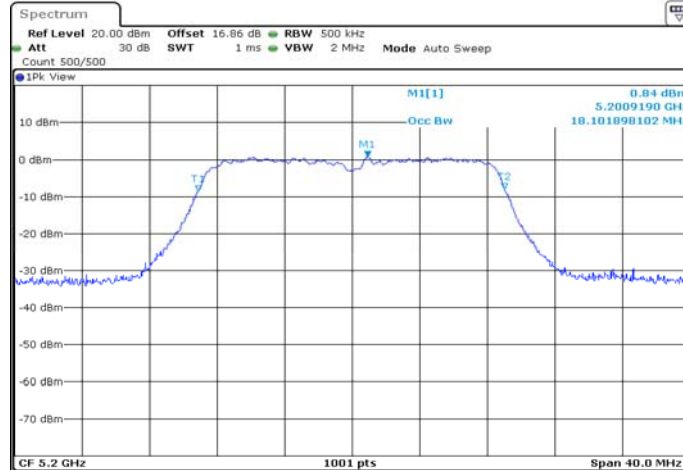


Date: 29.JUL.2020 13:13:49

11AC20MIMO_Ant2_5200

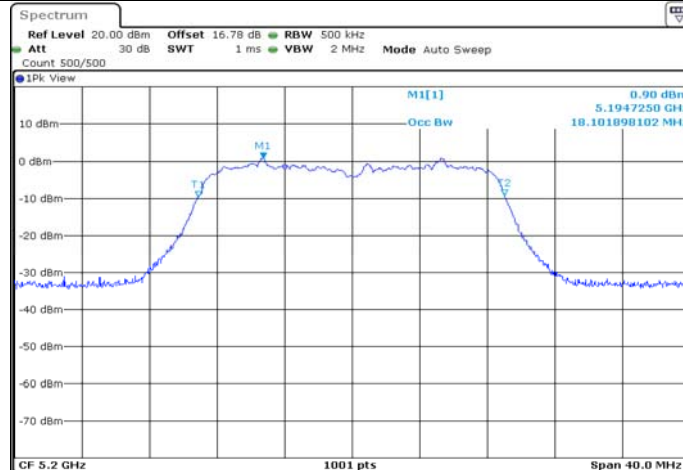


Date: 29.JUL.2020 13:14:14


11AC20MIMO Ant1 5240

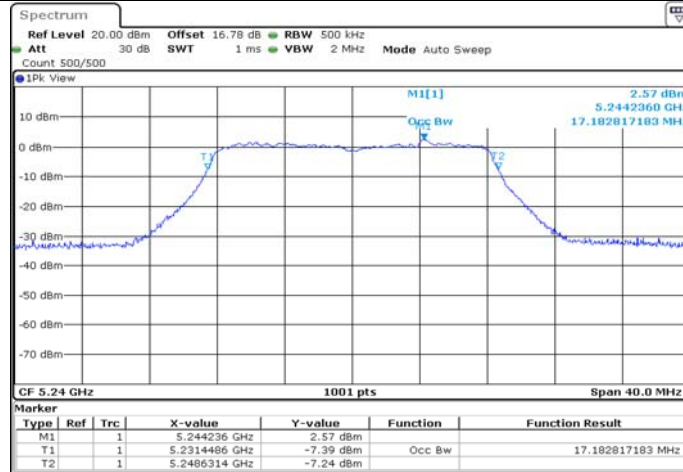


11AC20MIMO Ant2 5240

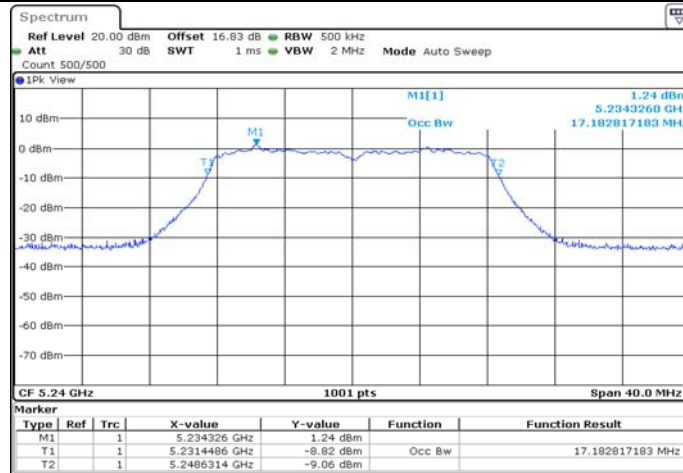

11AC20MIMO Ant1 5745

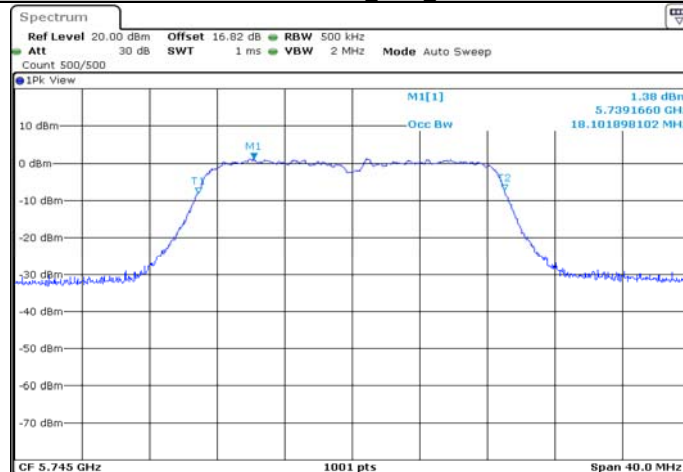


11AC20MIMO Ant2_5745

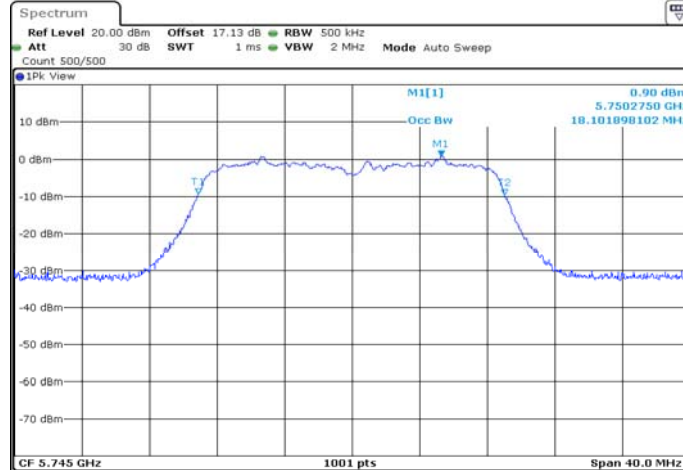


Date: 29.JUL.2020 13:22:51

11AC20MIMO Ant1_5785

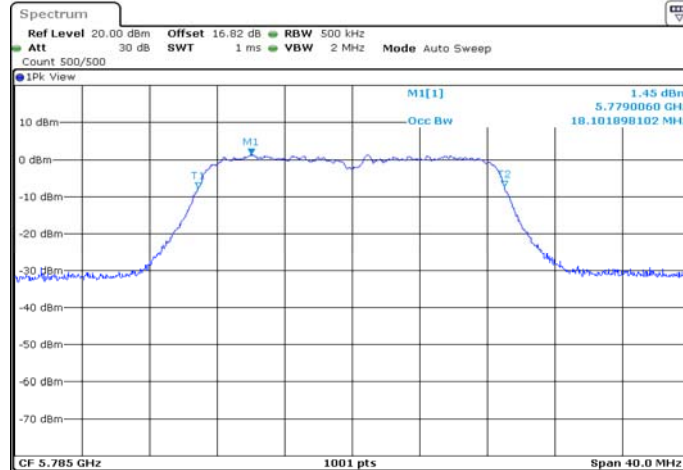


Date: 29.JUL.2020 14:27:47

11AC20MIMO Ant2_5785

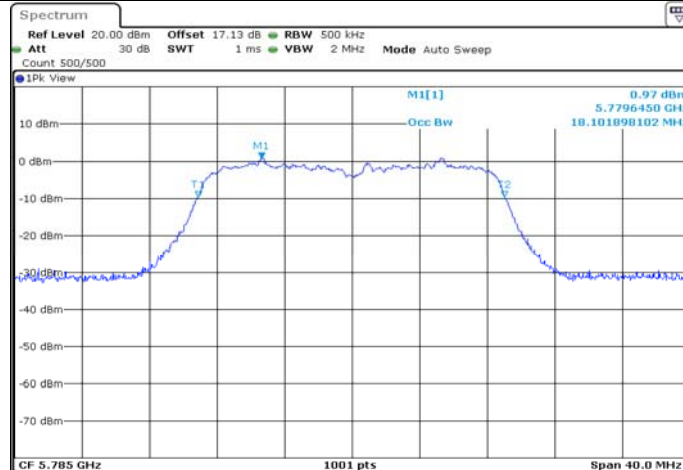


Date: 29.JUL.2020 14:29:10


11AC20MIMO Ant1 5825

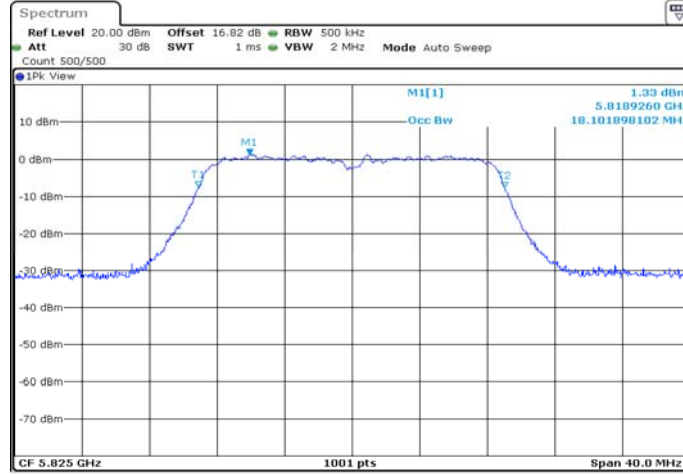

11AC20MIMO Ant2 5825

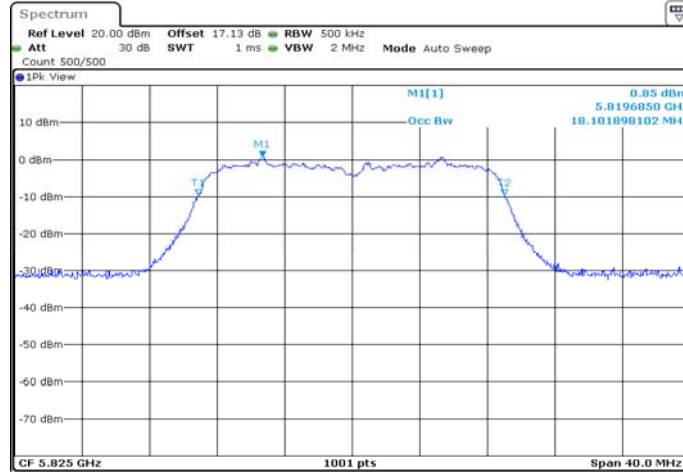


11AC40MIMO Ant1 5190

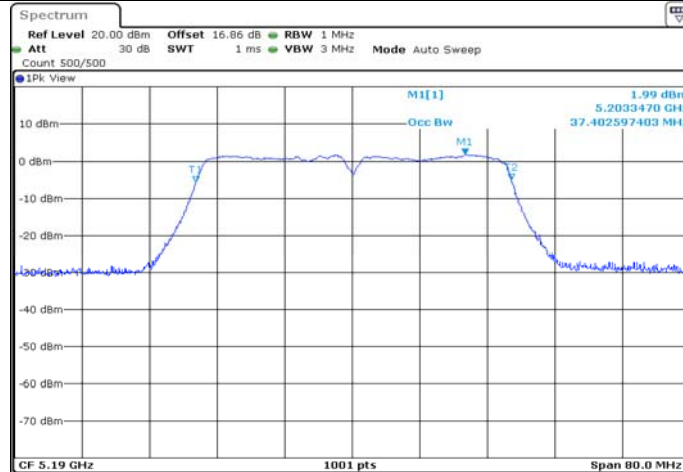

11AC40MIMO Ant2 5190




11AC40MIMO Ant1 5230

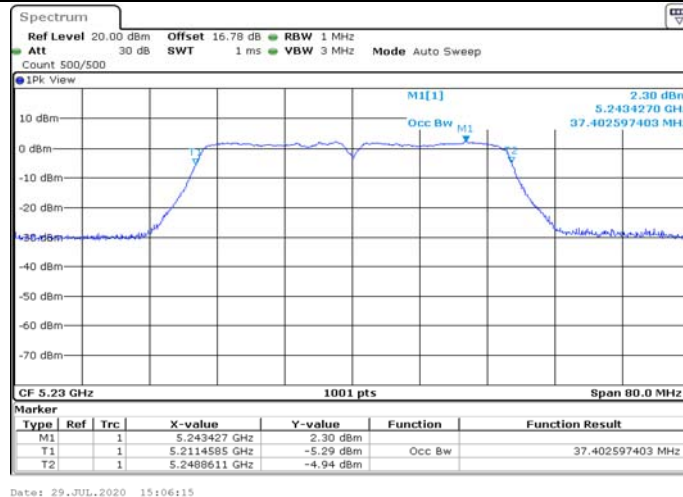

11AC40MIMO Ant2 5230




11AC40MIMO_Ant1_5755

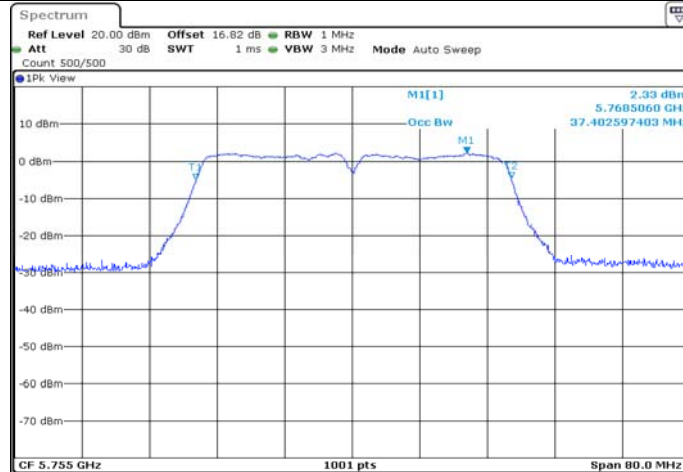

11AC40MIMO_Ant2_5755




11AC40MIMO_Ant1_5795

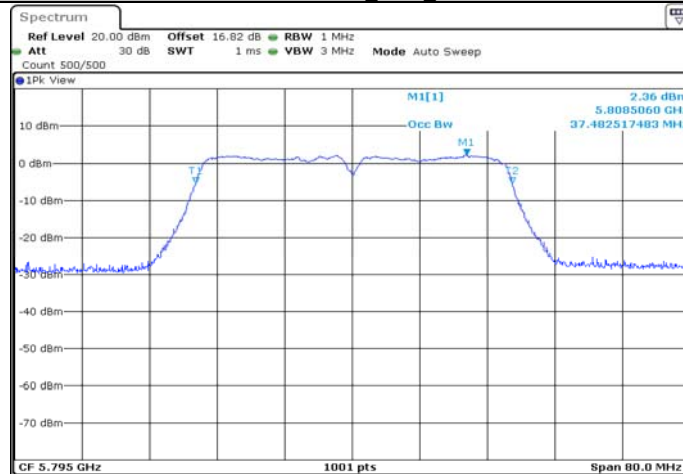

11AC40MIMO Ant2 5795




11AC80MIMO Ant1 5210

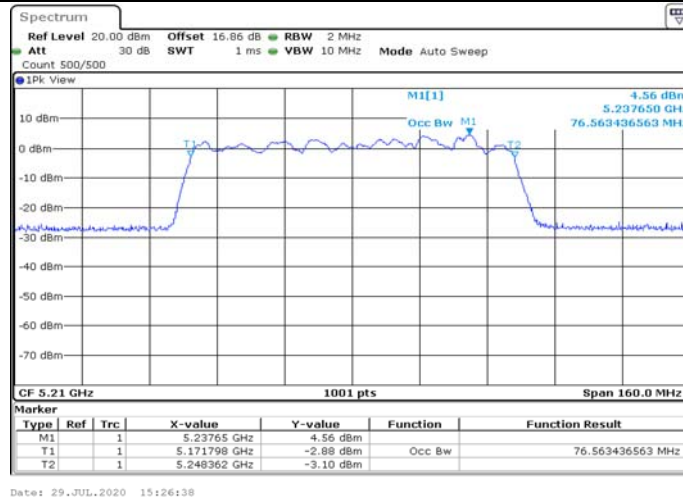

11AC80MIMO Ant2 5210




11AC80MIMO_Ant1_5775

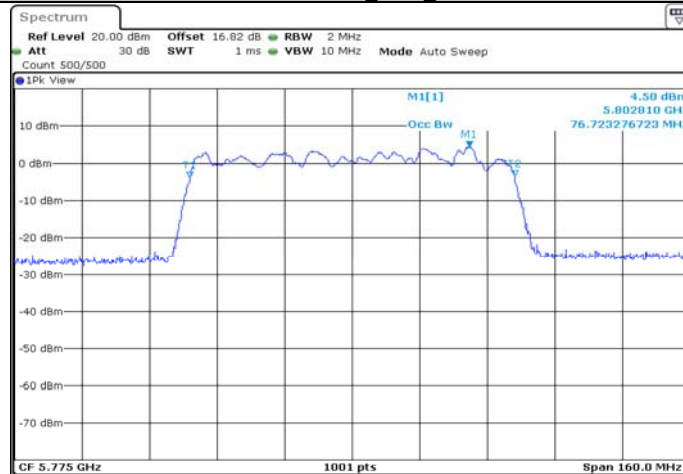

Date: 29.JUL.2020 15:30:47

11AC80MIMO_Ant2_5775

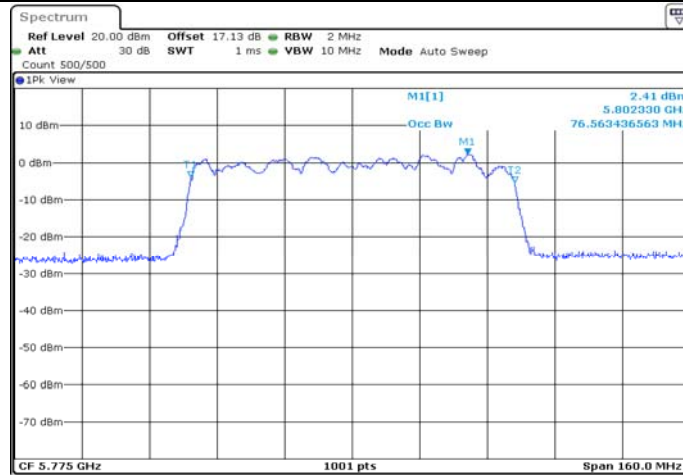

Date: 29.JUL.2020 15:33:20