



EMI – TEST REPORT

- FCC Part 15.519, RSS-220 -

Type / Model Name : KINEXON Handheld Tag / T010002

Product Description : Tracking tag for an UWB localization system

Applicant : KINEXON Inc.

Address : 200 S Wacker Drive, Suite 3100

CHICAGO, IL 60606, USA

Manufacturer : KINEXON GmbH

Address : Schellingstr.35

80799 MÜNCHEN, GERMANY

Test Result according to the standards
listed in clause 1 test standards:

POSITIVE

Test Report No. : 80202487-06 Rev0

08. May 2024

Date of issue



Deutsche
Akkreditierungsstelle
D-PL-12030-01-03
D-PL-12030-01-04

FCC ID: 2ALC5-KNX-HTAG2

IC: 25557-KNXHTAG2

Contents

1	<u>TEST STANDARDS</u>	<u>3</u>
2	<u>EQUIPMENT UNDER TEST</u>	<u>4</u>
2.1	Information provided by the Client	4
2.2	Sampling	4
2.3	Photo documentation of the EUT – Detailed photos see ATTACHMENT A	4
2.4	Equipment type	4
2.5	Short description of the equipment under test (EUT)	4
2.6	Variants of the EUT	4
2.7	Operation frequency and channel plan	4
2.8	Transmit operating modes	5
2.9	Antenna	5
2.10	Power supply system utilised	5
2.11	Peripheral devices and interface cables	5
2.12	Determination of worst case conditions for final measurement	5
3	<u>TEST RESULT SUMMARY</u>	<u>6</u>
3.1	Revision history of test report	6
3.2	Final assessment	7
4	<u>TEST ENVIRONMENT</u>	<u>8</u>
4.1	Address of the test laboratory	8
4.2	Environmental conditions	8
4.3	Statement of the measurement uncertainty	8
4.4	Conformity Decision Rule	9
4.5	Measurement protocol for FCC and ISSED	9
5	<u>TEST CONDITIONS AND RESULTS</u>	<u>12</u>
5.1	UWB Bandwidth	12
5.2	Radiated Emissions 9 kHz to 40 GHz	16
5.3	Radiated Emissions at 1164-1240 MHz and 1559-1610 MHz	25
5.4	Peak Power radiated	31
5.5	Signal deactivation	33
6	<u>USED TEST EQUIPMENT AND ACCESSORIES</u>	<u>35</u>

ATTACHMENT A as separate supplements

The test report merely corresponds to the test sample. It is not permitted to copy extracts of these test results without the written permission of the test laboratory.

FCC ID: 2ALC5-KNX-HTAG2**IC: 25557-KNXHTAG2**

1 TEST STANDARDS

The tests were performed according to following standards:

FCC Rules and Regulations Part 15, Subpart C - Intentional Radiators (March 2024)

Part 15, Subpart C, Section 15.203	Antenna requirement
Part 15, Subpart C, Section 15.204	External radio frequency power amplifiers and antenna modifications
Part 15, Subpart C, Section 15.207	Conducted limits
Part 15, Subpart C, Section 15.209	Radiated emission limits, general requirements

FCC Rules and Regulations Part 15, Subpart F – Ultra Wideband Operation (March 2024)

Part 15, Subpart F, Section 15.519	Technical requirements for hand held UWB systems
Part 15, Subpart F, Section 15.521	Technical requirements applicable to all UWB devices

Industry Canada – Radio equipment standards

RSS-Gen, Issue 5 + A1 + A2, March 2019	General Requirements for Compliance of Radio Apparatus
RSS-220, Issue 1 + A1, July 2018	Devices Using Ultra-Wideband (UWB) Technology
ANSI C63.10: 2013	Testing Unlicensed Wireless Devices
ETSI TR 100 028 V1.3.1: 2001-03	Electromagnetic Compatibility and Radio Spectrum Matters (ERM); Uncertainties in the Measurement of Mobile Radio Equipment Characteristics—Part 1 and Part 2
KDB 393764 D01 v02r01 (April 25, 2022)	Ultra-Wideband (UWB) Devices – Frequently Asked Questions

FCC ID: 2ALC5-KNX-HTAG2

IC: 25557-KNXHTAG2

2 EQUIPMENT UNDER TEST

2.1 Information provided by the Client

Please note, we do not take any responsibility for information provided by the client or his representative which may have an influence on the validity of the test results.

2.2 Sampling

The customer is responsible for the choice of sample. Sample configuration, start-up and operation is carried out by the customer or according to his/her instructions.

2.3 Photo documentation of the EUT – Detailed photos see ATTACHMENT A

2.4 Equipment type

handheld UWB Device

2.5 Short description of the equipment under test (EUT)

KINEXON's real time localization system (RTLS) is designed to provide precise tracking and motion information in sport and industrial environment. Tags are small devices equipped with Ultrawide band (UWB), Bluetooth low energy (BLE) and an inertial measurement unit (IMU).

Number of tested samples: 4
 Serial number: 374761 (#CERT_INTERACTIVE_1, Tx measurements)
 374754 (#DEFAULT_1, signal deactivation)
 374758 (#UFL_ALOHA_1, cont. Tx on CH3 for EBW and OBW measurements)
 374759 (#UFL_ALOHA_2, cont. Tx on CH5 for EBW and OBW measurements)
 Firmware version: release/6.11.0
 UWB driver version: 6.11.0

2.6 Variants of the EUT

There are no variants.

2.7 Operation frequency and channel plan

The operating frequency band is 3100 MHz to 10600 MHz.

Channel plan FCC:

Channel number	f _c (MHz)
Channel 3	4492.8
Channel 5	6489.6

Channel plan ISCED

Channel number	f _c (MHz)
Channel 5	6489.6

FCC ID: 2ALC5-KNX-HTAG2
IC: 25557-KNXHTAG2

2.8 Transmit operating modes

Modulation: variable pulse position modulation (PPM) in combination with binary phase shift keying (BPSK).
Data rate: 6.8 Mbit/s

2.9 Antenna

The following antennas shall be used with the EUT:

Number	Characteristic	Model number	Plug	Frequency range (GHz)	Peak Gain (dBi)
1	Omni	3100AT51A7200	PCB	3.1 – 10.3	1.5

2.10 Power supply system utilised

Power supply voltage, V_{nom} : 3.7 V DC

2.11 Peripheral devices and interface cables

The following peripheral devices and interface cables are connected during the measurements:

- --- Model : ---

2.12 Determination of worst case conditions for final measurement

Measurements are made in all three orthogonal axes with horizontal and vertical antenna positions to determine the worst case condition. For the further measurement the EUT is set in X position.

2.12.1 Test jig

No test jig is used.

2.12.2 Test software

Special test software is provided by the applicant for continuous transmission and free power setting. The power settings are -20 (corresponds to P_{max} -2dB) for channel 3 and -30 (corresponds to P_{max} -3dB) for channel 5.

FCC ID: 2ALC5-KNX-HTAG2

IC: 25557-KNXHTAG2

3 TEST RESULT SUMMARY

FCC Rule Part	RSS Rule Part	Description	Result
15.207(a) 15.521(j)	RSS-Gen, 8.8	AC power line conducted emissions	not applicable *1
15.519(b) 15.521(e)	RSS-220, 2, 5.1(a)	UWB Bandwidth	passed
---	RSS-Gen, 6.6	99 % Bandwidth	passed
15.209(a) 15.519(c) 15.521(c)(d)(h)	RSS-Gen, 8.9 RSS-220, 3.4, 5.3.1(c), 5.3.1(d)	Radiated Emissions 9 kHz to 40 GHz	passed
15.519(d)	RSS-220, 5.3.1(e)	Radiated Emissions at 1164-1240 MHz and 1559-1610 MHz	passed
15.519(e) 15.521(g)	RSS-220, 5.3.1(g)	Peak Power radiated	passed
15.519(a)	RSS-220, 5.3.1(b)	Signal deactivation	passed
15.203 15.521(b)	---	Antenna requirement	passed *2
15.204 15.521(b)	---	External radio frequency power amplifiers and antenna modifications	passed *2
15.521(a)(f)(i)	---	Technical requirements applicable to all UWB devices	passed *3

*1 Not applicable, the EUT can not be connected to the public utility (AC) power line.

*2 According to the applicant, the EUT has an internal PCB antenna. No other antennas can be connected to the EUT. Therefor, the requirements are regarded as fulfilled.

*3 According to the applicant, the EUT will not be used in toys. The EUT is no imaging system. For details refer to the user manual.

3.1 Revision history of test report

Test report No	Rev.	Issue Date	Changes
80202487-06	0	08 May 2024	Initial test report

The test report with the highest revision number replaces the previous test reports.

FCC ID: 2ALC5-KNX-HTAG2

IC: 25557-KNXHTAG2

3.2 Final assessment

Enable Assessment

Date of receipt of test sample : acc. to storage recordsTesting commenced on : 21 March 2024Testing concluded on : 11 April 2024

Checked by:

Tested by:

Klaus Gegenfurtner
Teamleader Radio

Franz-Xaver Schrettenbrunner
Radio Team

FCC ID: 2ALC5-KNX-HTAG2

IC: 25557-KNXHTAG2

4 TEST ENVIRONMENT

4.1 Address of the test laboratory

**CSA Group Bayern GmbH
Ohmstrasse 1-4
94342 STRASSKIRCHEN
GERMANY**

4.2 Environmental conditions

During the measurement the environmental conditions were within the listed ranges:

Temperature: 15 - 35 °C

Humidity: 30 - 60 %

Atmospheric pressure: 86 - 106 kPa

4.3 Statement of the measurement uncertainty

The data and results referenced in this document are true and accurate. It is noted that the expanded measurement uncertainty corresponds to the measurement results from the standard measurement uncertainty multiplied by the coverage factor $k = 2$. The true value is located in the corresponding interval with a probability of 95 %. The measurement uncertainty was calculated for all measurements listed in this test report on basis of the ETSI Technical Report TR 100 028 Electromagnetic compatibility and Radio spectrum Matters (ERM); Uncertainties in the measurement of mobile radio equipment characteristics; Part 1 and Part 2. The results are documented in the quality system acc. to DIN EN ISO/IEC 17025. Furthermore, component and process variability of devices similar to that tested may result in additional deviation. The manufacturer has the sole responsibility of continued compliance of the device.

Measurement Type	Range	Confidence Level (%)	Calculated Uncertainty
AC Conducted Spurious Emissions	0.15 MHz to 30 MHz	95%	$\pm 3.29 \text{ dB}$
20 dB Bandwidth	Center frequency of EUT	95%	$\pm 2.5 \times 10^{-7}$
99% Occupied Bandwidth	Center frequency of EUT	95%	$\pm 2.5 \times 10^{-7}$
Radiated Spurious Emissions	9 kHz to 30 MHz	95%	$\pm 3.53 \text{ dB}$
Radiated Spurious Emissions	30 MHz to 1000 MHz	95%	$\pm 3.71 \text{ dB}$
Radiated Spurious Emissions	1000 MHz to 10000 MHz	95%	$\pm 2.34 \text{ dB}$
Peak conducted output power	902 MHz to 928 MHz	95%	$\pm 0.35 \text{ dB}$
Conducted Spurious Emissions	9 kHz to 10000 MHz	95%	$\pm 2.15 \text{ dB}$

FCC ID: 2ALC5-KNX-HTAG2
IC: 25557-KNXHTAG2

4.4 Conformity Decision Rule

The applied conformity decision rule is based on ILAC G8:09/2019 clause 4.2.1 Binary Statement for Simple Acceptance Rule ($w = 0$).

Details can be found in the procedure CSA_B_V50_29.

4.5 Measurement protocol for FCC and ISED

4.5.1 General information

CSA Group Bayern GmbH is recognized as wireless testing laboratory under the CAB identifier:

FCC: DE 0011

ISED: DE0009

4.5.2 General Standard information

The test methods used comply with ANSI C63.10 - "Testing Unlicensed Wireless Devices".


4.5.2.1 Justification

The equipment under test (EUT) is configured in a typical user arrangement in accordance with the manufacturer's instructions.

4.5.3 Details of test procedures

4.5.3.1 Conducted emission

Test setup according ANSI C63.10

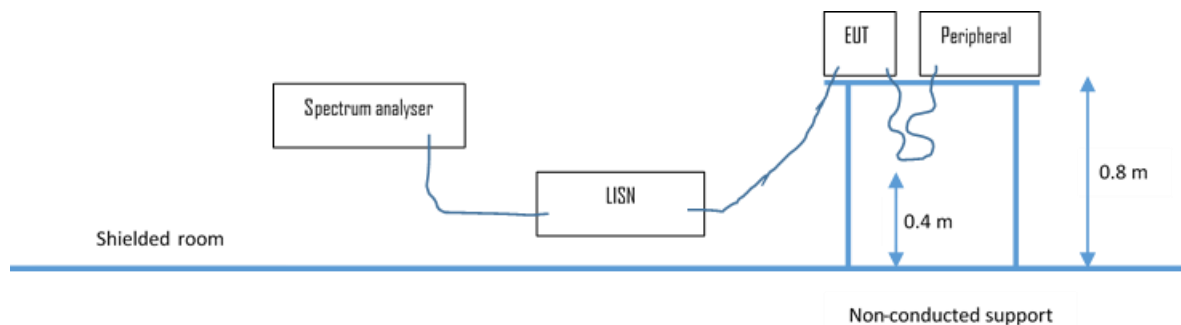

The final level, expressed in dB μ V, is arrived at by taking the reading directly from the Spectrum analyser. This level is compared to the limit.

To convert between dB μ V and μ V, the following conversions apply:

$$\text{dB}\mu\text{V} = 20(\log \mu\text{V})$$

$$\mu\text{V} = \text{Inverse log}(\text{dB}\mu\text{V}/20)$$

Conducted emissions on the 50 Hz and/or 60 Hz power interface of the EUT are measured in the frequency range of 150 kHz to 30 MHz. The measurements are performed using a receiver, which has CISPR characteristic bandwidth and quasi-peak detection and a Line Impedance Stabilization Network (LISN) with 50 Ω / 50 μ H (CISPR 16) characteristics. The receiver is protected by means of an impedance matched pulse limiter connected directly to the RF input. Table top equipment is placed on a non-conducting table 80 centimetres above the floor and is positioned 40 centimetres from the vertical ground plane (wall) of the screen room. If the minimum limit margin appears to be less than 20 dB with a peak mode measurement, the emission is re-measured using a tuned receiver with quasi-peak and average detection and recorded on the data sheets.


FCC ID: 2ALC5-KNX-HTAG2

IC: 25557-KNXHTAG2

4.5.3.2 Radiated emission

4.5.3.2.1 OATS1 test site (9 kHz - 30 MHz):


Test setup according ANSI C63.10

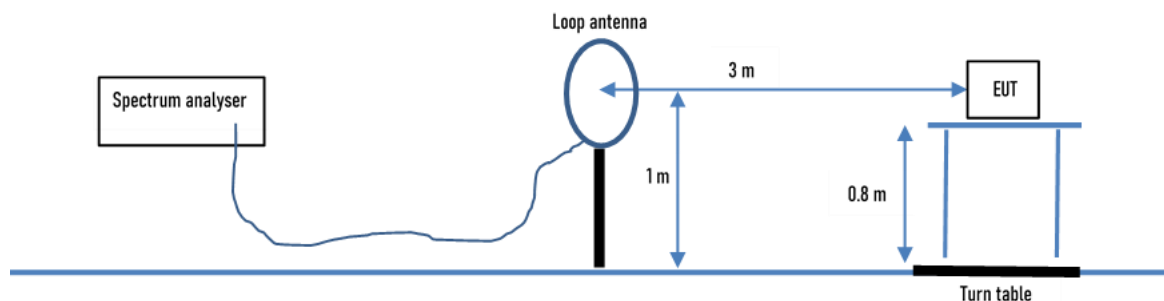

Emissions from the EUT are measured in the frequency range of 9 MHz to 30 MHz using a tuned receiver and a calibrated loop antenna. Table top equipment is placed on a 1.0 X 1.5 m non-conducting table 80 centimetres above the ground plane. Cables to simulators/testers (if used in this test) are routed through the center of the table and to a screened room located outside the test area. The antenna is positioned 3, 10 or 30 metres horizontally from the EUT and is repeated vertically. To locate maximum emissions from the test sample the antenna is varied along the site axis and the EUT is rotated 360 degrees.

4.5.3.2.2 OATS1 test site (30 MHz - 1 GHz):

Test setup according ANSI C63.10.

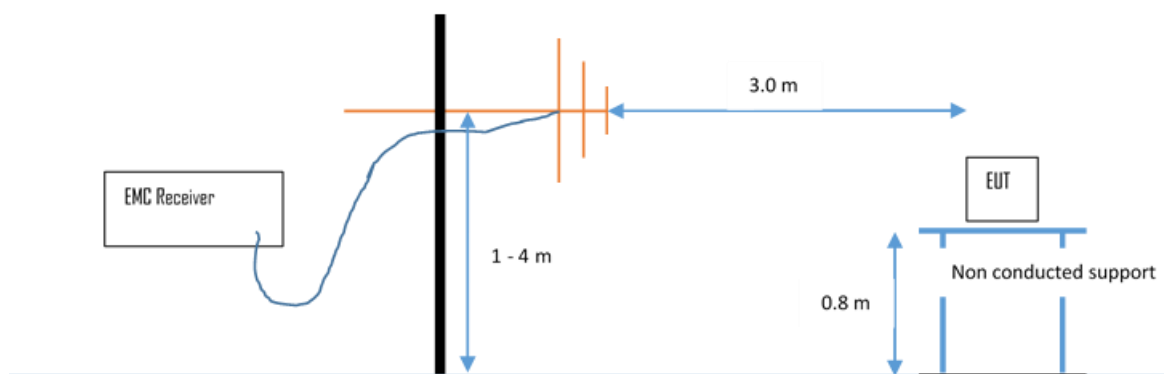

Spurious emissions from the EUT are measured in the frequency range of 30 MHz to 1000 MHz using a tuned receiver and appropriate broadband linearly polarised antennas. Measurements between 30 MHz and 1000 MHz are made with 120 kHz/6 dB bandwidth and quasi-peak detection. Table top equipment is placed on a 1.0 X 1.5 m non-conducting table 80 centimetres above the ground plane. Floor standing equipment is placed directly on the turntable/ground plane. Cables to simulators/testers (if used in this test) are routed through the center of the table and to a screened room located outside the test area. To locate maximum emissions from the test sample the antenna is varied in height from 1 to 4 metres and the EUT is rotated 360 degrees. The final level in dBμV/m is calculated by taking the reading from the EMI receiver (Level dBμV) and adding the correction factors and cable loss factor (dB). The FCC limit is subtracted from this result in order to provide the limit margin listed in the measurement protocol.

The resolution bandwidth setting:

30 MHz – 1000 MHz: RBW: 120 kHz

Example:


Frequency (MHz)	Level (dBμV)	+	Factor (dB)	=	Level (dBμV/m)	-	Limit (dBμV/m)	=	Delta (dB)
719.0	75.0	+	32.6	=	107.6	-	110.0	=	-2.4

FCC ID: 2ALC5-KNX-HTAG2

IC: 25557-KNXHTAG2


4.5.3.2.3 Anechoic chamber 1 (1000 MHz – 18000 MHz)

Test setup according ANSI C63.10.

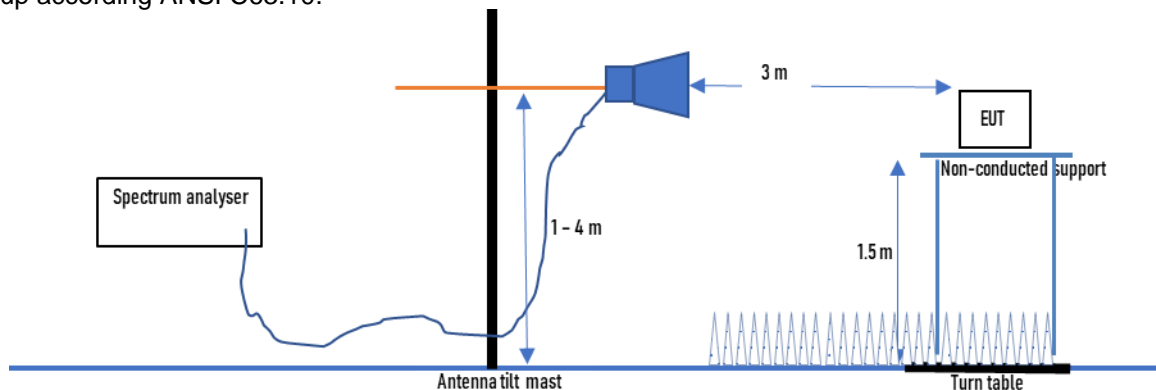

Radiated emissions from the EUT are measured in the frequency range 1 GHz up to 18 GHz as specified in 47 CFR Part 15, Subpart A, Section 15.33, using a spectrum analyser and appropriate linearly polarized antennas. Table top equipment is placed on a non-conducting table, 1.5 metre above the ground plane. The turntable is fully covered with the appropriate absorber (Type VHP-12). Any controlling device is positioned such that it does not significantly influence the measurement results. Interconnecting cables that hang closer than 40 cm to the ground plane are folded back and forth in the center, forming a bundle 30 cm to 40 cm long. Measurements are made in three orientations of the EUT and the horizontal and vertical polarization planes of measurement antenna in a fully anechoic room. The measurement antenna is adjusted and the EUT orientated to permit the measurement of the maximum emission from the EUT. The conditions determined as worst-case will then be used for the final measurements.

4.5.3.2.4 Anechoic chamber 1 (18 GHz – 40 GHz)

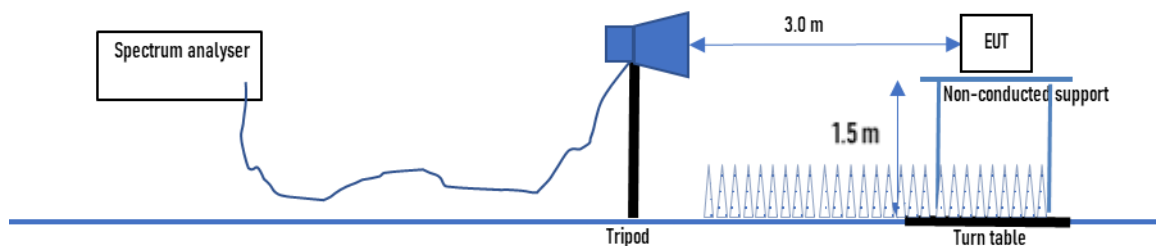

Emissions from the EUT are measured in the frequency range 18 GHz up to 40 GHz as specified in 47 CFR Part 15, Subpart A, Section 15.33, using a spectrum analyser and appropriate linearly polarized antennas. Table top equipment is placed on a non-conducting table, 0.8 metre above the ground plane. The turntable is fully covered with the appropriate absorber (Type VHP-12). Any controlling device is positioned such that it does not significantly influence the measurement results. Interconnecting cables that hang closer than 40 cm to the ground plane are folded back and forth in the center, forming a bundle 30 cm to 40 cm long. Measurements are made in three orientations of the EUT and the horizontal and vertical polarization planes of measurement antenna in a fully anechoic room. The measurement antenna is adjusted and the EUT orientated to permit the measurement of the maximum emission from the EUT. The conditions determined as worst-case will then be used for the final measurements. Where appropriate, the test distance may be reduced in order to detect emissions under better uncertainty. The limit are adopted.

FCC ID: 2ALC5-KNX-HTAG2

IC: 25557-KNXHTAG2

5 TEST CONDITIONS AND RESULTS


5.1 UWB Bandwidth

For test instruments and accessories used see section 6 Part MB.

5.1.1 Description of the test location

Test location: Shielded room S6

5.1.2 Photo documentation of the test set-up

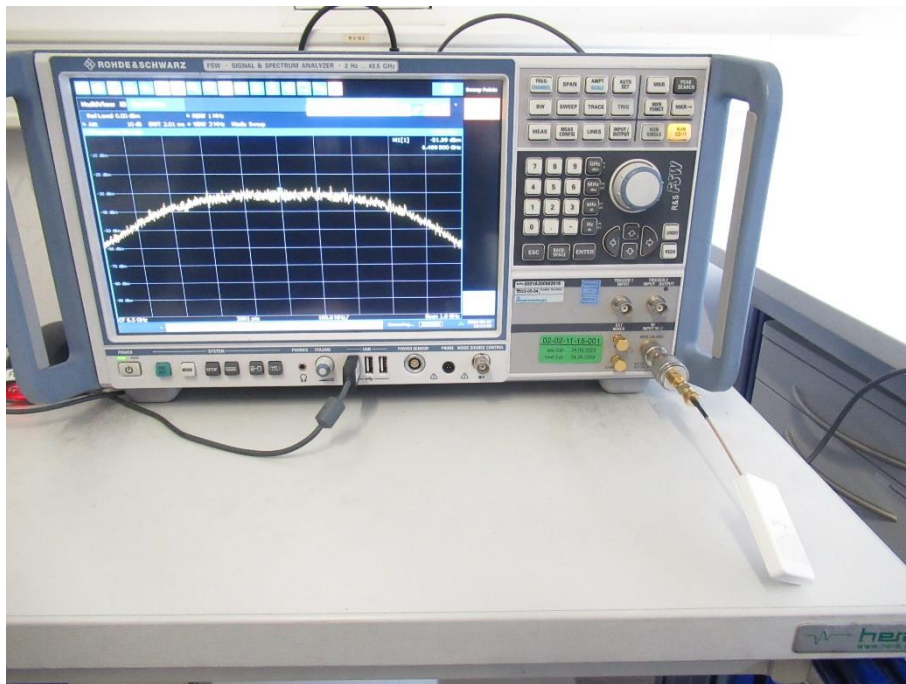

5.1.3 Applicable standard

According to FCC Part 15, Section 15.519(b):

The UWB bandwidth of a UWB system operating under the provisions of this section must be contained between 3100 MHz and 10,600 MHz.

According to FCC Part 15, Section 15.503(d):

Ultra-wideband (UWB) transmitter. An intentional radiator that, at any point in time, has a fractional bandwidth equal to or greater than 0.20 or has a UWB bandwidth equal to or greater than 500 MHz, regardless of the fractional bandwidth.

5.1.4 Description of Measurement

The bandwidth is measured following the procedure set out in ANSI C63-10, Item 10.1. The measurement was performed conducted. The bandwidth was measured at an amplitude level reduced from the reference level of a modulated channel by a ratio of -10 dB. The EUT is set in TX continuous mode while measuring.

Spectrum analyser settings:

RBW: 1 MHz, VBW: 3 MHz, Detector: Peak



FCC ID: 2ALC5-KNX-HTAG2
IC: 25557-KNXHTAG2
5.1.5 Test result



channel	lowest frequency f_L (MHz)	highest frequency f_H (MHz)	permitted frequency range (GHz)	UWB bandwidth (MHz)	required UWB bandwidth (MHz)	result
3	4180.3	4844.2	3.1 – 10.6	663.9	> 500	passed
5	6177.7	6840.8	3.1 – 10.6	663.2	> 500	passed

The requirements are **FULFILLED**.

Remarks: For detailed test results please refer to following test protocols.

The test report merely corresponds to the test sample. It is not permitted to copy extracts of these test results without the written permission of the test laboratory.

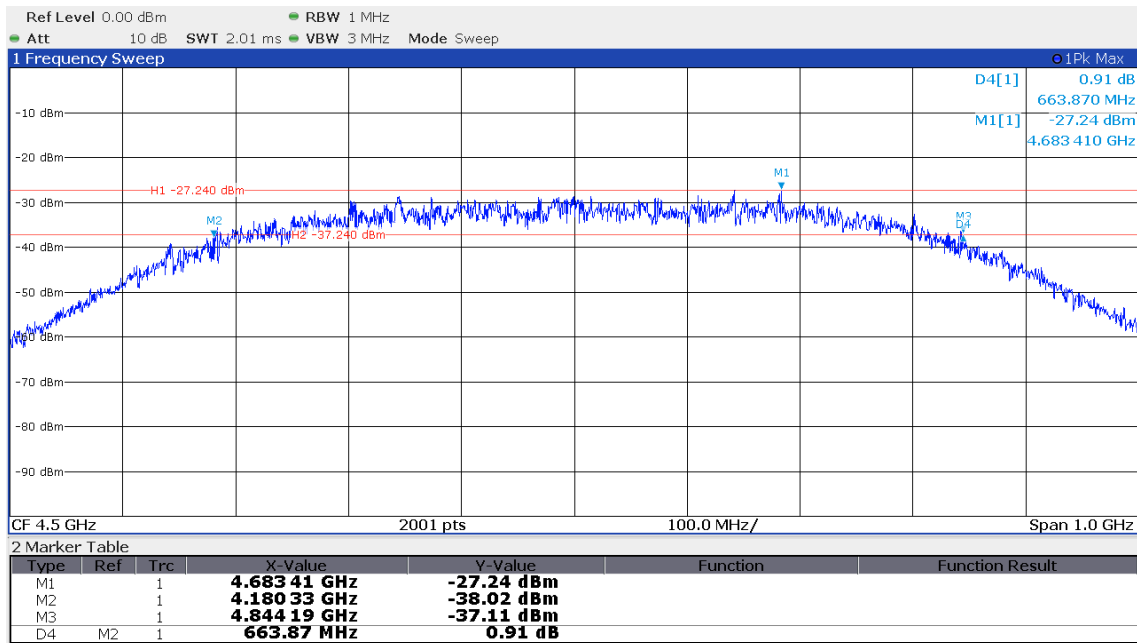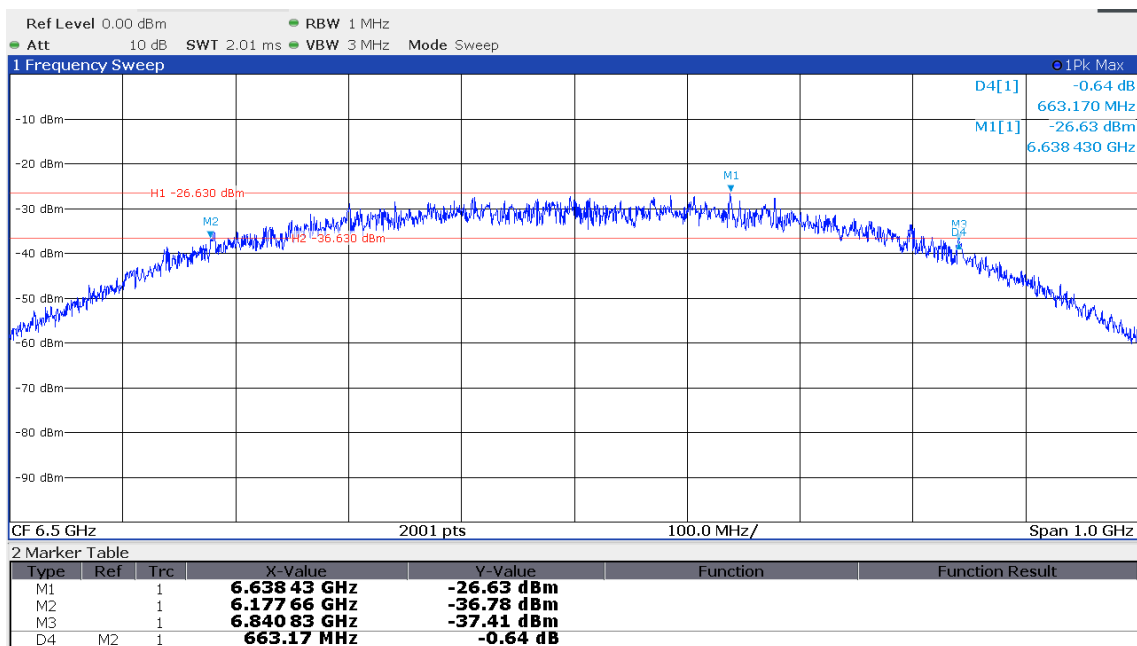FCC ID: 2ALC5-KNX-HTAG2
IC: 25557-KNXHTAG2
5.1.6 Test protocols EBW
Channel 3

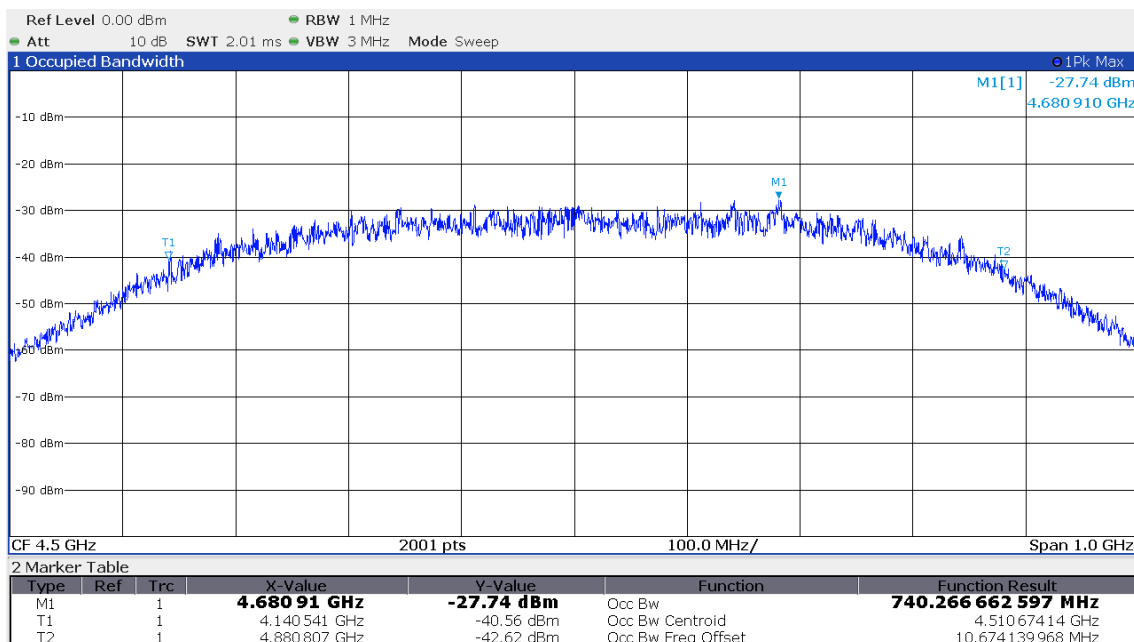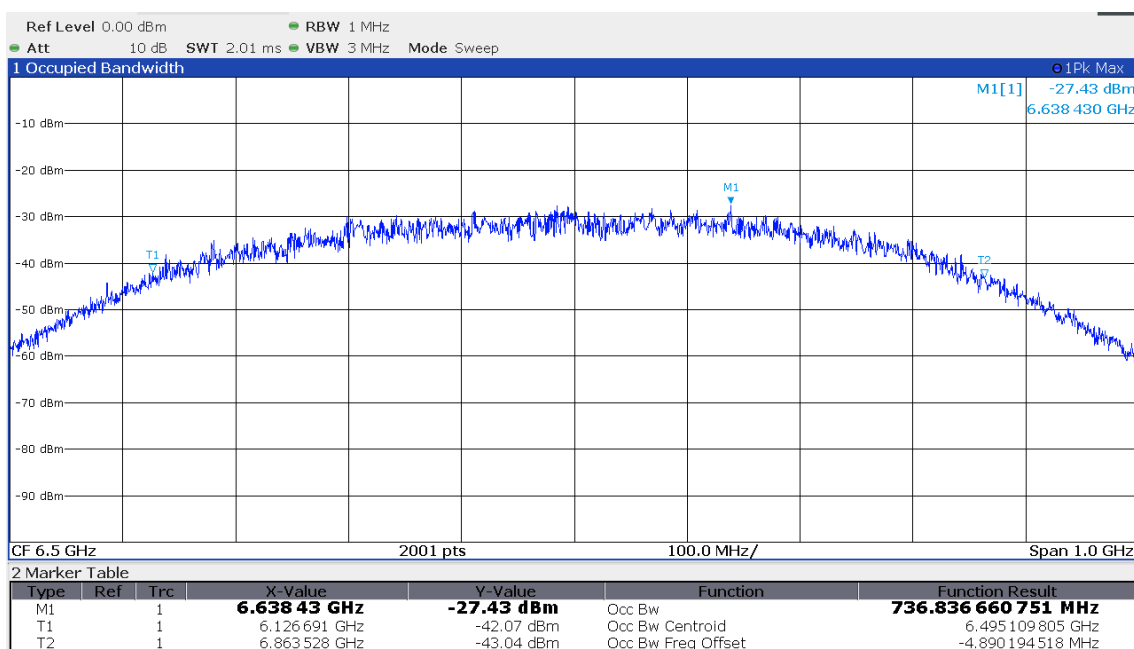Channel 5


FCC ID: 2ALC5-KNX-HTAG2
IC: 25557-KNXHTAG2
5.1.7 Test protocols OBW
Channel 3

Channel 5


FCC ID: 2ALC5-KNX-HTAG2

IC: 25557-KNXHTAG2

5.2 Radiated Emissions 9 kHz to 40 GHz

For test instruments and accessories used see section 6 Part **SER1**, **SER 2** and **SER 3**.

5.2.1 Description of the test location

Test location: OATS 1
Test location: Anechoic chamber 1



5.2.2 Photo documentation of the test set-up



The test report merely corresponds to the test sample. It is not permitted to copy extracts of these test results without the written permission of the test laboratory.

FCC ID: 2ALC5-KNX-HTAG2

IC: 25557-KNXHTAG2

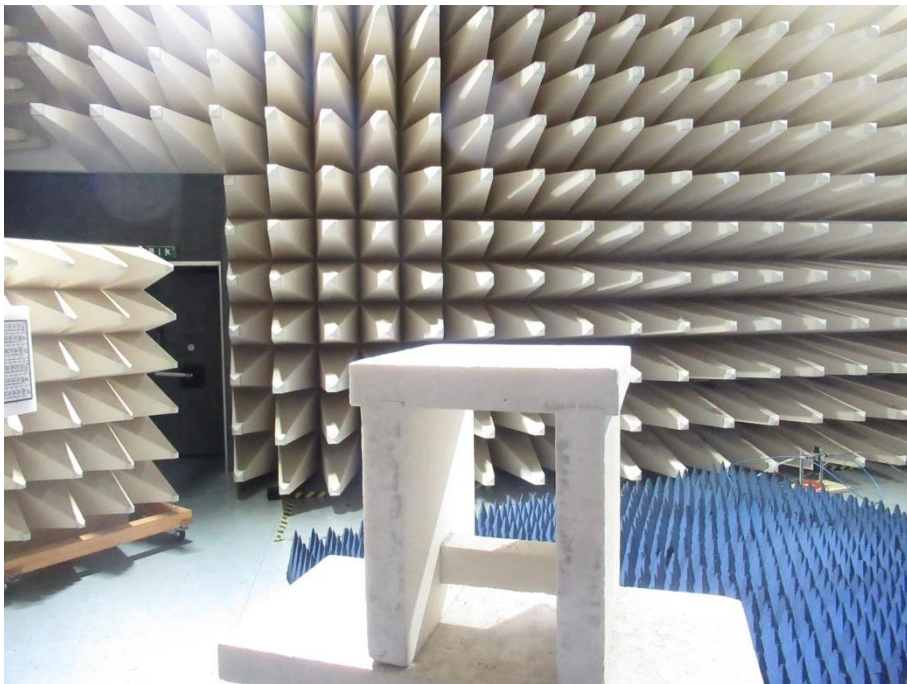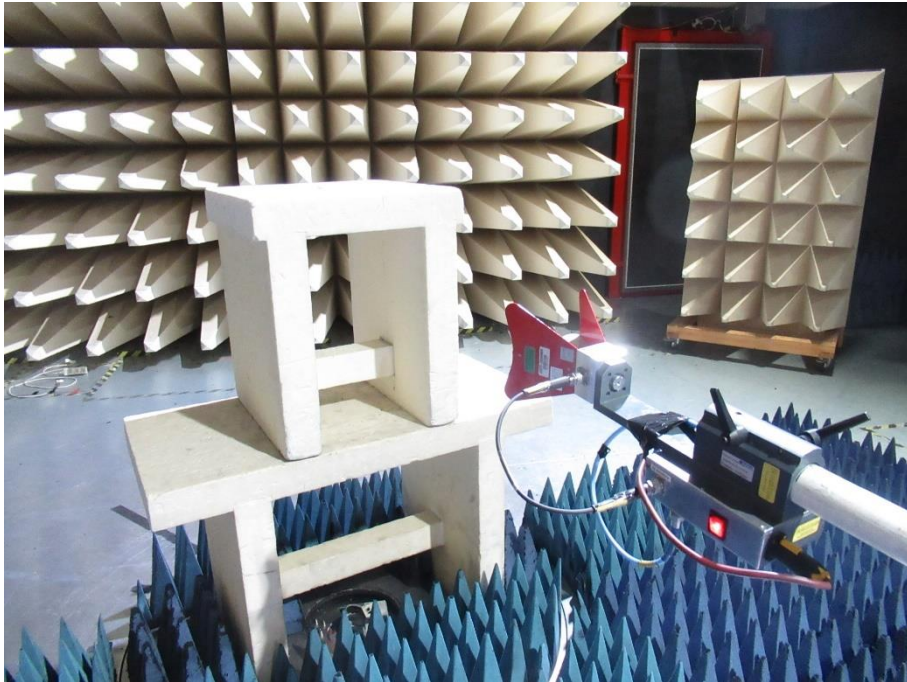

FCC ID: 2ALC5-KNX-HTAG2
IC: 25557-KNXHTAG2

5.2.3 Applicable standard

According to FCC Part 15, Section 15.519(c):

The radiated emissions at or below 960 MHz from a device operating under the provisions of this section shall not exceed the emission levels in §15.209. The radiated emissions above 960 MHz from a device operating under the provisions of this section shall not exceed the following average limits when measured using a resolution bandwidth of 1 MHz.

According to FCC Part 15, Section 15.521(c):

Emissions from digital circuitry used to enable the operation of the UWB transmitter shall comply with the limits in § 15.209, rather than the limits specified in this subpart, provided it can be clearly demonstrated that those emissions from the UWB device are due solely to emissions from digital circuitry contained within the transmitter and that the emissions are not intended to be radiated from the transmitter's antenna. Emissions from associated digital devices, as defined in § 15.3(k), e.g., emissions from digital circuitry used to control additional functions or capabilities other than the UWB transmission, are subject to the limits contained in Subpart B of this part.

5.2.4 Description of Measurement

The maximum emission is measured following the procedure set out in ANSI C63-10, item 10.2. The EUT is set in TX continuous mode while measuring.

Analyser settings:

9 kHz – 150 kHz	RBW: 200 Hz			
150 kHz - 30 MHz	RBW: 9 kHz			
30 MHz – 960 MHz	RBW: 120 kHz	Detector: QP		
960 MHz – 40 GHz	RBW: 1 MHz	VBW: 3 MHz	Detector: RMS	Sweptime: 1ms per MHz

for § 15.521(c) additionally:

960 MHz – 40 GHz	RBW: 1 MHz	VBW3: MHz	Detector: Peak/Av	Sweptime: 100 ms
------------------	------------	-----------	-------------------	------------------

The test report merely corresponds to the test sample. It is not permitted to copy extracts of these test results without the written permission of the test laboratory.

FCC ID: 2ALC5-KNX-HTAG2
IC: 25557-KNXHTAG2

5.2.5 Test result

5.2.5.1 Measurement 9 kHz to 30 MHz

FCC

f (MHz)	Level QP@3m (dB μ V)	Ant. factor (dB/m)	Field strength QP@3m dB(μ V/m)	Distance corr. 3m to 30/300m (dB)	Corrected level QP@30/300m dB(μ V/m)	Limit QP dB(μ V/m)
0.026	14.1	20.0	34.1	-80.0	-45.9	39.3
0.043	11.6	20.0	31.6	-80.0	-48.4	34.9
4.241	19.3	20.0	39.3	-40.0	-0.7	29.5
8.011	8.5	20.0	28.5	-40.0	-11.5	29.5
11.309	6.1	20.0	26.1	-40.0	-13.9	29.5
14.347	5.2	20.0	25.2	-40.0	-14.8	29.5

ISED

f (MHz)	Level QP@3m (dB μ V)	Ant. factor (dB/m)	Field strength QP@3m dB(μ A/m)	Distance corr. 3m to 30/300m (dB)	Corrected level QP@30/300m dB(μ A/m)	Limit QP dB(μ A/m)
0.026	14.1	20.0	-17.4	-80.0	-97.4	-12.2
0.043	11.6	20.0	-19.9	-80.0	-99.9	-16.6
4.241	19.3	20.0	-12.2	-40.0	-52.2	-22.0
8.011	8.5	20.0	-23.0	-40.0	-63.0	-22.0
11.309	6.1	20.0	-25.4	-40.0	-65.4	-22.0
14.347	5.2	20.0	-26.3	-40.0	-66.3	-22.0

Note: Pre-measurements have shown, there are no detectable emissions in this frequency range. All values represent noise level of the test site.

5.2.5.2 Measurement 30 MHz to 960 MHz

Frequency (MHz)	Reading Vert. (dB μ V)	Reading Hor. (dB μ V)	Correct. Vert. (dB)	Correct. Hor. (dB)	Level Vert. (dB μ V/m)	Level Hor. (dB μ V/m)	Limit (dB μ V/m)	Dlimit (dB)
83.12	-2.6	-5.6	13.9	13.9	11.3	8.3	40.0	-28.7
214.20	1.9	-0.8	17.5	17.1	19.4	16.3	43.5	-24.1
324.98	-4.4	0.1	21.0	21.5	16.6	21.6	46.0	-24.4
499.70	-9.0	-7.0	25.8	26.1	16.8	19.1	46.0	-26.9
834.46	-4.8	1.6	32.0	32.4	27.2	34.0	46.0	-12.0
849.20	-5.6	-9.6	32.2	32.6	26.6	23.0	46.0	-19.4

Note: There is no difference in the emission values between operating modes (e. g. UWB cont. Tx, BLE cont. Tx). All recorded values are noise values of the test site.

FCC ID: 2ALC5-KNX-HTAG2
IC: 25557-KNXHTAG2


5.2.5.3 Measurement 960 MHz to 40 GHz

According to § 15.521(c), missions from digital circuitry used to enable the operation of the UWB transmitter shall comply with the limits in § 15.209. The average limit is given by 54 dBμV/m at 3 meter distance, which corresponds to an EIRP of -41.3 dBm according to ANSI C63.10 2013 clause 10.3.9.


As proven in the following measurements, no emissions outside the UWB transmission can be detected in the frequency range 960 MHz and 40 GHz and the highest emissions occurs by the UWB emission itself, which lies under the UWB limit of -41.3 dBm. Therefor, the requirements according to § 15.209 can be regarded as fulfilled.


Channel 3

Mean Power

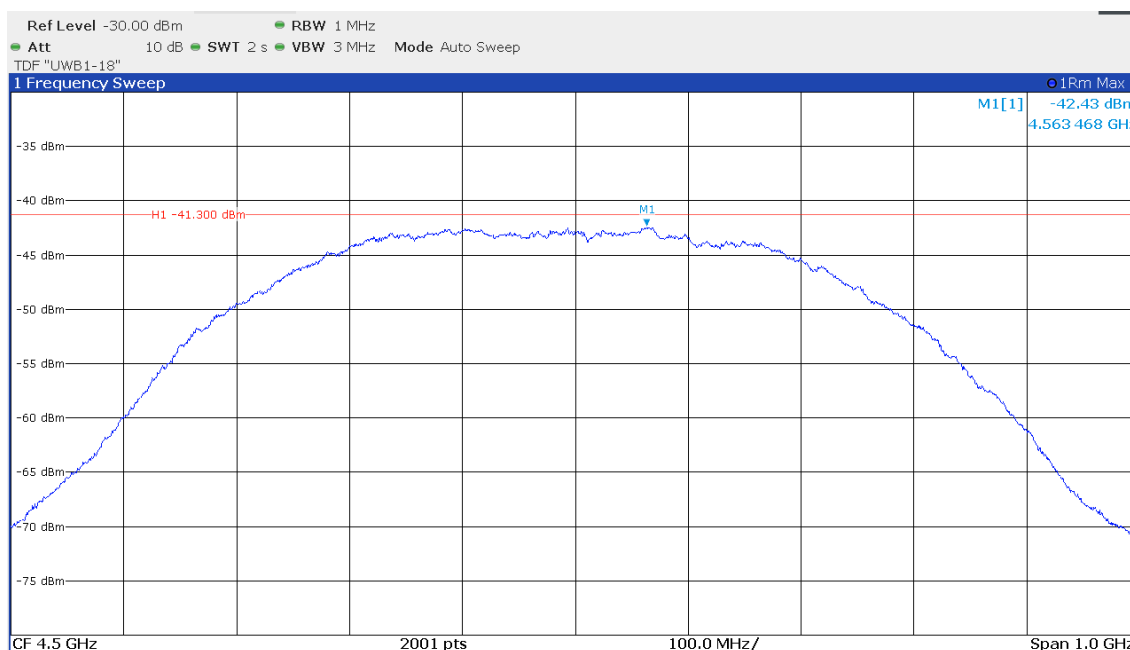




960 MHz to 18 GHz

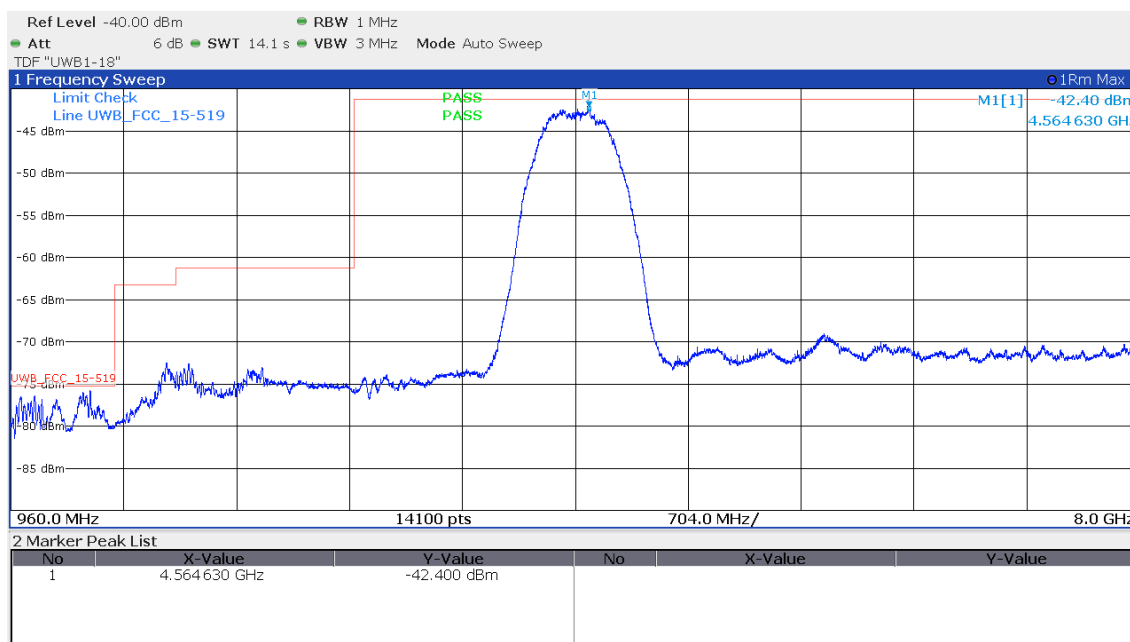


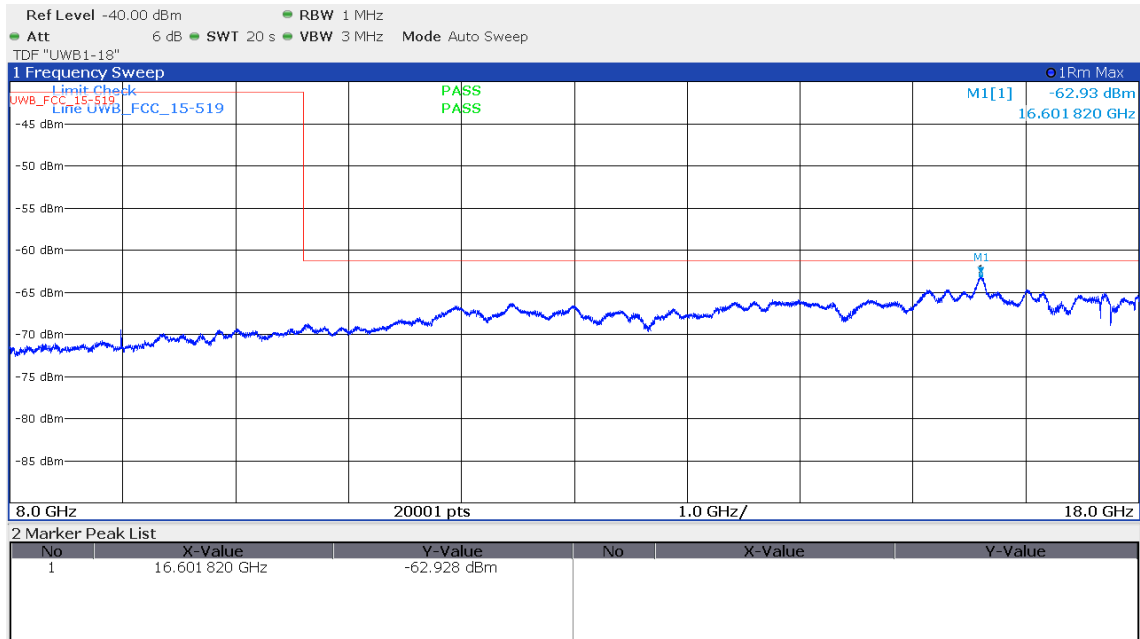FCC ID: 2ALC5-KNX-HTAG2
IC: 25557-KNXHTAG2


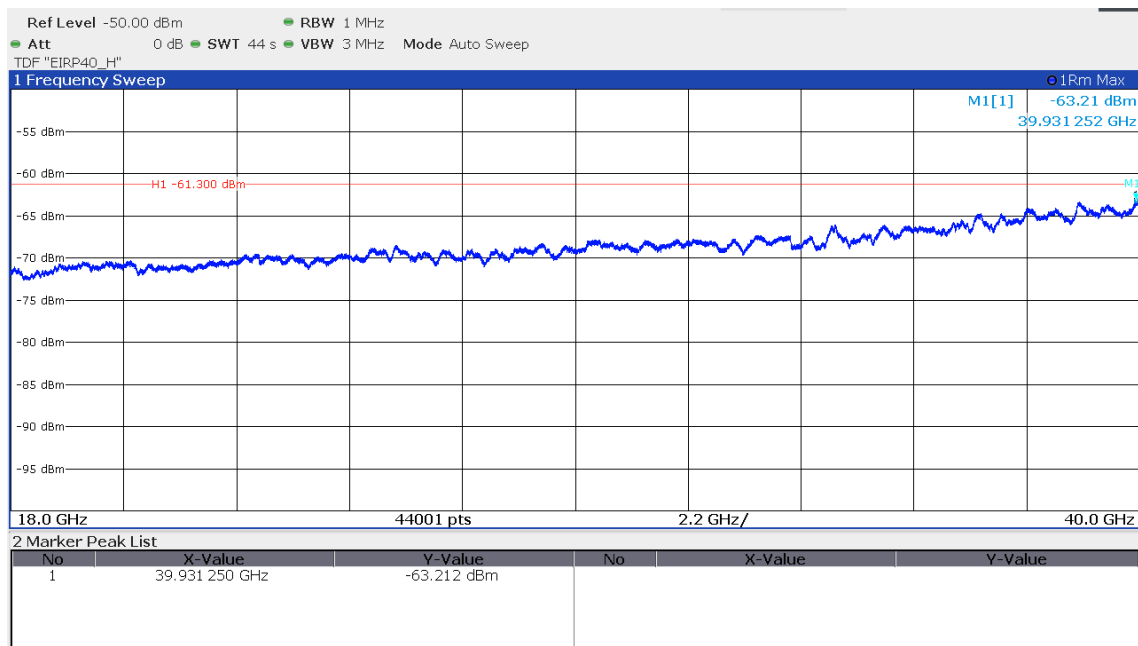
18 GHz to 40 GHz

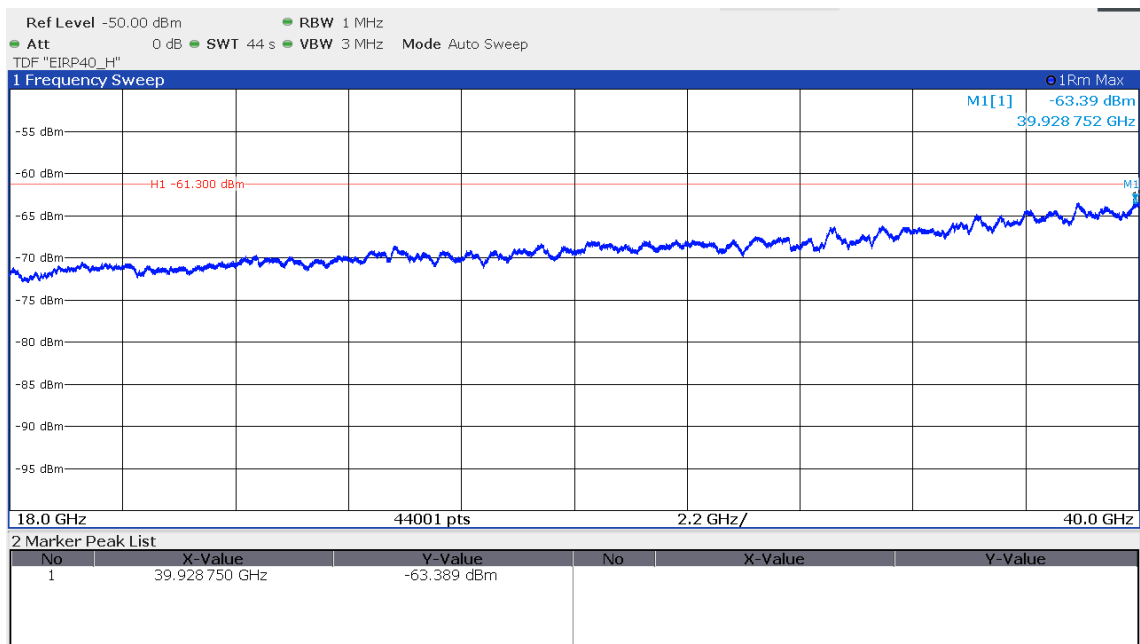

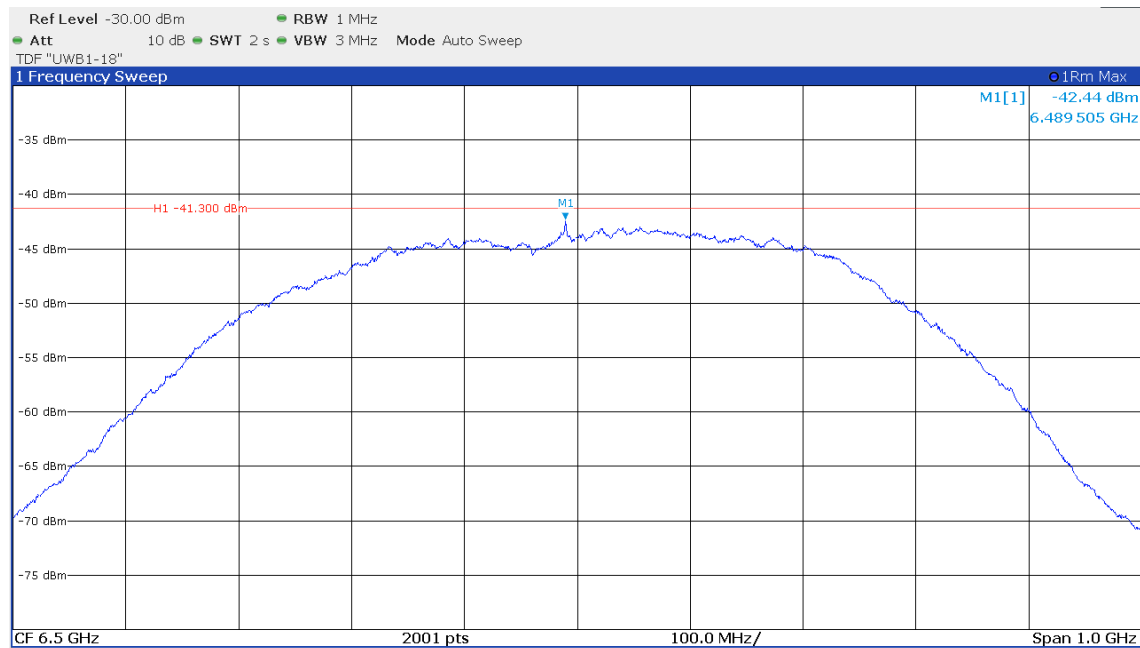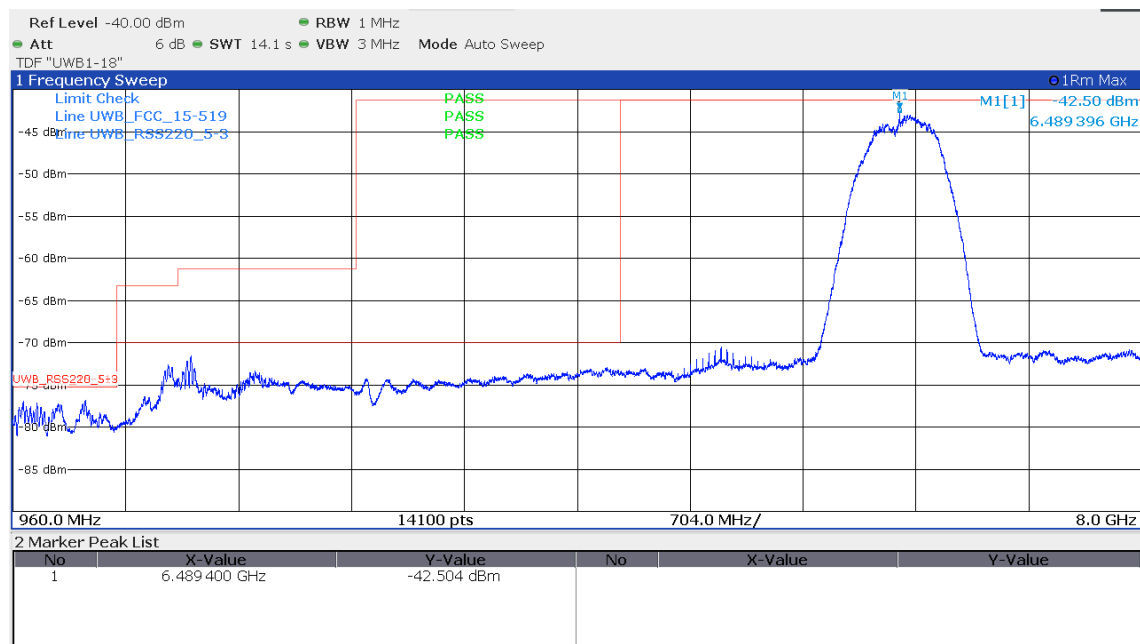FCC ID: 2ALC5-KNX-HTAG2
IC: 25557-KNXHTAG2
Channel 5
Mean Power

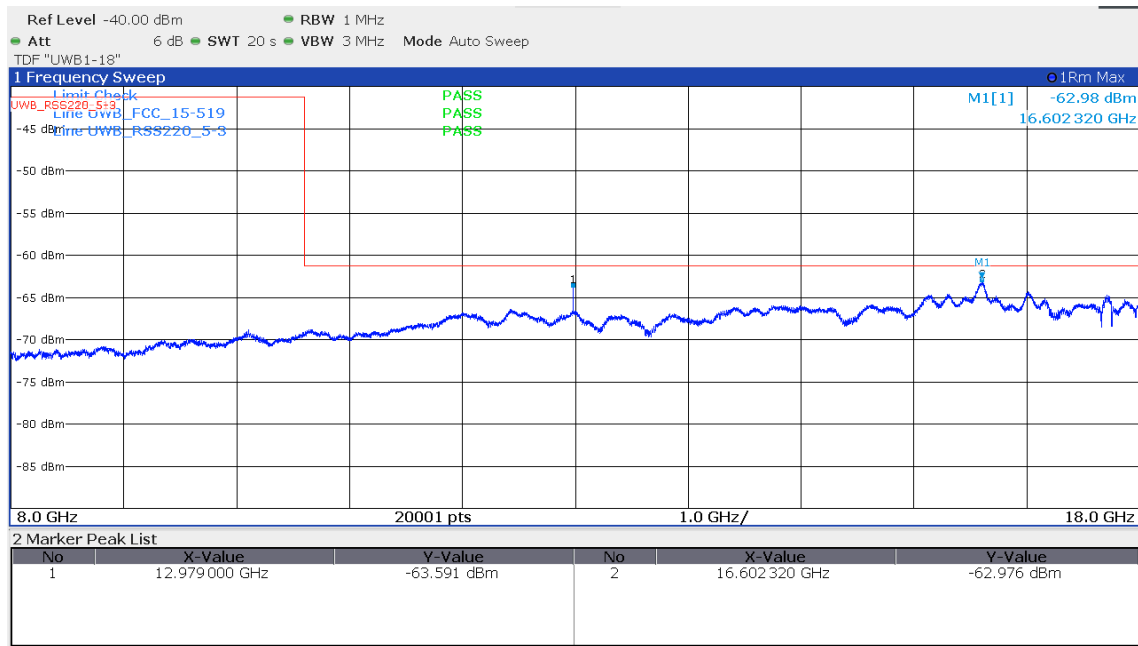960 MHz to 18 GHz


FCC ID: 2ALC5-KNX-HTAG2
IC: 25557-KNXHTAG2


18 GHz to 40 GHz



FCC ID: 2ALC5-KNX-HTAG2
IC: 25557-KNXHTAG2
Limits:

Limit according §15.209(a) in the frequency range 9 kHz 960 MHz:

Frequency (MHz)	Field strength (microvolts/meter)	Measurement distance (meters)
0.009-0.490	2400/F(kHz)	300
0.490-1.705	24000/F(kHz)	30
1.705-30.0	30	30
30-88	100**	3
88-216	150**	3
216-960	200**	3
Above 960	500	3

Limit according §15.519(c) in the frequency range 960 MHz to 40 GHz:

Frequency in MHz	EIRP in dBm
960-1610	-75.3
1610-1990	-63.3
1990-3100	-61.3
3100-10600	-41.3
Above 10600	-61.3

Limit according RSS-220 5.3.1 (d) in the frequency range 960 MHz to 40 GHz:

Frequency in MHz	EIRP in dBm
960-1610	-75.3
1610-4750	-70.0
4750-10600	-41.3
Above 10600	-61.3

The requirements are **FULFILLED**.

Remarks: None.

FCC ID: 2ALC5-KNX-HTAG2
IC: 25557-KNXHTAG2


5.3 Radiated Emissions at 1164-1240 MHz and 1559-1610 MHz

For test instruments and accessories used see section 6 Part **SER 3**.

5.3.1 Description of the test location

Test location: Anechoic chamber 1

5.3.2 Photo documentation of the test set-up

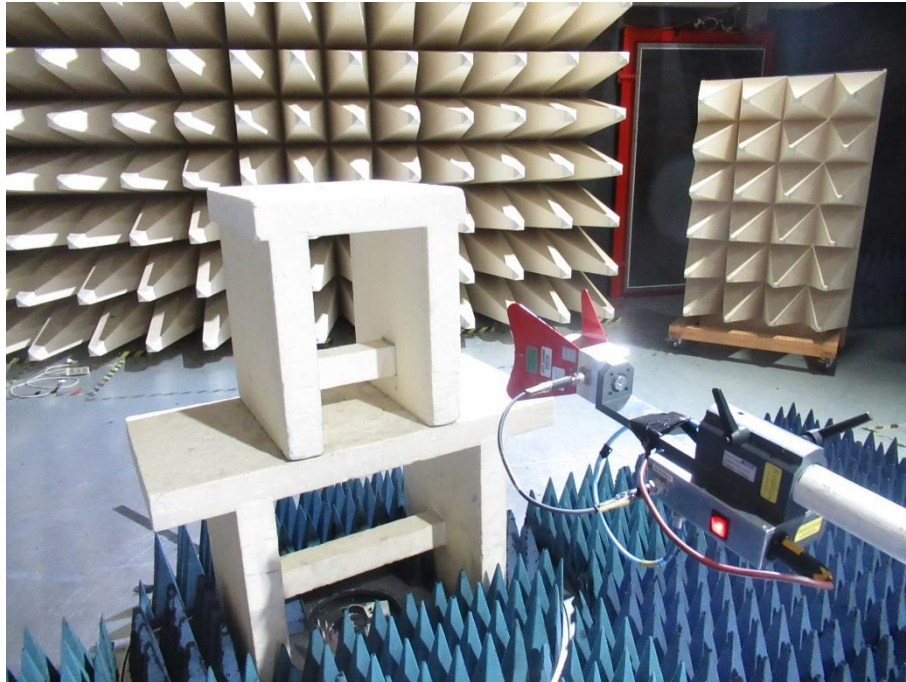

5.3.3 Applicable standard

According to FCC Part 15, Section 15.519(d):

In addition to the radiated emission limits specified in the table in paragraph (c) of this section, UWB transmitters operating under the provisions of this section shall not exceed the following average limits when measured using a resolution bandwidth of no less than 1 kHz.

5.3.4 Description of Measurement

The spectral line is measured following the procedure set out in ANSI C63-10, item 10.3.10. The EUT is set in TX continuous mode while measuring.

Analyser settings:


RBW: 1 kHz, VBW: 3 kHz, Detector: RMS, Sweep time: 1 ms/1kHz,

FCC ID: 2ALC5-KNX-HTAG2
IC: 25557-KNXHTAG2


5.3.5 Test result

Channel 3:

1164 MHz to 1240 MHz horizontal

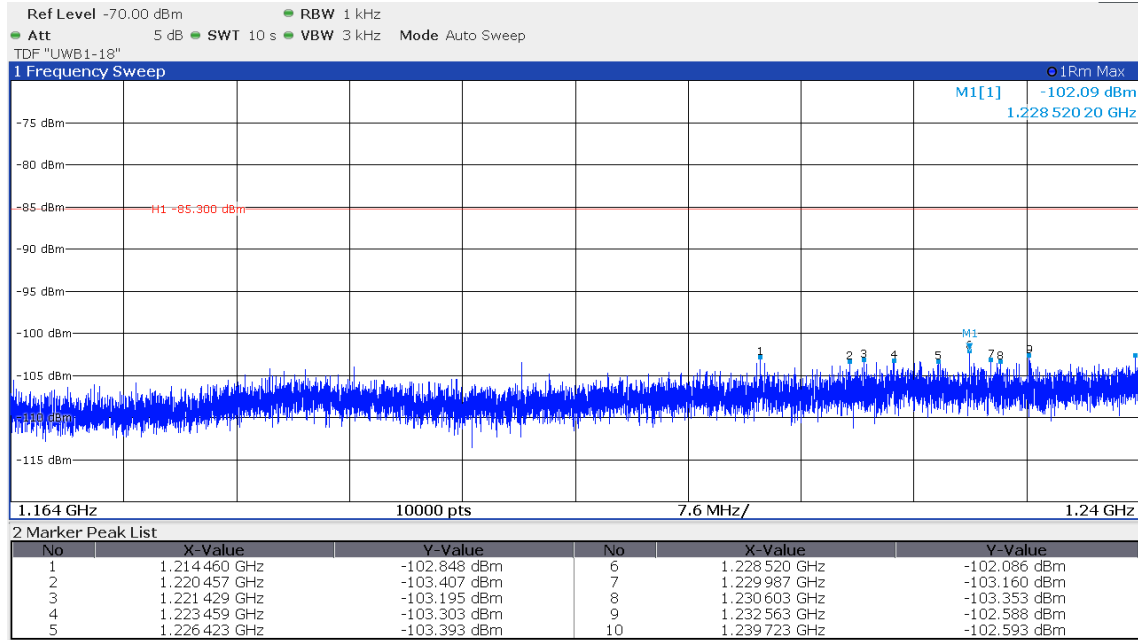


1164 MHz to 1240 MHz vertical

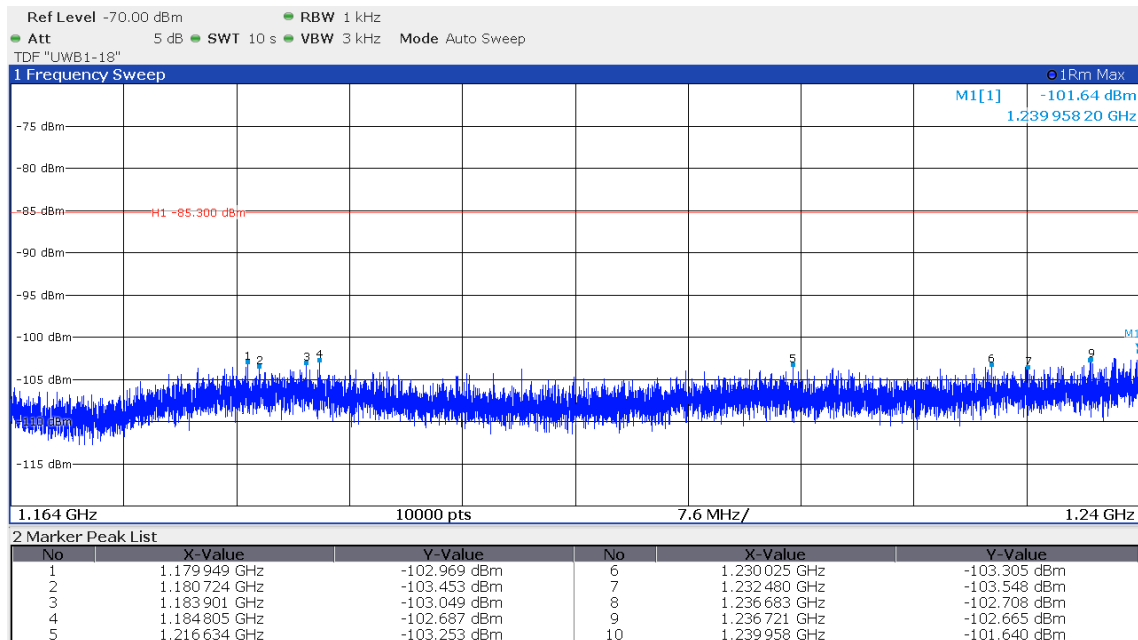


FCC ID: 2ALC5-KNX-HTAG2

IC: 25557-KNXHTAG2

1559 MHz to 1610 MHz horizontal

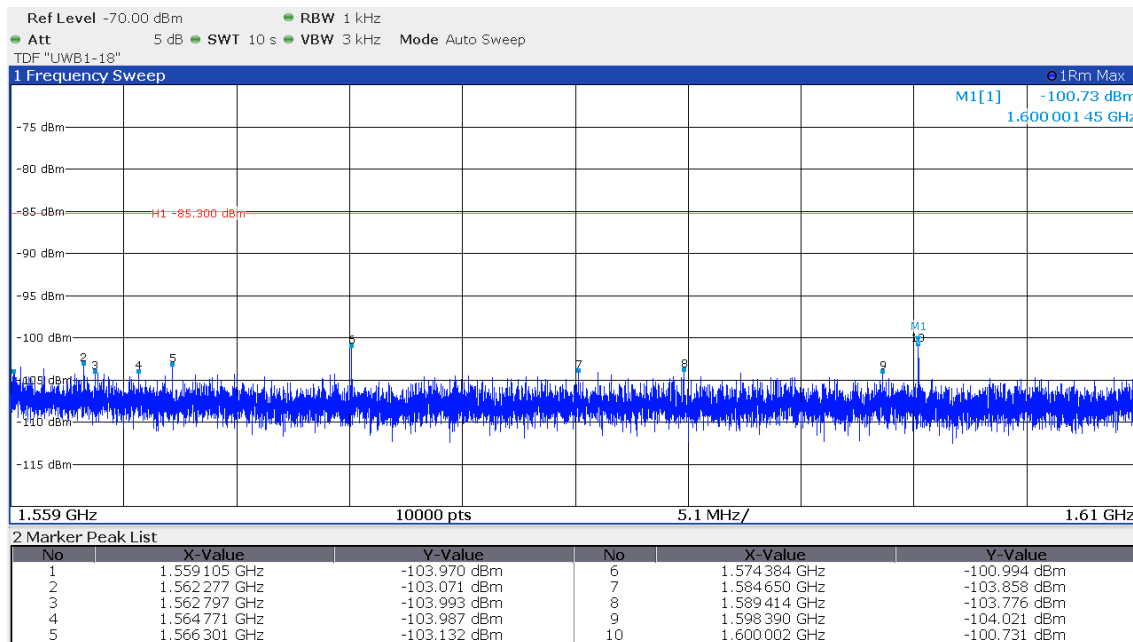


1559 MHz to 1610 MHz vertical

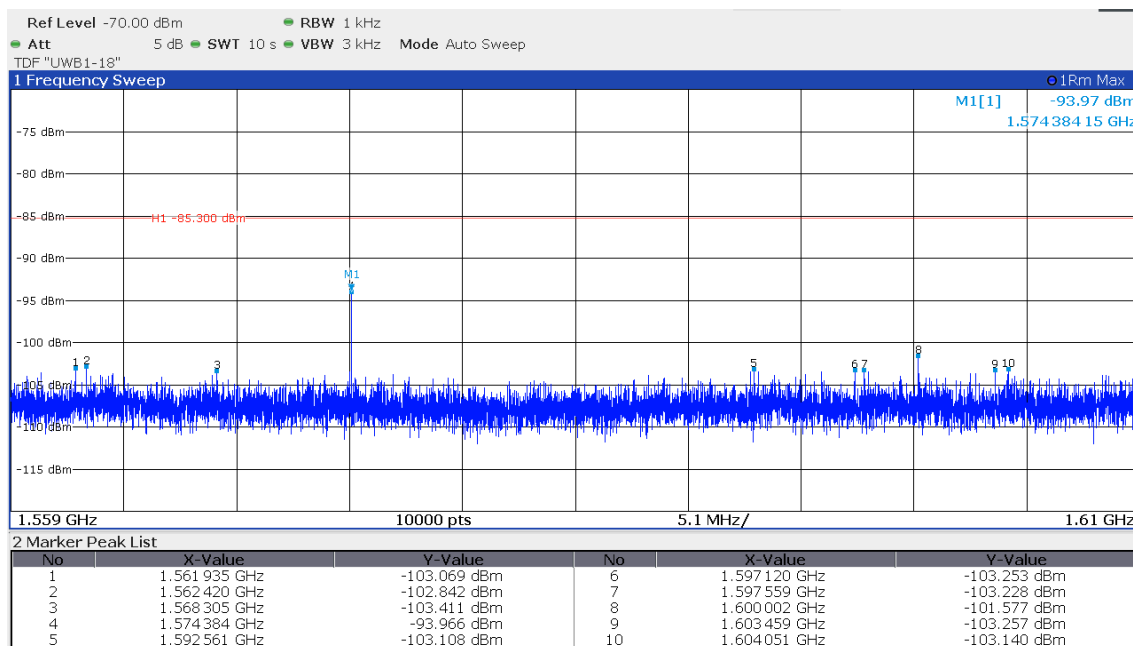


FCC ID: 2ALC5-KNX-HTAG2
IC: 25557-KNXHTAG2
Channel 5:

1164 MHz to 1240 MHz horizontal

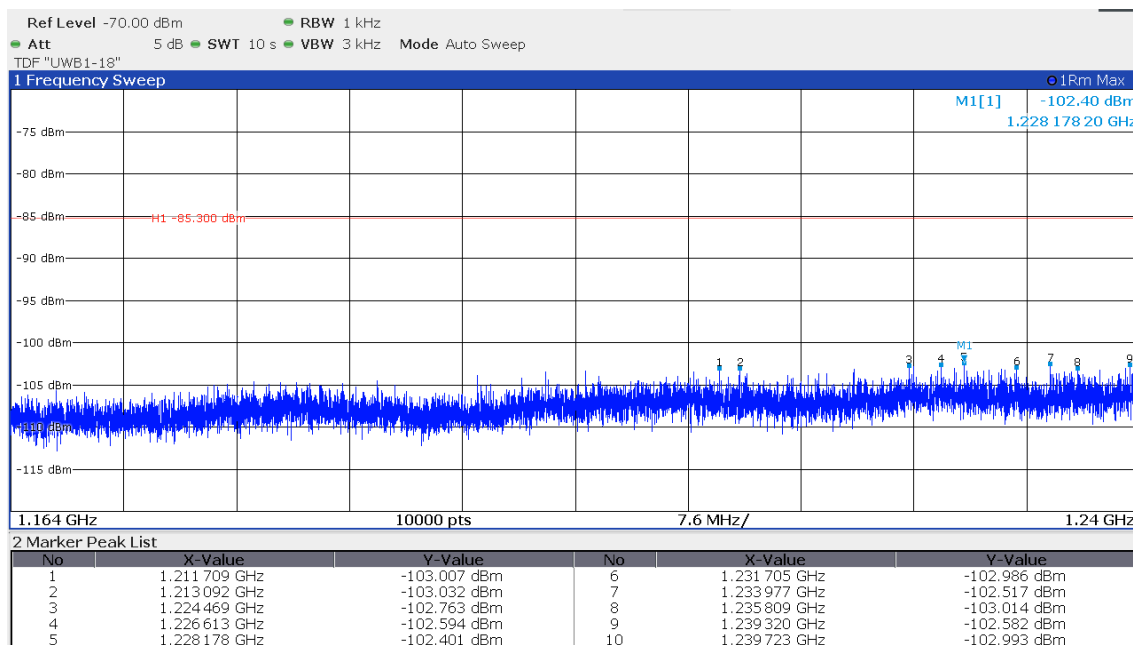


1164 MHz to 1240 MHz vertical

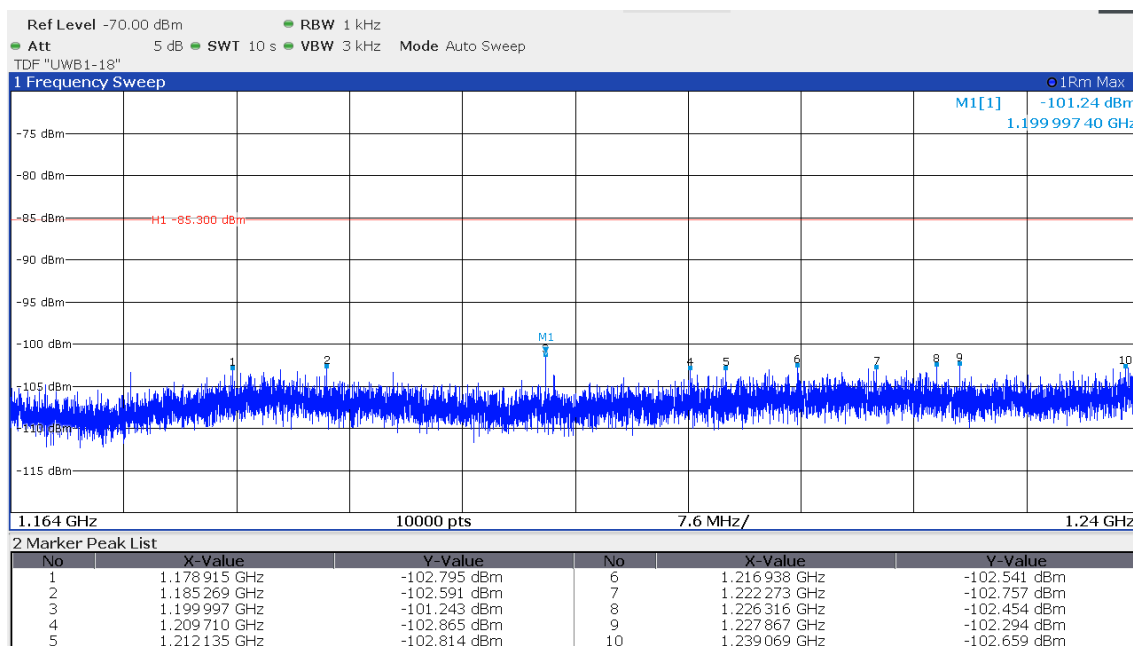


FCC ID: 2ALC5-KNX-HTAG2
IC: 25557-KNXHTAG2

1559 MHz to 1610 MHz horizontal

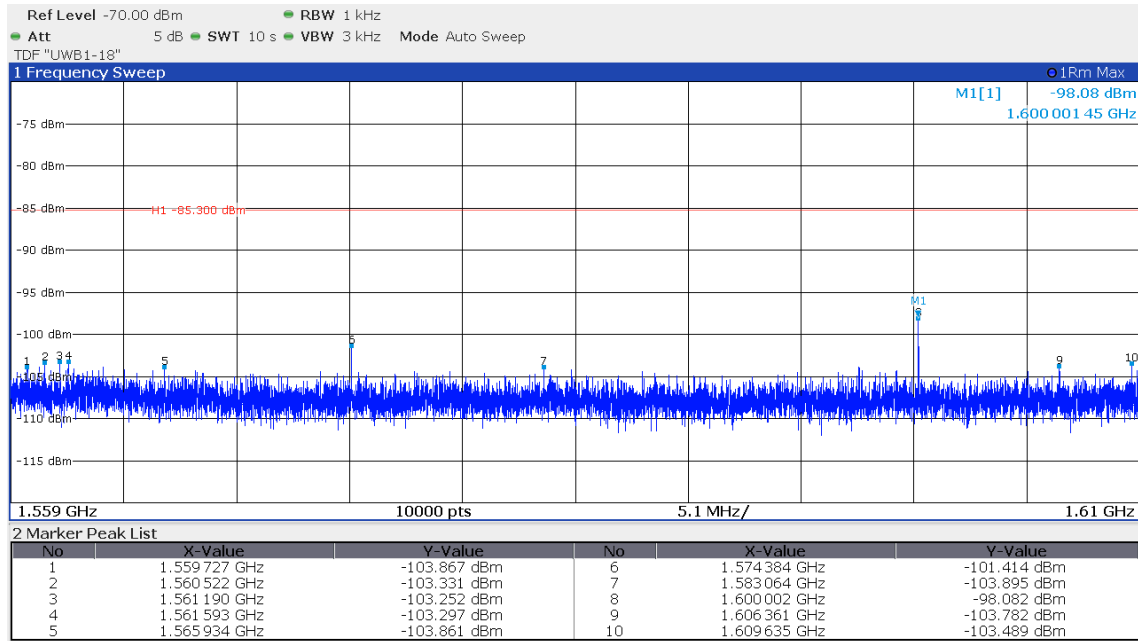

1559 MHz to 1610 MHz vertical

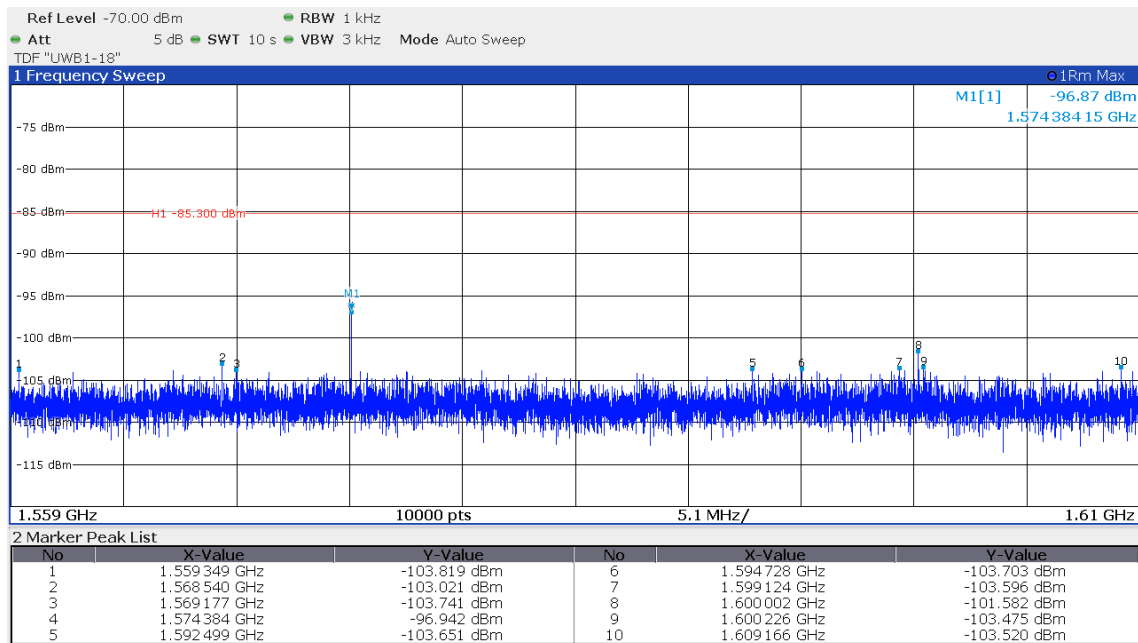

FCC ID: 2ALC5-KNX-HTAG2**IC: 25557-KNXHTAG2**

Limit according §15.519(c) in the frequency

Frequency in MHz	EIRP in dBm
1164-1240	-85.3
1559-1610	-85.3

The requirements are **FULFILLED**.

Remarks: None.

FCC ID: 2ALC5-KNX-HTAG2
IC: 25557-KNXHTAG2


5.4 Peak Power radiated

For test instruments and accessories used see section 6 Part **CPR 3**.

5.4.1 Description of the test location

Test location: Anechoic chamber 1

5.4.2 Photo documentation of the test set-up

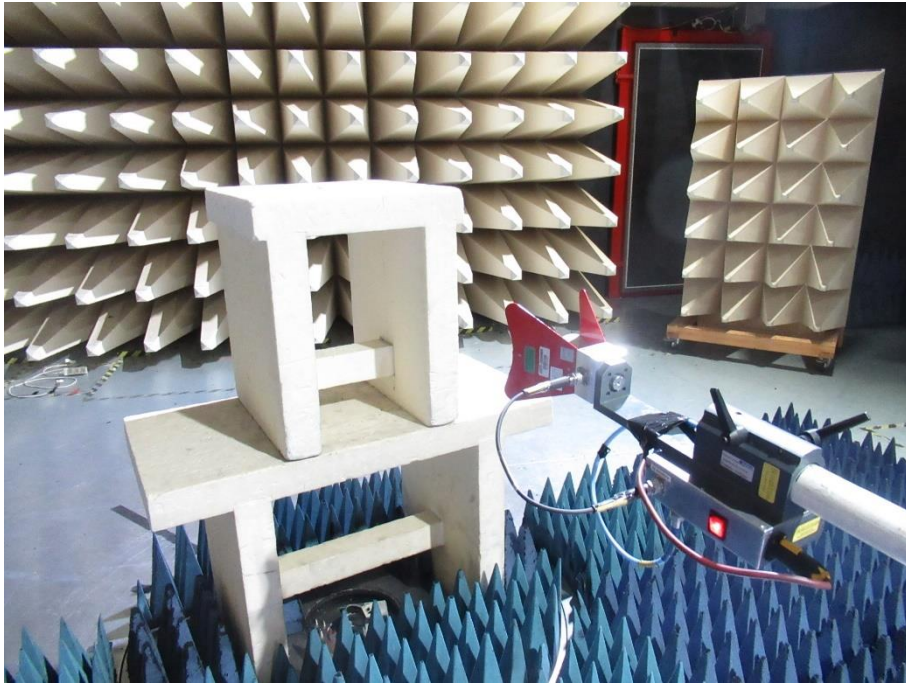

5.4.3 Applicable standard

According to FCC Part 15, Section 15.519(e):

There is a limit on the peak level of the emissions contained within a 50 MHz bandwidth centered on the frequency at which the highest radiated emission occurs, f_m . That limit is 0 dBm EIRP. It is acceptable to employ a different resolution bandwidth, and a correspondingly different peak emission limit, following the procedures described in §15.521.

5.4.4 Description of Measurement

The peak power is measured following the procedure set out in ANSI C63-10, item 10.3.5. The EUT is set in TX continuous mode while measuring.


Analyser settings:

RBW: 50 MHz, VBW: 80 MHz, Detector: Peak, Trace Mode: Max hold


FCC ID: 2ALC5-KNX-HTAG2
IC: 25557-KNXHTAG2

5.4.5 Test result

Channel 3

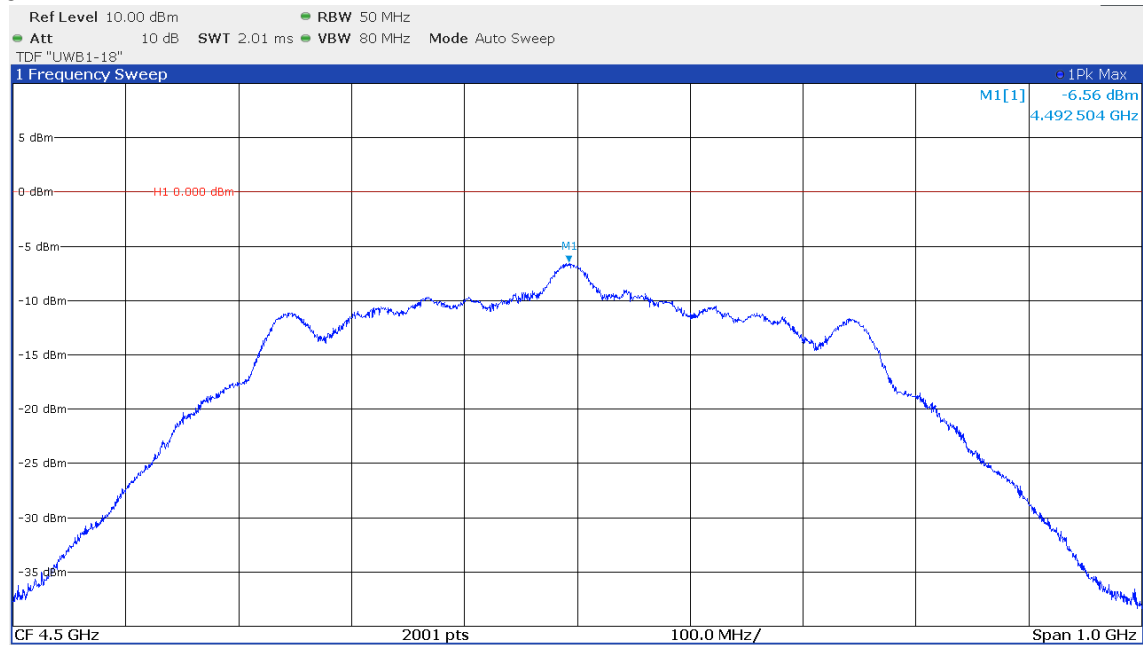

Channel 5

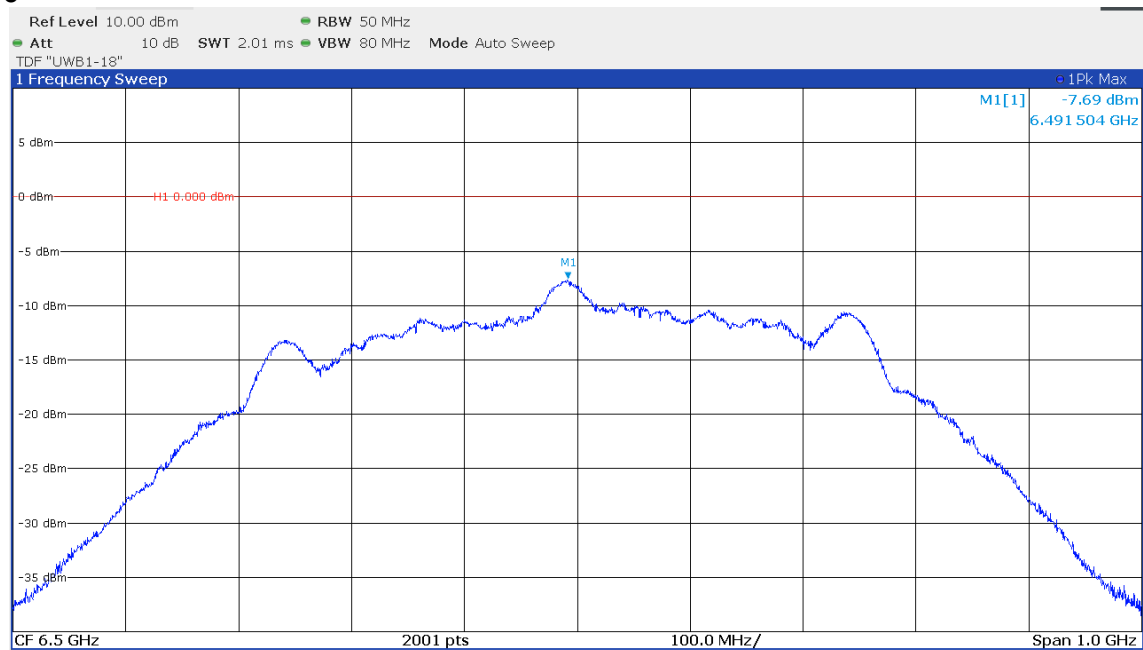

Min. limit margin: -6.56 dB at 4492.5 MHz

The requirements are **FULFILLED**.

Remarks: None.

FCC ID: 2ALC5-KNX-HTAG2

IC: 25557-KNXHTAG2


5.5 Signal deactivation

For test instruments and accessories used see section 6 Part MB.

5.5.1 Description of the test location

Test location: Shielded room S6

5.5.2 Photo documentation of the test set-up

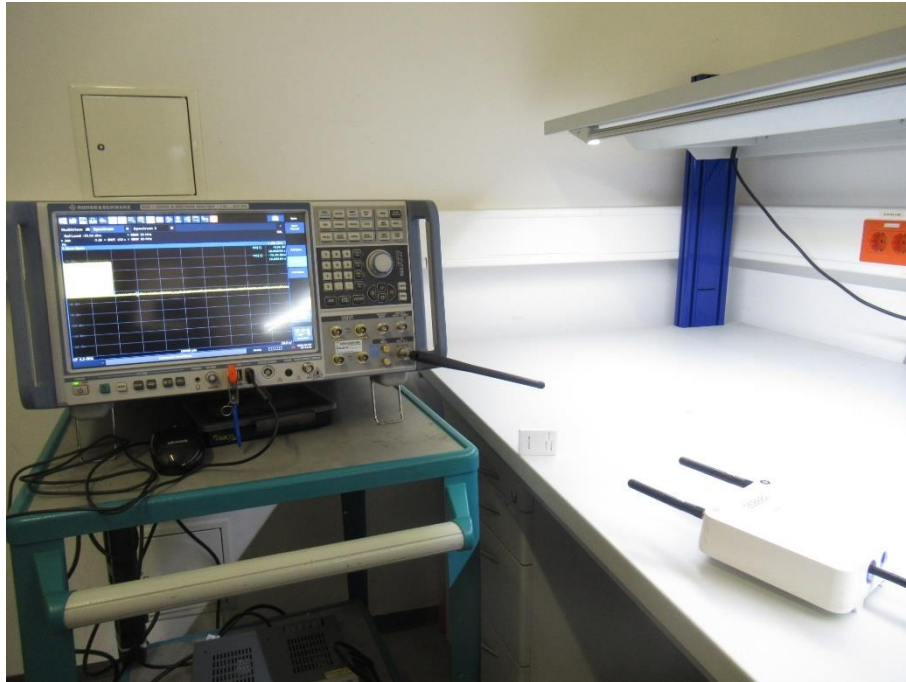

5.5.3 Applicable standard

According to FCC Part 15, Section 15.519(a)(1):

A UWB device operating under the provisions of this section shall transmit only when it is sending information to an associated receiver. The UWB intentional radiator shall cease transmission within 10 seconds unless it receives an acknowledgement from the associated receiver that its transmission is being received. An acknowledgment of reception must continue to be received by the UWB intentional radiator at least every 10 seconds or the UWB device must cease transmitting.

According to KDB 393764 D01 UWB FAQ v02 section 4:

An acknowledgement of reception must continue to be received by the UWB device at least once every 10 seconds, or else the device shall cease transmission of any information other than periodic signals for use in the establishment or re-establishment of a communications link with an associated receiver.

5.5.4 Description of Measurement


The measurement was performed radiated.

Spectrum analyser settings:

RBW: 80 MHz, VBW: 80 MHz, Detector: peak, zero span

FCC ID: 2ALC5-KNX-HTAG2
IC: 25557-KNXHTAG2

5.5.5 Test result

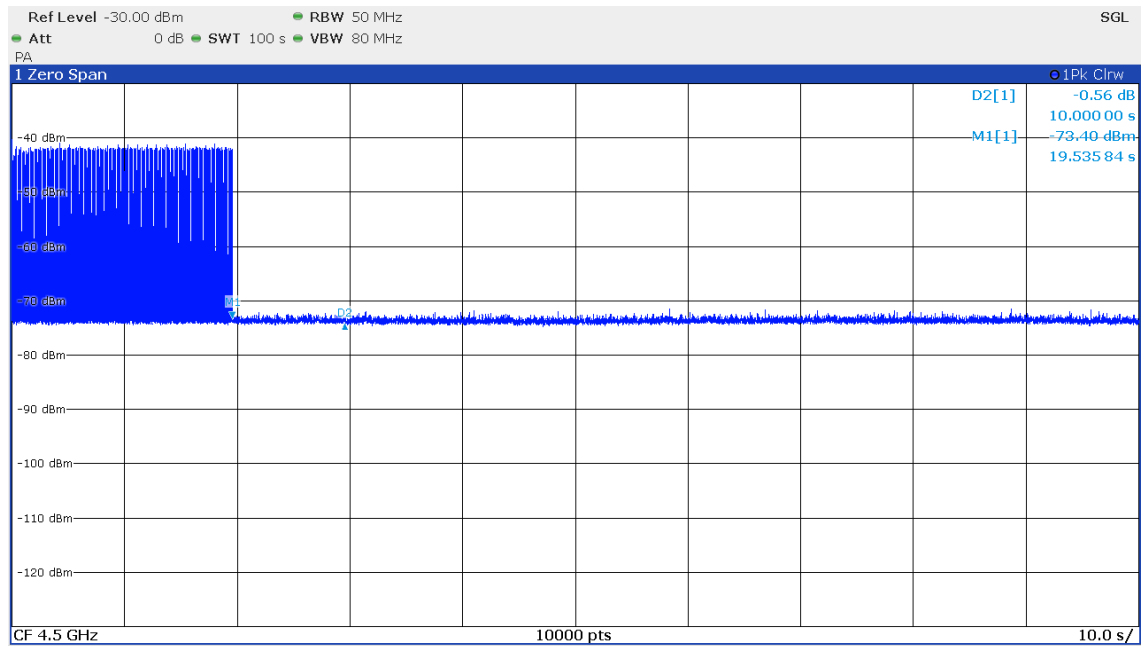

Explanation:

The test is performed with an EUT, which supports a total of two channels. The signal deactivation is independent of the chosen channel and shown here for a signal with channel 3.

At the time M1 the companion device was powered off. The EUT immediately stops its transmissions without visible attempts to get a connection to a companion device.

This behaviour is in accordance with the applicable standards.

The requirements are **FULFILLED**.

Remarks: None.

FCC ID: 2ALC5-KNX-HTAG2
IC: 25557-KNXHTAG2

6 USED TEST EQUIPMENT AND ACCESSORIES

All test instruments used are calibrated and verified regularly. The calibration history is available on request.

Test ID	Model Type	Equipment No.	Next Calib.	Last Calib.	Next Verif.	Last Verif.
CPR 3	FSW43	02-02/11-15-001	04/05/2024	04/05/2023		
	AMF-6D-01002000-22-10P	02-02/17-15-004				
	3117	02-02/24-05-009	12/07/2024	12/07/2023		
	BAM 4.5-P	02-02/50-17-024				
	NCD	02-02/50-17-025				
	KK-SF106-2X11N-6,5M	02-02/50-18-016				
	BAT-EMC 2023.0.8.0	02-02/68-13-001				
MB	ESW44	09-16/03-24-001	21/11/2024	21/11/2023		
SER 1	ESCI	02-02/03-05-005	15/12/2024	15/12/2023		
	HFH 2 - Z 2	02-02/24-15-001				
	NW-2000-NB	02-02/50-05-113				
	KK-EF393/U-16N-21N20 m	02-02/50-12-018				
	KK-SD_7/8-2X21N-33,0M	02-02/50-15-028				
SER 2	ESVS 30	02-02/03-05-006	27/07/2024	27/07/2023		
	VULB 9168	02-02/24-05-005	20/04/2024	20/04/2023	03/05/2024	03/05/2023
	NW-2000-NB	02-02/50-05-113				
	KK-EF393/U-16N-21N20 m	02-02/50-12-018				
	KK-SD_7/8-2X21N-33,0M	02-02/50-15-028				
	50F-003 N 3 dB	02-02/50-21-010				
SER 3	FSW43	02-02/11-15-001	04/05/2024	04/05/2023		
	AFS5-12001800-18-10P-6	02-02/17-06-002				
	AFS4-01000400-10-10P-4	02-02/17-13-002				
	AMF-4F-04001200-15-10P	02-02/17-13-003				
	LNA-40-18004000-33-5P	02-02/17-20-002				
	3117	02-02/24-05-009	12/07/2024	12/07/2023		
	BBHA 9170	02-02/24-05-013	21/03/2026	21/03/2023	22/01/2025	22/01/2024
	Sucoflex N-2000-SMA	02-02/50-05-075				
	WHKX 7.5/18G-8SS	02-02/50-07-010				
	KMS116-GL140SE-KMS116	02-02/50-20-026				

The test report merely corresponds to the test sample. It is not permitted to copy extracts of these test results without the written permission of the test laboratory.