



## FCC TEST REPORT

## FOR

Hangzhou Ruze E-commerce Co., Ltd

Smart Treadmill

Test Model: CT04

Prepared for : Hangzhou Ruze E-commerce Co., Ltd  
Address : Room 801-3, building 5, information port phase 6 hangzhou China

Prepared by : Shenzhen LCS Compliance Testing Laboratory Ltd.  
Address : 101, 201 Bldg A & 301 Bldg C, Juji Industrial Park Yabianxueziwei, Shajing Street, Baoan District, Shenzhen, 518000, China  
Tel : (+86)755-82591330  
Fax : (+86)755-82591332  
Web : www.LCS-cert.com  
Mail : webmaster@LCS-cert.com

Date of receipt of test sample : April 07, 2023  
Number of tested samples : 2  
Sample No. : A040623070-1, A040623070-2  
Serial number : Prototype  
Date of Test : April 07, 2023 ~ April 26, 2023  
Date of Report : April 26, 2023



**FCC TEST REPORT**  
**FCC CFR 47 PART 15 C (15.225)****Report Reference No.** ..... : **LCSA040623070EC****Date of Issue** ..... : April 26, 2023**Testing Laboratory Name**..... : **Shenzhen LCS Compliance Testing Laboratory Ltd.****Address**..... : 101, 201 Bldg A & 301 Bldg C, Juji Industrial Park Yabianxueziwei, Shajing Street, Baoan District, Shenzhen, 518000, China**Testing Location/ Procedure**..... : Full application of Harmonised standards ■

Partial application of Harmonised standards □

Other standard testing method □

**Applicant's Name**..... : **Hangzhou Ruze E-commerce Co., Ltd****Address**..... : Room 801-3, building 5, information port phase 6 hangzhou China**Test Specification****Standard**..... : FCC CFR 47 PART 15 C(15.225)**Test Report Form No**..... : LCSEMC-1.0**TRF Originator**..... : Shenzhen LCS Compliance Testing Laboratory Ltd.**Master TRF**..... : Dated 2011-03**Shenzhen LCS Compliance Testing Laboratory Ltd. All rights reserved.**

This publication may be reproduced in whole or in part for non-commercial purposes as long as the Shenzhen LCS Compliance Testing Laboratory Ltd. is acknowledged as copyright owner and source of the material. Shenzhen LCS Compliance Testing Laboratory Ltd. takes no responsibility for and will not assume liability for damages resulting from the reader's interpretation of the reproduced material due to its placement and context.

**Test Item Description**..... : **Smart Treadmill****Trade Mark**..... : N/A**Test Model**..... : CT04**Ratings**..... : Input: AC 100-120V, 60Hz, 12000mA, 750W

Output: DC 5V

**Result** ..... : **Positive****Compiled by:**

Li Huan/ Administrator

**Supervised by:**

Cary Luo/ Technique principal

**Approved by:**

Gavin Liang/ Manager



Shenzhen LCS Compliance Testing Laboratory Ltd.

Add: 101, 201 Bldg A &amp; 301 Bldg C, Juji Industrial Park Yabianxueziwei, Shajing Street, Baoan District, Shenzhen, 518000, China

Tel: +(86) 0755-82591330 | E-mail: webmaster@lcs-cert.com | Web: www.lcs-cert.com

Scan code to check authenticity

**FCC -- TEST REPORT**

<b>Test Report No. :</b>	<b>LCSA040623070EC</b>	<u>April 26, 2023</u> Date of issue
--------------------------	------------------------	--

Test Model.....	: CT04
EUT.....	: Smart Treadmill
<b>Applicant.....</b>	<b>: Hangzhou Ruze E-commerce Co., Ltd</b>
Address.....	: Room 801-3, building 5, information port phase 6 hangzhou China
Telephone.....	: /
Fax.....	: /
<b>Manufacturer.....</b>	<b>: Zhejiang Uber Sports Products Co., Ltd.</b>
Address.....	: 9 Liunan Road, NIUBEI Gold Industrial Zone, Wuyi County, Jinhua, Zhejiang province, China
Telephone.....	: /
Fax.....	: /
<b>Factory.....</b>	<b>: Zhejiang Uber Sports Products Co., Ltd.</b>
Address.....	: 9 Liunan Road, NIUBEI Gold Industrial Zone, Wuyi County, Jinhua, Zhejiang province, China
Telephone.....	: /
Fax.....	: /

<b>Test Result</b>	<b>Positive</b>
--------------------	-----------------

The test report merely corresponds to the test sample.

It is not permitted to copy extracts of these test result without the written permission of the test laboratory.



Shenzhen LCS Compliance Testing Laboratory Ltd.

Add: 101, 201 Bldg A & 301 Bldg C, Juji Industrial Park Yabianxueziwei, Shajing Street, Baoan District, Shenzhen, 518000, China

Tel: +(86) 0755-82591330 | E-mail: webmaster@lcs-cert.com | Web: www.lcs-cert.com

Scan code to check authenticity



Revision History

Report Version	Issue Date	Revision Content	Revised By
000	April 26, 2023	Initial Issue	--





## TABLE OF CONTENTS

<b>1. GENERAL INFORMATION</b>	<b>6</b>
1.1 Description of Device (EUT)	6
1.2 Host System Configuration List and Details	7
1.3 External I/O	7
1.4 Description of Test Facility	7
1.5 Statement of The Measurement Uncertainty	8
1.6 Measurement Uncertainty	8
1.7 Description of Test Modes	8
<b>2. TEST METHODOLOGY</b>	<b>9</b>
2.1. EUT Configuration	9
2.2. EUT Exercise	9
2.3 General Test Procedures	9
<b>3. SYSTEM TEST CONFIGURATION</b>	<b>10</b>
3.1. Justification	10
3.2. EUT Exercise Software	10
3.3. Special Accessories	10
3.4. Block Diagram/Schematics	10
3.5. Equipment Modifications	10
3.6. Test Setup	10
<b>4. SUMMARY OF TEST RESULTS</b>	<b>11</b>
<b>5. RADIATED MEASUREMENT</b>	<b>12</b>
5.1. Radiated Emission	12
5.2. Field Strength of Fundamental Emissions and Mask Measurement	21
<b>6. BANDWIDTH OF THE OPERATING FREQUENCY</b>	<b>24</b>
6.1. Standard Applicable	24
6.2. Test Result	24
<b>7. FREQUENCY STABILITY MEASUREMENT</b>	<b>25</b>
7.1 Standard Applicable	25
7.2 Test Result	25
<b>8. LINE CONDUCTED EMISSIONS</b>	<b>26</b>
8.1. Standard Applicable	26
8.2. Block Diagram of Test Setup	26
8.3. Test Results	26
<b>9. ANTENNA REQUIREMENTS</b>	<b>29</b>
9.1 Standard Applicable	29
9.2 Antenna Connected Construction	29
<b>10. LIST OF MEASURING EQUIPMENTS</b>	<b>30</b>
<b>11. TEST SETUP PHOTOGRAPHS OF EUT</b>	<b>31</b>
<b>12. EXTERIOR PHOTOGRAPHS OF THE EUT</b>	<b>31</b>
<b>13. INTERIOR PHOTOGRAPHS OF THE EUT</b>	<b>31</b>





## 1. GENERAL INFORMATION

### 1.1 Description of Device (EUT)

EUT	: Smart Treadmill
Test Model	: CT04
Power Supply	: Input: AC 100-120V, 60Hz, 12000mA, 750W Output: DC 5V
Hardware Version	: /
Software Version	: /

#### Bluetooth

Frequency Range	: 2402MHz ~ 2480MHz
Channel Number	: 40 channels for Bluetooth V5.0(DTS)
Channel Spacing	: 2MHz for Bluetooth V5.0(DTS)
Modulation Type	: GFSK for Bluetooth V5.0(DTS)
Bluetooth Version	: V5.0
Antenna Description	: PCB Antenna, 3.37dBi(Max.)

#### 2.4G WLAN

Frequency Range	: 2412 – 2462 MHz
Channel Number	: 11 Channels for 20MHz bandwidth (2412~2462MHz) 7 Channels for 40MHz bandwidth (2422~2452MHz)
Channel Spacing	: 5MHz
Modulation Type	: IEEE 802.11b: DSSS (CCK, DQPSK, DBPSK) IEEE 802.11g: OFDM (64QAM, 16QAM, QPSK, BPSK) IEEE 802.11n: OFDM (64QAM, 16QAM, QPSK, BPSK)
Antenna Description	: PCB Antenna, 3.37dBi(Max.)

#### NFC

Operating Frequency	: 13.56MHz
Modulation Type	: ASK
Antenna Description	: PCB Antenna, 0dBi(Max.)





## 1.2 Host System Configuration List and Details

Manufacturer	Description	Model	Serial Number	Certificate
--	--	--	--	--

## 1.3 External I/O

I/O Port Description	Quantity	Cable
Power Port	1	N/A

## 1.4 Description of Test Facility

NVLAP Accreditation Code is 600167-0.

FCC Designation Number is CN5024.

CAB identifier is CN0071.

CNAS Registration Number is L4595.

Test Firm Registration Number: 254912.

The 3m-Semi anechoic test site fulfils CISPR 16-1-4 according to ANSI C63.4:2014 and CISPR 16-1-4:2010 SVSWR requirement for radiated emission above 1GHz.







## 1.5 Statement of The Measurement Uncertainty

The data and results referenced in this document are true and accurate. The reader is cautioned that there may be errors within the calibration limits of the equipment and facilities. The measurement uncertainty was calculated for all measurements listed in this test report acc. To CISPR 16 – 4 “Specification for radio disturbance and immunity measuring apparatus and methods – Part 4: Uncertainty in EMC Measurements” and is documented in the LCS quality system acc. to DIN EN ISO/IEC 17025. Furthermore, component and process variability of devices similar to that tested may result in additional deviation. The manufacturer has the sole responsibility of continued compliance of the device.

## 1.6 Measurement Uncertainty

Test Item		Frequency Range	Uncertainty	Note
Radiation Uncertainty	:	9KHz~30MHz	±3.10dB	(1)
		30MHz~200MHz	±2.96dB	(1)
		200MHz~1000MHz	±3.10dB	(1)
		1GHz~26.5GHz	±3.80dB	(1)
		26.5GHz~40GHz	±3.90dB	(1)
Conduction Uncertainty	:	150kHz~30MHz	±1.63dB	(1)
Power disturbance	:	30MHz~300MHz	±1.60dB	(1)
Output power	:	1GHz-40GHz	±0.57dB	(1)
Occupied Channel Bandwidth	:	1GHz-40GHz	±5%	(1)
Conducted RF Spurious Emission	:	9kHz-40GHz	±1.80dB	(1)
Emissions in Restricted Bands	:	1GHz-40GHz	±2.47dB	(1)
Frequency Stability	:	1GHz-40GHz	±25Hz	(1)

(1) This uncertainty represents an expanded uncertainty expressed at approximately the 95% confidence level using a coverage factor of k=2.

## 1.7 Description of Test Modes

The EUT has been tested under operating condition.

This test was performed with EUT in X, Y, Z position and the worst case was found when EUT in Y position.

AC conducted emission pre-test at both at AC 120V/60Hz and AC 240V/50Hz modes, recorded worst case.

AC conducted emission pre-test at both at power adapter and power from PC modes, recorded worst case.

Worst-case mode and channel used for 150 KHz-30 MHz power line conducted emissions was the mode and channel with the highest output power.

Worst-case mode and channel used for 9 KHz-1000 MHz radiated emissions was the mode and channel with the highest output power.



Shenzhen LCS Compliance Testing Laboratory Ltd.

Add: 101, 201 Bldg A & 301 Bldg C, Juji Industrial Park Yabianxueziwei, Shajing Street, Baoan District, Shenzhen, 518000, China

Tel: +(86) 0755-82591330 | E-mail: webmaster@lcs-cert.com | Web: www.lcs-cert.com

Scan code to check authenticity





## 2. TEST METHODOLOGY

All measurements contained in this report were conducted with ANSI C63.10-2013, American National Standard of Procedures for Compliance Testing of Unlicensed Wireless Devices.

The radiated testing was performed at an antenna-to-EUT distance of 3 meters. All radiated and conducted emissions measurement was performed at Shenzhen LCS Compliance Testing Laboratory Ltd.

### 2.1. EUT Configuration

The EUT configuration for testing is installed on RF field strength measurement to meet the Commissions requirement and operating in a manner that intends to maximize its emission characteristics in a continuous normal application.

### 2.2. EUT Exercise

The EUT was operated in the engineering mode to fix the TX frequency that was for the purpose of the measurements.

According to its specifications, the EUT must comply with the requirements of the Section 15.225 under the FCC Rules Part 15 Subpart C.

### 2.3 General Test Procedures

#### 2.3.1 Conducted Emissions

The EUT is directly placed on the ground. According to the requirements in Section 6.2.1 of ANSI C63.10-2013 Conducted emissions from the EUT measured in the frequency range between 0.15 MHz and 30MHz using Quasi-peak and average detector modes.

#### 2.3.2 Radiated Emissions

The EUT is placed on a turntable, which is directly placed on the ground. The turntable shall rotate 360 degrees to determine the position of maximum emission level. EUT is set 3m away from the receiving antenna, which varied from 1m to 4m to find out the highest emission. And also, each emission was to be maximized by changing the polarization of receiving antenna both horizontal and vertical. In order to find out the maximum emissions, exploratory radiated emission measurements were made according to the requirements in Section 6.3 of ANSI C63.10-2013.





### 3. SYSTEM TEST CONFIGURATION

#### 3.1. Justification

The system was configured for testing in a continuous transmits condition.

#### 3.2. EUT Exercise Software

The system was configured for testing in a continuous transmits condition and change test channels by software provided by applicant.

#### 3.3. Special Accessories

No.	Equipment	Manufacturer	Model No.	Serial No.	Length	shielded/ unshielded	Notes
/	/	/	/	/	/	/	/

#### 3.4. Block Diagram/Schematics

Please refer to the related document

#### 3.5. Equipment Modifications

Shenzhen LCS Compliance Testing Laboratory Ltd. has not done any modification on the EUT.

#### 3.6. Test Setup

Please refer to the test setup photo.





#### 4. SUMMARY OF TEST RESULTS

Applied Standard: FCC Part 15 Subpart C		
Test Items	FCC Rules	Result
Line Conducted Emissions	§15.207(a)	PASS
Field Strength of Fundamental Emissions	§15.225(a)(b)(c)	PASS
Radiated Emissions	§15.225(d) & §15.209	PASS
20dB Bandwidth	§ 15.215	PASS
Frequency Stability	§15.225(e)	PASS
Antenna Requirement	§15.203	PASS





## 5. RADIATED MEASUREMENT

### 5.1. Radiated Emission

#### 5.1.1. Standard Applicable

According to §15.209/ §15.205

15.205 (a) Except as shown in paragraph (d) of this section, only spurious emissions are permitted in any of the frequency bands listed below:

MHz	MHz	MHz	GHz
0.090-0.110	16.42-16.423	399.9-410	4.5-5.15
1\ 0.495-0.505	16.69475-16.69525	608-614	5.35-5.46
2.1735-2.1905	16.80425-16.80475	960-1240	7.25-7.75
4.125-4.128	25.5-25.67	1300-1427	8.025-8.5
4.17725-4.17775	37.5-38.25	1435-1626.5	9.0-9.2
4.20725-4.20775	73-74.6	1645.5-1646.5	9.3-9.5
6.215-6.218	74.8-75.2	1660-1710	10.6-12.7
6.26775-6.26825	108-121.94	1718.8-1722.2	13.25-13.4
6.31175-6.31225	123-138	2200-2300	14.47-14.5
8.291-8.294	149.9-150.05	2310-2390	15.35-16.2
8.362-8.366	156.52475-156.52525	2483.5-2500	17.7-21.4
8.37625-8.38675	156.7-156.9	2690-2900	22.01-23.12
8.41425-8.41475	162.0125-167.17	3260-3267	23.6-24.0
12.29-12.293	167.72-173.2	3332-3339	31.2-31.8
12.51975-12.52025	240-285	3345.8-3358	36.43-36.5
12.57675-12.57725	322-335.4	3600-4400	(2\)
13.36-13.41			

1\ Until February 1, 1999, this restricted band shall be 0.490-0.510 MHz.

2\ Above 38.6

According to §15.247 (d): 20dBc in any 100 kHz bandwidth outside the operating frequency band. In case the emission fall within the restricted band specified on 15.205(a), then the 15.209(a) limit in the table below has to be followed.

Frequencies (MHz)	Field Strength (microvolts/meter)	Measurement Distance (meters)
0.009~0.490	2400/F(KHz)	300
0.490~1.705	24000/F(KHz)	30
1.705~30.0	30	30
30~88	100	3
88~216	150	3
216~960	200	3
Above 960	500	3

#### 5.1.2. Measuring Instruments and Setting

Please refer to equipment list in this report. The following table is the setting of spectrum analyzer and receiver.

Spectrum Parameter	Setting
Attenuation	Auto
Start Frequency	1000 MHz
Stop Frequency	10 <sup>th</sup> carrier harmonic
RB / VB (Emission in restricted band)	1MHz / 1MHz for Peak, 1 MHz / 1/B kHz for Average
RB / VB (Emission in non-restricted band)	1MHz / 1MHz for Peak, 1 MHz / 1/B kHz for Average



Shenzhen LCS Compliance Testing Laboratory Ltd.

Add: 101, 201 Bldg A & 301 Bldg C, Juji Industrial Park Yabianxueziwei, Shajing Street, Baoan District, Shenzhen, 518000, China

Tel: +(86) 0755-82591330 | E-mail: webmaster@lcs-cert.com | Web: www.lcs-cert.com

Scan code to check authenticity



Receiver Parameter	Setting
Attenuation	Auto
Start ~ Stop Frequency	9kHz~150kHz / RB/VB 200Hz/1KHz for QP/AVG
Start ~ Stop Frequency	150kHz~30MHz / RB/VB 9kHz/30KHz for QP/AVG
Start ~ Stop Frequency	30MHz~1000MHz / RB/VB 120kHz/1MHz for QP

### 5.1.3. Test Procedures

#### 1) Sequence of testing 9 kHz to 30 MHz

##### Setup:

- The equipment was set up to simulate a typical usage like described in the user manual or described by manufacturer.
- If the EUT is a tabletop system, a rotatable table with 0.8 m height is used.
- If the EUT is a floor standing device, it is placed on the ground.
- Auxiliary equipment and cables were positioned to simulate normal operation conditions.
- The AC power port of the EUT (if available) is connected to a power outlet below the turntable.
- The measurement distance is 3 meter.
- The EUT was set into operation.

##### Premeasurement:

- The turntable rotates from 0° to 315° using 45° steps.
- The antenna height is 1.0 meter.
- At each turntable position the analyzer sweeps with peak detection to find the maximum of all emissions

##### Final measurement:

- Identified emissions during the premeasurement the software maximizes by rotating the turntable position (0° to 360°) and by rotating the elevation axes (0° to 360°).
- The final measurement will be done in the position (turntable and elevation) causing the highest emissions with QPK detector.
- The final levels, frequency, measuring time, bandwidth, turntable position, correction factor, margin to the limit and limit will be recorded. Also a plot with the graph of the premeasurement and the limit will be stored.





## 2) Sequence of testing 30 MHz to 1 GHz

### Setup:

- The equipment was set up to simulate a typical usage like described in the user manual or described by manufacturer.
- If the EUT is a tabletop system, a table with 0.8 m height is used, which is placed on the ground plane.
- If the EUT is a floor standing device, it is placed on the ground plane with insulation between both.
- Auxiliary equipment and cables were positioned to simulate normal operation conditions
- The AC power port of the EUT (if available) is connected to a power outlet below the turntable.
- The measurement distance is 3 meter.
- The EUT was set into operation.

### Premeasurement:

- The turntable rotates from 0° to 315° using 45° steps.
- The antenna is polarized vertical and horizontal.
- The antenna height changes from 1 to 3 meter.
- At each turntable position, antenna polarization and height the analyzer sweeps three times in peak to find the maximum of all emissions.

### Final measurement:

- The final measurement will be performed with minimum the six highest peaks.
- According to the maximum antenna and turntable positions of premeasurement the software maximize the peaks by changing turntable position ( $\pm 45^\circ$ ) and antenna movement between 1 and 4 meter.
- The final measurement will be done with QP detector with an EMI receiver.
- The final levels, frequency, measuring time, bandwidth, antenna height, antenna polarization, turntable angle, correction factor, margin to the limit and limit will be recorded. Also a plot with the graph of the premeasurement with marked maximum final measurements and the limit will be stored.



Shenzhen LCS Compliance Testing Laboratory Ltd.

Add: 101, 201 Bldg A & 301 Bldg C, Juji Industrial Park Yabianxueziwei, Shajing Street, Baoan District, Shenzhen, 518000, China

Tel: +(86) 0755-82591330 | E-mail: [webmaster@lcs-cert.com](mailto:webmaster@lcs-cert.com) | Web: [www.lcs-cert.com](http://www.lcs-cert.com)

Scan code to check authenticity





### 3) Sequence of testing 1 GHz to 18 GHz

#### Setup:

- The equipment was set up to simulate a typical usage like described in the user manual or described by manufacturer.
- If the EUT is a tabletop system, a rotatable table with 1.5 m height is used.
- If the EUT is a floor standing device, it is placed on the ground plane with insulation between both.
- Auxiliary equipment and cables were positioned to simulate normal operation conditions
- The AC power port of the EUT (if available) is connected to a power outlet below the turntable.
- The measurement distance is 3 meter.
- The EUT was set into operation.

#### Premeasurement:

- The turntable rotates from 0° to 315° using 45° steps.
- The antenna is polarized vertical and horizontal.
- The antenna height scan range is 1 meter to 2.5 meter.
- At each turntable position and antenna polarization the analyzer sweeps with peak detection to find the maximum of all emissions.

#### Final measurement:

- The final measurement will be performed with minimum the six highest peaks.
- According to the maximum antenna and turntable positions of premeasurement the software maximize the peaks by changing turntable position ( $\pm 45^\circ$ ) and antenna movement between 1 and 4 meter. This procedure is repeated for both antenna polarizations.
- The final measurement will be done in the position (turntable, EUT-table and antenna polarization) causing the highest emissions with Peak and Average detector.
- The final levels, frequency, measuring time, bandwidth, turntable position, EUT-table position, antenna polarization, correction factor, margin to the limit and limit will be recorded. Also a plot with the graph of the premeasurement with marked maximum final measurements and the limit will be stored.







#### 4) Sequence of testing above 18 GHz

##### Setup:

- The equipment was set up to simulate a typical usage like described in the user manual or described by manufacturer.
- If the EUT is a tabletop system, a rotatable table with 1.5 m height is used.
- If the EUT is a floor standing device, it is placed on the ground plane with insulation between both.
- Auxiliary equipment and cables were positioned to simulate normal operation conditions
- The AC power port of the EUT (if available) is connected to a power outlet below the turntable.
- The measurement distance is 1 meter.
- The EUT was set into operation.

##### Premeasurement:

- The antenna is moved spherical over the EUT in different polarizations of the antenna.


##### Final measurement:

- The final measurement will be performed at the position and antenna orientation for all detected emissions that were found during the premeasurements with Peak and Average detector.
- The final levels, frequency, measuring time, bandwidth, correction factor, margin to the limit and limit will be recorded. Also a plot with the graph of the premeasurement and the limit will be stored.





## 5.1.4. Test Setup Layout

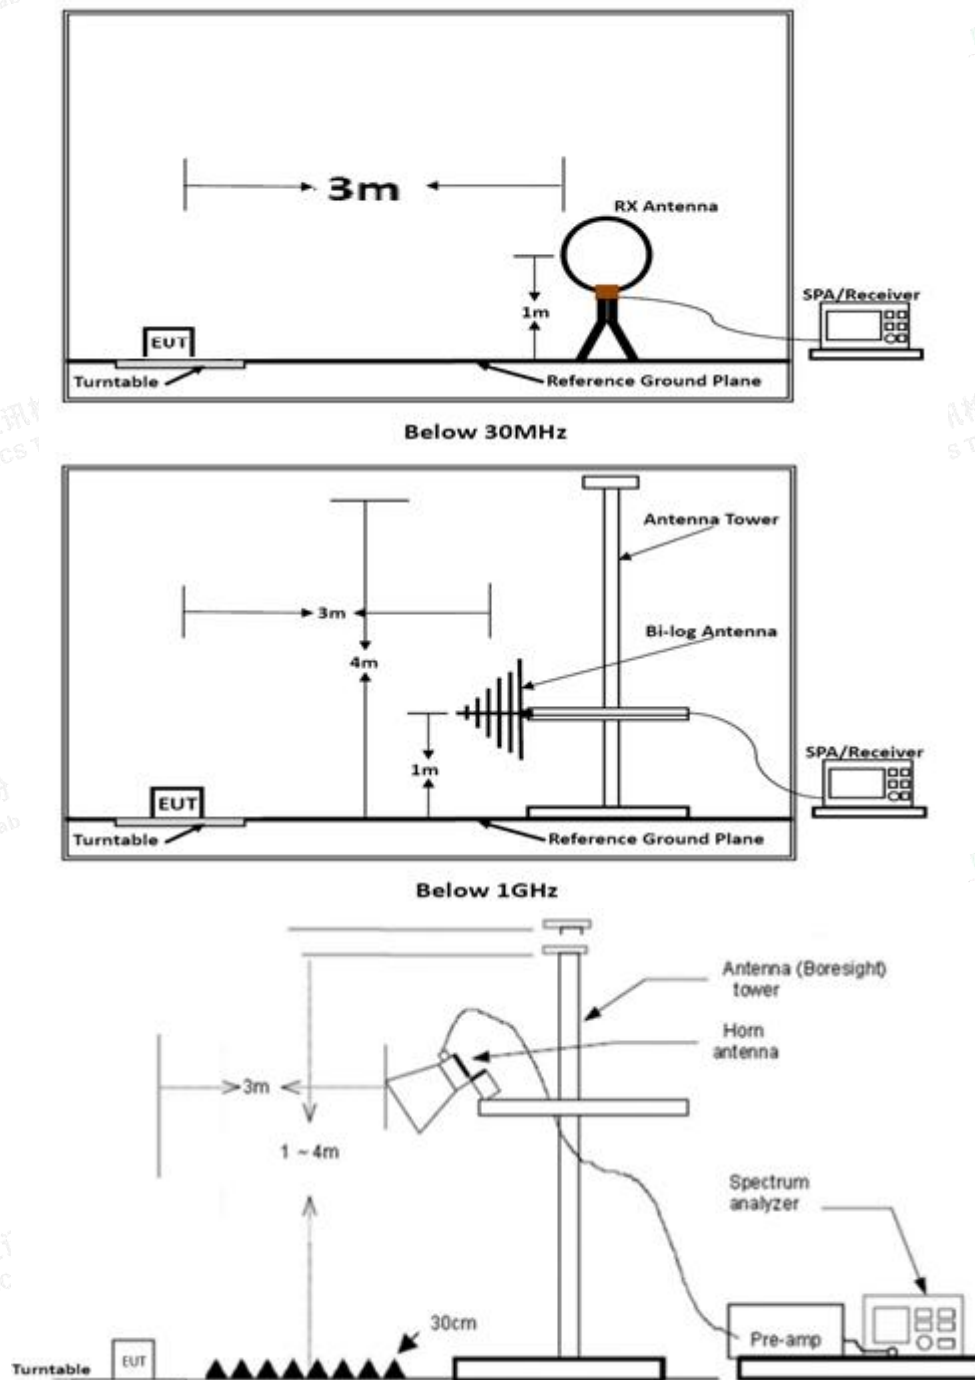

Above 18 GHz shall be extrapolated to the specified distance using an extrapolation factor of 20 dB/decade from 3m to 1m.





## 5.1.5. Test Results

Temperature	23.8℃	Humidity	52.5%
Test Engineer	Taylor Hu	Configurations	NFC

PASS.

The test data please refer to following page:

## 9 KHz~30MHz

Note: Only recorded the worst test result.

90 Degree



No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector
1	0.1476	56.01	-9.77	46.24	104.16	-57.92	QP
2	0.2782	45.35	-9.19	36.16	98.69	-62.53	QP
3	0.6955	43.72	-9.52	34.20	70.76	-36.56	QP
4	1.0100	44.93	-9.25	35.68	67.52	-31.84	QP
5	2.5684	41.66	-9.42	32.24	69.54	-37.30	QP
6	13.6584	57.66	-10.02	47.64	69.54	-21.90	QP

\*Note: Measurement = Reading Level + Factor

Margin = Measurement - Limit.



Shenzhen LCS Compliance Testing Laboratory Ltd.

Add: 101, 201 Bldg A &amp; 301 Bldg C, Juji Industrial Park Yabianxueziwei, Shajing Street, Baoan District, Shenzhen, 518000, China


Tel: +(86) 0755-82591330 | E-mail: webmaster@lcs-cert.com | Web: www.lcs-cert.com

Scan code to check authenticity



## 30MHz ~ 1GHz

Horizontal:

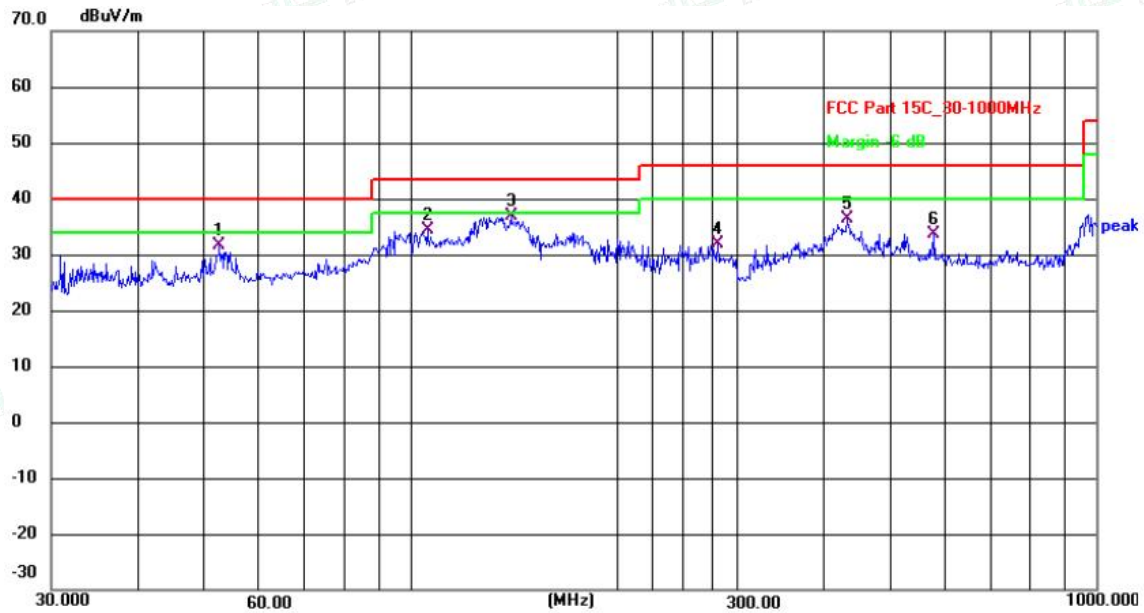

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector
1	52.7600	49.19	-17.54	31.65	40.00	-8.35	QP
2	106.0126	53.05	-18.71	34.34	43.50	-9.16	QP
3	140.3420	57.80	-20.86	36.94	43.50	-6.56	QP
4	281.0074	47.39	-15.42	31.97	46.00	-14.03	QP
5	434.0649	50.15	-13.81	36.34	46.00	-9.66	QP
6	580.7024	44.43	-10.77	33.66	46.00	-12.34	QP



Shenzhen LCS Compliance Testing Laboratory Ltd.

Add: 101, 201 Bldg A &amp; 301 Bldg C, Juji Industrial Park Yabianxueziwei, Shajing Street, Baoan District, Shenzhen, 518000, China

Tel: +(86) 0755-82591330 | E-mail: webmaster@lcs-cert.com | Web: www.lcs-cert.com

Scan code to check authenticity



Vertical:



No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector
1	44.2751	49.82	-16.99	32.83	40.00	-7.17	QP
2	76.5119	50.19	-19.74	30.45	40.00	-9.55	QP
3	150.5377	57.28	-19.82	37.46	43.50	-6.04	QP
4	178.7581	56.63	-18.79	37.84	43.50	-5.66	QP
5	389.3548	53.22	-14.55	38.67	46.00	-7.33	QP
6	504.7062	50.49	-13.07	37.42	46.00	-8.58	QP

Note:

Pre-scan all modes and recorded the worst case results in this report.

Emission level (dBuV/m) = 20 log Emission level (uV/m).

Corrected Reading: Factor + Read Level = Level.

Margin=Level – Limit.



Shenzhen LCS Compliance Testing Laboratory Ltd.

Add: 101, 201 Bldg A &amp; 301 Bldg C, Juji Industrial Park Yabianxueziwei, Shajing Street, Baoan District, Shenzhen, 518000, China

Tel: +(86) 0755-82591330 | E-mail: webmaster@lcs-cert.com | Web: www.lcs-cert.com


Scan code to check authenticity





## 5.2. Field Strength of Fundamental Emissions and Mask Measurement

### 5.2.1. Block Diagram of Test Setup

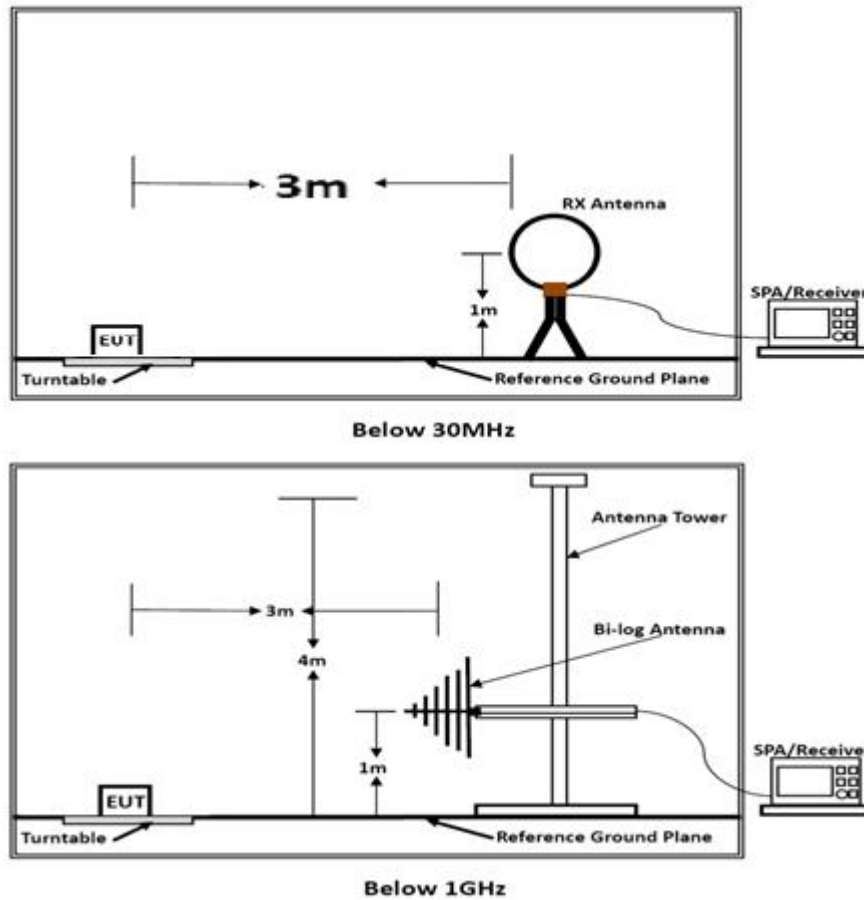

### 5.2.2. Field strength of fundamental emissions limit and Mask limit

The field strength of fundamental emissions shall not exceed 15848 microvolts/meter at 30 meters. The emissions limit in this paragraph is based on measurement instrumentation employing a QP detector.

Frequencies (MHz)	Field Strength (microvolts/meter)	Field Strength (dB $\mu$ V/m) at 10m	Field Strength (dB $\mu$ V/m) at 3m
13.553 ~ 13.567MHz	15848 at 30m	103.08 (QP)	124 (QP)

Mask Limit:

Frequency (MHz)	Limit (dB $\mu$ V/m)	Distance (m)
1.705-13.110	69.5	3
13.110-13.410	80.5	3
13.410-13.553	90.5	3
13.553-13.567	124.0	3
13.567-13.710	90.5	3
13.710-14.010	80.5	3
14.010-30.000	69.5	3

### 5.2.3. Test Results

PASS.


The test data please refer to following page:





Temperature	23.7°C	Humidity	52.6%
Test Engineer	Taylor Hu	Configurations	NFC

90 Degree

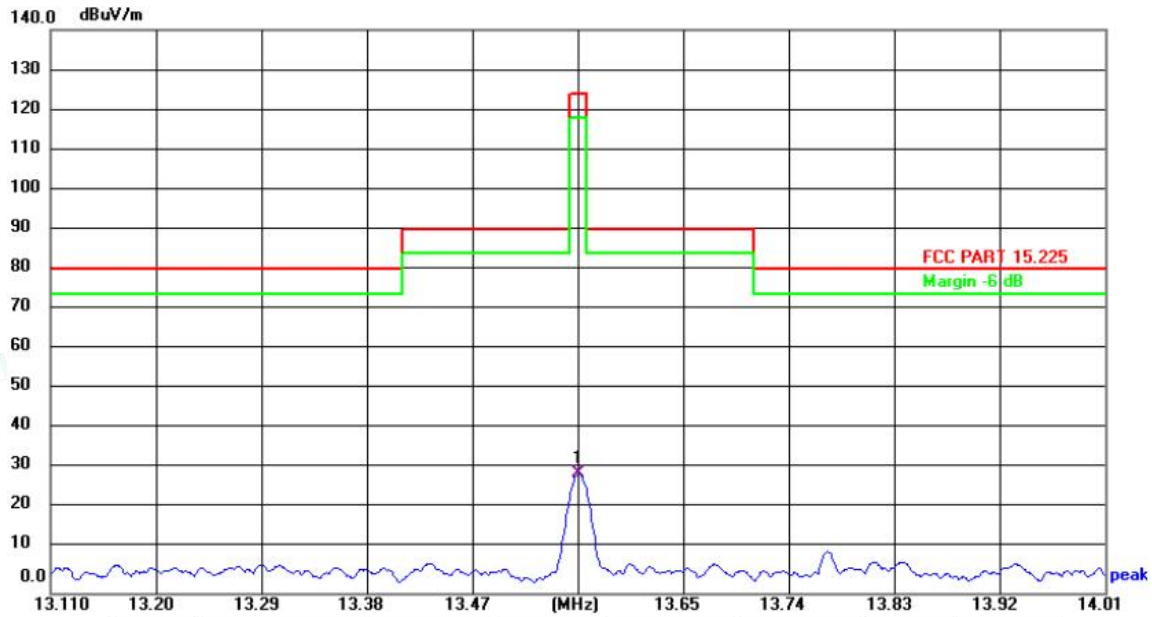

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector
1	13.5609	39.95	-10.01	29.94	124.00	-94.06	QP



Shenzhen LCS Compliance Testing Laboratory Ltd.

Add: 101, 201 Bldg A &amp; 301 Bldg C, Juji Industrial Park Yabianxueziwei, Shajing Street, Baoan District, Shenzhen, 518000, China


Tel: +(86) 0755-82591330 | E-mail: webmaster@lcs-cert.com | Web: www.lcs-cert.com

Scan code to check authenticity





0 Degree

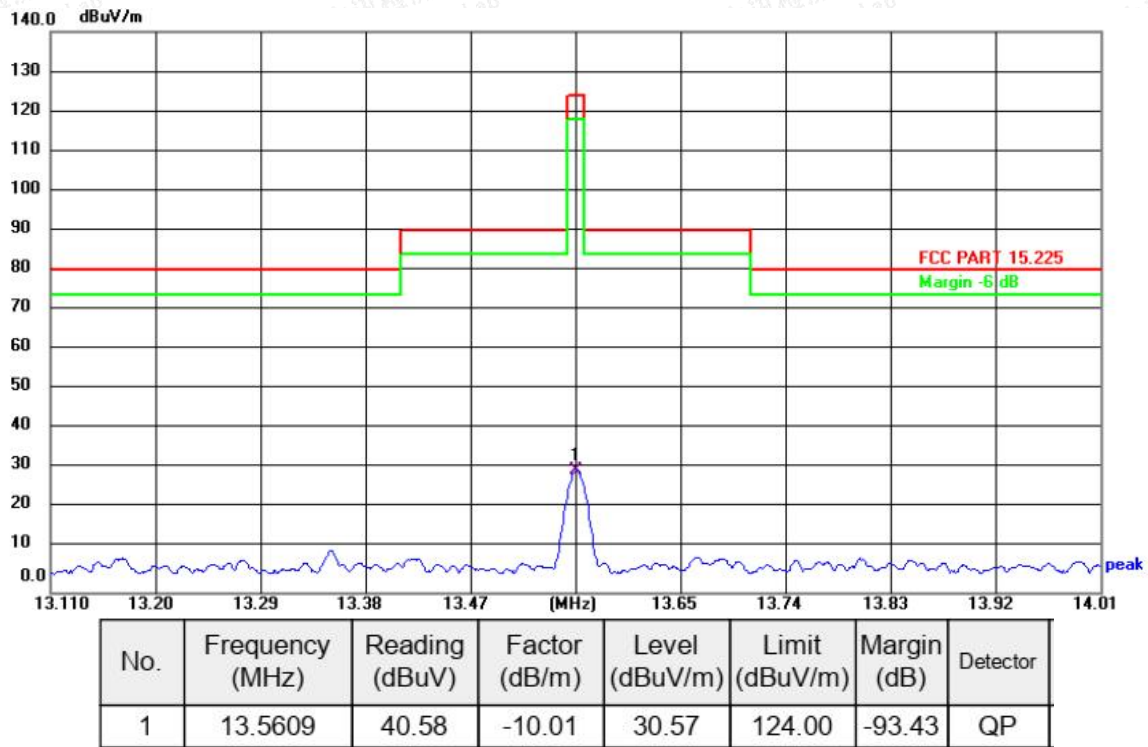

\*Note: Factor= Antenna Factor + Cable Loss

Measured (dBuV/m) = Reading + Factor+51.5, Margin= Measured - Limit

Emission level (dBuV/m) = 20 log Emission level (uV/m).

Measured distance is 3m.

All emissions emit from non-NFC function of digital unintentional emissions. All NFC's spurious emissions are below 20dB of limits.

X axis / Y axis/ Z axis were tested,report only recorded the worst result of X axis.



Shenzhen LCS Compliance Testing Laboratory Ltd.

Add: 101, 201 Bldg A & 301 Bldg C, Juji Industrial Park Yabianxueziwei, Shajing Street, Baoan District, Shenzhen, 518000, China

Tel: +(86) 0755-82591330 | E-mail: webmaster@lcs-cert.com | Web: www.lcs-cert.com

Scan code to check authenticity



## 6. BANDWIDTH OF THE OPERATING FREQUENCY


### 6.1. Standard Applicable

Intentional radiators must be designed to ensure that the 20 dB bandwidth of the emissions in the specific band (13.553 ~ 13.567MHz).

### 6.2. Test Result

EUT	Smart Treadmill
RBW	1.5KHz
VBW	4.7KHz
SPAN	50KHz
Carrier Frequency (MHz)	20dB Bandwidth (KHz)
13.56	4.562

Please refer to the test plot:

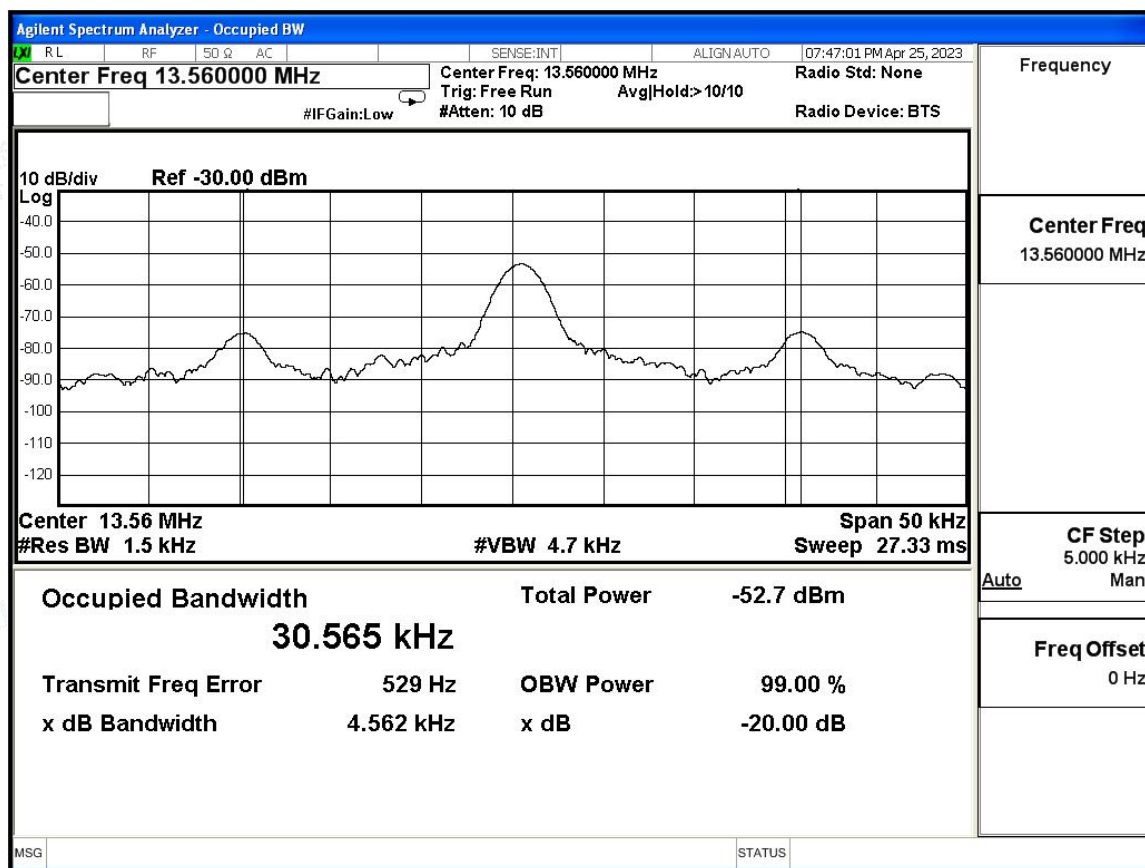



## 7. FREQUENCY STABILITY MEASUREMENT

### 7.1 Standard Applicable

The frequency tolerance of the carrier signal shall be maintained within +/- 0.01% (100ppm) of the operating frequency over a temperature variation of -20 degrees to +50 degrees C at normal supply voltage, and for a variation in the primary supply voltage from 85% to 115% of the rated supply voltage at a temperature of 20 degrees C. For battery operated equipment, the equipment tests shall be performed using a full charged battery.

### 7.2 Test Result

#### Voltage vs. Frequency Stability

Voltage(V)	Measurement Frequency (MHz)	Deviation (KHz)	Deviation (ppm)	Limit (ppm)
VL	13.56033	0.33	24.18	100
VN	13.56047	0.47	34.87	100
VH	13.56029	0.29	21.34	100

#### Temperature vs. Frequency Stability

Temperature (°C)	Measurement Frequency (MHz)	Deviation (KHz)	Deviation (ppm)	Limit (ppm)
-20	13.56039	0.39	28.99	100
-10	13.56018	0.18	13.15	100
0	13.56022	0.22	15.97	100
10	13.56035	0.35	26.02	100
20	13.56037	0.37	27.37	100
30	13.56038	0.38	27.97	100
40	13.56039	0.39	28.41	100
50	13.56025	0.25	18.61	100





## 8. LINE CONDUCTED EMISSIONS


### 8.1. Standard Applicable

According to §15.207(a): For an intentional radiator which is designed to be connected to the public utility (AC) power line, the radio frequency voltage that is conducted back onto the AC power line on any frequency or frequencies within the band 150 kHz to 30 MHz shall not exceed 250 microvolts (The limit decreases linearly with the logarithm of the frequency in the range 0.15 MHz to 0.50 MHz). The limits at specific frequency range are listed as follows:

Frequency Range (MHz)	Limits (dB $\mu$ V)	
	Quasi-peak	Average
0.15 to 0.50	66 to 56	56 to 46
0.50 to 5	56	46
5 to 30	60	50

\* Decreasing linearly with the logarithm of the frequency

### 8.2. Block Diagram of Test Setup

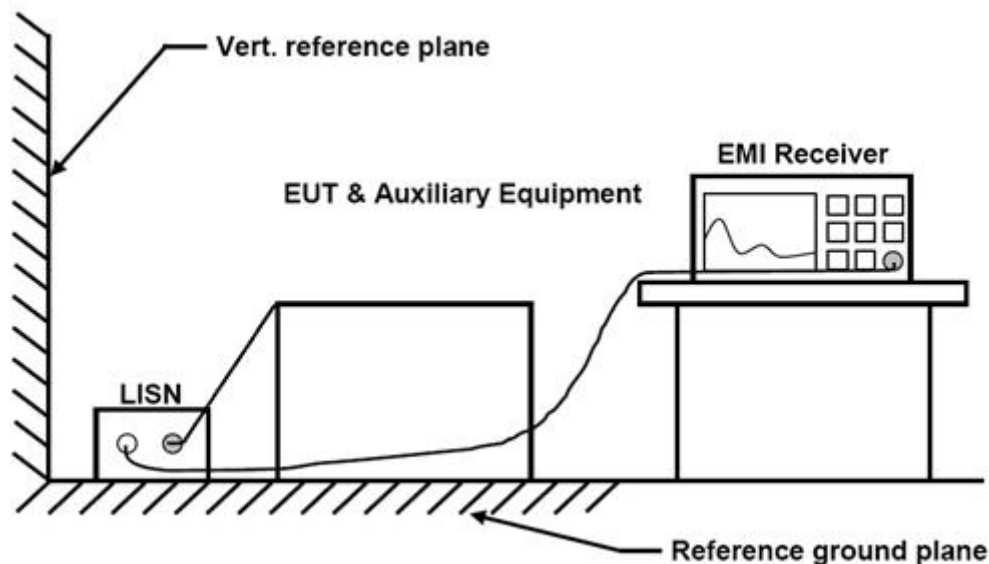

### 8.3. Test Results

**PASS.**


Temperature	23.3°C	Humidity	53.1%
Test Engineer	Taylor Hu	Configurations	NFC

The test data please refer to following page.



**AC Conducted Emission @ AC 120V/60Hz (worst case)**

Line

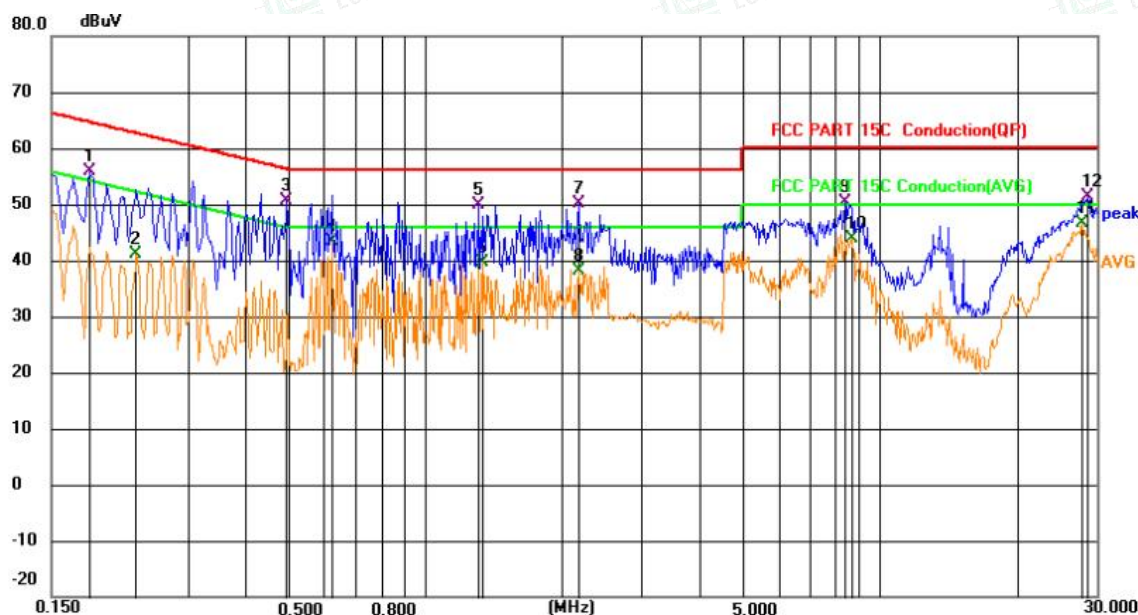

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV	Limit dBuV	Margin dB	Detector	Comment
1		0.1816	36.31	19.63	55.94	64.41	-8.47	QP	
2		0.2310	21.61	19.63	41.24	52.41	-11.17	AVG	
3		0.4964	31.07	19.64	50.71	56.06	-5.35	QP	
4	*	0.6225	23.69	19.66	43.35	46.00	-2.65	AVG	
5		1.3104	30.12	19.66	49.78	56.00	-6.22	QP	
6		1.3425	19.88	19.66	39.54	46.00	-6.46	AVG	
7		2.1749	30.35	19.68	50.03	56.00	-5.97	QP	
8		2.1749	18.42	19.68	38.10	46.00	-7.90	AVG	
9		8.3803	30.71	19.79	50.50	60.00	-9.50	QP	
10		8.7001	24.16	19.80	43.96	50.00	-6.04	AVG	
11		27.8836	26.52	20.06	46.58	50.00	-3.42	AVG	
12		28.6171	31.26	20.08	51.34	60.00	-8.66	QP	



Shenzhen LCS Compliance Testing Laboratory Ltd.

Add: 101, 201 Bldg A &amp; 301 Bldg C, Juji Industrial Park Yabianxueziwei, Shajing Street, Baoan District, Shenzhen, 518000, China


Tel: +(86) 0755-82591330 | E-mail: webmaster@lcs-cert.com | Web: www.lcs-cert.com

Scan code to check authenticity





Neutral

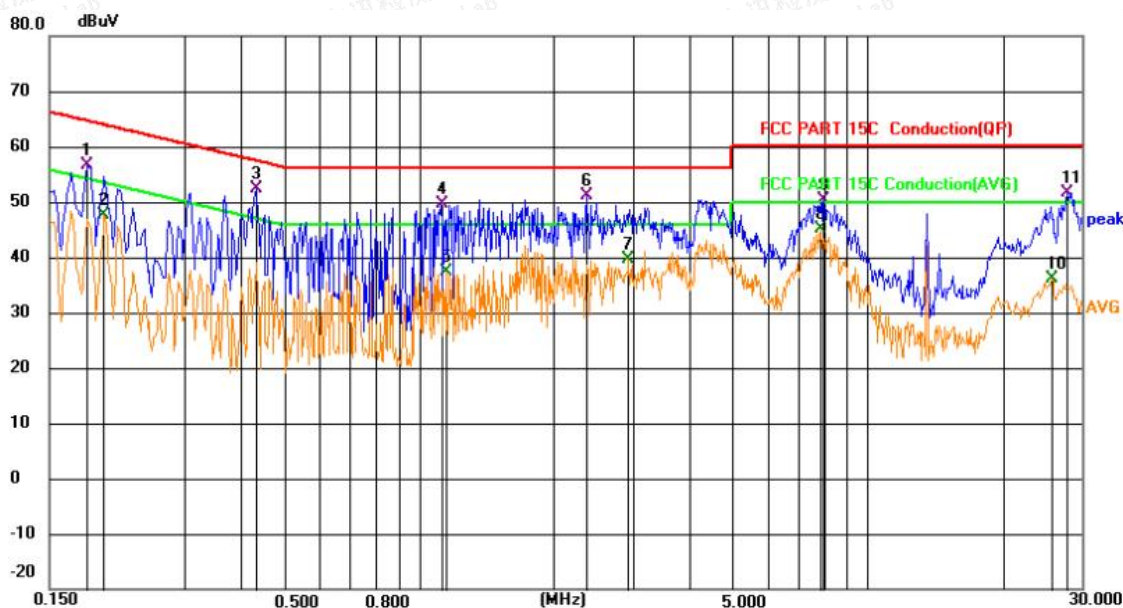

No.	Mk.	Freq. MHz	Reading dBuV	Correct Factor dB	Measure- ment dBuV	Limit dBuV	Margin dB	Detector	Comment
1		0.1814	37.07	19.63	56.70	64.42	-7.72	QP	
2		0.1985	27.90	19.63	47.53	53.67	-6.14	AVG	
3	*	0.4328	32.85	19.63	52.48	57.20	-4.72	QP	
4		1.1170	29.98	19.65	49.63	56.00	-6.37	QP	
5		1.1532	17.69	19.65	37.34	46.00	-8.66	AVG	
6		2.3584	31.41	19.70	51.11	56.00	-4.89	QP	
7		2.9305	20.02	19.73	39.75	46.00	-6.25	AVG	
8		7.8516	25.35	19.84	45.19	50.00	-4.81	AVG	
9		7.9774	30.56	19.84	50.40	60.00	-9.60	QP	
10		25.7271	16.03	20.02	36.05	50.00	-13.95	AVG	
11		27.8551	31.59	20.06	51.65	60.00	-8.35	QP	

Measurement = Reading + Correct, Margin = Measurement - Limit.





## 9. ANTENNA REQUIREMENTS

### 9.1 Standard Applicable

According to antenna requirement of §15.203.

An intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the provisions of this Section. The manufacturer may design the unit so that a broken antenna can be re-placed by the user, but the use of a standard antenna jack or electrical connector is prohibited. This requirement does not apply to carrier current devices or to devices operated under the provisions of Sections 15.211, 15.213, 15.217, 15.219, or 15.221. Further, this requirement does not apply to intentional radiators that must be professionally installed, such as perimeter protection systems and some field disturbance sensors, or to other intentional radiators which, in accordance with Section 15.31(d), must be measured at the installation site. However, the installer shall be responsible for ensuring that the proper antenna is employed so that the limits in this Part are not exceeded.

### 9.2 Antenna Connected Construction

#### 9.2.1. Standard Applicable

According to § 15.203, an intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device.

#### 9.2.2. Antenna Connector Construction

The gains of antenna used for transmitting is 0dBi, and the antenna is PCB Antenna connect to PCB board and no consideration of replacement. Please see EUT photo for details.

#### 9.2.3. Results: Compliance.



Shenzhen LCS Compliance Testing Laboratory Ltd.

Add: 101, 201 Bldg A & 301 Bldg C, Juji Industrial Park Yabianxueziwei, Shajing Street, Baoan District, Shenzhen, 518000, China

Tel: +(86) 0755-82591330 | E-mail: webmaster@lcs-cert.com | Web: www.lcs-cert.com

Scan code to check authenticity





## 10. LIST OF MEASURING EQUIPMENTS

Item	Equipment	Manufacturer	Model No.	Serial No.	Cal Date	Due Date
1	Power Meter	R&S	NRVS	100444	2022-06-16	2023-06-15
2	Power Sensor	R&S	NRV-Z81	100458	2022-06-16	2023-06-15
3	Power Sensor	R&S	NRV-Z32	10057	2022-06-16	2023-06-15
4	Test Software	Tonscend	JS1120-2	/	N/A	N/A
5	RF Control Unit	Tonscend	JS0806-2	N/A	2022-10-29	2023-10-28
6	MXA Signal Analyzer	Agilent	N9020A	MY50510140	2022-10-29	2023-10-28
7	DC Power Supply	Agilent	E3642A	N/A	2022-10-29	2023-10-28
8	EMI Test Software	AUDIX	E3	/	N/A	N/A
9	3m Semi Anechoic Chamber	SIDT FRANKONIA	SAC-3M	03CH03-HY	2022-06-16	2023-06-15
10	Positioning Controller	Max-Full	MF7802BS	MF780208586	N/A	N/A
11	Active Loop Antenna	SCHWARZBECK	FMZB 1519B	00005	2021-08-29	2024-08-28
12	By-log Antenna	SCHWARZBECK	VULB9163	9163-470	2021-09-12	2024-09-11
13	Horn Antenna	SCHWARZBECK	BBHA 9120D	9120D-1925	2021-09-05	2024-09-04
14	Broadband Horn Antenna	SCHWARZBECK	BBHA 9170	791	2021-08-29	2024-08-28
15	Broadband Preamplifier	SCHWARZBECK	BBV9719	9719-025	2022-06-16	2023-06-15
16	EMI Test Receiver	R&S	ESR 7	101181	2022-06-16	2023-06-15
17	RS SPECTRUM ANALYZER	R&S	FSP40	100503	2022-10-29	2023-10-28
18	Broadband Preamplifier	/	BP-01M18G	P190501	2022-06-16	2023-06-15
19	6dB Attenuator	/	100W/6dB	1172040	2022-06-16	2023-06-15
20	3dB Attenuator	/	2N-3dB	/	2022-10-29	2023-10-28
21	EMI Test Receiver	R&S	ESPI	101940	2022-08-18	2023-08-17
22	Artificial Mains	R&S	ENV216	101288	2022-06-16	2023-06-15
23	10dB Attenuator	SCHWARZBECK	MTS-IMP-136	261115-001-0032	2022-06-16	2023-06-15
24	EMI Test Software	Farad	EZ	/	N/A	N/A





## 11. Test Setup Photographs of Eut

Please refer to separated files for Test Setup Photos of the EUT.

## 12. Exterior Photographs of the Eut

Please refer to separated files for Exterior Photos of the EUT.

## 13. Interior Photographs of the Eut

Please refer to separated files for Interior Photos of the EUT.

-----THE END OF REPORT-----



Shenzhen LCS Compliance Testing Laboratory Ltd.

Add: 101, 201 Bldg A & 301 Bldg C, Juji Industrial Park Yabianxueziwei, Shajing Street, Baoan District, Shenzhen, 518000, China

Tel: +(86) 0755-82591330 | E-mail: [webmaster@lcs-cert.com](mailto:webmaster@lcs-cert.com) | Web: [www.lcs-cert.com](http://www.lcs-cert.com)

Scan code to check authenticity