



**FCC CFR47 PART 15 SUBPART C**

**BLUETOOTH LOW ENERGY  
CERTIFICATION TEST REPORT**

**For**

**GSM/WCDMA/LTE + BLUETOOTH, DTS/UNII a/b/g/n/ac, ANT+ and NFC**

**FCC ID: PY7-PM0791**

**REPORT NUMBER: 15J20225-E2**

**ISSUE DATE: MAY 5, 2015**

**Prepared for  
SONY MOBILE COMMUNICATIONS, INC.  
1-8-15 KONAN, MINATO-KU  
TOKYO, 108-0075 JAPAN**

**Prepared by  
UL VERIFICATION SERVICES INC.  
47173 BENICIA STREET  
FREMONT, CA 94538, U.S.A.  
TEL: (510) 771-1000  
FAX: (510) 661-0888**



**NVLAP LAB CODE 200065-0**

Revision History

| Issue |          |               |            |
|-------|----------|---------------|------------|
| Rev.  | Date     | Revisions     | Revised By |
| -     | 05/05/15 | Initial Issue | CHOON OOI  |

## TABLE OF CONTENTS

|  |           |
|--|-----------|
| <b>1. ATTESTATION OF TEST RESULTS .....</b>        | <b>4</b>  |
| <b>2. TEST METHODOLOGY .....</b>                   | <b>5</b>  |
| <b>3. FACILITIES AND ACCREDITATION .....</b>       | <b>5</b>  |
| <b>4. CALIBRATION AND UNCERTAINTY .....</b>        | <b>6</b>  |
| 4.1. MEASURING INSTRUMENT CALIBRATION .....        | 6         |
| 4.2. SAMPLE CALCULATION .....                      | 6         |
| 4.3. MEASUREMENT UNCERTAINTY.....                  | 6         |
| <b>5. EQUIPMENT UNDER TEST .....</b>               | <b>7</b>  |
| 5.1. DESCRIPTION OF EUT .....                      | 7         |
| 5.2. MAXIMUM OUTPUT POWER.....                     | 7         |
| 5.3. DESCRIPTION OF AVAILABLE ANTENNAS .....       | 7         |
| 5.4. WORST-CASE CONFIGURATION AND MODE.....        | 8         |
| 5.5. DESCRIPTION OF TEST SETUP.....                | 9         |
| <b>6. TEST AND MEASUREMENT EQUIPMENT .....</b>     | <b>11</b> |
| <b>7. SUMMARY .....</b>                            | <b>12</b> |
| <b>8. ANTENNA PORT TEST RESULTS .....</b>          | <b>13</b> |
| 8.1. 6 dB BANDWIDTH.....                           | 13        |
| 8.2. 99% BANDWIDTH.....                            | 14        |
| 8.3. OUTPUT POWER.....                             | 15        |
| 8.4. AVERAGE POWER.....                            | 16        |
| 8.5. POWER SPECTRAL DENSITY .....                  | 17        |
| 8.6. CONDUCTED SPURIOUS EMISSIONS.....             | 18        |
| <b>9. RADIATED TEST RESULTS.....</b>               | <b>19</b> |
| 9.1. LIMITS AND PROCEDURE .....                    | 19        |
| 9.2. TRANSMITTER ABOVE 1 GHz .....                 | 20        |
| 9.3. WORST-CASE BELOW 1 GHz.....                   | 20        |
| <b>10. AC POWER LINE CONDUCTED EMISSIONS .....</b> | <b>21</b> |
| <b>11. SETUP PHOTOS .....</b>                      | <b>22</b> |
| <b>END OF REPORT .....</b>                         | <b>23</b> |

## 1. ATTESTATION OF TEST RESULTS

**COMPANY NAME:** SONY MOBILE COMMUNICATIONS, INC.  
**EUT DESCRIPTION:** GSM/WCDMA/LTE + BLUETOOTH, DTS/UNII a/b/g/n/ac , ANT+ and NFC  
**SERIAL NUMBER:** 159243-6 (Conducted), 153033-5 (Radiated)  
**DATE TESTED:** MARCH 9-27, 2015

| APPLICABLE STANDARDS     |              |
|--------------------------|--------------|
| STANDARD                 | TEST RESULTS |
| CFR 47 Part 15 Subpart C | Pass         |

UL Verification Services Inc. tested the above equipment in accordance with the requirements set forth in the above standards. All indications of Pass/Fail in this report are opinions expressed by UL Verification Services Inc. based on interpretations and/or observations of test results. Measurement Uncertainties were not taken into account and are published for informational purposes only. The test results show that the equipment tested is capable of demonstrating compliance with the requirements as documented in this report.

**Note:** The results documented in this report apply only to the tested sample, under the conditions and modes of operation as described herein. This document may not be altered or revised in any way unless done so by UL Verification Services Inc. and all revisions are duly noted in the revisions section. Any alteration of this document not carried out by UL Verification Services Inc. will constitute fraud and shall nullify the document. This report must not be used by the client to claim product certification, approval, or endorsement by NVLAP, NIST, any agency of the Federal Government, or any agency of any government.

Approved & Released For  
UL Verification Services Inc. By:



CHOON OOI  
CONSUMER TECHNOLOGY DIVISION  
WISE PROJECT LEAD  
UL Verification Services Inc.

Tested By:



CHARLES VERGONIO  
CONSUMER TECHNOLOGY DIVISION  
WISE LAB ENGINEER  
UL Verification Services Inc.

## 2. TEST METHODOLOGY

The tests documented in this report were performed in accordance with FCC CFR 47 Part 2, FCC CFR 47 Part 15, and ANSI C63.4-2009.

## 3. FACILITIES AND ACCREDITATION

The test sites and measurement facilities used to collect data are located at 47173 and 47266 Benicia Street, Fremont, California, USA. Line conducted emissions are measured only at the 47173 address. The following table identifies which facilities were utilized for radiated emission measurements documented in this report. Specific facilities are also identified in the test results sections.

| 47173 Benicia Street                                       | 47266 Benicia Street                                       |
|--|--|
| <input checked="" type="checkbox"/> Chamber A(IC: 2324B-1) | <input type="checkbox"/> Chamber D(IC: 2324B-4)            |
| <input type="checkbox"/> Chamber B(IC: 2324B-2)            | <input type="checkbox"/> Chamber E(IC: 2324B-5)            |
| <input checked="" type="checkbox"/> Chamber C(IC: 2324B-3) | <input type="checkbox"/> Chamber F(IC: 2324B-6)            |
|  | <input checked="" type="checkbox"/> Chamber G(IC: 2324B-7) |
|  | <input type="checkbox"/> Chamber H(IC: 2324B-8)            |

UL Verification Services Inc. is accredited by NVLAP, Laboratory Code 200065-0. The full scope of accreditation can be viewed at <http://ts.nist.gov/standards/scopes/2000650.htm>.

## 4. CALIBRATION AND UNCERTAINTY

### 4.1. MEASURING INSTRUMENT CALIBRATION

The measuring equipment utilized to perform the tests documented in this report has been calibrated in accordance with the manufacturer's recommendations, and is traceable to recognized national standards.

### 4.2. SAMPLE CALCULATION

Where relevant, the following sample calculation is provided:

$$\text{Field Strength (dBuV/m)} = \text{Measured Voltage (dBuV)} + \text{Antenna Factor (dB/m)} + \text{Cable Loss (dB)} - \text{Preamp Gain (dB)}$$

$$36.5 \text{ dBuV} + 18.7 \text{ dB/m} + 0.6 \text{ dB} - 26.9 \text{ dB} = 28.9 \text{ dBuV/m}$$

### 4.3. MEASUREMENT UNCERTAINTY

Where relevant, the following measurement uncertainty levels have been estimated for tests performed on the apparatus:

| PARAMETER                             | UNCERTAINTY |
|---------------------------------------|-------------|
| Conducted Disturbance, 0.15 to 30 MHz | 3.52 dB     |
| Radiated Disturbance, 30 to 18000 MHz | 4.94 dB     |

Uncertainty figures are valid to a confidence level of 95%.

## 5. EQUIPMENT UNDER TEST

### 5.1. DESCRIPTION OF EUT

This EUT is a GSM/WCDMA/LTE + BLUETOOTH, DTS/UNII a/b/g/n/ac , ANT+ and NFC.

The model FCC ID: PY7-PM0791 shares the same enclosure and circuit board as mode FCC ID: PY7-PM0793. The unlicensed radios (WLAN/BT/NFC/ANT+) including antenna and GPS receiver, are identical between the two units.

After confirming through preliminary radiated emissions that the performance of the FCC ID: PY7-PM0793 data remains representative of this model (FCC ID: PY7-PM0791), FCC ID: PY7-PM0791 leveraged test data from FCC ID: PY7-PM0793.

### 5.2. MAXIMUM OUTPUT POWER

The transmitter has a maximum peak conducted output power as follows:

| Frequency Range (MHz) | Mode | Output Power (dBm) | Output Power (mW) |
|-----------------------|------|--------------------|-------------------|
| 2402-2480             | BLE  | 6.41               | 4.38              |

### 5.3. DESCRIPTION OF AVAILABLE ANTENNAS

The radio utilizes an FPCB antenna, with a maximum gain of -0.6dBi.

---

## **5.4. WORST-CASE CONFIGURATION AND MODE**

Radiated emission and power line conducted emission were performed with the EUT set to transmit at the channel with highest output power as worst-case scenario.

The fundamental of the EUT was investigated in three orthogonal orientations X,Y,Z, it was determined that X orientation was worst-case orientation; therefore, all final radiated testing was performed with the EUT in X orientation.



## 5.5. DESCRIPTION OF TEST SETUP

### SUPPORT EQUIPMENT

| Support Equipment List |              |        |                 |        |
|------------------------|--------------|--------|-----------------|--------|
| Description            | Manufacturer | Model  | Serial Number   | FCC ID |
| AC Adapter             | SONY         | EP880  | 3514W 01 S08328 | N/A    |
| Earphone               | SONY         | MH410C | N/A             | N/A    |

### I/O CABLES


| I/O Cable List |          |                      |                |            |                  |         |
|----------------|----------|----------------------|----------------|------------|------------------|---------|
| Cable No       | Port     | # of identical ports | Connector Type | Cable Type | Cable Length (m) | Remarks |
| 1              | DC Power | 1                    | Mini-USB       | Shielded   | 1.2m             | N/A     |
| 2              | Audio    | 1                    | Mini-Jack      | Unshielded | 1m               | N/A     |

### TEST SETUP

The EUT is continuously communicating to the Bluetooth tester during the tests.

EUT was set in the Hidden menu mode to enable BLE communications.

**SETUP DIAGRAM FOR TESTS**

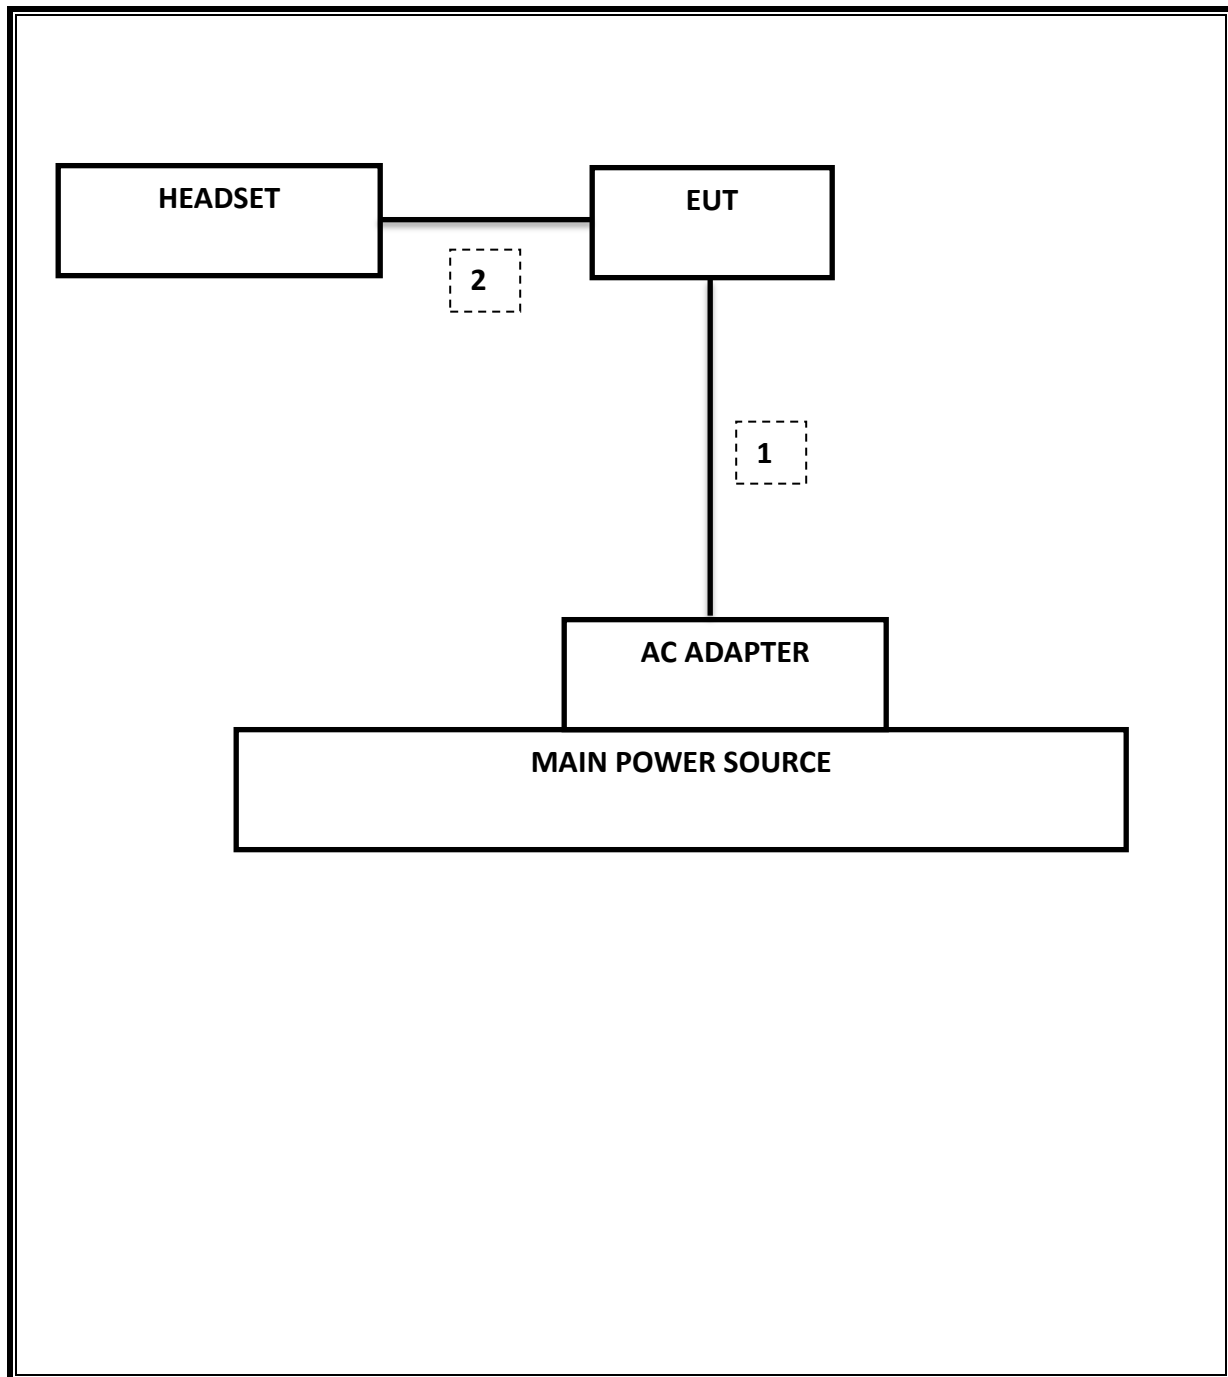

## 6. TEST AND MEASUREMENT EQUIPMENT

The following test and measurement equipment was utilized for the tests documented in this report:

| Test Equipment List                |                |                        |         |          |
|------------------------------------|----------------|------------------------|---------|----------|
| Description                        | Manufacturer   | Model                  | Asset   | Cal Due  |
| Spectrum Analyzer, 44 GHz          | Agilent / HP   | E4446A                 | C01069  | 12/20/15 |
| Spectrum Analyzer, 9KHz-40GHz      | HP             | 8564E                  | C00986  | 04/01/15 |
| EMI Test Receiver, 9 kHz-7 GHz     | R & S          | ESCI 7                 | 100773  | 08/15/15 |
| Peak Power Meter                   | Agilent / HP   | E4416A                 | C00963  | 12/13/15 |
| Peak / Average Power Sensor        | Agilent / HP   | E9327A                 | C00964  | 12/13/15 |
| Antenna, Horn, 18GHz               | EMCO           | 3115                   | C00783  | 10/25/15 |
| Antenna, Horn, 18- 26 GHz          | ARA            | MWH-1826/B             | C00946  | 11/12/15 |
| Antenna, Horn, 26-40 GHz           | ARA            | MWH-2640               | C00891  | 06/28/15 |
| Antenna, Bilog, 30MHz-1 GHz        | Sunol Sciences | JB1                    | T243    | 12/08/15 |
| RF Preamplifier, 100KHz -> 1300MHz | HP             | TBD                    | C00825  | 06/01/15 |
| RF Preamplifier, 1GHz - 18GHz      | Miteq          | NSP4000-SP2            | 924343  | 09/03/15 |
| RF Preamplifier, 1GHz - 26.5GHz    | HP             | 8449B                  | F00351  | 06/27/15 |
| AC Power Supply, 2,500VA 45-500Hz  | Elgar-Ametek   | CW2501M                | F00013  | CNR      |
| RF Preamplifier, 1GHz - 18GHz      | Miteq          | AFS42-00101800-25-S-42 | 1818466 | 05/09/15 |
| Attenuator / Switch driver         | HP             | 11713A                 | F00204  | CNR      |
| Low Pass Filter 3GHz               | Micro-Tronics  | LPS17541               | F00219  | 05/23/15 |
| High Pass Filter 5GHz              | Micro-Tronics  | HPS17542               | F00222  | 05/22/15 |
| High Pass Filter 6GHz              | Micro-Tronics  | HPM17543               | F00224  | 05/22/15 |

| Test Software List    |              |        |                          |
|-----------------------|--------------|--------|--------------------------|
| Description           | Manufacturer | Model  | Version                  |
| Radiated Software     | UL           | UL EMC | Version 9.5, 07/22/14    |
| Conducted Software    | UL           | UL EMC | Version 9.5, 05/17/14    |
| CLT Software          | UL           | UL RF  | Version 1.0, 02/02/15    |
| Antenna Port Software | UL           | UL RF  | Version 2.1.1.1, 1/20/15 |

## 7. SUMMARY

| FCC Part Section   | RSS Section(s)                       | Test Description                        | Test Limit | Test Condition | Test Result | Worst Case    |
|--------------------|--------------------------------------|---|------------|----------------|-------------|---------------|
| 15.247 (a)(2)      | RSS-210 A8.2(a)                      | Occupied Band width (6dB)               | >500KHz    | Conducted      | Pass        | 0.729 MHz     |
| 2.1051, 15.247 (d) | RSS-210 A8.5                         | Band Edge / Conducted Spurious Emission | -20dBc     |                | Pass        | -53.3 dBm     |
| 15.247             | RSS-210 A8.4                         | TX conducted output power               | <30dBm     |                | Pass        | 6.4 dBm       |
| 15.247             | RSS-210 A8.2                         | PSD                                     | <8dBm      |                | Pass        | -7.9 dBm      |
| 15.207 (a)         | RSS-GEN 7.2.2                        | AC Power Line conducted emissions       | Section 10 | Radiated       | Pass        | 33.8 dBuV(AV) |
| 15.205, 15.209     | RSS-210 Clause 2.6, RSS-210 Clause 6 | Radiated Spurious Emission              | < 54dBuV/m |                | Pass        | 32.08 dBuV/m  |

## **8. ANTENNA PORT TEST RESULTS**

### **8.1. 6 dB BANDWIDTH**

#### **LIMITS**

FCC §15.247 (a) (2)

The minimum 6 dB bandwidth shall be at least 500 kHz.

#### **TEST PROCEDURE**

The transmitter output is connected to a spectrum analyzer. The RBW is set to 100 kHz and the VBW is set to 300 kHz. The sweep time is coupled.

#### **RESULTS**

Please refer to BLE test report of FCC ID: PY7-PM0793.

## **8.2. 99% BANDWIDTH**

### **LIMITS**

None; for reporting purposes only.

### **TEST PROCEDURE**

Reference to KDB558074 D01 DTS Meas Guidance v03r01: The transmitter output is connected to the spectrum analyzer. The RBW is set to 1% to 3% of the 99 % bandwidth and to 1% of the span. The VBW is set to 3 times the RBW. The sweep time is coupled. The spectrum analyzer internal 99% bandwidth function is utilized.

### **RESULTS**

Please refer to BLE test report of FCC ID: PY7-PM0793.

### **8.3. OUTPUT POWER**

#### **LIMITS**

FCC §15.247 (b)

The maximum antenna gain is less than or equal to 6 dBi, therefore the limit is 30 dBm.

#### **TEST PROCEDURE**

Peak power is measured using KDB558074 D01 DTS Meas Guidance v03r01 April 9, 2013 under section 9.1.1 utilizing spectrum analyzer.

#### **RESULTS**

Please refer to BLE test report of FCC ID: PY7-PM0793.

## **8.4. AVERAGE POWER**

### **LIMITS**

None; for reporting purposes only.

### **TEST PROCEDURE**

The transmitter output is connected to a power meter.

### **RESULTS**

Please refer to BLE test report of FCC ID: PY7-PM0793.



## **8.5. POWER SPECTRAL DENSITY**

### **LIMITS**

FCC §15.247 (e)

The power spectral density conducted from the transmitter to the antenna shall not be greater than 8 dBm in any 3 kHz band during any time interval of continuous transmission.

### **TEST PROCEDURE**

Power Spectral Density was performed utilizing the "Method PKPSD (Peak PSD)" under KDB558074 D01 DTS Meas Guidance v03r01, April 9, 2013

### **RESULTS**

Please refer to BLE test report of FCC ID: PY7-PM0793.

## **8.6. CONDUCTED SPURIOUS EMISSIONS**

### **LIMITS**

FCC §15.247 (d)

Output power was measured based on the use of a peak measurement, therefore the required attenuation is 20 dB.

### **TEST PROCEDURE**

The transmitter output is connected to a spectrum analyzer. The resolution bandwidth is set to 100 kHz. The video bandwidth is set to 300 kHz.

The spectrum from 30 MHz to 26 GHz is investigated with the transmitter set to the lowest, middle, and highest channels.

### **RESULTS**

Please refer to BLE test report of FCC ID: PY7-PM0793.

## 9. RADIATED TEST RESULTS

### 9.1. LIMITS AND PROCEDURE

#### LIMITS

FCC §15.205 and §15.209

| Frequency Range<br>(MHz) | Field Strength Limit<br>(uV/m) at 3 m | Field Strength Limit<br>(dBuV/m) at 3 m |
|--------------------------|---------------------------------------|---|
| 30 - 88                  | 100                                   | 40                                      |
| 88 - 216                 | 150                                   | 43.5                                    |
| 216 - 960                | 200                                   | 46                                      |
| Above 960                | 500                                   | 54                                      |

#### TEST PROCEDURE

The EUT is placed on a non-conducting table 80 cm above the ground plane. The antenna to EUT distance is 3 meters. The EUT is configured in accordance with ANSI C63.4 - 2009. The EUT is set to transmit in a continuous mode.

For measurements below 1 GHz the resolution bandwidth is set to 100 kHz for peak detection measurements or 120 kHz for quasi-peak detection measurements. Peak detection is used unless otherwise noted as quasi-peak.

For measurements above 1 GHz the resolution bandwidth is set to 1 MHz, then the video bandwidth is set to 1 MHz for peak measurements and add duty cycle factor for average measurements. Duty cycle factor =  $10 \log (1/x)$ . For this sample:  $DCF = 10 \log(1/0.617) = 2.09 \text{ dB}$   
(Spectrum Analyzer round it up to 2.1 dB)

The spectrum from 30 MHz to 26 GHz is investigated with the transmitter set to the lowest, middle, and highest channels in the 2.4 GHz band.

The spectrum from 30 MHz to 40 GHz is investigated with the transmitter set to the lowest, middle, and highest channels in each applicable band.

The frequency range of interest is monitored at a fixed antenna height and EUT azimuth. The EUT is rotated through 360 degrees to maximize emissions received. The antenna is scanned from 1 to 4 meters above the ground plane to further maximize the emission. Measurements are made with the antenna polarized in both the vertical and the horizontal positions.

## **9.2. TRANSMITTER ABOVE 1 GHz**

Please refer to BLE test report of FCC ID: PY7-PM0793.

## **9.3. WORST-CASE BELOW 1 GHz**

Please refer to BLE test report of FCC ID: PY7-PM0793.

## 10. AC POWER LINE CONDUCTED EMISSIONS

### LIMITS

FCC §15.207 (a)

| Frequency of Emission (MHz) | Conducted Limit (dBuV) |                       |
|-----------------------------|------------------------|-----------------------|
|                             | Quasi-peak             | Average               |
| 0.15-0.5                    | 66 to 56 <sup>*</sup>  | 56 to 46 <sup>*</sup> |
| 0.5-5                       | 56                     | 46                    |
| 5-30                        | 60                     | 50                    |

<sup>\*</sup> Decreases with the logarithm of the frequency.

### TEST PROCEDURE

ANSI C63.4 - 2009

### RESULTS

Please refer to BLE test report of FCC ID: PY7-PM0793.