



FCC LISTED, REGISTRATION
NUMBER: 2764.01

ISED LISTED REGISTRATION
NUMBER: 23595-1

Test report No:
4288ERM.005A4

Test report

USA FCC Part 15.247

CANADA RSS-247, RSS-Gen

Radio Frequency Devices. Operation within the bands 902 - 928 MHz, 2400 - 2483.5 MHz, and 5725 - 5850 MHz

Digital Transmission Systems (DTSS), Frequency Hopping Systems (FHSs) and License-Exempt Local Area Network (LE-LAN) Devices.

(*) Identification of item tested	A04811
(*) Trademark	GARMIN
(*) Model and /or type reference tested	zumo R1 Radar; A04811
Other identification of the product	FCC ID: IPH-04811 IC: 1792A-04811
(*) Features	2.4 GHz
Manufacturer	Garmin International Inc. 1200 ast 151st street, Olathe, KS 66062, USA
Test method requested, standard	USA FCC Part 15.247, 6-1-20 Edition: Operation within the bands 902 - 928 MHz, 2400 -2483.5 MHz, and 5725 - 5850 MHz CANADA RSS-247 Issue 3 (August 2023). CANADA RSS-Gen Issue 5 (March 2019). Guidance for Compliance Measurements on Digital Transmission Systems, Frequency Hopping Spread Spectrum System, and Hybrid System Devices Operating Under section §15.247 of the FCC Rules 558074 D01 15.247 Meas. Guidance v05r02 (April 2019). ANSI C63.10-2013: American National Standard for Testing Unlicensed Wireless Devices.
Summary	IN COMPLIANCE
Approved by (name / position & signature)	Domingo Galvez EMC&RF Lab Manager
Date of issue	07-18-2024
Report template No	FDT08_23 (*) "Data provided by the client"

Index

Competences and guarantees..... 3

General conditions 3

Uncertainty 3

Data provided by the client 4

Usage of samples 4

Test sample description 5

Identification of the client 6

Testing period and place..... 6

Document history 7

Environmental conditions 7

Remarks and comments 7

Testing verdicts 8

Summary..... 8

List of equipment used during the test..... 9

Appendix A: Test results (Bluetooth Low Energy) 10

Competences and guarantees

DEKRA Certification Inc. is a testing laboratory accredited by A2LA (The American Association for Laboratory Accreditation), to perform the tests indicated in the Certificate 2764.01

DEKRA Certification Inc. is a testing laboratory competent to carry out the tests described in this report.

In order to assure the traceability to other national and international laboratories, DEKRA Certification Inc. has a calibration and maintenance program for its measurement equipment.

DEKRA Certification Inc. guarantees the reliability of the data presented in this report, which is the result of the measurements and the tests performed to the item under test on the date and under the conditions stated on the report and, it is based on the knowledge and technical facilities available at DEKRA Certification at the time of performance of the test.

DEKRA Certification Inc. is liable to the client for the maintenance of the confidentiality of all information related to the item under test and the results of the test.

The results presented in this Test Report apply only to the particular item under test established in this document.

IMPORTANT: No parts of this report may be reproduced or quoted out of context, in any form or by any means, except in full, without the previous written permission of DEKRA Certification Inc.

General conditions

1. This report is only referred to the item that has undergone the test.
2. This report does not constitute or imply on its own an approval of the product by the Certification Bodies or competent Authorities.
3. This document is only valid if complete; no partial reproduction can be made without previous written permission of DEKRA Certification Inc.
4. This test report cannot be used partially or in full for publicity and/or promotional purposes without previous written permission of DEKRA Certification Inc. and the Accreditation Bodies.

Uncertainty

Uncertainty (factor $k=2$) was calculated according to the DEKRA Certification internal document PODT000.

Test case	Frequency (MHz)	U ($k=2$)	Units
RF Power and PSD	2402-2483	0.88	dB
Occupied Bandwidth		1.87	%
Dwell Time		0.01	%
Band Edge		0.64	dB
Radiated Spurious Emission	30-180	4.27	dB
	180-1000	3.14	dB
	1000-18000	3.30	dB
	18000-40000	3.49	dB

Data provided by the client

The sample consist of lower power transmitter.

DEKRA declines any responsibility with respect to the information provided by the client and that may affect the validity of results.

Usage of samples

Samples used for test have been selected by: The client.

Sample S/01 is composed of the following elements:

Control N°	Description	Model	Serial N°	Date of reception
4288/09	CableAssy, Sensor, Power, Batman (Conducted)	--	--	12/07/2023

Sample S/01 is composed of the following accessories:

Control N°	Description	Model	Serial N°	Date of reception
4288/05	USB-Serial to Serial	--	--	12/07/2023
4288/17	Factory Cable	--	--	12/07/2023
4288/20	Garmin interposer USB board	--	--	12/07/2023

1. Sample S/01 was used for the following test(s): All conducted tests indicated in appendix A.

Sample S/02 is composed of the following elements:

Control N°	Description	Model	Serial N°	Date of reception
4288/06	CableAssy, Sensor, Power, Batman (Radiated)	--	--	12/07/2023

Sample S/02 is composed of the following accessories:

Control N°	Description	Model	Serial N°	Date of reception
4288/05	USB-Serial to Serial	--	--	12/07/2023
4288/17	Factory Cable	--	--	12/07/2023
4288/20	Garmin interposer USB board	--	--	12/07/2023

2. Sample S/02 was used for the following test(s): All Radiated tests indicated in appendix A.

Test sample description

Test Sample description (compulsory information for EMC and RF testing services)

Ports..... :	Port name and description		Cable					
			Specified length [m]	Attached during test	Shielded			
	No Data Provided			☐	☐			
				☐	☐			
				☐	☐			
				☐	☐			
				☐	☐			
				☐	☐			
Supplementary information to the ports..... :		No Data Provided						
Rated power supply	Voltage and Frequency		Reference poles					
			L1	L2	L3	N	PE	
	☐	AC:	☐	☐	☐	☐	☐	
	☐	AC:	☐	☐	☐	☐	☐	
	☒	DC:						
	☐	DC:						
Rated Power		10-30vdc @ .5A						
Clock frequencies..... :		No Data Provided						
Other parameters..... :		No Data Provided						
Software version		0.33						
Hardware version..... :		3						
Dimensions in cm (W x H x D)		No Data Provided						
Mounting position..... :	☐	Tabletop equipment						
	☐	Wall/Ceiling mounted equipment						
	☐	Floor standing equipment						
	☐	Hand-held equipment						
	☒	Other: rear of motorcycle						
Modules/parts	Module/parts of test item		Type			Manufacturer		
	rear sensor					GARMIN		
	handle bar mounted indicator lights					GARMIN		

Accessories (not part of the test item) :	Description	Type	Manufacturer
Documents as provided by the applicant..... :	Description	File name	Issue date
	Declaration Equipment Data	FDT30_18 Declaration Equipment Data	1/10/2024
Copy of marking plate:			
			

Identification of the client

Garmin International Inc.
1200 ast 151st street,
Olathe, KS 66062,
USA

Testing period and place

Test Location	DEKRA Certification Inc.
Date (start)	12-11-2023
Date (finish)	02-02-2024

Document history

Report number	Date	Description
4288ERM.005	03-29-2024	First release
4288ERM.005A1	05-03-2024	Second release. All document, the Standard FCC Part 15.207, 15.209 are removed from cover page Page 1, The product name has been changed; the applicant's information has been changed, the feature was updated; Page 19, The antenna brand & model has been added. This modification of test report cancels and replaces the test report 4288ERM.005
4288ERM.005A2	05-28-2024	Third release. Page1. It was updated the Model and /or type reference. This modification of test report cancels and replaces the test report 4288ERM.005A1
4288ERM.005A3	07-11-2024	Third release. The duty cycle information is updated in the maximum peak conducted output power test case. This modification of test report cancels and replaces the test report 4288ERM.005A2
4288ERM.005A4	07-18-2024	Fourth release. The identification of item tested, and model or type reference is updated. This modification of test report cancels and replaces the test report 4288ERM.005A3

Environmental conditions

In the control chamber, the following limits were not exceeded during the test:

Temperature	Min. = 15 °C Max. = 35 °C
Relative humidity	Min. = 30 % Max. = 75 %
Air pressure	Min. = 860mbar Max. = 1060mbar

In the semi anechoic chamber, the following limits were not exceeded during the test.

Temperature	Min. = 15 °C Max. = 35 °C
Relative humidity	Min. = 30 % Max. = 75 %
Air pressure	Min. = 860mbar Max. = 1060mbar

In the chamber for conducted measurements, the following limits were not exceeded during the test:

Temperature	Min. = 15 °C Max. = 35 °C
Relative humidity	Min. = 30 % Max. = 75 %
Air pressure	Min. = 860mbar Max. = 1060mbar

Remarks and comments

The tests have been performed by the technical personnel: Ivy Yousuf Moutushi, Yuqi Wang and Koji Nishimoto.

Testing verdicts

Fail	F
Inconclusive	I
Not applicable	N/A
Not measured	N/M
Pass	P
Partial Passed	P*

Summary

FCC PART 15 PARAGRAPH (Bluetooth LE)					
Section	15.247 Spec Clause	RSS Spec Clause	Test Description	Verdict	Remark
A.1	§ 2.1049	RSS-Gen 6.7	99% Occupied Bandwidth & 6dB Bandwidth	P	N/A
A.2	§15.247 (a) (2)	RSS-247 5.2 (a)	6dB Bandwidth		
A.3	§ 15.247 (b)	RSS-247 5.4 (d)	Maximum Peak Conducted Output Power	P	N/A
A.4	§ 15.247 (d)	RSS-247 5.5	Band-edge conducted emissions compliance (Transmitter)	P	N/A
A.5	§ 15.247 (e)	RSS-247 5.2 (b)	Power Spectral Density	P	N/A
A.6	§15.247 (d)	RSS-247 5.5	Emission limitations Radiated (Transmitter)	P	N/A
<u>Supplementary information and remarks:</u> N/A.					

List of equipment used during the test

Conducted Measurements

CONTROL NUMBER	DESCRIPTION	MANUFACTURER	MODEL	LAST CALIBRATION	NEXT CALIBRATION
1038	TS8997 Test System	Rohde & Schwarz	TS8997	N/A	N/A
1107	Ethernet SNMP Thermometer	HW Group	HWg-STE Plain	2022-10-18	2024-10-18
1313	Wireless measurement software R&S WMS32	Rohde & Schwarz	N/A	N/A	N/A

Radiated Measurements

CONTROL NUMBER	DESCRIPTION	MANUFACTURER	MODEL	LAST CALIBRATION	NEXT CALIBRATION
1012	EMI Test Receiver	Rohde & Schwarz	ESR 26	2023-01-18	2025-01-18
1014	Spectrum analyzer	Rohde & Schwarz	FSV40	2022-08-01	2024-08-01
1056	Double-ridge Waveguide Horn antenna 18-40 GHz	ETS LINDGREN	3116C	2023-02-23	2026-02-23
1057	Double-ridge Waveguide Horn antenna 1-18 GHz	ETS LINDGREN	3115	2023-07-18	2026-07-18
1064	BiconicalLog antenna	ETS LINDGREN	3142E	2021-12-13	2024-12-13
1111	Ethernet SNMP Thermometer	HW GROUP	HWg-STE Plain	2022-10-18	2024-10-18
1179	Semi anechoic Absorber Lined Chamber	Frankonia	SAC 3 plus "L"	N/A	N/A
1314	Wireless measurement software R&S WMS32	Rohde & Schwarz	N/A	N/A	N/A
1461	Low Noise Preamplifier	Bonn Elektronik	BLMA0118-4A	2022-06-01	2024-06-01

Appendix A: Test results (Bluetooth Low Energy)

Appendix A Content

PRODUCT INFORMATION 12

DESCRIPTION OF TEST CONDITIONS 12

TEST A.1: 99% OCCUPIED BANDWIDTH 13

TEST A.2: 6DB BANDWIDTH..... 18

TEST A.3: MAXIMUM PEAK CONDUCTED OUTPUT POWER AND ANTENNA GAIN..... 23

TEST A.4: BAND-EDGE EMISSIONS COMPLIANCE (TRANSMITTER)..... 30

TEST A.5: POWER SPECTRAL DENSITY 35

TEST A.6: EMISSION LIMITATIONS RADIATED (TRANSMITTER)..... 40

Product information

The following information is provided by the client

Information	Description
Modulation	Other forms of modulation
Adaptive	Non-adaptive equipment
Operation mode	
- Operating Frequency Range	2400 – 2480 MHz
- Nominal Channel Bandwidth	1,2 MHz
- RF Output Power	6dBm
Extreme operating conditions	
- Temperature range	-20 °C to +55 °C
Antenna brand & model	Garmin; A04811
Antenna type	Monopole printed on PCB
Antenna gain	0 dBi peak gain
Nominal Voltage	
- Supply Voltage	12 Vdc
- Type of power source	DC Power supply
Equipment type	Bluetooth Low Energy
Geo-location capability	No

Description of test conditions

Test conditions	Description
TC#01 ⁽¹⁾ (1 Mbps)	<u>Power supply (V):</u> $V_{\text{nominal}} = 12 \text{ V dc}$ Data Rate: 1 Mbps Bandwidth: 1 MHz <u>Test Frequencies for Conducted/ Radiated tests:</u> Lowest channel: 2402 MHz Middle channel: 2440 MHz Highest channel: 2480 MHz
TC#02 ⁽¹⁾ (2 Mbps)	<u>Power supply (V):</u> $V_{\text{nominal}} = 12 \text{ V dc}$ Data Rate: 2 Mbps Bandwidth: 2 MHz <u>Test Frequencies for Conducted/ Radiated tests:</u> Lowest channel: 2402 MHz Middle channel: 2440 MHz Highest channel: 2480 MHz

Note (1): For spurious emissions in 1 mbps and 2 mbps a preliminary scan was performed to determine the worst case. The following tables and plots show the results for the worst case in 2 mbps.


TEST A.1: 99% OCCUPIED BANDWIDTH

LIMITS:	Product standard:	§ 2.1049 and RSS-Gen
	Test standard:	§ 2.1049 and RSS-Gen 6.7

LIMITS

The occupied bandwidth shall be reported for all equipment in addition to the specified bandwidth required in the applicable RSSs

TEST SETUP

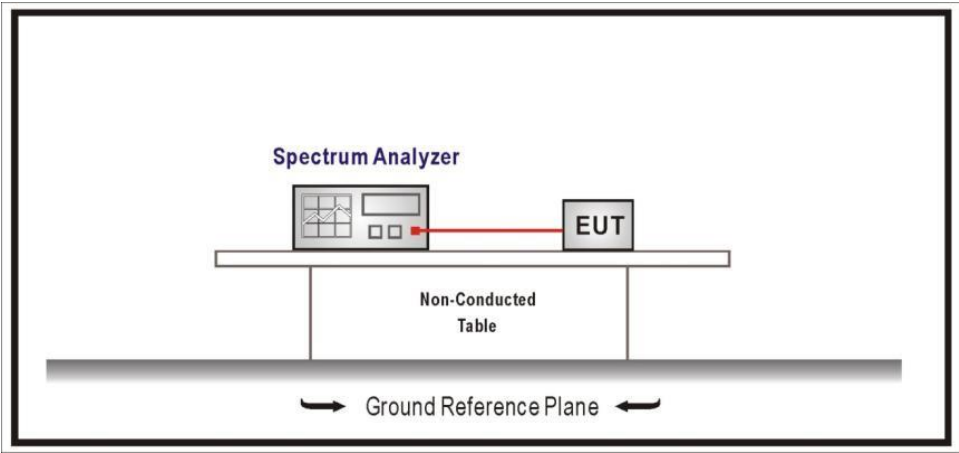


TESTED SAMPLES:	S/01
TESTED CONDITIONS MODES:	TC#01 (1 Mbps)
TEST RESULTS:	PASS


	Lowest frequency 2402 MHz	Middle frequency 2440 MHz	Highest frequency 2480 MHz
99% bandwidth (MHz)	1.06	1.06	1.06

TEST RESULTS (Cont.):


Lowest Channel

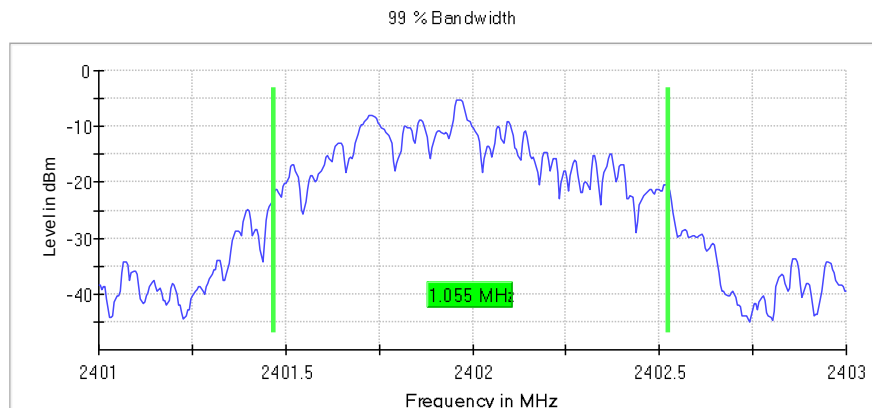

Middle Channel

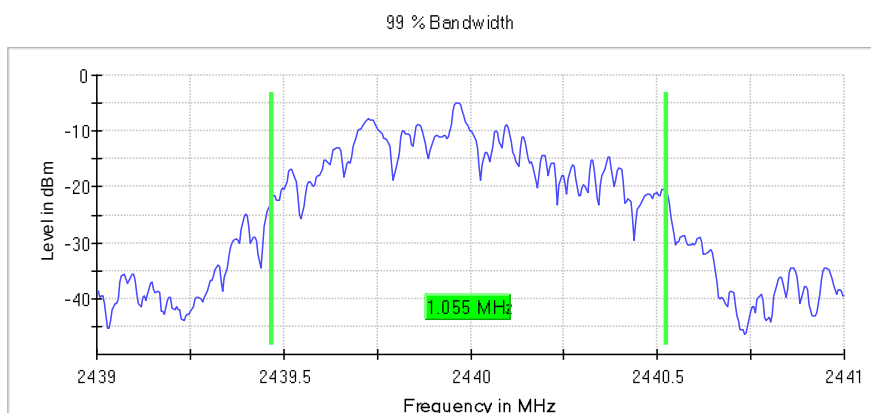

Highest Channel

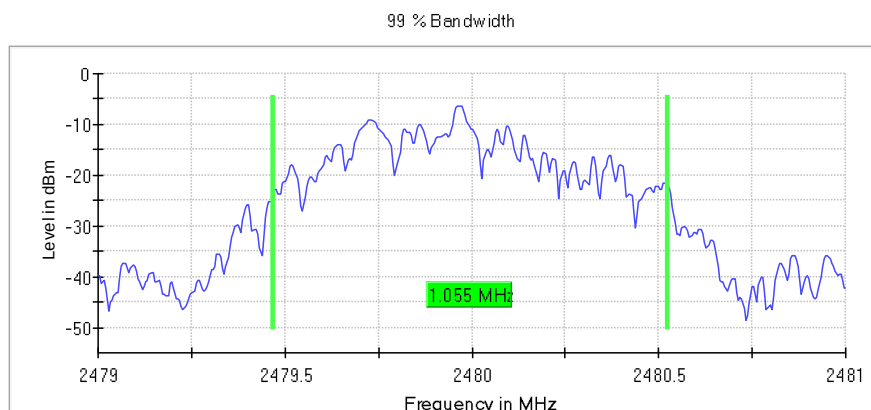

TEST RESULTS (Cont.):


Measurement

Setting	Instrument Value	Instrument Value	Instrument Value
Start Frequency	2.40100 GHz	2.43900 GHz	2.47900 GHz
Stop Frequency	2.40300 GHz	2.44100 GHz	2.48100 GHz
Span	2.000 MHz	2.000 MHz	2.000 MHz
RBW	10.000 kHz	10.000 kHz	10.000 kHz
VBW	30.000 kHz	30.000 kHz	30.000 kHz
Sweep Points	400	400	400
Sweep time	419.000 μ s	419.000 μ s	419.000 μ s
Reference Level	0.000 dBm	0.000 dBm	0.000 dBm
Attenuation	10.000 dB	10.000 dB	10.000 dB
Detector	MaxPeak	MaxPeak	MaxPeak
Sweep Count	100	100	100
Filter	3 dB	3 dB	3 dB
Trace Mode	Max Hold	Max Hold	Max Hold
Sweep type	FFT	FFT	FFT
Preamp	off	off	off
Stable mode	Trace	Trace	Trace
Stable value	0.30 dB	0.30 dB	0.30 dB
Run	5 / max. 150	6 / max. 150	6 / max. 150
Stable	3 / 3	3 / 3	3 / 3
Max Stable Difference	0.20 dB	0.19 dB	0.13 dB

TESTED SAMPLES:	S/01		
TESTED CONDITIONS MODES:	TC#02 (2 Mbps)		
TEST RESULTS:	PASS		
	Lowest frequency	Middle frequency	Highest frequency
	2402 MHz	2440 MHz	2480 MHz
99% bandwidth (MHz)	2.04	2.04	2.04

Lowest Channel


99 % Bandwidth

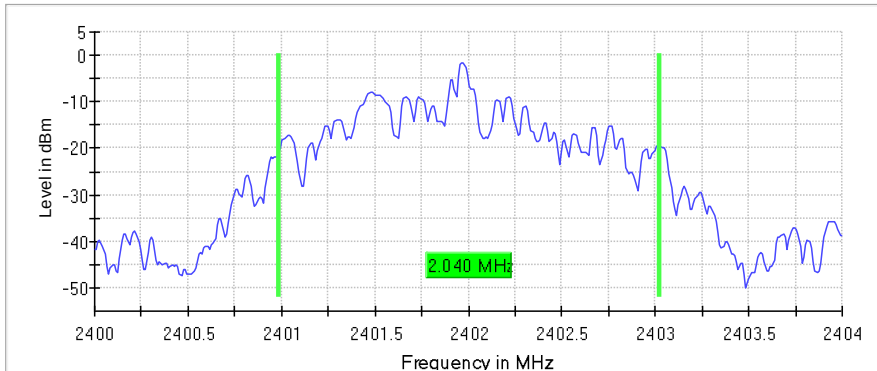

The plot shows the signal level in dBm on the y-axis (ranging from -50 to 5) against frequency in MHz on the x-axis (ranging from 2400 to 2404). A blue line represents the signal spectrum. Two vertical green lines mark the 99% bandwidth at approximately 2401.02 MHz and 2403.06 MHz. A green box in the center of the plot indicates a bandwidth of 2.040 MHz.

Middle Channel


99 % Bandwidth

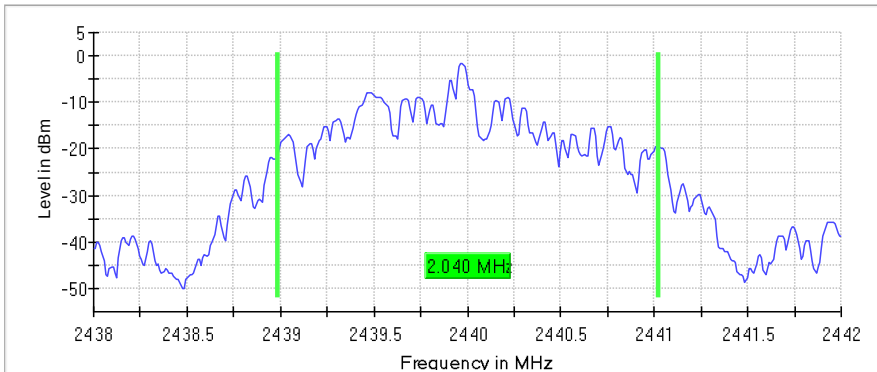

The plot shows the signal level in dBm on the y-axis (ranging from -50 to 5) against frequency in MHz on the x-axis (ranging from 2438 to 2442). A blue line represents the signal spectrum. Two vertical green lines mark the 99% bandwidth at approximately 2439.02 MHz and 2441.06 MHz. A green box in the center of the plot indicates a bandwidth of 2.040 MHz.

TEST RESULTS (Cont.):

Highest Channel

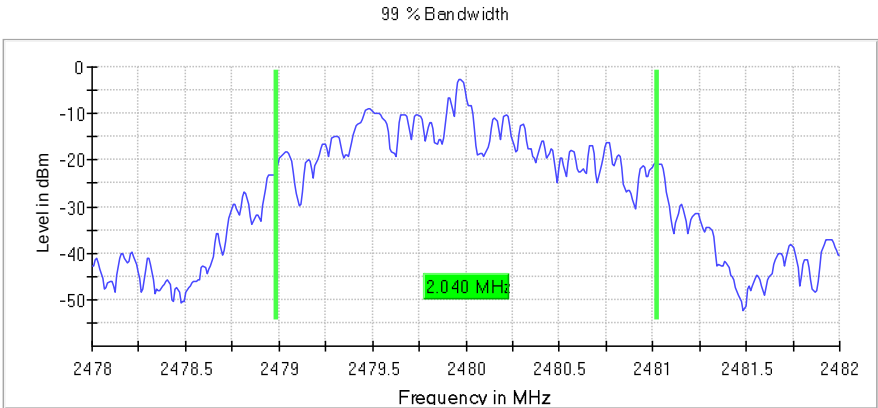

Measurement

Setting	Instrument Value	Instrument Value	Instrument Value
Start Frequency	2.40000 GHz	2.43800 GHz	2.47800 GHz
Stop Frequency	2.40400 GHz	2.44200 GHz	2.48200 GHz
Span	4.000 MHz	4.000 MHz	4.000 MHz
RBW	20.000 kHz	20.000 kHz	20.000 kHz
VBW	100.000 kHz	100.000 kHz	100.000 kHz
Sweep Points	400	400	400
Sweep time	210.000 µs	210.000 µs	210.000 µs
Reference Level	0.000 dBm	0.000 dBm	0.000 dBm
Attenuation	10.000 dB	10.000 dB	10.000 dB
Detector	MaxPeak	MaxPeak	MaxPeak
Sweep Count	100	100	100
Filter	3 dB	3 dB	3 dB
Trace Mode	Max Hold	Max Hold	Max Hold
Sweep type	FFT	FFT	FFT
Preamp	off	off	off
Stable mode	Trace	Trace	Trace
Stable value	0.30 dB	0.30 dB	0.30 dB
Run	8 / max. 150	6 / max. 150	6 / max. 150
Stable	3 / 3	3 / 3	3 / 3
Max Stable Difference	0.18 dB	0.22 dB	0.16 dB


TEST A.2: 6DB BANDWIDTH

LIMITS:	Product standard:	Part 15 Subpart C §15.247 and RSS-247
	Test standard:	Part 15 Subpart C §15.247(a)(2) and RSS-247 5.2(a)

LIMITS

Systems using digital modulation techniques may operate in the 902–928 MHz, 2400–2483.5 MHz, and 5725–5850 MHz bands. The minimum 6 dB bandwidth shall be at least 500 kHz.

TEST SETUP

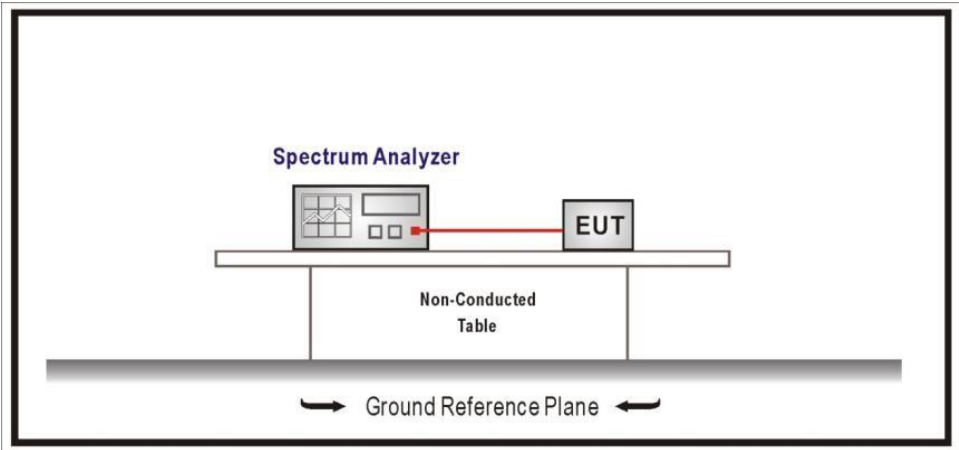


TESTED SAMPLES:	S/01
TESTED CONDITIONS MODES:	TC#01 (1 Mbps)
TEST RESULTS:	PASS


	Lowest frequency 2402 MHz	Middle frequency 2440 MHz	Highest frequency 2480 MHz
6 dB Spectrum bandwidth (kHz)	712.872	712.872	673.268

TEST RESULTS (Cont.):


Lowest Channel:

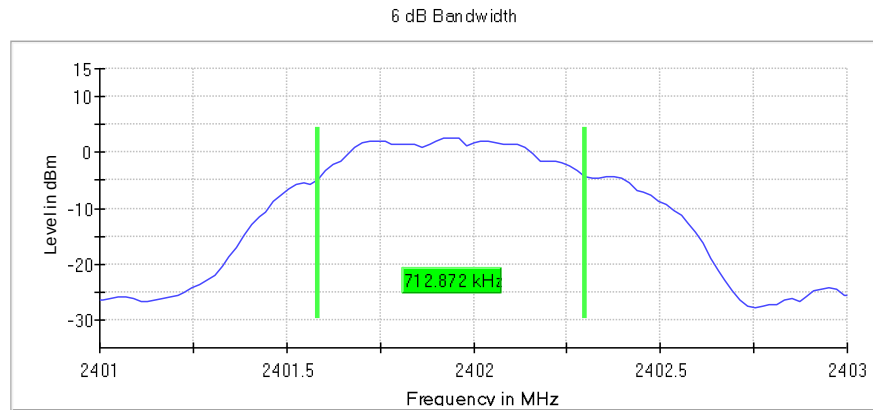

Mid Channel:

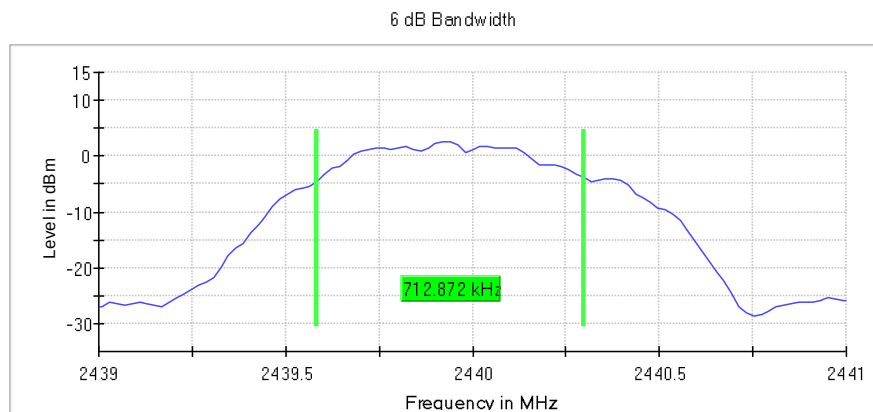

High Channel:

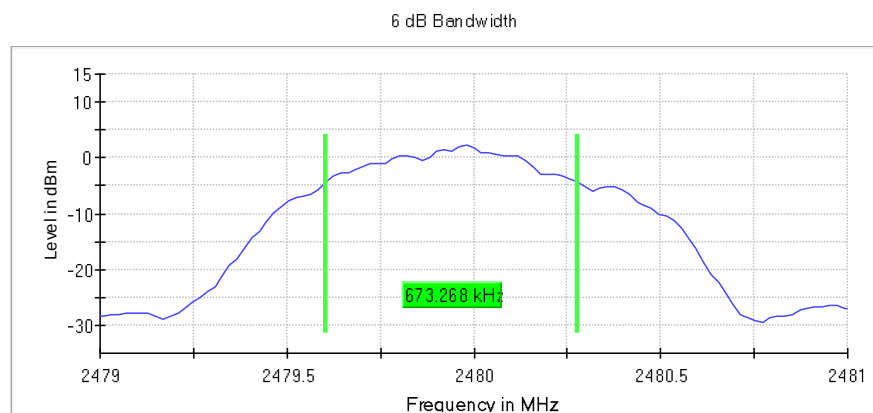


Measurement

Setting	Instrument Value	Instrument Value	Instrument Value
Start Frequency	2.40100 GHz	2.43900 GHz	2.47900 GHz
Stop Frequency	2.40300 GHz	2.44100 GHz	2.48100 GHz
Span	2.000 MHz	2.000 MHz	2.000 MHz
RBW	100.000 kHz	100.000 kHz	100.000 kHz
VBW	300.000 kHz	300.000 kHz	300.000 kHz
Sweep Points	101	101	101
Sweep time	41.830 μ s	41.830 μ s	41.830 μ s
Reference Level	0.000 dBm	0.000 dBm	0.000 dBm
Attenuation	10.000 dB	10.000 dB	10.000 dB
Detector	MaxPeak	MaxPeak	MaxPeak
Sweep Count	100	100	100
Filter	3 dB	3 dB	3 dB
Trace Mode	Max Hold	Max Hold	Max Hold
Sweep type	FFT	FFT	FFT
Preamplifier	off	off	off
Stable mode	Trace	Trace	Trace
Stable value	0.50 dB	0.50 dB	0.50 dB
Run	13 / max. 150	11 / max. 150	11 / max. 150
Stable	5 / 5	5 / 5	5 / 5
Max Stable Difference	0.40 dB	0.19 dB	0.01 dB


TESTED SAMPLES:	S/01
TESTED CONDITIONS MODES:	TC#02 (2 Mbps)
TEST RESULTS:	PASS

	Lowest frequency 2402 MHz	Middle frequency 2440 MHz	Highest frequency 2480 MHz
6 dB Spectrum bandwidth (MHz)	1.030	950.495	1.030

Lowest Channel:

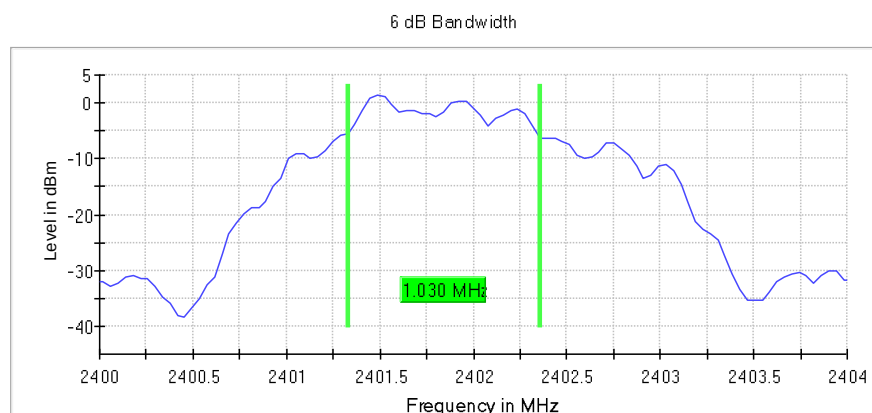


Mid Channel:

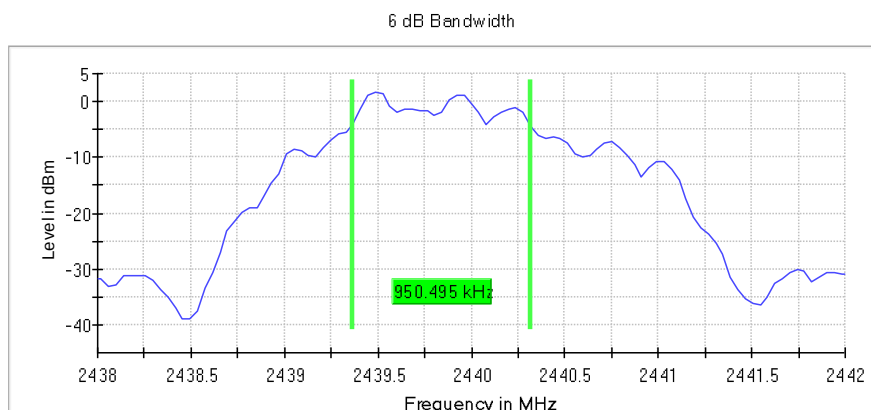

TEST RESULTS (Cont.):

High Channel:

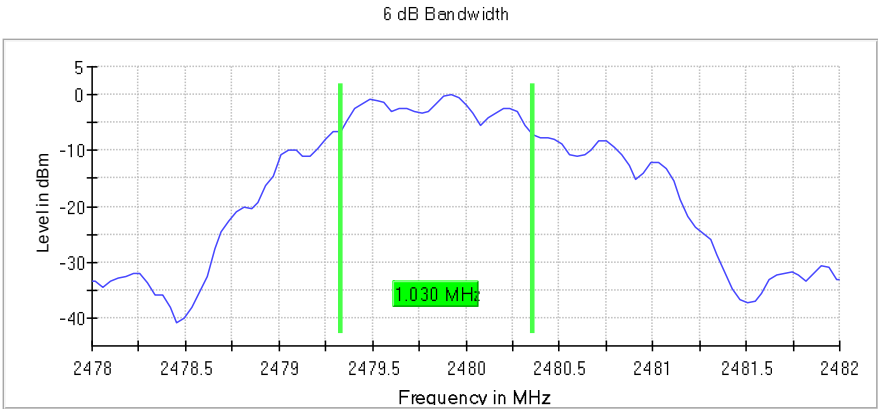

Measurement

Setting	Instrument Value	Instrument Value	Instrument Value
Start Frequency	2.40000 GHz	2.43800 GHz	2.47800 GHz
Stop Frequency	2.40400 GHz	2.44200 GHz	2.48200 GHz
Span	4.000 MHz	4.000 MHz	4.000 MHz
RBW	100.000 kHz	100.000 kHz	100.000 kHz
VBW	300.000 kHz	300.000 kHz	300.000 kHz
Sweep Points	101	101	101
Sweep time	41.830 μ s	41.830 μ s	41.830 μ s
Reference Level	0.000 dBm	0.000 dBm	0.000 dBm
Attenuation	10.000 dB	10.000 dB	10.000 dB
Detector	MaxPeak	MaxPeak	MaxPeak
Sweep Count	100	100	100
Filter	3 dB	3 dB	3 dB
Trace Mode	Max Hold	Max Hold	Max Hold
Sweep type	FFT	FFT	FFT
Preamp	off	off	off
Stable mode	Trace	Trace	Trace
Stable value	0.50 dB	0.50 dB	0.50 dB
Run	14 / max. 150	17 / max. 150	14 / max. 150
Stable	5 / 5	5 / 5	5 / 5
Max Stable Difference	0.00 dB	0.35 dB	0.17 dB

TEST A.3: MAXIMUM PEAK CONDUCTED OUTPUT POWER AND ANTENNA GAIN

LIMITS:	Product standard:	Part 15 Subpart C §15.247 and RSS-247
	Test standard:	Part 15 Subpart C §15.247(b)(3) and RSS-247 5.4(d)

LIMITS


§15.247(b)(3) and RSS-247 5.4(d): For systems using digital modulation in the 2400-2483.5 MHz band: 1 watt (30 dBm).

RSS-247 5.4(d): The e.i.r.p. shall not exceed 4 W (36 dBm)

TEST SETUP

The maximum peak conducted output power was measured using the method according to point 9.1.1. of Guidance for Performing Compliance Measurements on Digital Transmission Systems (DTS) Operating Under §15.247 558074 D01 DTS Meas Guidance v04 dated 05/04/2017.

The EIRP power (dBm) is calculated by adding the declared maximum antenna gain to the measured conducted power

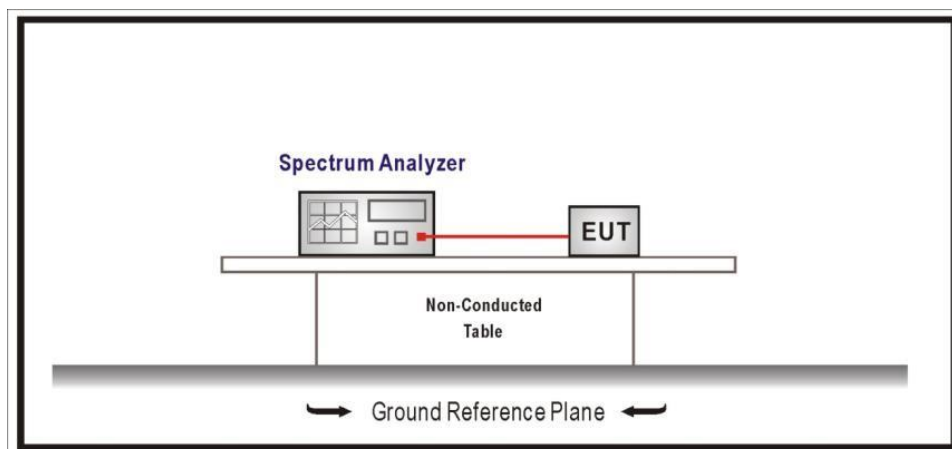


TESTED SAMPLES:	S/01
TESTED CONDITIONS MODES:	TC#01 (1 Mbps)
TEST RESULTS:	PASS

Maximum declared antenna gain: 0 dBi
The duty cycle is 100% provided by the customer

	Lowest frequency 2402 MHz	Middle frequency 2440 MHz	Highest frequency 2480 MHz
Maximum conducted power (dBm)	4.5	4.5	3.3
Maximum EIRP power (dBm)	4.5	4.5	3.3

The maximum directional gain of the antenna is less than 6 dBi and therefore the maximum output power is not required to be reduced from the stated values.


Lowest Channel

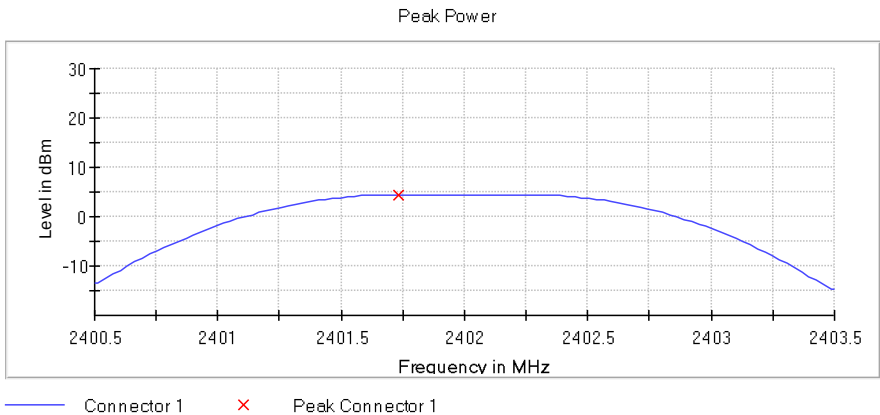


TEST RESULTS (Cont.):

CONDUCTED PEAK POWER

Middle Channel

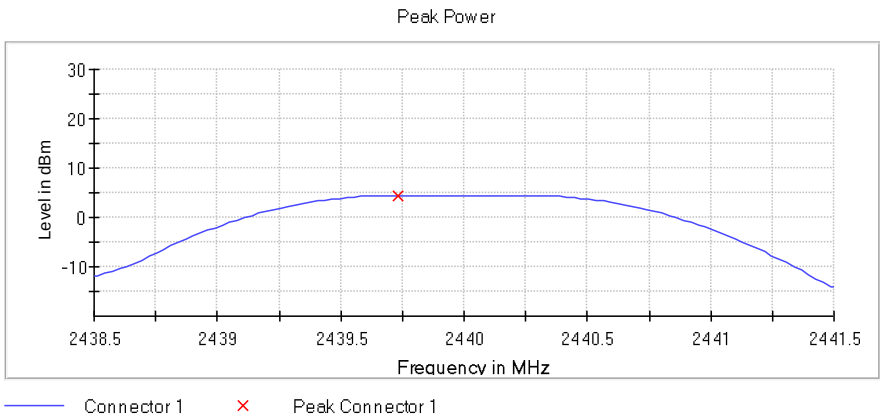

Highest Channel

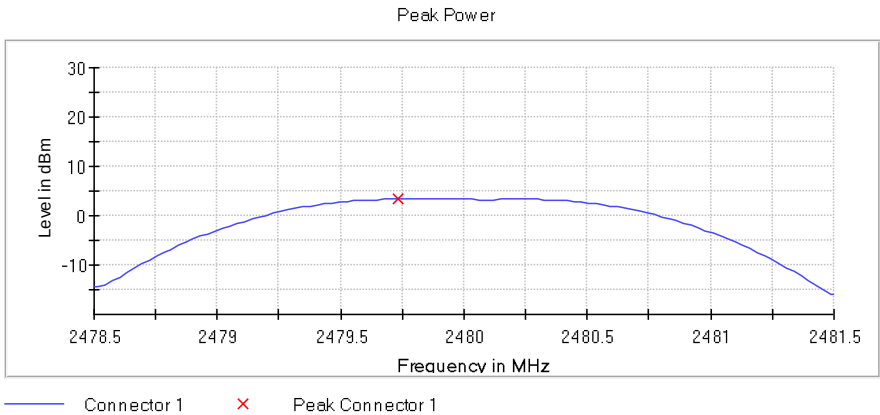

TEST RESULTS (Cont.):		CONDUCTED PEAK POWER	
Measurement			
Setting	Instrument Value	Instrument Value	Instrument Value
Start Frequency	2.40050 GHz	2.43850 GHz	2.47850 GHz
Stop Frequency	2.40350 GHz	2.44150 GHz	2.48150 GHz
Span	3.000 MHz	3.000 MHz	3.000 MHz
RBW	1.000 MHz	1.000 MHz	1.000 MHz
VBW	3.000 MHz	3.000 MHz	3.000 MHz
Sweep Points	101	101	101
Sweep time	4.210 μs	4.210 μs	4.210 μs
Reference Level	10.000 dBm	10.000 dBm	10.000 dBm
Attenuation	20.000 dB	20.000 dB	20.000 dB
Detector	MaxPeak	MaxPeak	MaxPeak
Sweep Count	100	100	100
Filter	3 dB	3 dB	3 dB
Trace Mode	Max Hold	Max Hold	Max Hold
Sweep type	FFT	FFT	FFT
Preamp	off	off	off
Stable mode	Trace	Trace	Trace
Stable value	0.50 dB	0.50 dB	0.50 dB
Run	4 / max. 150	4 / max. 150	4 / max. 150
Stable	3 / 3	3 / 3	3 / 3
Max Stable Difference	0.02 dB	0.15 dB	0.21 dB

TESTED SAMPLES:	S/01
TESTED CONDITIONS MODES:	TC#02 (2 Mbps)
TEST RESULTS:	PASS


Maximum declared antenna gain: 0 dBi

The duty cycle is 100% provided by the customer

	Lowest frequency 2402 MHz	Middle frequency 2440 MHz	Highest frequency 2480 MHz
Maximum conducted power (dBm)	4.5	4.6	3.4
Maximum EIRP power (dBm)	4.5	4.6	3.4

The maximum directional gain of the antenna is less than 6 dBi and therefore the maximum output power is not required to be reduced from the stated values.


Lowest Channel

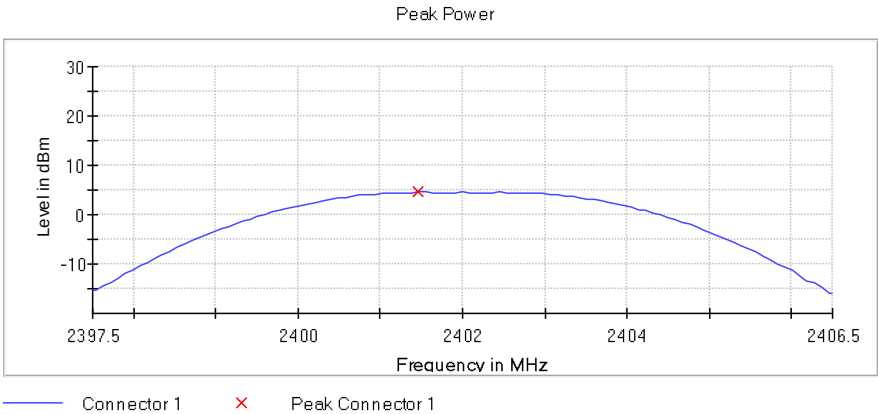


TEST RESULTS (Cont.):

CONDUCTED PEAK POWER

Middle Channel

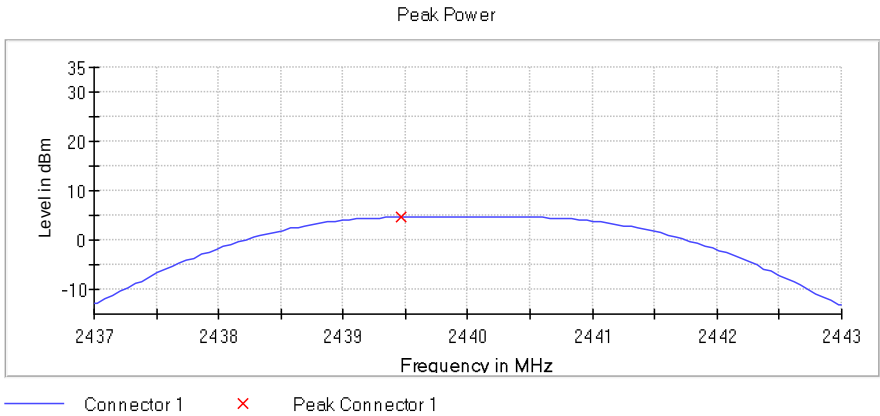

Highest Channel

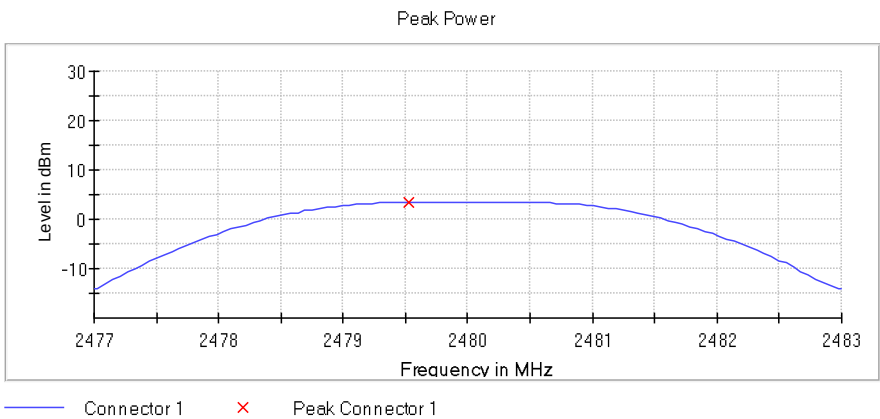

Measurement

TEST RESULTS (Cont.):		CONDUCTED PEAK POWER	
Measurement			
Setting	Instrument Value	Instrument Value	Instrument Value
Start Frequency	2.39750 GHz	2.43700 GHz	2.47700 GHz
Stop Frequency	2.40650 GHz	2.44300 GHz	2.48300 GHz
Span	9.000 MHz	6.000 MHz	6.000 MHz
RBW	3.000 MHz	2.000 MHz	2.000 MHz
VBW	10.000 MHz	10.000 MHz	10.000 MHz
Sweep Points	101	101	101
Sweep time	1.000 ms	1.000 ms	1.000 ms
Reference Level	10.000 dBm	10.000 dBm	10.000 dBm
Attenuation	20.000 dB	20.000 dB	20.000 dB
Detector	MaxPeak	MaxPeak	MaxPeak
Sweep Count	100	100	100
Filter	3 dB	3 dB	3 dB
Trace Mode	Max Hold	Max Hold	Max Hold
Sweep type	Sweep	Sweep	Sweep
Preamp	off	off	off
Stable mode	Trace	Trace	Trace
Stable value	0.50 dB	0.50 dB	0.50 dB
Run	4 / max. 150	4 / max. 150	4 / max. 150
Stable	3 / 3	3 / 3	3 / 3
Max Stable Difference	0.22 dB	0.12 dB	0.07 dB


TEST A.4: BAND-EDGE EMISSIONS COMPLIANCE (TRANSMITTER)

LIMITS:	Product standard:	Part 15 Subpart C §15.247 and RSS-247
	Test standard:	Part 15 Subpart C §15.247(d) and RSS-247 5.5

LIMITS

In any 100 kHz bandwidth outside the frequency band in which the digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power. If the transmitter complies with the conducted power limits based on the use of RMS averaging over a time interval, the attenuation required shall be 30 dB instead of 20 dB.

TEST SETUP

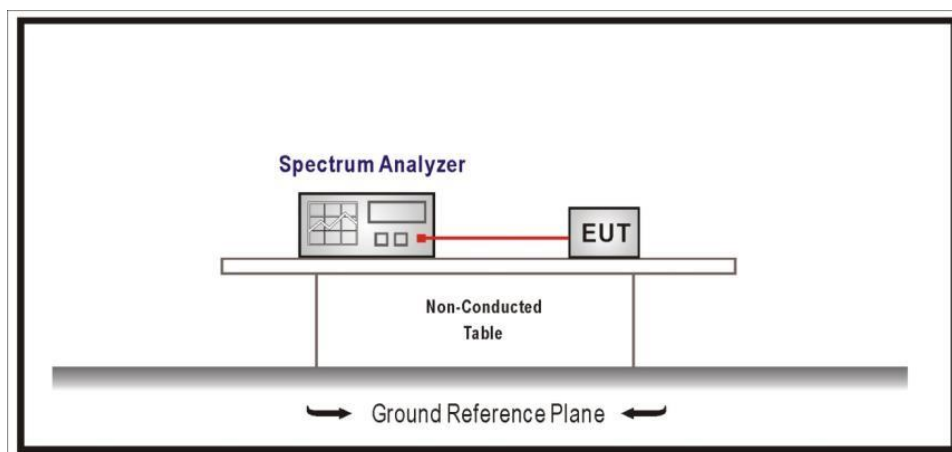


TESTED SAMPLES:	S/01
TESTED CONDITIONS MODES:	TC#01 (1 Mbps)
TEST RESULTS:	PASS

Note: Radiated measurements are also used to show compliance with the limits in the restricted bands 2.31-2.39 GHz and 2.4835-2.5 GHz.

TEST RESULTS (Cont.):

Lowest Channel

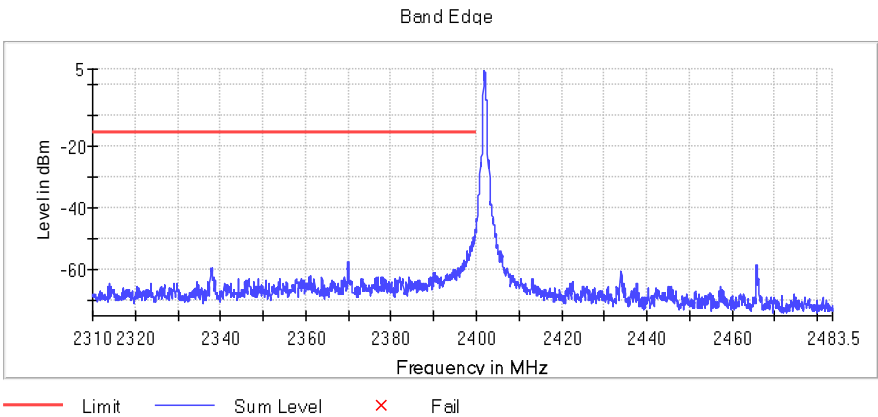


Measurement

Frequency (MHz)	Level (dBm)	Margin (dB)	Limit (dBm)	Result
2399.975000	-44.8	29.2	-15.6	PASS
2399.925000	-46.4	30.8	-15.6	PASS
2399.775000	-46.9	31.3	-15.6	PASS
2399.825000	-47.1	31.5	-15.6	PASS
2399.725000	-47.3	31.7	-15.6	PASS
2399.875000	-47.9	32.3	-15.6	PASS
2399.675000	-48.8	33.2	-15.6	PASS
2399.525000	-49.2	33.6	-15.6	PASS
2399.625000	-49.3	33.7	-15.6	PASS
2399.575000	-49.4	33.8	-15.6	PASS
2399.325000	-49.5	33.9	-15.6	PASS
2399.275000	-50.2	34.6	-15.6	PASS
2399.475000	-50.3	34.7	-15.6	PASS
2399.375000	-50.8	35.2	-15.6	PASS
2399.075000	-50.9	35.3	-15.6	PASS

TEST RESULTS (Cont.):

Highest Channel

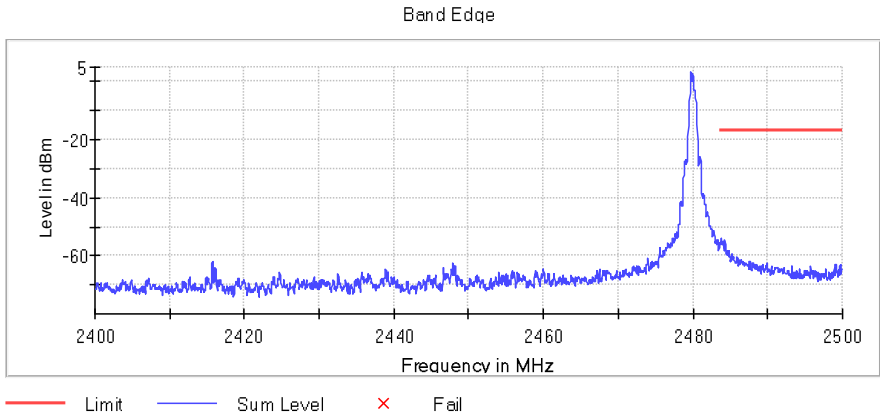

Measurement

Frequency (MHz)	Level (dBm)	Margin (dB)	Limit (dBm)	Result
2483.825000	-53.9	37.3	-16.7	PASS
2483.775000	-54.3	37.6	-16.7	PASS
2484.275000	-54.5	37.8	-16.7	PASS
2483.725000	-54.9	38.2	-16.7	PASS
2484.025000	-55.2	38.5	-16.7	PASS
2483.625000	-55.5	38.8	-16.7	PASS
2483.525000	-55.6	38.9	-16.7	PASS
2484.075000	-55.6	39.0	-16.7	PASS
2483.925000	-55.7	39.0	-16.7	PASS
2484.225000	-55.8	39.1	-16.7	PASS
2483.675000	-55.8	39.1	-16.7	PASS
2483.575000	-56.0	39.3	-16.7	PASS
2483.975000	-56.0	39.3	-16.7	PASS
2484.325000	-56.1	39.4	-16.7	PASS
2483.875000	-56.3	39.6	-16.7	PASS

TESTED SAMPLES:	S/01
TESTED CONDITIONS MODES:	TC#02 (2 Mbps)
TEST RESULTS:	PASS

Note: Radiated measurements are also used to show compliance with the limits in the restricted bands 2.31-2.39 GHz and 2.4835-2.5 GHz.

TEST RESULTS (Cont.):

Lowest Channel

Band Edge

— Limit

— Sum Level


× Fail

Measurement

Frequency (MHz)	Level (dBm)	Margin (dB)	Limit (dBm)	Result
2399.975000	-25.8	9.8	-16.0	PASS
2399.925000	-26.0	10.1	-16.0	PASS
2399.875000	-28.4	12.4	-16.0	PASS
2399.825000	-31.1	15.1	-16.0	PASS
2399.775000	-35.9	19.9	-16.0	PASS
2399.725000	-37.1	21.2	-16.0	PASS
2399.675000	-37.5	21.5	-16.0	PASS
2399.625000	-38.4	22.4	-16.0	PASS
2399.575000	-41.1	25.1	-16.0	PASS
2399.525000	-44.6	28.7	-16.0	PASS
2399.475000	-44.8	28.9	-16.0	PASS
2399.425000	-45.9	29.9	-16.0	PASS
2399.075000	-46.7	30.7	-16.0	PASS
2399.125000	-46.7	30.7	-16.0	PASS
2399.325000	-46.8	30.9	-16.0	PASS

TEST RESULTS (Cont.):

Highest Channel

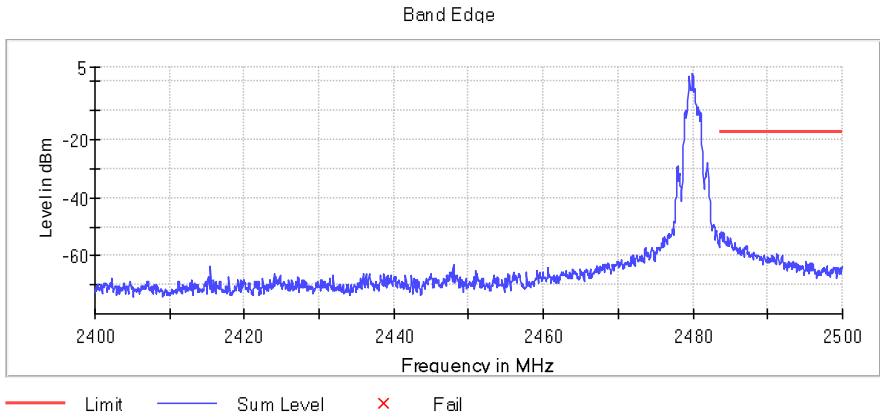

Measurement

Frequency (MHz)	Level (dBm)	Margin (dB)	Limit (dBm)	Result
2484.075000	-52.0	34.9	-17.1	PASS
2483.825000	-52.0	34.9	-17.1	PASS
2483.775000	-52.0	34.9	-17.1	PASS
2484.125000	-52.2	35.0	-17.1	PASS
2483.575000	-52.5	35.4	-17.1	PASS
2483.525000	-52.6	35.5	-17.1	PASS
2483.875000	-52.7	35.6	-17.1	PASS
2484.025000	-52.8	35.7	-17.1	PASS
2483.725000	-52.9	35.7	-17.1	PASS
2484.175000	-53.2	36.1	-17.1	PASS
2483.625000	-53.4	36.3	-17.1	PASS
2484.675000	-53.6	36.5	-17.1	PASS
2484.225000	-53.8	36.7	-17.1	PASS
2484.625000	-53.9	36.7	-17.1	PASS
2483.675000	-53.9	36.8	-17.1	PASS

TEST A.5: POWER SPECTRAL DENSITY


LIMITS:	Product standard:	Part 15 Subpart C §15.247 and RSS-247
	Test standard:	Part 15 Subpart C §15.247(e) and RSS-247 5.2 (b)

LIMITS

For digitally modulated systems, the power spectral density conducted from the intentional radiator to the antenna shall not be greater than 8 dBm in any 3 kHz band during any time interval of continuous transmission.

TEST SETUP

The maximum power spectral density level in the fundamental emission was measured using the method PKPSD (Peak PSD) according to point 10.2. of Guidance for Performing Compliance Measurements on Digital Transmission Systems (DTS) Operating Under §15.247 558074 D01 DTS Meas Guidance v04 dated 05/04/2017.

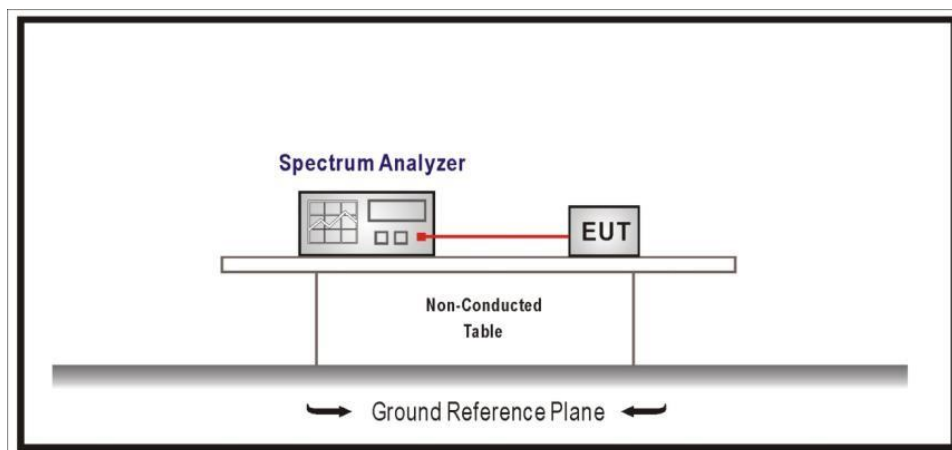


TESTED SAMPLES:	S/01
TESTED CONDITIONS MODES:	TC#01(1 Mbps)
TEST RESULTS:	PASS


	Lowest frequency 2402 MHz	Middle frequency 2440 MHz	Highest frequency 2480 MHz
Power spectral density (dBm)	-4.988	-4.884	-6.154

TEST RESULTS (Cont.):


Lowest Channel:

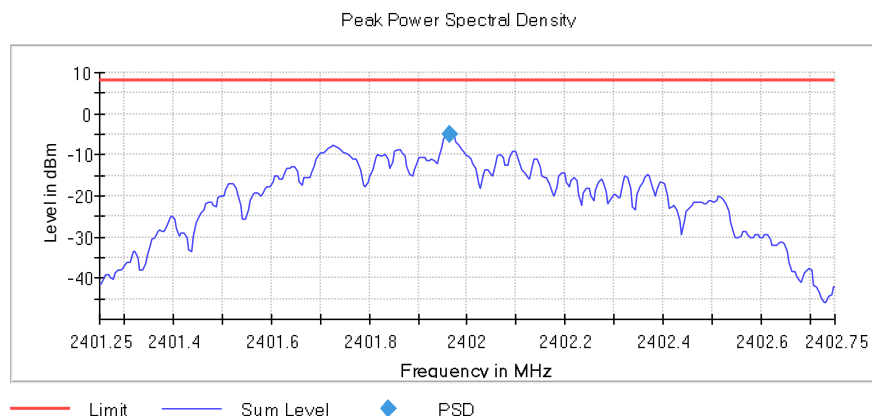

Mid Channel:

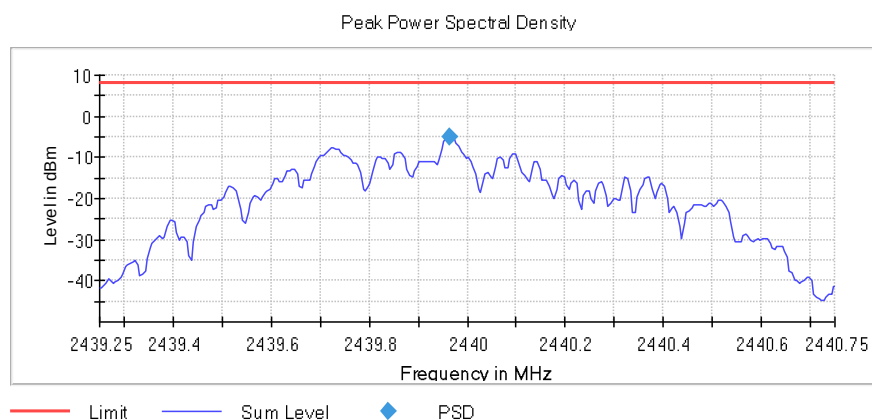

High Channel:

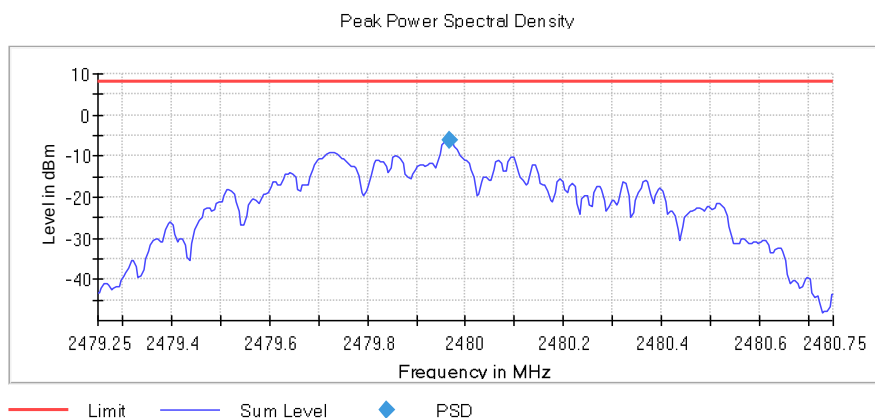

TEST RESULTS (Cont.):


Measurement

Setting	Instrument Value	Instrument Value	Instrument Value
Start Frequency	2.40125 GHz	2.43925 GHz	2.47925 GHz
Stop Frequency	2.40275 GHz	2.44075 GHz	2.48075 GHz
Span	1.500 MHz	1.500 MHz	1.500 MHz
RBW	10.000 kHz	10.000 kHz	10.000 kHz
VBW	30.000 kHz	30.000 kHz	30.000 kHz
Sweep Points	300	300	300
Sweep time	1.500 ms	1.500 ms	1.500 ms
Reference Level	0.000 dBm	0.000 dBm	0.000 dBm
Attenuation	10.000 dB	10.000 dB	10.000 dB
Detector	MaxPeak	MaxPeak	MaxPeak
Sweep Count	100	100	100
Filter	3 dB	3 dB	3 dB
Trace Mode	Max Hold	Max Hold	Max Hold
Sweep type	Sweep	Sweep	Sweep
Preamp	off	off	off
Stable mode	Trace	Trace	Trace
Stable value	0.50 dB	0.50 dB	0.50 dB
Run	4 / max. 150	4 / max. 150	7 / max. 150
Stable	2 / 2	2 / 2	2 / 2
Max Stable Difference	0.40 dB	0.23 dB	0.28 dB


TESTED SAMPLES:	S/01
TESTED CONDITIONS MODES:	TC#02 (2 Mbps)
TEST RESULTS:	PASS

	Lowest frequency 2402 MHz	Middle frequency 2440 MHz	Highest frequency 2480 MHz
Power spectral density (dBm)	-5.910	-5.808	-7.022

Lowest Channel:

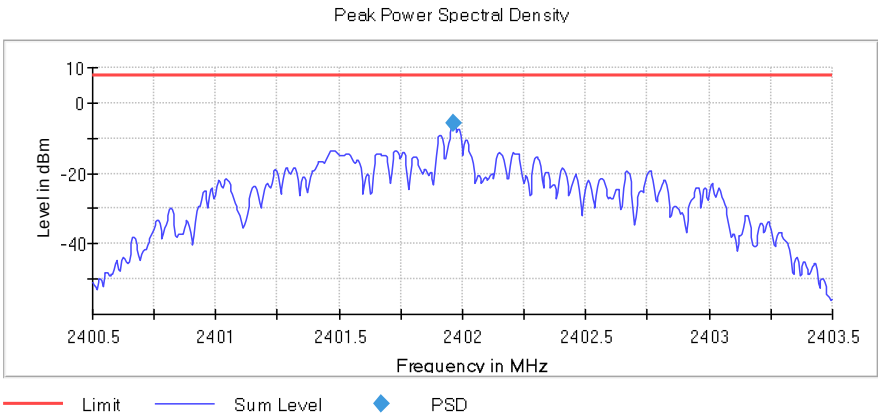


Mid Channel:

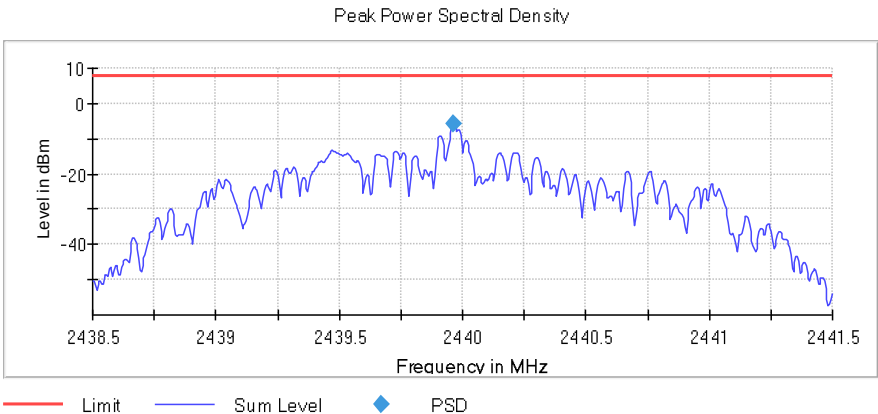

TEST RESULTS (Cont.):

High Channel:

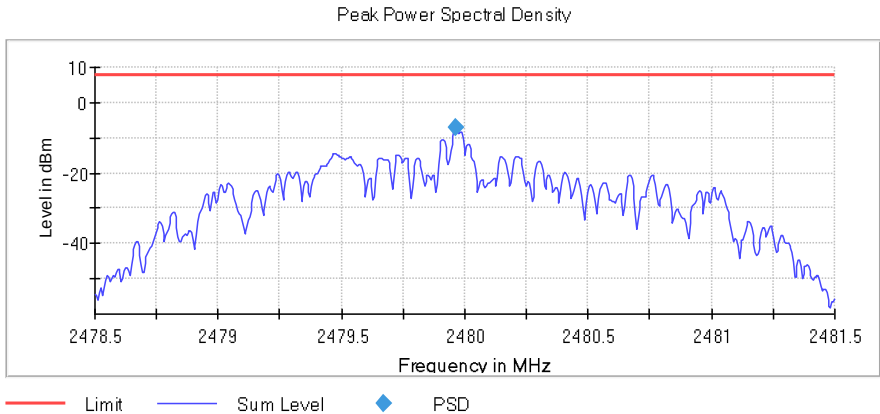

Measurement

Setting	Instrument Value	Instrument Value	Instrument Value
Start Frequency	2.40050 GHz	2.43850 GHz	2.47850 GHz
Stop Frequency	2.40350 GHz	2.44150 GHz	2.48150 GHz
Span	3.000 MHz	3.000 MHz	3.000 MHz
RBW	10.000 kHz	10.000 kHz	10.000 kHz
VBW	30.000 kHz	30.000 kHz	30.000 kHz
Sweep Points	600	600	600
Sweep time	3.000 ms	3.000 ms	3.000 ms
Reference Level	0.000 dBm	0.000 dBm	0.000 dBm
Attenuation	10.000 dB	10.000 dB	10.000 dB
Detector	MaxPeak	MaxPeak	MaxPeak
Sweep Count	100	100	100
Filter	3 dB	3 dB	3 dB
Trace Mode	Max Hold	Max Hold	Max Hold
Sweep type	Sweep	Sweep	Sweep
Preamp	off	off	off
Stable mode	Trace	Trace	Trace
Stable value	0.50 dB	0.50 dB	0.50 dB
Run	4 / max. 150	4 / max. 150	4 / max. 150
Stable	2 / 2	2 / 2	2 / 2
Max Stable Difference	0.36 dB	0.22 dB	0.14 dB

TEST A.6: EMISSION LIMITATIONS RADIATED (TRANSMITTER)

LIMITS:	Product standard:	Part 15 Subpart C §15.247 and RSS-247
	Test standard:	Part 15 Subpart C §15.247(d) and RSS-Gen 8.9 and 8.10

LIMITS

Radiated emissions which fall in the restricted bands, as defined in §15.205(a), must also comply with the radiated emission limits specified in §15.209(a) (see §15.205(c) / RSS-Gen):

Frequency Range (MHz)	Field strength (μV/m)	Field strength (dBμV/m)	Measurement distance (m)
0.009-0.490	2400/F(kHz)	-	300
0.490-1.705	24000/F(kHz)	-	30
1.705 - 30.0	30	-	30
30 - 88	100	40	3
88 - 216	150	43.5	3
216 - 960	200	46	3
960 - 25000	500	54	3

The emission limits shown in the above table are based on measurements employing CISPR quasi-peak detector except for the frequency bands 9-90 kHz, 110-490 kHz and above 1000 MHz. Radiated emission limits in these three bands are based on measurements employing an average detector.

For average radiated emission measurements above 1000 MHz, there is also a limit corresponding to 20 dB above the indicated values in the table is specified when measuring with peak detector function.

RSS-247. Attenuation below the general field strength limits specified in RSS-Gen is not required

TEST SETUP

All radiated tests were performed in a semi-anechoic chamber. The measurement antenna is situated at 3 m for the frequency range 30-1000 MHz (Bilog antenna) and 1-18 GHz Double ridge horn antennas, and 1m for the frequency range 18 GHz- 26 GHz Double ridge horn antenna.

For radiated emissions in the range 18 - 26 GHz that is performed at a distance closer than the specified distance, an inverse proportionality factor of 20 dB per decade is used to normalize the measured data for determining compliance.


The equipment under test was set up on a non-conductive platform above the ground plane and the situation and orientation was varied to find the maximum radiated emission. It was also rotated 360° and the antenna height was varied from 1 to 4 meters to find the maximum radiated emission.

Measurements were made in both horizontal and vertical planes of polarization.


The field strength is calculated by adding correction factor to the measured level from the spectrum analyzer. This correction factor includes antenna factor, cable loss and pre-amplifiers gain.

TEST SETUP (CONT.)


Radiated measurements Setup $f < 1$ GHz

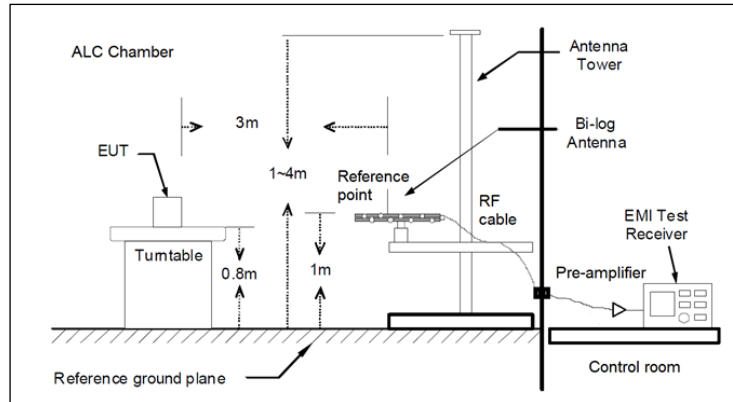

Radiated measurements setup $f > 1-18$ GHz

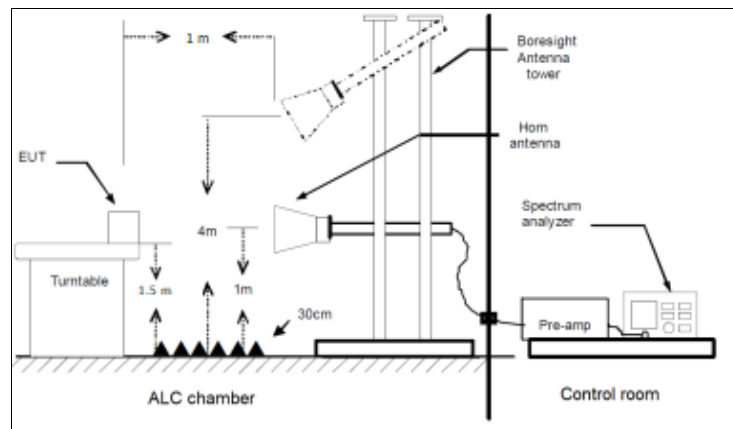

Radiated measurements setup $f > 18$ GHz

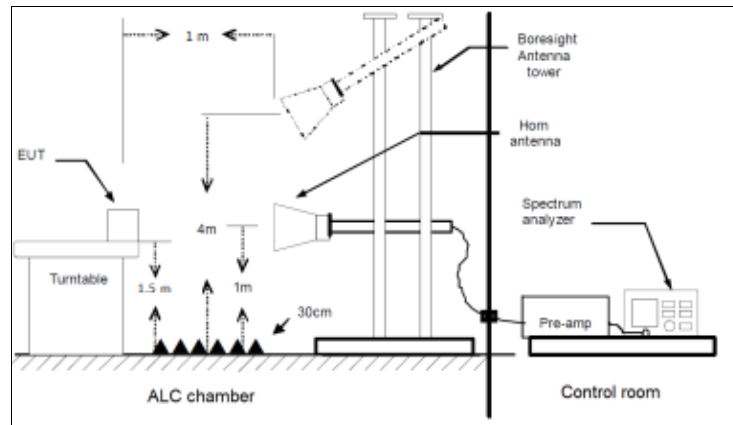


TESTED SAMPLES:	S/02
TESTED CONDITIONS MODES:	TC#01 (2 Mbps)
TEST RESULTS:	PASS
The results for the worst operation mode selected for this range (2 mbps) are shown below. Frequency range 30 MHz – 1000 MHz The spurious emissions below 1 GHz do not depend on the operating channel selected in the EUT. Frequency range 1 GHz – 26 GHz The results in the next tables show the maximum measured levels in the 1-26 GHz range including the restricted bands 2.31-2.39 GHz and 2.4835-2.5 GHz (see next plots). Please see the following results for worst operation mode selected for this range (2 Mbps).	

TEST RESULTS (Cont.):

30-1000 MHz

Lowest Channel

RF_FCC_15.247_E Field_30MHz_1GHz_SAC2

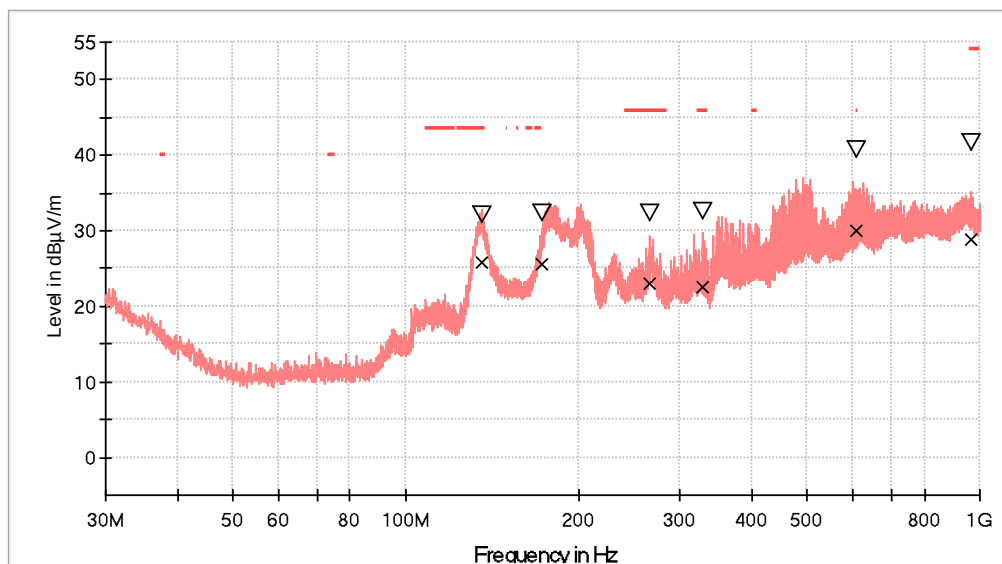

— PK+_MAXH
- - - TX limits to Spurious Emission FCC15.247 (30MHz to 1GHz) Restricted Bands QPK Limit
▽ MaxPeak-PK+ (Single)
x QuasiPeak-QPK (Single)


Maximizations

Frequency (MHz)	MaxPeak (dBµV/m)	QuasiPeak (dBµV/m)	Pol	Margin - QPK (dB)	Limit - QPK (dBµV/m)
135.487500	32.1	25.8	V	17.7	43.5
172.978000	32.3	25.7	V	17.8	43.5
266.389000	32.4	22.9	V	23.1	46.0
328.566000	32.5	22.6	H	23.4	46.0
610.593500	40.8	30.0	V	16.0	46.0
963.528000	41.6	28.8	V	25.2	54.0

TEST RESULTS (Cont.):

1-18 GHz (Lowest Channel)

Lowest Channel

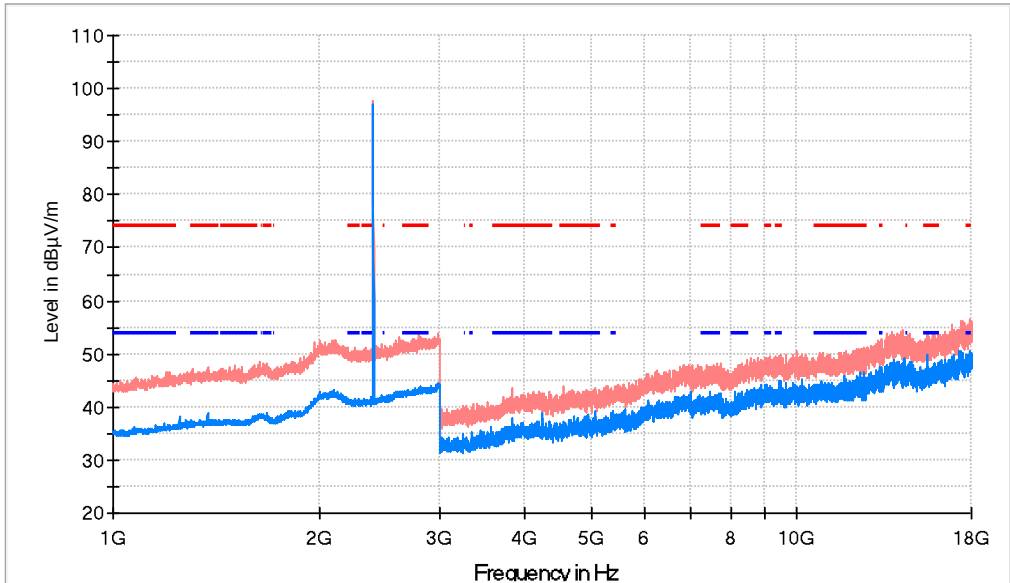


- PK+_MAXH
- TXlimits to Spurious Emission FCC15.247(1-26G) Restricted Bands AVG Limit
- TXlimits to Spurious Emission FCC15.247 Restricted Bands PK Limit
- RMS_MAXH

Frequency (MHz)	PK+_MAXH (dBµV/m)	AVG_MAXH (dBµV/m)	Pol	Margin - AVG (dB)	Limit - AVG (dBµV/m)	Comment
1250.000000	46.0	38.4	H	---	---	
2402.000000	97.6	97.0	H	---	---	Fundamental
11753.000000	49.9	45.9	V	8.1	54.0	

TEST RESULTS (Cont.):

1-18 GHz (Middle Channel)

Middle Channel

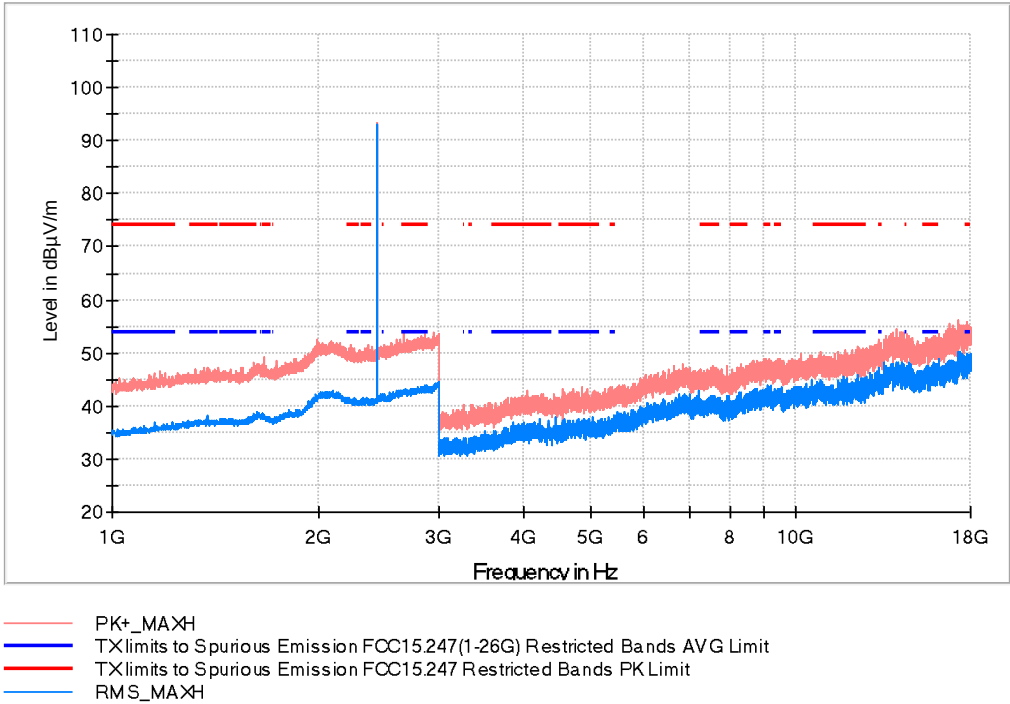


Frequency (MHz)	PK+_MAXH (dBµV/m)	AVG_MAXH (dBµV/m)	Pol	Margin - AVG (dB)	Limit - AVG (dBµV/m)	Comment
2440.000000	93.5	93.2	H	---	---	Fundamental
11709.000000	45.6	41.4	H	12.6	54.0	

TEST RESULTS (Cont.):

1-18 GHz (Highest Channel)

Highest Channel

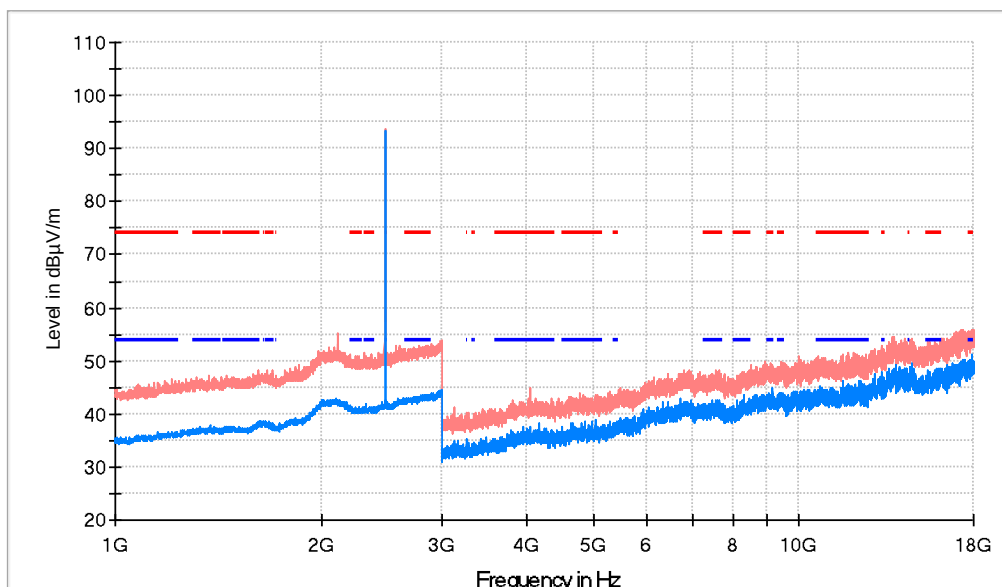


PK+_MAXH
 TXlimits to Spurious Emission FCC15.247(1-26G) Restricted Bands AVG Limit
 TXlimits to Spurious Emission FCC15.247 Restricted Bands PK Limit
 RMS_MAXH

Frequency (MHz)	PK+_MAXH (dBμV/m)	AVG_MAXH (dBμV/m)	PoI	Margin - AVG (dB)	Limit - AVG (dBμV/m)	Comment
2480.000000	93.8	93.2	H	---	---	Fundamental
11573.500000	48.7	46.3	H	7.7	54.0	

TEST RESULTS (Cont.):

18 – 26 GHz

Lowest Channel

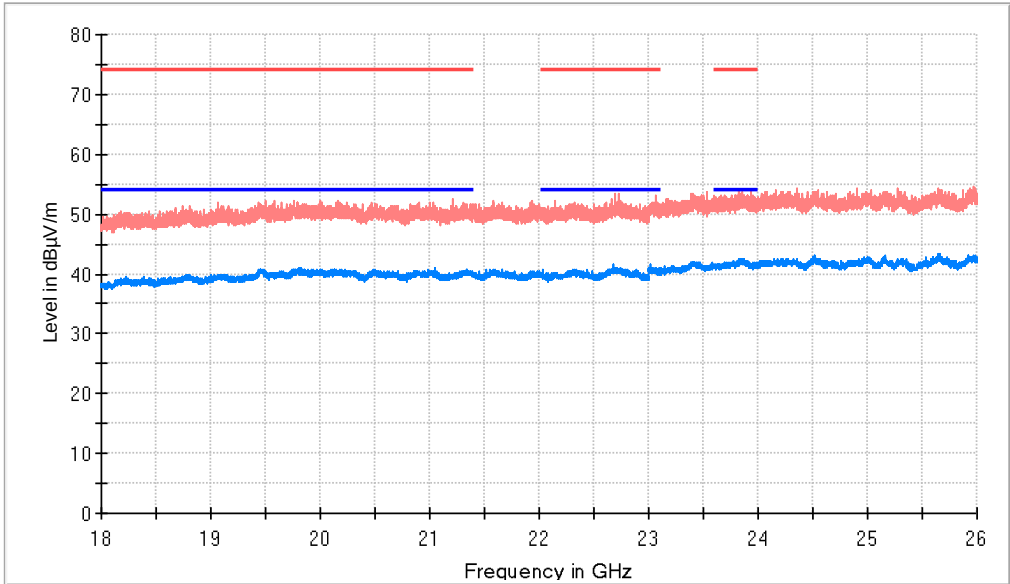


- AVG_MAXH
- PK+_MAXH
- TX limits to Spurious Emission FCC15.247 Restricted Bands PK Limit
- TX limits to Spurious Emission FCC15.247(1-26G) Restricted Bands AVG Limit

Frequency (MHz)	PK+_MAXH (dBµV/m)	AVG_MAXH (dBµV/m)	Pol	Margin - AVG (dB)	Limit - AVG (dBµV/m)
21048.000000	50.5	41.1	V	12.9	54.0
22684.500000	50.2	41.5	V	12.5	54.0
23824.500000	51.8	42.5	H	11.5	54.0

TEST RESULTS (Cont.):

18 – 26 GHz

Middle Channel

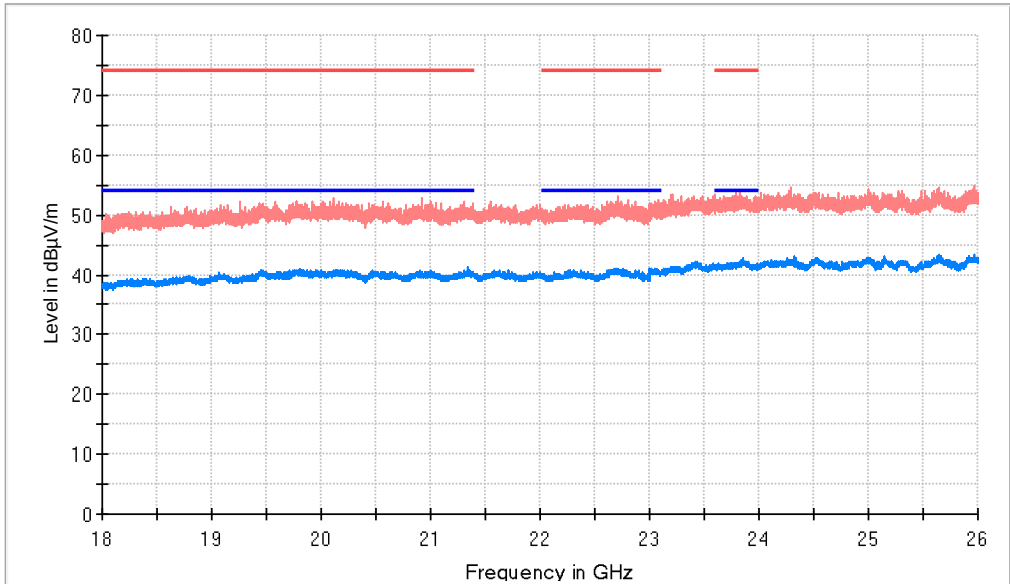


- AVG_MAXH
- PK+_MAXH
- TX limits to Spurious Emission FCC15.247 Restricted Bands PK Limit
- TX limits to Spurious Emission FCC15.247(1-26G) Restricted Bands AVG Limit

Frequency (MHz)	PK+_MAXH (dBµV/m)	AVG_MAXH (dBµV/m)	Pol	Margin - AVG (dB)	Limit - AVG (dBµV/m)
19798.500000	49.9	41.0	H	13.0	54.0
22708.500000	53.2	40.7	H	13.3	54.0
23849.500000	52.3	42.7	H	11.3	54.0

TEST RESULTS (Cont.):

18 – 26 GHz

Highest Channel

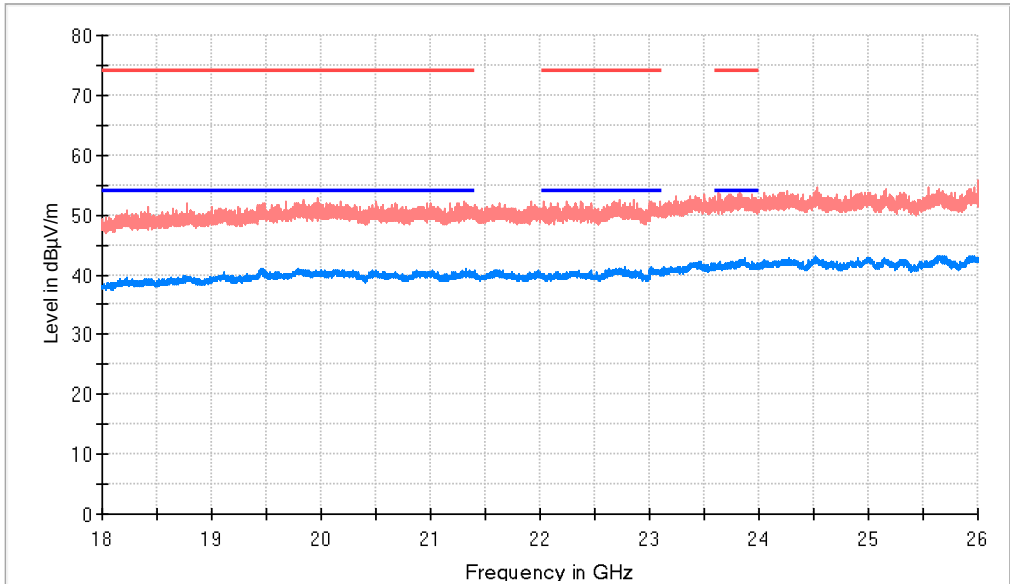


- AVG_MAXH
- PK+_MAXH
- TX limits to Spurious Emission FCC15.247 Restricted Bands PK Limit
- TX limits to Spurious Emission FCC15.247(1-26G) Restricted Bands AVG Limit

Frequency (MHz)	PK+_MAXH (dBµV/m)	AVG_MAXH (dBµV/m)	Pol	Margin - AVG (dB)	Limit - AVG (dBµV/m)
19473.500000	50.8	41.0	V	13.0	54.0
22770.000000	51.4	41.2	H	12.8	54.0
23875.000000	52.1	42.7	H	11.3	54.0

TEST RESULTS (Cont.):


Restricted Bands (2.31 GHz – 2.5 GHz)

Lowest Channel

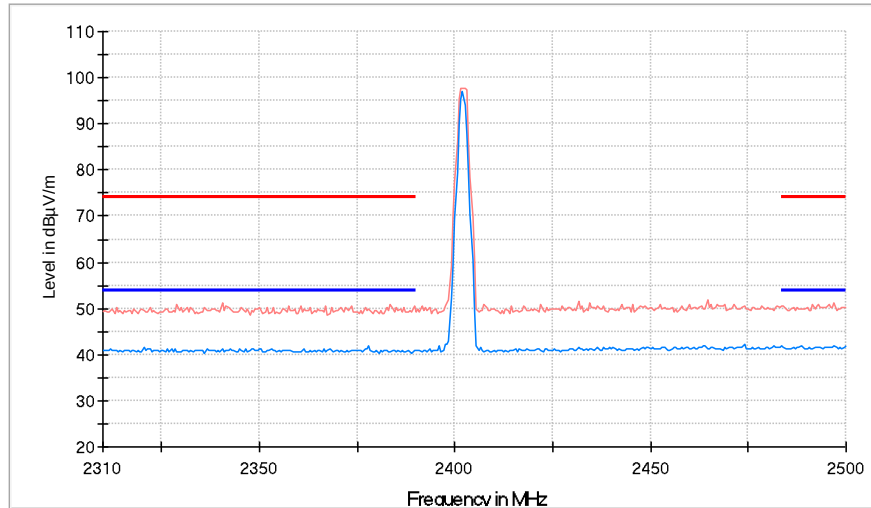

— PK+_MAXH
— TXlimits to Spurious Emission FCC15.247(1-26G) Restricted Bands AVG Limit
— TXlimits to Spurious Emission FCC15.247 Restricted Bands PK Limit
— RMS_MAXH


Middle Channel

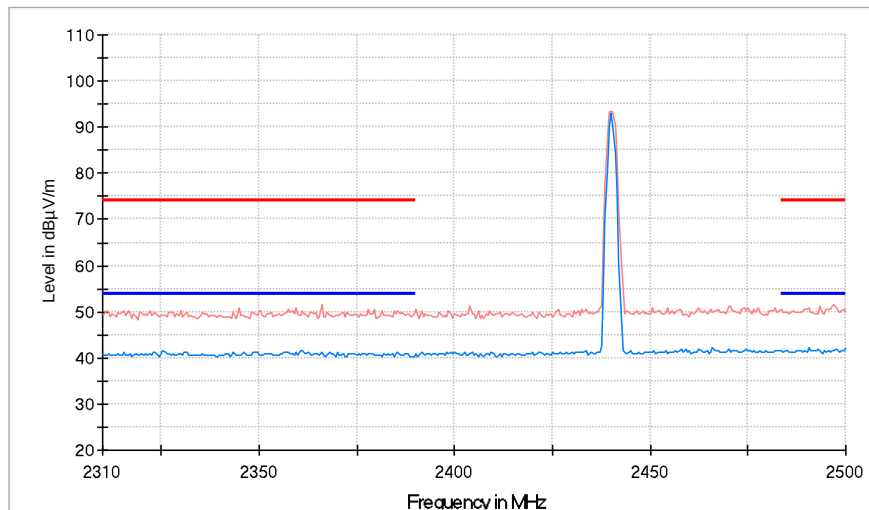

— PK+_MAXH
— TXlimits to Spurious Emission FCC15.247(1-26G) Restricted Bands AVG Limit
— TXlimits to Spurious Emission FCC15.247 Restricted Bands PK Limit
— RMS_MAXH

TEST RESULTS (Cont.):

Highest Channel

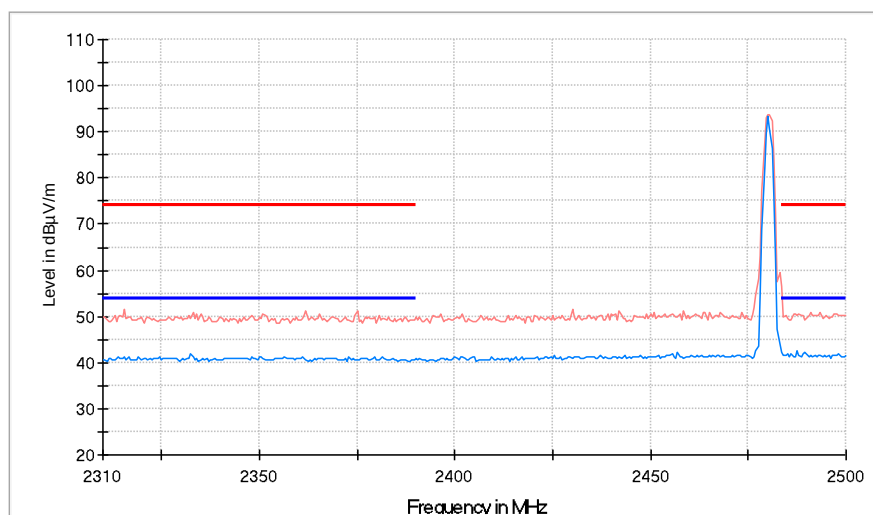

PK+_MAXH
TX limits to Spurious Emission FCC15.247(1-26G) Restricted Bands AVG Limit
TX limits to Spurious Emission FCC15.247 Restricted Bands PK Limit
RMS_MAXH