

Radio Test Report

Report No.:STS2310303W04

Issued for

Mikrotiks SIA

Unijas 2, Riga, LV-1039 Latvia

Product Name: Chateau Pro ax

Brand Name: MikroTik

Model Name: H53UiG-5HaxQ2HaxQ-US

Series Model(s): N/A

FCC ID: TV7H53U52HAX

Test Standards: FCC Part15.247

The test results presented in this report relate only to the object tested. This report shall not be reproduced, except in full, without the written approval of the Shenzhen STS Test Services Co., Ltd.

**TEST REPORT**

Applicant's Name: Mikrotiks SIA
Address: Unijas 2, Riga, LV-1039 Latvia
Manufacturer's Name: Mikrotiks SIA
Address: Unijas 2, Riga, LV-1039 Latvia

Product Description

Product Name: Chateau Pro ax
Brand Name: MikroTik
Model Name: H53UiG-5HaxQ2HaxQ-US
Series Model(s): N/A

Test Standards: FCC Part 15.247

Test Procedure: ANSI C63.10-2013

This device described above has been tested by STS, the test results show that the equipment under test (EUT) is in compliance with the FCC requirements. And it is applicable only to the tested sample identified in the report.

The test results presented in this report relate only to the object tested. This report shall not be reproduced, except in full, without the written approval of the Shenzhen STS Test Services Co., Ltd.

Date of Test

Date of receipt of test item: 11 Oct. 2023

Date (s) of performance of tests: 11 Oct. 2023 ~ 21 May 2024

Date of Issue: 21 May 2024

Test Result: **Pass**

Testing Engineer :

Aaron Bu

(Aaron Bu)

Technical Manager :

Chris Chen

(Chris Chen)

Authorized Signatory :

Bovey Yang

(Bovey Yang)





Table of Contents	Page
1. SUMMARY OF TEST RESULTS	6
1.1 TEST FACTORY	7
1.2 MEASUREMENT UNCERTAINTY	7
2. GENERAL INFORMATION	8
2.1 GENERAL DESCRIPTION OF THE EUT	8
2.2 DESCRIPTION OF THE TEST MODES	10
2.3 TEST SOFTWARE AND POWER LEVEL	11
2.4 BLOCK DIAGRAM SHOWING THE CONFIGURATION OF SYSTEM TESTED	12
2.5 DESCRIPTION OF NECESSARY ACCESSORIES AND SUPPORT UNITS	13
2.6 EQUIPMENTS LIST FOR ALL TEST ITEMS	14
3. EMC EMISSION TEST	15
3.1 CONDUCTED EMISSION MEASUREMENT	15
3.2 RADIATED EMISSION MEASUREMENT	19
4. CONDUCTED SPURIOUS & BAND EDGE EMISSION	31
4.1 LIMIT	31
4.2 TEST PROCEDURE	31
4.3 DEVIATION FROM STANDARD	31
4.4 TEST SETUP	31
4.5 EUT OPERATION CONDITIONS	31
4.6 TEST RESULTS	31
5. POWER SPECTRAL DENSITY TEST	32
5.1 LIMIT	32
5.2 TEST PROCEDURE	32
5.3 DEVIATION FROM STANDARD	32
5.4 TEST SETUP	32
5.5 EUT OPERATION CONDITIONS	32
5.6 TEST RESULTS	32
6. BANDWIDTH TEST	33
6.1 LIMIT	33
6.2 TEST PROCEDURE	33
6.3 DEVIATION FROM STANDARD	33
6.4 TEST SETUP	33
6.5 EUT OPERATION CONDITIONS	33



Table of Contents	Page
6.6 TEST RESULTS	33
7. PEAK OUTPUT POWER TEST	34
7.1 LIMIT	34
7.2 TEST PROCEDURE	34
7.3 DEVIATION FROM STANDARD	34
7.4 TEST SETUP	35
7.5 EUT OPERATION CONDITIONS	35
7.6 TEST RESULTS	35
8. ANTENNA REQUIREMENT	36
8.1 STANDARD REQUIREMENT	36
8.2 EUT ANTENNA	36
APPENDIX 1-TEST DATA	37
1. DUTY CYCLE	37
2. MAXIMUM AVERAGE CONDUCTED OUTPUT POWER	47
3. -6DB BANDWIDTH	85
4. MAXIMUM POWER SPECTRAL DENSITY LEVEL	123
5. BAND EDGE	161
6. CONDUCTED RF SPURIOUS EMISSION	210



Revision History

Rev.	Issue Date	Report No.	Effect Page	Contents
00	21 May 2024	STS2310303W04	ALL	Initial Issue



1. SUMMARY OF TEST RESULTS

Test procedures according to the technical standards:
KDB 558074 D01 15.247 Meas Guidance v05r02.

FCC Part 15.247, Subpart C			
Standard Section	Test Item	Judgment	Remark
15.207	Conducted Emission	PASS	--
15.247 (a)(2)	6dB Bandwidth	PASS	--
15.247 (b)(3)	Output Power	PASS	--
15.209	Radiated Spurious Emission	PASS	--
15.247 (d)	Conducted Spurious & Band Edge Emission	PASS	--
15.247 (e)	Power Spectral Density	PASS	--
15.205	Restricted Band Edge Emission	PASS	--
Part 15.247(d)/ part 15.209(a)	Band Edge Emission	PASS	--
15.203	Antenna Requirement	PASS	--

NOTE:

- (1) 'N/A' denotes test is not applicable in this Test Report.
- (2) All tests are according to ANSI C63.10-2013.



1.1 TEST FACTORY

SHENZHEN STS TEST SERVICES CO., LTD

Add. : 101, Building B, Zhuoke Science Park, No.190 Chongqing Road, ZhanChengShequ, Fuhai Sub-District, Bao'an District, Shenzhen, Guang Dong, China

FCC test Firm Registration Number: 625569

IC test Firm Registration Number: 12108A

A2LA Certificate No.: 4338.01

1.2 MEASUREMENT UNCERTAINTY

The reported uncertainty of measurement $y \pm U$, where expanded uncertainty U is based on a standard uncertainty multiplied by a coverage factor of $k=2$, providing a level of confidence of approximately 95 %.

No.	Item	Uncertainty
1	RF output power, conducted	$\pm 0.755\text{dB}$
2	Unwanted Emissions, conducted	$\pm 2.874\text{dB}$
3	All emissions, radiated 9K-30MHz	$\pm 3.80\text{dB}$
4	All emissions, radiated 30M-1GHz	$\pm 4.18\text{dB}$
5	All emissions, radiated 1G-6GHz	$\pm 4.90\text{dB}$
6	All emissions, radiated >6G	$\pm 5.24\text{dB}$
7	Conducted Emission (9KHz-150KHz)	$\pm 2.19\text{dB}$
8	Conducted Emission (150KHz-30MHz)	$\pm 2.53\text{dB}$
9	Occupied Channel Bandwidth	$\pm 3.5\%$
10	Power Spectral Density, conducted	$\pm 1.245\text{dB}$
11	Duty Cycle	$\pm 3.2\%$

2. GENERAL INFORMATION

2.1 GENERAL DESCRIPTION OF THE EUT

Product Name	Chateau Pro ax												
Brand Name	MikroTik												
Model Name	H53UiG-5HaxQ2HaxQ-US												
Series Model(s)	N/A												
Declaration of different	N/A												
Product Description	The EUT is a Chateau Pro ax <table> <tr> <td>Operation Frequency:</td><td>802.11b/g/n/ax 20: 2412~2462 MHz 802.11n/ax (40MHz):2422~2452MHz</td></tr> <tr> <td>Modulation Type:</td><td>802.11b(DSSS):CCK,DQPSK,DBPSK 802.11g(OFDM):BPSK,QPSK,16-QAM,64-QAM 802.11n(OFDM):BPSK,QPSK,16-QAM,64-QAM 802.11ax(OFDM, OFDMA): BPSK,QPSK,16-QAM,64-QAM,256-QAM, 1024QAM</td></tr> <tr> <td>Bit Rate of Transmitter:</td><td>802.11b:11/5.5/2/1 Mbps 802.11g:54/48/36/24/18/12/9/6Mbps 802.11n(20MHz): 65/58.5/52/39/26/19.5/13/6.5Mbps 802.11n(40MHz): 135/121.5/108/81/54/40.5/37/13.5Mbps 802.11ax(20MHz): 135/65/58.5/52/39/26/19.5/13/6.5Mbps 802.11ax(40MHz): 270/135/121.5/108/81/54/40.5/37/13.5Mbps</td></tr> <tr> <td>Number of Channel:</td><td>802.11b/g/n/ax 20: 11CH 802.11n/ax 40: 7CH</td></tr> <tr> <td>Antenna Type:</td><td>Omni</td></tr> <tr> <td>Antenna Gain (dBi):</td><td>ANT1:3.89 dBi,ANT 2:5.04 dBi,ANT 3:3.71 dBi ANT 4:5.04 dBi,MIMO:10.46 dBi</td></tr> </table>	Operation Frequency:	802.11b/g/n/ax 20: 2412~2462 MHz 802.11n/ax (40MHz):2422~2452MHz	Modulation Type:	802.11b(DSSS):CCK,DQPSK,DBPSK 802.11g(OFDM):BPSK,QPSK,16-QAM,64-QAM 802.11n(OFDM):BPSK,QPSK,16-QAM,64-QAM 802.11ax(OFDM, OFDMA): BPSK,QPSK,16-QAM,64-QAM,256-QAM, 1024QAM	Bit Rate of Transmitter:	802.11b:11/5.5/2/1 Mbps 802.11g:54/48/36/24/18/12/9/6Mbps 802.11n(20MHz): 65/58.5/52/39/26/19.5/13/6.5Mbps 802.11n(40MHz): 135/121.5/108/81/54/40.5/37/13.5Mbps 802.11ax(20MHz): 135/65/58.5/52/39/26/19.5/13/6.5Mbps 802.11ax(40MHz): 270/135/121.5/108/81/54/40.5/37/13.5Mbps	Number of Channel:	802.11b/g/n/ax 20: 11CH 802.11n/ax 40: 7CH	Antenna Type:	Omni	Antenna Gain (dBi):	ANT1:3.89 dBi,ANT 2:5.04 dBi,ANT 3:3.71 dBi ANT 4:5.04 dBi,MIMO:10.46 dBi
Operation Frequency:	802.11b/g/n/ax 20: 2412~2462 MHz 802.11n/ax (40MHz):2422~2452MHz												
Modulation Type:	802.11b(DSSS):CCK,DQPSK,DBPSK 802.11g(OFDM):BPSK,QPSK,16-QAM,64-QAM 802.11n(OFDM):BPSK,QPSK,16-QAM,64-QAM 802.11ax(OFDM, OFDMA): BPSK,QPSK,16-QAM,64-QAM,256-QAM, 1024QAM												
Bit Rate of Transmitter:	802.11b:11/5.5/2/1 Mbps 802.11g:54/48/36/24/18/12/9/6Mbps 802.11n(20MHz): 65/58.5/52/39/26/19.5/13/6.5Mbps 802.11n(40MHz): 135/121.5/108/81/54/40.5/37/13.5Mbps 802.11ax(20MHz): 135/65/58.5/52/39/26/19.5/13/6.5Mbps 802.11ax(40MHz): 270/135/121.5/108/81/54/40.5/37/13.5Mbps												
Number of Channel:	802.11b/g/n/ax 20: 11CH 802.11n/ax 40: 7CH												
Antenna Type:	Omni												
Antenna Gain (dBi):	ANT1:3.89 dBi,ANT 2:5.04 dBi,ANT 3:3.71 dBi ANT 4:5.04 dBi,MIMO:10.46 dBi												
Channel List	Please refer to the Note 3.												
Adapter	Input: AC 100-240V, 50/60Hz, 1.5A Output: DC 48V 1.35A												
Hardware version number	r3												
Software version number	RouterOS V7												
Connecting I/O Port(s)	Please refer to the Note 1.												

Note:

- For a more detailed features description, please refer to the manufacturer's specifications or the User Manual.
- The antenna information refer the manufacturer provide report, applicable only to the tested sample identified in the report. Due to the incorrect antenna information, a series of problems such as the accuracy of the test results will be borne by the customer.

3. Operation Frequency of channel

802.11b/g/n/ax(20MHz)		Channel List for 802.11n/ax(40MHz)	
Channel	Frequency	Channel	Frequency
01	2412	03	2422
02	2417	04	2427
03	2422	05	2432
04	2427	06	2437
05	2432	07	2442
06	2437	08	2447
07	2442	09	2452
08	2447		
09	2452		
10	2457		
11	2462		

Note:

In section 15.31(m), regards to the operating frequency range over 10 MHz, the Lowest frequency, the middle frequency, and the highest frequency of channel were selected to perform the test, and the selected channel see below:

Carrier Frequency Channel

2.4GHz Test Frequency:

For 802.11b/g/n/ax (HT20)		For 802.11n/ax (HT40)	
Channel	Freq.(MHz)	Channel	Freq.(MHz)
01	2412	03	2422
06	2437	06	2437
11	2462	09	2452



2.2 DESCRIPTION OF THE TEST MODES

Each of these EUT operation mode(s) or test configuration mode(s) mentioned above was evaluated respectively.

Worst Mode	Description	Data Rate
Mode 1	TX IEEE 802.11b CH1	1 Mbps
Mode 2	TX IEEE 802.11b CH6	1 Mbps
Mode 3	TX IEEE 802.11 b CH11	1 Mbps
Mode 4	TX IEEE 802.11g CH1	6 Mbps
Mode 5	TX IEEE 802.11g CH6	6 Mbps
Mode 6	TX IEEE 802.11g CH11	6 Mbps
Mode 7	TX IEEE 802.11n HT20 CH1	MCS 0
Mode 8	TX IEEE 802.11n HT20 CH6	MCS 0
Mode 9	TX IEEE 802.11n HT20 CH11	MCS 0
Mode 10	TX IEEE 802.11n HT40 CH3	MCS 0
Mode 11	TX IEEE 802.11n HT40 CH6	MCS 0
Mode 12	TX IEEE 802.11n HT40 CH9	MCS 0
Mode 13	TX IEEE 802.11ax HE20 CH1	MCS 0
Mode 14	TX IEEE 802.11ax HE20 CH6	MCS 0
Mode 15	TX IEEE802.11ax HE20 CH11	MCS 0
Mode 16	TX IEEE 802.11ax HE40 CH3	MCS 0
Mode 17	TX IEEE 802.11ax HE40 CH6	MCS 0
Mode 18	TX IEEE802.11ax HE40 CH9	MCS 0

Note:

- (1) The measurements are performed at all Bit Rate of Transmitter, the worst data was reported.
- (2) We have be tested for all available U.S. voltage and frequencies(For 120V,50/60Hz and 240V, 50/60Hz) for which the device is capable of operation, and the worst case of 120V /60Hz is shown in the report.
- (3) The battery is fully-charged during the radited and RF conducted test.

AC Conducted Emission

Test Case	
AC Conducted Emission	Mode19: Keeping WIFI TX




2.3 TEST SOFTWARE AND POWER LEVEL

During testing channel & power controlling software provided by the customer was used to control the operating channel as well as the output power level.


RF Function	Type	Mode Or Modulation type	ANT Gain(dBi)	ANT_1 Power Class	ANT_2 Power Class	ANT_3 Power Class	ANT_4 Power Class
WIFI(2.4G)	2.4G WIFI	802.11b	ANT 1: 3.89 ANT 2: 5.04 ANT 3: 3.71 ANT 4: 5.04 MIMO : 10.46	Low: 19	Low: 19	Low: 19	Low: 19
				Middle: 20	Middle: 20	Middle: 20	Middle: 20
				High: 17	High: 17	High: 17	High: 17
		802.11g		Low: 19	Low: 19	Low: 19	Low: 19
				Middle: 20	Middle: 20	Middle: 20	Middle: 20
				High: 17	High: 17	High: 17	High: 17
		802.11n(HT20)		Low: 17	Low: 17	Low: 17	Low: 17
				Middle: 20	Middle: 20	Middle: 20	Middle: 20
				High: 15	High: 15	High: 15	High: 15
		802.11n(HT40)		Low: 13	Low: 13	Low: 13	Low: 13
				Middle: 20	Middle: 20	Middle: 20	Middle: 20
				High: 13	High: 13	High: 13	High: 13
		802.11ax(HT20)		Low: 17	Low: 17	Low: 17	Low: 17
				Middle: 20	Middle: 20	Middle: 20	Middle: 20
				High: 15	High: 15	High: 15	High: 15
		802.11ax(HT40)		Low: 13	Low: 13	Low: 13	Low: 13
				Middle: 20	Middle: 20	Middle: 20	Middle: 20
				High: 13	High: 13	High: 13	High: 13

2.4 BLOCK DIAGRAM SHOWING THE CONFIGURATION OF SYSTEM TESTED

Radiation Test Set

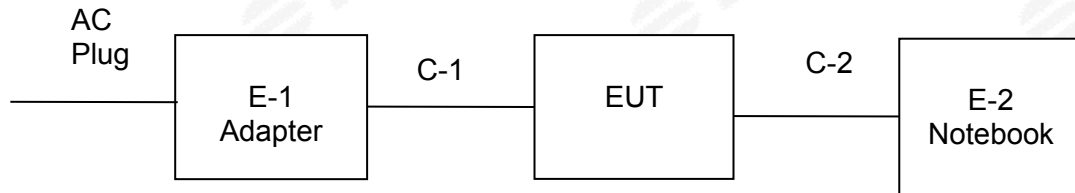

Conduction Test Set

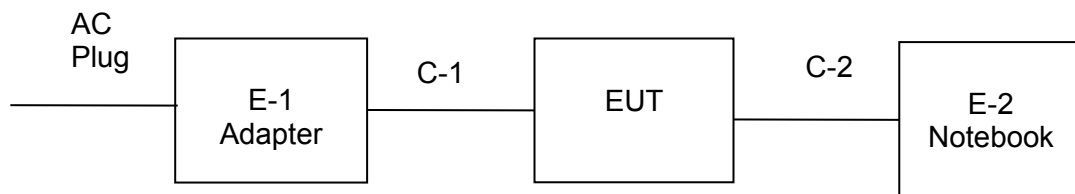

2.5 DESCRIPTION OF NECESSARY ACCESSORIES AND SUPPORT UNITS

The EUT has been tested as an independent unit together with other necessary accessories or support units. The following support units or accessories were used to form a representative test configuration during the tests.

Necessary accessories

Item	Equipment	Mfr/Brand	Model/Type No.	Length	Note
	Adapter	N/A	SAW65C-480-1350U	N/A	N/A
	DC Cable	N/A	N/A	150cm	NO

Support units

Item	Equipment	Mfr/Brand	Model/Type No.	Length	Note
	USB Cable	N/A	N/A	150cm	N/A
	Notebook	LENOVO	Think Pad E470	N/A	N/A

Note:

- (1) For detachable type I/O cable should be specified the length in cm in 『Length』 column.
- (2) “YES” is means “with core”; “NO” is means “without core”.



2.6 EQUIPMENTS LIST FOR ALL TEST ITEMS

RF Radiation Test Equipment					
Kind of Equipment	Manufacturer	Type No.	Serial No.	Last Calibration	Calibrated Until
Temperature & Humidity	SW-108	SuWei	N/A	2024.02.23	2025.02.22
Pre-Amplifier(0.1M-3GHz)	EM	EM330	060665	2024.02.23	2025.02.22
Pre-Amplifier(1G-18GHz)	SKET	LNPA-01018G-45	SK2018080901	2023.09.26	2024.09.25
Pre-Amplifier(18G-40GHz)	SKET	LNPA_1840-50	SK2018101801	2024.02.23	2025.02.22
Active loop Antenna	ZHINAN	ZN30900C	16035	2023.02.28	2025.02.27
Bilog Antenna	TESEQ	CBL6111D	34678	2022.09.30	2024.09.29
Horn Antenna	SCHWARZBECK	BBHA 9120D	02014	2023.09.24	2025.09.23
Horn Antenna	A-INFOMW	LB-180400-KF	J211020657	2023.10.10	2025.10.09
Positioning Controller	MF	MF-7802	MF-780208587	N/A	N/A
Signal Analyzer	R&S	FSV 40-N	101823	2023.09.26	2024.09.25
Switch Control Box	N/A	N/A	N/A	N/A	N/A
Filter Box	BALUN Technology	SU319E	BL-SZ1530051	N/A	N/A
Antenna Mast	MF	MFA-440H	N/A	N/A	N/A
Turn Table	MF	SC100_1	60531	N/A	N/A
AC Power Source	APC	KDF-11010G	F214050035	N/A	N/A
DC power supply	HONGSHENGFENG	DPS-305AF	17064939	2023.09.26	2024.09.25
Test SW	EZ-EMC	Ver.STSLAB-03A1 RE			
Conduction Test equipment					
Kind of Equipment	Manufacturer	Type No.	Serial No.	Last calibration	Calibrated until
Test Receiver	R&S	ESCI	101427	2023.09.25	2024.09.24
Limtter	CYBERTEK	EM5010	N/A	2023.09.25	2024.09.24
LISN	R&S	ENV216	101242	2023.09.25	2024.09.24
LISN	EMCO	3810/2NM	23625	2023.09.25	2024.09.24
Temperature & Humidity	SW-108	SuWei	N/A	2024.02.23	2025.02.22
Test SW	EZ-EMC	Ver.STSLAB-03A1 CE			
RF Connected Test					
Kind of Equipment	Manufacturer	Type No.	Serial No.	Last calibration	Calibrated until
Signal Analyzer	Agilent	N9020A	MY51510623	2024.02.23	2025.02.22
Power detector group	Keysight	NW2021031	N/A	2023.09.26	2024.09.25
Switch control box	MW	MW100-RFCB	N/A	N/A	N/A
Temperature & Humidity	SW-108	SuWei	N/A	2024.02.23	2025.02.22
Test SW	MW	MTS 8310_2.0.0.0			

3. EMC EMISSION TEST

3.1 CONDUCTED EMISSION MEASUREMENT

3.1.1 POWER LINE CONDUCTED EMISSION LIMITS

The radio frequency voltage that is conducted back onto the AC power line on any frequency or frequencies, within the band 150 kHz to 30 MHz, shall not exceed the limits in the following table.

FREQUENCY (MHz)	Conducted Emission limit (dBuV)	
	Quasi-peak	Average
0.15 -0.5	66 - 56 *	56 - 46 *
0.50 -5.0	56.00	46.00
5.0 -30.0	60.00	50.00

Note:

- (1) The tighter limit applies at the band edges.
- (2) The limit of “ * ” marked band means the limitation decreases linearly with the logarithm of the frequency in the range.


The following table is the setting of the receiver

Receiver Parameters	Setting
Attenuation	10 dB
Start Frequency	0.15 MHz
Stop Frequency	30 MHz
IF Bandwidth	9 kHz

3.1.2 TEST PROCEDURE

- The EUT is 0.8 m from the horizontal ground plane and 0.4 m from the vertical ground plane with EUT being connected to the power mains through a line impedance stabilization network (LISN). All other support equipments are powered from additional LISN(s). The LISN provides 50 Ohm/ 50uH of coupling impedance for the measuring instrument.
- Interconnecting cables that hang closer than 40 cm to the ground plane shall be folded back and forth in the center forming a bundle 30 to 40 cm long.
- I/O cables that are not connected to a peripheral shall be bundled in the center. The end of the cable may be terminated, if required, using the correct terminating impedance. The overall length shall not exceed 1 m.
- LISN is at least 80 cm from the nearest part of EUT chassis.
- For the actual test configuration, please refer to the related Item –EUT Test Photos.

3.1.3 TEST SETUP

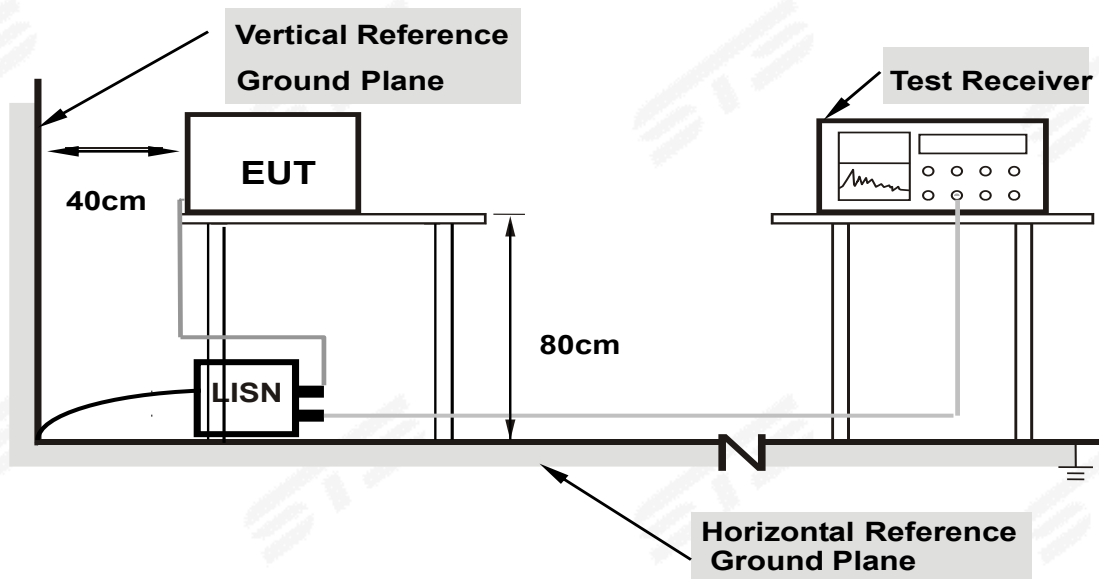

Note: 1. Support units were connected to second LISN.

2. Both of LISNs (AMN) are 80 cm from EUT and at least 80 cm from other units and other metal planes support units.

3.1.4 EUT OPERATING CONDITIONS

The EUT was configured for testing in a typical fashion (as a customer would normally use it). The EUT has been programmed to continuously transmit during test. This operating condition was tested and used to collect the included data.


3.1.5 TEST RESULT

Temperature:	26.2(C)	Relative Humidity:	54%RH
Test Voltage:	AC 120V/60Hz	Phase:	L
Test Mode:	Mode 19		

No.	Frequency (MHz)	Reading (dBuV)	Correct Factor(d B)	Result (dBuV)	Limit (dBuV)	Margin (dB)	Remark
1	0.1500	33.33	19.77	53.10	66.00	-12.90	QP
2	0.1500	16.40	19.77	36.17	56.00	-19.83	AVG
3	0.4020	27.51	20.00	47.51	57.81	-10.30	QP
4	0.4020	21.46	20.00	41.46	47.81	-6.35	AVG
5	0.8060	17.16	19.79	36.95	56.00	-19.05	QP
6	0.8060	8.67	19.79	28.46	46.00	-17.54	AVG
7	3.9540	20.89	19.81	40.70	56.00	-15.30	QP
8	3.9540	10.24	19.81	30.05	46.00	-15.95	AVG
9	5.8980	17.71	19.84	37.55	60.00	-22.45	QP
10	5.8980	8.34	19.84	28.18	50.00	-21.82	AVG
11	27.5300	11.47	20.32	31.79	60.00	-28.21	QP
12	27.5300	1.52	20.32	21.84	50.00	-28.16	AVG

Remark:

1. All readings are Quasi-Peak and Average values
2. Margin = Result (Result =Reading + Factor)–Limit
3. Factor=LISN factor+Cable loss+Limiter (10dB)

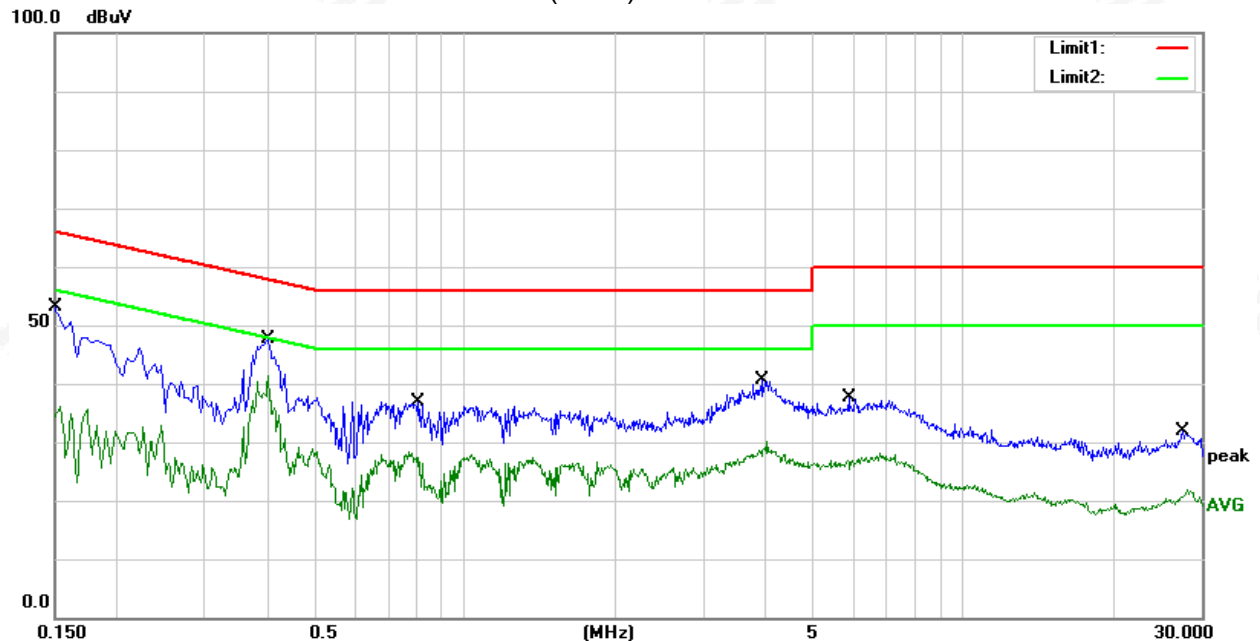




Temperature:	26.2(C)	Relative Humidity:	54%RH
Test Voltage:	AC 120V/60Hz	Phase:	N
Test Mode:	Mode 19		

No.	Frequency (MHz)	Reading (dBuV)	Correct Factor(dB)	Result (dBuV)	Limit (dBuV)	Margin (dB)	Remark
1	0.1540	31.66	19.77	51.43	65.78	-14.35	QP
2	0.1540	17.52	19.77	37.29	55.78	-18.49	AVG
3	0.4020	26.64	20.00	46.64	57.81	-11.17	QP
4	0.4020	19.91	20.00	39.91	47.81	-7.90	AVG
5	0.7340	15.96	19.80	35.76	56.00	-20.24	QP
6	0.7340	6.84	19.80	26.64	46.00	-19.36	AVG
7	4.0660	20.64	19.81	40.45	56.00	-15.55	QP
8	4.0660	8.67	19.81	28.48	46.00	-17.52	AVG
9	6.0340	18.27	19.84	38.11	60.00	-21.89	QP
10	6.0340	8.68	19.84	28.52	50.00	-21.48	AVG
11	21.2700	10.97	20.44	31.41	60.00	-28.59	QP
12	21.2700	1.82	20.44	22.26	50.00	-27.74	AVG

Remark:

1. All readings are Quasi-Peak and Average values
2. Margin = Result (Result = Reading + Factor) - Limit
3. Factor = LISN factor + Cable loss + Limiter (10dB)

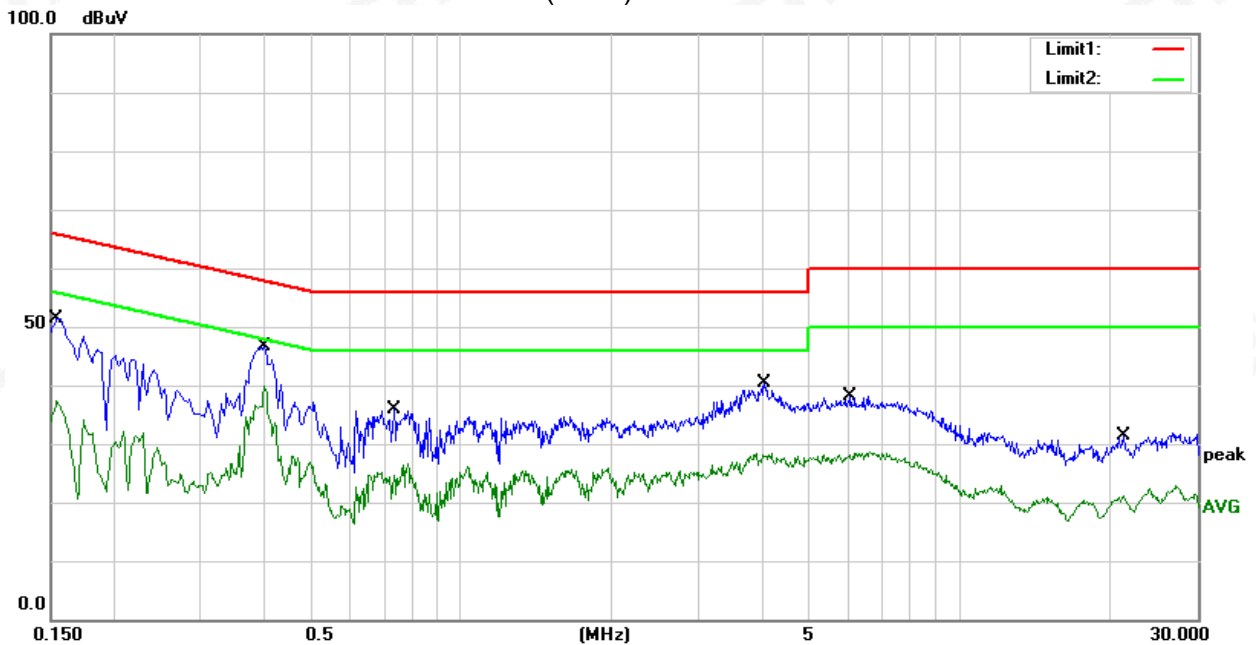



3.2 RADIATED EMISSION MEASUREMENT

3.2.1 RADIATED EMISSION LIMITS

In any 100 kHz bandwidth outside the operating frequency band. In case the emission fall within the Restricted band specified on Part15.205(a)&209(a) limit in the table and according to ANSI C63.10-2013 below has to be followed.

LIMITS OF RADIATED EMISSION MEASUREMENT (0.009MHz - 1000MHz)

Frequencies (MHz)	Field Strength (micorvolts/meter)	Measurement Distance (meters)
0.009~0.490	2400/F(KHz)	300
0.490~1.705	24000/F(KHz)	30
1.705~30.0	30	30
30~88	100	3
88~216	150	3
216~960	200	3
Above 960	500	3

LIMITS OF RADIATED EMISSION MEASUREMENT (1000MHz-25GHz)

FREQUENCY (MHz)	(dBuV/m) (at 3M)	
	PEAK	AVERAGE
Above 1000	74	54

Notes:

- (1) The limit for radiated test was performed according to FCC PART 15C.
- (2) The tighter limit applies at the band edges.
- (3) Emission level (dBuV/m)=20log Emission level (uV/m).

LIMITS OF RESTRICTED FREQUENCY BANDS

FREQUENCY (MHz)	FREQUENCY (MHz)	FREQUENCY (MHz)	FREQUENCY (GHz)
0.090-0.110	16.42-16.423	399.9-410	4.5-5.15
0.495-0.505	16.69475-16.69525	608-614	5.35-5.46
2.1735-2.1905	16.80425-16.80475	960-1240	7.25-7.75
4.125-4.128	25.5-25.67	1300-1427	8.025-8.5
4.17725-4.17775	37.5-38.25	1435-1626.5	9.0-9.2
4.20725-4.20775	73-74.6	1645.5-1646.5	9.3-9.5
6.215-6.218	74.8-75.2	1660-1710	10.6-12.7
6.26775-6.26825	108-121.94	1718.8-1722.2	13.25-13.4
6.31175-6.31225	123-138	2200-2300	14.47-14.5
8.291-8.294	149.9-150.05	2310-2390	15.35-16.2
8.362-8.366	156.52475-156.52525	2483.5-2500	17.7-21.4
8.37625-8.38675	156.7-156.9	2690-2900	22.01-23.12
8.41425-8.41475	162.0125-167.17	3260-3267	23.6-24.0
12.29-12.293	167.72-173.2	3332-3339	31.2-31.8
12.51975-12.52025	240-285	3345.8-3358	36.43-36.5
12.57675-12.57725	322-335.4	3600-4400	Above 38.6
13.36-13.41			

For Radiated Emission

Spectrum Parameter	Setting
Attenuation	Auto
Detector	Peak/QP/AV
Start Frequency	9 KHz/150KHz(Peak/QP/AV)
Stop Frequency	150KHz/30MHz(Peak/QP/AV)
RB / VB (emission in restricted band)	200Hz (From 9kHz to 0.15MHz)/ 9KHz (From 0.15MHz to 30MHz); 200Hz (From 9kHz to 0.15MHz)/ 9KHz (From 0.15MHz to 30MHz)

Spectrum Parameter	Setting
Attenuation	Auto
Detector	Peak/QP
Start Frequency	30 MHz(Peak/QP)
Stop Frequency	1000 MHz (Peak/QP)
RB / VB (emission in restricted band)	120 KHz / 300 KHz

Spectrum Parameter	Setting
Attenuation	Auto
Detector	Peak/AV
Start Frequency	1000 MHz(Peak/AV)
Stop Frequency	10th carrier hamonic(Peak/AV)
RB / VB (emission in restricted band)	1 MHz / 3 MHz(Peak) 1 MHz/1/T MHz(AVG)

For Restricted band

Spectrum Parameter	Setting
Detector	Peak/AV
Start/Stop Frequency	Lower Band Edge: 2310 to 2430 MHz Upper Band Edge: 2445 to 2500 MHz
RB / VB	1 MHz / 3 MHz(Peak) 1 MHz/1/T MHz(AVG)



Receiver Parameter	Setting
Start ~ Stop Frequency	9kHz~90kHz / RB 200Hz for PK & AV
Start ~ Stop Frequency	90kHz~110kHz / RB 200Hz for QP
Start ~ Stop Frequency	110kHz~490kHz / RB 200Hz for PK & AV
Start ~ Stop Frequency	490kHz~30MHz / RB 9kHz for QP
Start ~ Stop Frequency	30MHz~1000MHz / RB 120kHz for QP

3.2.2 TEST PROCEDURE


- The measuring distance at 3 m shall be used for measurements at frequency 0.009MHz up to 1GHz, and above 1GHz.
- The EUT was placed on the top of a rotating table 0.8 m (above 1GHz is 1.5 m) above the ground at a 3 m anechoic chamber test site. The table was rotated 360 degree to determine the position of the highest radiation.
- The height of the equipment shall be 0.8 m (above 1GHz is 1.5 m); the height of the test antenna shall vary between 1 m to 4 m. Horizontal and vertical polarization of the antenna are set to make the measurement.
- The initial step in collecting conducted emission data is a spectrum analyzer peak detector mode pre-scanning the measurement frequency range. Significant peaks are then marked and QuasiPeak detector mode will be re-measured.
- If the Peak Mode measured value is compliance with and lower than Quasi Peak Mode Limit, the EUT shall be deemed to meet QP Limits and no additional QP Mode measurement was performed.
- For the actual test configuration, please refer to the related Item –EUT Test Photos.

Note:


Both horizontal and vertical antenna polarities were tested and performed pretest to three orthogonal axis. The worst case emissions were reported.

3.2.3 TEST SETUP


(A) Radiated Emission Test-Up Frequency Below 30MHz

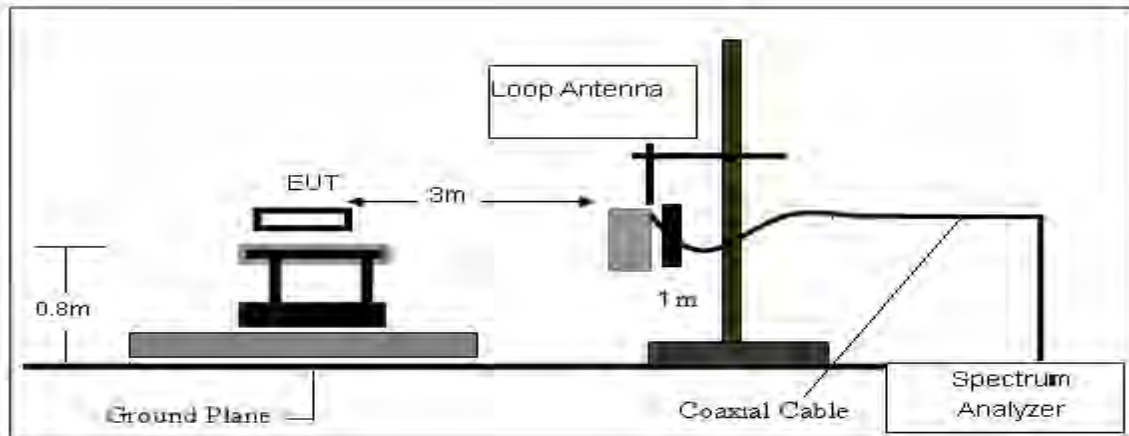

(B) Radiated Emission Test-Up Frequency 30MHz~1GHz

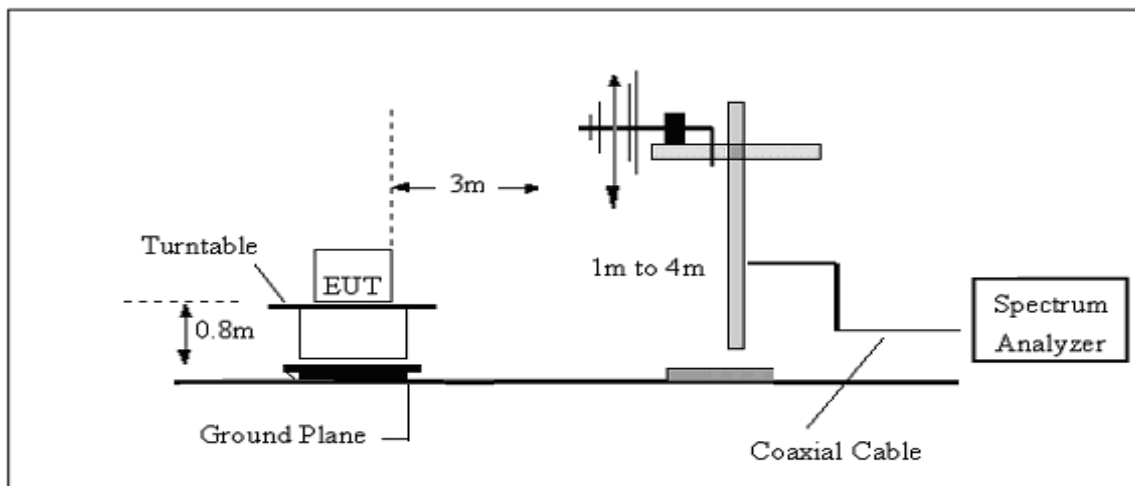

(C) Radiated Emission Test-Up Frequency Above 1GHz

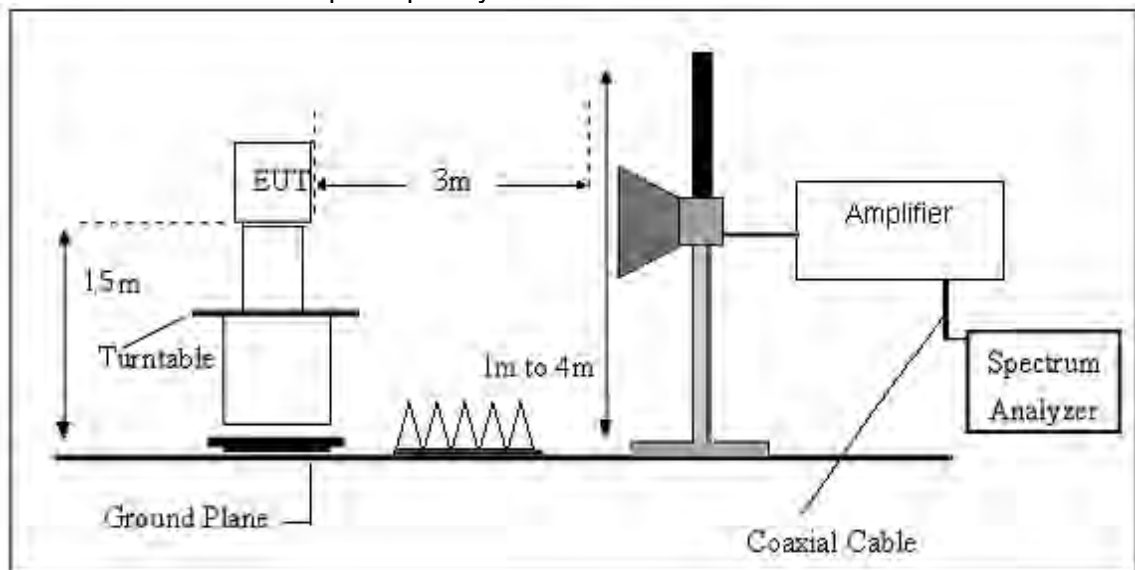

3.2.4 EUT OPERATING CONDITIONS

Please refer to section 3.1.4 of this report.



3.2.5 FIELD STRENGTH CALCULATION

The field strength is calculated by adding the Antenna Factor and Cable Factor and subtracting the Amplifier Gain and Duty Cycle Correction Factor (if any) from the measured reading. The basic equation with a sample calculation is as follows:

$$FS = RA + AF + CL - AG$$

Where

FS = Field Strength

CL = Cable Attenuation Factor (Cable Loss)

RA = Reading Amplitude

AG = Amplifier Gain

AF = Antenna Factor

For example

Frequency	FS	RA	AF	CL	AG	Factor
(MHz)	(dBμV/m)	(dBμV/m)	(dB)	(dB)	(dB)	(dB)
300	40	58.1	12.2	1.6	31.9	-18.1

$$\text{Factor} = AF + CL - AG$$



3.2.6 TEST RESULT

9KHz-30MHz

Temperature:	23.1(C)	Relative Humidity:	60%RH
Test Voltage:	AC 120V/60Hz	Polarization:	--
Test Mode:	TX Mode		

Freq.	Reading	Limit	Margin	State	Test Result
(MHz)	(dBuV/m)	(dBuV/m)	(dB)	P/F	
--	--	--	--	--	PASS
--	--	--	--	--	PASS

Note:

The amplitude of spurious emissions which are attenuated by more than 20dB below the permissible value has no need to be reported.

Distance extrapolation factor = $40 \log (\text{specific distance/test distance})$ (dB);

Limit line = specific limits(dBuV) + distance extrapolation factor.



(30MHz - 1000MHz)


Temperature:	23.1(C)	Relative Humidity:	60%RH
Test Voltage:	AC 120V/60Hz	Phase:	Horizontal
Test Mode:	Mode 1~18(Mode 5 worst mode)		

No.	Frequency (MHz)	Reading (dBuV)	Correct Factor(dB/ m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	55.2200	57.42	-25.04	32.38	40.00	-7.62	peak
2	128.9400	53.12	-18.26	34.86	43.50	-8.64	peak
3	198.7800	58.28	-21.12	37.16	43.50	-6.34	peak
4	256.0100	50.46	-15.24	35.22	46.00	-10.78	peak
5	398.6000	49.82	-11.20	38.62	46.00	-7.38	peak
6	798.2400	41.24	-2.03	39.21	46.00	-6.79	peak

Remark:

1. Margin = Result (Result = Reading + Factor) – Limit
2. Factor = Antenna factor + Cable attenuation factor (cable loss) – Amplifier gain
3. All modes have been tested, only show the worst case.

80.0 dBuV/m

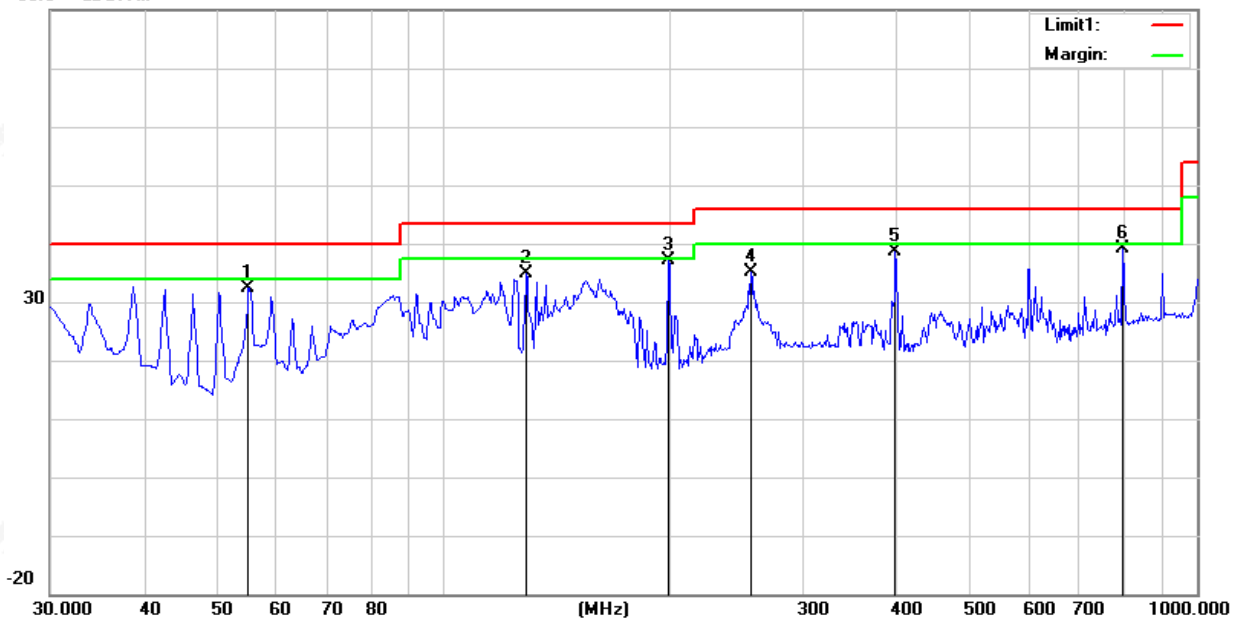




Temperature:	23.1(C)	Relative Humidity:	60%RH
Test Voltage:	AC 120V/60Hz	Phase:	Vertical
Test Mode:	Mode 1~18(Mode 5 worst mode)		

No.	Frequency (MHz)	Reading (dBuV)	Correct Factor(dB/ m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	42.6100	51.86	-19.44	32.42	40.00	-7.58	peak
2	125.0600	51.29	-18.22	33.07	43.50	-10.43	peak
3	199.7500	57.63	-21.11	36.52	43.50	-6.98	peak
4	256.9800	53.76	-15.13	38.63	46.00	-7.37	peak
5	399.5700	49.35	-11.16	38.19	46.00	-7.81	peak
6	799.2100	40.35	-2.04	38.31	46.00	-7.69	peak

Remark:.

1. Margin = Result (Result =Reading + Factor)–Limit
2. Factor= Antenna factor+Cable attenuation factor(cable loss)-Amplifier gain
3. All modes have been tested,only show the worst case.

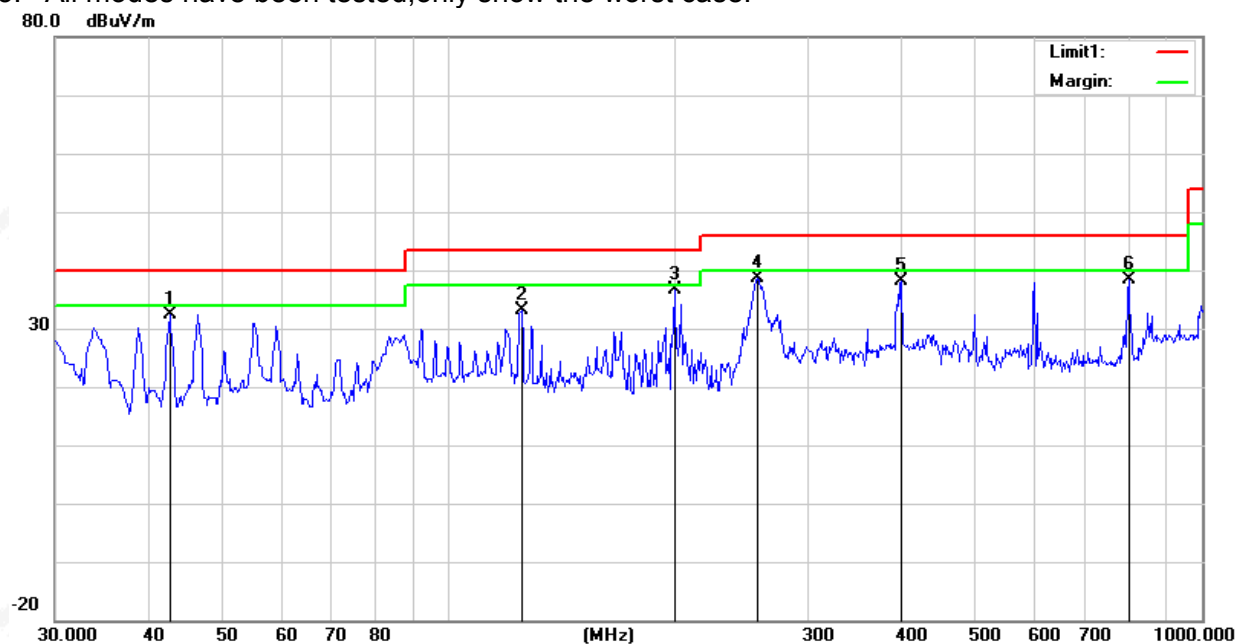



(1000MHz-25GHz) Spurious emission Requirements

802.11ax40

Frequency	Meter Reading	Amplifier	Loss	Antenna Factor	Corrected Factor	Emission Level	Limits	Margin	Detector	Comment
(MHz)	(dBμV)	(dB)	(dB)	(dB/m)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	Type	
Low Channel (802.11ax40/2422 MHz)										
3264.81	61.10	44.70	6.70	28.20	-9.80	51.30	74.00	-22.70	PK	Vertical
3264.81	50.00	44.70	6.70	28.20	-9.80	40.20	54.00	-13.80	AV	Vertical
3264.74	61.33	44.70	6.70	28.20	-9.80	51.53	74.00	-22.47	PK	Horizontal
3264.74	50.63	44.70	6.70	28.20	-9.80	40.83	54.00	-13.17	AV	Horizontal
4824.44	58.88	44.20	9.04	31.60	-3.56	55.32	74.00	-18.68	PK	Vertical
4824.44	49.13	44.20	9.04	31.60	-3.56	45.57	54.00	-8.43	AV	Vertical
4824.59	58.24	44.20	9.04	31.60	-3.56	54.68	74.00	-19.32	PK	Horizontal
4824.59	49.16	44.20	9.04	31.60	-3.56	45.60	54.00	-8.40	AV	Horizontal
5359.63	48.11	44.20	9.86	32.00	-2.34	45.77	74.00	-28.23	PK	Vertical
5359.63	39.33	44.20	9.86	32.00	-2.34	36.99	54.00	-17.01	AV	Vertical
5359.59	47.89	44.20	9.86	32.00	-2.34	45.55	74.00	-28.45	PK	Horizontal
5359.59	38.10	44.20	9.86	32.00	-2.34	35.76	54.00	-18.24	AV	Horizontal
7235.85	54.81	43.50	11.40	35.50	3.40	58.21	74.00	-15.79	PK	Vertical
7235.85	44.82	43.50	11.40	35.50	3.40	48.22	54.00	-5.78	AV	Vertical
7235.90	53.66	43.50	11.40	35.50	3.40	57.06	74.00	-16.94	PK	Horizontal
7235.90	43.51	43.50	11.40	35.50	3.40	46.91	54.00	-7.09	AV	Horizontal
Middle Channel (802.11ax40/2437 MHz)										
3264.64	62.22	44.70	6.70	28.20	-9.80	52.42	74.00	-21.58	PK	Vertical
3264.64	49.99	44.70	6.70	28.20	-9.80	40.19	54.00	-13.81	AV	Vertical
3264.82	62.21	44.70	6.70	28.20	-9.80	52.41	74.00	-21.59	PK	Horizontal
3264.82	50.63	44.70	6.70	28.20	-9.80	40.83	54.00	-13.17	AV	Horizontal
4874.58	58.98	44.20	9.04	31.60	-3.56	55.42	74.00	-18.58	PK	Vertical
4874.58	50.11	44.20	9.04	31.60	-3.56	46.55	54.00	-7.45	AV	Vertical
4874.44	59.28	44.20	9.04	31.60	-3.56	55.72	74.00	-18.28	PK	Horizontal
4874.44	49.78	44.20	9.04	31.60	-3.56	46.22	54.00	-7.78	AV	Horizontal
5359.72	49.19	44.20	9.86	32.00	-2.34	46.85	74.00	-27.15	PK	Vertical
5359.72	40.29	44.20	9.86	32.00	-2.34	37.95	54.00	-16.05	AV	Vertical
5359.82	47.75	44.20	9.86	32.00	-2.34	45.41	74.00	-28.59	PK	Horizontal
5359.82	39.43	44.20	9.86	32.00	-2.34	37.09	54.00	-16.91	AV	Horizontal
7310.86	54.53	43.50	11.40	35.50	3.40	57.93	74.00	-16.07	PK	Vertical
7310.86	43.73	43.50	11.40	35.50	3.40	47.13	54.00	-6.87	AV	Vertical
7310.91	54.17	43.50	11.40	35.50	3.40	57.57	74.00	-16.43	PK	Horizontal
7310.91	44.02	43.50	11.40	35.50	3.40	47.42	54.00	-6.58	AV	Horizontal



High Channel (802.11ax40/2452 MHz)										
3264.65	60.84	44.70	6.70	28.20	-9.80	51.04	74.00	-22.96	PK	Vertical
3264.65	51.04	44.70	6.70	28.20	-9.80	41.24	54.00	-12.76	AV	Vertical
3264.64	60.89	44.70	6.70	28.20	-9.80	51.09	74.00	-22.91	PK	Horizontal
3264.64	50.79	44.70	6.70	28.20	-9.80	40.99	54.00	-13.01	AV	Horizontal
4924.47	58.22	44.20	9.04	31.60	-3.56	54.66	74.00	-19.34	PK	Vertical
4924.47	49.42	44.20	9.04	31.60	-3.56	45.86	54.00	-8.14	AV	Vertical
4924.44	59.37	44.20	9.04	31.60	-3.56	55.81	74.00	-18.19	PK	Horizontal
4924.44	50.37	44.20	9.04	31.60	-3.56	46.81	54.00	-7.19	AV	Horizontal
5359.86	49.29	44.20	9.86	32.00	-2.34	46.95	74.00	-27.05	PK	Vertical
5359.86	40.11	44.20	9.86	32.00	-2.34	37.77	54.00	-16.23	AV	Vertical
5359.85	47.41	44.20	9.86	32.00	-2.34	45.07	74.00	-28.93	PK	Horizontal
5359.85	38.98	44.20	9.86	32.00	-2.34	36.64	54.00	-17.36	AV	Horizontal
7385.83	53.57	43.50	11.40	35.50	3.40	56.97	74.00	-17.03	PK	Vertical
7385.83	43.93	43.50	11.40	35.50	3.40	47.33	54.00	-6.67	AV	Vertical
7385.95	54.63	43.50	11.40	35.50	3.40	58.03	74.00	-15.97	PK	Horizontal
7385.95	44.67	43.50	11.40	35.50	3.40	48.07	54.00	-5.93	AV	Horizontal


Remark:

- Factor = Antenna Factor + Cable Loss – Pre-amplifier.
- Scan with 802.11b, 802.11g, 802.11n (HT-20), 802.11n (HT-40), 802.11ax(HE20), 802.11ax(HE40)
the worst case is 802.11ax(HE40).
Emission Level = Reading + Factor
Margin = Emission Level-Limit
- The frequency emission of peak points that did not show above the forms are at least 20dB below the limit, the frequency emission is mainly from the environment noise.

3.2.6 TEST RESULTS(Band edge Requirements)


802.11 ax40-Low

Horizontal

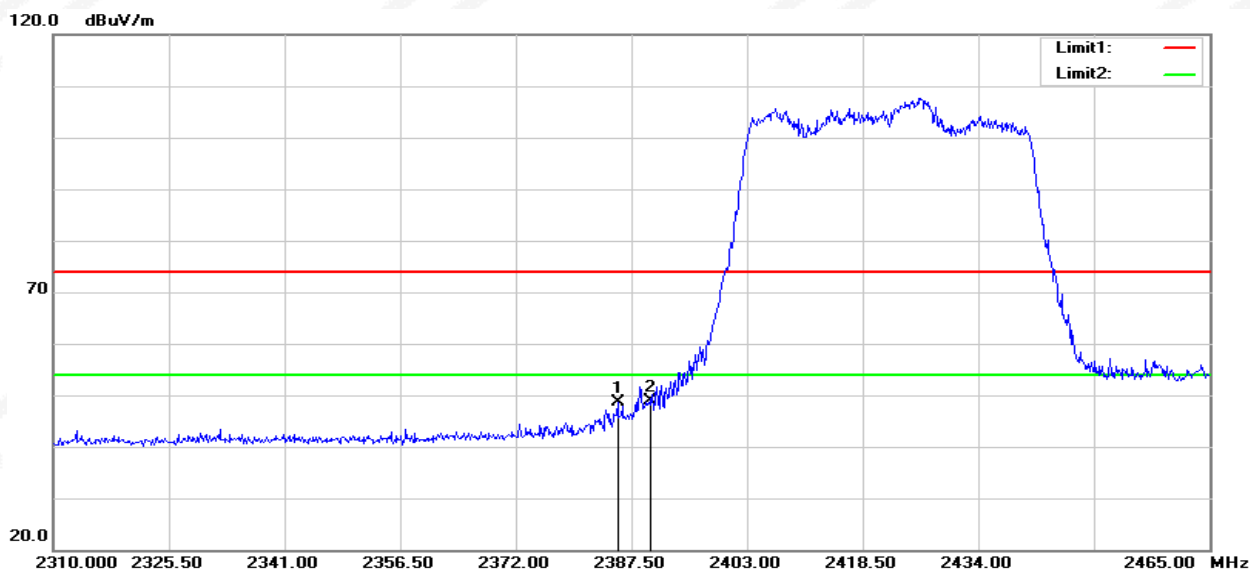

No.	Frequency (MHz)	Reading (dBuV)	Correct Factor(dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	2385.640	44.45	4.27	48.72	74.00	-25.28	peak
2	2390.000	44.51	4.34	48.85	74.00	-25.15	peak

Vertical

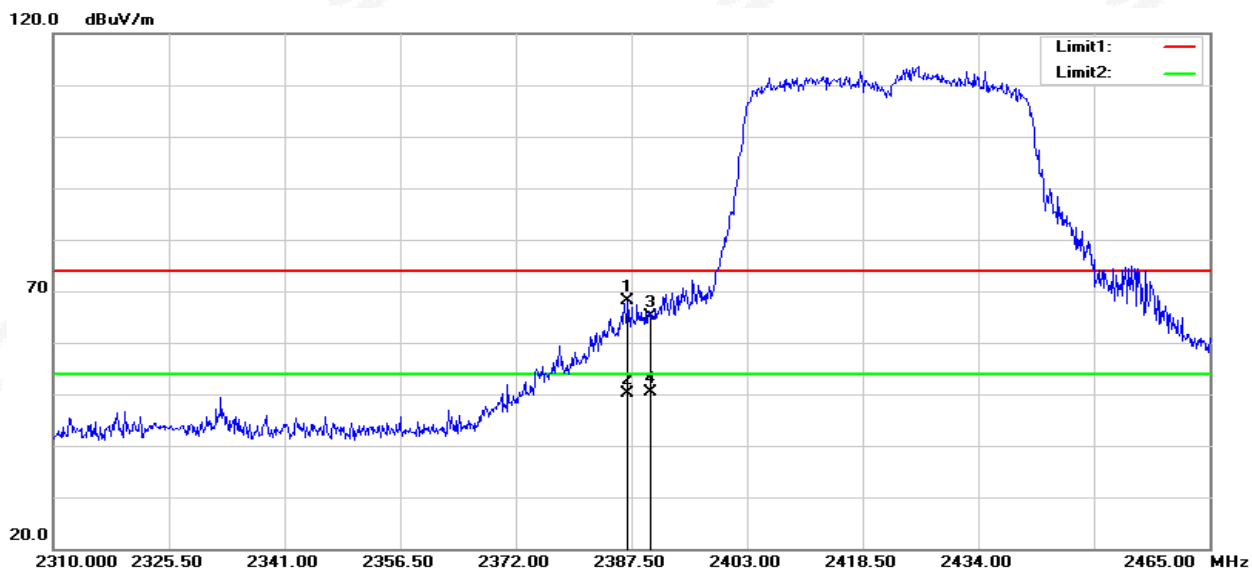


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor(dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	2387.035	63.84	4.30	68.14	74.00	-5.86	peak
2	2387.035	45.74	4.30	50.04	54.00	-3.96	AVG
3	2390.000	60.79	4.34	65.13	74.00	-8.87	peak
4	2390.000	46.04	4.34	50.38	54.00	-3.62	AVG




802.11 ax40-High

Horizontal

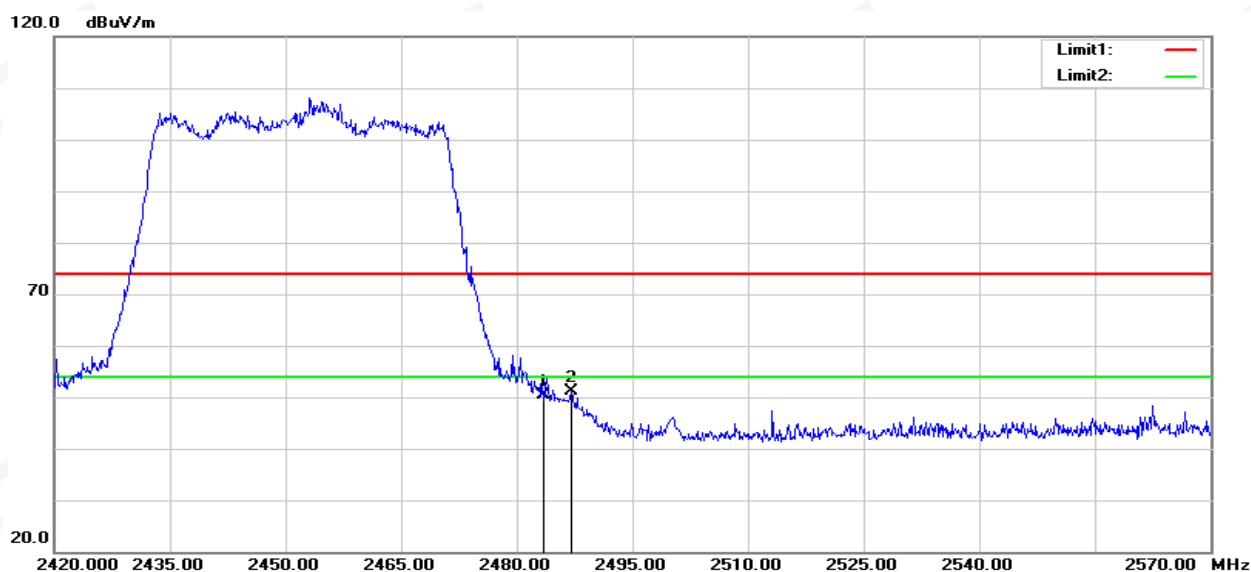

No.	Frequency (MHz)	Reading (dBuV)	Correct Factor(dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	2483.500	45.84	4.60	50.44	74.00	-23.56	peak
2	2487.050	46.56	4.62	51.18	74.00	-22.82	peak

Vertical

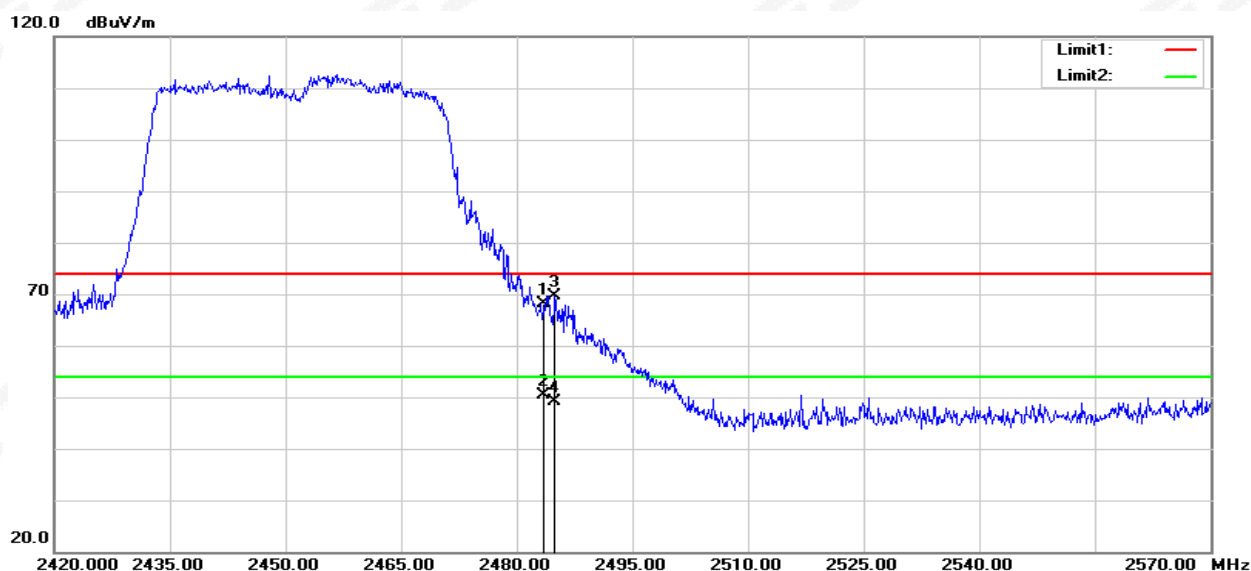

No.	Frequency (MHz)	Reading (dBuV)	Correct Factor(dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	2483.500	63.43	4.60	68.03	74.00	-5.97	peak
2	2483.500	45.72	4.60	50.32	54.00	-3.68	AVG
3	2484.950	65.10	4.61	69.71	74.00	-4.29	peak
4	2484.950	44.50	4.61	49.11	54.00	-4.89	AVG

Note: 802.11b, 802.11g, 802.11n (HT-20), 802.11n (HT-40), 802.11ax(HE20), 802.11ax(HE40) mode all have been tested, the worst case is 802.11 ax40, only show the worst case.

4. CONDUCTED SPURIOUS & BAND EDGE EMISSION

4.1 LIMIT

According to FCC section 15.247(d), in any 100kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20dB below that in the 100kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement.

4.2 TEST PROCEDURE

Spectrum Parameter	Setting
Detector	Peak
Start/Stop Frequency	30 MHz to 10th carrier harmonic
RB / VB (emission in restricted band)	100 KHz/300 KHz
Trace-Mode:	Max hold

For Band edge

Spectrum Parameter	Setting
Detector	Peak
Start/Stop Frequency	Lower Band Edge: 2300 to 2432 MHz Upper Band Edge: 2442 to 2500 MHz
RB / VB (emission in restricted band)	100 KHz/300 KHz
Trace-Mode:	Max hold

4.3 DEVIATION FROM STANDARD

No deviation.

4.4 TEST SETUP



The EUT is connected to the Spectrum Analyzer; the RF load attached to the EUT antenna terminal is 50Ohm; the path loss as the factor is calibrated to correct the reading.

Make the measurement with the spectrum analyzer's resolution bandwidth (RBW) = 100 kHz. In order to make an accurate measurement, set the span greater than RBW.

4.5 EUT OPERATION CONDITIONS

Please refer to section 3.1.4 of this report.

4.6 TEST RESULTS

Note: The test data please refer to APPENDIX 1.

5. POWER SPECTRAL DENSITY TEST

5.1 LIMIT

FCC Part15.247 , Subpart C				
Section	Test Item	Limit	Frequency Range (MHz)	Result
15.247(e)	Power Spectral Density	$\leq 8 \text{ dBm}$ (RBW $\geq 3 \text{ KHz}$)	2400-2483.5	PASS


5.2 TEST PROCEDURE

1. Set analyzer center frequency to DTS channel center frequency.
2. Set the span to 1.5 times the DTS channel bandwidth.
3. Set the $100 \text{ kHz} \geq \text{RBW} \geq 3 \text{ kHz}$.
4. Set the $\text{VBW} \geq 3 \times \text{RBW}$.
5. Detector = peak.
6. Sweep time = auto couple.
7. Trace mode = max hold.
8. Allow trace to fully stabilize.
9. Use the peak marker function to determine the maximum amplitude level.
10. If measured value exceeds limit, reduce RBW (no less than 3 kHz) and repeat.

5.3 DEVIATION FROM STANDARD

No deviation.

5.4 TEST SETUP

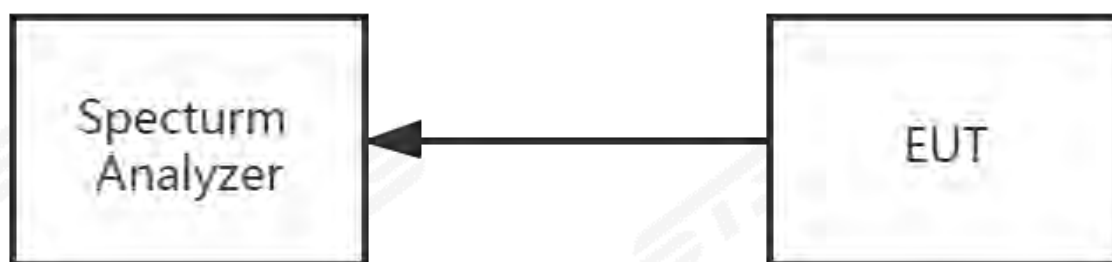

5.5 EUT OPERATION CONDITIONS

Please refer to section 3.1.4 of this report.

5.6 TEST RESULTS

Note: The test data please refer to APPENDIX 1.

6. BANDWIDTH TEST

6.1 LIMIT

FCC Part15.247,Subpart C				
Section	Test Item	Limit	Frequency Range (MHz)	Result
15.247(a)(2)	Bandwidth	$\geq 500\text{KHz}$ (6dB bandwidth)	2400-2483.5	PASS

6.2 TEST PROCEDURE

The automatic bandwidth measurement capability of an instrument may be employed using the X dB bandwidth mode with X set to 6 dB, if the functionality described above (i.e., RBW = 100 kHz, VBW $\geq$ 3RBW, peak detector with maximum hold) is implemented by the instrumentation function. When using this capability, care shall be taken so that the bandwidth measurement is not influenced by any intermediate power nulls in the fundamental emission that might be $\geq$ 6 dB.

6.3 DEVIATION FROM STANDARD

No deviation.

6.4 TEST SETUP



6.5 EUT OPERATION CONDITIONS

Please refer to section 3.1.4 of this report.

6.6 TEST RESULTS

Note: The test data please refer to APPENDIX 1.



7. PEAK OUTPUT POWER TEST

7.1 LIMIT

FCC Part15.247,Subpart C				
Section	Test Item	Limit	Frequency Range (MHz)	Result
15.247(b)(3)	Output Power	1 watt or 30dBm	2400-2483.5	PASS

7.2 TEST PROCEDURE

One of the following procedures may be used to determine the averaging conducted output power of a DTS EUT.

Method AVGSA-2 uses trace averaging across ON and OFF times of the EUT transmissions, followed by duty cycle correction. The procedure for this method is as follows:

- Measure the duty cycle D of the transmitter output signal as described in 11.6.
- Set span to at least 1.5 times the OBW.
- Set RBW = 1% to 5% of the OBW, not to exceed 1 MHz.
- Set VBW $\geq [3 \times \text{RBW}]$.
- Number of points in sweep $\geq [2 \times \text{span} / \text{RBW}]$. (This gives bin-to-bin spacing $\leq \text{RBW} / 2$, so that narrowband signals are not lost between frequency bins.)
- Sweep time = auto.
- Detector = RMS (i.e., power averaging), if available. Otherwise, use the sample detector mode.
- Do not use sweep triggering. Allow the sweep to "free run."
- Trace average at least 100 traces in power averaging (rms) mode; however, the number of traces to be averaged shall be increased above 100 as needed such that the average accurately represents the true average over the ON and OFF periods of the transmitter.
- Compute power by integrating the spectrum across the OBW of the signal using the instrument's band power measurement function with band limits set equal to the OBW band edges. If the instrument does not have a band power function, then sum the spectrum levels (in power units) at intervals equal to the RBW extending across the entire OBW of the spectrum.
- Add $[10 \log (1 / D)]$, where D is the duty cycle, to the measured power to compute the average power during the actual transmission times (because the measurement represents an average over both the ON and OFF times of the transmission). For example, add $[10 \log (1/0.25)] = 6 \text{ dB}$ if the duty cycle is 25%.

Integrated band power method:

The following procedure can be used when the maximum available RBW of the instrument is less than the

DTS bandwidth:

- Set the RBW = 1 MHz.
- Set the VBW $\geq [3 \times \text{RBW}]$.
- Set the span $\geq [1.5 \times \text{DTS bandwidth}]$.
- Detector = peak.
- Sweep time = auto couple.
- Trace mode = max hold.
- Allow trace to fully stabilize.
- Use the instrument's band/channel power measurement function with the band limits set equal to the DTS bandwidth edges (for some instruments, this may require a manual override to select the peak detector). If the instrument does not have a band power function, then sum the spectrum levels (in linear power units) at intervals equal to the RBW extending across the DTS channel bandwidth.


PKPM1 Peak power meter method:

The maximum peak conducted output power may be measured using a broadband peak RF power meter. The power meter shall have a video bandwidth that is greater than or equal to the DTS bandwidth and shall use a fast-responding diode detector.

7.3 DEVIATION FROM STANDARD

No deviation.

7.4 TEST SETUP

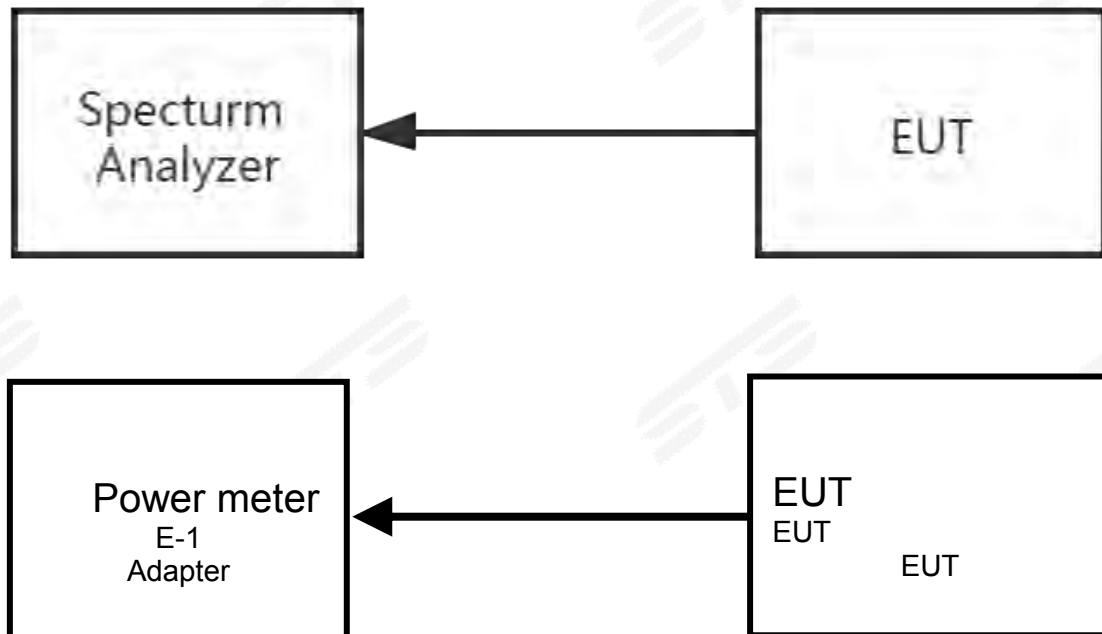

7.5 EUT OPERATION CONDITIONS

Please refer to section 3.1.4 of this report.

7.6 TEST RESULTS

Note: The test data please refer to APPENDIX 1.

8. ANTENNA REQUIREMENT

8.1 STANDARD REQUIREMENT

15.203 requirement: For intentional device, according to 15.203: an intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device.

8.2 EUT ANTENNA


The EUT antenna is Omni Antenna. It comply with the standard requirement.




APPENDIX 1-TEST DATA

1. Duty Cycle


Condition	Mode	Frequency (MHz)	Antenna	Duty Cycle (%)	Correction Factor (dB)	1/T (kHz)
NVNT	ax20	2412	Sum	80.19	0.96	0.18
NVNT	ax20	2437	Sum	80.31	0.95	0.18
NVNT	ax20	2462	Sum	80.28	0.95	0.18
NVNT	ax40	2422	Sum	80.12	0.96	0.18
NVNT	ax40	2437	Sum	80.21	0.96	0.18
NVNT	ax40	2452	Sum	80.12	0.96	0.18
NVNT	b	2412	Sum	21.89	6.6	1.5
NVNT	b	2437	Sum	21.7	6.64	1.51
NVNT	b	2462	Sum	21.76	6.62	1.5
NVNT	g	2412	Sum	96.35	0.16	0.51
NVNT	g	2437	Sum	96.2	0.17	0.51
NVNT	g	2462	Sum	96.2	0.17	0.51
NVNT	n20	2412	Sum	80.14	0.96	0.18
NVNT	n20	2437	Sum	80.14	0.96	0.18
NVNT	n20	2462	Sum	80.14	0.96	0.18
NVNT	n40	2422	Sum	80.01	0.97	0.18
NVNT	n40	2437	Sum	80.14	0.96	0.18
NVNT	n40	2452	Sum	80.14	0.96	0.18

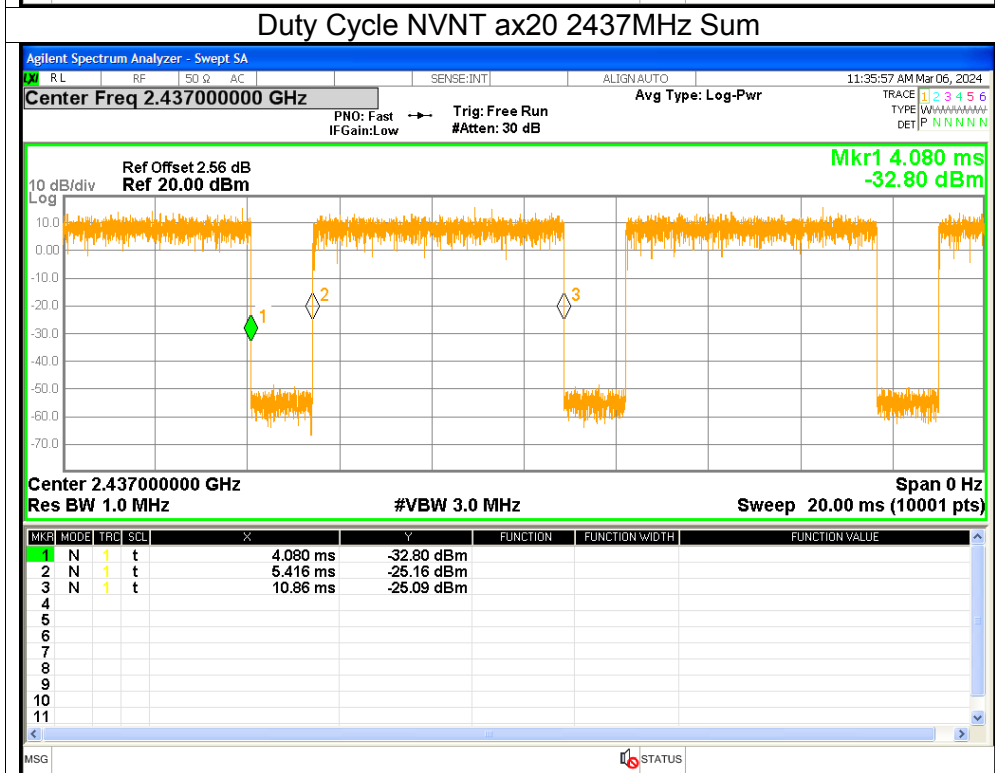



Duty Cycle NVNT ax20 2462MHz Sum

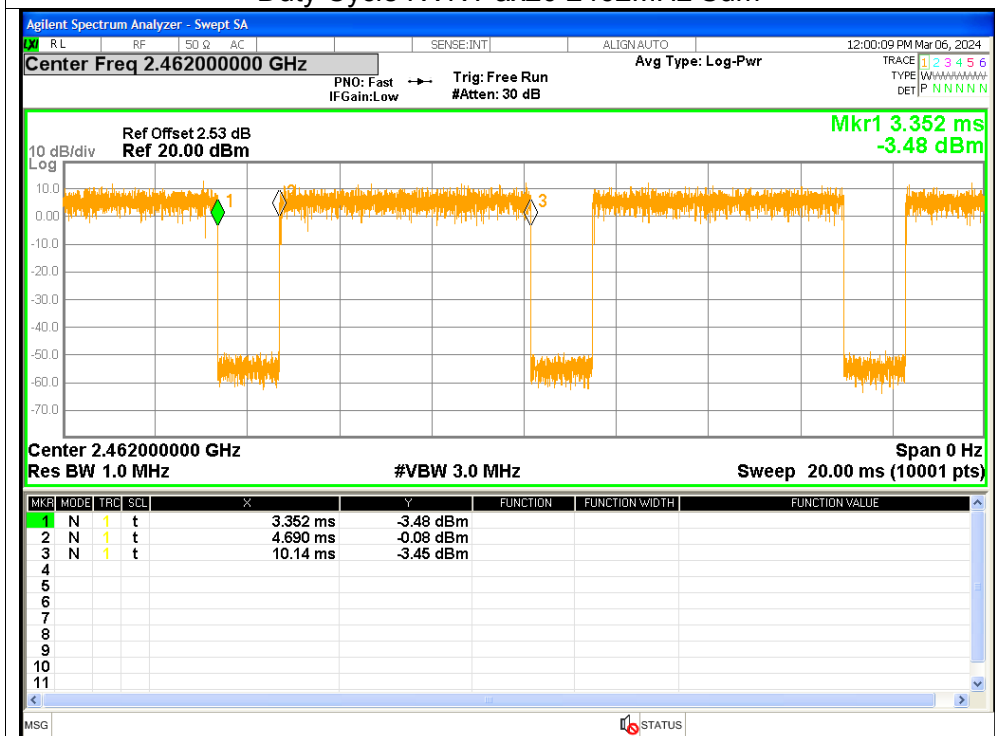


Duty Cycle NVNT ax40 2422MHz Sum

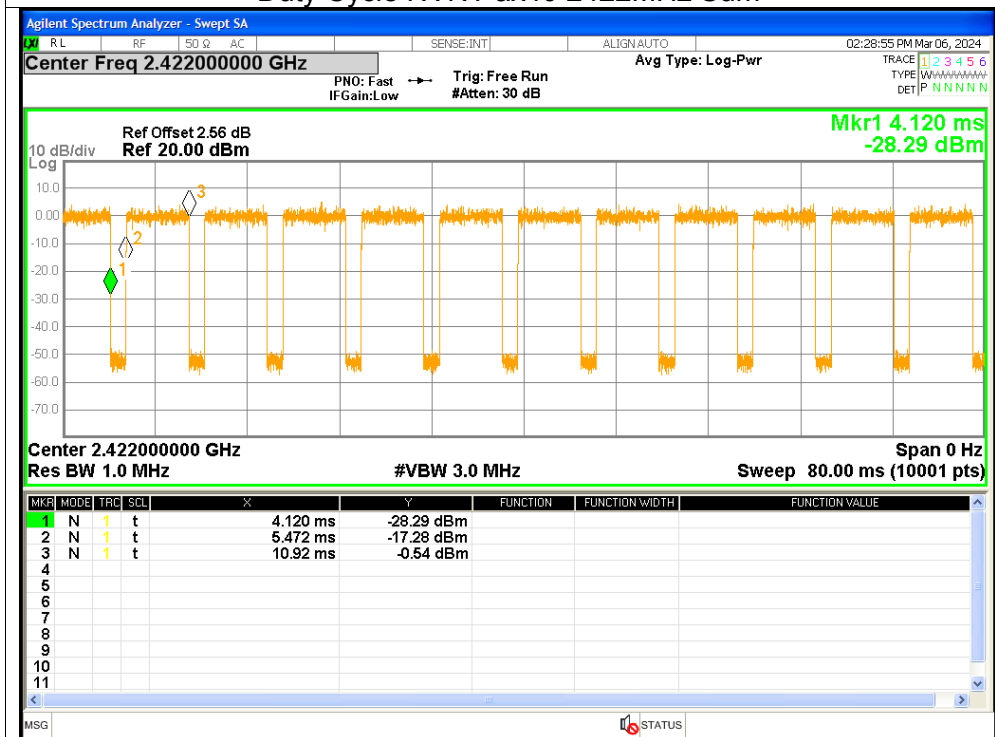

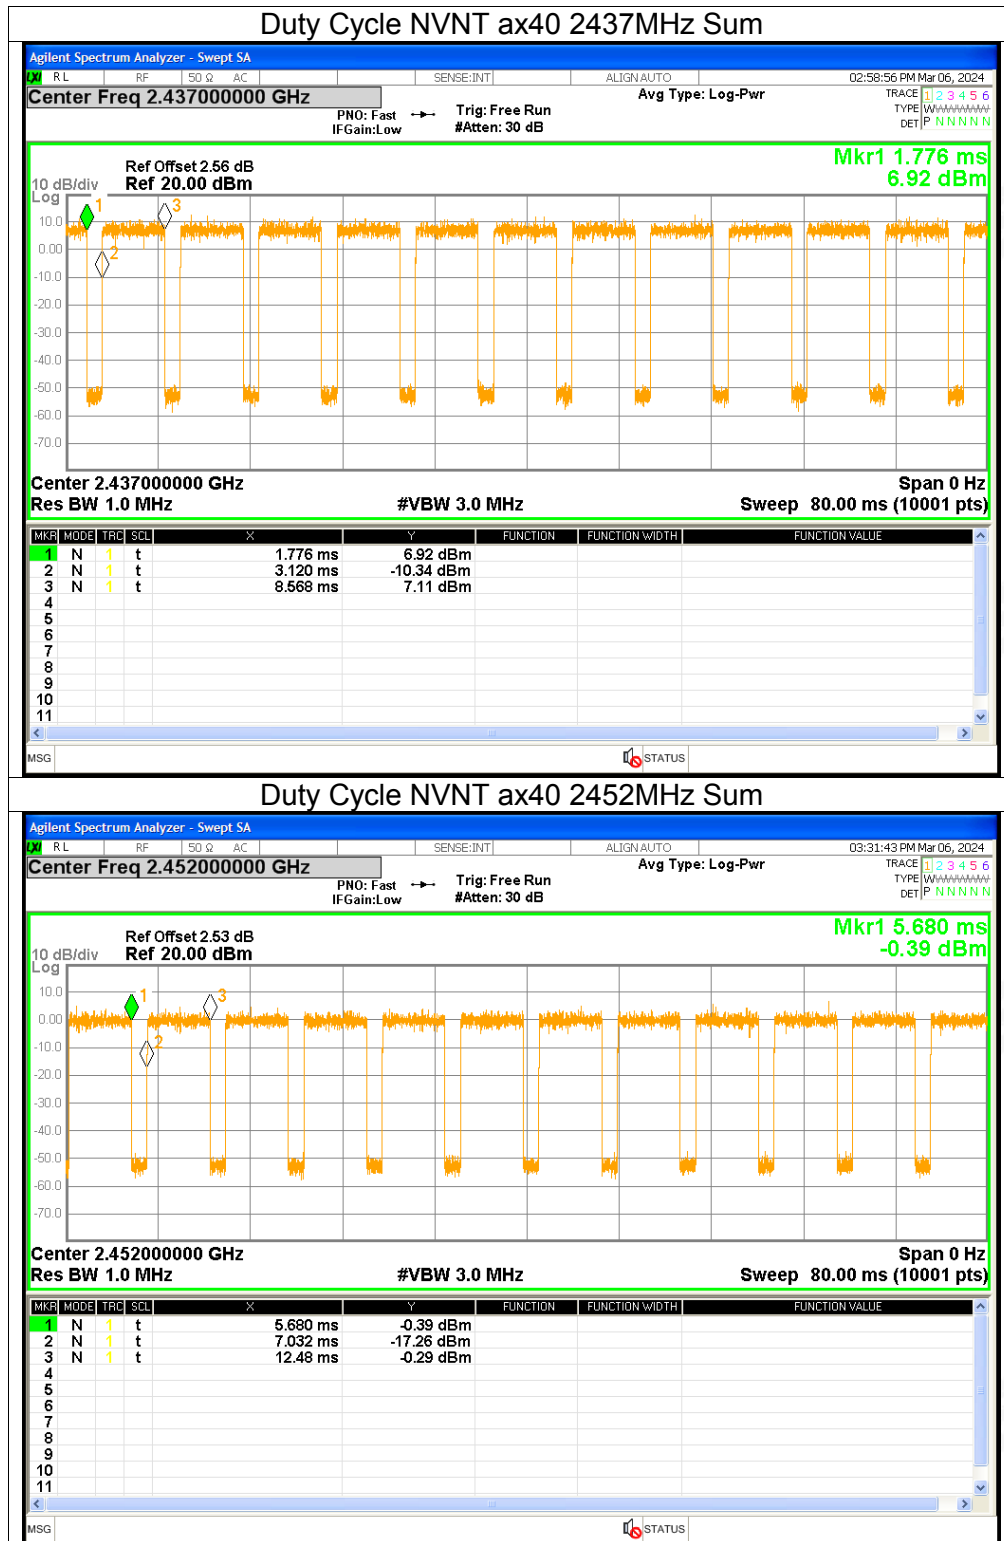


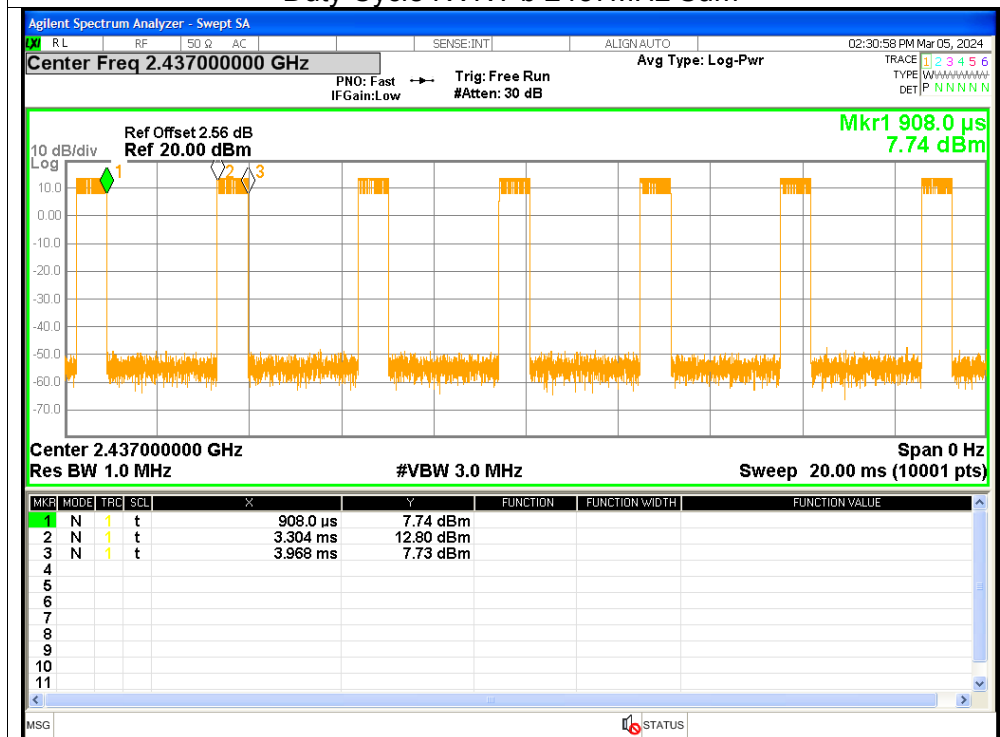


Duty Cycle NVNT b 2462MHz Sum

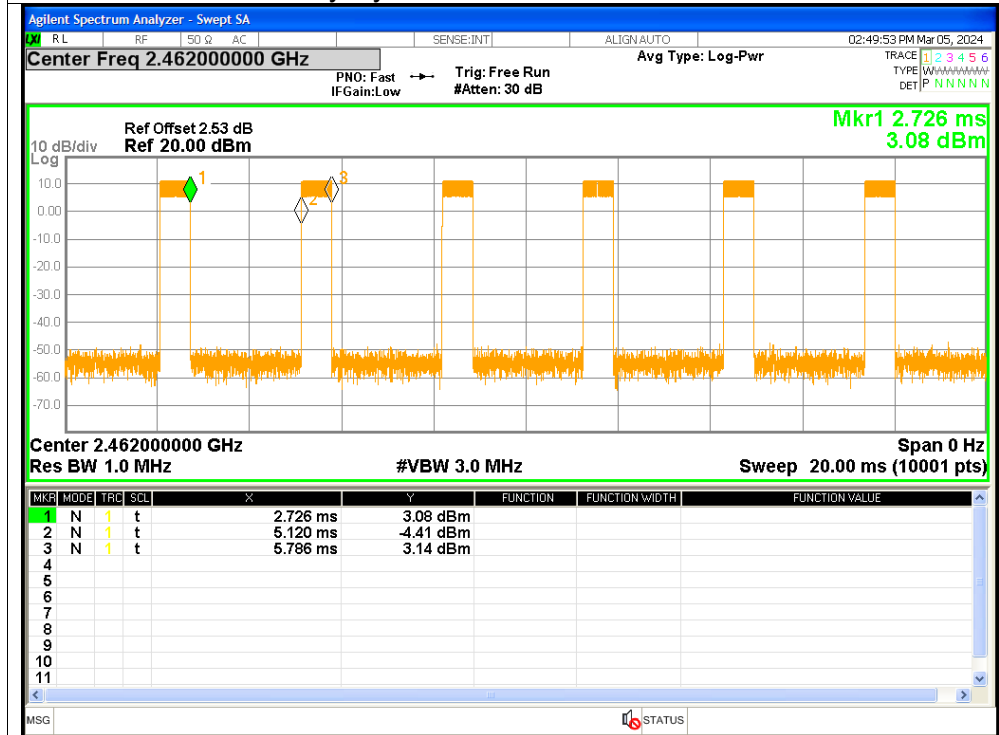



Duty Cycle NVNT g 2412MHz Sum

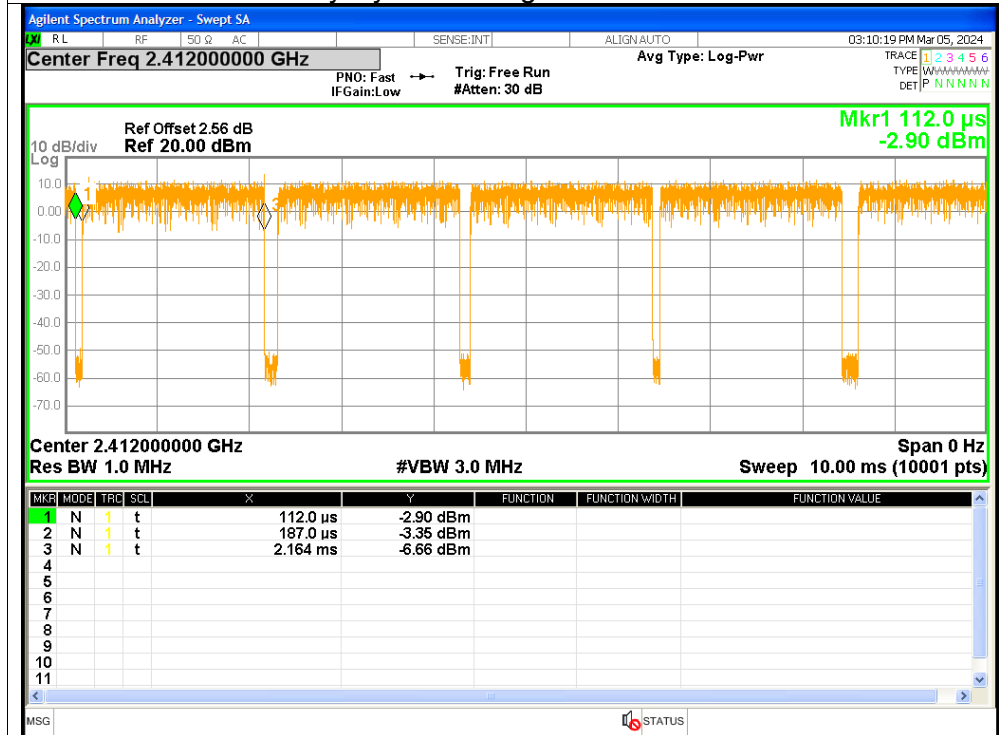

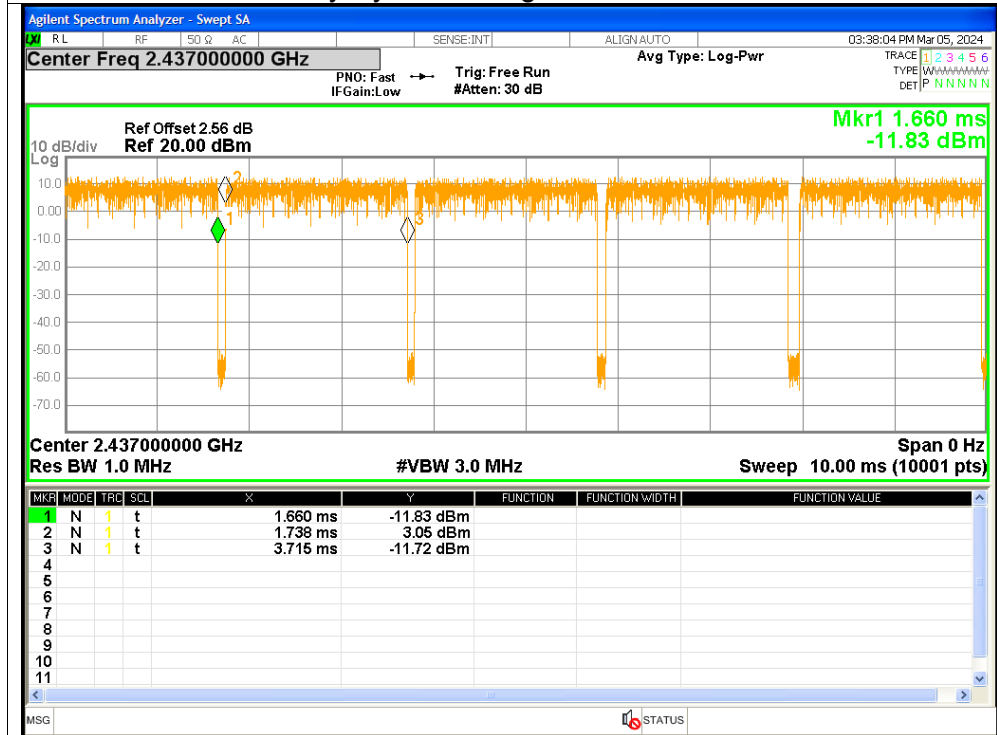
[illegible]

Duty Cycle NVNT g 2462MHz Sum

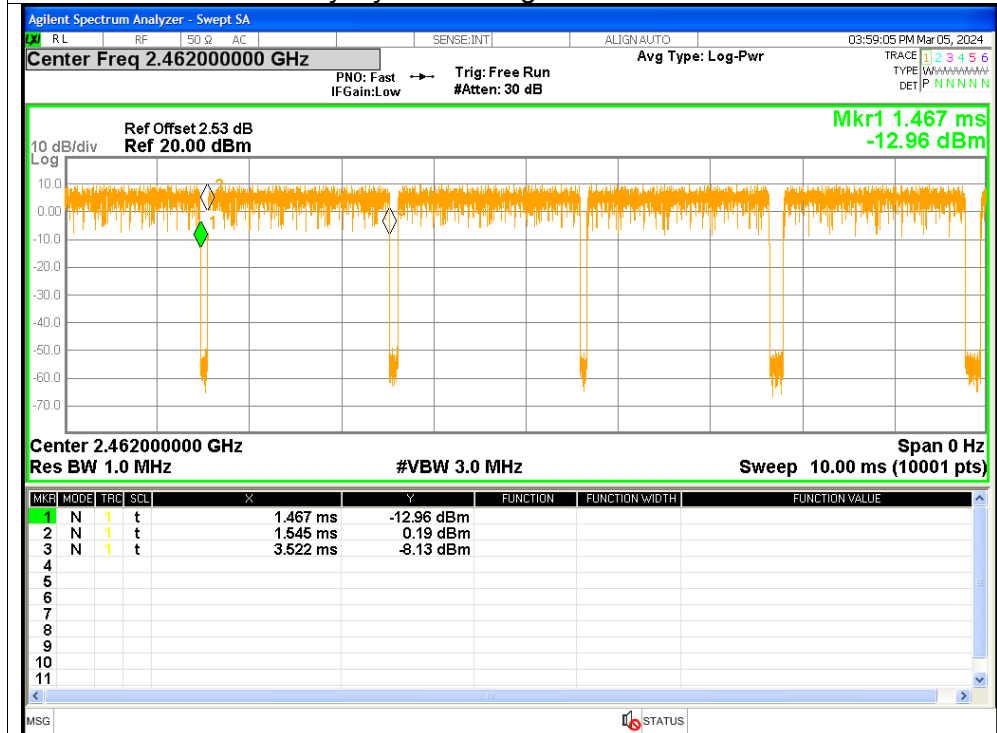


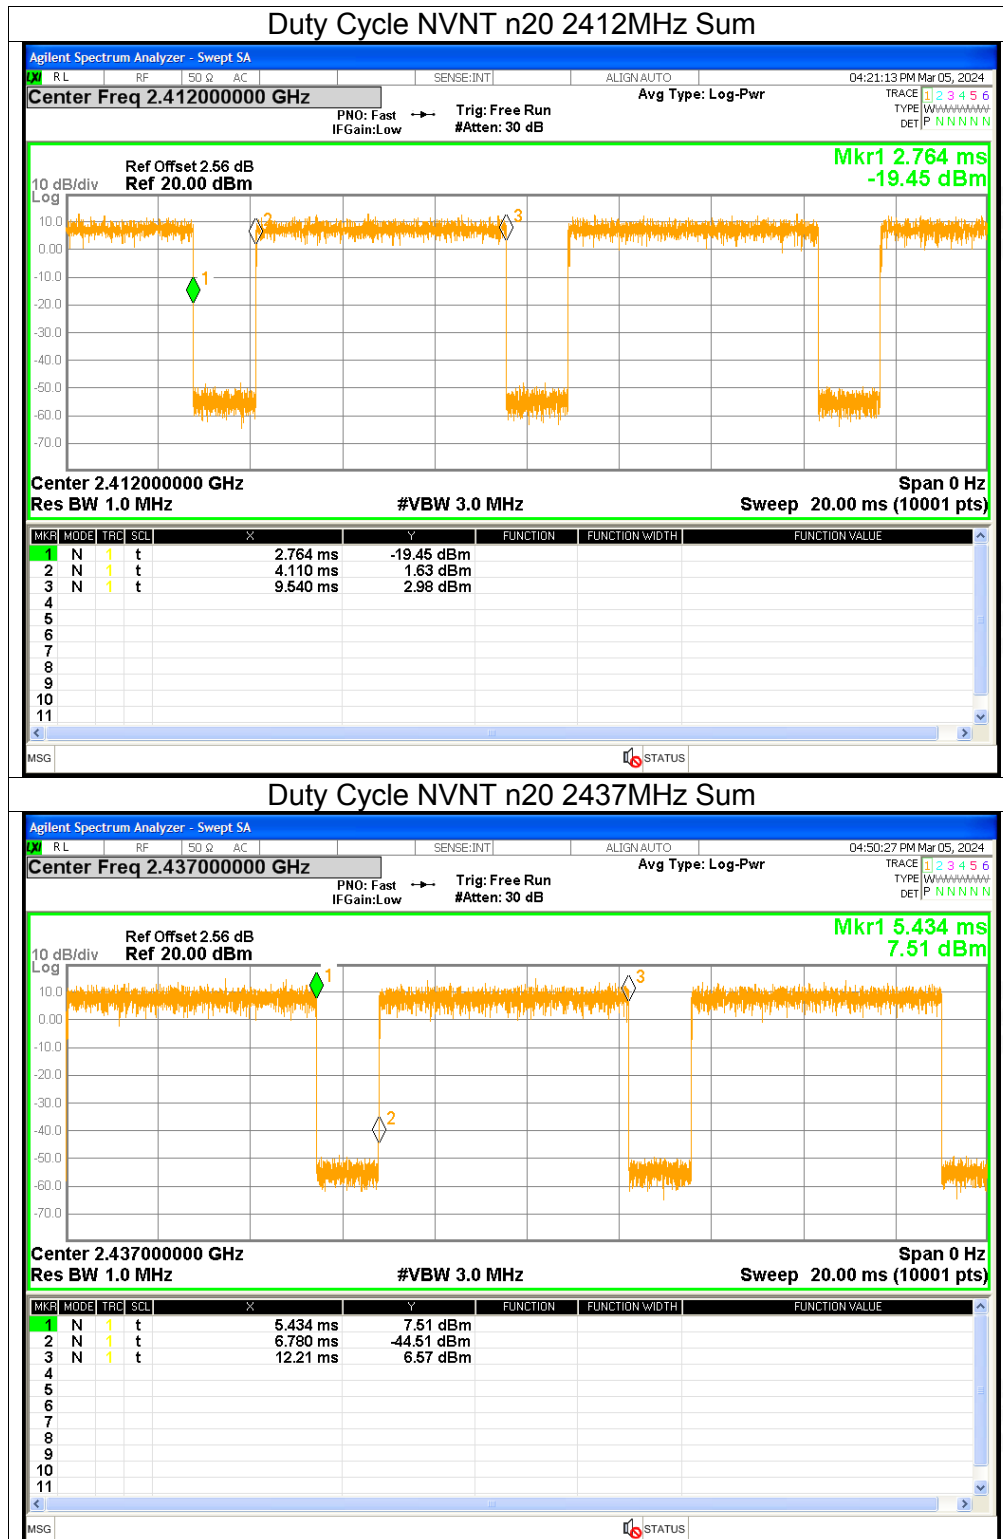


Duty Cycle NVNT n20 2462MHz Sum									
0	0	0	0	0	0	0	0	0	0
1	0	0	0	0	0	0	0	0	0
2	0	0	0	0	0	0	0	0	0
3	0	0	0	0	0	0	0	0	0
4	0	0	0	0	0	0	0	0	0
5	0	0	0	0	0	0	0	0	0
6	0	0	0	0	0	0	0	0	0
7	0	0	0	0	0	0	0	0	0
8	0	0	0	0	0	0	0	0	0
9	0	0	0	0	0	0	0	0	0
10	0	0	0	0	0	0	0	0	0
11	0	0	0	0	0	0	0	0	0
12	0	0	0	0	0	0	0	0	0
13	0	0	0	0	0	0	0	0	0
14	0	0	0	0	0	0	0	0	0
15	0	0	0	0	0	0	0	0	0
16	0	0	0	0	0	0	0	0	0
17	0	0	0	0	0	0	0	0	0
18	0	0	0	0	0	0	0	0	0
19	0	0	0	0	0	0	0	0	0
20	0	0	0	0	0	0	0	0	0
21	0	0	0	0	0	0	0	0	0
22	0	0	0	0	0	0	0	0	0
23	0	0	0	0	0	0	0	0	0
24	0	0	0	0	0	0	0	0	0
25	0	0	0	0	0	0	0	0	0
26	0	0	0	0	0	0	0	0	0
27	0	0	0	0	0	0	0	0	0
28	0	0	0	0	0	0	0	0	0
29	0	0	0	0	0	0	0	0	0
30	0	0	0	0	0	0	0	0	0
31	0	0	0	0	0	0	0	0	0
32	0	0	0	0	0	0	0	0	0
33	0	0	0	0	0	0	0	0	0
34	0	0	0	0	0	0	0	0	0
35	0	0	0	0	0	0	0	0	0
36	0	0	0	0	0	0	0	0	0
37	0	0	0	0	0	0	0	0	0
38	0	0	0	0	0	0	0	0	0
39	0	0	0	0	0	0	0	0	0
40	0	0	0	0	0	0	0	0	0
41	0	0	0	0	0	0	0	0	0
42	0	0	0	0	0	0	0	0	0
43	0	0	0	0	0	0	0	0	0
44	0	0	0	0	0	0	0	0	0
45	0	0	0	0	0	0	0	0	0
46	0	0	0	0	0	0	0	0	0
47	0	0	0	0	0	0	0	0	0
48	0	0	0	0	0	0	0	0	0
49	0	0	0	0	0	0	0	0	0
50	0	0	0	0	0	0	0	0	0
51	0	0	0	0	0	0	0	0	0

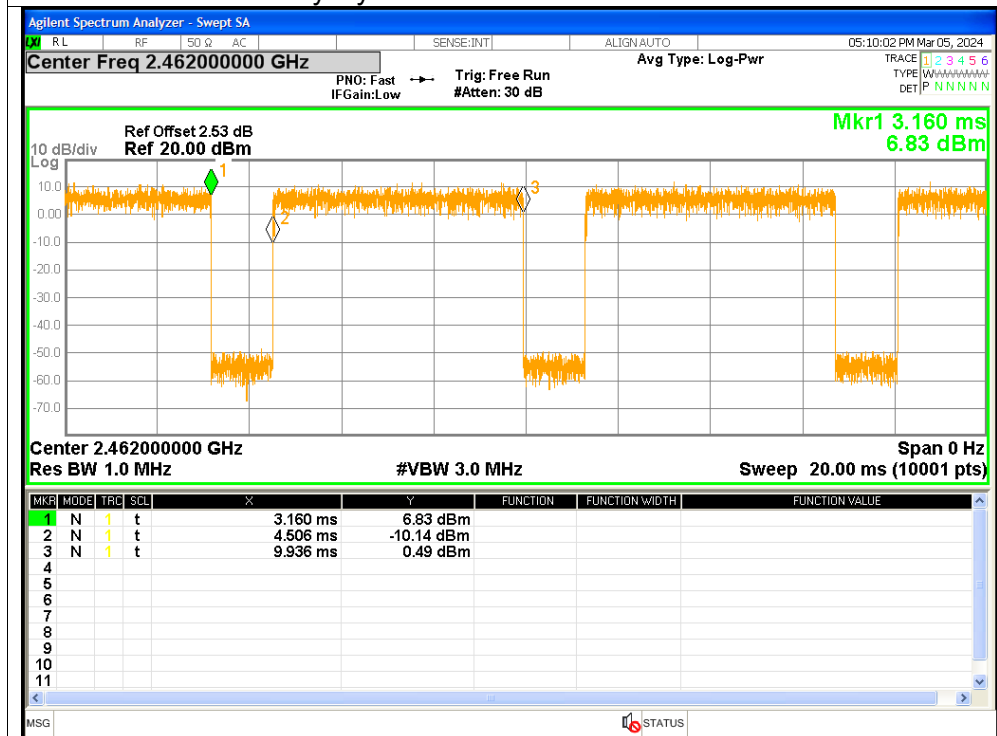


Duty Cycle NVNT n40 2422MHz Sum

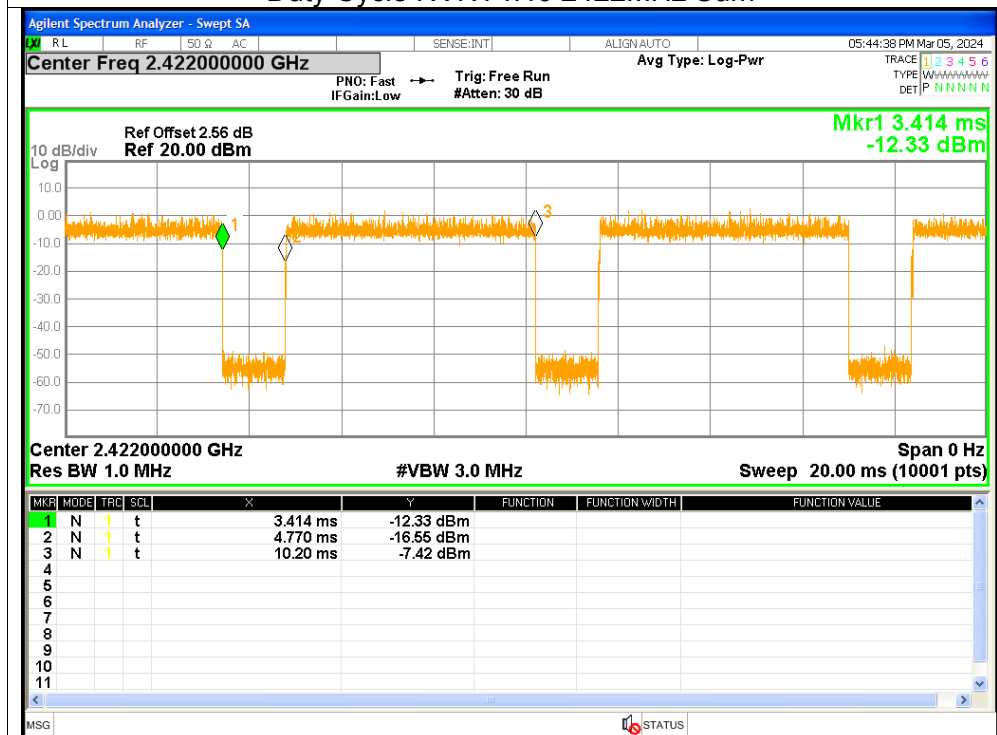

Duty Cycle NVNT n40 2437MHz Sum

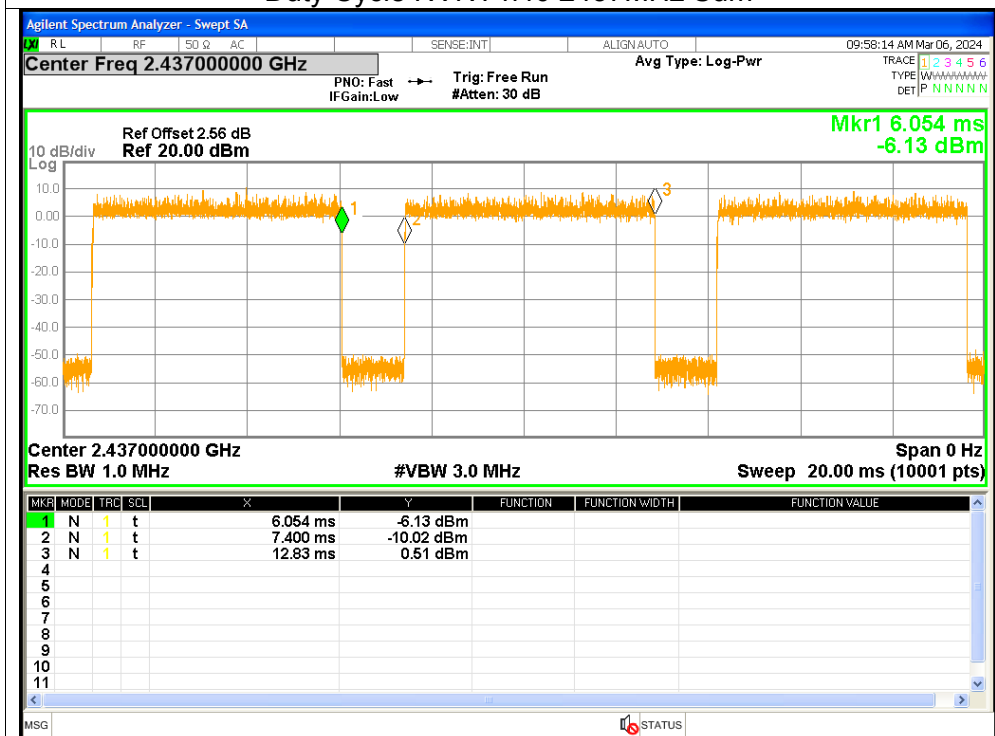

Duty Cycle NVNT n40 2452MHz Sum

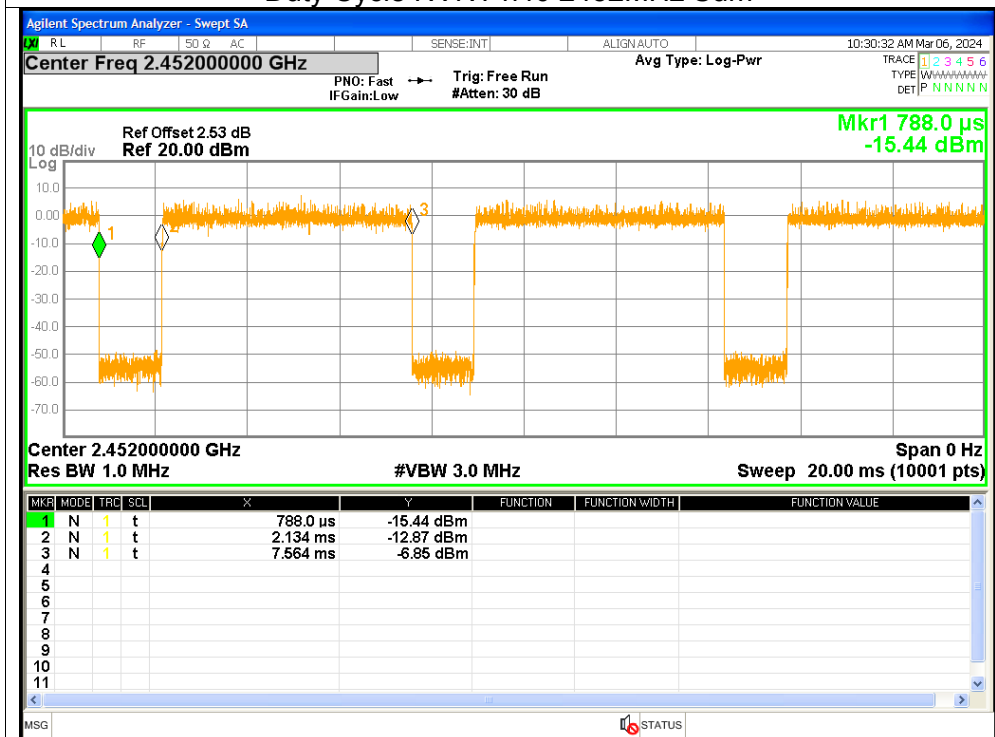



2. Maximum Average Conducted Output Power

Condition	Mode	Frequency (MHz)	Antenna	Conducted Power (dBm)	Duty Factor (dB)	Total Power (dBm)	Limit (dBm)	Verdict
NVNT	ax20	2412	Ant1	14.31	0.96	15.27	<=30	Pass
NVNT	ax20	2412	Ant2	14.47	0.96	15.43	<=30	Pass
NVNT	ax20	2412	Ant3	14.14	0.96	15.1	<=30	Pass
NVNT	ax20	2412	Ant4	14.3	0.96	15.26	<=30	Pass
NVNT	ax20	2412	Sum	20.33	0.96	21.29	<=25.54	Pass
NVNT	ax20	2437	Ant1	17.15	0.95	18.1	<=30	Pass
NVNT	ax20	2437	Ant2	17.42	0.95	18.37	<=30	Pass
NVNT	ax20	2437	Ant3	17.1	0.95	18.05	<=30	Pass
NVNT	ax20	2437	Ant4	16.51	0.95	17.46	<=30	Pass
NVNT	ax20	2437	Sum	23.08	0.95	24.03	<=25.54	Pass
NVNT	ax20	2462	Ant1	12.91	0.95	13.86	<=30	Pass
NVNT	ax20	2462	Ant2	12.28	0.95	13.23	<=30	Pass
NVNT	ax20	2462	Ant3	12.22	0.95	13.17	<=30	Pass
NVNT	ax20	2462	Ant4	12.67	0.95	13.62	<=30	Pass
NVNT	ax20	2462	Sum	18.55	0.95	19.5	<=25.54	Pass
NVNT	ax40	2422	Ant1	10.66	0.96	11.62	<=30	Pass
NVNT	ax40	2422	Ant2	10.34	0.96	11.3	<=30	Pass
NVNT	ax40	2422	Ant3	10.24	0.96	11.2	<=30	Pass
NVNT	ax40	2422	Ant4	10.23	0.96	11.19	<=30	Pass
NVNT	ax40	2422	Sum	16.39	0.96	17.35	<=25.54	Pass
NVNT	ax40	2437	Ant1	17.5	0.96	18.46	<=30	Pass
NVNT	ax40	2437	Ant2	17.46	0.96	18.42	<=30	Pass
NVNT	ax40	2437	Ant3	17.43	0.96	18.39	<=30	Pass
NVNT	ax40	2437	Ant4	17.27	0.96	18.23	<=30	Pass
NVNT	ax40	2437	Sum	23.44	0.96	24.4	<=25.54	Pass
NVNT	ax40	2452	Ant1	10.58	0.96	11.54	<=30	Pass
NVNT	ax40	2452	Ant2	10.66	0.96	11.62	<=30	Pass
NVNT	ax40	2452	Ant3	10.66	0.96	11.62	<=30	Pass
NVNT	ax40	2452	Ant4	9.75	0.96	10.71	<=30	Pass
NVNT	ax40	2452	Sum	16.45	0.96	17.41	<=25.54	Pass
NVNT	b	2412	Ant1	10.9	6.6	17.5	<=30	Pass
NVNT	b	2412	Ant2	10.03	6.6	16.63	<=30	Pass
NVNT	b	2412	Ant3	9.62	6.6	16.22	<=30	Pass
NVNT	b	2412	Ant4	10.31	6.6	16.91	<=30	Pass
NVNT	b	2412	Sum	16.26	6.6	22.86	<=25.54	Pass
NVNT	b	2437	Ant1	11.67	6.64	18.31	<=30	Pass
NVNT	b	2437	Ant2	11.88	6.64	18.52	<=30	Pass
NVNT	b	2437	Ant3	11.56	6.64	18.2	<=30	Pass
NVNT	b	2437	Ant4	11.6	6.64	18.24	<=30	Pass
NVNT	b	2437	Sum	17.7	6.64	24.34	<=25.54	Pass
NVNT	b	2462	Ant1	9.25	6.62	15.87	<=30	Pass
NVNT	b	2462	Ant2	9.12	6.62	15.74	<=30	Pass
NVNT	b	2462	Ant3	8.65	6.62	15.27	<=30	Pass
NVNT	b	2462	Ant4	8.1	6.62	14.72	<=30	Pass
NVNT	b	2462	Sum	14.82	6.62	21.44	<=25.54	Pass
NVNT	g	2412	Ant1	16.76	0.16	16.92	<=30	Pass
NVNT	g	2412	Ant2	16.64	0.16	16.8	<=30	Pass
NVNT	g	2412	Ant3	16.46	0.16	16.62	<=30	Pass
NVNT	g	2412	Ant4	16.39	0.16	16.55	<=30	Pass
NVNT	g	2412	Sum	22.59	0.16	22.75	<=25.54	Pass
NVNT	g	2437	Ant1	18.02	0.17	18.19	<=30	Pass




NVNT	g	2437	Ant2	17.99	0.17	18.16	<=30	Pass
NVNT	g	2437	Ant3	17.79	0.17	17.96	<=30	Pass
NVNT	g	2437	Ant4	17.4	0.17	17.57	<=30	Pass
NVNT	g	2437	Sum	23.83	0.17	24	<=25.54	Pass
NVNT	g	2462	Ant1	15.51	0.17	15.68	<=30	Pass
NVNT	g	2462	Ant2	15.4	0.17	15.57	<=30	Pass
NVNT	g	2462	Ant3	15.14	0.17	15.31	<=30	Pass
NVNT	g	2462	Ant4	14.71	0.17	14.88	<=30	Pass
NVNT	g	2462	Sum	21.22	0.17	21.39	<=25.54	Pass
NVNT	n20	2412	Ant1	14.53	0.96	15.49	<=30	Pass
NVNT	n20	2412	Ant2	14.3	0.96	15.26	<=30	Pass
NVNT	n20	2412	Ant3	13.93	0.96	14.89	<=30	Pass
NVNT	n20	2412	Ant4	14.12	0.96	15.08	<=30	Pass
NVNT	n20	2412	Sum	20.25	0.96	21.21	<=25.54	Pass
NVNT	n20	2437	Ant1	17.42	0.96	18.38	<=30	Pass
NVNT	n20	2437	Ant2	17.28	0.96	18.24	<=30	Pass
NVNT	n20	2437	Ant3	16.98	0.96	17.94	<=30	Pass
NVNT	n20	2437	Ant4	16.7	0.96	17.66	<=30	Pass
NVNT	n20	2437	Sum	23.12	0.96	24.08	<=25.54	Pass
NVNT	n20	2462	Ant1	13.17	0.96	14.13	<=30	Pass
NVNT	n20	2462	Ant2	12.02	0.96	12.98	<=30	Pass
NVNT	n20	2462	Ant3	12.19	0.96	13.15	<=30	Pass
NVNT	n20	2462	Ant4	12.49	0.96	13.45	<=30	Pass
NVNT	n20	2462	Sum	18.51	0.96	19.47	<=25.54	Pass
NVNT	n40	2422	Ant1	10.37	0.97	11.34	<=30	Pass
NVNT	n40	2422	Ant2	10.19	0.97	11.16	<=30	Pass
NVNT	n40	2422	Ant3	10.01	0.97	10.98	<=30	Pass
NVNT	n40	2422	Ant4	9.73	0.97	10.7	<=30	Pass
NVNT	n40	2422	Sum	16.1	0.97	17.07	<=25.54	Pass
NVNT	n40	2437	Ant1	17.33	0.96	18.29	<=30	Pass
NVNT	n40	2437	Ant2	17.04	0.96	18	<=30	Pass
NVNT	n40	2437	Ant3	17.35	0.96	18.31	<=30	Pass
NVNT	n40	2437	Ant4	16.91	0.96	17.87	<=30	Pass
NVNT	n40	2437	Sum	23.18	0.96	24.14	<=25.54	Pass
NVNT	n40	2452	Ant1	10.47	0.96	11.43	<=30	Pass
NVNT	n40	2452	Ant2	10.38	0.96	11.34	<=30	Pass
NVNT	n40	2452	Ant3	10.53	0.96	11.49	<=30	Pass
NVNT	n40	2452	Ant4	9.61	0.96	10.57	<=30	Pass
NVNT	n40	2452	Sum	16.28	0.96	17.24	<=25.54	Pass




Test Graphs

Average Power NVNT ax20 2412MHz Ant1

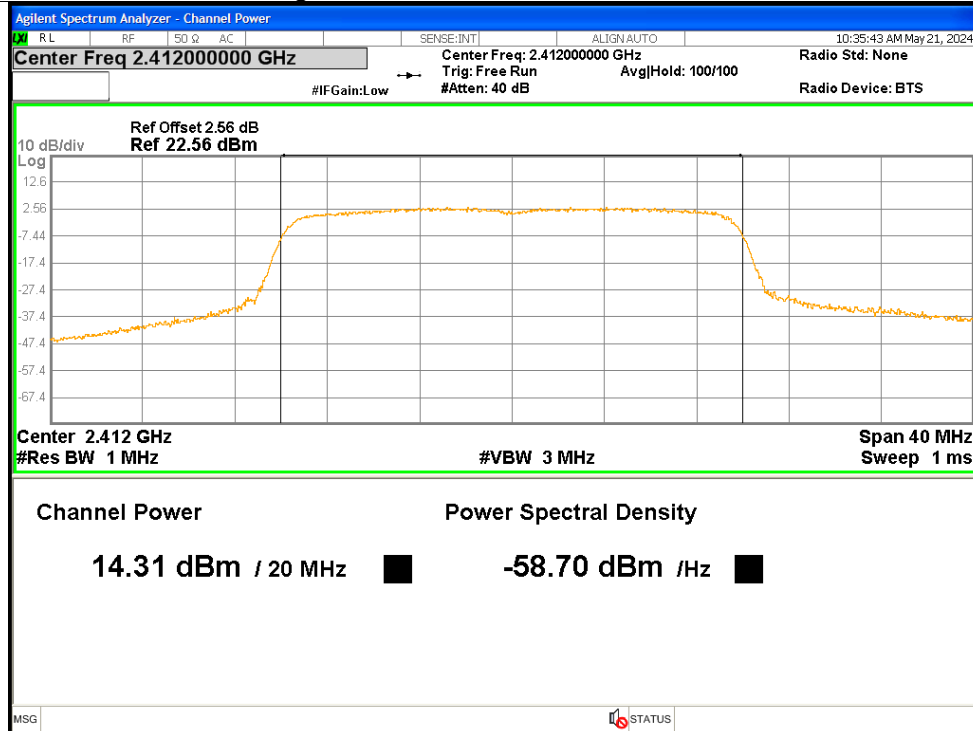


Average Power NVNT ax20 2412MHz Ant2

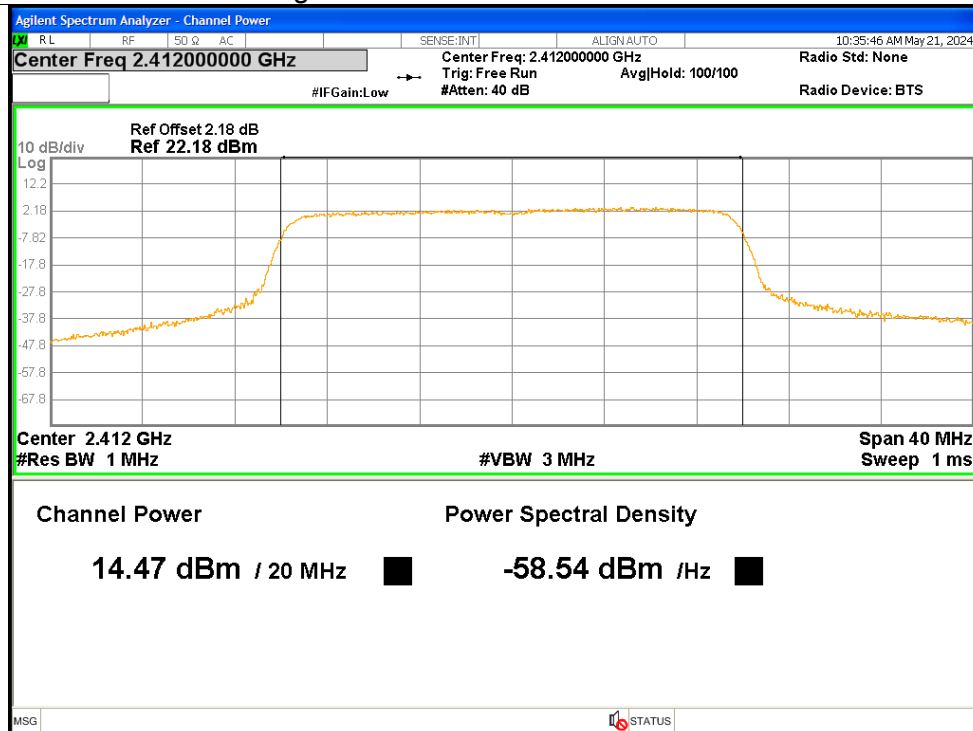




Average Power NVNT ax20 2412MHz Ant3

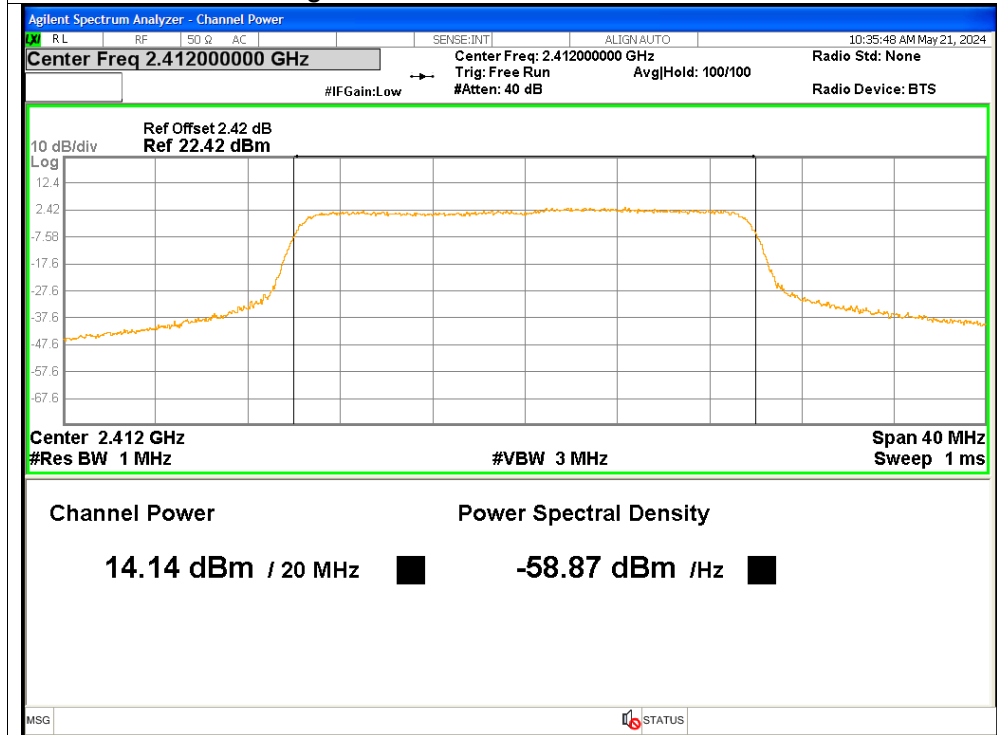


Average Power NVNT ax20 2412MHz Ant4

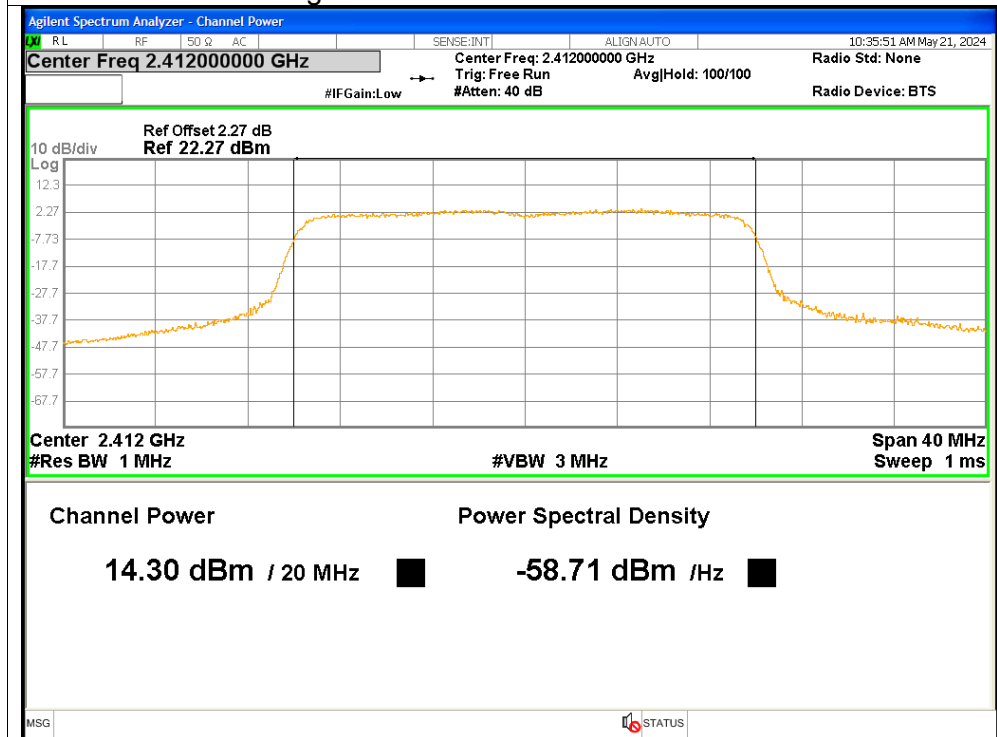




Average Power NVNT ax20 2437MHz Ant1

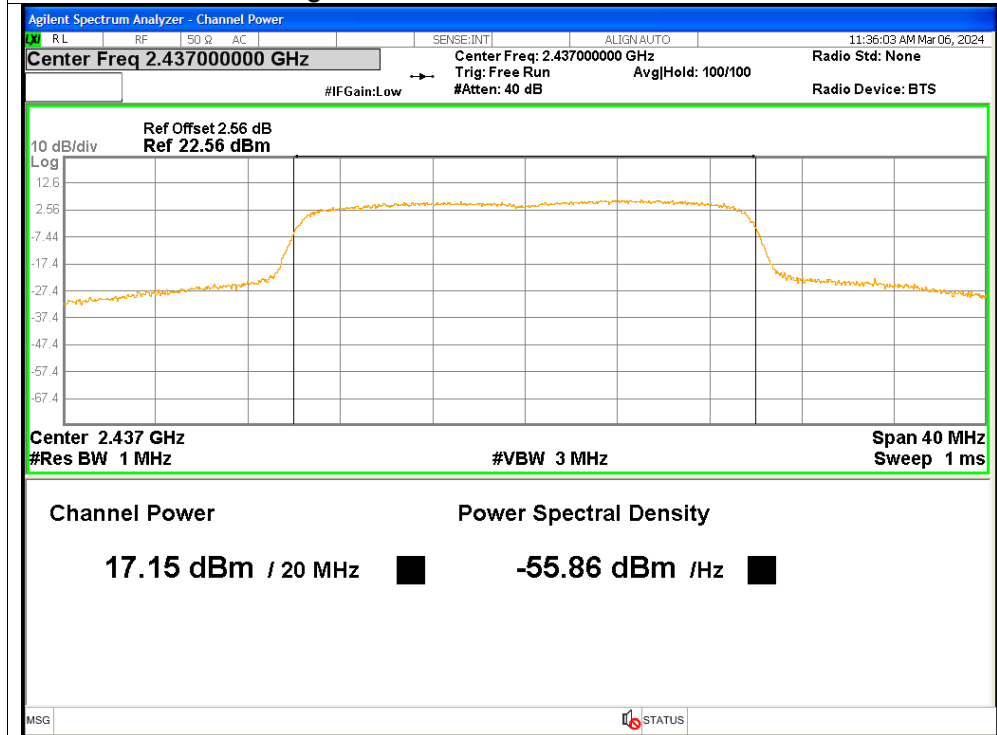


Average Power NVNT ax20 2437MHz Ant2

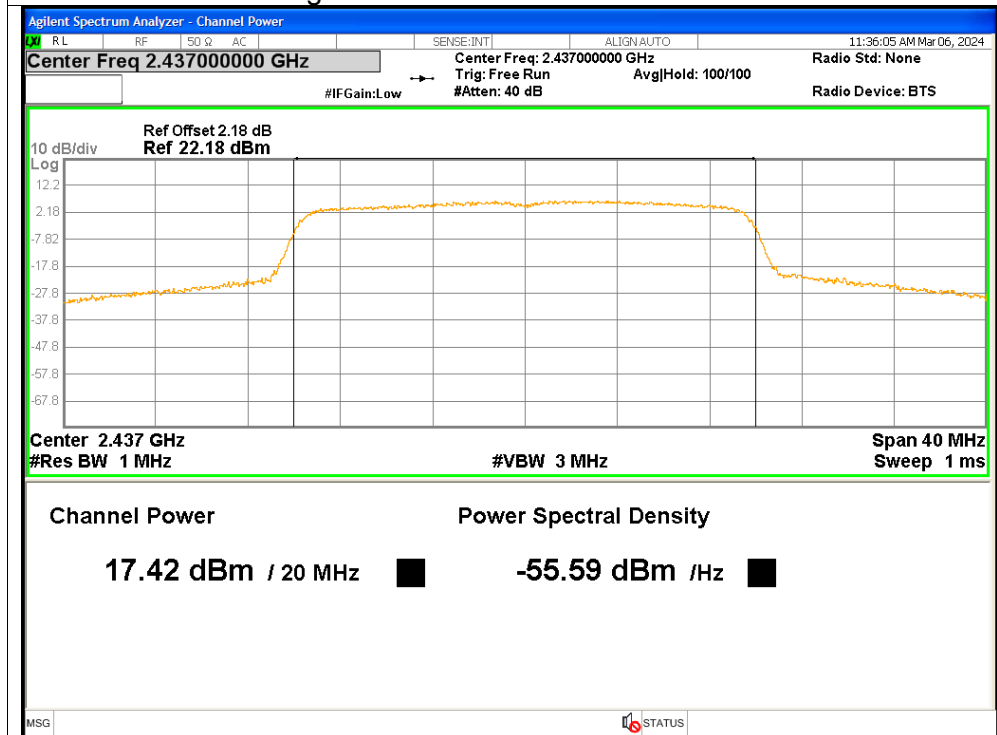




Average Power NVNT ax20 2437MHz Ant3

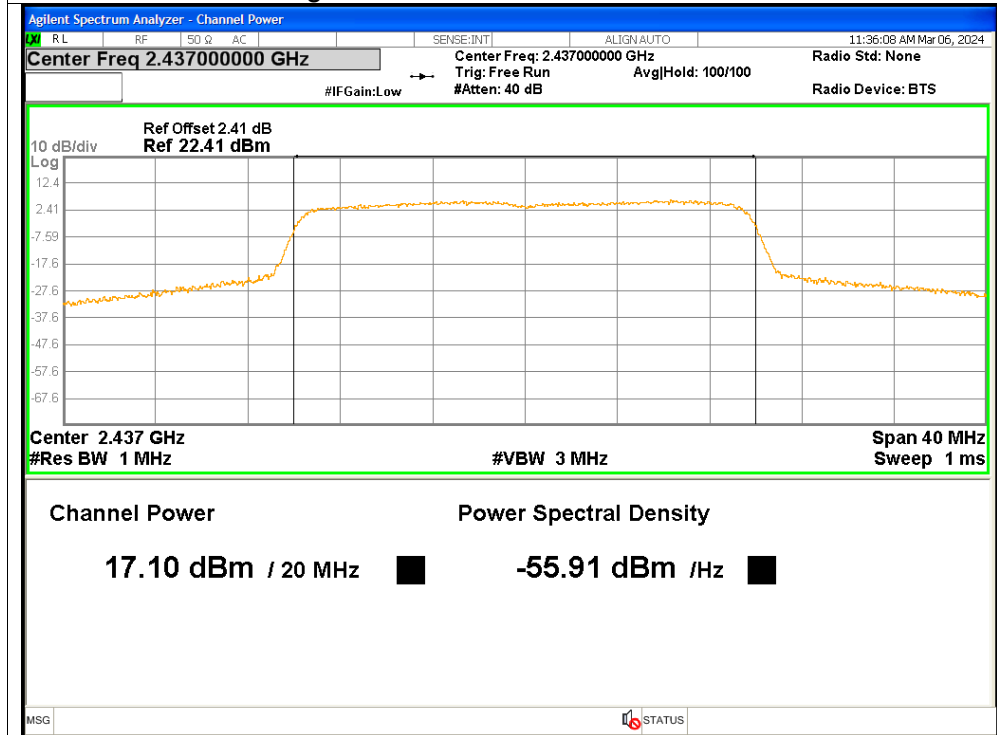


Average Power NVNT ax20 2437MHz Ant4

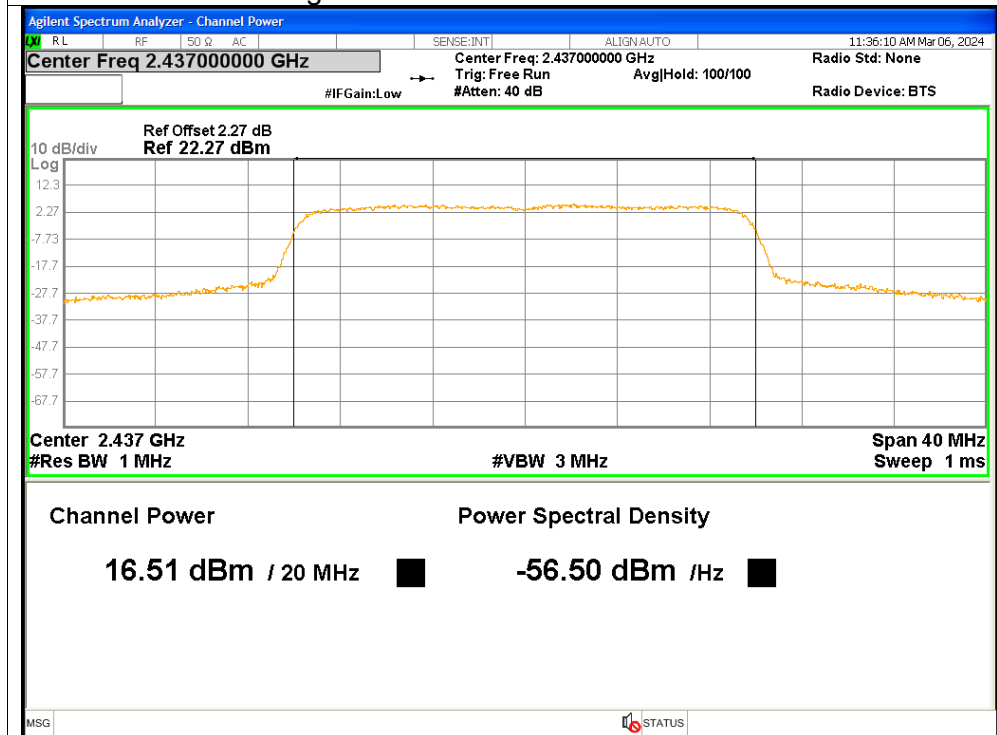




Average Power NVNT ax20 2462MHz Ant1

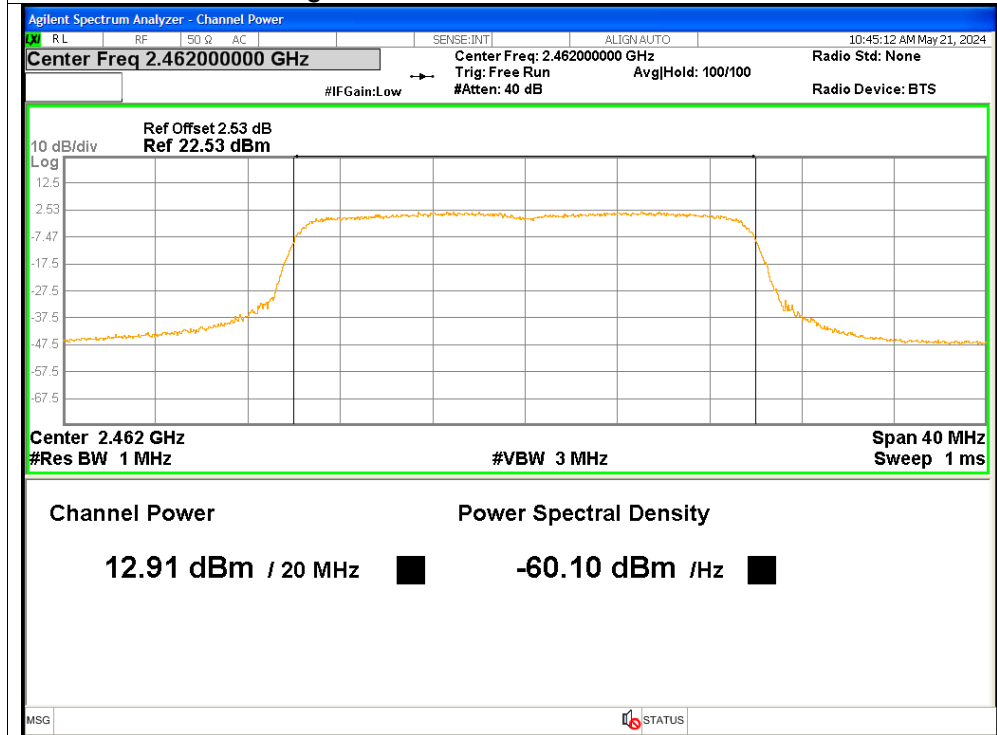


Average Power NVNT ax20 2462MHz Ant2

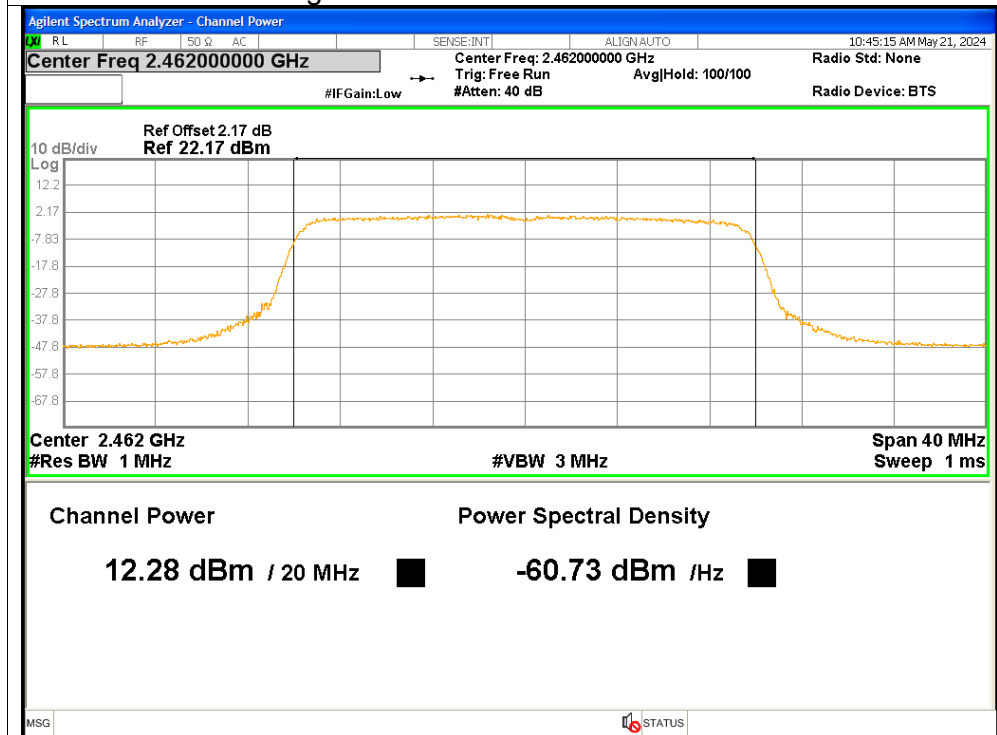




Average Power NVNT ax20 2462MHz Ant3

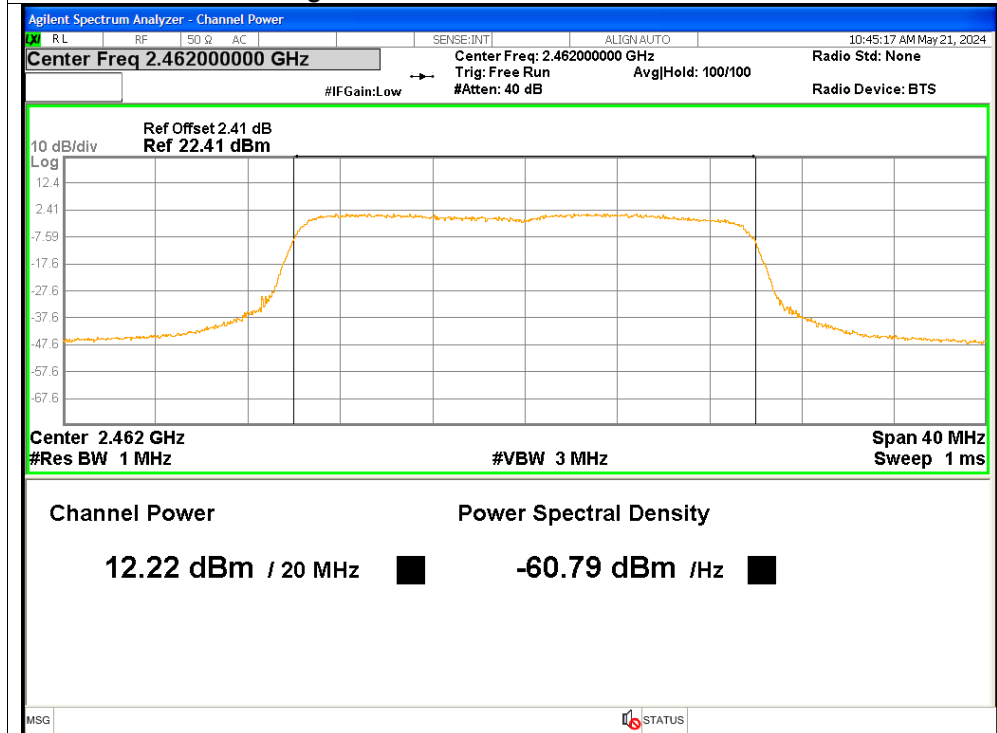


Average Power NVNT ax20 2462MHz Ant4

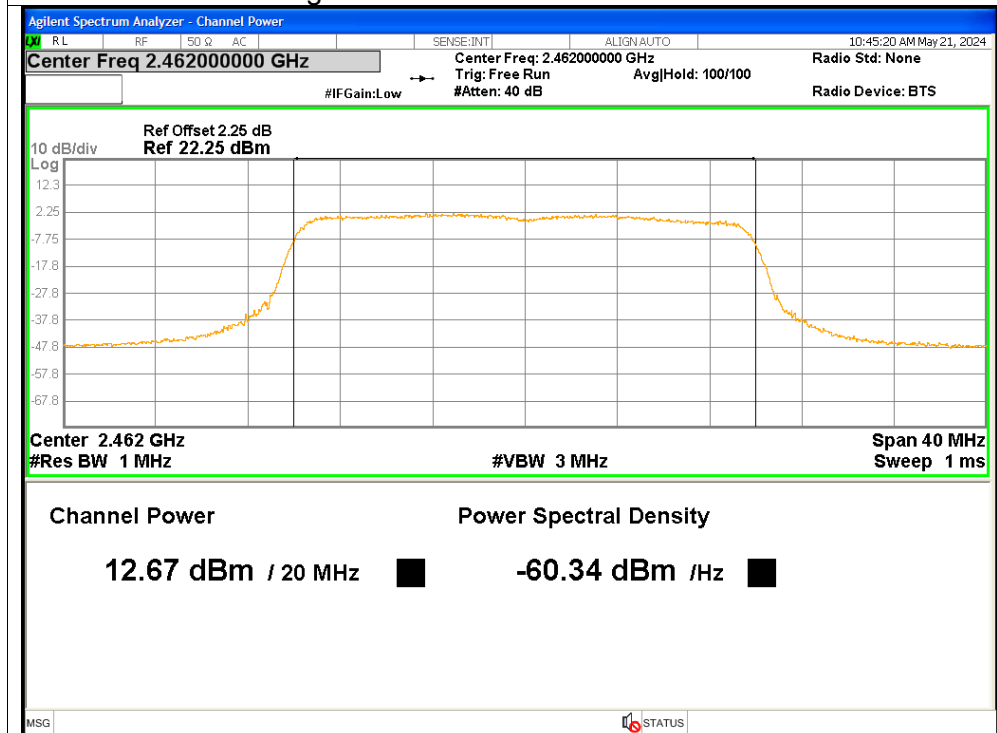




Average Power NVNT ax40 2422MHz Ant1

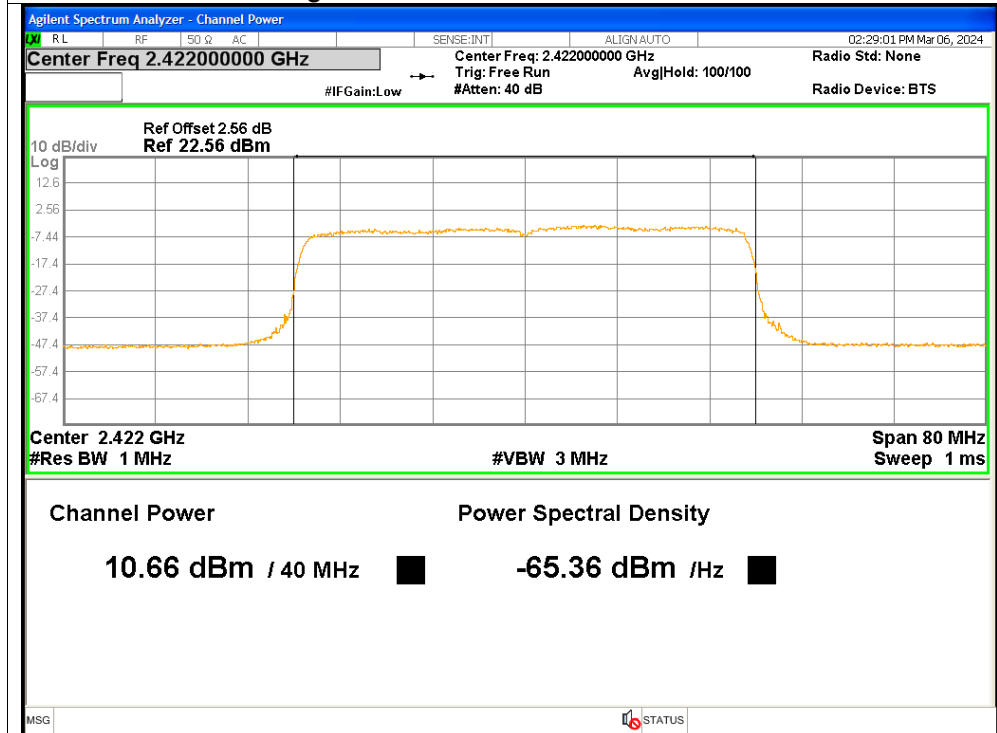


Average Power NVNT ax40 2422MHz Ant2

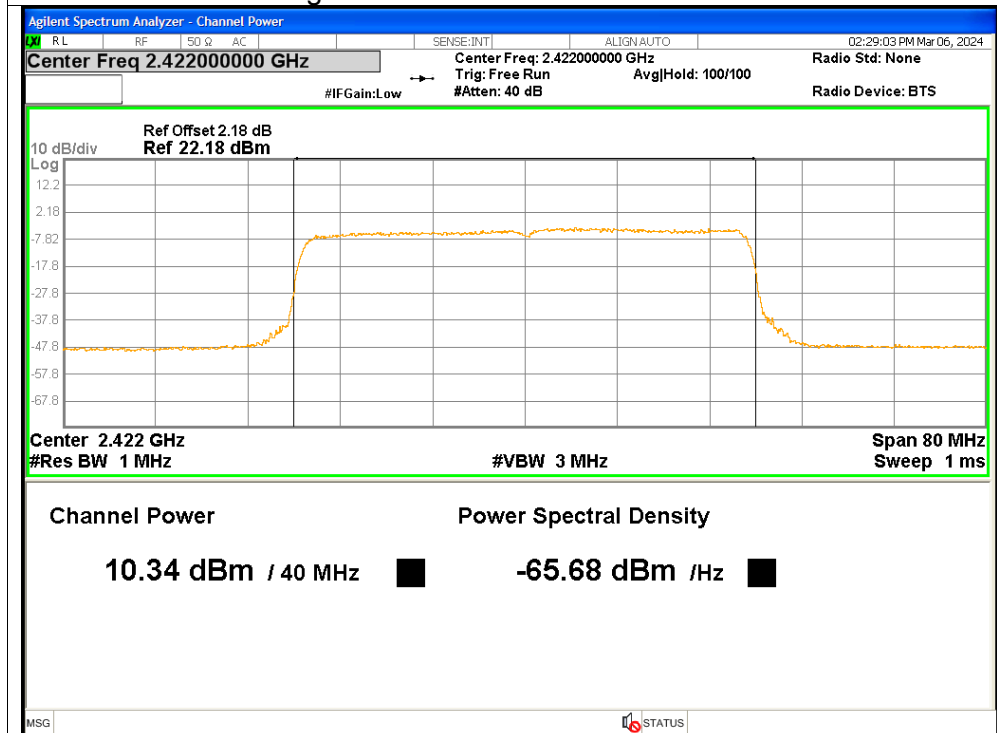




Average Power NVNT ax40 2422MHz Ant3

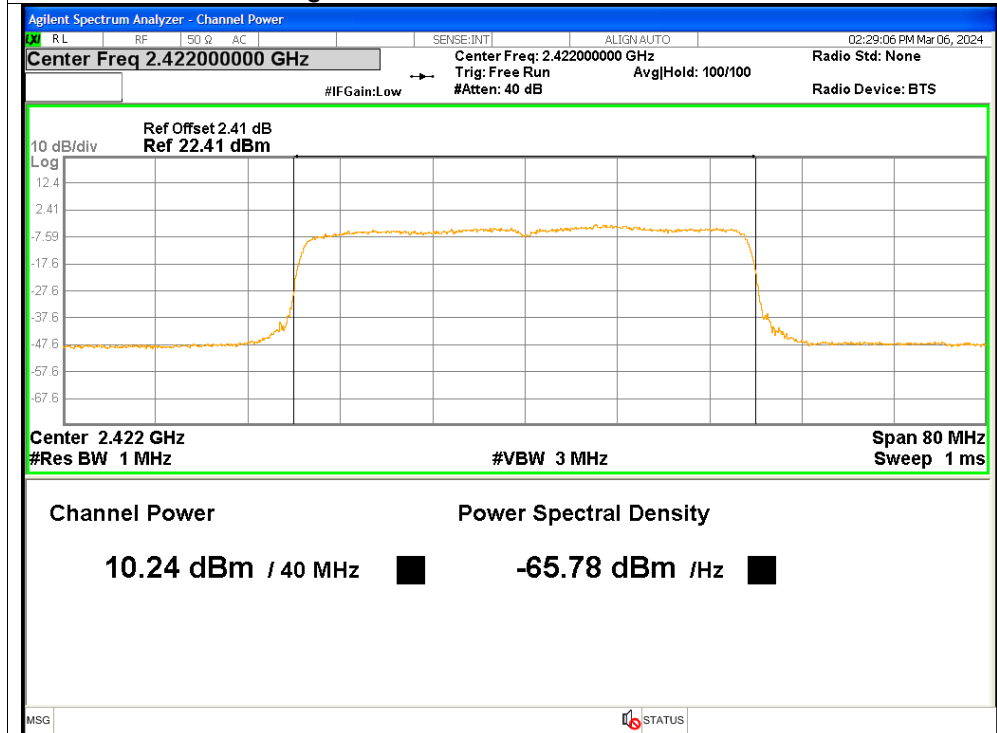


Average Power NVNT ax40 2422MHz Ant4

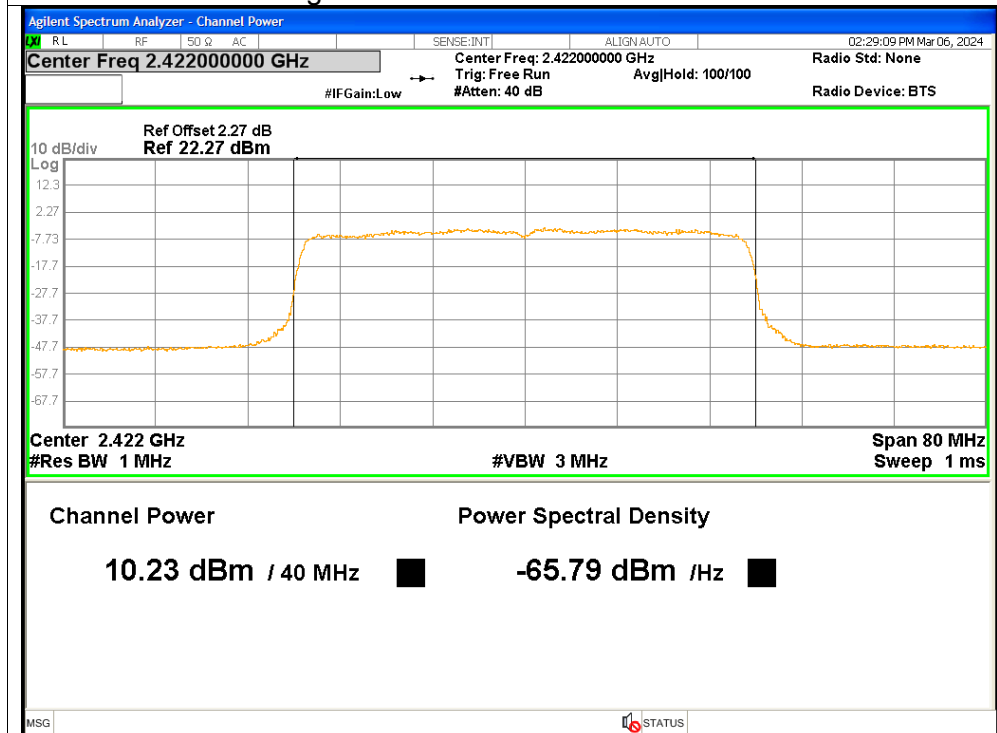




Average Power NVNT ax40 2437MHz Ant1

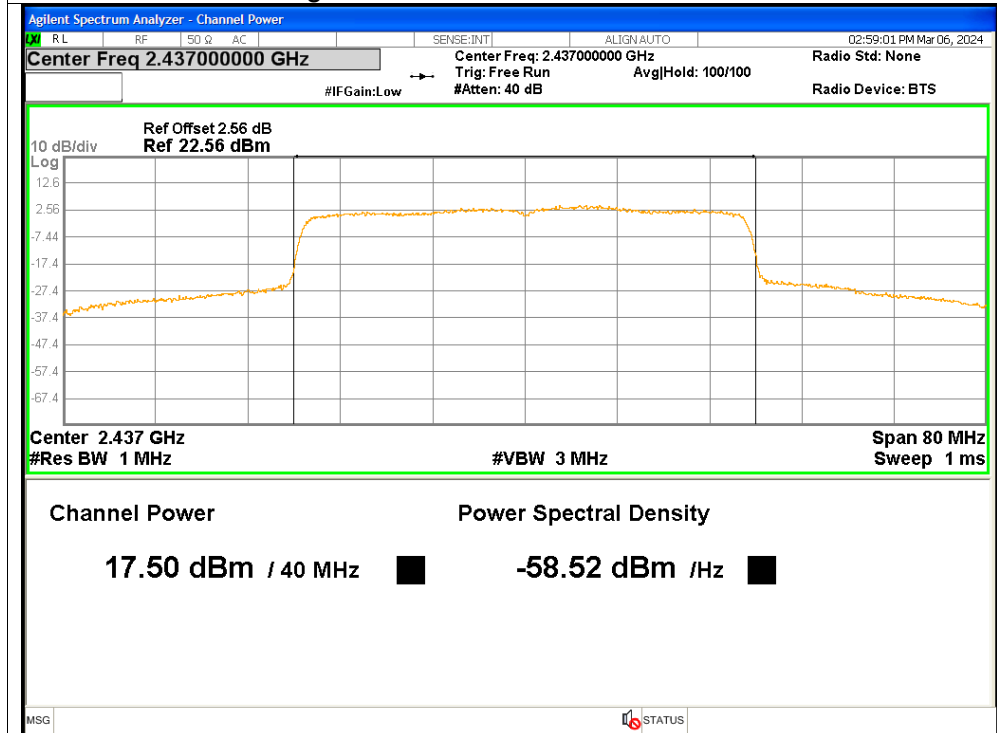


Average Power NVNT ax40 2437MHz Ant2

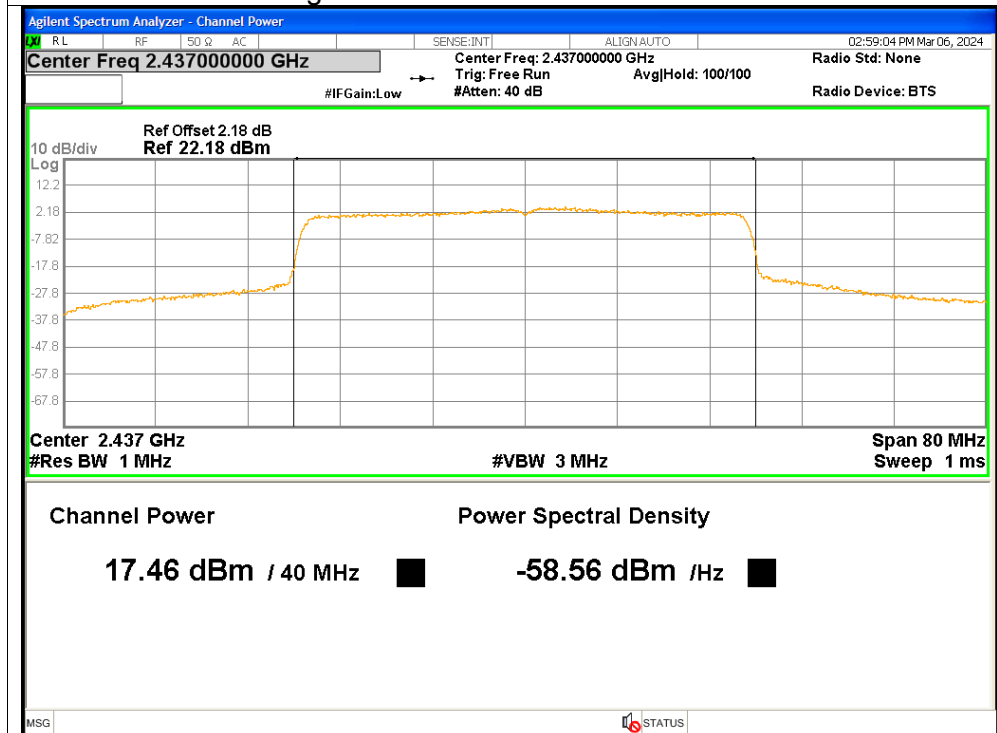




Average Power NVNT ax40 2437MHz Ant3

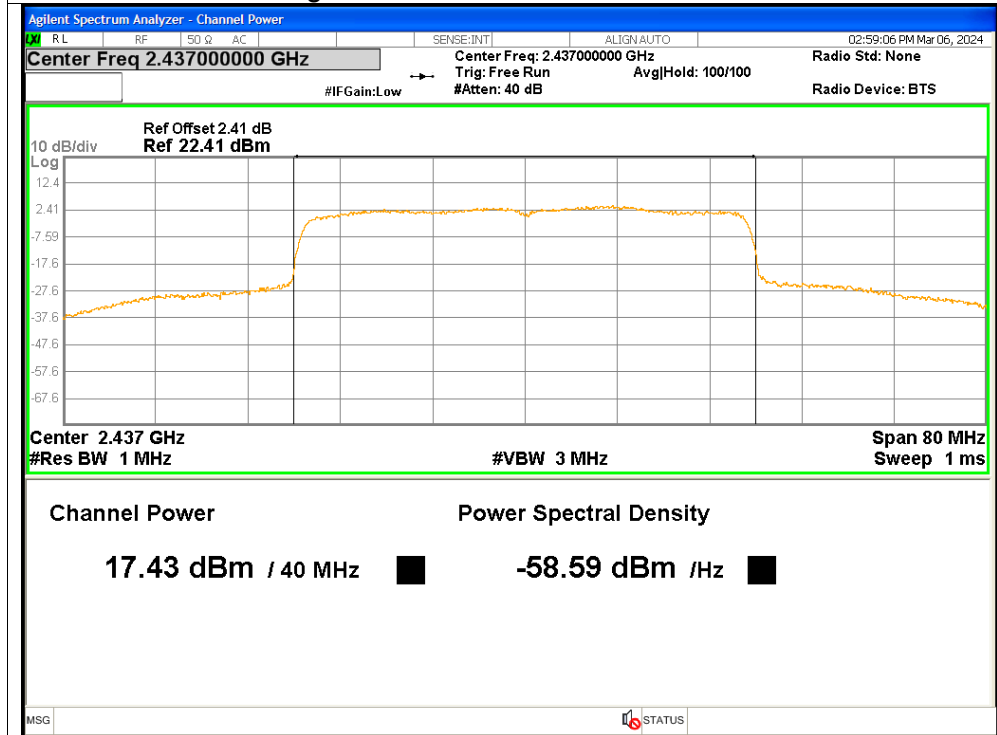


Average Power NVNT ax40 2437MHz Ant4

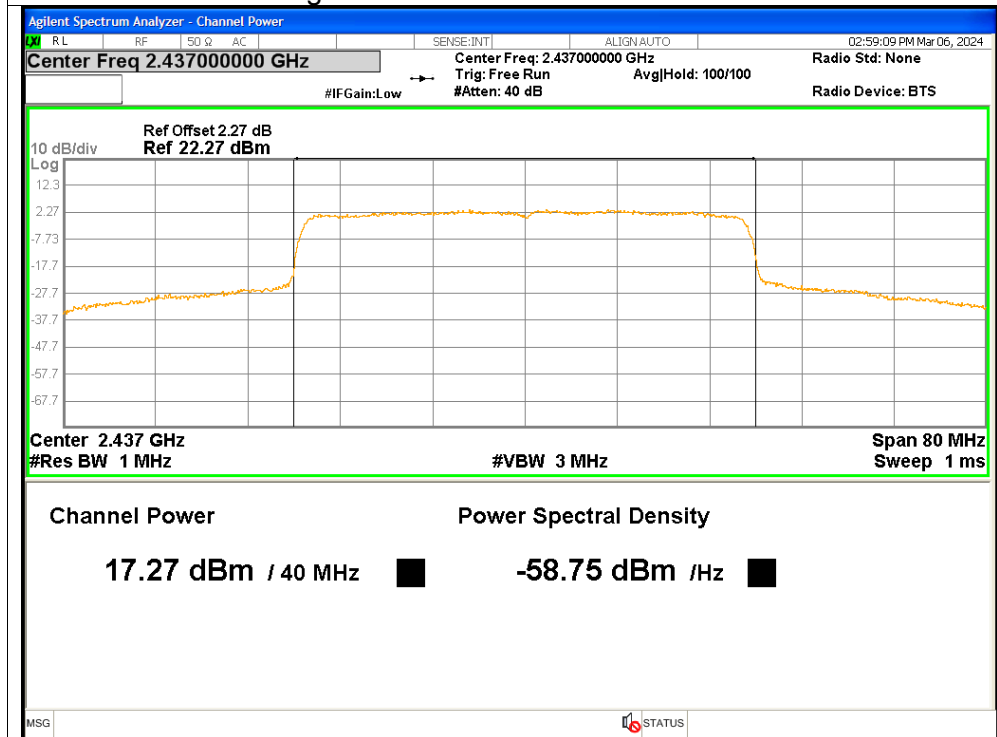




Average Power NVNT ax40 2452MHz Ant1

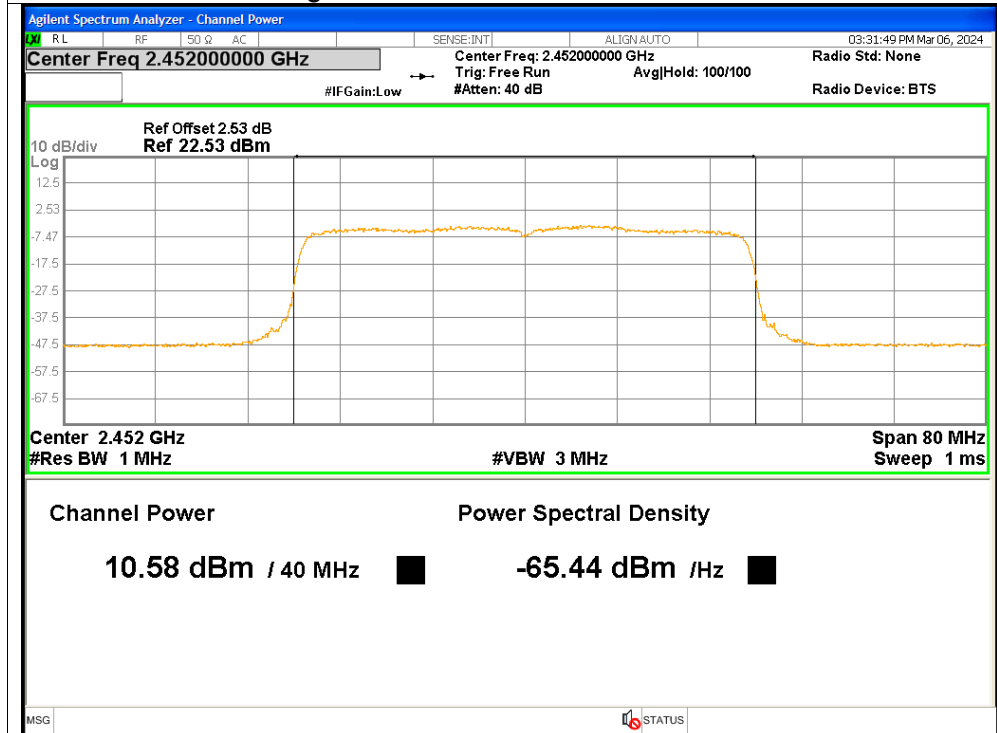


Average Power NVNT ax40 2452MHz Ant2

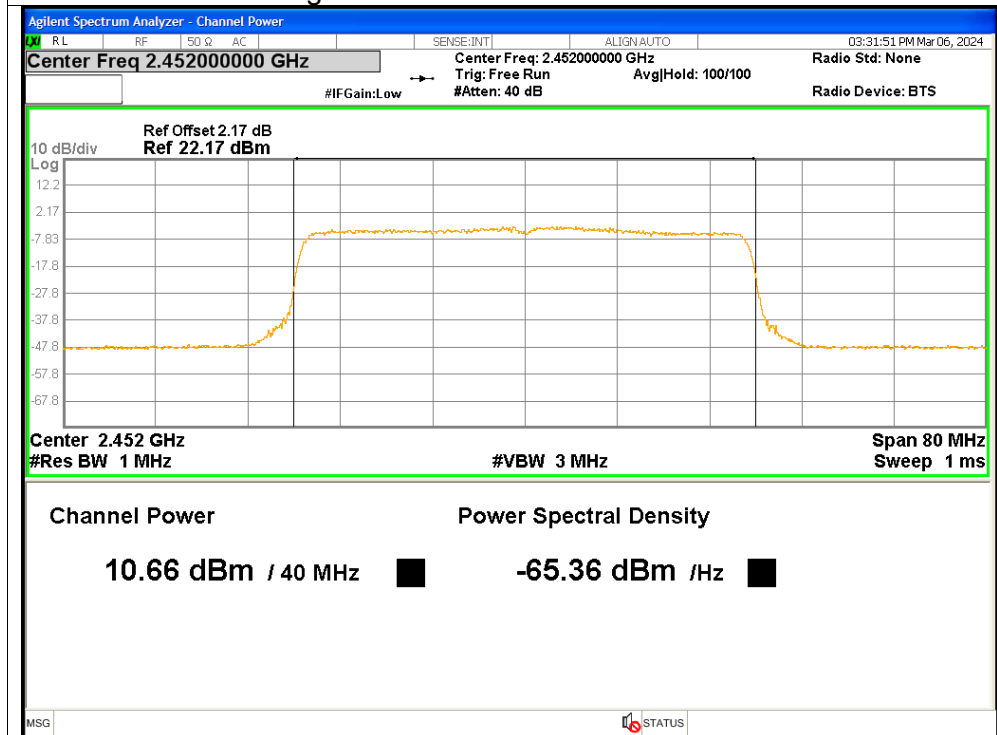




Average Power NVNT ax40 2452MHz Ant3

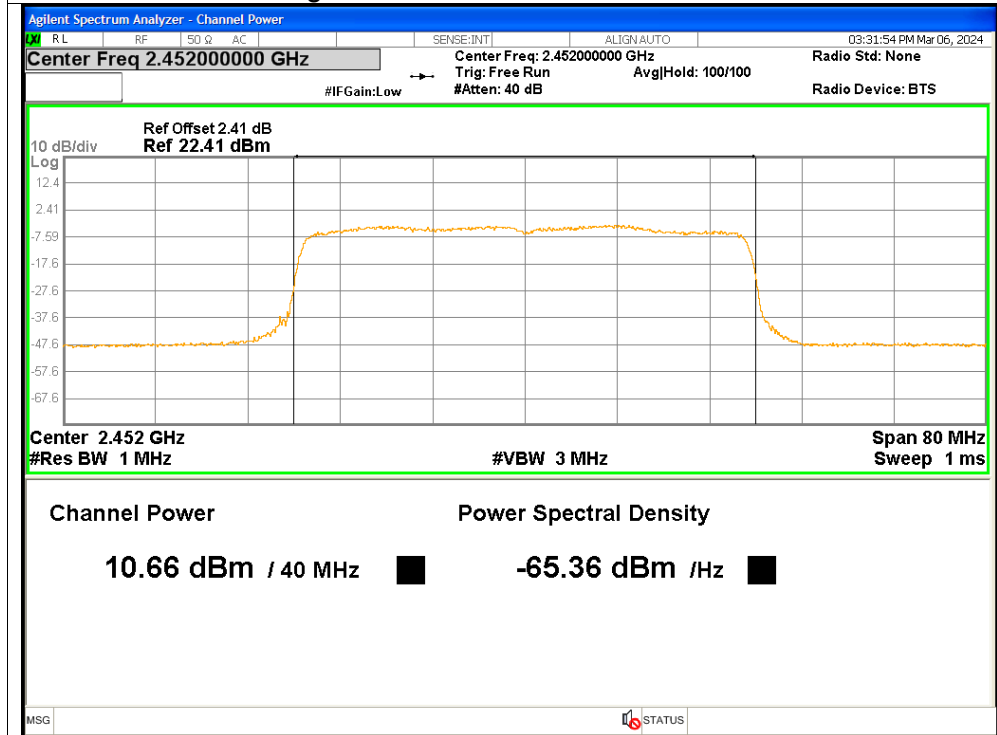


Average Power NVNT ax40 2452MHz Ant4

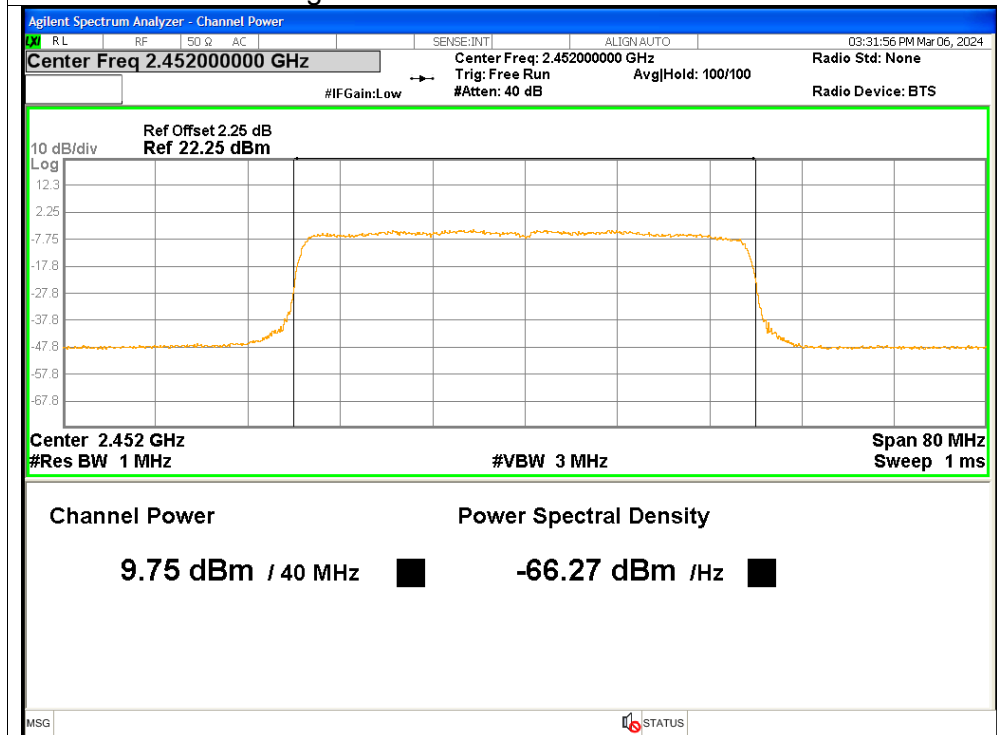




Average Power NVNT b 2412MHz Ant1

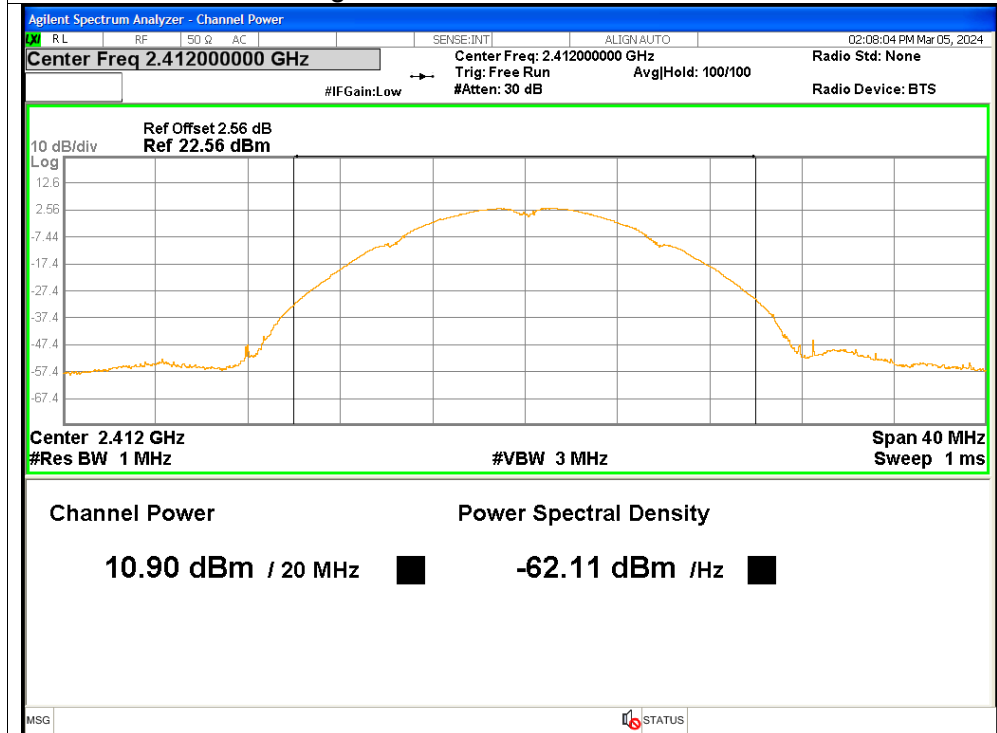


Average Power NVNT b 2412MHz Ant2

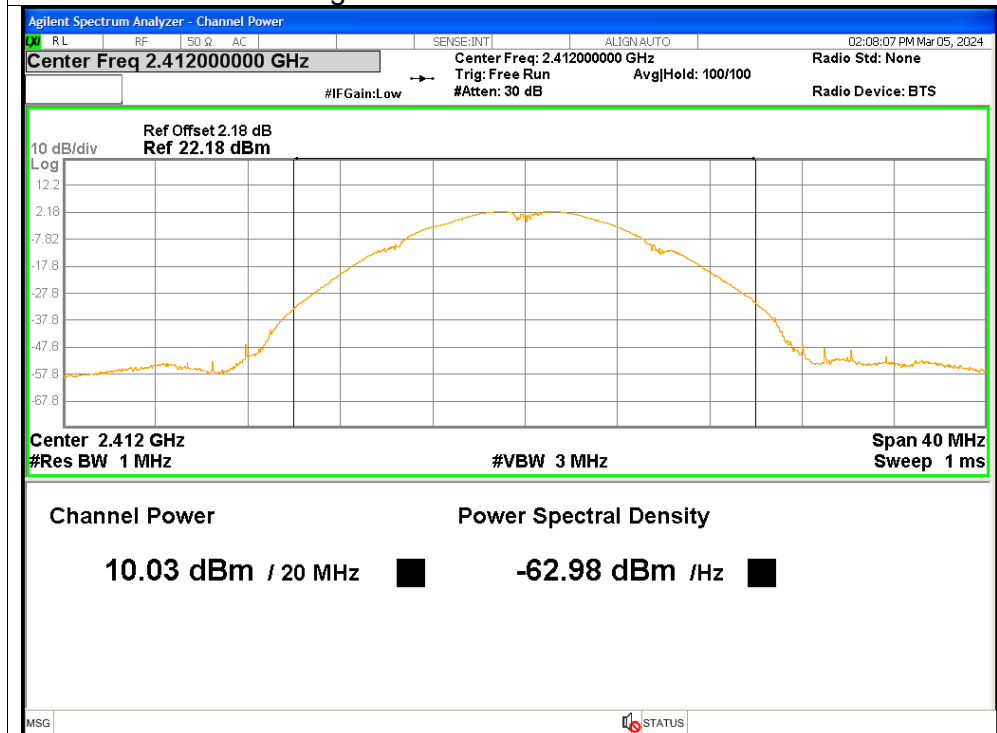




Average Power NVNT b 2412MHz Ant3

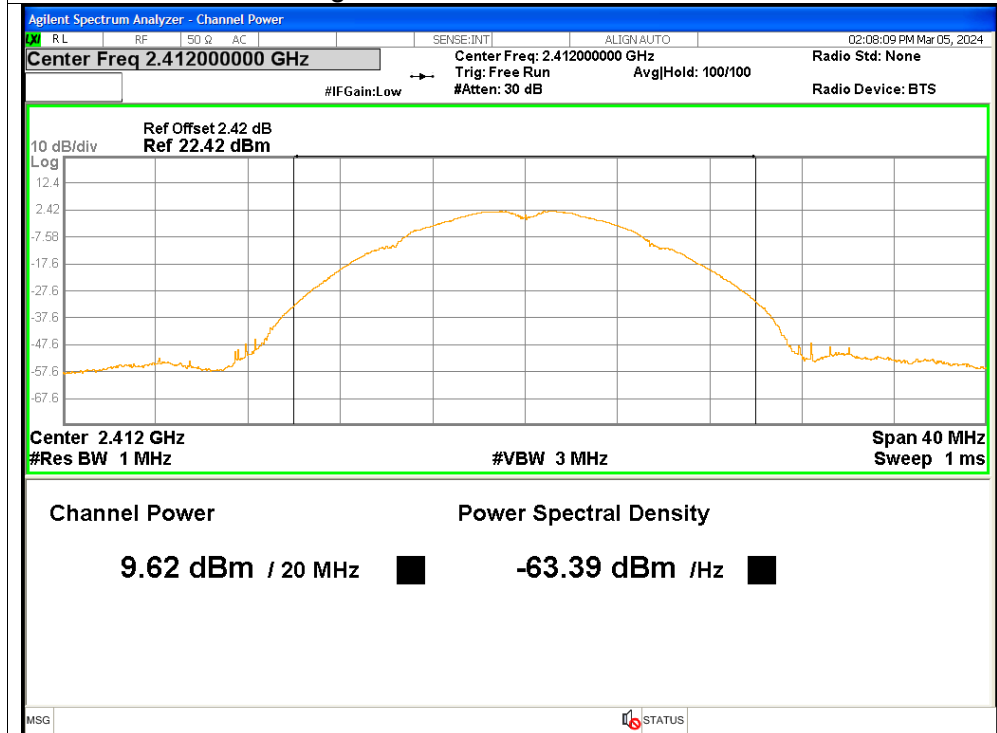


Average Power NVNT b 2412MHz Ant4

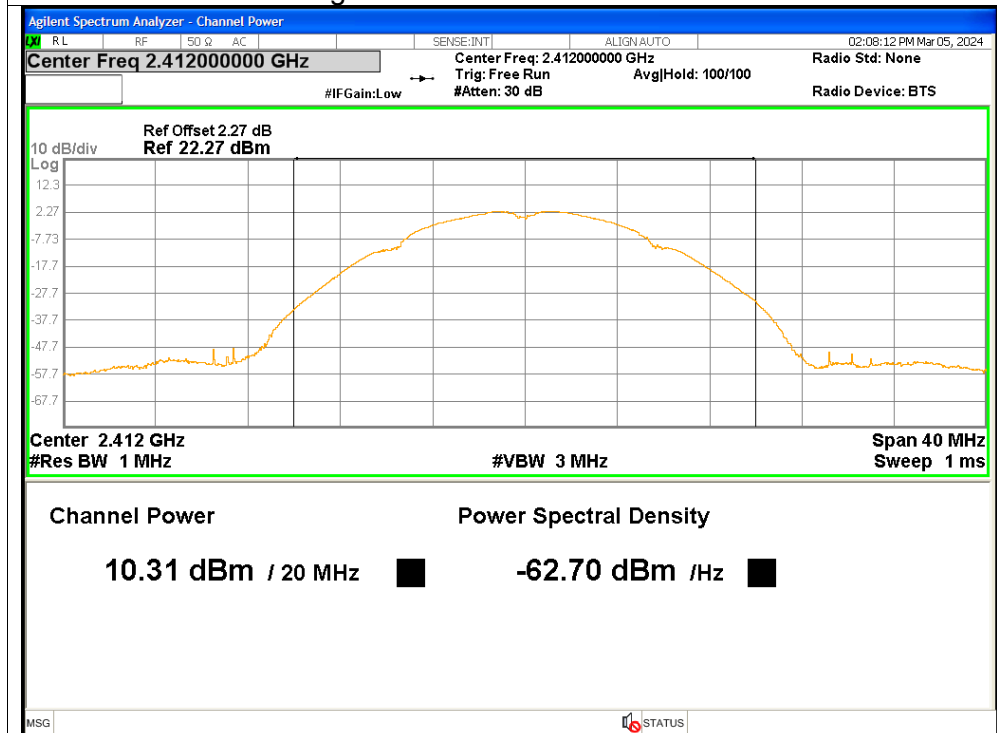




Average Power NVNT b 2437MHz Ant1

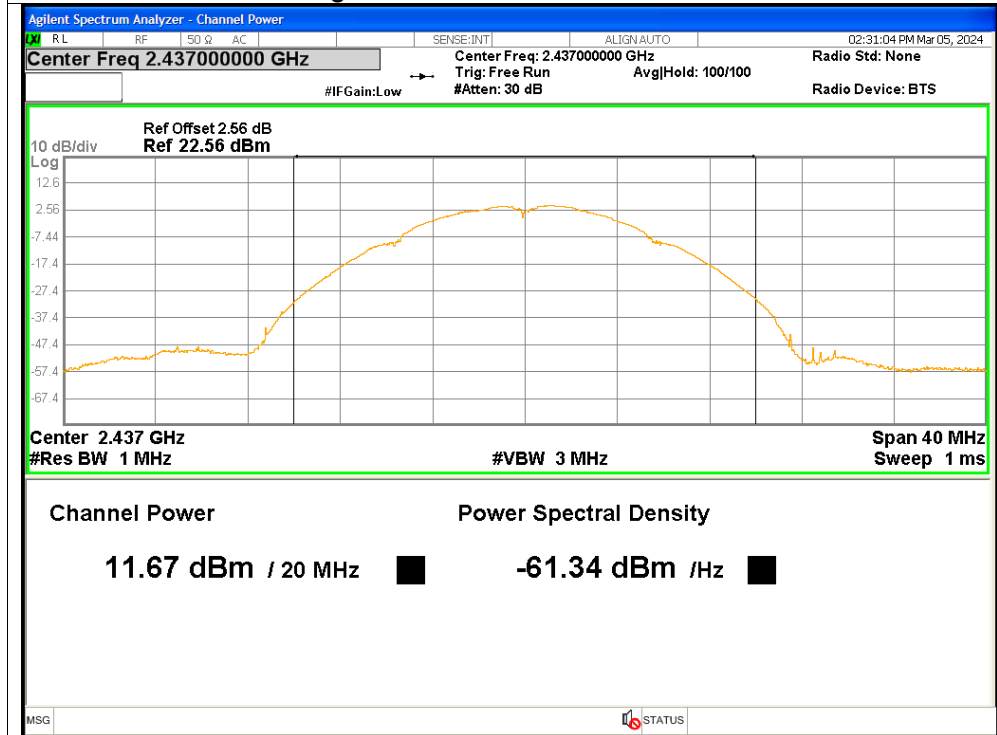


Average Power NVNT b 2437MHz Ant2

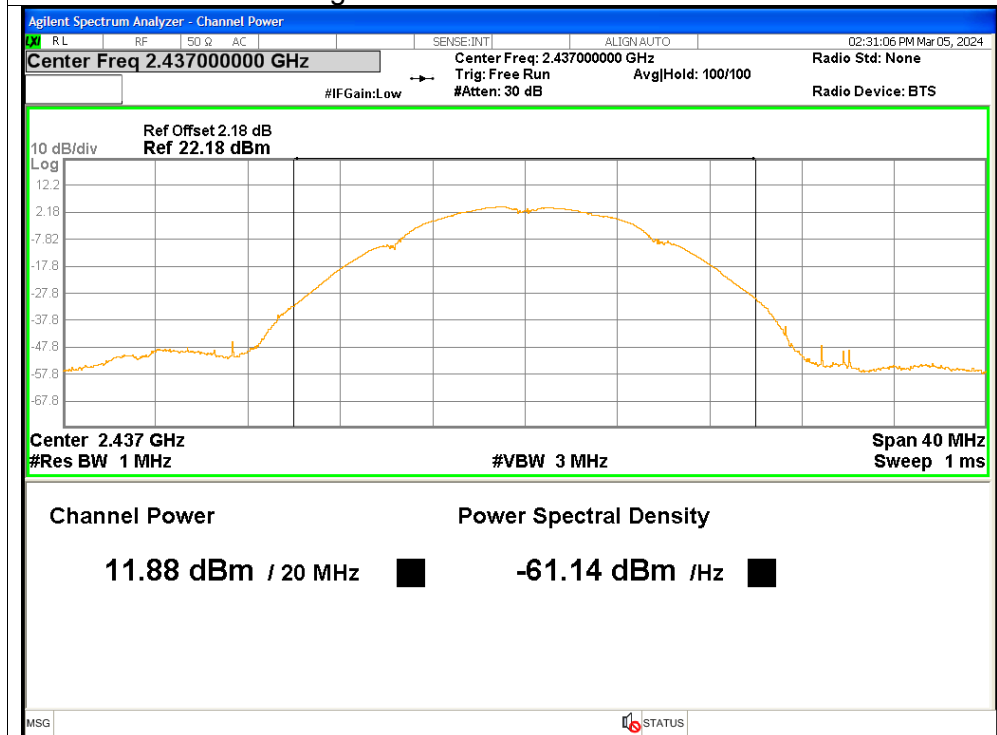




Average Power NVNT b 2437MHz Ant3

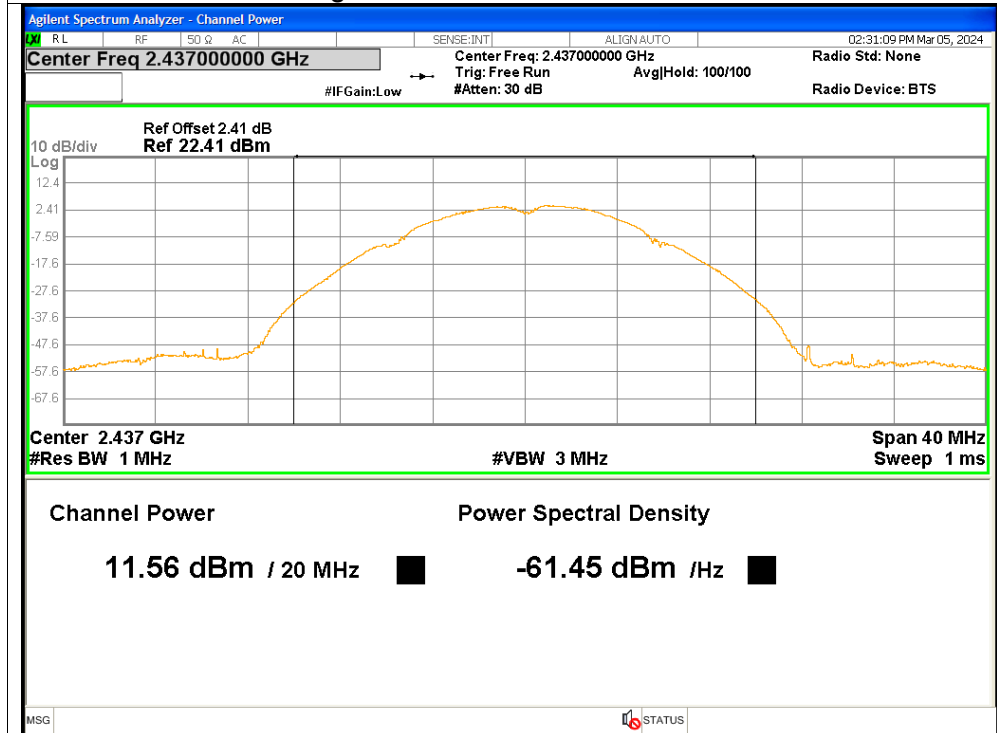


Average Power NVNT b 2437MHz Ant4

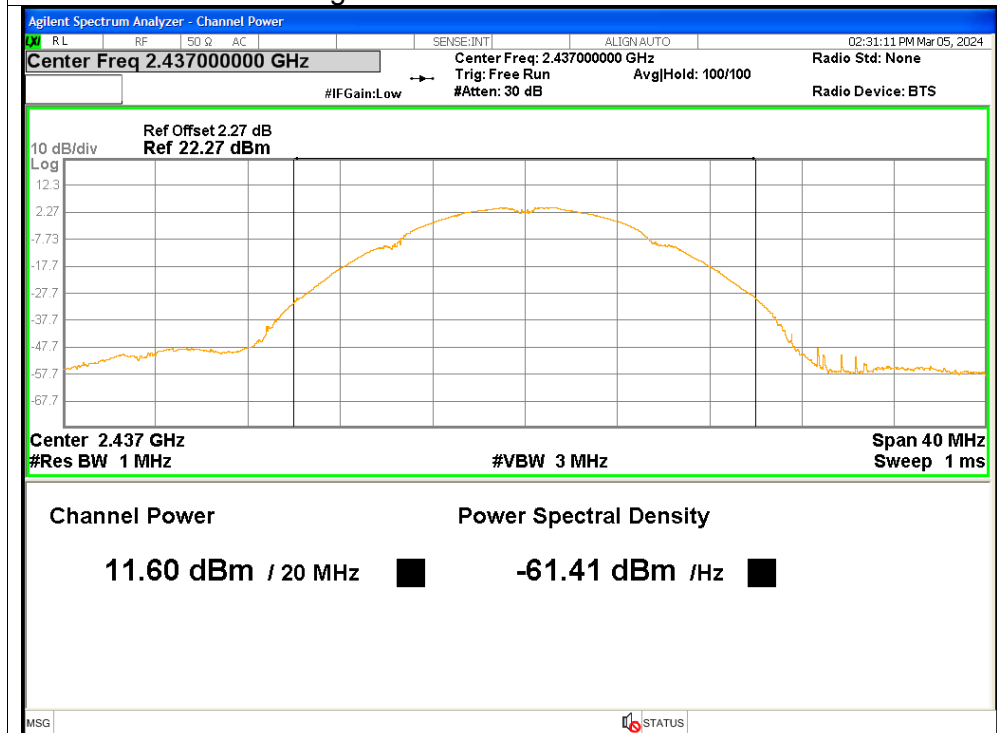




Average Power NVNT b 2462MHz Ant1

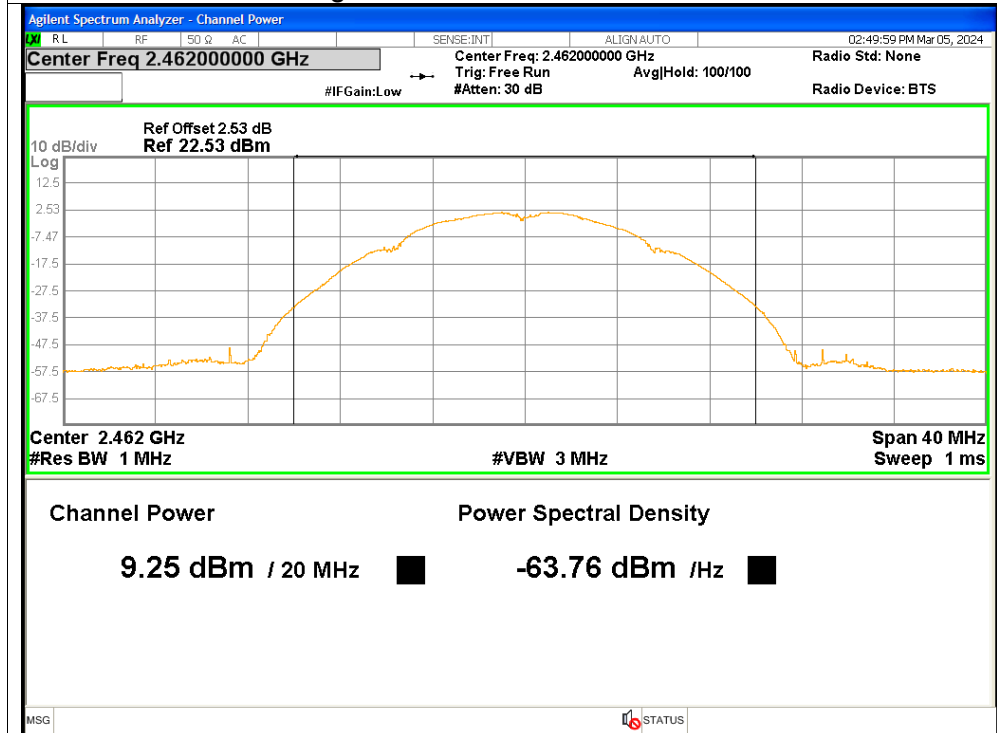


Average Power NVNT b 2462MHz Ant2

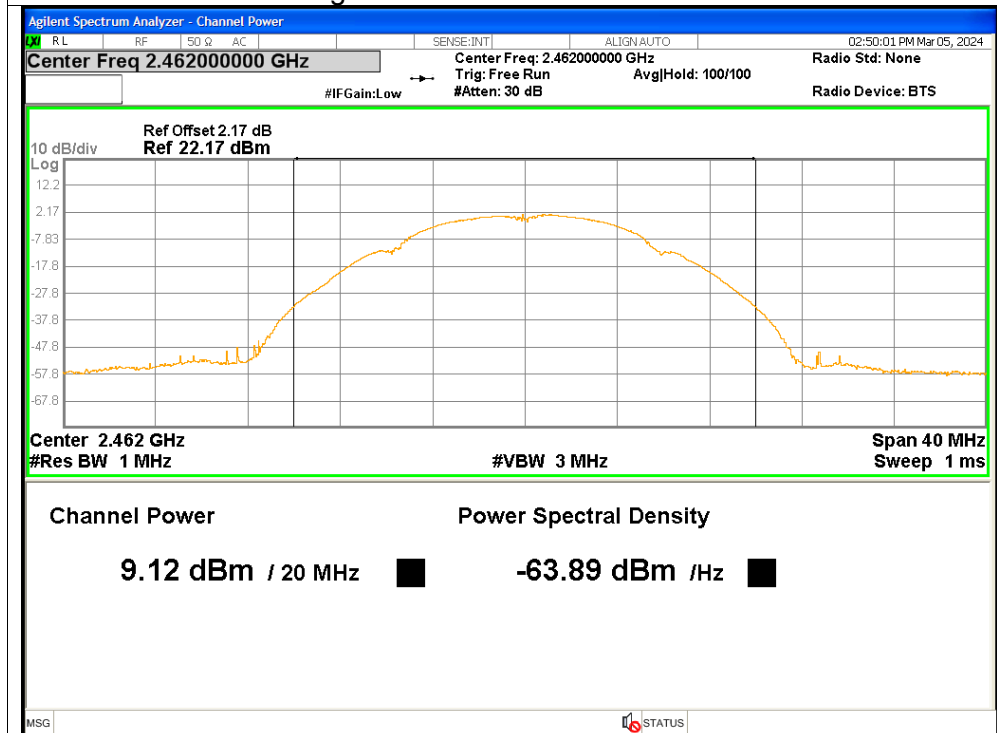




Average Power NVNT b 2462MHz Ant3

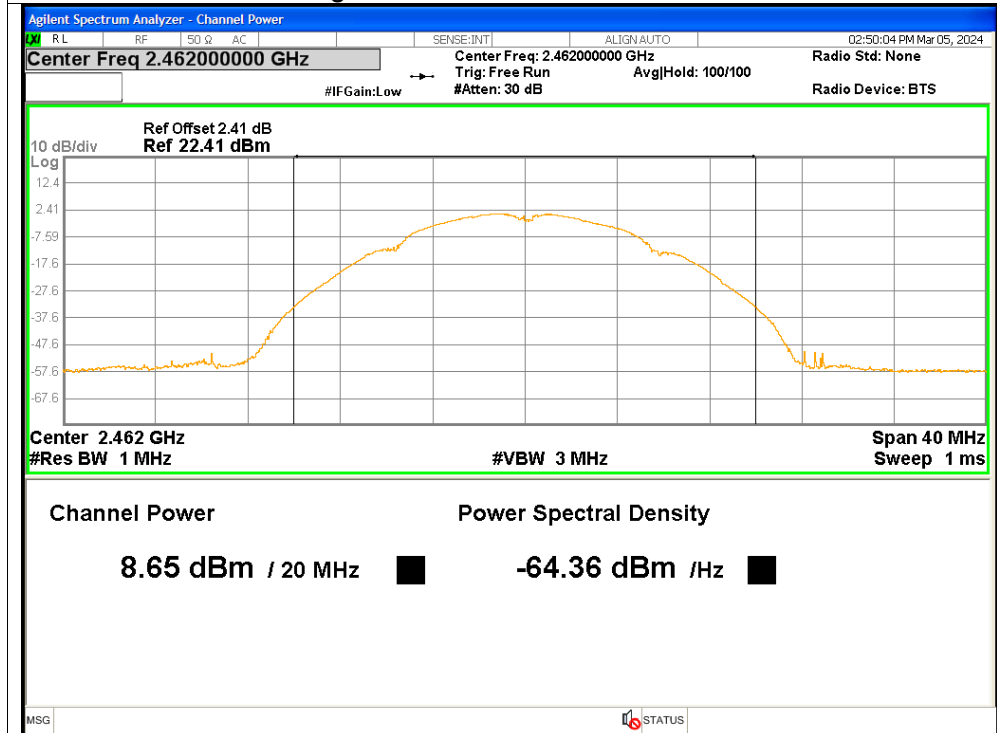


Average Power NVNT b 2462MHz Ant4

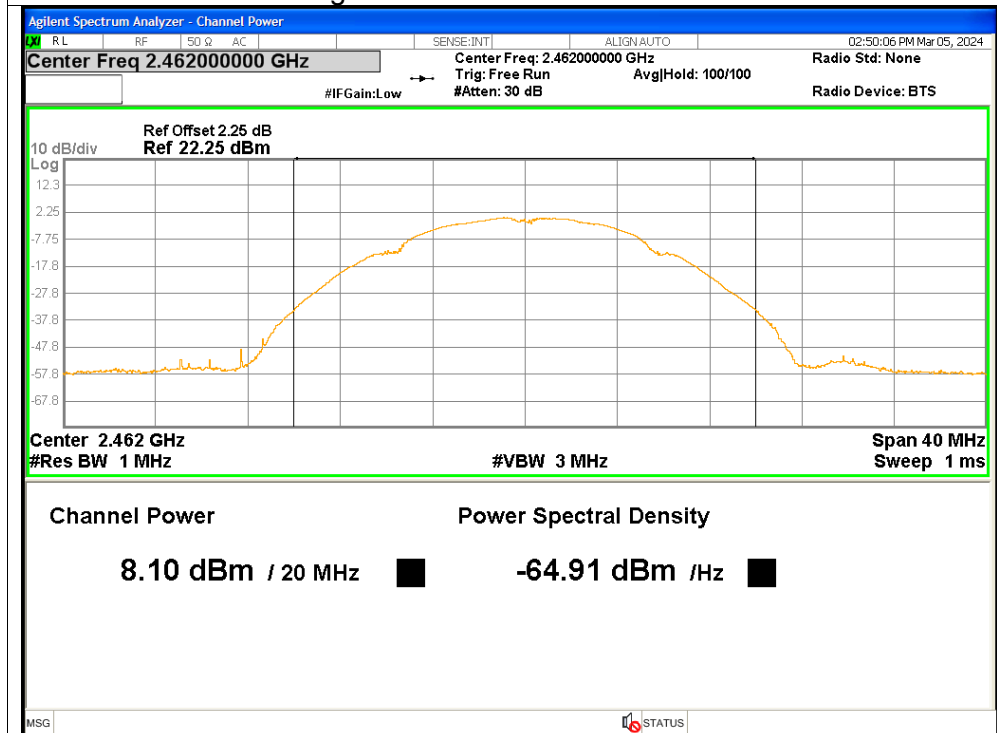




Average Power NVNT g 2412MHz Ant1

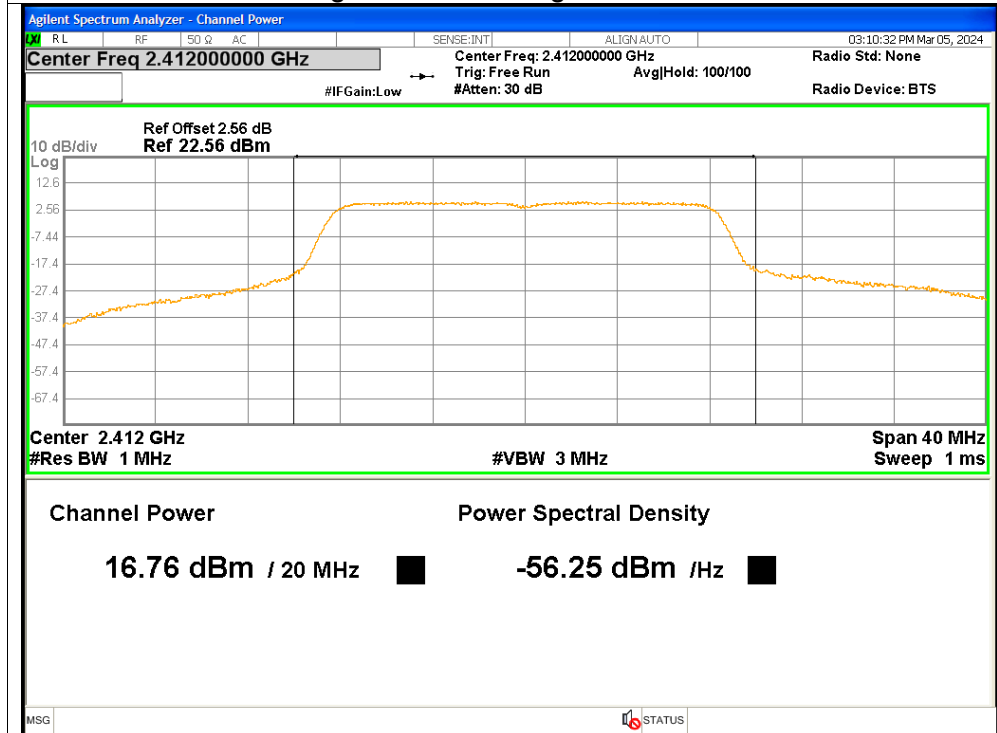


Average Power NVNT g 2412MHz Ant2

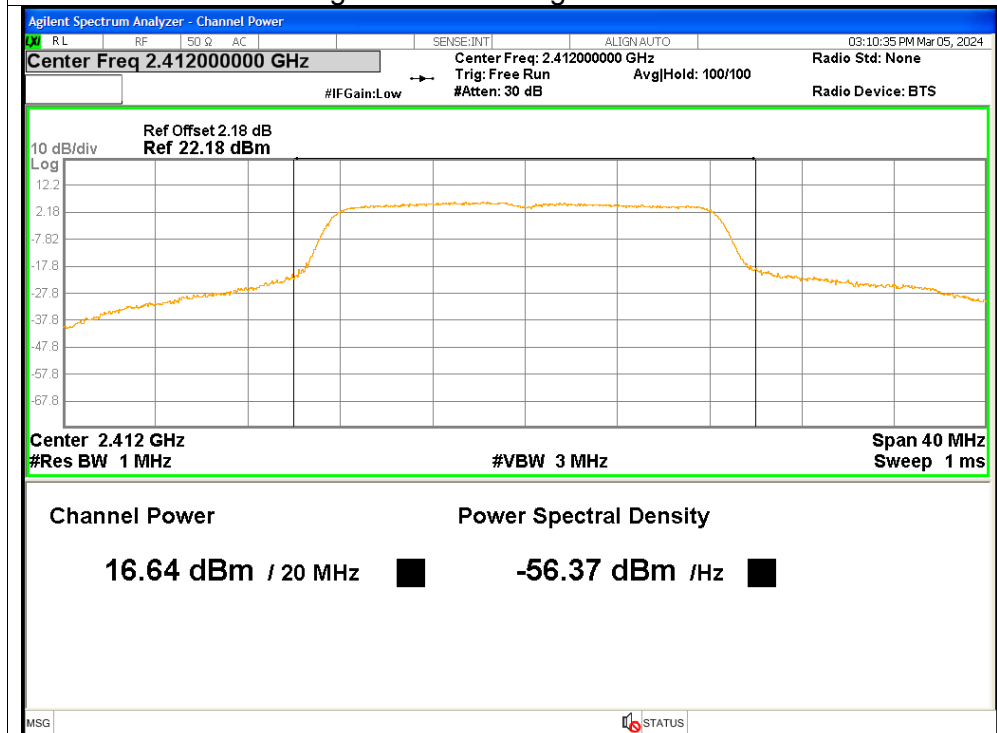




Average Power NVNT g 2412MHz Ant3

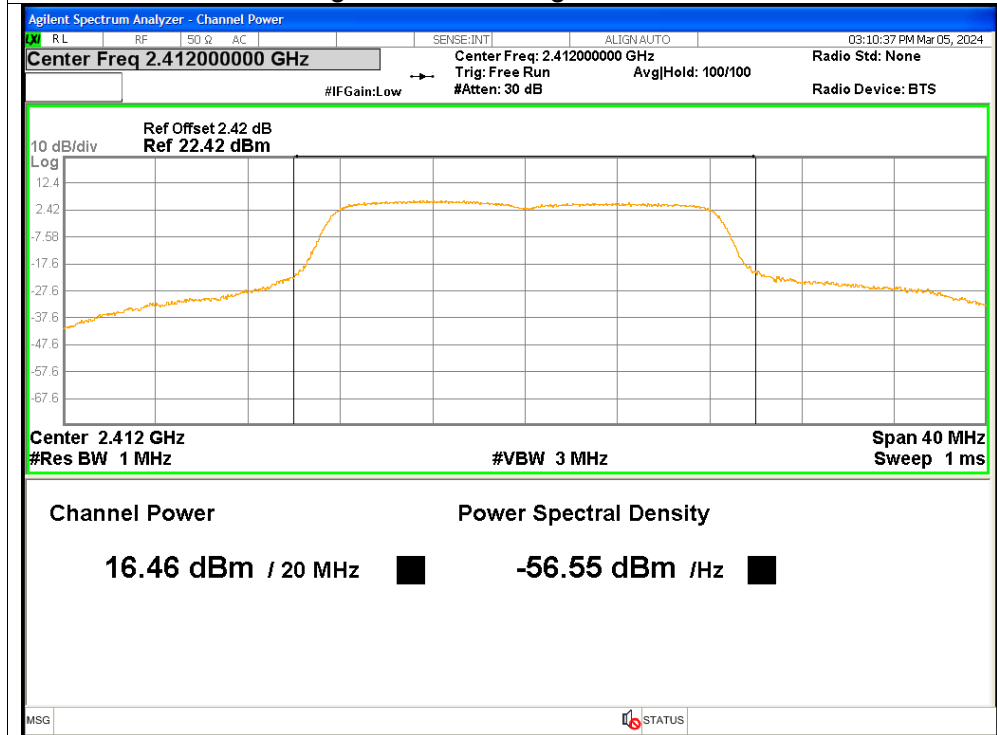


Average Power NVNT g 2412MHz Ant4

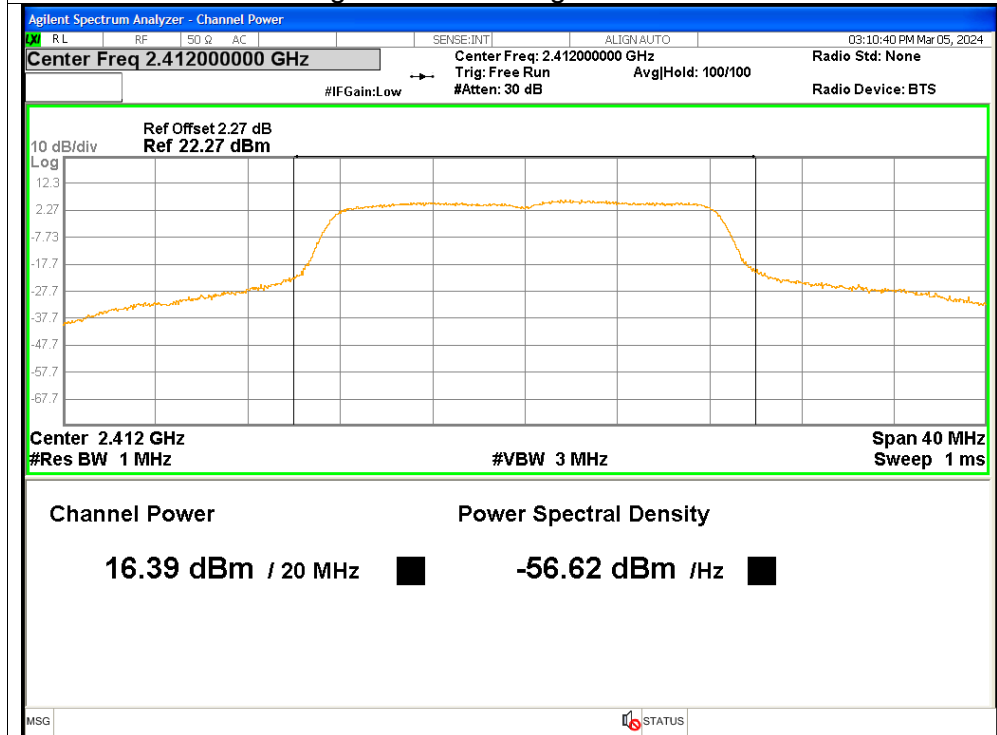




Average Power NVNT g 2437MHz Ant1

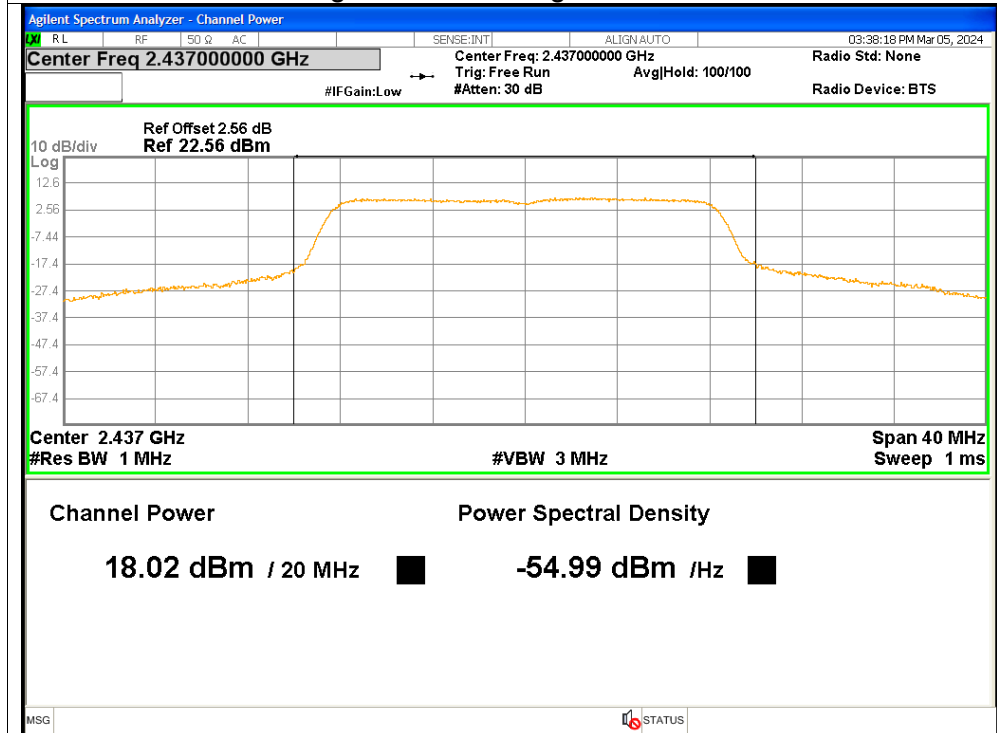


Average Power NVNT g 2437MHz Ant2

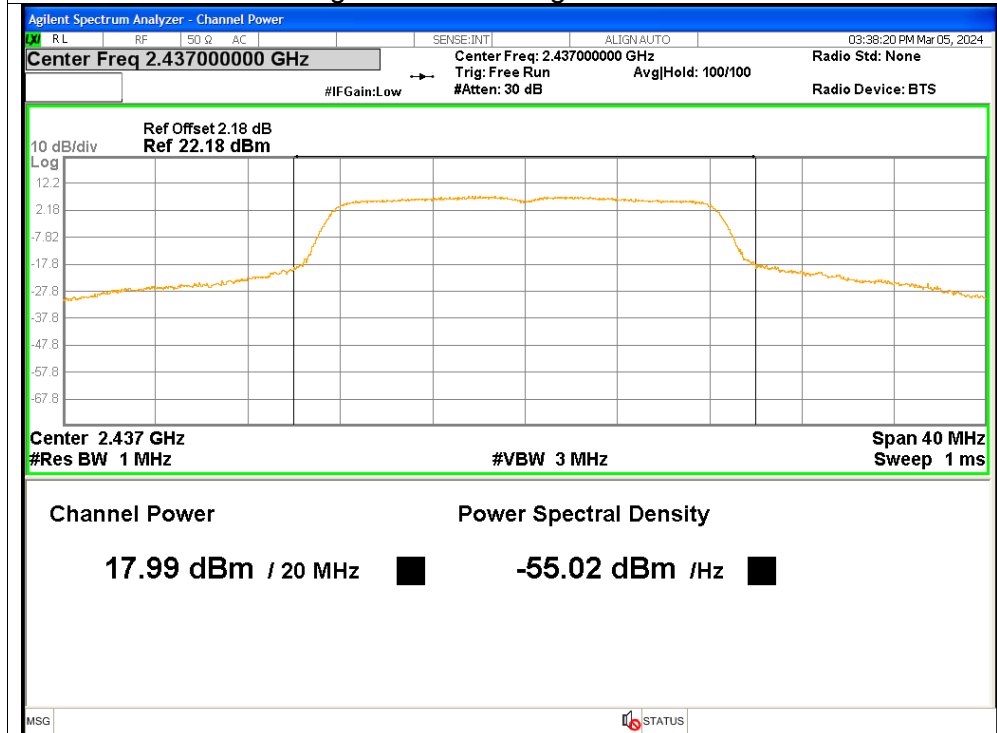




Average Power NVNT g 2437MHz Ant3

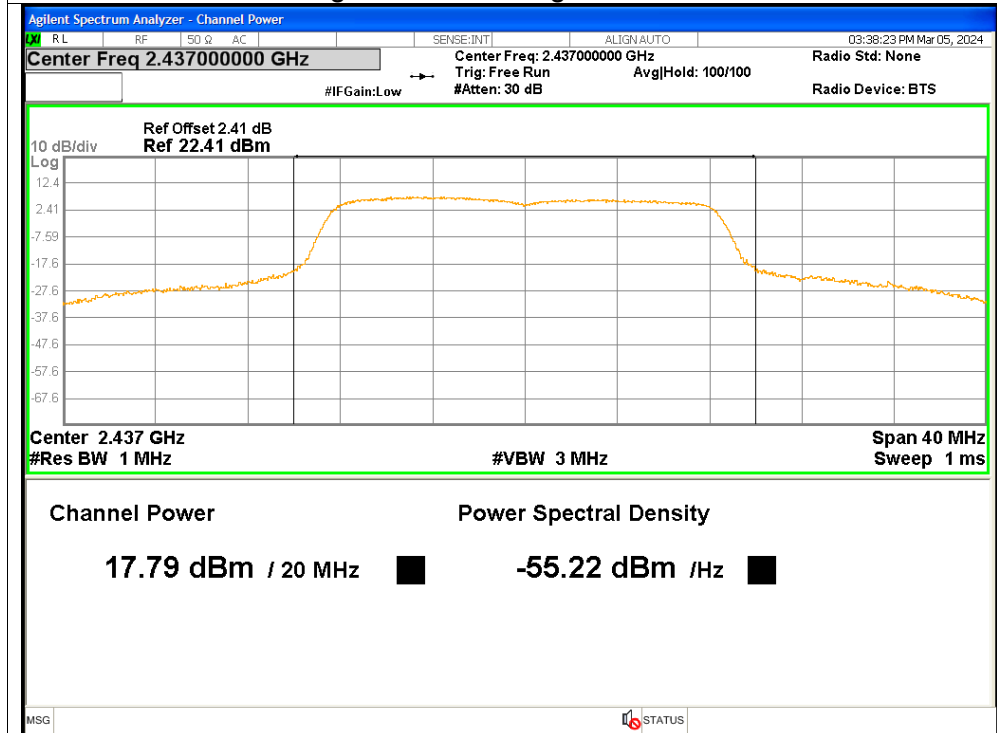


Average Power NVNT g 2437MHz Ant4

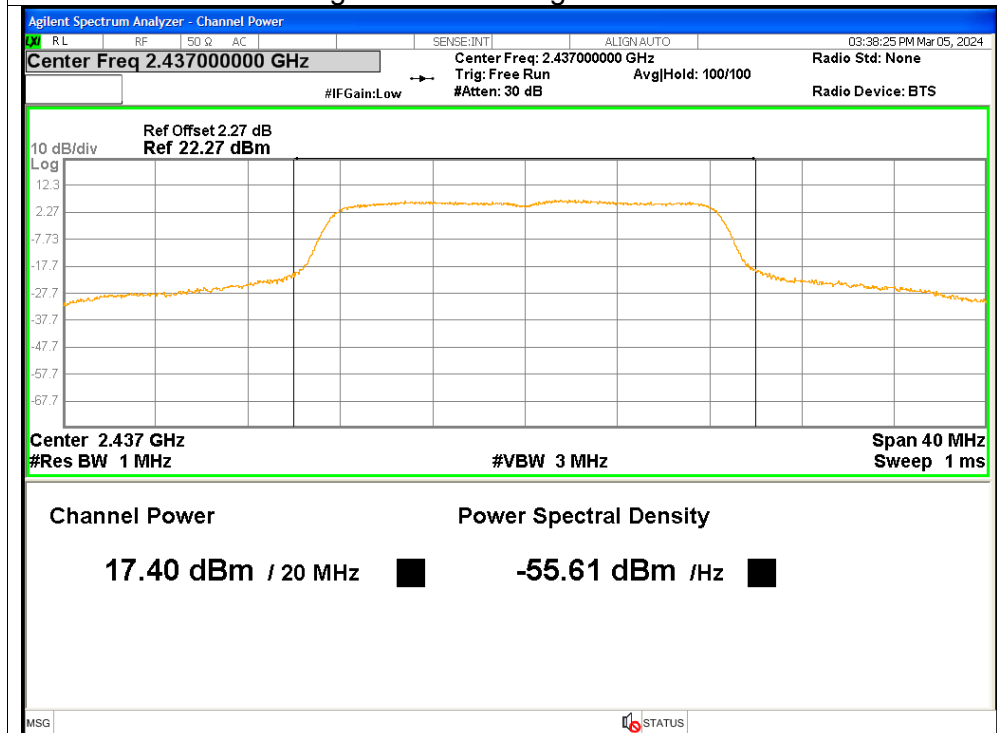




Average Power NVNT g 2462MHz Ant1

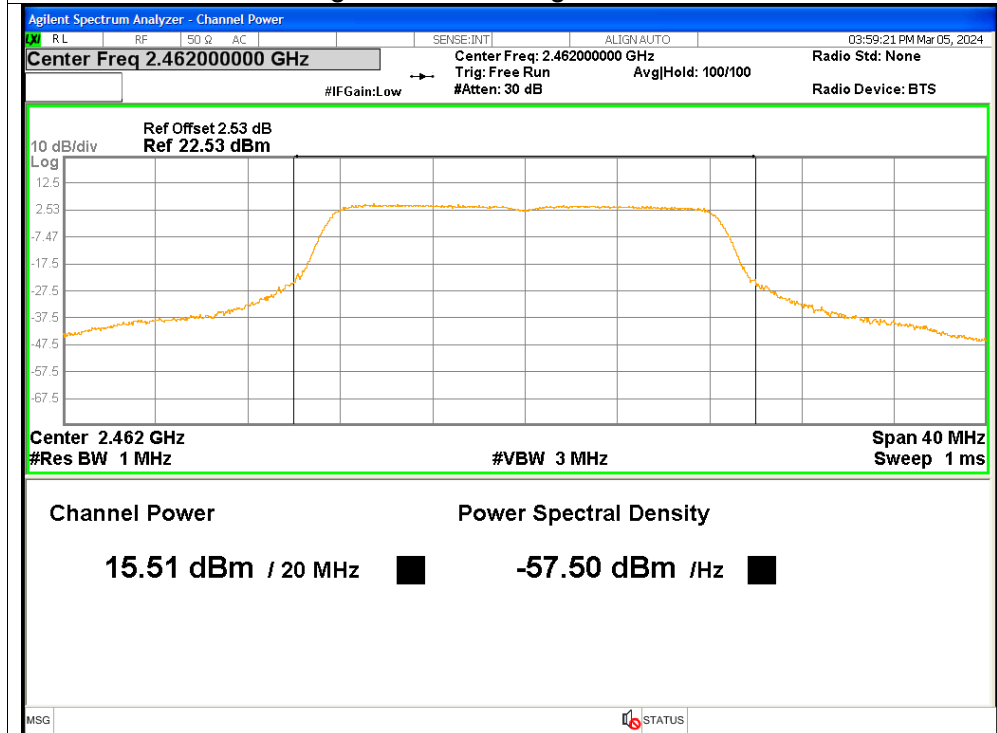


Average Power NVNT g 2462MHz Ant2

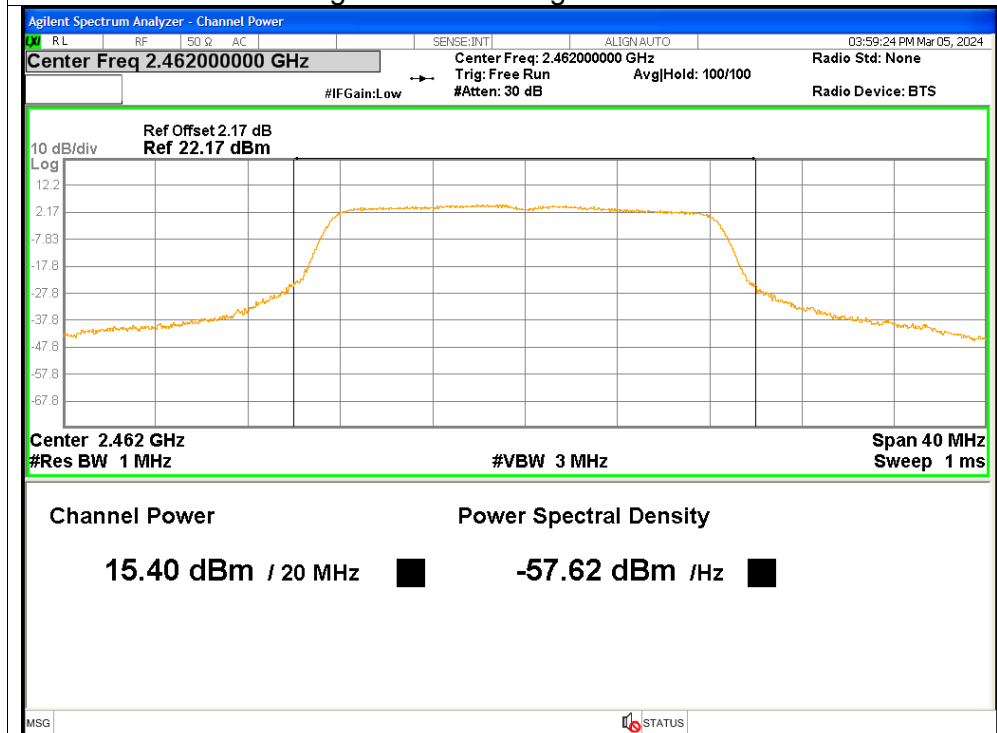



Average Power NVNT g 2462MHz Ant3

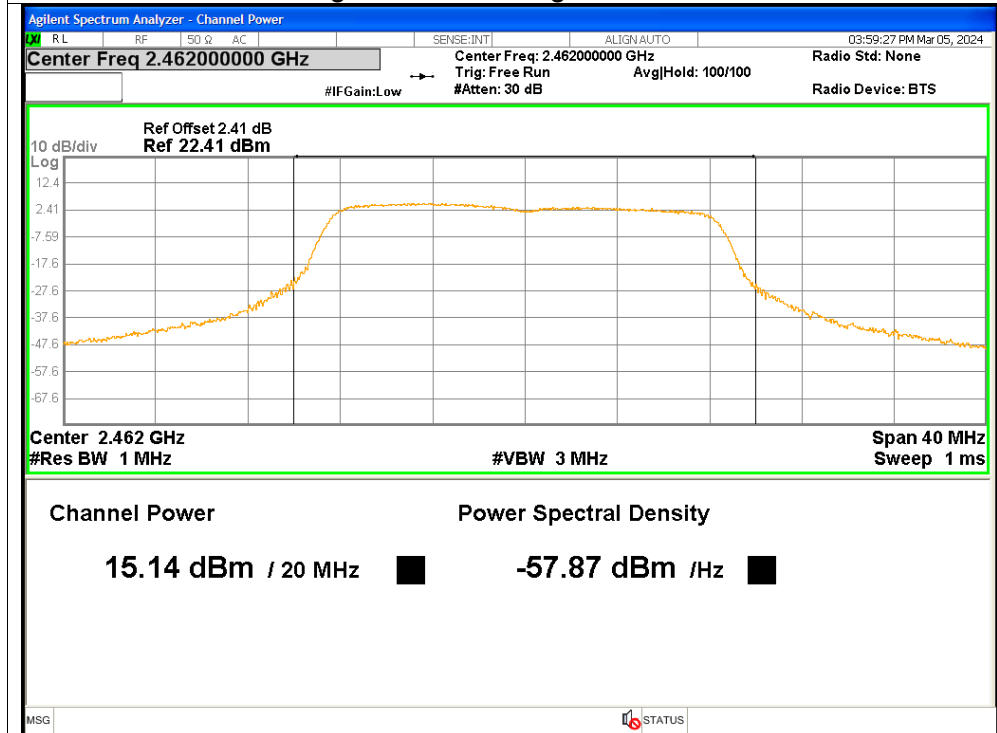

Average Power NVNT g 2462MHz Ant4

