

FCC SAR TEST REPORT

FCC ID : 2AP4W-BELLEP
Equipment : mPERS
Brand Name : Belle
Model Name : Belle X2
Marketing Name : Belle X2
Applicant : Freeus, LLC
1069 Stewart Dr, Suites 3-6 Ogden, Utah 84404, United States
Manufacturer : Freeus, LLC
1069 Stewart Dr, Suites 3-6 Ogden, Utah 84404, United States
Standard : FCC 47 CFR Part 2 (2.1093)

The product was received on Jan. 09, 2025 and testing was started from Jan. 09, 2025 and completed on Jan. 15, 2025. We, SPORTON INTERNATIONAL INC., would like to declare that the tested sample provide by manufacturer and the test data has been evaluated in accordance with the test procedures given in 47 CFR Part 2.1093 and FCC KDB and has been pass the FCC requirement.

The test results in this report apply exclusively to the tested model / sample. Without written approval of SPORTON INTERNATIONAL INC. Laboratory, the test report shall not be reproduced except in full.



Approved by: Cona Huang / Deputy Manager



Sporton International Inc. Wensan Laboratory

No.58, Aly. 75, Ln. 564, Wenhua 3rd, Rd., Guishan Dist., Taoyuan City 333010, Taiwan



Table of Contents

1. Statement of Compliance	4
2. Guidance Applied.....	4
3. Equipment Under Test (EUT) Information.....	5
3.1 General Information	5
3.2 General LTE SAR Test and Reporting Considerations	6
4. RF Exposure Limits.....	7
4.1 Uncontrolled Environment.....	7
4.2 Controlled Environment.....	7
5. Specific Absorption Rate (SAR).....	8
5.1 Introduction	8
5.2 SAR Definition.....	8
6. System Description and Setup	9
6.1 Test Site Location.....	9
6.2 E-Field Probe	10
6.3 Data Acquisition Electronics (DAE)	10
6.4 Phantom.....	11
6.5 Device Holder.....	12
7. Measurement Procedures	13
7.1 Spatial Peak SAR Evaluation.....	13
7.2 Power Reference Measurement.....	14
7.3 Area Scan	14
7.4 Zoom Scan.....	15
7.5 Volume Scan Procedures.....	15
7.6 Power Drift Monitoring.....	15
8. Test Equipment List.....	16
9. System Verification	17
9.1 Tissue Verification	17
9.2 System Performance Check Results.....	17
10. LTE Output Power (Unit: dBm)	18
11. WiFi/Bluetooth Exclusions Applied	27
12. Antenna Location	28
13. SAR Test Results	29
13.1 Head SAR.....	30
13.2 Body Worn Accessory SAR.....	31
13.3 Extremity SAR.....	32
13.4 Repeated SAR Measurement	33
14. Simultaneous Transmission Analysis	34
14.1 Head Exposure Conditions	35
14.2 Body-Worn Accessory Exposure Conditions	35
14.3 Extremity Exposure Conditions	36
15. Uncertainty Assessment	37
16. References.....	37
Appendix A. Plots of System Performance Check	
Appendix B. Plots of High SAR Measurement	
Appendix C. DASY Calibration Certificate	
Appendix D. Test Setup Photos	

History of this test report

Report No.	Version	Description	Issued Date
FA4N1311	01	Initial issue of report	Feb. 27, 2025

1. Statement of Compliance

The maximum results of Specific Absorption Rate (SAR) for Freeus, LLC, mPERS, Belle X2, are as follows.

Equipment Class	Frequency Band	Highest SAR Summary			Highest Simultaneous Transmission 1g SAR (W/kg)	Highest Simultaneous Transmission 10g SAR (W/kg)
		Head (Separation 10mm)	Body worn (Separation 0mm)	Extremity (Separation 0mm)		
		1g SAR (W/kg)		10g SAR (W/kg)		
Licensed	LTE Band 2	1.38	0.38	2.46	1.41	2.48
	LTE Band 12	0.56	0.22	1.63		
	LTE Band 13	0.68	0.23	1.43		
	LTE Band 4/66	1.38	0.25	1.62		
Date of Testing:		2025/01/09 ~ 2025/01/15				

Sporton Lab is accredited to ISO 17025 by Taiwan Accreditation Foundation and the FCC designation No. TW3786 under the FCC 2.948(e) by Mutual Recognition Agreement (MRA) in FCC test. This device is in compliance with Specific Absorption Rate (SAR) for general population/uncontrolled exposure limits (1.6 W/kg for Partial-Body 1g SAR, 4.0 W/kg for Extremity 10g SAR) specified in FCC 47 CFR part 2 (2.1093) and ANSI/IEEE C95.1-1992, and had been tested in accordance with the measurement methods and procedures specified in IEEE 1528-2013 and FCC KDB publications.

Reviewed by: Jason Wang
Report Producer: Paula Chen

2. Guidance Applied

The Specific Absorption Rate (SAR) testing specification, method, and procedure for this device is in accordance with the following standards, the below KDB standard may not including in the TAF code without accreditation.

- FCC 47 CFR Part 2 (2.1093)
- ANSI/IEEE C95.1-1992
- IEEE 1528-2013
- FCC KDB 865664 D01 SAR Measurement 100 MHz to 6 GHz v01r04
- FCC KDB 865664 D02 SAR Reporting v01r02
- FCC KDB 447498 D01 General RF Exposure Guidance v06
- FCC KDB 248227 D01 802.11 Wi-Fi SAR v02r02
- FCC KDB 941225 D05 SAR for LTE Devices v02r05



3. Equipment Under Test (EUT) Information

3.1 General Information

Product Feature & Specification	
Equipment Name	mPERS
Brand Name	Belle
Model Name	Belle X2
Marketing Name	Belle X2
FCC ID	2AP4W-BELLEP
Wireless Technology and Frequency Range	LTE Band 2: 1850 MHz ~ 1910 MHz LTE Band 4: 1710 MHz ~ 1755 MHz LTE Band 12: 699 MHz ~ 716 MHz LTE Band 13: 777 MHz ~ 787 MHz LTE Band 66: 1710 MHz ~ 1780 MHz WLAN 2.4 GHz Band: 2400 MHz ~ 2483.5 MHz Bluetooth: 2400 MHz ~ 2483.5 MHz
Mode	LTE: QPSK, 16QAM WLAN: 802.11b/g/n HT20/HT40 Bluetooth LE
HW Version	DVT1
SW Version	W241205A0851
Remark: 1. For RF exposure was selected sample1 perform full SAR testing, sample 2 spot check worst case found in sample1	

Sample List	
Sample 1	Black
Sample 2	Golden

3.2 General LTE SAR Test and Reporting Considerations

Summarized necessary items addressed in KDB 941225 D05 v02r05												
FCC ID			2AP4W-BELLEP									
Equipment Name			MPERS									
Operating Frequency Range of each LTE transmission band			LTE Band 2: 1850 MHz ~ 1910 MHz LTE Band 4: 1710 MHz ~ 1755 MHz LTE Band 12: 699 MHz ~ 716 MHz LTE Band 13: 777 MHz ~ 787 MHz LTE Band 66: 1710 MHz ~ 1780 MHz									
Channel Bandwidth			LTE Band 2:1.4MHz, 3MHz, 5MHz, 10MHz, 15MHz, 20MHz LTE Band 4:1.4MHz, 3MHz, 5MHz, 10MHz, 15MHz, 20MHz LTE Band 12:1.4MHz, 3MHz, 5MHz, 10MHz LTE Band 13: 5MHz, 10MHz LTE Band 66:1.4MHz, 3MHz, 5MHz, 10MHz, 15MHz, 20MHz									
uplink modulations used			QPSK / 16QAM									
LTE Voice / Data requirements			Data only									
LTE MPR permanently built-in by design			Table 6.2.3-1: Maximum Power Reduction (MPR) for Power Class 1, 2 and 3									
			Modulation	Channel bandwidth / Transmission bandwidth (N _{RB})						MPR (dB)		
				1.4 MHz	3.0 MHz	5 MHz	10 MHz	15 MHz	20 MHz			
			QPSK	> 5	> 4	> 8	> 12	> 16	> 18	≤ 1		
			16 QAM	≤ 5	≤ 4	≤ 8	≤ 12	≤ 16	≤ 18	≤ 1		
			16 QAM	> 5	> 4	> 8	> 12	> 16	> 18	≤ 2		
			64 QAM	≤ 5	≤ 4	≤ 8	≤ 12	≤ 16	≤ 18	≤ 2		
			64 QAM	> 5	> 4	> 8	> 12	> 16	> 18	≤ 3		
			256 QAM						≥ 1		≤ 5	
LTE A-MPR			In the base station simulator configuration, Network Setting value is set to NS_01 to disable A-MPR during SAR testing and the LTE SAR tests was transmitting on all TTI frames (Maximum TTI)									
Spectrum plots for RB configuration			A properly configured base station simulator was used for the SAR and power measurement; therefore, spectrum plots for each RB allocation and offset configuration are not included in the SAR report.									
Transmission (H, M, L) channel numbers and frequencies in each LTE band												
LTE Band 2												
	Bandwidth 1.4 MHz		Bandwidth 3 MHz		Bandwidth 5 MHz		Bandwidth 10 MHz		Bandwidth 15 MHz		Bandwidth 20 MHz	
	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)
L	18607	1850.7	18615	1851.5	18625	1852.5	18650	1855	18675	1857.5	18700	1860
M	18900	1880	18900	1880	18900	1880	18900	1880	18900	1880	18900	1880
H	19193	1909.3	19185	1908.5	19175	1907.5	19150	1905	19125	1902.5	19100	1900
LTE Band 4												
	Bandwidth 1.4 MHz		Bandwidth 3 MHz		Bandwidth 5 MHz		Bandwidth 10 MHz		Bandwidth 15 MHz		Bandwidth 20 MHz	
	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)
L	19957	1710.7	19965	1711.5	19975	1712.5	20000	1715	20025	1717.5	20050	1720
M	20175	1732.5	20175	1732.5	20175	1732.5	20175	1732.5	20175	1732.5	20175	1732.5
H	20393	1754.3	20385	1753.5	20375	1752.5	20350	1750	20325	1747.5	20300	1745
LTE Band 12												
	Bandwidth 1.4 MHz		Bandwidth 3 MHz		Bandwidth 5 MHz		Bandwidth 10 MHz					
	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)
L	23017	699.7	23025	700.5	23035	701.5	23060	704				
M	23095	707.5	23095	707.5	23095	707.5	23095	707.5				
H	23173	715.3	23165	714.5	23155	713.5	23130	711				
LTE Band 13												
	Bandwidth 5 MHz				Bandwidth 10 MHz							
	Channel #		Freq.(MHz)				Channel #		Freq.(MHz)			
L	23205		779.5				23230		782			
M	23230		782									
H	23255		784.5									

LTE Band 66												
	Bandwidth 1.4 MHz		Bandwidth 3 MHz		Bandwidth 5 MHz		Bandwidth 10 MHz		Bandwidth 15 MHz		Bandwidth 20 MHz	
	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)
L	131979	1710.7	131987	1711.5	131997	1712.5	132022	1715	132047	1717.5	132072	1720
M	132322	1745	132322	1745	132322	1745	132322	1745	132322	1745	132322	1745
H	132665	1779.3	132657	1778.5	132647	1777.5	132622	1775	132597	1772.5	132572	1770

4. RF Exposure Limits

4.1 Uncontrolled Environment

Uncontrolled Environments are defined as locations where there is the exposure of individuals who have no knowledge or control of their exposure. The general population/uncontrolled exposure limits are applicable to situations in which the general public may be exposed or in which persons who are exposed as a consequence of their employment may not be made fully aware of the potential for exposure or cannot exercise control over their exposure. Members of the general public would come under this category when exposure is not employment-related; for example, in the case of a wireless transmitter that exposes persons in its vicinity.

4.2 Controlled Environment

Controlled Environments are defined as locations where there is exposure that may be incurred by persons who are aware of the potential for exposure, (i.e. as a result of employment or occupation). In general, occupational/controlled exposure limits are applicable to situations in which persons are exposed as a consequence of their employment, who have been made fully aware of the potential for exposure and can exercise control over their exposure. The exposure category is also applicable when the exposure is of a transient nature due to incidental passage through a location where the exposure levels may be higher than the general population/uncontrolled limits, but the exposed person is fully aware of the potential for exposure and can exercise control over his or her exposure by leaving the area or by some other appropriate means.

Limits for Occupational/Controlled Exposure (W/kg)

Whole-Body	Partial-Body	Hands, Wrists, Feet and Ankles
0.4	8.0	20.0

Limits for General Population/Uncontrolled Exposure (W/kg)

Whole-Body	Partial-Body	Hands, Wrists, Feet and Ankles
0.08	1.6	4.0

1. Whole-Body SAR is averaged over the entire body, partial-body SAR is averaged over any 1gram of tissue defined as a tissue volume in the shape of a cube. SAR for hands, wrists, feet and ankles is averaged over any 10 grams of tissue defined as a tissue volume in the shape of a cube.

5. Specific Absorption Rate (SAR)

5.1 Introduction

SAR is related to the rate at which energy is absorbed per unit mass in an object exposed to a radio field. The SAR distribution in a biological body is complicated and is usually carried out by experimental techniques or numerical modeling. The standard recommends limits for two tiers of groups, occupational/controlled and general population/uncontrolled, based on a person's awareness and ability to exercise control over his or her exposure. In general, occupational/controlled exposure limits are higher than the limits for general population/uncontrolled.

5.2 SAR Definition

The SAR definition is the time derivative (rate) of the incremental energy (dW) absorbed by (dissipated in) an incremental mass (dm) contained in a volume element (dv) of a given density (ρ). The equation description is as below:

$$SAR = \frac{d}{dt} \left(\frac{dW}{dm} \right) = \frac{d}{dt} \left(\frac{dW}{\rho dv} \right)$$


SAR is expressed in units of Watts per kilogram (W/kg)

$$SAR = \frac{\sigma |E|^2}{\rho}$$

Where: σ is the conductivity of the tissue, ρ is the mass density of the tissue and E is the RMS electrical field strength.

6. System Description and Setup

The DASY system used for performing compliance tests consists of the following items:

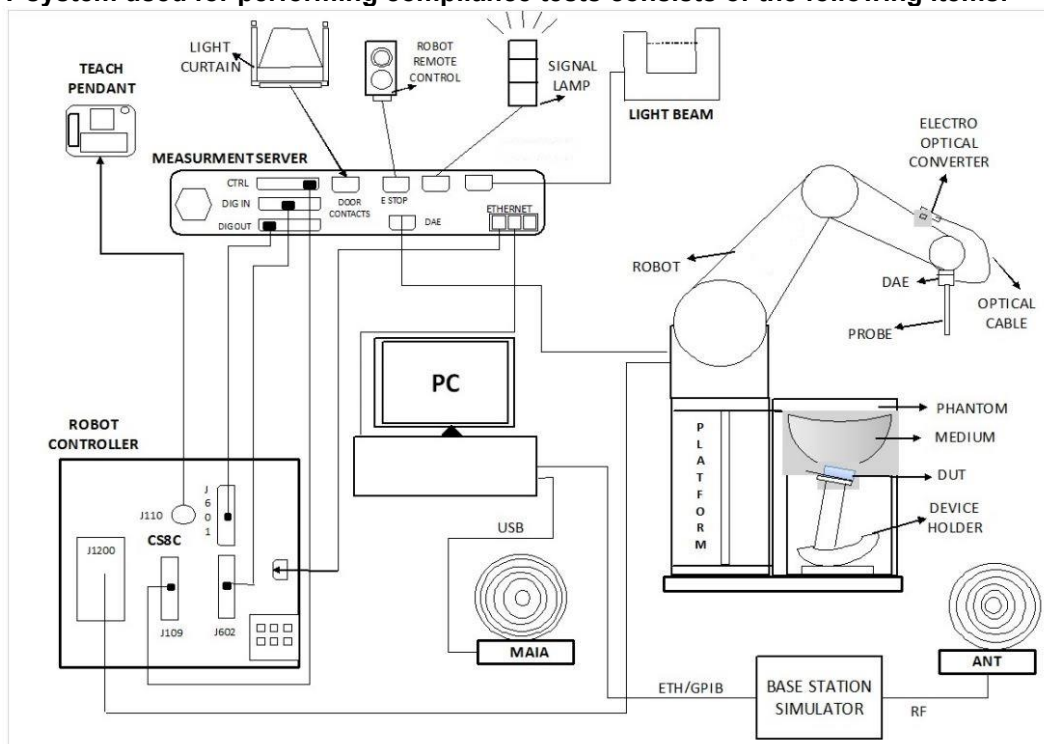

- The DASY system in SAR Configuration is shown above
- A standard high precision 6-axis robot with controller, teach pendant and software. An arm extension for accommodating the data acquisition electronics (DAE).
- An isotropic Field probe optimized and calibrated for the targeted measurement.
- A data acquisition electronics (DAE) which performs the signal amplification, signal multiplexing, AD-conversion, offset measurements, mechanical surface detection, collision detection, etc. The unit is battery powered with standard or rechargeable batteries. The signal is optically transmitted to the EOC.
- The Electro-optical converter (EOC) performs the conversion from optical to electrical signals for the digital communication to the DAE. To use optical surface detection, a special version of the EOC is required. The EOC signal is transmitted to the measurement server.
- The function of the measurement server is to perform the time critical tasks such as signal filtering, control of the robot operation and fast movement interrupts.
- The Light Beam used is for probe alignment. This improves the (absolute) accuracy of the probe positioning.
- A computer running windows software and the DASY software.
- Remote control and teach pendant as well as additional circuitry for robot safety such as warning lamps, etc.
- The phantom, the device holder and other accessories according to the targeted measurement.

6.1 Test Site Location

The SAR measurement facilities used to collect data are within both Sporton Lab list below test site location are accredited to ISO 17025 by Taiwan Accreditation Foundation (TAF code: 1190 and 3786) and the FCC designation No. TW1190 and TW3786 under the FCC 2.948(e) by Mutual Recognition Agreement (MRA) in FCC test.

Laboratory	EMC & Wireless Communications Laboratory		Wensan Laboratory					
Test Site Location	TW1190 No.52, Huaya 1st Rd., Guishan Dist., Taoyuan City 333, Taiwan		TW3786 No.58, Aly. 75, Ln. 564, Wenhua 3rd, Rd., Guishan Dist., Taoyuan City 333010, Taiwan					
Test Site No.	SAR01-HY	SAR03-HY	SAR08-HY	SAR09-HY	SAR15-HY	SAR18-HY	SAR21-HY	
	SAR04-HY	SAR05-HY	SAR11-HY	SAR12-HY	SAR16-HY	SAR19-HY	SAR22-HY	
	SAR06-HY	SAR10-HY	SAR13-HY	SAR14-HY	SAR17-HY	SAR20-HY		

6.2 E-Field Probe

The SAR measurement is conducted with the dosimetric probe (manufactured by SPEAG). The probe is specially designed and calibrated for use in liquid with high permittivity. The dosimetric probe has special calibration in liquid at different frequency. This probe has a built in optical surface detection system to prevent from collision with phantom.

<ES3DV3 Probe>

Construction	Symmetric design with triangular core Interleaved sensors Built-in shielding against static charges PEEK enclosure material (resistant to organic solvents, e.g., DGBE)	
Frequency	4 MHz – 4 GHz; Linearity: ± 0.2 dB (30 MHz – 4 GHz)	
Directivity	± 0.2 dB in TSL (rotation around probe axis) ± 0.3 dB in TSL (rotation normal to probe axis)	
Dynamic Range	5 μ W/g – >100 mW/g; Linearity: ± 0.2 dB	
Dimensions	Overall length: 337 mm (tip: 20 mm) Tip diameter: 3.9 mm (body: 12 mm) Distance from probe tip to dipole centers: 3.0 mm	

<EX3DV4 Probe>

Construction	Symmetric design with triangular core Built-in shielding against static charges PEEK enclosure material (resistant to organic solvents, e.g., DGBE)	
Frequency	4 MHz – >6 GHz Linearity: ± 0.2 dB (30 MHz – 6 GHz)	
Directivity	± 0.3 dB in TSL (rotation around probe axis) ± 0.5 dB in TSL (rotation normal to probe axis)	
Dynamic Range	10 μ W/g – >100 mW/g Linearity: ± 0.2 dB (noise: typically <1 μ W/g)	
Dimensions	Overall length: 337 mm (tip: 20 mm) Tip diameter: 2.5 mm (body: 12 mm) Typical distance from probe tip to dipole centers: 1 mm	

6.3 Data Acquisition Electronics (DAE)

The data acquisition electronics (DAE) consists of a highly sensitive electrometer-grade preamplifier with auto-zeroing, a channel and gain-switching multiplexer, a fast 16 bit AD-converter and a command decoder and control logic unit. Transmission to the measurement server is accomplished through an optical downlink for data and status information as well as an optical uplink for commands and the clock.

The input impedance of the DAE is 200 MOhm; the inputs are symmetrical and floating. Common mode rejection is above 80 dB.



Fig 5.1 Photo of DAE

6.4 Phantom

<SAM Twin Phantom>

Shell Thickness	2 ± 0.2 mm; Center ear point: 6 ± 0.2 mm	
Filling Volume	Approx. 25 liters	
Dimensions	Length: 1000 mm; Width: 500 mm; Height: adjustable feet	
Measurement Areas	Left Hand, Right Hand, Flat Phantom	

The bottom plate contains three pair of bolts for locking the device holder. The device holder positions are adjusted to the standard measurement positions in the three sections. A white cover is provided to tap the phantom during off-periods to prevent water evaporation and changes in the liquid parameters. On the phantom top, three reference markers are provided to identify the phantom position with respect to the robot.

<ELI Phantom>

Shell Thickness	2 ± 0.2 mm (sagging: <1%)	
Filling Volume	Approx. 30 liters	
Dimensions	Major ellipse axis: 600 mm Minor axis: 400 mm	

The ELI phantom is intended for compliance testing of handheld and body-mounted wireless devices in the frequency range of 30 MHz to 6 GHz. ELI4 is fully compatible with standard and all known tissue simulating liquids.

6.5 Device Holder

<Mounting Device for Hand-Held Transmitter>

In combination with the Twin SAM V5.0/V5.0c or ELI phantoms, the Mounting Device for Hand-Held Transmitters enables rotation of the mounted transmitter device to specified spherical coordinates. At the heads, the rotation axis is at the ear opening. Transmitter devices can be easily and accurately positioned according to IEC 62209-1, IEEE 1528, FCC, or other specifications. The device holder can be locked for positioning at different phantom sections (left head, right head, flat). And upgrade kit to Mounting Device to enable easy mounting of wider devices like big smart-phones, e-books, small tablets, etc. It holds devices with width up to 140 mm.



Mounting Device for Hand-Held Transmitters



Mounting Device Adaptor for Wide-Phones

<Mounting Device for Laptops and other Body-Worn Transmitters>

The extension is lightweight and made of POM, acrylic glass and foam. It fits easily on the upper part of the mounting device in place of the phone positioned. The extension is fully compatible with the SAM Twin and ELI phantoms.



Mounting Device for Laptops

7. Measurement Procedures

The measurement procedures are as follows:

- (a) Use base station simulator to configure EUT WWAN transmission in radiated connection, and engineering software to configure EUT WLAN/BT continuously transmission, at maximum RF power, in the highest power channel.
- (b) Place the EUT in the positions as Appendix D demonstrates.
- (c) Set scan area, grid size and other setting on the DASY software.
- (d) Measure SAR results for the highest power channel on each testing position.
- (e) Find out the largest SAR result on these testing positions of each band
- (f) Measure SAR results for other channels in worst SAR testing position if the reported SAR of highest power channel is larger than 0.8 W/kg

According to the test standard, the recommended procedure for assessing the peak spatial-average SAR value consists of the following steps:

- (a) Power reference measurement
- (b) Area scan
- (c) Zoom scan
- (d) Power drift measurement

7.1 Spatial Peak SAR Evaluation

The procedure for spatial peak SAR evaluation has been implemented according to the test standard. It can be conducted for 1g and 10g, as well as for user-specific masses. The DASY software includes all numerical procedures necessary to evaluate the spatial peak SAR value.

The base for the evaluation is a "cube" measurement. The measured volume must include the 1g and 10g cubes with the highest averaged SAR values. For that purpose, the center of the measured volume is aligned to the interpolated peak SAR value of a previously performed area scan.

The entire evaluation of the spatial peak values is performed within the post-processing engine (SEMCAD). The system always gives the maximum values for the 1g and 10g cubes. The algorithm to find the cube with highest averaged SAR is divided into the following stages:

- (a) Extraction of the measured data (grid and values) from the Zoom Scan
- (b) Calculation of the SAR value at every measurement point based on all stored data (A/D values and measurement parameters)
- (c) Generation of a high-resolution mesh within the measured volume
- (d) Interpolation of all measured values from the measurement grid to the high-resolution grid
- (e) Extrapolation of the entire 3-D field distribution to the phantom surface over the distance from sensor to surface
- (f) Calculation of the averaged SAR within masses of 1g and 10g

7.2 Power Reference Measurement

The Power Reference Measurement and Power Drift Measurements are for monitoring the power drift of the device under test in the batch process. The minimum distance of probe sensors to surface determines the closest measurement point to phantom surface. This distance cannot be smaller than the distance of sensor calibration points to probe tip as defined in the probe properties.

7.3 Area Scan

The area scan is used as a fast scan in two dimensions to find the area of high field values, before doing a fine measurement around the hot spot. The sophisticated interpolation routines implemented in DASY software can find the maximum found in the scanned area, within a range of the global maximum. The range (in dB0) is specified in the standards for compliance testing. For example, a 2 dB range is required in IEEE standard 1528 and IEC 62209 standards, whereby 3 dB is a requirement when compliance is assessed in accordance with the ARIB standard (Japan), if only one zoom scan follows the area scan, then only the absolute maximum will be taken as reference. For cases where multiple maximums are detected, the number of zoom scans has to be increased accordingly.

Area scan parameters extracted from FCC KDB 865664 D01v01r04 SAR measurement 100 MHz to 6 GHz.

	≤ 3 GHz	> 3 GHz
Maximum distance from closest measurement point (geometric center of probe sensors) to phantom surface	5 ± 1 mm	$\frac{1}{2} \cdot \delta \cdot \ln(2) \pm 0.5$ mm
Maximum probe angle from probe axis to phantom surface normal at the measurement location	$30^\circ \pm 1^\circ$	$20^\circ \pm 1^\circ$
Maximum area scan spatial resolution: Δx_{Area} , Δy_{Area}	≤ 2 GHz: ≤ 15 mm $2 - 3$ GHz: ≤ 12 mm	$3 - 4$ GHz: ≤ 12 mm $4 - 6$ GHz: ≤ 10 mm
	When the x or y dimension of the test device, in the measurement plane orientation, is smaller than the above, the measurement resolution must be $\leq$ the corresponding x or y dimension of the test device with at least one measurement point on the test device.	

7.4 Zoom Scan

Zoom scans are used to assess the peak spatial SAR values within a cubic averaging volume containing 1 gram and 10 gram of simulated tissue. The zoom scan measures points (refer to table below) within a cube whose base faces are centered on the maxima found in a preceding area scan job within the same procedure. When the measurement is done, the zoom scan evaluates the averaged SAR for 1 gram and 10 gram and displays these values next to the job's label.

Zoom scan parameters extracted from FCC KDB 865664 D01v01r04 SAR measurement 100 MHz to 6 GHz.

			≤ 3 GHz	> 3 GHz
Maximum zoom scan spatial resolution: $\Delta x_{\text{Zoom}}, \Delta y_{\text{Zoom}}$			≤ 2 GHz: ≤ 8 mm 2 – 3 GHz: ≤ 5 mm*	3 – 4 GHz: ≤ 5 mm* 4 – 6 GHz: ≤ 4 mm*
Maximum zoom scan spatial resolution, normal to phantom surface	uniform grid: $\Delta z_{\text{Zoom}}(n)$		≤ 5 mm	3 – 4 GHz: ≤ 4 mm 4 – 5 GHz: ≤ 3 mm 5 – 6 GHz: ≤ 2 mm
	graded grid	$\Delta z_{\text{Zoom}}(1)$: between 1 st two points closest to phantom surface	≤ 4 mm	3 – 4 GHz: ≤ 3 mm 4 – 5 GHz: ≤ 2.5 mm 5 – 6 GHz: ≤ 2 mm
		$\Delta z_{\text{Zoom}}(n>1)$: between subsequent points	$\leq 1.5 \cdot \Delta z_{\text{Zoom}}(n-1)$	
Minimum zoom scan volume	x, y, z		≥ 30 mm	3 – 4 GHz: ≥ 28 mm 4 – 5 GHz: ≥ 25 mm 5 – 6 GHz: ≥ 22 mm
Note: δ is the penetration depth of a plane-wave at normal incidence to the tissue medium; see draft standard IEEE P1528-2011 for details.				
* When zoom scan is required and the <i>reported</i> SAR from the <i>area scan based 1-g SAR estimation</i> procedures of KDB 447498 is ≤ 1.4 W/kg, ≤ 8 mm, ≤ 7 mm and ≤ 5 mm zoom scan resolution may be applied, respectively, for 2 GHz to 3 GHz, 3 GHz to 4 GHz and 4 GHz to 6 GHz.				

7.5 Volume Scan Procedures

The volume scan is used to assess overlapping SAR distributions for antennas transmitting in different frequency bands. It is equivalent to an oversized zoom scan used in standalone measurements. The measurement volume will be used to enclose all the simultaneous transmitting antennas. For antennas transmitting simultaneously in different frequency bands, the volume scan is measured separately in each frequency band. In order to sum correctly to compute the 1g aggregate SAR, the EUT remain in the same test position for all measurements and all volume scan use the same spatial resolution and grid spacing. When all volume scan were completed, the software, SEMCAD postprocessor can combine and subsequently superpose these measurement data to calculating the multiband SAR.

7.6 Power Drift Monitoring

All SAR testing is under the EUT install full charged battery and transmit maximum output power. In DASy measurement software, the power reference measurement and power drift measurement procedures are used for monitoring the power drift of EUT during SAR test. Both these procedures measure the field at a specified reference position before and after the SAR testing. The software will calculate the field difference in dB. If the power drifts more than 5%, the SAR will be retested.

8. Test Equipment List

Manufacturer	Name of Equipment	Type/Model	Serial Number	Calibration	
				Last Cal.	Due Date
SPEAG	750MHz System Validation Kit ⁽²⁾	D750V3	1107	Jun. 22, 2022	Jun. 19, 2025
SPEAG	1750MHz System Validation Kit ⁽²⁾	D1750V2	1120	Mar. 25, 2022	Mar. 22, 2025
SPEAG	1900MHz System Validation Kit ⁽²⁾	D1900V2	5d093	Mar. 25, 2022	Mar. 22, 2025
SPEAG	Data Acquisition Electronics	DAE4	1694	Nov. 19, 2024	Nov. 18, 2025
SPEAG	Dosimetric E-Field Probe	EX3DV4	7785	Nov. 28, 2024	Nov. 27, 2025
Testo	Hygro meter	608-H1	45196600	Oct. 28, 2024	Oct. 27, 2025
Anritsu	Radio Communication Analyzer	MT8821C	6201341950	Nov. 12, 2024	Nov. 11, 2025
SPEAG	Device Holder	N/A	N/A	N/A	N/A
Anritsu	Signal Generator	MG3710A	6201502524	Sep. 24, 2024	Sep. 23, 2025
Keysight	ENA Network Analyzer	E5071C	MY46104758	Oct. 20, 2024	Oct. 19, 2025
SPEAG	Dielectric Probe Kit	DAK-3.5	1126	Sep. 17, 2024	Sep. 16, 2025
LINE SEIKI	Digital Thermometer	DTM3000-spezial	3690	Aug. 07, 2024	Aug. 06, 2025
Anritsu	Power Meter	ML2495A	1419002	Aug. 13, 2024	Aug. 12, 2025
Anritsu	Power Sensor	MA2411B	1911176	Aug. 13, 2024	Aug. 12, 2025
Anritsu	Spectrum Analyzer	MS2830A	6201396378	Jul. 09, 2024	Jul. 08, 2025
Mini-Circuits	Power Amplifier	ZVE-8G+	6418	Oct. 23, 2024	Oct. 22, 2025
ATM	Dual Directional Coupler	C122H-10	P610410z-02	Note 1	
Warison	Directional Coupler	WCOU-10-50S-10	WR889BMC4B1	Note 1	
Woken	Attenuator 1	WK0602-XX	N/A	Note 1	
PE	Attenuator 2	PE7005-10	N/A	Note 1	
PE	Attenuator 3	PE7005- 3	N/A	Note 1	

General Note:

1. Prior to system verification and validation, the path loss from the signal generator to the system check source and the power meter, which includes the amplifier, cable, attenuator and directional coupler, was measured by the network analyzer. The reading of the power meter was offset by the path loss difference between the path to the power meter and the path to the system check source to monitor the actual power level fed to the system check source.
2. The dipole calibration interval can be extended to 3 years with justification according to KDB 865664 D01. The dipoles are also not physically damaged, or repaired during the interval. The justification data in appendix C can be found which the return loss is < -20dB, within 20% of prior calibration, the impedance is within 5 ohm of prior calibration for each dipole.

10. LTE Output Power (Unit: dBm)

<LTE Conducted Power>

General Note:

1. A Base station simulator was used to setup the connection with EUT; the frequency band, channel bandwidth, RB allocation configuration, modulation type are set in the base station simulator to configure EUT transmitting at maximum power and at different configurations which are requested to be reported to FCC, for conducted power measurement and SAR testing.
2. Per KDB 941225 D05v02r05, when a properly configured base station simulator is used for the SAR and power measurements, spectrum plots for each RB allocation and offset configuration is not required.
3. Per KDB 941225 D05v02r05, start with the largest channel bandwidth and measure SAR for QPSK with 1 RB allocation, using the RB offset and required test channel combination with the highest maximum output power for RB offsets at the upper edge, middle and lower edge of each required test channel.
4. Per KDB 941225 D05v02r05, 50% RB allocation for QPSK SAR testing follows 1RB QPSK allocation procedure.
5. Per KDB 941225 D05v02r05, For QPSK with 100% RB allocation, SAR is not required when the highest maximum output power for 100 % RB allocation is less than the highest maximum output power in 50% and 1 RB allocations and the highest reported SAR for 1 RB and 50% RB allocation are ≤ 0.8 W/kg. Otherwise, SAR is measured for the highest output power channel; and if the reported SAR is > 1.45 W/kg, the remaining required test channels must also be tested.
6. Per KDB 941225 D05v02r05, 16QAM output power for each RB allocation configuration is $>$ not $\frac{1}{2}$ dB higher than the same configuration in QPSK and the reported SAR for the QPSK configuration is ≤ 1.45 W/kg; Per KDB 941225 D05v02r05, 16QAM SAR testing is not required.
7. Per KDB 941225 D05v02r05, Smaller bandwidth output power for each RB allocation configuration is $>$ not $\frac{1}{2}$ dB higher than the same configuration in the largest supported bandwidth, and the reported SAR for the largest supported bandwidth is ≤ 1.45 W/kg; Per KDB 941225 D05v02r05, smaller bandwidth SAR testing is not required.
8. For LTE B4/B12 the maximum bandwidth does not support three non-overlapping channels, per KDB 941225 D05v02r05, when a device supports overlapping channel assignment in a channel bandwidth configuration, the middle channel of the group of overlapping channels should be selected for testing.
9. LTE band 4 SAR test was covered by Band 66; according to April 2015 TCB workshop, SAR test for overlapping LTE bands can be reduced if
 - a. the maximum output power, including tolerance, for the smaller band is $\leq$ the larger band to qualify for the SAR test exclusion
 - b. the channel bandwidth and other operating parameters for the smaller band are fully supported by the larger band



<LTE Band 2_Ant 1>

BW [MHz]	Modulation	RB Size	RB Offset	Power Low Ch. / Freq.	Power Middle Ch. / Freq.	Power High Ch. / Freq.	Tune-up limit (dBm)
Channel				18700	18900	19100	
Frequency (MHz)				1860	1880	1900	
20	QPSK	1	0	21.88	21.76	21.78	
20	QPSK	1	49	21.70	22.21	22.11	22.5
20	QPSK	1	99	22.07	21.87	21.90	
20	QPSK	50	0	21.04	21.49	21.41	
20	QPSK	50	24	21.14	21.42	21.68	22
20	QPSK	50	50	21.38	21.17	21.71	
20	QPSK	100	0	21.29	21.26	21.48	
20	16QAM	1	0	21.24	21.68	21.35	22
20	16QAM	1	13	21.29	21.81	21.58	
20	16QAM	1	26	21.37	21.80	21.68	
20	16QAM	12	0	21.08	21.48	21.17	22
20	16QAM	12	7	21.12	21.48	21.22	
20	16QAM	12	15	21.14	21.45	21.35	
20	16QAM	27	0	20.08	20.54	20.14	21
Channel				18675	18900	19125	Tune-up limit (dBm)
Frequency (MHz)				1857.5	1880	1902.5	
15	QPSK	1	0	21.71	21.60	21.58	
15	QPSK	1	37	21.58	22.07	21.96	22.5
15	QPSK	1	74	21.96	21.71	21.73	
15	QPSK	36	0	20.90	21.37	21.31	
15	QPSK	36	20	20.97	21.29	21.49	22
15	QPSK	36	39	21.18	21.03	21.57	
15	QPSK	75	0	21.09	21.14	21.32	
15	16QAM	1	0	21.06	21.52	21.22	22
15	16QAM	1	13	21.15	21.61	21.43	
15	16QAM	1	26	21.27	21.63	21.55	
15	16QAM	12	0	20.96	21.28	21.07	22
15	16QAM	12	7	20.98	21.36	21.12	
15	16QAM	12	15	21.00	21.33	21.21	
15	16QAM	27	0	19.97	20.44	19.96	21
Channel				18650	18900	19150	Tune-up limit (dBm)
Frequency (MHz)				1855	1880	1905	
10	QPSK	1	0	21.40	21.68	22.01	
10	QPSK	1	25	21.49	21.74	22.13	22.5
10	QPSK	1	49	21.39	21.30	21.51	
10	QPSK	25	0	20.90	21.32	21.59	
10	QPSK	25	12	20.94	21.26	21.58	22
10	QPSK	25	25	20.96	21.10	21.45	
10	QPSK	50	0	21.00	21.28	21.65	
10	16QAM	1	0	21.17	21.63	21.93	22
10	16QAM	1	13	21.30	21.75	21.87	
10	16QAM	1	26	21.32	21.57	21.94	
10	16QAM	12	0	20.99	21.39	21.67	22
10	16QAM	12	7	21.04	21.43	21.63	
10	16QAM	12	15	21.01	21.39	21.67	
10	16QAM	27	0	20.09	20.51	20.71	21
Channel				18625	18900	19175	Tune-up limit (dBm)
Frequency (MHz)				1852.5	1880	1907.5	
5	QPSK	1	0	21.46	21.69	21.98	
5	QPSK	1	12	21.49	21.72	21.86	22.5
5	QPSK	1	24	21.43	21.45	21.40	
5	QPSK	12	0	20.96	21.28	21.41	
5	QPSK	12	7	20.97	21.27	21.25	22
5	QPSK	12	13	20.95	21.17	21.09	
5	QPSK	25	0	21.01	21.24	21.21	
5	16QAM	1	0	21.28	21.66	21.80	22



FCC SAR TEST REPORT

Report No. : FA4N1311

5	16QAM	1	12	21.32	21.61	21.66	21
5	16QAM	1	24	21.27	21.32	21.14	
5	16QAM	12	0	20.12	20.43	20.55	
5	16QAM	12	7	20.00	20.42	20.40	
5	16QAM	12	13	20.00	20.32	20.24	
5	16QAM	25	0	20.01	20.37	20.38	
Channel				18615	18900	19185	Tune-up limit (dBm)
Frequency (MHz)				1851.5	1880	1908.5	
3	QPSK	1	0	21.32	21.59	21.82	22.5
3	QPSK	1	8	21.37	21.59	21.67	
3	QPSK	1	14	21.33	21.25	21.26	
3	QPSK	8	0	20.85	21.11	21.31	22
3	QPSK	8	4	20.80	21.14	21.13	
3	QPSK	8	7	20.82	21.07	20.98	
3	QPSK	15	0	20.89	21.04	21.04	
3	16QAM	1	0	21.15	21.47	21.69	22
3	16QAM	1	8	21.16	21.51	21.53	
3	16QAM	1	14	21.13	21.22	21.04	
3	16QAM	8	0	19.95	20.26	20.35	21
3	16QAM	8	4	19.86	20.30	20.20	
3	16QAM	8	7	19.85	20.13	20.09	
3	16QAM	15	0	19.88	20.18	20.24	
Channel				18607	18900	19193	Tune-up limit (dBm)
Frequency (MHz)				1850.7	1880	1909.3	
1.4	QPSK	1	0	21.48	21.72	21.59	22.5
1.4	QPSK	1	3	21.46	21.71	21.53	
1.4	QPSK	1	5	21.41	21.65	21.44	
1.4	QPSK	3	0	21.48	21.76	21.55	
1.4	QPSK	3	1	21.47	21.77	21.54	
1.4	QPSK	3	3	21.45	21.73	21.47	
1.4	QPSK	6	0	20.95	21.19	21.08	22
1.4	16QAM	1	0	21.31	21.61	21.44	22
1.4	16QAM	1	3	21.26	21.63	21.45	
1.4	16QAM	1	5	21.19	21.56	21.29	
1.4	16QAM	3	0	21.00	21.35	21.18	
1.4	16QAM	3	1	21.05	21.36	21.16	
1.4	16QAM	3	3	20.99	21.32	21.05	
1.4	16QAM	6	0	20.13	20.52	20.21	21



<LTE Band 4_Ant 1>

BW [MHz]	Modulation	RB Size	RB Offset	Power Low Ch. / Freq.	Power Middle Ch. / Freq.	Power High Ch. / Freq.	Tune-up limit (dBm)
Channel				20050	20175	20300	
Frequency (MHz)				1720	1732.5	1745	
20	QPSK	1	0	21.27	21.92	21.87	
20	QPSK	1	49	21.68	22.21	21.86	22.5
20	QPSK	1	99	22.04	22.16	21.91	
20	QPSK	50	0	20.84	21.42	21.17	
20	QPSK	50	24	20.99	21.51	21.14	22
20	QPSK	50	50	21.22	21.51	21.14	
20	QPSK	100	0	21.20	21.51	21.28	
20	16QAM	1	0	20.84	21.44	21.50	22
20	16QAM	1	13	21.03	21.72	21.45	
20	16QAM	1	26	21.20	21.74	21.49	
20	16QAM	12	0	20.66	21.39	21.29	22
20	16QAM	12	7	20.77	21.44	21.23	
20	16QAM	12	15	20.84	21.46	21.27	
20	16QAM	27	0	19.76	20.45	20.22	21
Channel				20025	20175	20325	Tune-up limit (dBm)
Frequency (MHz)				1717.5	1732.5	1747.5	
15	QPSK	1	0	21.14	21.76	21.77	
15	QPSK	1	37	21.52	22.01	21.66	22.5
15	QPSK	1	74	21.91	21.96	21.73	
15	QPSK	36	0	20.72	21.32	20.97	
15	QPSK	36	20	20.79	21.38	21.00	22
15	QPSK	36	39	21.04	21.32	21.04	
15	QPSK	75	0	21.07	21.35	21.11	
15	16QAM	1	0	20.66	21.30	21.35	22
15	16QAM	1	13	20.88	21.53	21.31	
15	16QAM	1	26	21.07	21.58	21.35	
15	16QAM	12	0	20.48	21.27	21.16	22
15	16QAM	12	7	20.67	21.27	21.10	
15	16QAM	12	15	20.72	21.29	21.13	
15	16QAM	27	0	19.61	20.33	20.04	21
Channel				20000	20175	20350	Tune-up limit (dBm)
Frequency (MHz)				1715	1732.5	1750	
10	QPSK	1	0	20.85	21.69	21.59	
10	QPSK	1	25	21.22	21.93	21.65	22.5
10	QPSK	1	49	21.28	21.78	21.66	
10	QPSK	25	0	20.73	21.37	21.13	
10	QPSK	25	12	20.85	21.43	21.13	22
10	QPSK	25	25	20.89	21.45	21.14	
10	QPSK	50	0	20.91	21.41	21.32	
10	16QAM	1	0	20.90	21.51	21.36	22
10	16QAM	1	13	21.07	21.64	21.45	
10	16QAM	1	26	21.22	21.81	21.48	
10	16QAM	12	0	20.68	21.36	21.18	22
10	16QAM	12	7	20.80	21.43	21.20	
10	16QAM	12	15	20.89	21.46	21.19	
10	16QAM	27	0	19.80	20.43	20.34	21
Channel				19975	20175	20375	Tune-up limit (dBm)
Frequency (MHz)				1712.5	1732.5	1752.5	
5	QPSK	1	0	20.90	21.80	21.32	
5	QPSK	1	12	21.09	21.93	21.50	22.5
5	QPSK	1	24	21.21	21.88	21.42	
5	QPSK	12	0	20.71	21.41	20.95	
5	QPSK	12	7	20.80	21.41	20.95	22
5	QPSK	12	13	20.86	21.41	20.96	
5	QPSK	25	0	20.79	21.35	21.09	
5	16QAM	1	0	20.93	21.50	21.10	22



FCC SAR TEST REPORT

Report No. : FA4N1311

5	16QAM	1	12	21.11	21.60	21.30	21
5	16QAM	1	24	21.20	21.59	21.22	
5	16QAM	12	0	19.70	20.36	20.11	
5	16QAM	12	7	19.82	20.41	20.12	
5	16QAM	12	13	19.89	20.44	20.10	
5	16QAM	25	0	19.79	20.42	20.08	Tune-up limit (dBm)
Channel				19965	20175	20385	
Frequency (MHz)				1711.5	1732.5	1753.5	22.5
3	QPSK	1	0	20.79	21.67	21.13	
3	QPSK	1	8	20.91	21.81	21.30	
3	QPSK	1	14	21.07	21.72	21.25	
3	QPSK	8	0	20.61	21.30	20.79	
3	QPSK	8	4	20.61	21.25	20.82	22
3	QPSK	8	7	20.76	21.26	20.82	
3	QPSK	15	0	20.66	21.18	20.90	
3	16QAM	1	0	20.80	21.37	20.96	22
3	16QAM	1	8	20.97	21.40	21.10	
3	16QAM	1	14	21.06	21.43	21.08	
3	16QAM	8	0	19.58	20.24	19.92	21
3	16QAM	8	4	19.64	20.29	20.01	
3	16QAM	8	7	19.75	20.26	19.90	
3	16QAM	15	0	19.67	20.26	19.90	
Channel				19957	20175	20393	Tune-up limit (dBm)
Frequency (MHz)				1710.7	1732.5	1754.3	
1.4	QPSK	1	0	21.09	21.74	21.38	22.5
1.4	QPSK	1	3	21.11	21.86	21.36	
1.4	QPSK	1	5	21.09	21.85	21.34	
1.4	QPSK	3	0	21.06	21.83	21.32	
1.4	QPSK	3	1	21.07	21.87	21.32	
1.4	QPSK	3	3	21.09	21.89	21.36	
1.4	QPSK	6	0	20.59	21.37	21.01	22
1.4	16QAM	1	0	20.87	21.54	21.20	22
1.4	16QAM	1	3	20.85	21.62	21.26	
1.4	16QAM	1	5	20.86	21.75	21.12	
1.4	16QAM	3	0	20.55	21.41	20.93	
1.4	16QAM	3	1	20.56	21.44	20.98	
1.4	16QAM	3	3	20.60	21.43	20.98	
1.4	16QAM	6	0	19.78	20.50	20.17	21

<LTE Band 12_Ant 1>

BW [MHz]	Modulation	RB Size	RB Offset	Power Low Ch. / Freq.	Power Middle Ch. / Freq.	Power High Ch. / Freq.	Tune-up limit (dBm)
Channel				23060	23095	23130	Tune-up limit (dBm)
Frequency (MHz)				704	707.5	711	
10	QPSK	1	0	24.00	23.41	23.40	24.5
10	QPSK	1	25	23.51	23.62	23.70	
10	QPSK	1	49	23.69	23.77	23.45	
10	QPSK	25	0	22.96	22.60	22.77	23.5
10	QPSK	25	12	22.75	22.68	22.85	
10	QPSK	25	25	22.72	22.80	22.83	
10	QPSK	50	0	22.83	22.67	22.45	23.5
10	16QAM	1	0	23.40	22.82	22.87	
10	16QAM	1	13	23.26	22.84	22.98	
10	16QAM	1	26	22.98	23.02	23.09	23.5
10	16QAM	12	0	23.16	22.65	22.70	
10	16QAM	12	7	23.03	22.63	22.74	
10	16QAM	12	15	22.71	22.70	22.78	22.5
10	16QAM	27	0	21.86	21.76	21.73	
Channel				23035	23095	23155	Tune-up limit (dBm)
Frequency (MHz)				701.5	707.5	713.5	
5	QPSK	1	0	23.86	23.36	23.45	24.5



FCC SAR TEST REPORT

Report No. : FA4N1311

5	QPSK	1	12	23.79	23.61	23.46	23.5
5	QPSK	1	24	23.34	23.46	23.23	
5	QPSK	12	0	23.01	22.46	22.52	
5	QPSK	12	7	22.86	22.58	22.46	
5	QPSK	12	13	22.71	22.59	22.35	
5	QPSK	25	0	22.84	22.63	22.53	23.5
5	16QAM	1	0	23.19	22.68	22.72	
5	16QAM	1	12	23.13	22.86	22.81	
5	16QAM	1	24	22.78	22.82	22.60	22.5
5	16QAM	12	0	22.10	21.64	21.68	
5	16QAM	12	7	21.99	21.75	21.63	
5	16QAM	12	13	21.84	21.77	21.54	
5	16QAM	25	0	21.96	21.71	21.62	
Channel				23025	23095	23165	Tune-up limit (dBm)
Frequency (MHz)				700.5	707.5	714.5	
3	QPSK	1	0	23.66	23.24	23.26	24.5
3	QPSK	1	8	23.62	23.42	23.32	
3	QPSK	1	14	23.19	23.32	23.09	
3	QPSK	8	0	22.86	22.31	22.37	23.5
3	QPSK	8	4	22.72	22.38	22.33	
3	QPSK	8	7	22.58	22.44	22.23	
3	QPSK	15	0	22.66	22.48	22.39	
3	16QAM	1	0	23.06	22.57	22.58	23.5
3	16QAM	1	8	23.03	22.74	22.61	
3	16QAM	1	14	22.66	22.67	22.45	
3	16QAM	8	0	21.95	21.50	21.56	22.5
3	16QAM	8	4	21.88	21.59	21.49	
3	16QAM	8	7	21.64	21.67	21.43	
3	16QAM	15	0	21.86	21.51	21.42	
Channel				23017	23095	23173	Tune-up limit (dBm)
Frequency (MHz)				699.7	707.5	715.3	
1.4	QPSK	1	0	23.69	23.35	23.30	24.5
1.4	QPSK	1	3	23.81	23.50	23.43	
1.4	QPSK	1	5	23.82	23.55	23.41	
1.4	QPSK	3	0	23.78	23.56	23.43	
1.4	QPSK	3	1	23.84	23.58	23.45	
1.4	QPSK	3	3	23.87	23.63	23.45	
1.4	QPSK	6	0	22.79	22.52	22.41	23.5
1.4	16QAM	1	0	22.97	22.71	22.69	23.5
1.4	16QAM	1	3	23.11	22.93	22.61	
1.4	16QAM	1	5	22.97	22.92	22.75	
1.4	16QAM	3	0	22.67	22.60	22.50	
1.4	16QAM	3	1	22.72	22.60	22.55	
1.4	16QAM	3	3	22.80	22.66	22.55	
1.4	16QAM	6	0	21.95	21.78	21.60	22.5



<LTE Band 13_Ant 1>

BW [MHz]	Modulation	RB Size	RB Offset	Power Low Ch. / Freq.	Power Middle Ch. / Freq.	Power High Ch. / Freq.	Tune-up limit (dBm)
Channel				23230			
Frequency (MHz)				782			
10	QPSK	1	0		23.73		24.5
10	QPSK	1	25		23.56		
10	QPSK	1	49		23.39		
10	QPSK	25	0		22.53		23.5
10	QPSK	25	12		22.61		
10	QPSK	25	25		22.68		
10	QPSK	50	0		22.59		
10	16QAM	1	0		23.06		23.5
10	16QAM	1	13		22.66		
10	16QAM	1	26		22.90		
10	16QAM	12	0		22.63		23.5
10	16QAM	12	7		22.44		
10	16QAM	12	15		22.60		
10	16QAM	27	0		21.70		22.5
Channel				23205	23230	23255	Tune-up limit (dBm)
Frequency (MHz)				779.5	782	784.5	
5	QPSK	1	0	23.32	23.06	23.48	24.5
5	QPSK	1	12	22.99	23.39	23.66	
5	QPSK	1	24	23.30	23.53	23.23	
5	QPSK	12	0	22.45	22.35	22.69	23.5
5	QPSK	12	7	22.24	22.50	22.70	
5	QPSK	12	13	22.27	22.63	22.53	
5	QPSK	25	0	22.61	22.46	22.82	
5	16QAM	1	0	22.48	22.62	22.63	23.5
5	16QAM	1	12	22.39	22.67	23.01	
5	16QAM	1	24	22.62	22.96	22.61	
5	16QAM	12	0	21.52	21.51	21.85	22.5
5	16QAM	12	7	21.32	21.65	21.86	
5	16QAM	12	13	21.35	21.80	21.67	
5	16QAM	25	0	21.44	21.68	21.79	



<LTE Band 66_Ant 1>

BW [MHz]	Modulation	RB Size	RB Offset	Power Low Ch. / Freq.	Power Middle Ch. / Freq.	Power High Ch. / Freq.	Tune-up limit (dBm)
Channel				132072	132322	132572	
Frequency (MHz)				1720	1745	1770	
20	QPSK	1	0	21.36	22.07	21.46	
20	QPSK	1	49	21.67	22.00	21.77	22.5
20	QPSK	1	99	22.20	22.02	22.01	
20	QPSK	50	0	20.85	21.20	20.78	
20	QPSK	50	24	21.07	21.15	21.00	22
20	QPSK	50	50	21.35	21.17	21.36	
20	QPSK	100	0	21.20	21.54	21.13	
20	16QAM	1	0	20.93	21.60	20.78	22
20	16QAM	1	13	20.97	21.60	21.15	
20	16QAM	1	26	21.08	21.45	21.13	
20	16QAM	12	0	20.70	21.39	20.78	22
20	16QAM	12	7	20.71	21.35	20.82	
20	16QAM	12	15	20.78	21.32	20.84	
20	16QAM	27	0	19.73	20.43	19.85	21
Channel				132047	132322	132597	Tune-up limit (dBm)
Frequency (MHz)				1717.5	1745	1772.5	
15	QPSK	1	0	21.21	21.94	21.34	
15	QPSK	1	37	21.50	21.84	21.65	22.5
15	QPSK	1	74	22.08	21.91	21.81	
15	QPSK	36	0	20.72	21.00	20.67	
15	QPSK	36	20	20.88	21.01	20.86	22
15	QPSK	36	39	21.23	20.98	21.18	
15	QPSK	75	0	21.08	21.13	20.96	
15	16QAM	1	0	20.81	21.48	20.59	22
15	16QAM	1	13	20.82	21.42	20.97	
15	16QAM	1	26	20.91	21.28	21.00	
15	16QAM	12	0	20.50	21.29	20.62	22
15	16QAM	12	7	20.51	21.21	20.67	
15	16QAM	12	15	20.61	21.22	20.72	
15	16QAM	27	0	19.55	20.25	19.66	21
Channel				132022	132322	132622	Tune-up limit (dBm)
Frequency (MHz)				1715	1745	1775	
10	QPSK	1	0	21.02	21.64	21.35	
10	QPSK	1	25	21.21	21.66	21.70	22.5
10	QPSK	1	49	21.45	21.54	21.57	
10	QPSK	25	0	20.82	21.10	21.09	
10	QPSK	25	12	20.93	21.09	21.22	22
10	QPSK	25	25	21.05	21.07	21.29	
10	QPSK	50	0	20.85	21.17	21.18	
10	16QAM	1	0	20.99	21.43	21.27	22
10	16QAM	1	13	21.13	21.40	21.48	
10	16QAM	1	26	21.29	21.40	21.60	
10	16QAM	12	0	20.84	21.16	21.03	22
10	16QAM	12	7	20.87	21.16	21.13	
10	16QAM	12	15	20.90	21.20	21.24	
10	16QAM	27	0	19.85	20.26	20.19	21
Channel				131997	132322	132647	Tune-up limit (dBm)
Frequency (MHz)				1712.5	1745	1777.5	
5	QPSK	1	0	21.00	21.51	21.58	
5	QPSK	1	12	21.12	21.62	21.68	22.5
5	QPSK	1	24	21.18	21.48	21.45	
5	QPSK	12	0	20.73	21.06	21.23	
5	QPSK	12	7	20.74	21.07	21.22	22
5	QPSK	12	13	20.74	21.03	21.17	
5	QPSK	25	0	20.99	21.24	21.47	
5	16QAM	1	0	20.73	21.06	21.18	22



FCC SAR TEST REPORT

Report No. : FA4N1311

5	16QAM	1	12	20.97	21.36	21.63	21
5	16QAM	1	24	21.04	21.28	21.36	
5	16QAM	12	0	19.74	20.17	20.35	
5	16QAM	12	7	19.77	20.19	20.35	
5	16QAM	12	13	19.79	20.17	20.31	
5	16QAM	25	0	19.76	20.17	20.34	
Channel				131987	132322	132657	Tune-up limit (dBm)
Frequency (MHz)				1711.5	1745	1778.5	
3	QPSK	1	0	20.89	21.32	21.43	22.5
3	QPSK	1	8	20.95	21.45	21.48	
3	QPSK	1	14	21.00	21.32	21.25	
3	QPSK	8	0	20.56	20.94	21.13	22
3	QPSK	8	4	20.58	20.90	21.07	
3	QPSK	8	7	20.59	20.83	21.02	
3	QPSK	15	0	20.86	21.13	21.37	
3	16QAM	1	0	20.62	20.92	20.99	22
3	16QAM	1	8	20.87	21.23	21.43	
3	16QAM	1	14	20.90	21.11	21.20	
3	16QAM	8	0	19.54	19.99	20.20	21
3	16QAM	8	4	19.62	20.00	20.20	
3	16QAM	8	7	19.69	20.00	20.14	
3	16QAM	15	0	19.61	20.05	20.18	
Channel				131979	132322	132665	Tune-up limit (dBm)
Frequency (MHz)				1710.7	1745	1779.3	
1.4	QPSK	1	0	21.11	21.61	21.44	22.5
1.4	QPSK	1	3	21.12	21.61	21.41	
1.4	QPSK	1	5	21.08	21.56	21.33	
1.4	QPSK	3	0	21.11	21.63	21.45	
1.4	QPSK	3	1	21.11	21.64	21.45	
1.4	QPSK	3	3	21.11	21.62	21.40	
1.4	QPSK	6	0	20.75	21.08	21.04	22
1.4	16QAM	1	0	21.06	21.42	21.31	22
1.4	16QAM	1	3	21.07	21.34	21.26	
1.4	16QAM	1	5	21.03	21.23	21.18	
1.4	16QAM	3	0	20.79	21.02	21.06	
1.4	16QAM	3	1	20.81	21.02	21.08	
1.4	16QAM	3	3	20.77	21.02	20.98	
1.4	16QAM	6	0	19.87	20.18	20.14	21

11. WiFi/Bluetooth Exclusions Applied

<WLAN Conducted Power>

	Mode	Channel	Frequency (MHz)	Tune-Up Limit
2.4GHz WLAN	802.11b 1Mbps	1	2412	1.00
		6	2437	1.00
		11	2462	1.00
	802.11g 6Mbps	1	2412	1.00
		6	2437	1.00
		11	2462	1.00
	802.11n-HT20 MCS0	1	2412	1.00
		6	2437	1.00
		11	2462	1.00
	802.11n-HT40 MCS0	3	2422	1.00
		6	2437	1.00
		9	2452	1.00

<2.4GHz Bluetooth Conducted Power >

	Mode	Channel	Frequency (MHz)	Tune-Up Limit
Bluetooth	LE 1Mbps	0	2402	4.00
		19	2440	4.00
		39	2480	4.00
	LE 2Mbps	0	2402	4.00
		19	2440	4.00
		39	2480	4.00

Note:


- Per KDB 447498 D01v06, the 1-g and 10-g SAR test exclusion thresholds for 100 MHz to 6 GHz at *test separation distances* ≤ 50 mm are determined by:

$$[(\text{max. power of channel, including tune-up tolerance, mW}) / (\text{min. test separation distance, mm})] \cdot [\sqrt{f(\text{GHz})}] \leq 3.0$$
for 1-g SAR and ≤ 7.5 for 10-g extremity SAR
 - f(GHz) is the RF channel transmit frequency in GHz
 - Power and distance are rounded to the nearest mW and mm before calculation
 - The result is rounded to one decimal place for comparison

WLAN Max Power (dBm)	Exposure Position	Separation Distance (mm)	Frequency (GHz)	exclusion thresholds	Exclusion Limit	SAR Testing
1	Head	10	2.48	0.2	3	No
1	Body-worn	< 5	2.48	0.4	3	No
1	Extremity	< 5	2.48	0.4	7.5	No

Bluetooth Max Power (dBm)	Exposure Position	Separation Distance (mm)	Frequency (GHz)	exclusion thresholds	Exclusion Limit	SAR Testing
4	Head	10	2.48	0.4	3	No
4	Body-worn	< 5	2.48	0.79	3	No
4	Extremity	< 5	2.48	0.79	7.5	No

12. Antenna Location

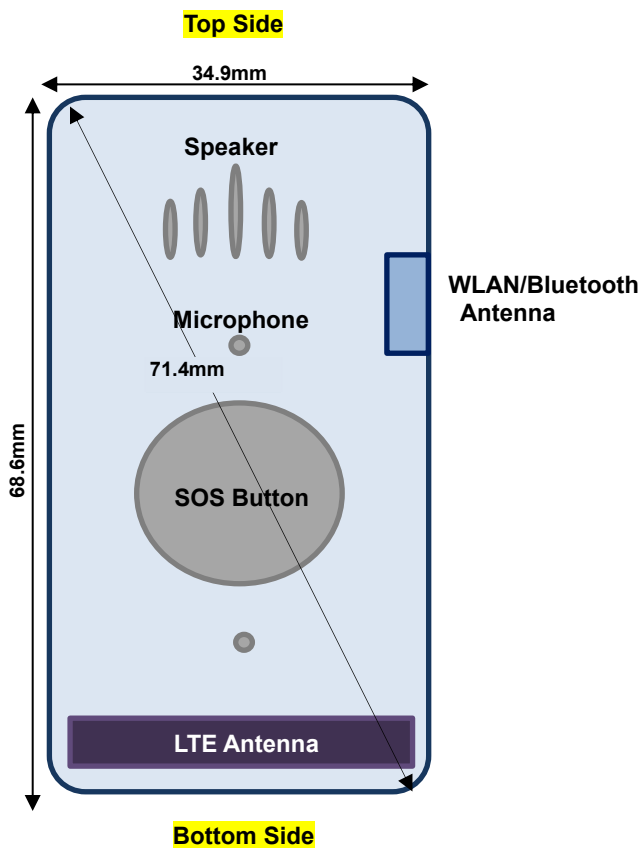

Front View

13. SAR Test Results

General Note:

1. Per KDB 447498 D01v06, the reported SAR is the measured SAR value adjusted for maximum tune-up tolerance.
 - a. Tune-up scaling Factor = tune-up limit power (mW) / EUT RF power (mW), where tune-up limit is the maximum rated power among all production units.
 - b. For WWAN: Reported SAR(W/kg)= Measured SAR(W/kg)*Tune-up Scaling Factor
2. Per KDB 447498 D01v06, for each exposure position, testing of other required channels within the operating mode of a frequency band is not required when the *reported* 1-g or 10-g SAR for the mid-band or highest output power channel is:
 - ≤ 0.8 W/kg or 2.0 W/kg, for 1-g or 10-g respectively, when the transmission band is ≤ 100 MHz
 - ≤ 0.6 W/kg or 1.5 W/kg, for 1-g or 10-g respectively, when the transmission band is between 100 MHz and 200 MHz
 - ≤ 0.4 W/kg or 1.0 W/kg, for 1-g or 10-g respectively, when the transmission band is ≥ 200 MHz
3. Per KDB 865664 D01v01r04, for each frequency band, repeated SAR measurement is required only when the measured SAR is ≥ 0.8 W/kg.
4. According to the SAR analysis exhibit, LTE B2/4/12/13/66 maximum tune-up power scaled down with the transmission factor is applied in body-worn reported SAR calculation.

LTE Note:

1. Per KDB 941225 D05v02r05, start with the largest channel bandwidth and measure SAR for QPSK with 1 RB allocation, using the RB offset and required test channel combination with the highest maximum output power for RB offsets at the upper edge, middle and lower edge of each required test channel.
2. Per KDB 941225 D05v02r05, 50% RB allocation for QPSK SAR testing follows 1RB QPSK allocation procedure.
3. Per KDB 941225 D05v02r05, For QPSK with 100% RB allocation, SAR is not required when the highest maximum output power for 100 % RB allocation is less than the highest maximum output power in 50% and 1 RB allocations and the highest reported SAR for 1 RB and 50% RB allocation are ≤ 0.8 W/kg. Otherwise, SAR is measured for the highest output power channel; and if the reported SAR is > 1.45 W/kg, the remaining required test channels must also be tested.
4. Per KDB 941225 D05v02r05, 16QAM output power for each RB allocation configuration is $>$ not $\frac{1}{2}$ dB higher than the same configuration in QPSK and the reported SAR for the QPSK configuration is ≤ 1.45 W/kg; Per KDB 941225 D05v02r05, 16QAM SAR testing is not required.
5. Per KDB 941225 D05v02r05, Smaller bandwidth output power for each RB allocation configuration is $>$ not $\frac{1}{2}$ dB higher than the same configuration in the largest supported bandwidth, and the reported SAR for the largest supported bandwidth is ≤ 1.45 W/kg; Per KDB 941225 D05v02r05, smaller bandwidth SAR testing is not required.
6. For LTE B4/B12 the maximum bandwidth does not support three non-overlapping channels, per KDB 941225 D05v02r05, when a device supports overlapping channel assignment in a channel bandwidth configuration, the middle channel of the group of overlapping channels should be selected for testing.
7. LTE band 4 SAR test was covered by Band 66; according to TCB workshop, SAR test for overlapping LTE bands can be reduced if
 - a. The maximum output power, including tolerance, for the smaller band is $\leq$ the larger band to qualify for the SAR test exclusion.
 - b. The channel bandwidth and other operating parameters for the smaller band are fully supported by the larger band.

13.1 Head SAR

< LTE SAR >

Plot No.	Band	BW (MHz)	Modulation	RB Size	RB offset	Test Position	Gap (mm)	Ch.	Freq. (MHz)	Sample	Average Power (dBm)	Tune-Up Limit (dBm)	Tune-up Scaling Factor	Power Drift (dB)	Measured 1g SAR (W/kg)	Reported 1g SAR (W/kg)
01	LTE Band 2	20M	QPSK	1	49	Front	10mm	18900	1880	Sample 1	22.21	22.50	1.069	0.1	1.290	1.379
	LTE Band 2	20M	QPSK	1	99	Front	10mm	18700	1860	Sample 1	22.07	22.50	1.104	0.05	0.639	0.706
	LTE Band 2	20M	QPSK	1	49	Front	10mm	19100	1900	Sample 1	22.11	22.50	1.094	-0.03	0.645	0.706
	LTE Band 2	20M	QPSK	50	50	Front	10mm	19100	1900	Sample 1	21.71	22.00	1.069	-0.15	0.742	0.793
	LTE Band 2	20M	QPSK	100	0	Front	10mm	19100	1900	Sample 1	21.48	22.00	1.127	0.02	0.660	0.744
	LTE Band 2	20M	QPSK	1	49	Bottom Side	10mm	18900	1880	Sample 1	22.21	22.50	1.069	0.07	0.167	0.179
	LTE Band 2	20M	QPSK	50	50	Bottom Side	10mm	19100	1900	Sample 1	21.71	22.00	1.069	0.16	0.104	0.111
	LTE Band 2	20M	QPSK	1	49	Front	10mm	18900	1880	Sample 2	22.21	22.50	1.069	0.13	0.991	1.059
	LTE Band 2	20M	QPSK	1	99	Front	10mm	18700	1860	Sample 2	22.07	22.50	1.104	0.13	0.549	0.606
	LTE Band 2	20M	QPSK	1	49	Front	10mm	19100	1900	Sample 2	22.11	22.50	1.094	0.05	0.604	0.661
02	LTE Band 12	10M	QPSK	1	49	Front	10mm	23095	707.5	Sample 1	23.77	24.50	1.183	0.12	0.473	0.560
	LTE Band 12	10M	QPSK	25	25	Front	10mm	23095	707.5	Sample 1	22.80	23.50	1.175	0.08	0.317	0.372
	LTE Band 12	10M	QPSK	1	49	Bottom Side	10mm	23095	707.5	Sample 1	23.77	24.50	1.183	0.01	0.192	0.227
	LTE Band 12	10M	QPSK	25	25	Bottom Side	10mm	23095	707.5	Sample 1	22.80	23.50	1.175	0.03	0.127	0.149
	LTE Band 12	10M	QPSK	1	49	Front	10mm	23095	707.5	Sample 2	23.77	24.50	1.183	-0.08	0.333	0.394
03	LTE Band 13	10M	QPSK	1	0	Front	10mm	23230	782	Sample 1	23.73	24.50	1.194	-0.1	0.569	0.679
	LTE Band 13	10M	QPSK	25	25	Front	10mm	23230	782	Sample 1	22.68	23.50	1.208	0.1	0.486	0.587
	LTE Band 13	10M	QPSK	1	0	Bottom Side	10mm	23230	782	Sample 1	23.73	24.50	1.194	-0.18	0.137	0.164
	LTE Band 13	10M	QPSK	25	25	Bottom Side	10mm	23230	782	Sample 1	22.68	23.50	1.208	0.1	0.112	0.135
	LTE Band 13	10M	QPSK	1	0	Front	10mm	23230	782	Sample 2	23.73	24.50	1.194	0.12	0.470	0.561
	LTE Band 66	20M	QPSK	1	99	Front	10mm	132072	1720	Sample 1	22.20	22.50	1.072	0.12	0.870	0.932
	LTE Band 66	20M	QPSK	1	0	Front	10mm	132322	1745	Sample 1	22.07	22.50	1.104	-0.06	1.040	1.148
	LTE Band 66	20M	QPSK	1	99	Front	10mm	132572	1770	Sample 1	22.01	22.50	1.119	0.16	0.472	0.528
	LTE Band 66	20M	QPSK	50	50	Front	10mm	132572	1770	Sample 1	21.36	22.00	1.159	-0.03	0.475	0.550
04	LTE Band 66	20M	QPSK	100	0	Front	10mm	132322	1745	Sample 1	21.54	22.00	1.112	-0.13	1.240	1.379
	LTE Band 66	20M	QPSK	100	0	Front	10mm	132072	1720	Sample 1	21.20	22.00	1.202	0.02	0.984	1.183
	LTE Band 66	20M	QPSK	100	0	Front	10mm	132572	1770	Sample 1	21.13	22.00	1.222	-0.08	0.819	1.001
	LTE Band 66	20M	QPSK	1	99	Bottom Side	10mm	132072	1720	Sample 1	22.20	22.50	1.072	0.07	0.247	0.265
	LTE Band 66	20M	QPSK	50	50	Bottom Side	10mm	132572	1770	Sample 1	21.36	22.00	1.159	0	0.316	0.366
	LTE Band 66	20M	QPSK	100	0	Front	10mm	132322	1745	Sample 2	21.54	22.00	1.112	0.01	1.180	1.312

**13.2 Body Worn Accessory SAR**

Plot No.	Band	BW (MHz)	Modulation	RB Size	RB offset	Test Position	Gap (mm)	Ch.	Freq. (MHz)	Sample	Average Power (dBm)	Tune-Up Limit (dBm)	Tune-up Scaling Factor	Duty Cycle %	Duty Cycle Scaling Factor	Power Drift (dB)	Measured 1g SAR (W/kg)	Reported 1g SAR (W/kg)
05	LTE Band 2	20M	QPSK	1	49	Front	0mm	18900	1880	Sample 1	22.21	22.50	1.069	8.1	0.081	0.14	3.180	0.275
	LTE Band 2	20M	QPSK	50	50	Front	0mm	19100	1900	Sample 1	21.71	22.00	1.069	8.1	0.081	0.11	3.190	0.276
	LTE Band 2	20M	QPSK	1	49	Back	0mm	18900	1880	Sample 1	22.21	22.50	1.069	8.1	0.081	-0.05	4.390	0.380
	LTE Band 2	20M	QPSK	1	99	Back	0mm	18700	1860	Sample 1	22.07	22.50	1.104	8.1	0.081	-0.17	2.940	0.263
	LTE Band 2	20M	QPSK	1	49	Back	0mm	19100	1900	Sample 1	22.11	22.50	1.094	8.1	0.081	-0.08	2.870	0.254
	LTE Band 2	20M	QPSK	50	50	Back	0mm	19100	1900	Sample 1	21.71	22.00	1.069	8.1	0.081	0.09	3.390	0.294
	LTE Band 2	20M	QPSK	1	49	Left Side	0mm	18900	1880	Sample 1	22.21	22.50	1.069	8.1	0.081	0.17	3.000	0.260
	LTE Band 2	20M	QPSK	50	50	Left Side	0mm	19100	1900	Sample 1	21.71	22.00	1.069	8.1	0.081	0.18	2.210	0.191
	LTE Band 2	20M	QPSK	1	49	Right Side	0mm	18900	1880	Sample 1	22.21	22.50	1.069	8.1	0.081	-0.04	1.220	0.106
	LTE Band 2	20M	QPSK	50	50	Right Side	0mm	19100	1900	Sample 1	21.71	22.00	1.069	8.1	0.081	-0.08	0.871	0.075
	LTE Band 2	20M	QPSK	1	49	Top Side	0mm	18900	1880	Sample 1	22.21	22.50	1.069	8.1	0.081	-0.13	0.146	0.013
	LTE Band 2	20M	QPSK	50	50	Top Side	0mm	19100	1900	Sample 1	21.71	22.00	1.069	8.1	0.081	-0.13	0.119	0.010
	LTE Band 2	20M	QPSK	1	49	Bottom Side	0mm	18900	1880	Sample 1	22.21	22.50	1.069	8.1	0.081	0.06	1.250	0.108
	LTE Band 2	20M	QPSK	50	50	Bottom Side	0mm	19100	1900	Sample 1	21.71	22.00	1.069	8.1	0.081	-0.03	1.100	0.095
	LTE Band 2	20M	QPSK	1	49	Back	0mm	18900	1880	Sample 2	22.21	22.50	1.069	8.1	0.081	0.11	3.530	0.306
06	LTE Band 12	10M	QPSK	1	49	Front	0mm	23095	707.5	Sample 1	23.77	24.50	1.183	8.1	0.081	0.08	1.510	0.145
	LTE Band 12	10M	QPSK	25	25	Front	0mm	23095	707.5	Sample 1	22.80	23.50	1.175	8.1	0.081	-0.17	1.420	0.135
	LTE Band 12	10M	QPSK	1	49	Back	0mm	23095	707.5	Sample 1	23.77	24.50	1.183	8.1	0.081	-0.06	2.250	0.216
	LTE Band 12	10M	QPSK	25	25	Back	0mm	23095	707.5	Sample 1	22.80	23.50	1.175	8.1	0.081	-0.03	1.610	0.153
	LTE Band 12	10M	QPSK	1	49	Left Side	0mm	23095	707.5	Sample 1	23.77	24.50	1.183	8.1	0.081	0.14	2.140	0.205
	LTE Band 12	10M	QPSK	25	25	Left Side	0mm	23095	707.5	Sample 1	22.80	23.50	1.175	8.1	0.081	0.11	1.290	0.123
	LTE Band 12	10M	QPSK	1	49	Right Side	0mm	23095	707.5	Sample 1	23.77	24.50	1.183	8.1	0.081	-0.05	2.070	0.198
	LTE Band 12	10M	QPSK	25	25	Right Side	0mm	23095	707.5	Sample 1	22.80	23.50	1.175	8.1	0.081	0.18	1.620	0.154
	LTE Band 12	10M	QPSK	1	49	Top Side	0mm	23095	707.5	Sample 1	23.77	24.50	1.183	8.1	0.081	0.14	0.123	0.012
	LTE Band 12	10M	QPSK	25	25	Top Side	0mm	23095	707.5	Sample 1	22.80	23.50	1.175	8.1	0.081	-0.17	0.085	0.008
	LTE Band 12	10M	QPSK	1	49	Bottom Side	0mm	23095	707.5	Sample 1	23.77	24.50	1.183	8.1	0.081	0.17	2.200	0.211
	LTE Band 12	10M	QPSK	25	25	Bottom Side	0mm	23095	707.5	Sample 1	22.80	23.50	1.175	8.1	0.081	-0.05	1.990	0.189
	LTE Band 12	10M	QPSK	1	49	Back	0mm	23095	707.5	Sample 2	23.77	24.50	1.183	8.1	0.081	0.01	1.870	0.179
	LTE Band 13	10M	QPSK	1	0	Front	0mm	23230	782	Sample 1	23.73	24.50	1.194	8.1	0.081	-0.17	1.660	0.161
	LTE Band 13	10M	QPSK	25	25	Front	0mm	23230	782	Sample 1	22.68	23.50	1.208	8.1	0.081	0.04	1.180	0.115
07	LTE Band 13	10M	QPSK	1	0	Back	0mm	23230	782	Sample 1	23.73	24.50	1.194	8.1	0.081	0.05	2.340	0.226
	LTE Band 13	10M	QPSK	25	25	Back	0mm	23230	782	Sample 1	22.68	23.50	1.208	8.1	0.081	-0.01	1.470	0.144
	LTE Band 13	10M	QPSK	1	0	Left Side	0mm	23230	782	Sample 1	23.73	24.50	1.194	8.1	0.081	-0.08	1.660	0.161
	LTE Band 13	10M	QPSK	25	25	Left Side	0mm	23230	782	Sample 1	22.68	23.50	1.208	8.1	0.081	0.05	1.230	0.120
	LTE Band 13	10M	QPSK	1	0	Right Side	0mm	23230	782	Sample 1	23.73	24.50	1.194	8.1	0.081	0.06	2.300	0.222
	LTE Band 13	10M	QPSK	25	25	Right Side	0mm	23230	782	Sample 1	22.68	23.50	1.208	8.1	0.081	-0.09	1.790	0.175
	LTE Band 13	10M	QPSK	1	0	Top Side	0mm	23230	782	Sample 1	23.73	24.50	1.194	8.1	0.081	-0.08	0.160	0.015
	LTE Band 13	10M	QPSK	25	25	Top Side	0mm	23230	782	Sample 1	22.68	23.50	1.208	8.1	0.081	0.13	0.136	0.013
	LTE Band 13	10M	QPSK	1	0	Bottom Side	0mm	23230	782	Sample 1	23.73	24.50	1.194	8.1	0.081	0.12	2.220	0.215
	LTE Band 13	10M	QPSK	25	25	Bottom Side	0mm	23230	782	Sample 1	22.68	23.50	1.208	8.1	0.081	0.03	1.550	0.152
	LTE Band 13	10M	QPSK	1	0	Back	0mm	23230	782	Sample 2	23.73	24.50	1.194	8.1	0.081	0.18	2.050	0.198
	LTE Band 66	20M	QPSK	1	99	Front	0mm	132072	1720	Sample 1	22.20	22.50	1.072	8.1	0.081	0.08	1.360	0.118
	LTE Band 66	20M	QPSK	50	50	Front	0mm	132572	1770	Sample 1	21.36	22.00	1.159	8.1	0.081	-0.07	0.691	0.065
	LTE Band 66	20M	QPSK	1	99	Back	0mm	132072	1720	Sample 1	22.20	22.50	1.072	8.1	0.081	-0.04	2.790	0.242
	LTE Band 66	20M	QPSK	50	50	Back	0mm	132572	1770	Sample 1	21.36	22.00	1.159	8.1	0.081	-0.12	2.350	0.221
08	LTE Band 66	20M	QPSK	1	99	Left Side	0mm	132072	1720	Sample 1	22.20	22.50	1.072	8.1	0.081	-0.16	1.190	0.103
	LTE Band 66	20M	QPSK	50	50	Left Side	0mm	132572	1770	Sample 1	21.36	22.00	1.159	8.1	0.081	-0.02	1.120	0.105
	LTE Band 66	20M	QPSK	1	99	Right Side	0mm	132072	1720	Sample 1	22.20	22.50	1.072	8.1	0.081	0.15	1.120	0.097
	LTE Band 66	20M	QPSK	50	50	Right Side	0mm	132572	1770	Sample 1	21.36	22.00	1.159	8.1	0.081	-0.09	0.673	0.063
	LTE Band 66	20M	QPSK	1	99	Top Side	0mm	132072	1720	Sample 1	22.20	22.50	1.072	8.1	0.081	0.11	0.109	0.009
	LTE Band 66	20M	QPSK	50	50	Top Side	0mm	132572	1770	Sample 1	21.36	22.00	1.159	8.1	0.081	-0.05	0.047	0.004
	LTE Band 66	20M	QPSK	1	99	Bottom Side	0mm	132072	1720	Sample 1	22.20	22.50	1.072	8.1	0.081	-0.08	1.950	0.169
	LTE Band 66	20M	QPSK	50	50	Bottom Side	0mm	132572	1770	Sample 1	21.36	22.00	1.159	8.1	0.081	0.16	1.900	0.178
	LTE Band 66	20M	QPSK	1	99	Back	0mm	132072	1720	Sample 2	22.20	22.50	1.072	8.1	0.081	0.03	2.920	0.253

**13.3 Extremity SAR**

Plot No.	Band	BW (MHz)	Modulation	RB Size	RB offset	Test Position	Gap (mm)	Ch.	Freq. (MHz)	Sample	Average Power (dBm)	Tune-Up Limit (dBm)	Tune-up Scaling Factor	Power Drift (dB)	Measured 10g SAR (W/kg)	Reported 10g SAR (W/kg)
05	LTE Band 2	20M	QPSK	1	49	Front	0mm	18900	1880	Sample 1	22.21	22.50	1.069	0.14	1.800	1.924
	LTE Band 2	20M	QPSK	50	50	Front	0mm	19100	1900	Sample 1	21.71	22.00	1.069	0.11	1.650	1.764
	LTE Band 2	20M	QPSK	1	49	Back	0mm	18900	1880	Sample 1	22.21	22.50	1.069	-0.05	2.300	2.459
	LTE Band 2	20M	QPSK	1	99	Back	0mm	18700	1860	Sample 1	22.07	22.50	1.104	-0.17	1.470	1.623
	LTE Band 2	20M	QPSK	1	49	Back	0mm	19100	1900	Sample 1	22.11	22.50	1.094	-0.08	1.490	1.630
	LTE Band 2	20M	QPSK	50	50	Back	0mm	19100	1900	Sample 1	21.71	22.00	1.069	0.09	1.780	1.903
	LTE Band 2	20M	QPSK	100	0	Back	0mm	19100	1900	Sample 1	21.48	22.00	1.127	-0.08	1.510	1.702
	LTE Band 2	20M	QPSK	1	49	Left Side	0mm	18900	1880	Sample 1	22.21	22.50	1.069	0.17	1.630	1.743
	LTE Band 2	20M	QPSK	50	50	Left Side	0mm	19100	1900	Sample 1	21.71	22.00	1.069	0.18	1.200	1.283
	LTE Band 2	20M	QPSK	1	49	Right Side	0mm	18900	1880	Sample 1	22.21	22.50	1.069	-0.04	0.624	0.667
	LTE Band 2	20M	QPSK	50	50	Right Side	0mm	19100	1900	Sample 1	21.71	22.00	1.069	-0.08	0.441	0.471
	LTE Band 2	20M	QPSK	1	49	Top Side	0mm	18900	1880	Sample 1	22.21	22.50	1.069	-0.13	0.094	0.100
	LTE Band 2	20M	QPSK	50	50	Top Side	0mm	19100	1900	Sample 1	21.71	22.00	1.069	-0.13	0.076	0.081
	LTE Band 2	20M	QPSK	1	49	Bottom Side	0mm	18900	1880	Sample 1	22.21	22.50	1.069	0.06	0.542	0.579
	LTE Band 2	20M	QPSK	50	50	Bottom Side	0mm	19100	1900	Sample 1	21.71	22.00	1.069	-0.03	0.473	0.506
	LTE Band 2	20M	QPSK	1	49	Back	0mm	18900	1880	Sample 2	22.21	22.50	1.069	0.11	1.970	2.106
	LTE Band 2	20M	QPSK	1	99	Back	0mm	18700	1860	Sample 2	22.07	22.50	1.104	-0.17	1.450	1.601
	LTE Band 2	20M	QPSK	1	49	Back	0mm	19100	1900	Sample 2	22.11	22.50	1.094	-0.08	1.670	1.827
	LTE Band 12	10M	QPSK	1	49	Front	0mm	23095	707.5	Sample 1	23.77	24.50	1.183	0.08	1.050	1.242
	LTE Band 12	10M	QPSK	25	25	Front	0mm	23095	707.5	Sample 1	22.80	23.50	1.175	-0.17	0.915	1.075
06	LTE Band 12	10M	QPSK	1	49	Back	0mm	23095	707.5	Sample 1	23.77	24.50	1.183	-0.06	1.380	1.633
	LTE Band 12	10M	QPSK	25	25	Back	0mm	23095	707.5	Sample 1	22.80	23.50	1.175	-0.03	1.060	1.245
	LTE Band 12	10M	QPSK	1	49	Left Side	0mm	23095	707.5	Sample 1	23.77	24.50	1.183	0.14	1.200	1.420
	LTE Band 12	10M	QPSK	25	25	Left Side	0mm	23095	707.5	Sample 1	22.80	23.50	1.175	0.11	0.710	0.834
	LTE Band 12	10M	QPSK	1	49	Right Side	0mm	23095	707.5	Sample 1	23.77	24.50	1.183	-0.05	0.724	0.857
	LTE Band 12	10M	QPSK	25	25	Right Side	0mm	23095	707.5	Sample 1	22.80	23.50	1.175	0.18	0.571	0.671
	LTE Band 12	10M	QPSK	1	49	Top Side	0mm	23095	707.5	Sample 1	23.77	24.50	1.183	0.14	0.071	0.084
	LTE Band 12	10M	QPSK	25	25	Top Side	0mm	23095	707.5	Sample 1	22.80	23.50	1.175	-0.17	0.050	0.059
	LTE Band 12	10M	QPSK	1	49	Bottom Side	0mm	23095	707.5	Sample 1	23.77	24.50	1.183	0.17	0.898	1.062
	LTE Band 12	10M	QPSK	25	25	Bottom Side	0mm	23095	707.5	Sample 1	22.80	23.50	1.175	-0.05	0.817	0.960
	LTE Band 12	10M	QPSK	1	49	Back	0mm	23095	707.5	Sample 2	23.77	24.50	1.183	0.01	1.260	1.491
	LTE Band 13	10M	QPSK	1	0	Front	0mm	23230	782	Sample 1	23.73	24.50	1.194	-0.17	0.978	1.168
	LTE Band 13	10M	QPSK	25	25	Front	0mm	23230	782	Sample 1	22.68	23.50	1.208	0.04	0.710	0.858
	LTE Band 13	10M	QPSK	1	0	Back	0mm	23230	782	Sample 1	23.73	24.50	1.194	0.05	1.200	1.433
	LTE Band 13	10M	QPSK	25	25	Back	0mm	23230	782	Sample 1	22.68	23.50	1.208	-0.01	0.779	0.941
	LTE Band 13	10M	QPSK	1	0	Left Side	0mm	23230	782	Sample 1	23.73	24.50	1.194	-0.08	0.840	1.003
	LTE Band 13	10M	QPSK	25	25	Left Side	0mm	23230	782	Sample 1	22.68	23.50	1.208	0.05	0.635	0.767
	LTE Band 13	10M	QPSK	1	0	Right Side	0mm	23230	782	Sample 1	23.73	24.50	1.194	0.06	0.761	0.909
	LTE Band 13	10M	QPSK	25	25	Right Side	0mm	23230	782	Sample 1	22.68	23.50	1.208	-0.09	0.572	0.691
	LTE Band 13	10M	QPSK	1	0	Top Side	0mm	23230	782	Sample 1	23.73	24.50	1.194	-0.08	0.060	0.072
	LTE Band 13	10M	QPSK	25	25	Top Side	0mm	23230	782	Sample 1	22.68	23.50	1.208	0.13	0.052	0.063
	LTE Band 13	10M	QPSK	1	0	Bottom Side	0mm	23230	782	Sample 1	23.73	24.50	1.194	0.12	0.689	0.823
	LTE Band 13	10M	QPSK	25	25	Bottom Side	0mm	23230	782	Sample 1	22.68	23.50	1.208	0.03	0.482	0.582
	LTE Band 13	10M	QPSK	1	0	Back	0mm	23230	782	Sample 2	23.73	24.50	1.194	0.18	1.090	1.301
	LTE Band 66	20M	QPSK	1	99	Front	0mm	132072	1720	Sample 1	22.20	22.50	1.072	0.08	0.654	0.701
	LTE Band 66	20M	QPSK	50	50	Front	0mm	132572	1770	Sample 1	21.36	22.00	1.159	-0.07	0.340	0.394
	LTE Band 66	20M	QPSK	1	99	Back	0mm	132072	1720	Sample 1	22.20	22.50	1.072	-0.04	1.430	1.532
	LTE Band 66	20M	QPSK	50	50	Back	0mm	132572	1770	Sample 1	21.36	22.00	1.159	-0.12	1.110	1.286
	LTE Band 66	20M	QPSK	1	99	Left Side	0mm	132072	1720	Sample 1	22.20	22.50	1.072	-0.16	0.574	0.615
	LTE Band 66	20M	QPSK	50	50	Left Side	0mm	132572	1770	Sample 1	21.36	22.00	1.159	-0.02	0.539	0.625
	LTE Band 66	20M	QPSK	1	99	Right Side	0mm	132072	1720	Sample 1	22.20	22.50	1.072	0.15	0.514	0.551
	LTE Band 66	20M	QPSK	50	50	Right Side	0mm	132572	1770	Sample 1	21.36	22.00	1.159	-0.09	0.284	0.329
	LTE Band 66	20M	QPSK	1	99	Top Side	0mm	132072	1720	Sample 1	22.20	22.50	1.072	0.11	0.062	0.066
	LTE Band 66	20M	QPSK	50	50	Top Side	0mm	132572	1770	Sample 1	21.36	22.00	1.159	-0.05	0.027	0.031
	LTE Band 66	20M	QPSK	1	99	Bottom Side	0mm	132072	1720	Sample 1	22.20	22.50	1.072	-0.08	0.750	0.804
	LTE Band 66	20M	QPSK	50	50	Bottom Side	0mm	132572	1770	Sample 1	21.36	22.00	1.159	0.16	0.693	0.803
	LTE Band 66	20M	QPSK	1	99	Back	0mm	132072	1720	Sample 2	22.20	22.50	1.072	0.03	1.510	1.618

13.4 Repeated SAR Measurement

No.	Band	BW (MHz)	Modulation	RB Size	RB offset	Test Position	Gap (mm)	Ch.	Freq. (MHz)	Sample	Average Power (dBm)	Tune-Up Limit (dBm)	Tune-up Scaling Factor	Power Drift (dB)	Measured 1g SAR (W/kg)	Ratio	Reported 1g SAR (W/kg)
1st	LTE Band 2	20M	QPSK	1	49	Front	10mm	18900	1880	Sample 1	22.21	22.50	1.069	0.1	1.290	-	1.379
2nd	LTE Band 2	20M	QPSK	1	49	Front	10mm	18900	1880	Sample 1	22.21	22.50	1.069	0.05	1.230	1.049	1.315
1st	LTE Band 66	20M	QPSK	100	0	Front	10mm	132322	1745	Sample 1	21.54	22.00	1.112	-0.13	1.240	-	1.379
2nd	LTE Band 66	20M	QPSK	100	0	Front	10mm	132322	1745	Sample 1	21.54	22.00	1.112	0.15	1.200	1.033	1.334

No.	Band	BW (MHz)	Modulation	RB Size	RB offset	Test Position	Gap (mm)	Ch.	Freq. (MHz)	Sample	Average Power (dBm)	Tune-Up Limit (dBm)	Tune-up Scaling Factor	Power Drift (dB)	Measured 10g SAR (W/kg)	Ratio	Reported 10g SAR (W/kg)
1st	LTE Band 2	20M	QPSK	1	49	Back	0mm	18900	1880	Sample 1	22.21	22.50	1.069	-0.05	2.300	-	2.459
2nd	LTE Band 2	20M	QPSK	1	49	Back	0mm	18900	1880	Sample 1	22.21	22.50	1.069	0.05	2.210	1.041	2.363

General Note:

1. Per KDB 865664 D01v01r04, for each frequency band, repeated SAR measurement is required only when the measured SAR is ≥ 0.8 W/kg.
2. Per KDB 865664 D01v01r04, if the ratio among the repeated measurement is ≤ 1.2 and the measured SAR < 1.45 W/kg, only one repeated measurement is required.
3. Per KDB 865664 D01v01r04, if the extremity repeated SAR is necessary, the same procedures should be adapted for measurements according to extremity and occupational exposure limits by applying a factor of 2.5 for extremity exposure and a factor of 5 for occupational exposure to the corresponding SAR thresholds.
4. The ratio is the difference in percentage between original and repeated *measured SAR*.
5. All measurement SAR result is scaled-up to account for tune-up tolerance and is compliant.

14. Simultaneous Transmission Analysis

NO.	Simultaneous Transmission Configurations	Head	Body-worn	Extremity
1.	WWAN + WLAN2.4GHz	Yes	Yes	Yes
2.	WLAN2.4GHz + Bluetooth	Yes	Yes	Yes

General Note:

1. The Scaled SAR summation is calculated based on the same configuration and test position.
2. Per KDB 447498 D01v06, simultaneous transmission SAR is compliant if,
 - i) Scalar SAR summation $< 1.6 \text{ W/kg}$.
 - ii) $\text{SPLSR} = (\text{SAR}_1 + \text{SAR}_2)^{1.5} / (\text{min. separation distance, mm})$, and the peak separation distance is determined from the square root of $[(x_1 - x_2)^2 + (y_1 - y_2)^2 + (z_1 - z_2)^2]$, where (x_1, y_1, z_1) and (x_2, y_2, z_2) are the coordinates of the extrapolated peak SAR locations in the zoom scan.
 - iii) If $\text{SPLSR} \leq 0.04$, simultaneously transmission SAR measurement is not necessary.
 - iv) Simultaneously transmission SAR measurement, and the reported multi-band SAR $< 1.6 \text{ W/kg}$.
3. For simultaneous transmission analysis, Bluetooth SAR is estimated per KDB 447498 D01v06 based on the formula below.
 - i) $(\text{max. power of channel, including tune-up tolerance, mW}) / (\text{min. test separation distance, mm}) \cdot [\sqrt{f(\text{GHz})} / x] \text{ W/kg}$ for test separation distances $\leq 50 \text{ mm}$; where $x = 7.5$ for 1-g SAR, and $x = 18.75$ for 10-g SAR.
 - ii) When the minimum separation distance is $< 5 \text{ mm}$, the distance is used 5mm to determine SAR test exclusion.
 - iii) 0.4 W/kg for 1-g SAR and 1.0 W/kg for 10-g SAR, when the test separation distances is $> 50 \text{ mm}$.

WLAN Max Power	Exposure Position	Head	Body worn	Extremity
	Test separation	10 mm	0 mm	0 mm
1 dBm	Estimated SAR (W/kg)	0.026 W/kg	0.053 W/kg	0.021 W/kg

Bluetooth Max Power	Exposure Position	Head	Body worn	Extremity
	Test separation	10 mm	0 mm	0 mm
4 dBm	Estimated SAR (W/kg)	0.053 W/kg	0.105 W/kg	0.042 W/kg

14.1 Head Exposure Conditions

WWAN Band	Exposure Position	1	2	3	2+3 Summed 1g SAR (W/kg)	1+2 Summed 1g SAR (W/kg)
		WWAN 1g SAR (W/kg)	WLAN2.4GHz 1g SAR (W/kg)	Bluetooth 1g SAR (W/kg)		
LTE Band 2	Front	1.379	0.026	0.053	0.079	1.405
	Bottom side	0.179	0.026	0.053	0.079	0.205
LTE Band 12	Front	0.560	0.026	0.053	0.079	0.586
	Bottom side	0.227	0.026	0.053	0.079	0.253
LTE Band 13	Front	0.679	0.026	0.053	0.079	0.705
	Bottom side	0.164	0.026	0.053	0.079	0.190
LTE Band 66	Front	1.379	0.026	0.053	0.079	1.405
	Bottom side	0.366	0.026	0.053	0.079	0.392

14.2 Body-Worn Accessory Exposure Conditions

WWAN Band	Exposure Position	1	2	3	2+3 Summed 1g SAR (W/kg)	1+2 Summed 1g SAR (W/kg)
		WWAN 1g SAR (W/kg)	WLAN2.4GHz 1g SAR (W/kg)	Bluetooth 1g SAR (W/kg)		
LTE Band 2	Front	0.276	0.053	0.105	0.158	0.329
	Back	0.380	0.053	0.105	0.158	0.433
	Left side	0.260	0.053	0.105	0.158	0.313
	Right side	0.106	0.053	0.105	0.158	0.159
	Top side	0.013	0.053	0.105	0.158	0.066
	Bottom side	0.108	0.053	0.105	0.158	0.161
LTE Band 12	Front	0.145	0.053	0.105	0.158	0.198
	Back	0.216	0.053	0.105	0.158	0.269
	Left side	0.205	0.053	0.105	0.158	0.258
	Right side	0.198	0.053	0.105	0.158	0.251
	Top side	0.012	0.053	0.105	0.158	0.065
	Bottom side	0.211	0.053	0.105	0.158	0.264
LTE Band 13	Front	0.161	0.053	0.105	0.158	0.214
	Back	0.226	0.053	0.105	0.158	0.279
	Left side	0.161	0.053	0.105	0.158	0.214
	Right side	0.222	0.053	0.105	0.158	0.275
	Top side	0.015	0.053	0.105	0.158	0.068
	Bottom side	0.215	0.053	0.105	0.158	0.268
LTE Band 66	Front	0.118	0.053	0.105	0.158	0.171
	Back	0.253	0.053	0.105	0.158	0.306
	Left side	0.105	0.053	0.105	0.158	0.158
	Right side	0.097	0.053	0.105	0.158	0.150
	Top side	0.009	0.053	0.105	0.158	0.062
	Bottom side	0.178	0.053	0.105	0.158	0.231

14.3 Extremity Exposure Conditions

WWAN Band	Exposure Position	1	2	3	2+3 Summed 10g SAR (W/kg)	1+2 Summed 10g SAR (W/kg)
		WWAN 10g SAR (W/kg)	WLAN2.4GHz 10g SAR (W/kg)	Bluetooth 10g SAR (W/kg)		
LTE Band 2	Front	1.924	0.021	0.042	0.063	1.945
	Back	2.459	0.021	0.042	0.063	2.480
	Left side	1.743	0.021	0.042	0.063	1.764
	Right side	0.667	0.021	0.042	0.063	0.688
	Top side	0.100	0.021	0.042	0.063	0.121
	Bottom side	0.579	0.021	0.042	0.063	0.600
LTE Band 12	Front	1.242	0.021	0.042	0.063	1.263
	Back	1.633	0.021	0.042	0.063	1.654
	Left side	1.420	0.021	0.042	0.063	1.441
	Right side	0.857	0.021	0.042	0.063	0.878
	Top side	0.084	0.021	0.042	0.063	0.105
	Bottom side	1.062	0.021	0.042	0.063	1.083
LTE Band 13	Front	1.168	0.021	0.042	0.063	1.189
	Back	1.433	0.021	0.042	0.063	1.454
	Left side	1.003	0.021	0.042	0.063	1.024
	Right side	0.909	0.021	0.042	0.063	0.930
	Top side	0.072	0.021	0.042	0.063	0.093
	Bottom side	0.823	0.021	0.042	0.063	0.844
LTE Band 66	Front	0.701	0.021	0.042	0.063	0.722
	Back	1.618	0.021	0.042	0.063	1.639
	Left side	0.625	0.021	0.042	0.063	0.646
	Right side	0.551	0.021	0.042	0.063	0.572
	Top side	0.066	0.021	0.042	0.063	0.087
	Bottom side	0.804	0.021	0.042	0.063	0.825

Test Engineer : Barry Huang, White Huang and Charles Shen

15. Uncertainty Assessment

Per KDB 865664 D01 SAR measurement 100MHz to 6GHz, when the highest measured 1-g SAR within a frequency band is < 1.5 W/kg and the measured 10-g SAR within a frequency band is < 3.75 W/kg. The expanded SAR measurement uncertainty must be $\leq 30\%$, for a confidence interval of $k = 2$. If these conditions are met, extensive SAR measurement uncertainty analysis described in IEEE Std 1528-2013 is not required in SAR reports submitted for equipment approval. For this device, the highest measured 1-g SAR is less 1.5W/kg and highest measured 10-g SAR is less 3.75W/kg. Therefore, the measurement uncertainty table is not required in this report.

Declaration of Conformity:

The test results with all measurement uncertainty excluded is presented in accordance with the regulation limits or requirements declared by manufacturers.

Comments and Explanations:

The declared of product specification for EUT presented in the report are provided by the manufacturer, and the manufacturer takes all the responsibilities for the accuracy of product specification.

16. References

- [1] FCC 47 CFR Part 2 "Frequency Allocations and Radio Treaty Matters; General Rules and Regulations"
- [2] ANSI/IEEE Std. C95.1-1992, "IEEE Standard for Safety Levels with Respect to Human Exposure to Radio Frequency Electromagnetic Fields, 3 kHz to 300 GHz", September 1992
- [3] IEEE Std. 1528-2013, "IEEE Recommended Practice for Determining the Peak Spatial-Average Specific Absorption Rate (SAR) in the Human Head from Wireless Communications Devices: Measurement Techniques", Sep 2013
- [4] SPEAG DASY System Handbook
- [5] FCC KDB 248227 D01 v02r02, "SAR Guidance for IEEE 802.11 (WiFi) Transmitters", Oct 2015.
- [6] FCC KDB 447498 D01 v06, "Mobile and Portable Device RF Exposure Procedures and Equipment Authorization Policies", Oct 2015
- [7] FCC KDB 941225 D05 v02r05, "SAR Evaluation Considerations for LTE Devices", Dec 2015
- [8] FCC KDB 865664 D01 v01r04, "SAR Measurement Requirements for 100 MHz to 6 GHz", Aug 2015.
- [9] FCC KDB 865664 D02 v01r02, "RF Exposure Compliance Reporting and Documentation Considerations" Oct 2015.