



## SPORTON International Inc.

No. 52, Hwa Ya 1st Rd., Hwa Ya Technology Park, Kwei-Shan Hsiang, Tao Yuan Hsien, Taiwan, R.O.C.  
Ph: 886-3-327-3456 / FAX: 886-3-327-0973 / www.sporton.com.tw


Project No: CB10506202

### Maximum Permissible Exposure Report

|                        |                                                                                   |
|------------------------|-----------------------------------------------------------------------------------|
| Applicant's company    | Mojo Networks, Inc.                                                               |
| Applicant Address      | 339 N. Bernardo Avenue, Suite #200, Mountain View, CA USA                         |
| FCC ID                 | TOR-C75                                                                           |
| Manufacturer's company | Life-On Network Communication (Dongguan) Limited                                  |
| Manufacturer Address   | 30#Keji Rd., Yin Hu Industrial Area, Qingxi Town, DongGuan City, Guangdong, China |

|                  |                                             |
|------------------|---------------------------------------------|
| Product Name     | AirTight Access Point                       |
| Brand Name       | MOJO, WatchGuard                            |
| Model Name       | C-75, C-75-E, AP320                         |
| Ref. Standard(s) | 47 CFR FCC Part 2 Subpart J, section 2.1091 |
| Received Date    | Jan. 10, 2014                               |
| Final Test Date  | Jun. 03, 2016                               |
| Submission Type  | Class II Change                             |

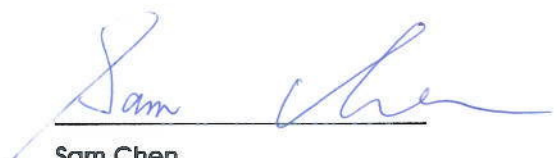

  
Sam Chen

SPORTON INTERNATIONAL INC.

## Table of Contents

|                                                  |          |
|--------------------------------------------------|----------|
| <b>1. GENERAL DESCRIPTION.....</b>               | <b>1</b> |
| 1.1. EUT General Information .....               | 1        |
| 1.2. Table for Multiple Listing.....             | 1        |
| 1.3. Table for Class II Change .....             | 1        |
| 1.4. Testing Location.....                       | 1        |
| <b>2. MAXIMUM PERMISSIBLE EXPOSURE.....</b>      | <b>2</b> |
| 2.1. Limit of Maximum Permissible Exposure ..... | 2        |
| 2.2. MPE Calculation Method .....                | 2        |
| 2.3. Calculated Result and Limit.....            | 3        |

## History of This Test Report

| REPORT NO.  | VERSION | DESCRIPTION             | ISSUED DATE   |
|-------------|---------|-------------------------|---------------|
| FA411023-08 | Rev. 01 | Initial issue of report | Jul. 26, 2016 |
|             |         |                         |               |
|             |         |                         |               |
|             |         |                         |               |
|             |         |                         |               |
|             |         |                         |               |
|             |         |                         |               |
|             |         |                         |               |
|             |         |                         |               |
|             |         |                         |               |
|             |         |                         |               |
|             |         |                         |               |
|             |         |                         |               |
|             |         |                         |               |
|             |         |                         |               |

## 1. GENERAL DESCRIPTION

### 1.1. EUT General Information

| RF General Information |                        |                           |                                                                                                 |
|------------------------|------------------------|---------------------------|-------------------------------------------------------------------------------------------------|
| Evaluation Mode        | Frequency Range (MHz)  | Operating Frequency (MHz) | Modulation Type                                                                                 |
| 2.4GHz WLAN            | 2400-2483.5            | 2412-2462                 | 802.11b: DSSS (DBPSK, DQPSK, CCK)<br>802.11g/n: OFDM (BPSK, QPSK, 16QAM, 64QAM)                 |
| 5GHz WLAN              | 5150-5250<br>5725-5850 | 5180-5240<br>5745-5825    | 802.11a/n: OFDM (BPSK, QPSK, 16QAM, 64QAM)<br>802.11ac: OFDM (BPSK, QPSK, 16QAM, 64QAM, 256QAM) |

### 1.2. Table for Multiple Listing

The EUT has three model numbers which are identical to each other in all aspects except for the following table:

| Brand Name | Model No. | Antenna          |
|------------|-----------|------------------|
| MOJO       | C-75      | Internal antenna |
|            | C-75-E    | External antenna |
| WatchGuard | AP320     | Internal antenna |

Note: Adding dipole antenna for model: C-75 and AP320. Thus, only model: C-75 was tested.

### 1.3. Table for Class II Change

This product is an extension of original one reported under Sporton project number: FA411023-06

Below is the table for the change of the product with respect to the original one.

| Modifications                                                                                                                     | Performance Checking          |
|-----------------------------------------------------------------------------------------------------------------------------------|-------------------------------|
| Adding a set of dipole antenna (P/N: 001174B2AD5F) with higher gain than originally certified antennas for model: C-75 and AP320. | Maximum Permissible Exposure. |

### 1.4. Testing Location

| Testing Location                    |        |                                                                                                                               |
|-------------------------------------|--------|-------------------------------------------------------------------------------------------------------------------------------|
| <input type="checkbox"/>            | HWA YA | ADD : No. 52, Hwa Ya 1st Rd., Kwei-Shan Hsiang, Tao Yuan Hsien, Taiwan, R.O.C.<br>TEL : 886-3-327-3456 FAX : 886-3-327-0973   |
| <input checked="" type="checkbox"/> | JHUBEI | ADD : No.8, Lane 724, Bo-ai St., Jhubei City, HsinChu County 302, Taiwan, R.O.C.<br>TEL : 886-3-656-9065 FAX : 886-3-656-9085 |

## 2. MAXIMUM PERMISSIBLE EXPOSURE

### 2.1. Limit of Maximum Permissible Exposure

(A) Limits for Occupational / Controlled Exposure

| Frequency Range (MHz) | Electric Field Strength (E) (V/m) | Magnetic Field Strength (H) (A/m) | Power Density (S) (mW/ cm <sup>2</sup> ) | Averaging Time  E  <sup>2</sup> ,  H  <sup>2</sup> or S (minutes) |
|-----------------------|-----------------------------------|-----------------------------------|------------------------------------------|-------------------------------------------------------------------|
| 0.3-3.0               | 614                               | 1.63                              | (100)*                                   | 6                                                                 |
| 3.0-30                | 1842 / f                          | 4.89 / f                          | (900 / f)*                               | 6                                                                 |
| 30-300                | 61.4                              | 0.163                             | 1.0                                      | 6                                                                 |
| 300-1500              |                                   |                                   | F/300                                    | 6                                                                 |
| 1500-100,000          |                                   |                                   | 5                                        | 6                                                                 |

(B) Limits for General Population / Uncontrolled Exposure

| Frequency Range (MHz) | Electric Field Strength (E) (V/m) | Magnetic Field Strength (H) (A/m) | Power Density (S) (mW/ cm <sup>2</sup> ) | Averaging Time  E  <sup>2</sup> ,  H  <sup>2</sup> or S (minutes) |
|-----------------------|-----------------------------------|-----------------------------------|------------------------------------------|-------------------------------------------------------------------|
| 0.3-1.34              | 614                               | 1.63                              | (100)*                                   | 30                                                                |
| 1.34-30               | 824/f                             | 2.19/f                            | (180/f)*                                 | 30                                                                |
| 30-300                | 27.5                              | 0.073                             | 0.2                                      | 30                                                                |
| 300-1500              |                                   |                                   | F/1500                                   | 30                                                                |
| 1500-100,000          |                                   |                                   | 1.0                                      | 30                                                                |

Note: f = frequency in MHz ; \*Plane-wave equivalent power density

### 2.2. MPE Calculation Method

The MPE was calculated at 20 cm to show compliance with the power density limit.

The following formula was used to calculate the Power Density:

$$E \text{ (V/m)} = \frac{\sqrt{30 \times P \times G}}{d} \quad \text{Power Density: } Pd \text{ (W/m}^2\text{)} = \frac{E^2}{377}$$

**E** = Electric field (V/m)

**P** = Peak RF output power (W)

**G** = EUT Antenna numeric gain (numeric)

**d** = Separation distance between radiator and human body (m)

The formula can be changed to

$$Pd = \frac{30 \times P \times G}{377 \times d^2}$$

### 2.3. Calculated Result and Limit

Exposure Environment: General Population / Uncontrolled Exposure

For 5GHz Band (NII):

Antenna Type : Dipole Ant.

Conducted Power for IEEE 802.11ac MCS0/Nss1 (VHT20): 26.47dBm

| Distance (cm) | Test Freq. (MHz) | Antenna Gain (dBi) | Antenna Gain (numeric) | Average Output Power |          | Power Density (S) (mW/cm <sup>2</sup> ) | Limit of Power Density (S) (mW/cm <sup>2</sup> ) | Test Result |
|---------------|------------------|--------------------|------------------------|----------------------|----------|-----------------------------------------|--------------------------------------------------|-------------|
|               |                  |                    |                        | (dBm)                | (mW)     |                                         |                                                  |             |
| 20            | 5745             | 6.64               | 4.6132                 | 26.47                | 443.5261 | 0.4072                                  | 1                                                | Complies    |

For 2.4GHz Band:

Antenna Type : Dipole Ant.

Conducted Power for IEEE 802.11n MCS0 (HT20): 24.98 dBm

| Distance (cm) | Test Freq. (MHz) | Antenna Gain (dBi) | Antenna Gain (numeric) | Average Output Power |          | Power Density (S) (mW/cm <sup>2</sup> ) | Limit of Power Density (S) (mW/cm <sup>2</sup> ) | Test Result |
|---------------|------------------|--------------------|------------------------|----------------------|----------|-----------------------------------------|--------------------------------------------------|-------------|
|               |                  |                    |                        | (dBm)                | (mW)     |                                         |                                                  |             |
| 20            | 2437             | 6.69               | 4.6666                 | 24.98                | 315.1112 | 0.2926                                  | 1                                                | Complies    |

#### Conclusion:

Both of the WLAN 2.4GHz Band and WLAN 5GHz Band can transmit simultaneously, the formula of calculated the MPE is:

$$CPD1 / LPD1 + CPD2 / LPD2 + .....etc. < 1$$

CPD = Calculation power density

LPD = Limit of power density

Therefore, the worst-case situation is  $0.2926 / 1 + 0.4072 / 1 = 0.6998$ , which is less than "1". This confirmed that the device complies.