



# TEST REPORT

**Report Reference No.**..... : **TRE15110075** R/C.....: 52866  
**FCC ID**..... : **2ABOSGCSKYFUEGO50D**  
**Applicant's name**..... : **Sky Phone LLC**  
**Address**..... : 1348 Washington Av. #350, Miami Beach FL. 33139  
**Manufacturer**..... : DongGuan Tenexon Communication Technology Co., Ltd.  
**Address**..... : L1 - L3, Block A, Building B, KeYuan 9th Road No. 1, Tangxia Town, Dongguan City, Guangdong China.  
**Test item description** ..... : **Smart Phone**  
**Trade Mark** ..... : SKY  
**Model/Type reference**..... : Fuego 5.0D  
**Listed Model(s)**..... : W509  
**Standard** ..... : **FCC 47 CFR Part2.1093**  
**ANSI/IEEE C95.1: 1999**  
**IEEE 1528: 2013**  
**Date of receipt of test sample**..... : Nov. 16, 2015  
**Date of testing**..... : Nov. 17, 2015 ~ Nov. 25, 2015  
**Date of issue**..... : Nov. 30, 2015  
**Result**..... : **PASS**

Compiled by  
( position+printed name+signature)...: File administrators: Candy Liu

Candy Liu

Supervised by  
( position+printed name+signature)...: Test Engineer: Hans Hu

Hans Hu

Approved by  
( position+printed name+signature)...: Manager: Hans Hu

Hans Hu

**Testing Laboratory Name** ..... : **Shenzhen Huatongwei International Inspection Co., Ltd**

**Address**..... : 1/F, Bldg 3, Hongfa Hi-tech Industrial Park, Genyu Road, Tianliao, Gongming, Shenzhen, China

**Shenzhen Huatongwei International Inspection Co., Ltd. All rights reserved.**

This publication may be reproduced in whole or in part for non-commercial purposes as long as the Shenzhen Huatongwei International Inspection Co., Ltd is acknowledged as copyright owner and source of the material. Shenzhen Huatongwei International Inspection Co., Ltd takes no responsibility for and will not assume liability for damages resulting from the reader's interpretation of the reproduced material due to its placement and context.

*The test report merely corresponds to the test sample.*

*It is not permitted to copy extracts of these test result without the written permission of the test laboratory.*

## Contents

<u>1.</u>	<u>Test Standards and Test Description</u>	<u>3</u>
1.1.	Test Standards	3
1.2.	Test Description	3
<u>2.</u>	<u>Summary</u>	<u>4</u>
2.1.	Client Information	4
2.2.	Product Description	4
<u>3.</u>	<u>Test Environment</u>	<u>6</u>
3.1.	Address of the test laboratory	6
3.2.	Test Facility	6
3.3.	Environmental conditions	7
<u>4.</u>	<u>Equipments Used during the Test</u>	<u>8</u>
<u>5.</u>	<u>Measurement Uncertainty</u>	<u>9</u>
<u>6.</u>	<u>SAR Measurements System Configuration</u>	<u>11</u>
6.1.	SAR Measurement Set-up	11
6.2.	DASY5 E-field Probe System	12
6.3.	Phantoms	13
6.4.	Device Holder	13
<u>7.</u>	<u>SAR Test Procedure</u>	<u>14</u>
7.1.	Scanning Procedure	14
7.2.	Data Storage and Evaluation	15
<u>8.</u>	<u>Position of the wireless device in relation to the phantom</u>	<u>17</u>
8.1.	Head Position	17
8.2.	Body Position	18
8.3.	Hotspot Mode Exposure conditions	18
<u>9.</u>	<u>System Check</u>	<u>19</u>
9.1.	Tissue Dielectric Parameters	19
9.2.	SAR System Check	21
<u>10.</u>	<u>SAR Exposure Limits</u>	<u>29</u>
<u>11.</u>	<u>Conducted Power Measurement Results</u>	<u>30</u>
<u>12.</u>	<u>Maximum Tune-up Limit</u>	<u>36</u>
<u>13.</u>	<u>Antenna Location</u>	<u>37</u>
<u>14.</u>	<u>SAR Measurement Results</u>	<u>38</u>
<u>15.</u>	<u>Simultaneous Transmission analysis</u>	<u>56</u>
<u>16.</u>	<u>TestSetup Photos</u>	<u>61</u>
<u>17.</u>	<u>External and Internal Photos of the EUT</u>	<u>64</u>

## **1 . Test Standards and Test Description**

### **1.1. Test Standards**

The tests were performed according to following standards:

[FCC 47 Part 2.1093](#) Radiofrequency Radiation Exposure Evaluation:Portable Devices

[IEEE Std C95.1, 1999](#): IEEE Standard for Safety Levels with Respect to Human Exposure to Radio Frequency Electromagnetic Fields, 3 KHz to 300 GHz.

[IEEE Std 1528™-2013](#): IEEE Recommended Practice for Determining the Peak Spatial-Average Specific Absorption Rate (SAR) in the Human Head from Wireless Communications Devices: Measurement Techniques.

[KDB 865664 D01 SAR Measurement 100 MHz to 6 GHz v01r04](#): SAR Measurement Requirements for 100 MHz to 6 GHz

[KDB 865664 D02 RF Exposure Reporting v01r02](#): RF Exposure Compliance Reporting and Documentation Considerations

[KDB 447498 D01 General RF Exposure Guidance v06](#): Mobile and Portable Device RF Exposure Procedures and Equipment Authorization Policies

[KDB 248227 D01 802.11 Wi-Fi SAR v02r02](#): SAR Measurement Procedures for 802.11 a/b/g Transmitters

[KDB 648474 D04 Handset SAR v01r03](#): SAR Evaluation Considerations for Wireless Handsets

[KDB 941225 D01 3G SAR Procedures v03r01](#): SAR Measurement Procedures for 3G Devices

[KDB 941225 D06 Hotspot Mode v02r01](#): SAR Evaluation Procedures for Portable Devices with Wireless Router Capabilities

### **1.2. Test Description**

The EUT battery must be fully charged and checked periodically during the test to ascertain uniform power

## 2. Summary

### 2.1. Client Information

Applicant:	Sky Phone LLC
Address:	1348 Washington Av. #350, Miami Beach FL. 33139
Manufacturer:	DongGuan Tenexon Communication Technology Co., Ltd.
Address:	L1 - L3, Block A, Building B, KeYuan 9th Road No. 1, Tangxia Town, Dongguan City ,Guangdong China.

### 2.2. Product Description

Name of EUT	Smart Phone		
Trade Mark:	SKY		
Model No.:	Fuego 5.0D		
Listed Model(s):	W509		
Device Category:	Portable		
Product stage:	Production unit		
RF Exposure Environment:	General Population / Uncontrolled		
Power supply:	DC 3.8V From internal battery		
Adapter information:	Model:Fuego 5.0D Input:AC 100-240V 50/60Hz 0.2A Output: 5Vd.c., 1.0A		
IMEI:	358228054958255 358228054958268		
S/N:	#001		
Hardware version:	FS706-MB-V0.1		
Software version:	zh988_d10_trx_l402_fwvga_64g8g_R08_20151209_release.tar.gz		
Maximum SAR Value			
Separation Distance:	Head:	0mm	
	Body:	5mm	
Max Report SAR Value (1g):	Head:	0.333 W/Kg	
	Body:	0.792 W/Kg	
2G			
Support Network:	GSM, GPRS, EGPRS		
Support Band:	GSM850, PCS1900		
Modulation:	GSM/GPRS: GMSK EGPRS: GMSK		
Transmit Frequency:	GSM850: 824.20MHz-848.80MHz PCS1900: 1850.20MHz-1909.80MHz		
Receive Frequency:	GSM850: 869.20MHz-893.80MHz PCS1900: 1930.20MHz-1989.80MHz		
GPRS Class:	12		
EGPRS Class:	12		
Antenna type:	Intergal Antenna		

<b>WCDMA</b>	
Operation Band:	FDD Band II, FDD Band V
Power Class:	Power Class 3
Modulation Type:	QPSK for WCDMA/HSUPA/HSDPA
WCDMA Release Version:	Release 7
HSDPA Release Version:	Category 14
HSUPA Release Version:	Category 6
DC-HSUPA Release Version:	Not Supported
HSPA+ Release Version:	Not Supported
Antenna type:	Intergal Antenna
<b>WIFI</b>	
Supported type:	802.11b/802.11g/802.11n(H20)/802.11n(H40)
Modulation:	802.11b: DSSS 802.11g/802.11n(H20)/ 802.11n(H40):OFDM
Operation frequency:	802.11b/g/n(H20): 2412MHz~2462MHz 802.11n(H40): 2422MHz~2452MHz
Channel number:	802.11b/g/n(H20): 11 802.11n(H40): 7
Channel separation:	5MHz
Antenna type:	Internal Antenna
<b>Bluetooth</b>	
Version:	Supported BT3.0+EDR
Modulation:	GFSK, $\pi/4$ DQPSK, 8DPSK
Operation frequency:	2402MHz~2480MHz
Channel number:	79
Channel separation:	1MHz
Antenna type:	Integral Antenna
<b>Remark:</b> <ol style="list-style-type: none"> <li>There are two model number (Fuego 5.0D, W509), there are the same including circuit design, PCB board, structure and all components, only different is model name.</li> <li>The dual SIM card mobile has 2 SIM slots and supports dual SIM dual standby. The WWAN radio transmission will be enabled by either one SIM at a time (Single active)</li> <li>After pre-scan two SIM cards power, we found test result of the SIM1 was the worse, so we chose SIM1 card to perform all tests.</li> </ol>	

### **3. Test Environment**

#### **3.1. Address of the test laboratory**

Laboratory: Shenzhen Huatongwei International Inspection Co., Ltd.

Address: 1/F, Bldg 3, Hongfa Hi-tech Industrial Park, Genyu Road, Tianliao, Gongming, Shenzhen, China

Phone: 86-755-26748019 Fax: 86-755-26748089

#### **3.2. Test Facility**

The test facility is recognized, certified, or accredited by the following organizations:

##### **CNAS-Lab Code: L1225**

Shenzhen Huatongwei International Inspection Co., Ltd. has been assessed and proved to be in compliance with CNAS-CL01 Accreditation Criteria for Testing and Calibration Laboratories (identical to ISO/IEC17025: 2005 General Requirements) for the Competence of Testing and Calibration Laboratories, Date of Registration: February 28, 2015. Valid time is until February 27, 2018.

##### **A2LA-Lab Cert. No. 3902.01**

Shenzhen Huatongwei International Inspection Co., Ltd. EMC Laboratory has been accredited by A2LA for technical competence in the field of electrical testing, and proved to be in compliance with ISO/IEC 17025: 2005 General Requirements for the Competence of Testing and Calibration Laboratories and any additional program requirements in the identified field of testing. Valid time is until December 31, 2016.

##### **FCC-Registration No.: 317478**

Shenzhen Huatongwei International Inspection Co., Ltd. EMC Laboratory has been registered and fully described in a report filed with the FCC (Federal Communications Commission). The acceptance letter from the FCC is maintained in our files. Registration 317478, Renewal date Jul. 18, 2014, valid time is until Jul. 18, 2017.

##### **IC-Registration No.: 5377A&5377B**

The 3m Alternate Test Site of Shenzhen Huatongwei International Inspection Co., Ltd. has been registered by Certification and Engineering Bureau of Industry Canada for the performance of radiated measurements with Registration No. 5377A on Dec. 31, 2013, valid time is until Dec. 31, 2016.

Two 3m Alternate Test Site of Shenzhen Huatongwei International Inspection Co., Ltd. has been registered by Certification and Engineering Bureau of Industry Canada for the performance of radiated measurements with Registration No. 5377B on Dec.03, 2014, valid time is until Dec.03, 2017.

##### **ACA**

Shenzhen Huatongwei International Inspection Co., Ltd. EMC Laboratory can also perform testing for the Australian C-Tick mark as a result of our A2LA accreditation.

##### **VCCI**

The 3m Semi-

anechoic chamber (12.2m×7.95m×6.7m) of Shenzhen Huatongwei International Inspection Co., Ltd.

has been registered in accordance with the Regulations for Voluntary Control Measures with Registration No.: R-2484. Date of Registration: Dec. 20, 2012. Valid time is until Dec. 29, 2015.

Radiated disturbance above 1GHz measurement of Shenzhen Huatongwei International Inspection Co., Ltd. has been registered in accordance with the Regulations for Voluntary Control Measures with Registration No.: G-292. Date of Registration: Dec. 24, 2013. Valid time is until Dec. 23, 2016.

Main Ports Conducted Interference Measurement of Shenzhen Huatongwei International Inspection Co., Ltd. has been registered in accordance with the Regulations for Voluntary Control Measures with Registration No.: C-2726. Date of Registration: Dec. 20, 2012. Valid time is until Dec. 19, 2015.

Telecommunication Ports Conducted Interference Measurement of Shenzhen Huatongwei International Inspection Co., Ltd. has been registered in accordance with the Regulations for Voluntary Control Measures with Registration No.: T-1837. Date of Registration: May 07, 2013. Valid time is until May 06, 2016.

##### **DNV**

Shenzhen Huatongwei International Inspection Co., Ltd. has been found to comply with the requirements of DNV towards subcontractor of EMC and safety testing services in conjunction with the EMC and Low voltage Directives and in the voluntary field. The acceptance is based on a formal quality Audit and follow-ups according to relevant parts of ISO/IEC Guide 17025 (2005), in accordance with the requirements of the DNV Laboratory Quality Manual towards subcontractors. Valid time is until Aug. 24, 2016.

### 3.3. Environmental conditions

During the measurement the environmental conditions were within the listed ranges:

Temperature:	18-25 ° C
Humidity:	40-65 %
Atmospheric pressure:	950-1050mbar

#### 4. Equipments Used during the Test

Test Equipment	Manufacturer	Type/Model	Serial Number	Calibration	
				Last Calibration	Calibration Interval
Data Acquisition Electronics DAEx	SPEAG	DAE4	1315	2015/07/22	1
E-field Probe	SPEAG	ES3DV3	3292	2015/08/15	1
System Validation Dipole 835V2	SPEAG	D835V2	4d134	2014/07/24	3
System Validation Dipole D1900V2	SPEAG	D1900V2	5d150	2015/12/12	1
System Validation Dipole 2450V2	SPEAG	D2450V2	884	2015/09/01	1
Dielectric Probe Kit	Agilent	85070E	US44020288	/	/
Power meter	Agilent	E4417A	GB41292254	2015/10/26	1
Power sensor	Agilent	8481H	MY41095360	2015/10/26	1
Power sensor	Agilent	E9327A	US40441621	2015/10/26	1
Network analyzer	Agilent	8753E	US37390562	2015/10/25	1
Universal Radio Communication Tester	ROHDE & SCHWARZ	CMU200	112012	2015/10/23	1
Signal Generator	ROHDE & SCHWARZ	SMBV100A	258525	2015/10/23	1
Power Divider	ARRA	A3200-2	N/A	N/A	N/A
Dual Directional Coupler	Agilent	778D	50783	Note	
Attenuator 1	PE	PE7005-10	N/A	Note	
Attenuator 2	PE	PE7005-10	N/A	Note	
Attenuator 3	PE	PE7005-3	N/A	Note	
Power Amplifier	AR	5S1G4M2	0328798	Note	

Note:

1. The Probe, Dipole and DAE calibration reference to the Appendix A.
2. Prior to system verification and validation, the path loss from the signal generator to the system check source and the power meter, which includes the amplifier, cable, attenuator and directional coupler, was measured by the network analyzer. The reading of the power meter was offset by the path loss difference between the path to the power meter and the path to the system check source to monitor the actual power level fed to the system check source.
3. Referring to KDB865664 D01, the dipole calibration interval can be extended to 3 years with justification. The dipole are also not physically damaged or repaired during the interval.
4. The justification data of dipole D835V2, can be found in appendix A. the return loss is <-20dB, within 20% of prior calibration, the impedance is within 5 ohm of prior calibration.



## 5. Measurement Uncertainty

Measurement Uncertainty										
No.	Error Description	Type	Uncertainty Value	Probably Distribution	Div.	(Ci) 1g	(Ci) 10g	Std. Unc. (1g)	Std. Unc. (10g)	Degree of freedom
Measurement System										
1	Probe calibration	B	6.0%	N	1	1	1	6.0%	6.0%	∞
2	Axial isotropy	B	4.70%	R	$\sqrt{3}$	0.7	0.7	1.90%	1.90%	∞
3	Hemispherical isotropy	B	9.60%	R	$\sqrt{3}$	0.7	0.7	3.90%	3.90%	∞
4	Boundary Effects	B	1.00%	R	$\sqrt{3}$	1	1	0.60%	0.60%	∞
5	Probe Linearity	B	4.70%	R	$\sqrt{3}$	1	1	2.70%	2.70%	∞
6	Detection limit	B	1.00%	R	$\sqrt{3}$	1	1	0.60%	0.60%	∞
7	RF ambient conditions-noise	B	0.00%	R	$\sqrt{3}$	1	1	0.00%	0.00%	∞
8	RF ambient conditions-reflection	B	0.00%	R	$\sqrt{3}$	1	1	0.00%	0.00%	∞
9	Response time	B	0.80%	R	$\sqrt{3}$	1	1	0.50%	0.50%	∞
10	Integration time	B	5.00%	R	$\sqrt{3}$	1	1	2.90%	2.90%	∞
11	RF ambient	B	3.00%	R	$\sqrt{3}$	1	1	1.70%	1.70%	∞
12	Probe positioned mech. restrictions	B	0.40%	R	$\sqrt{3}$	1	1	0.20%	0.20%	∞
13	Probe positioning with respect to phantom shell	B	2.90%	R	$\sqrt{3}$	1	1	1.70%	1.70%	∞
14	Max.SAR evaluation	B	3.90%	R	$\sqrt{3}$	1	1	2.30%	2.30%	∞
Test Sample Related										
15	Test sample positioning	A	1.86%	N	1	1	1	1.86%	1.86%	∞
16	Device holder uncertainty	A	1.70%	N	1	1	1	1.70%	1.70%	∞
17	Drift of output power	B	5.00%	R	$\sqrt{3}$	1	1	2.90%	2.90%	∞
Phantom and Set-up										
18	Phantom uncertainty	B	4.00%	R	$\sqrt{3}$	1	1	2.30%	2.30%	∞
19	Liquid conductivity (target)	B	5.00%	R	$\sqrt{3}$	0.64	0.43	1.80%	1.20%	∞
20	Liquid conductivity (meas.)	A	0.50%	N	1	0.64	0.43	0.32%	0.26%	∞
21	Liquid permittivity (target)	B	5.00%	R	$\sqrt{3}$	0.64	0.43	1.80%	1.20%	∞
22	Liquid cpermittivity (meas.)	A	0.16%	N	1	0.64	0.43	0.10%	0.07%	∞
Combined standard uncertainty		$u_c = \sqrt{\sum_{i=1}^{22} c_i^2 u_i^2}$		/	/	/	/	9.79%	9.67%	∞
Expanded uncertainty (confidence interval of 95 %)		$u_e = 2u_c$		R	K=2	/	/	19.57%	19.34%	∞

System Check Uncertainty										
No.	Error Description	Type	Uncertainty Value	Probably Distribution	Div.	(Ci) 1g	(Ci) 10g	Std. Unc. (1g)	Std. Unc. (10g)	Degree of freedom
Measurement System										
1	Probe calibration	B	6.0%	N	1	1	1	6.0%	6.0%	$\infty$
2	Axial isotropy	B	4.70%	R	$\sqrt{3}$	0.7	0.7	1.90%	1.90%	$\infty$
3	Hemispherical isotropy	B	9.60%	R	$\sqrt{3}$	0.7	0.7	3.90%	3.90%	$\infty$
4	Boundary Effects	B	1.00%	R	$\sqrt{3}$	1	1	0.60%	0.60%	$\infty$
5	Probe Linearity	B	4.70%	R	$\sqrt{3}$	1	1	2.70%	2.70%	$\infty$
6	Detection limit	B	1.00%	R	$\sqrt{3}$	1	1	0.60%	0.60%	$\infty$
7	RF ambient conditions-noise	B	0.00%	R	$\sqrt{3}$	1	1	0.00%	0.00%	$\infty$
8	RF ambient conditions-reflection	B	0.00%	R	$\sqrt{3}$	1	1	0.00%	0.00%	$\infty$
9	Response time	B	0.80%	R	$\sqrt{3}$	1	1	0.50%	0.50%	$\infty$
10	Integration time	B	5.00%	R	$\sqrt{3}$	1	1	2.90%	2.90%	$\infty$
11	RF ambient	B	3.00%	R	$\sqrt{3}$	1	1	1.70%	1.70%	$\infty$
12	Probe positioned mech. restrictions	B	0.40%	R	$\sqrt{3}$	1	1	0.20%	0.20%	$\infty$
13	Probe positioning with respect to phantom shell	B	2.90%	R	$\sqrt{3}$	1	1	1.70%	1.70%	$\infty$
14	Max.SAR evalation	B	3.90%	R	$\sqrt{3}$	1	1	2.30%	2.30%	$\infty$
System validation source-dipole										
15	Deviation of experimental dipole from numerical dipole	A	1.58%	N	1	1	1	1.58%	1.58%	$\infty$
16	Dipole axis to liquid distance	A	1.35%	N	1	1	1	1.35%	1.35%	$\infty$
17	Input power and SAR drift	B	4.00%	R	$\sqrt{3}$	1	1	2.30%	2.30%	$\infty$
Phantom and Set-up										
18	Phantom uncertainty	B	4.00%	R	$\sqrt{3}$	1	1	2.30%	2.30%	$\infty$
20	Liquid conductivity (meas.)	A	0.50%	N	1	0.64	0.43	0.32%	0.26%	$\infty$
22	Liquid cpermittivity (meas.)	A	0.16%	N	1	0.64	0.43	0.10%	0.07%	$\infty$
Combined standard uncertainty		$u_c = \sqrt{\sum_{i=1}^{22} c_i^2 u_i^2}$		/	/	/	/	8.80%	8.79%	$\infty$
Expanded uncertainty (confidence interval of 95 %)		$u_e = 2u_c$		R	K=2	/	/	17.59%	17.58%	$\infty$

## 6. SAR Measurements System Configuration

## 6.1. SAR Measurement Set-up

The DASY5 system for performing compliance tests consists of the following items:

A standard high precision 6-axis robot (Stäubli RX family) with controller and software. An arm extension for accommodating the data acquisition electronics (DAE).

A dosimetric probe, i.e. an isotropic E-field probe optimized and calibrated for usage in tissue simulating liquid. The probe is equipped with an optical surface detector system.

A data acquisition electronic (DAE) which performs the signal amplification, signal multiplexing, AD-conversion, offset measurements, mechanical surface detection, collision detection, etc. The unit is battery powered with standard or rechargeable batteries. The signal is optically transmitted to the EOC.

A unit to operate the optical surface detector which is connected to the EOC.

The Electro-Optical Coupler (EOC) performs the conversion from the optical into a digital electric signal of the DAE. The EOC is connected to the DASY5 measurement server.

The DASY5 measurement server, which performs all real-time data evaluation for field measurements and surface detection, controls robot movements and handles safety operation. A computer operating Windows 2003.

DASY5 software and SEMCAD data evaluation software.


Remote control with teach panel and additional circuitry for robot safety such as warning lamps, etc.

The generic twin phantom enabling the testing of left-hand and right-hand usage.

The device holder for handheld Mobile Phones.

Tissue simulating liquid mixed according to the given recipes.

System validation dipoles allowing to validate the proper functioning of the system.

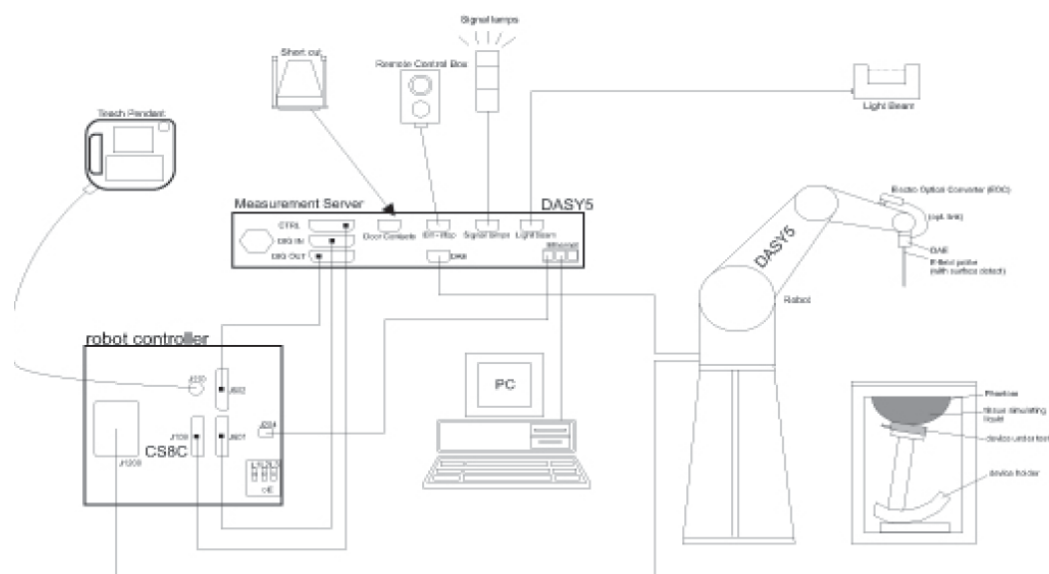

## 6.2. DASY5 E-field Probe System

The SAR measurements were conducted with the dosimetric probe ES3DV3 (manufactured by SPEAG), designed in the classical triangular configuration and optimized for dosimetric evaluation.

### ● Probe Specification

Construction Symmetrical design with triangular core

Interleaved sensors

Built-in shielding against static charges

PEEK enclosure material (resistant to organic solvents, e.g., DGBE)

Calibration ISO/IEC 17025 calibration service available.


Frequency	10 MHz to 4 GHz; Linearity: $\pm 0.2$ dB (30 MHz to 4 GHz)
Directivity	$\pm 0.2$ dB in HSL (rotation around probe axis) $\pm 0.3$ dB in tissue material (rotation normal to probe axis)
Dynamic Range	5 $\mu$ W/g to > 100 mW/g; Linearity: $\pm 0.2$ dB
Dimensions	Overall length: 337 mm (Tip: 20 mm) Tip diameter: 3.9 mm (Body: 12 mm) Distance from probe tip to dipole centers: 2.0 mm
Application	General dosimetry up to 4 GHz Dosimetry in strong gradient fields Compliance tests of Mobile Phones
Compatibility	DASY3, DASY4, DASY52 SAR and higher, EASY4/MRI



### ● Isotropic E-Field Probe

The isotropic E-Field probe has been fully calibrated and assessed for isotropicity, and boundary effect within a controlled environment. Depending on the frequency for which the probe is calibrated the method utilized for calibration will change.

The E-Field probe utilizes a triangular sensor arrangement as detailed in the diagram below:

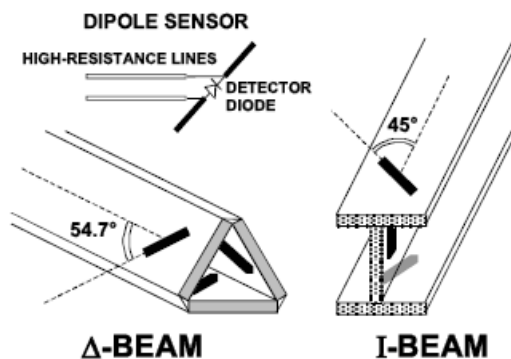

### 6.3. Phantoms

The phantom used for all tests i.e. for both system checks and device testing, was the twin-headed "SAM Phantom", manufactured by SPEAG. The SAM twin phantom is a fiberglass shell phantom with 2mm shell thickness (except the ear region, where shell thickness increases to 6mm).

System checking was performed using the flat section, whilst Head SAR tests used the left and right head profile sections. Body SAR testing also used the flat section between the head profiles.



SAM Twin Phantom

### 6.4. Device Holder

The device was placed in the device holder (illustrated below) that is supplied by SPEAG as an integral part of the DASY system.

The DASY device holder is designed to cope with the different positions given in the standard. It has two scales for device rotation (with respect to the body axis) and device inclination (with respect to the line between the ear reference points). The rotation centers for both scales is the ear reference point (ERP). Thus the device needs no repositioning when changing the angles.



Device holder supplied by SPEAG

## **7. SAR Test Procedure**

### **7.1. Scanning Procedure**

The DASY5 installation includes predefined files with recommended procedures for measurements and validation. They are read-only document files and destined as fully defined but unmeasured masks. All test positions (head or body-worn) are tested with the same configuration of test steps differing only in the grid definition for the different test positions.

The “reference” and “drift” measurements are located at the beginning and end of the batch process. They measure the field drift at one single point in the liquid over the complete procedure. The indicated drift is mainly the variation of the DUT’s output power and should vary max.  $\pm 5\%$ .

The “surface check” measurement tests the optical surface detection system of the DASY5 system by repeatedly detecting the surface with the optical and mechanical surface detector and comparing the results. The output gives the detecting heights of both systems, the difference between the two systems and the standard deviation of the detection repeatability. Air bubbles or refraction in the liquid due to separation of the sugar-water mixture gives poor repeatability (above  $\pm 0.1\text{mm}$ ). To prevent wrong results tests are only executed when the liquid is free of air bubbles. The difference between the optical surface detection and the actual surface depends on the probe and is specified with each probe (It does not depend on the surface reflectivity or the probe angle to the surface within  $\pm 30^\circ$ .)

#### **Area Scan**

The Area Scan is used as a fast scan in two dimensions to find the area of high field values before running a detailed measurement around the hot spot. Before starting the area scan a grid spacing of 15 mm x 15 mm is set. During the scan the distance of the probe to the phantom remains unchanged. After finishing area scan, the field maxima within a range of 2 dB will be ascertained.

#### **Zoom Scan**

Zoom Scans are used to estimate the peak spatial SAR values within a cubic averaging volume containing 1 g and 10 g of simulated tissue. The default Zoom Scan is done by 7x7x5 points within a cube whose base is centered around the maxima found in the preceding area scan.

#### **Spatial Peak Detection**

The procedure for spatial peak SAR evaluation has been implemented and can determine values of masses of 1g and 10g, as well as for user-specific masses. The DASY5 system allows evaluations that combine measured data and robot positions, such as: • maximum search • extrapolation • boundary correction • peak search for averaged SAR. During a maximum search, global and local maxima searches are automatically performed in 2-D after each Area Scan measurement with at least 6 measurement points. It is based on the evaluation of the local SAR gradient calculated by the Quadratic Shepard’s method. The algorithm will find the global maximum and all local maxima within -2 dB of the global maxima for all SAR distributions.

Extrapolation routines are used to obtain SAR values between the lowest measurement points and the inner phantom surface. The extrapolation distance is determined by the surface detection distance and the probe sensor offset. Several measurements at different distances are necessary for the extrapolation. Extrapolation routines require at least 10 measurement points in 3-D space. They are used in the Zoom Scan to obtain SAR values between the lowest measurement points and the inner phantom surface. The routine uses the modified Quadratic Shepard’s method for extrapolation. For a grid using 7x7x5 measurement points with 5mm resolution amounting to 343 measurement points, the uncertainty of the extrapolation routines is less than 1% for 1g and 10g cubes.

A Z-axis scan measures the total SAR value at the x-and y-position of the maximum SAR value found during the cube 7x7x5 scan. The probe is moved away in z-direction from the bottom of the SAM phantom in 5mm steps.

## 7.2. Data Storage and Evaluation

### Data Storage

The DASY5 software stores the acquired data from the data acquisition electronics as raw data (in microvolt readings from the probe sensors), together with all necessary software parameters for the data evaluation (probe calibration data, liquid parameters and device frequency and modulation data) in measurement files with the extension ".DA4". The software evaluates the desired unit and format for output each time the data is visualized or exported. This allows verification of the complete software setup even after the measurement and allows correction of incorrect parameter settings. For example, if a measurement has been performed with a wrong crest factor parameter in the device setup, the parameter can be corrected afterwards and the data can be re-evaluated.

The measured data can be visualized or exported in different units or formats, depending on the selected probe type ([V/m], [A/m], [°C], [mW/g], [mW/cm²], [dBrel], etc.). Some of these units are not available in certain situations or show meaningless results, e.g., a SAR output in a lossless media will always be zero. Raw data can also be exported to perform the evaluation with other software packages.

### Data Evaluation

The SEMCAD software automatically executes the following procedures to calculate the field units from the microvolt readings at the probe connector. The parameters used in the evaluation are stored in the configuration modules of the software:

Probe parameters:	Sensitivity:	Normi, ai0, ai1, ai2
	Conversion factor:	ConvFi
	Diode compression point:	Dcpi
Device parameters:	Frequency:	f
	Crest factor:	cf
Media parameters:	Conductivity:	σ
	Density:	ρ

These parameters must be set correctly in the software. They can be found in the component documents or they can be imported into the software from the configuration files issued for the DASY5 components. In the direct measuring mode of the multimeter option, the parameters of the actual system setup are used. In the scan visualization and export modes, the parameters stored in the corresponding document files are used.

The first step of the evaluation is a linearization of the filtered input signal to account for the compression characteristics of the detector diode. The compensation depends on the input signal, the diode type and the DC-transmission factor from the diode to the evaluation electronics. If the exciting field is pulsed, the crest factor of the signal must be known to correctly compensate for peak power. The formula for each channel can be given as:

$$V_i = U_i + U_i^2 \cdot \frac{cf}{dcp_i}$$

Vi:	compensated signal of channel ( i = x, y, z )
Ui:	input signal of channel ( i = x, y, z )
cf:	crest factor of exciting field (DASY parameter)
dcp <sub>i</sub> :	diode compression point (DASY parameter)

From the compensated input signals the primary field data for each channel can be evaluated:

$$\mathbf{E} - \text{fieldprobes : } E_i = \sqrt{\frac{V_i}{Norm_i \cdot ConvF}}$$

$$\mathbf{H} - \text{fieldprobes : } H_i = \sqrt{V_i} \cdot \frac{a_{i0} + a_{i1}f + a_{i2}f^2}{f}$$

Vi:	compensated signal of channel ( i = x, y, z )
Normi:	sensor sensitivity of channel ( i = x, y, z ), [mV/(V/m)²] for E-field Probes
ConvF:	sensitivity enhancement in solution
aij:	sensor sensitivity factors for H-field probes
f:	carrier frequency [GHz]
Ei:	electric field strength of channel i in V/m
Hi:	magnetic field strength of channel i in A/m

The RSS value of the field components gives the total field strength (Hermitian magnitude):

$$E_{tot} = \sqrt{E_x^2 + E_y^2 + E_z^2}$$

The primary field data are used to calculate the derived field units.

$$SAR = E_{tot}^2 \cdot \frac{\sigma}{\rho \cdot 1'000}$$

SAR: local specific absorption rate in mW/g  
Etot: total field strength in V/m  
 $\sigma$ : conductivity in [mho/m] or [Siemens/m]  
 $\rho$ : equivalent tissue density in g/cm<sup>3</sup>

Note that the density is normally set to 1 (or 1.06), to account for actual brain density rather than the density of the simulation liquid.



## 8. Position of the wireless device in relation to the phantom


### 8.1. Head Position

The wireless device define two imaginary lines on the handset, the vertical centreline and the horizontal line, for the handset in vertical orientation as shown in Figures 5a and 5b.


**The vertical centreline** passes through two points on the front side of the handset: the midpoint of the width  $W_t$  of the handset at the level of the acoustic output (point A in Figures 5a and 5b), and the midpoint of the width  $W_b$  of the bottom of the handset (point B).

**The horizontal line** is perpendicular to the vertical centreline and passes through the centre of the acoustic output (see Figures 5a and 5b). The two lines intersect at point A.

Note that for many handsets, point A coincides with the centre of the acoustic output. However, the acoustic output may be located elsewhere on the horizontal line. Also note that the vertical centreline is not necessarily parallel to the front face of the handset (see Figure 5b), especially for clam-shell handsets, handsets with flip cover pieces, and other irregularly shaped handsets.

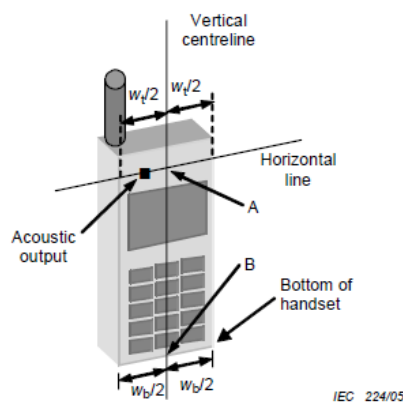


Figures 5a

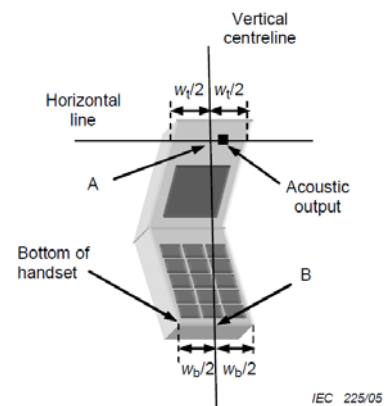

Figures 5b


$W_t$	Width of the handset at the level of the acoustic
$W_b$	Width of the bottom of the handset
A	Midpoint of the width $w_t$ of the handset at the level of the acoustic output
B	Midpoint of the width $w_b$ of the bottom of the handset

### Cheek position

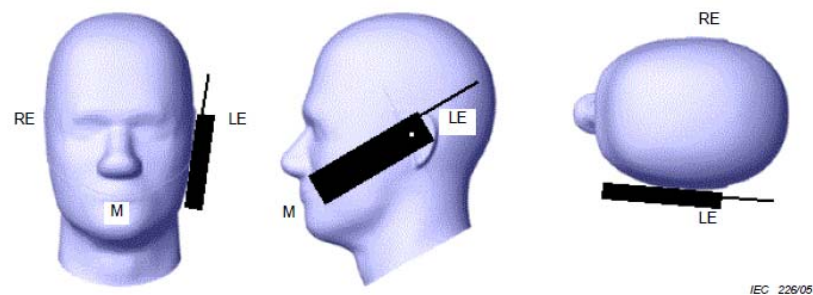

Picture 2 Cheek position of the wireless device on the left side of SAM

### Tilt position

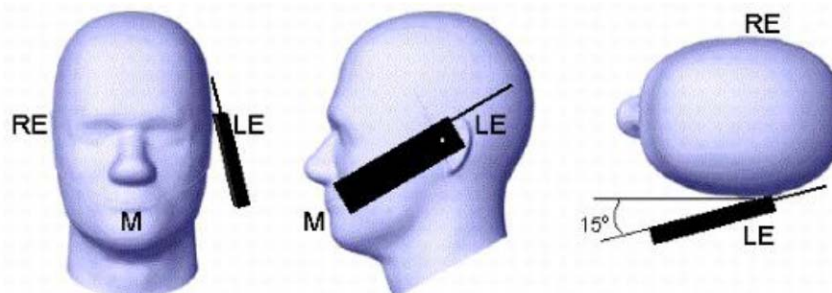


Picture 3 Tilt position of the wireless device on the left side of SAM

## 8.2. Body Position

Devices that support transmission while used with body-worn accessories must be tested for body-worn accessory SAR compliance, typically according to the smallest test separation distance required for the group of body-worn accessories with similar operating and exposure characteristics.


Devices that are designed to operate on the body of users using lanyards and straps or without requiring additional body-worn accessories must be tested for SAR compliance using a conservative minimum test separation distance  $\leq 5 \text{ mm}$  to support compliance

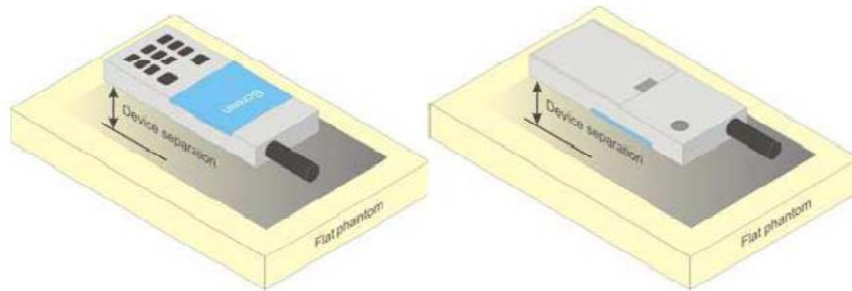

Picture 4 Test positions for body-worn devices

## 8.3. Hotspot Mode Exposure conditions

The hotspot mode and body-worn accessory SAR test configurations may overlap for handsets. When the same wireless mode transmission configurations for voice and data are required for SAR measurements, the more conservative configuration with a smaller separation distance should be tested for the overlapping SAR configurations. This typically applies to the back and front surfaces of a handset when SAR is required for both hotspot mode and body-worn accessory exposure conditions. Depending on the form factor and dimensions of a device, the test separation distance used for hotspot mode SAR measurement is either **10 mm** or that used in the body-worn accessory configuration, whichever is less for devices with dimension  $> 9 \text{ cm} \times 5 \text{ cm}$ . For smaller devices with dimensions  $\leq 9 \text{ cm} \times 5 \text{ cm}$  because of a greater potential for next to body use a test separation of  $\leq 5 \text{ mm}$  must be used.

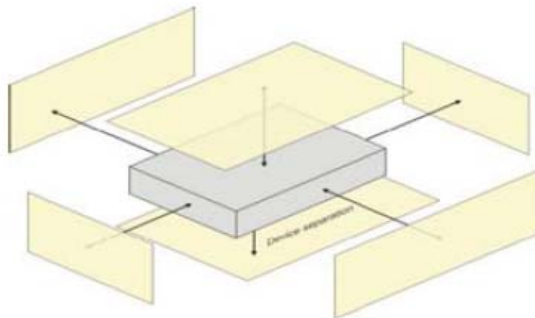

Picture 5 Test positions for Hotspot Mode

## 9. System Check

### 9.1. Tissue Dielectric Parameters

The liquid is consisted of water,salt,Glycol,Sugar,Preventol and Cellulose.The liquid has previously been proven to be suited for worst-case.The table 3 and table 4 show the detail solition.It's satisfying the latest tissue dielectric parameters requirements proposed by the KDB865664.

Frequency (MHz)	Water (%)	Sugar (%)	Cellulose (%)	Salt (%)	Preventol (%)	DGBE (%)	Conductivity ( $\sigma$ )	Permittivity ( $\epsilon_r$ )
For Head								
835	40.3	57.9	0.2	1.4	0.2	0	0.9	41.5
1800,1900,2000	55.2	0	0	0.3	0	44.5	1.4	40
2450	55	0	0	0	0	45	1.8	39.2
For Body								
835	50.8	48.2	0	0.9	0.1	0	0.97	55.2
1800.1900.2000	70.2	0	0	0.4	0	29.4	1.52	53.3
2450	68.6	0	0	0	0	31.4	1.95	52.7

Tissue dielectric parameters for head and body phantoms				
Target Frequency (MHz)	Head		Body	
	$\epsilon_r$	$\sigma$ (s/m)	$\epsilon_r$	$\sigma$ (s/m)
150	52.3	0.76	61.9	0.80
300	45.3	0.87	58.2	0.92
450	43.5	0.87	56.7	0.94
835	41.5	0.90	55.2	0.97
900	41.5	0.97	55.0	1.05
915	41.5	0.98	55.0	1.06
1450	40.5	1.20	54.0	1.30
1610	40.3	1.29	53.8	1.40
1800-2000	40.0	1.40	53.3	1.52
2450	39.2	1.80	52.7	1.95
3000	38.5	2.40	52.0	2.73
5800	35.3	5.27	48.2	6.00

**Check Result:**

Dielectric performance of Head tissue simulating liquid				
Frequency (MHz)	Description	DielectricParameters		Temp
		$\epsilon_r$	$\sigma(\text{s/m})$	$^{\circ}\text{C}$
835	Recommended result $\pm 5\%$ window	41.50 39.43 to 43.58	0.90 0.86 to 0.95	/
	Measurement value 2015-11-17	41.48	0.91	21
1900	Recommended result $\pm 5\%$ window	40.0 38.00 to 42.00	1.40 1.33 to 1.47	/
	Measurement value 2015-11-21	40.01	1.41	21
2450	Recommended result $\pm 5\%$ window	39.2 37.24 to 41.16	1.80 1.71 to 1.89	/
	Measurement value 2015-11-23	39.00	1.78	21


Dielectric performance of Body tissue simulating liquid				
Frequency (MHz)	Description	DielectricParameters		Temp
		$\epsilon_r$	$\sigma(\text{s/m})$	$^{\circ}\text{C}$
835	Recommended result $\pm 5\%$ window	55.2 52.44 to 57.96	0.97 0.92 to 1.02	/
	Measurement value 2015-11-18	55.10	0.97	21
1900	Recommended result $\pm 5\%$ window	53.3 50.64 to 55.97	1.52 1.44 to 1.60	/
	Measurement value 2015-11-22	53.21	1.51	21
2450	Recommended result $\pm 5\%$ window	52.7 50.07 to 55.34	1.95 1.85 to 2.05	/
	Measurement value 2015-11-24	52.65	1.93	21

## 9.2. SAR System Check

The purpose of the system check is to verify that the system operates within its specifications at the device test frequency. The system check is a simple check of repeatability to make sure that the system works correctly at the time of the compliance test;

System check results have to be equal or near the values determined during dipole calibration with the relevant liquids and test system ( $\pm 10\%$ ).

System check is performed regularly on all frequency bands where tests are performed with the DASY5 system.

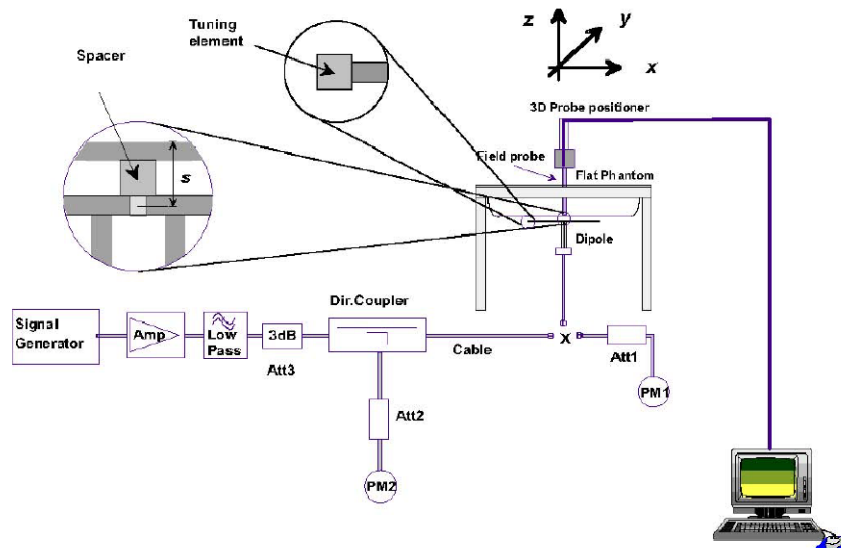

The output power on dipole port must be calibrated to 24 dBm (250mW) before dipole is connected.

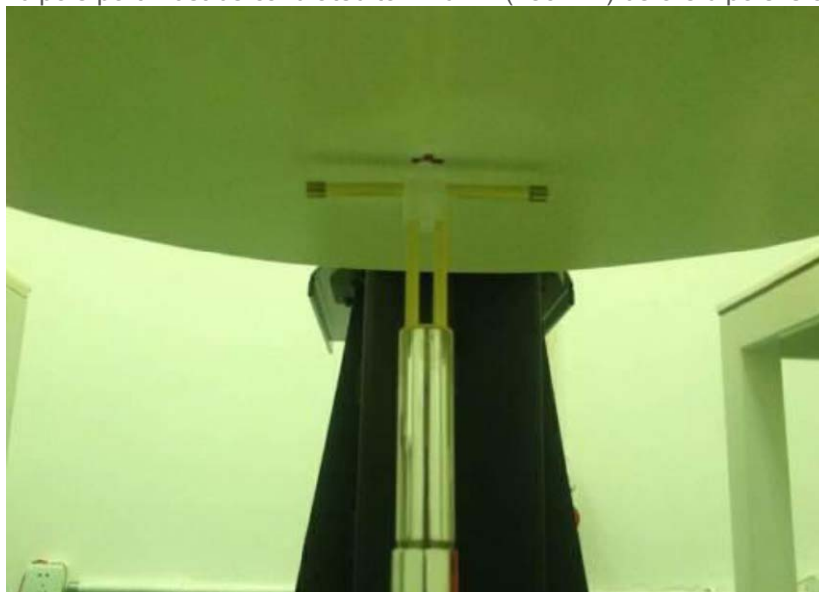


Photo of Dipole Setup

**Check Result:**

Head				
Frequency (MHz)	Description	SAR(W/kg)		Temp
		1g	10g	°C
835	Recommended result ±5% window	2.41 2.29 - 2.53	1.57 1.49 - 1.65	/
	Measurement value 2015-11-17	2.37	1.56	21
1900	Recommended result ±5% window	9.71 9.22 - 10.20	5.08 4.83 - 5.33	/
	Measurement value 2015-11-21	9.66	4.98	21
2450	Recommended result ±5% window	13.1 11.79 - 14.41	6.17 5.56 - 6.78	/
	Measurement value 2015-11-23	12.76	5.93	21

Body				
Frequency (MHz)	Description	SAR(W/kg)		Temp
		1g	10g	°C
835	Recommended result ±5% window	2.47 2.35 - 2.59	1.64 1.55 - 1.71	/
	Measurement value 2015-11-18	2.45	1.63	21
1900	Recommended result ±5% window	9.98 9.48 - 10.48	5.26 5.00 - 5.52	/
	Measurement value 2015-11-22	9.91	5.23	21
2450	Recommended result ±5% window	13.1 11.79 - 14.41	6.11 5.50 - 6.72	/
	Measurement value 2015-11-24	12.53	6.09	21

Note:

1. the graph results see follow.
2. Recommended Values used derive from the calibration certificate and 250 mW is used as feeding power to the calibrated dipole.

**System Performance Check at 835 MHz Head**

DUT: Dipole 835 MHz; Type: D835V2; Serial: 4d134

Communication System: CW; Frequency: 835 MHz; Duty Cycle: 1:1

Medium parameters used (interpolated):  $f = 835$  MHz;  $\sigma = 0.91$  S/m;  $\epsilon_r = 41.48$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Phantom section: Flat Section

**DASY5 Configuration:**

- Probe: ES3DV3 - SN3292; ConvF(6.23, 6.23, 6.23); Calibrated: 15/08/2015;
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1315; Calibrated: 22/07/2015
- Phantom: SAM 1; Type: SAM;
- Measurement SW: DASY52, Version 52.8 (2); SEMCAD X Version 14.6.6 (6824)

**Area Scan (61x91x1):** Measurement grid:  $dx=15.00$  mm,  $dy=15.00$  mm

Maximum value of SAR (interpolated) = 2.58 mW/g


**Zoom Scan (7x7x7)/Cube 0:** Measurement grid:  $dx=5$ mm,  $dy=5$ mm,  $dz=5$ mm

Reference Value = 52.994 V/m; Power Drift = 0.08 dB

Peak SAR (extrapolated) = 3.542 W/kg

**SAR(1 g) = 2.37 mW/g; SAR(10 g) = 1.56 mW/g**

Maximum value of SAR (measured) = 2.59 mW/g

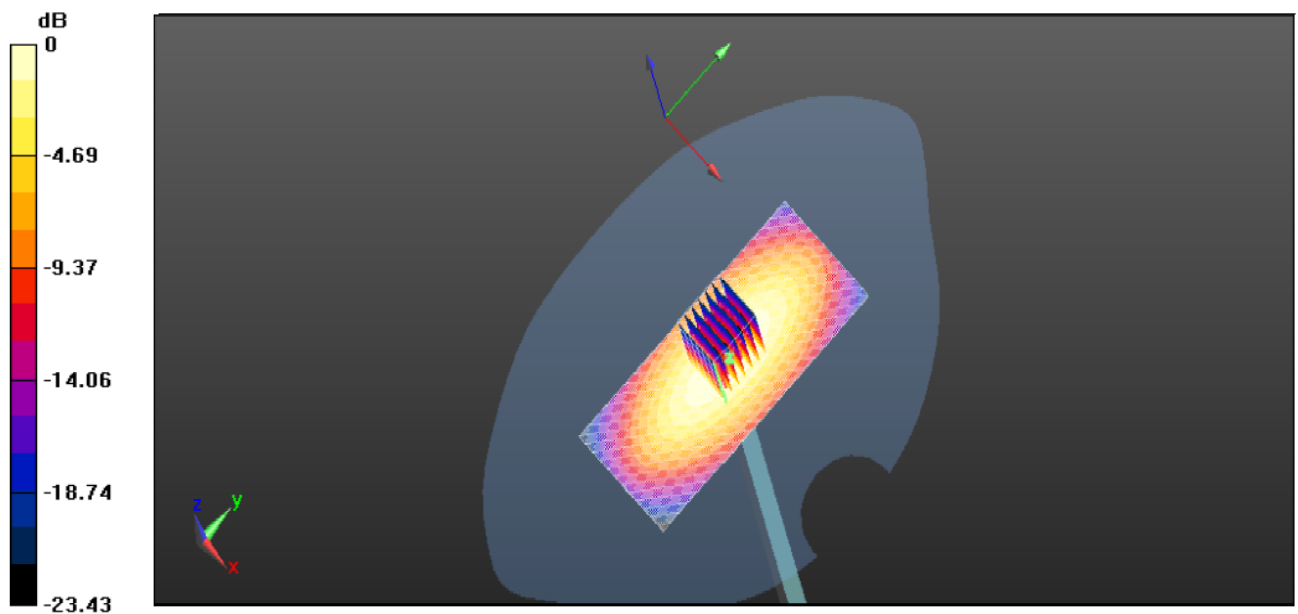

System Performance Check 835MHz Head 250mW

**System Performance Check at 835 MHz Body**

DUT: Dipole 835 MHz; Type: D835V2; Serial: 4d134

Communication System: CW; Frequency: 835 MHz; Duty Cycle: 1:1

Medium parameters used (interpolated):  $f = 835$  MHz;  $\sigma = 0.97$  S/m;  $\epsilon_r = 55.1$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Phantom section: Flat Section

**DASY5 Configuration:**

- Probe: ES3DV3 - SN3292; ConvF(6.11, 6.11, 6.11); Calibrated: 15/08/2015;
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1315; Calibrated: 22/07/2015
- Phantom: SAM 1; Type: SAM;
- Measurement SW: DASY52, Version 52.8 (2); SEMCAD X Version 14.6.6 (6824)

**Area Scan (61x91x1):** Measurement grid: dx=15.00 mm, dy=15.00 mm

Maximum value of SAR (interpolated) = 2.45 mW/g


**Zoom Scan (7x7x7)/Cube 0:** Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 46.528 V/m; Power Drift = -0.02 dB

Peak SAR (extrapolated) = 2.562 W/kg

**SAR(1 g) = 2.45 mW/g; SAR(10 g) = 1.63 mW/g**

Maximum value of SAR (measured) = 2.46 mW/g

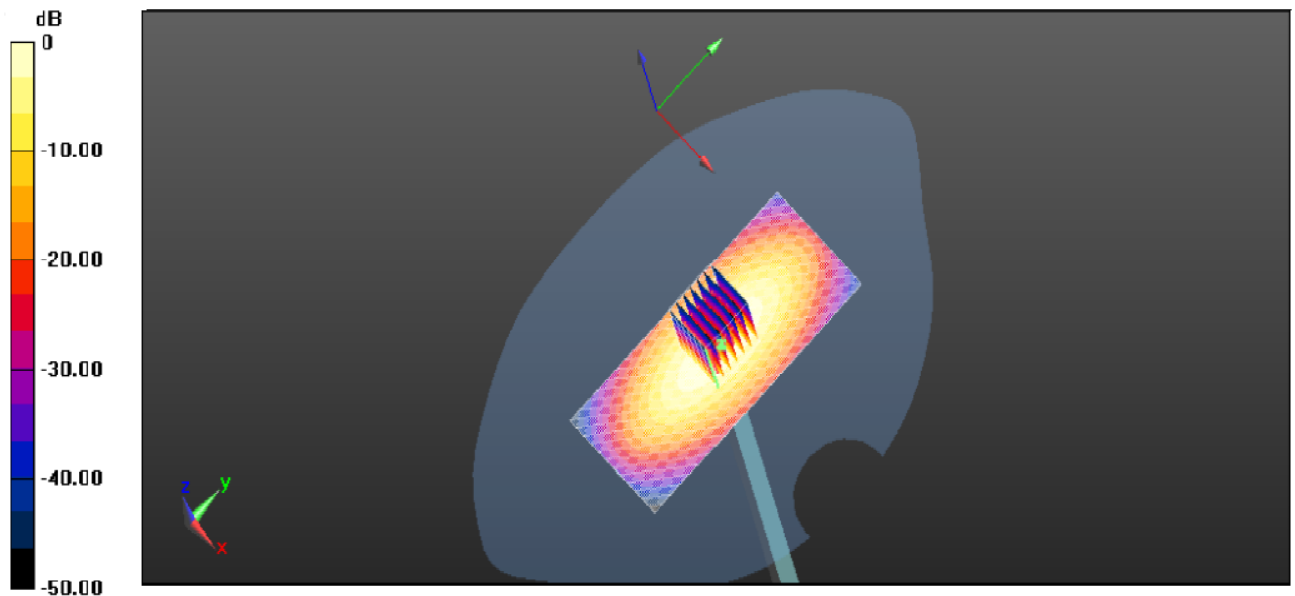

System Performance Check 835MHz Body 250mW



**System Performance Check at 1900 MHz Head**

DUT: Dipole 1900 MHz; Type: D1900V2; Serial: 5d150

Communication System: CW; Frequency: 1900 MHz; Duty Cycle: 1:1

Medium parameters used (interpolated):  $f = 1900$  MHz;  $\sigma = 1.41$  S/m;  $\epsilon_r = 40.01$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Phantom section: Flat Section

**DASY5 Configuration:**

Probe: ES3DV3 - SN3292; ConvF(5.03,5.03,5.03); Calibrated: 15/08/2015;

Sensor-Surface: 3mm (Mechanical Surface Detection)

Electronics: DAE4 Sn1315; Calibrated: 22/07/2015

Phantom: SAM 1; Type: SAM;

Measurement SW: DASY52, Version 52.8 (1); SEMCAD X Version 14.6.5 (6469)

**Area Scan (61x91x1):** Measurement grid:  $dx=15.00$  mm,  $dy=15.00$  mm

Maximum value of SAR (interpolated) = 10.65 W/kg


**Zoom Scan (7x7x7)/Cube 0:** Measurement grid:  $dx=5$ mm,  $dy=5$ mm,  $dz=5$ mm

Reference Value = 94.818 V/m; Power Drift = -0.06 dB

Peak SAR (extrapolated) = 12.352 W/kg

**SAR(1 g) = 9.66 W/kg; SAR(10 g) = 4.98 W/kg**

Maximum value of SAR (measured) = 12.43 W/kg

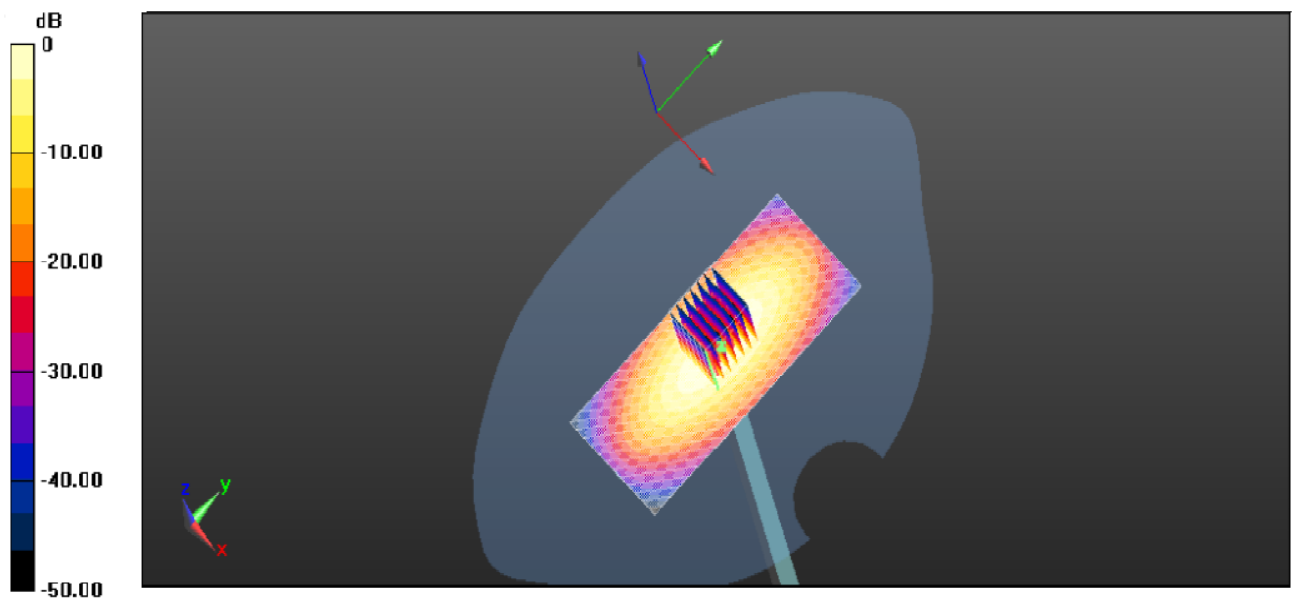

System Performance Check 1900MHz Head 250mW

**System Performance Check at 1900 MHz Body**

DUT: Dipole 1900 MHz; Type: D1900V2; Serial: 5d150

Communication System: CW; Frequency: 1900 MHz; Duty Cycle: 1:1

Medium parameters used (interpolated):  $f = 1900$  MHz;  $\sigma = 1.51$  S/m;  $\epsilon_r = 53.21$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Phantom section: Flat Section

**DASY5 Configuration:**

Probe: ES3DV3 - SN3292; ConvF(4.66, 4.66, 4.66); Calibrated: 15/08/2015;

Sensor-Surface: 3mm (Mechanical Surface Detection)

Electronics: DAE4 Sn1315; Calibrated: 22/07/2015

Phantom: SAM 1; Type: SAM;

Measurement SW: DASY52, Version 52.8 (1); SEMCAD X Version 14.6.5 (6469)

**Area Scan (61x91x1):** Measurement grid:  $dx=15.00$  mm,  $dy=15.00$  mm

Maximum value of SAR (interpolated) = 11.46 mW/g


**Zoom Scan (7x7x7)/Cube 0:** Measurement grid:  $dx=5$ mm,  $dy=5$ mm,  $dz=5$ mm

Reference Value = 83.816 V/m; Power Drift = -0.07 dB

Peak SAR (extrapolated) = 16.826 W/kg

**SAR(1 g) = 9.91 mW/g; SAR(10 g) = 5.23 mW/g**

Maximum value of SAR (measured) = 16.34 mW/g

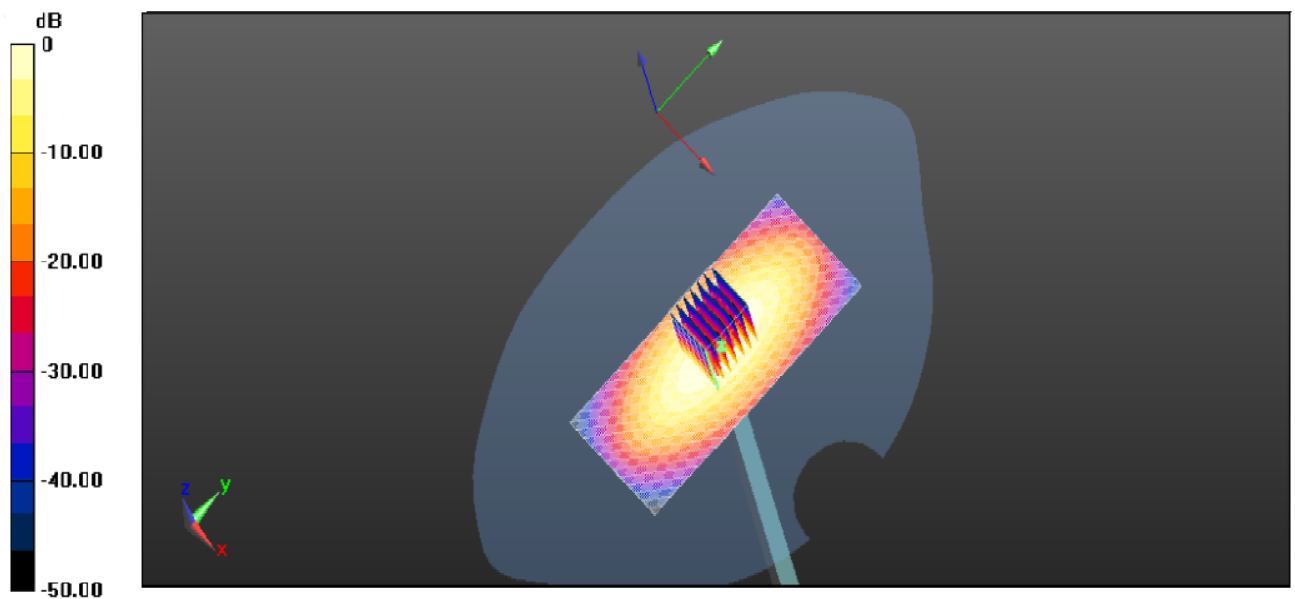

System Performance Check 1900MHz Body250mW

**System Performance Check at 2450 MHz Head**

DUT: Dipole 2450 MHz; Type: D2450V2; Serial: 884

Communication System: CW; Frequency: 2450 MHz; Duty Cycle: 1:1

Medium parameters used (interpolated):  $f = 2450$  MHz;  $\sigma = 1.78$  S/m;  $\epsilon_r = 39.00$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Phantom section: Flat Section

**DASY5 Configuration:**

Probe: ES3DV3 - SN3292; ConvF(4.43, 4.43, 4.43); Calibrated: 15/08/2015;

Sensor-Surface: 3mm (Mechanical Surface Detection)

Electronics: DAE4 Sn1315; Calibrated: 22/07/2015

Phantom: SAM 1; Type: SAM;

Measurement SW: DASY52, Version 52.8 (1); SEMCAD X Version 14.6.5 (6469)

**Area Scan (61x91x1):** Measurement grid:  $dx=10.00$  mm,  $dy=10.00$  mm

Maximum value of SAR (interpolated) = 14.9 mW/g


**Zoom Scan (7x7x7)/Cube 0:** Measurement grid:  $dx=5$  mm,  $dy=5$  mm,  $dz=5$  mm

Reference Value = 97.714 V/m; Power Drift = -0.05 dB

Peak SAR (extrapolated) = 26.08 mW/g

**SAR(1 g) = 12.76 mW/g; SAR(10 g) = 5.93 mW/g**

Maximum value of SAR (measured) = 14.8 mW/g

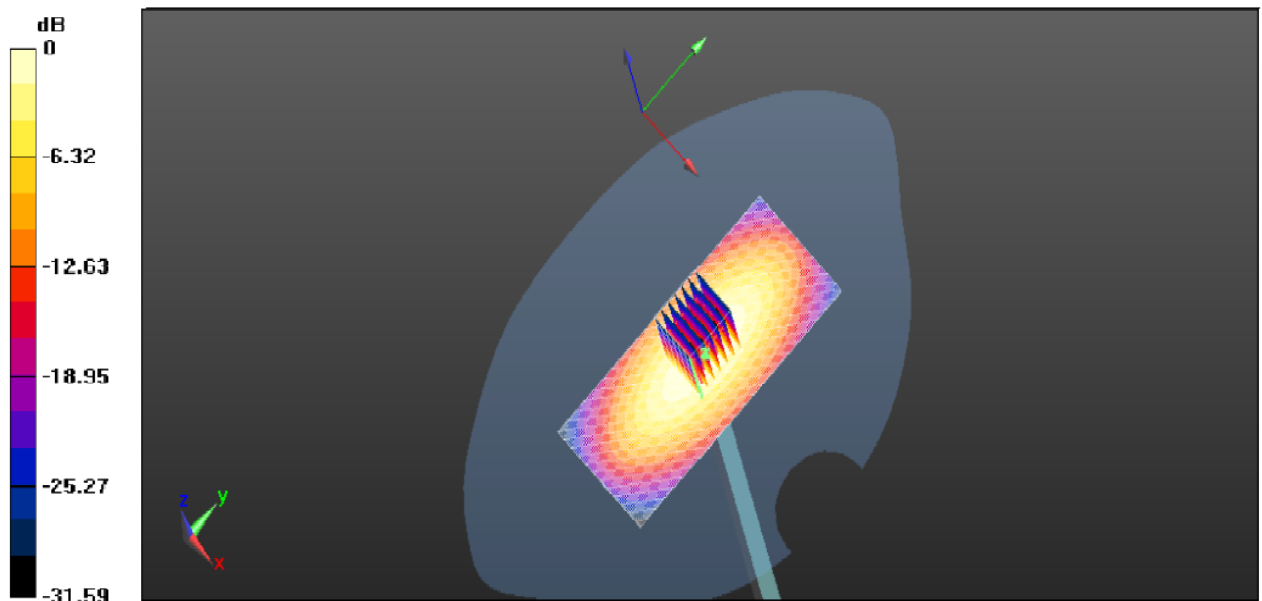

System Performance Check 2450MHz Head250mW

**System Performance Check at 2450 MHz Body**

DUT: Dipole 2450 MHz; Type: D2450V2; Serial: 884

Communication System: CW; Frequency: 2450 MHz; Duty Cycle: 1:1

Medium parameters used (interpolated):  $f = 2450$  MHz;  $\sigma = 1.93$  S/m;  $\epsilon_r = 52.65$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Phantom section: Flat Section

**DASY5 Configuration:**

Probe: ES3DV3 - SN3292; ConvF(4.23, 4.23, 4.23); Calibrated: 15/08/2015;

Sensor-Surface: 3mm (Mechanical Surface Detection)

Electronics: DAE4 Sn1315; Calibrated: 22/07/2015

Phantom: SAM 1; Type: SAM;

Measurement SW: DASY52, Version 52.8 (1); SEMCAD X Version 14.6.5 (6469)

**Area Scan (61x91x1):** Measurement grid:  $dx=10.00$  mm,  $dy=10.00$  mm

Maximum value of SAR (interpolated) = 15.15 mW/g


**Zoom Scan (7x7x7)/Cube 0:** Measurement grid:  $dx=5$ mm,  $dy=5$ mm,  $dz=5$ mm

Reference Value = 97.986 V/m; Power Drift = -0.08 dB

Peak SAR (extrapolated) = 18.08 mW/g

**SAR(1 g) = 12.53 mW/g; SAR(10 g) = 6.09 mW/g**

Maximum value of SAR (measured) = 18.18 mW/g

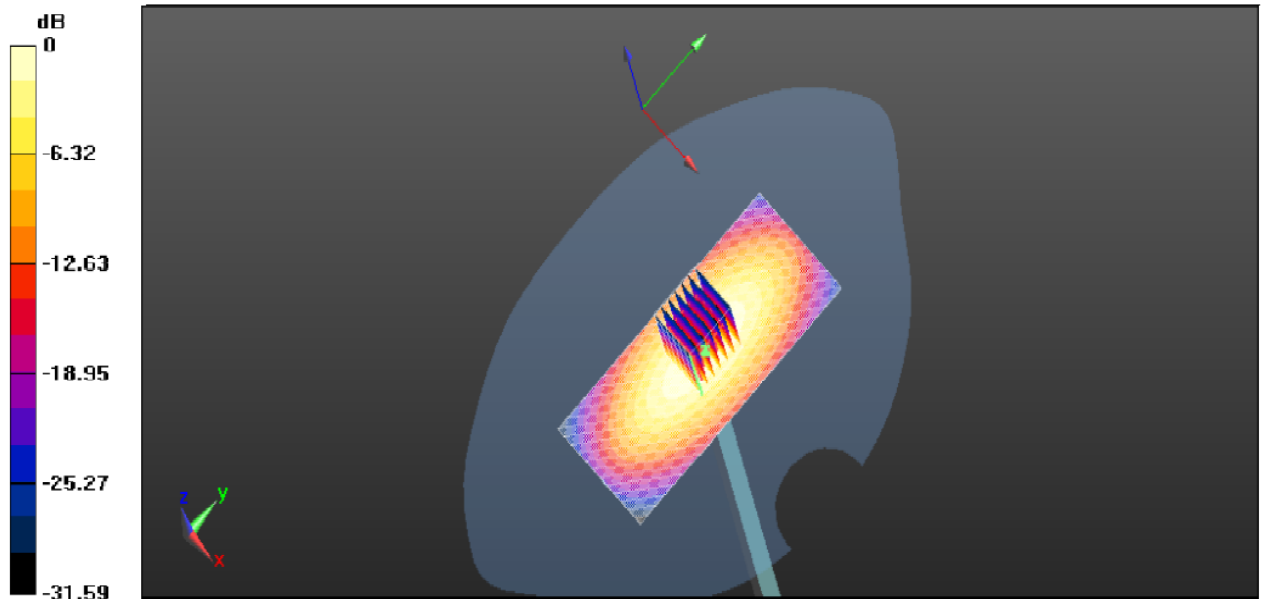

System Performance Check 2450MHz Body250mW

## 10. SAR Exposure Limits

SAR assessments have been made in line with the requirements of ANSI/IEEE C95.1-1992

Type Exposure	Limit (W/kg)	
	General Population / Uncontrolled Exposure Environment	Occupational / Controlled Exposure Environment
Spatial Average SAR (whole body)	0.08	0.4
Spatial Peak SAR (1g cube tissue for head and trunk)	1.60	8.0
Spatial Peak SAR (10g for limb)	4.0	20.0

Population/Uncontrolled Environments: are defined as locations where there is the exposure of individual who have no knowledge or control of their exposure.

Occupational/Controlled Environments: are defined as locations where there is exposure that may be incurred by people who are aware of the potential for exposure (i.e. as a result of employment or occupation).

## 11. Conducted Power Measurement Results

### GSM Conducted Power

1. Per KDB 447498 D01v0502, the maximum output power channel is used for SAR testing and further SAR test reduction
2. Per KDB 941225 D01v03r01, considering the possibility of e.g. 3rd party VoIP operation for Head and Body-worn SAR test reduction for GSM and GPRS modes is determined by the source-base time-averaged output power including tune-up tolerance. The mode with highest specified time-averaged output power should be tested for SAR compliance in the applicable exposure conditions. For modes with the same specified maximum output power and tolerance, the higher number time-slot configuration should be tested. Therefore, the EUT was set in GPRS (4Tx slots) for GSM850 and GPRS (4Tx slots) for PCS1900.
3. Per KDB941225 D01v03, for hotspot SAR test reduction for GPRS modes is determined by the source-based time-averaged output power including tune-up tolerance, For modes with the same specified maximum output power and tolerance, the higher number time-slot configuration should be tested. Therefore, the EUT was set in GPRS (4Tx slots) for GSM850 and GPRS (4Tx slots) for PCS1900.

Mode: GSM850		Conducted Power (dBm)			Division Factors	Averager Power (dBm)		
		CH128	CH190	CH251		CH128	CH190	CH251
		824.2MHz	836.6MHz	848.8MHz		824.2MHz	836.6MHz	848.8MHz
GSM		32.89	33.05	33.1	-9.03	23.86	24.02	24.07
GPRS (GMSK)	1TXslot	32.86	33.03	33.09	-9.03	23.83	24.00	24.06
	2TXslots	31.18	31.23	31.25	-6.02	25.16	25.21	25.23
	3TXslots	30.19	30.32	30.31	-4.26	25.93	26.06	26.05
	4TXslots	29.14	29.15	29.20	-3.01	26.13	26.14	26.19
EGPRS (GMSK)	1TXslot	32.85	33.02	33.07	-9.03	23.82	23.99	24.04
	2TXslots	31.07	31.22	31.27	-6.02	25.05	25.20	25.25
	3TXslots	30.15	30.30	30.31	-4.26	25.89	26.04	26.05
	4TXslots	29.16	29.12	29.17	-3.01	26.15	26.11	26.16
Mode: PCS1900		Conducted Power (dBm)			Division Factors	Averager Power (dBm)		
		CH512	CH661	CH810		CH512	CH661	CH810
		1850.2MHz	1880.0MHz	1909.8MHz		1850.2MHz	1880.0MHz	1909.8MHz
GSM		30.11	30.01	29.95	-9.03	21.08	20.98	20.92
GPRS (GMSK)	1TXslot	30.08	29.99	29.94	-9.03	21.05	20.96	20.91
	2TXslots	28.33	28.21	28.09	-6.02	22.31	22.19	22.07
	3TXslots	26.83	26.75	26.70	-4.26	22.57	22.49	22.44
	4TXslots	26.14	26.03	25.96	-3.01	23.13	23.02	22.95
EGPRS (GMSK)	1TXslot	30.05	29.96	29.92	-9.03	21.02	20.93	20.89
	2TXslots	28.31	28.16	28.06	-6.02	22.29	22.14	22.04
	3TXslots	26.80	26.71	26.66	-4.26	22.54	22.45	22.40
	4TXslots	26.13	26.01	25.96	-3.01	23.12	23.00	22.95

Note:

1) Division Factors

To average the power, the division factor is as follows:

1TX-slot = 1 transmit time slot out of 8 time slots=> conducted power divided by (8/1) => -9.03dB

2TX-slots = 2 transmit time slots out of 8 time slots=> conducted power divided by (8/2) => -6.02dB

3TX-slots = 3 transmit time slots out of 8 time slots=> conducted power divided by (8/3) => -4.26dB

4TX-slots = 4 transmit time slots out of 8 time slots=> conducted power divided by (8/4) => -3.01dB

**WCDMA Conducted Power**

1. The following tests were conducted according to the test requirements outlines in 3GPP TS34.121 specification.
2. The procedures in KDB 941225 D01 are applied for 3GPP Rel. 6 HSPA to configure the device in the required sub-test mode to determine SAR test exclusion

A summary of these settings are illustrated below:

**HSDPA Setup Configuration:**

- a) The EUT was connected to base station RS CMU200 referred to the setup configuration
- b) The RF path losses were compensated into the measurements
- c) A call was established between EUT and base station with following setting:
  - i. Set Gain Factors ( $\beta_c$  and  $\beta_d$ ) and parameters were set according to each specific sub-test in the following table, C10.1.4, Quoted from the TS 34.121
  - ii. Set RMC 12.2Kbps + HSDPA mode
  - iii. Set Cell Power=-86dBm
  - iv. Set HS-DSCH Configuration Type to FRC (H-set 1, QPSK)
  - v. Select HSDPA uplink parameters
  - vi. Set Delta ACK, Delta NACK and Delta CQI=8
  - vii. Set Ack-Nack repetition Factor to 3
  - viii. Set CQI Feedback Cycle (K) to 4ms
  - ix. Set CQI repetition factor to 2
  - x. Power ctrl mode= all up bits
- d) The transmitter maximum output power was recorded.

**Table C.10.1.4:  $\beta$  values for transmitter characteristics tests with HS-DPCCH**

Sub-test	$\beta_c$	$\beta_d$	$\beta_d$ (SF)	$\beta_c/\beta_d$	$\beta_{hs}$ (Note 1, Note 2)	CM (dB) (Note 3)	MPR (dB) (Note 3)
1	2/15	15/15	64	2/15	4/15	0.0	0.0
2	12/15 (Note 4)	15/15 (Note 4)	64	12/15 (Note 4)	24/15	1.0	0.0
3	15/15	8/15	64	15/8	30/15	1.5	0.5
4	15/15	4/15	64	15/4	30/15	1.5	0.5
<p>Note 1: <math>\Delta_{ACK}</math>, <math>\Delta_{NACK}</math> and <math>\Delta_{CQI} = 30/15</math> with <math>\beta_{hs} = 30/15 * \beta_c</math>.</p> <p>Note 2: For the HS-DPCCH power mask requirement test in clause 5.2C, 5.7A, and the Error Vector Magnitude (EVM) with HS-DPCCH test in clause 5.13.1A, and HSDPA EVM with phase discontinuity in clause 5.13.1AA, <math>\Delta_{ACK}</math> and <math>\Delta_{NACK} = 30/15</math> with <math>\beta_{hs} = 30/15 * \beta_c</math>, and <math>\Delta_{CQI} = 24/15</math> with <math>\beta_{hs} = 24/15 * \beta_c</math>.</p> <p>Note 3: CM = 1 for <math>\beta_c/\beta_d = 12/15</math>, <math>\beta_{hs}/\beta_c = 24/15</math>. For all other combinations of DPCCH, DPCH and HS-DPCCH the MPR is based on the relative CM difference. This is applicable for only UEs that support HSDPA in release 6 and later releases.</p> <p>Note 4: For subtest 2 the <math>\beta_c/\beta_d</math> ratio of 12/15 for the TFC during the measurement period (TF1, TF0) is achieved by setting the signalled gain factors for the reference TFC (TF1, TF1) to <math>\beta_c = 11/15</math> and <math>\beta_d = 15/15</math>.</p>							

Setup Configuration

**HSUPA Setup Configuration:**

- a) The EUT was connected to base station RS CMU200 referred to the setup configuration
- b) The RF path losses were compensated into the measurements
- c) A call was established between EUT and base station with following setting:
  - i. Call configs = 5.2b, 5.9b, 5.10b, and 5.13.2B with QPSK
  - ii. Set Gain Factors ( $\beta_c$  and  $\beta_d$ ) and parameters (AG index) were set according to each specific sub-test in the following table, C11.1.3, Quoted from the TS 34.121
  - iii. Set Cell Power=-86dBm
  - iv. Set channel type= 12.2Kbps + HSPA mode
  - v. Set UE Target power
  - vi. Set Ctrl mode=Alternating bits
  - vii. Set and observe the E-TFCI
  - viii. Confirm that E-TFCI is equal the target E-TFCI of 75 for Sub-test 1, and other subtest's E-TFCI
- d) The transmitter maximum output power was recorded.

**Table C.11.1.3:  $\beta$  values for transmitter characteristics tests with HS-DPCCH and E-DCH**

Sub-test	$\beta_c$	$\beta_d$	$\beta_d$ (SF)	$\beta_c/\beta_d$	$\beta_{HS}$ (Note 1)	$\beta_{EC}$	$\beta_{ed}$ (Note 5) (Note 6)	$\beta_{ed}$ (SF)	$\beta_{ed}$ (Codes)	CM (dB) (Note 2)	MPR (dB) (Note 2)	AG Index (Note 6)	E-TFCI
1	11/15 (Note 3)	15/15 (Note 3)	64	11/15 (Note 3)	22/15	209/25	1309/225	4	1	1.0	0.0	20	75
2	6/15	15/15	64	6/15	12/15	12/15	94/75	4	1	3.0	2.0	12	67
3	15/15	9/15	64	15/9	30/15	30/15	$\beta_{ed1}$ : 47/15 $\beta_{ed2}$ : 47/15	4 4	2	2.0	1.0	15	92
4	2/15	15/15	64	2/15	4/15	2/15	56/75	4	1	3.0	2.0	17	71
5	15/15 (Note 4)	15/15 (Note 4)	64	15/15 (Note 4)	30/15	24/15	134/15	4	1	1.0	0.0	21	81

Note 1:  $\Delta_{ACK}$ ,  $\Delta_{NACK}$  and  $\Delta_{CQI} = 30/15$  with  $\beta_{HS} = 30/15 * \beta_c$ .

Note 2: CM = 1 for  $\beta_c/\beta_d = 12/15$ ,  $\beta_{HS}/\beta_c = 24/15$ . For all other combinations of DPDCH, DPCCH, HS-DPCCH, E-DPDCH and E-DPCCH the MPR is based on the relative CM difference.

Note 3: For subtest 1 the  $\beta_c/\beta_d$  ratio of 11/15 for the TFC during the measurement period (TF1, TF0) is achieved by setting the signalled gain factors for the reference TFC (TF1, TF1) to  $\beta_c = 10/15$  and  $\beta_d = 15/15$ .

Note 4: For subtest 5 the  $\beta_c/\beta_d$  ratio of 15/15 for the TFC during the measurement period (TF1, TF0) is achieved by setting the signalled gain factors for the reference TFC (TF1, TF1) to  $\beta_c = 14/15$  and  $\beta_d = 15/15$ .

Note 5: In case of testing by UE using E-DPDCH Physical Layer category 1, Sub-test 3 is omitted according to TS25.306 Table 5.1g.

Note 6:  $\beta_{ed}$  can not be set directly, it is set by Absolute Grant Value.

**Setup Configuration**



**General Note:**

1. Per KDB 941225 D01v03r01, SAR for Head / Hotspot / Body-worn Exposure is measured using a 12.2Kbps RMC with TPC bit configured to all 1s
2. Per KDB 941225 D01v03r01 RMC12.2Kbps setting is used to evaluate SAR. If the maximum output power and Tune-up tolerance specified for production units in HSDPA/HSUPA is  $\leq 1/4$ dB higher than RMC 12.2Kbps or when the highest reported SAR of the RMC12.2Kbps is scaled by the ratio of specified maximum output power and tune-up tolerance of HSDPA / HSUPA to RMC 12.2Kbps and the adjusted SAR is  $\leq 1.2$  W/kg, SAR measurement is not required for HSDPA / HSUPA.

Mode		WCDMA Band V			WCDMA Band II		
		Conducted Power (dBm)			Conducted Power (dBm)		
		CH4132	CH4183	CH4233	CH9262	CH9400	CH9538
		826.4	836.6	846.6	1852.4	1880.0	1907.6
AMR 12.2K		22.43	22.32	22.28	20.90	21.00	20.96
RMC 12.2K		22.45	22.36	22.29	20.92	21.03	20.97
HSDPA	Subtest-1	20.62	20.52	20.49	19.22	19.31	19.27
	Subtest-2	20.45	20.35	20.32	19.06	19.15	19.11
	Subtest-3	20.46	20.37	20.31	19.06	19.16	19.10
	Subtest-4	20.19	20.09	20.05	18.81	18.90	18.86
HSUPA	Subtest-1	20.07	19.98	19.94	18.71	18.80	18.76
	Subtest-2	19.92	19.82	19.78	18.56	18.65	18.61
	Subtest-3	19.83	19.73	19.70	18.48	18.56	18.53
	Subtest-4	19.77	19.67	19.64	18.42	18.51	18.47
	Subtest-5	20.43	20.33	20.30	19.04	19.13	19.09

**WLAN Conducted Power**

For 2.4GHz WLAN SAR testing, highest average RF output power channel for the lowest data rate for 802.11b were for SAR evaluation. 802.11g/n were not investigated since the average putput powers over all channels and data rates were not more than 0.25dB higher than the tested channel in the lowest data rate of 802.11b mode.

WIFI					
Mode	Channel	Frequency (MHz)	Conducted Peak Power (dBm)	Conducted Average Power (dBm)	Data rate
802.11b	01	2412	16.34	13.07	1 Mbps
	06	2437	16.23	12.98	1 Mbps
	11	2462	16.15	12.92	1 Mbps
802.11g	01	2412	15.54	11.41	6 Mbps
	06	2437	15.43	11.33	6 Mbps
	11	2462	15.32	11.24	6 Mbps
802.11n(H20)	01	2412	14.88	10.13	6.5 Mbps
	06	2437	14.44	9.83	6.5 Mbps
	11	2462	14.58	9.93	6.5 Mbps
802.11n(H40)	03	2422	13.47	8.39	13.5 Mbps
	06	2437	13.65	8.50	13.5 Mbps
	09	2452	13.56	8.45	13.5 Mbps

*Note:*

- 1) The output power was test all data rate and recorded worst case at recorded data rate.
- 2) When SAR measurement is required for 2.4 GHz 802.11g/n OFDM configurations, the measurement and test reduction procedures for OFDM are applied. SAR is not required for the following 2.4 GHz OFDM conditions.
  - a) When KDB Publication 447498 D01 SAR test exclusion applies to the OFDM configuration.
  - b) When the highest *reported* SAR for DSSS is adjusted by the ratio of OFDM to DSSS specified maximum output power and the adjusted SAR is  $\leq 1.2$  W/kg.

**Bluetooth Conducted Power****General note:**

Per KDB 447498 D01v05r02, the 1-g and 10-g SAR test exclusion thresholds for 100MHz to 6GHz at test separation distances  $\leq 50\text{mm}$  are determined by:

$$[(\text{max. Power of channel, including tune-up tolerance, mW}) / (\text{min. test separation distance, mm})] * [\sqrt{f}(\text{GHz})]$$
$$\leq 3.0 \text{ for 1-g SAR and } \leq 7.5 \text{ for 10-g extremity SAR}$$

Bluetooth			
Mode	Channel	Frequency (MHz)	Conducted power (dBm)
GFSK	00	2402	3.51
	39	2441	4.04
	78	2480	3.98
$\pi/4$ QPSK	00	2402	2.88
	39	2441	3.28
	78	2480	3.22
8DPSK	00	2402	2.86
	39	2441	3.23
	78	2480	3.09

Per KDB 447498 D01v05r02, when the minimum test separation distance is  $< 5\text{mm}$ , a distance of 5mm is applied to determine SAR test exclusion. The test exclusion threshold is 0.6 which is  $\leq 3$ , SAR testing is not required.

**12. Maximum Tune-up Limit**


Mode	Burst Average Power (dBm)	
	GSM850	PCS1900
GSM (GMSK, 1Tx Slot)	33.50	30.50
GPRS (GMSK, 1Tx Slot)	33.50	30.50
GPRS (GMSK, 2Tx Slot)	32.00	29.00
GPRS (GMSK, 3Tx Slot)	31.00	27.00
GPRS (GMSK, 4Tx Slot)	30.00	27.00

Mode	Burst Average Power (dBm)	
	WCDMA Band V	WCDMA Band II
AMR 12.2Kbps	22.50	21.50
RMC 12.2Kbps	22.50	21.50
HSDPA Subtest-1	21.00	20.00
HSDPA Subtest-2	21.00	20.00
HSDPA Subtest-3	21.00	19.50
HSDPA Subtest-4	21.00	19.50
HSUPA Subtest-1	20.50	19.50
HSUPA Subtest-2	20.50	19.50
HSUPA Subtest-3	20.50	19.50
HSUPA Subtest-4	20.50	19.50
HSUPA Subtest-5	20.50	19.50

WLAN	
Mode	Burst Average Power (dBm)
802.11b	13.50
802.11g	12.00
802.11n(HT20)	10.50
802.11n(HT40)	9.00

Mode	Conducted Peak Power (dBm)
Bluetooth V3.0+EDR	5.00

### 13. Antenna Location

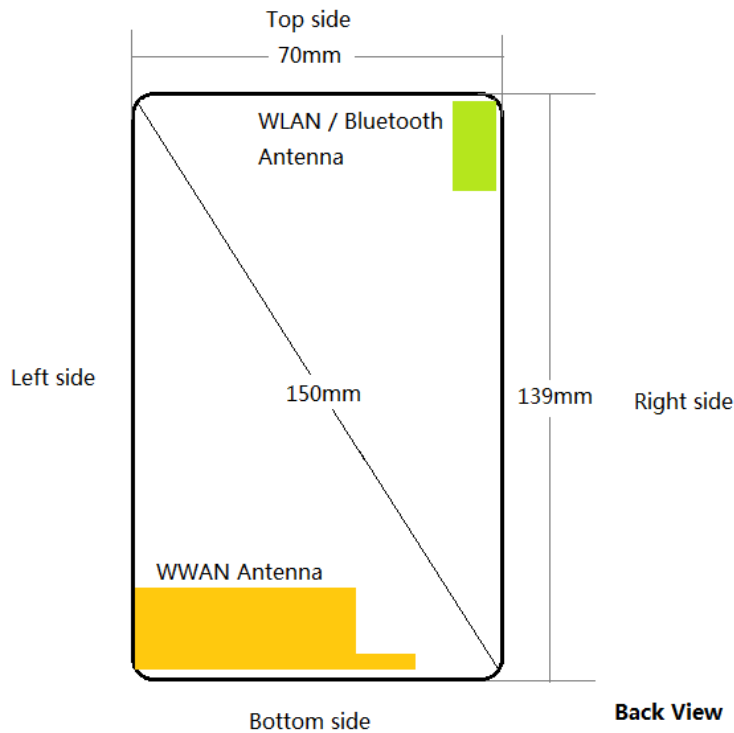

Distance of the Antenna to the EUT surface/edge						
Antenna	Back	Front	Top side	Bottom side	Right side	Left side
WWAN	≅ 25mm	≅ 25mm	125mm	≅ 25mm	≅ 25mm	≅ 25mm
WIFI / BT	≅ 25mm	≅ 25mm	≅ 25mm	110mm	≅ 25mm	60mm

Positions for SAR tests; Hotspot mode						
Antenna	Back	Front	Top side	Bottom side	Right side	Left side
WWAN	Yes	Yes	No	Yes	Yes	Yes
WIFI / BT	Yes	Yes	Yes	No	Yes	No

**General note:**

Referring to KDB941225 D06 v02, when the overall device length and width are >9cm\*5cm, the test distance is 10mm. SAR must be measured for all sides and surfaces with a transmitting antenna located within 25mm from that surface or edge.

## 14. SAR Measurement Results

### Head SAR

GSM850									
Mode	Test Position	Frequency		Conducted Power (dBm)	Tune up limit (dBm)	Tune up scaling factor	Power Drift(dB)	Measured SAR(1g) (W/kg)	Report SAR(1g) (W/kg)
		CH	MHz						
GPRS (4Tx slot)	Left-Cheek	128	824.2	29.14	30.00	1.22	-	-	-
		190	836.6	29.15	30.00	1.22	-0.11	0.274	0.333
		251	848.8	29.20	30.00	1.20	-	-	-
	Left-Tilt	128	824.2	29.14	30.00	1.22	-	-	-
		190	836.6	29.15	30.00	1.22	-0.13	0.206	0.250
		251	848.8	29.20	30.00	1.20	-	-	-
	Right-Cheek	128	824.2	29.14	30.00	1.22	-	-	-
		190	836.6	29.15	30.00	1.22	-0.04	0.241	0.293
		251	848.8	29.20	30.00	1.20	-	-	-
	Right-Tilt	128	824.2	29.14	30.00	1.22	-	-	-
		190	836.6	29.15	30.00	1.22	-0.09	0.186	0.226
		251	848.8	29.20	30.00	1.20	-	-	-

PCS1900									
Mode	Test Position	Frequency		Conducted Power (dBm)	Tune up limit (dBm)	Tune up scaling factor	Power Drift(dB)	Measured SAR(1g) (W/kg)	Report SAR(1g) (W/kg)
		CH	MHz						
GPRS (4Tx slot)	Left-Cheek	512	1850.2	26.14	27.00	1.22	-	-	-
		661	1880.0	26.03	27.00	1.25	-0.07	0.143	0.179
		810	1909.8	25.96	27.00	1.27	-	-	-
	Left-Tilt	512	1850.2	26.14	27.00	1.22	-	-	-
		661	1880.0	26.03	27.00	1.25	0.12	0.102	0.128
		810	1909.8	25.96	27.00	1.27	-	-	-
	Right-Cheek	512	1850.2	26.14	27.00	1.22	-	-	-
		661	1880.0	26.03	27.00	1.25	-0.06	0.121	0.152
		810	1909.8	25.96	27.00	1.27	-	-	-
	Right-Tilt	512	1850.2	26.14	27.00	1.22	-	-	-
		661	1880.0	26.03	27.00	1.25	0.02	0.087	0.109
		810	1909.8	25.96	27.00	1.27	-	-	-

WCDMA Band V									
Mode	Test Position	Frequency		Conducted Power (dBm)	Tune up limit (dBm)	Tune up scaling factor	Power Drift(dB)	Measured SAR(1g) (W/kg)	Report SAR(1g) (W/kg)
		CH	MHz						
RMC 12.2Kbps	Left-Cheek	4132	826.4	22.45	22.50	1.01	-	-	-
		4183	836.6	22.36	22.50	1.03	-0.04	0.209	0.216
		4233	846.6	22.29	22.50	1.05	-	-	-
	Left-Tilt	4132	826.4	22.45	22.50	1.01	-	-	-
		4183	836.6	22.36	22.50	1.03	-0.06	0.149	0.154
		4233	846.6	22.29	22.50	1.05	-	-	-
	Right-Cheek	4132	826.4	22.45	22.50	1.01	-	-	-
		4183	836.6	22.36	22.50	1.03	-0.11	0.177	0.183
		4233	846.6	22.29	22.50	1.05	-	-	-
	Right-Tilt	4132	826.4	22.45	22.50	1.01	-	-	-
		4183	836.6	22.36	22.50	1.03	-0.01	0.127	0.131
		4233	846.6	22.29	22.50	1.05	-	-	-

WCDMA Band II									
Mode	Test Position	Frequency		Conducted Power (dBm)	Tune up limit (dBm)	Tune up scaling factor	Power Drift(dB)	Measured SAR(1g) (W/kg)	Report SAR(1g) (W/kg)
		CH	MHz						
RMC 12.2Kbps	Left-Cheek	9262	1852.4	20.92	21.50	1.14	-	-	-
		9400	1880.0	21.03	21.50	1.11	-0.04	0.178	0.198
		9538	1907.6	20.97	21.50	1.13	-	-	-
	Left-Tilt	9262	1852.4	20.92	21.50	1.14	-	-	-
		9400	1880.0	21.03	21.50	1.11	0.12	0.127	0.142
		9538	1907.6	20.97	21.50	1.13	-	-	-
	Right-Cheek	9262	1852.4	20.92	21.50	1.14	-	-	-
		9400	1880.0	21.03	21.50	1.11	-0.03	0.151	0.168
		9538	1907.6	20.97	21.50	1.13	-	-	-
	Right-Tilt	9262	1852.4	20.92	21.50	1.14	-	-	-
		9400	1880.0	21.03	21.50	1.11	0.01	0.108	0.121
		9538	1907.6	20.97	21.50	1.13	-	-	-

WLAN									
Mode	Test Position	Frequency		Conducted Power (dBm)	Tune up limit (dBm)	Tune up scaling factor	Power Drift(dB)	Measured SAR(1g) (W/kg)	Report SAR(1g) (W/kg)
		CH	MHz						
802.11b 1Mbps	Left-Cheek	01	2412	13.07	13.50	1.10	-	-	-
		06	2437	12.98	13.50	1.13	-0.14	0.135	0.152
		11	2462	12.92	13.50	1.14	-	-	-
	Left-Tilt	01	2412	13.07	13.50	1.10	-	-	-
		06	2437	12.98	13.50	1.13	0.02	0.097	0.109
		11	2462	12.92	13.50	1.14	-	-	-
	Right-Cheek	01	2412	13.07	13.50	1.10	-	-	-
		06	2437	12.98	13.50	1.13	0.12	0.114	0.129
		11	2462	12.92	13.50	1.14	-	-	-
	Right-Tilt	01	2412	13.07	13.50	1.10	-	-	-
		06	2437	12.98	13.50	1.13	-0.18	0.082	0.093
		11	2462	12.92	13.50	1.14	-	-	-

Note:

- 1) Per KDB865664 D01v01r04, Repeated measurement is not required when the original highest measured SAR is < 0.80 W/kg
- 2) When SAR measurement is required for 2.4 GHz 802.11g/n OFDM configurations, the measurement and test reduction procedures for OFDM are applied. SAR is not required for the following 2.4 GHz OFDM conditions.
  - a) When KDB Publication 447498 D01 SAR test exclusion applies to the OFDM configuration.
  - b) When the highest *reported* SAR for DSSS is adjusted by the ratio of OFDM to DSSS specified maximum output power and the adjusted SAR is  $\leq 1.2$  W/kg.

Maximum Report SAR @DSSS (W/kg@1g)	Maximum Power (mW)		Specific value	Reported SAR @OFDM (W/kg@1g)
	OFDM	DSSS		
0.152	15.85	22.39	0.708	0.108

Because *Reported SAR @OFDM*  $\leq 1.2$  W/kg, so the 802.11g/n is not required.



**Hotspot SAR**

Distance of the Antenna to the EUT surface/edge						
Antenna	Back	Front	Top side	Bottom side	Right side	Left side
WWAN	≅ 25mm	≅ 25mm	125mm	≅ 25mm	≅ 25mm	≅ 25mm
WIFI / BT	≅ 25mm	≅ 25mm	≅ 25mm	110mm	≅ 25mm	60mm

Positions for SAR tests; Hotspot mode						
Antenna	Back	Front	Top side	Bottom side	Right side	Left side
WWAN	Yes	Yes	No	Yes	Yes	Yes
WIFI / BT	Yes	Yes	Yes	No	Yes	No

General note:

Referring to KDB941225 D06 v02, when the overall device length and width are >9cm\*5cm, the test distance is 10mm. SAR must be measured for all sides and surfaces with a transmitting antenna located within 25mm from that surface or edge.

GSM850									
Mode	Test Position	Frequency		Conducted Power (dBm)	Tune up limit (dBm)	Tune up scaling factor	Power Drift(dB)	Measured SAR(1g) (W/kg)	Report SAR(1g) (W/kg)
		CH	MHz						
GPRS (4Tx slot)	Front	128	824.2	29.14	30.00	1.22	-	-	-
		190	836.6	29.15	30.00	1.22	0.05	0.333	0.405
		251	848.8	29.20	30.00	1.20	-	-	-
	Back	128	824.2	29.14	30.00	1.22	-	-	-
		190	836.6	29.15	30.00	1.22	0.06	0.505	0.614
		251	848.8	29.20	30.00	1.20	-	-	-
	Left	190	836.6	29.15	30.00	1.22	-0.03	0.222	0.270
	Right	190	836.6	29.15	30.00	1.22	0.02	0.129	0.157
	Top	190	836.6	29.15	30.00	1.22	-	-	-
	Bottom	190	836.6	29.15	30.00	1.22	-0.04	0.288	0.350

PCS1900									
Mode	Test Position	Frequency		Conducted Power (dBm)	Tune up limit (dBm)	Tune up scaling factor	Power Drift(dB)	Measured SAR(1g) (W/kg)	Report SAR(1g) (W/kg)
		CH	MHz						
GPRS (4Tx slot)	Front	512	1850.2	26.14	27.00	1.22	-	-	-
		661	1880.0	26.03	27.00	1.25	0.09	0.325	0.406
		810	1909.8	25.96	27.00	1.27	-	-	-
	Back	512	1850.2	26.14	27.00	1.22	-	-	-
		661	1880.0	26.03	27.00	1.25	0.10	0.492	0.615
		810	1909.8	25.96	27.00	1.27	-	-	-
	Left	661	1880.0	26.03	27.00	1.25	0.06	0.216	0.271
	Right	661	1880.0	26.03	27.00	1.25	-0.03	0.126	0.157
	Top	661	1880.0	26.03	27.00	1.25	-	-	-
	Bottom	661	1880.0	26.03	27.00	1.25	-0.16	0.280	0.351

WCDMA Band V									
Mode	Test Position	Frequency		Conducted Power (dBm)	Tune up limit (dBm)	Tune up scaling factor	Power Drift(dB)	Measured SAR(1g) (W/kg)	Report SAR(1g) (W/kg)
		CH	MHz						
RMC 12.2Kbps	Front	4132	826.4	22.45	22.50	1.01	-	-	-
		4183	836.6	22.36	22.50	1.03	0.05	0.263	0.271
		4233	846.6	22.29	22.50	1.05	-	-	-
	Back	4132	826.4	22.45	22.50	1.01	-	-	-
		4183	836.6	22.36	22.50	1.03	-0.06	0.398	0.411
		4233	846.6	22.29	22.50	1.05	-	-	-
	Left	4183	836.6	22.36	22.50	1.03	0.03	0.175	0.181
	Right	4183	836.6	22.36	22.50	1.03	0.02	0.102	0.105
	Top	4183	836.6	22.36	22.50	1.03	-	-	-
	Bottom	4183	836.6	22.36	22.50	1.03	-0.04	0.227	0.234

WCDMA Band II									
Mode	Test Position	Frequency		Conducted Power (dBm)	Tune up limit (dBm)	Tune up scaling factor	Power Drift(dB)	Measured SAR(1g) (W/kg)	Report SAR(1g) (W/kg)
		CH	MHz						
RMC 12.2Kbps	Front	9262	1852.4	20.92	21.50	1.14	-	-	-
		9400	1880.0	21.03	21.50	1.11	-0.06	0.222	0.247
		9538	1907.6	20.97	21.50	1.13	-	-	-
	Back	9262	1852.4	20.92	21.50	1.14	-	-	-
		9400	1880.0	21.03	21.50	1.11	-0.07	0.336	0.374
		9538	1907.6	20.97	21.50	1.13	-	-	-
	Left	9400	1880.0	21.03	21.50	1.11	0.04	0.148	0.165
	Right	9400	1880.0	21.03	21.50	1.11	0.08	0.086	0.096
	Top	9400	1880.0	21.03	21.50	1.11	-	-	-
	Bottom	9400	1880.0	21.03	21.50	1.11	-0.04	0.192	0.213

WLAN									
Mode	Test Position	Frequency		Conducted Power (dBm)	Tune up limit (dBm)	Tune up scaling factor	Power Drift(dB)	Measured SAR(1g) (W/kg)	Report SAR(1g) (W/kg)
		CH	MHz						
802.11b 1Mbps	Front	1	2412	13.07	13.50	1.10	-	-	-
		6	2437	12.98	13.50	1.13	-0.09	0.156	0.176
		11	2462	12.92	13.50	1.14	-	-	-
	Back	1	2412	13.07	13.50	1.10	-	-	-
		6	2437	12.98	13.50	1.13	-0.10	0.237	0.267
		11	2462	12.92	13.50	1.14	-	-	-
	Left	6	2437	12.98	13.50	1.13	-	-	-
	Right	6	2437	12.98	13.50	1.13	0.03	0.061	0.068
	Top	6	2437	12.98	13.50	1.13	-0.04	0.135	0.152
	Bottom	6	2437	12.98	13.50	1.13	-	-	-

## Note:

- 1) Per KDB865664 D01v01r04, Repeated measurement is not required when the original highest measured SAR is  $< 0.80$  W/kg
- 2) When SAR measurement is required for 2.4 GHz 802.11g/n OFDM configurations, the measurement and test reduction procedures for OFDM are applied. SAR is not required for the following 2.4 GHz OFDM conditions.
  - a) When KDB Publication 447498 D01 SAR test exclusion applies to the OFDM configuration.
  - b) When the highest *reported* SAR for DSSS is adjusted by the ratio of OFDM to DSSS specified maximum output power and the adjusted SAR is  $\leq 1.2$  W/kg.

Maximum Report SAR @DSSS (W/kg@1g)	Maximum Power (mW)		Specific value	Reported SAR @OFDM (W/kg@1g)
	OFDM	DSSS		
0.267	15.85	22.39	0.708	0.189

Because *Reported* SAR @OFDM  $\leq 1.2$  W/kg, so the 802.11g/n is not required.

**Body SAR**

GSM850									
Mode	Test Position	Frequency		Conducted Power (dBm)	Tune up limit (dBm)	Tune up scaling factor	Power Drift(dB)	Measured SAR(1g) (W/kg)	Report SAR(1g) (W/kg)
		CH	MHz						
GPRS (4Tx slot)	Front	128	824.2	29.14	30.00	1.22	-	-	-
		190	836.6	29.15	30.00	1.22	0.19	0.430	0.523
		251	848.8	29.20	30.00	1.20	-	-	-
	Back	128	824.2	29.14	30.00	1.22	-	-	-
		190	836.6	29.15	30.00	1.22	-0.04	0.651	0.792
		251	848.8	29.20	30.00	1.20	-	-	-
	Back with headset	128	824.2	29.14	30.00	1.22	-	-	-
		190	836.6	29.15	30.00	1.22	0.16	0.601	0.731
		251	848.8	29.20	30.00	1.20	-	-	-

PCS1900									
Mode	Test Position	Frequency		Conducted Power (dBm)	Tune up limit (dBm)	Tune up scaling factor	Power Drift(dB)	Measured SAR(1g) (W/kg)	Report SAR(1g) (W/kg)
		CH	MHz						
GPRS (4Tx slot)	Front	512	1850.2	26.14	27.00	1.22	-	-	-
		661	1880.0	26.03	27.00	1.25	0.03	0.364	0.455
		810	1909.8	25.96	27.00	1.27	-	-	-
	Back	512	1850.2	26.14	27.00	1.22	-	-	-
		661	1880.0	26.03	27.00	1.25	0.01	0.551	0.689
		810	1909.8	25.96	27.00	1.27	-	-	-

WCDMA Band V									
Mode	Test Position	Frequency		Conducted Power (dBm)	Tune up limit (dBm)	Tune up scaling factor	Power Drift(dB)	Measured SAR(1g) (W/kg)	Report SAR(1g) (W/kg)
		CH	MHz						
RMC 12.2Kbps	Front	4132	826.4	22.45	22.50	1.01	-	-	-
		4183	836.6	22.36	22.50	1.03	0.03	0.292	0.301
		4233	846.6	22.29	22.50	1.05	-	-	-
	Back	4132	826.4	22.45	22.50	1.01	-	-	-
		4183	836.6	22.36	22.50	1.03	-0.03	0.442	0.456
		4233	846.6	22.29	22.50	1.05	-	-	-

WCDMA Band II									
Mode	Test Position	Frequency		Conducted Power (dBm)	Tune up limit (dBm)	Tune up scaling factor	Power Drift(dB)	Measured SAR(1g) (W/kg)	Report SAR(1g) (W/kg)
		CH	MHz						
RMC 12.2Kbps	Front	9262	1852.4	20.92	21.50	1.14	-	-	-
		9400	1880.0	21.03	21.50	1.11	-0.09	0.236	0.263
		9538	1907.6	20.97	21.50	1.13	-	-	-
	Back	9262	1852.4	20.92	21.50	1.14	-	-	-
		9400	1880.0	21.03	21.50	1.11	-0.11	0.357	0.398
		9538	1907.6	20.97	21.50	1.13	-	-	-

WLAN									
Mode	Test Position	Frequency		Conducted Power (dBm)	Tune up limit (dBm)	Tune up scaling factor	Power Drift(dB)	Measured SAR(1g) (W/kg)	Report SAR(1g) (W/kg)
		CH	MHz						
802.11b 1Mbps	Front	1	2412	13.07	13.50	1.10	-	-	-
		6	2437	12.98	13.50	1.13	0.05	0.180	0.203
		11	2462	12.92	13.50	1.14	-	-	-
	Back	1	2412	13.07	13.50	1.10	-	-	-
		6	2437	12.98	13.50	1.13	-0.06	0.273	0.308
		11	2462	12.92	13.50	1.14	-	-	-

Note:

- 1) Per KDB865664 D01v01r04, Repeated measurement is not required when the original highest measured SAR is < 0.80 W/kg
- 2) When SAR measurement is required for 2.4 GHz 802.11g/n OFDM configurations, the measurement and test reduction procedures for OFDM are applied. SAR is not required for the following 2.4 GHz OFDM conditions.
  - a) When KDB Publication 447498 D01 SAR test exclusion applies to the OFDM configuration.
  - b) When the highest *reported* SAR for DSSS is adjusted by the ratio of OFDM to DSSS specified maximum output power and the adjusted SAR is  $\leq 1.2$  W/kg.

Maximum Report SAR @DSSS (W/kg@1g)	Maximum Power (mW)		Specific value	Reported SAR @OFDM (W/kg@1g)
	OFDM	DSSS		
0.308	15.85	22.39	0.708	0.218

Because *Reported SAR @OFDM*  $\leq 1.2$  W/kg, so the 802.11g/n is not required.

## SAR Test Data Plots

**Left Head Cheek (GSM850 GPRS 4TS Middle Channel)**

Communication System: Customer System; Frequency: 836.6 MHz; Duty Cycle: 1:2  
Medium parameters used (interpolated):  $f=836.6$  MHz;  $\sigma=0.91$  S/m;  $\epsilon_r=41.48$ ;  $\rho=1000$  kg/m<sup>3</sup>  
Phantom section: Left Head Section:

**DASY 5 Configuration:**


- Probe: ES3DV3 - SN3292; ConvF(6.23, 6.23, 6.23); Calibrated: 15/08/2015;
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1315; Calibrated: 22/07/2015
- Phantom: SAM 1; Type: SAM;
- Measurement SW: DASY52, Version 52.8 (2); SEMCAD X Version 14.6.6 (6824)

**Area Scan (51x91x1):** Interpolated grid:  $dx=1.500$  mm,  $dy=1.500$  mm  
Maximum value of SAR (interpolated) = 0.291 W/kg

**Zoom Scan (5x5x6)/Cube 0:** Measurement grid:  $dx=7$  mm,  $dy=7$  mm,  $dz=5$  mm  
Reference Value = 15.277 V/m; Power Drift = -0.11 dB  
Peak SAR (extrapolated) = 0.280 mW/g

**SAR(1 g) = 0.274 mW/g; SAR(10 g) = 0.157 mW/g**

Maximum value of SAR (measured) = 0.290 W/kg

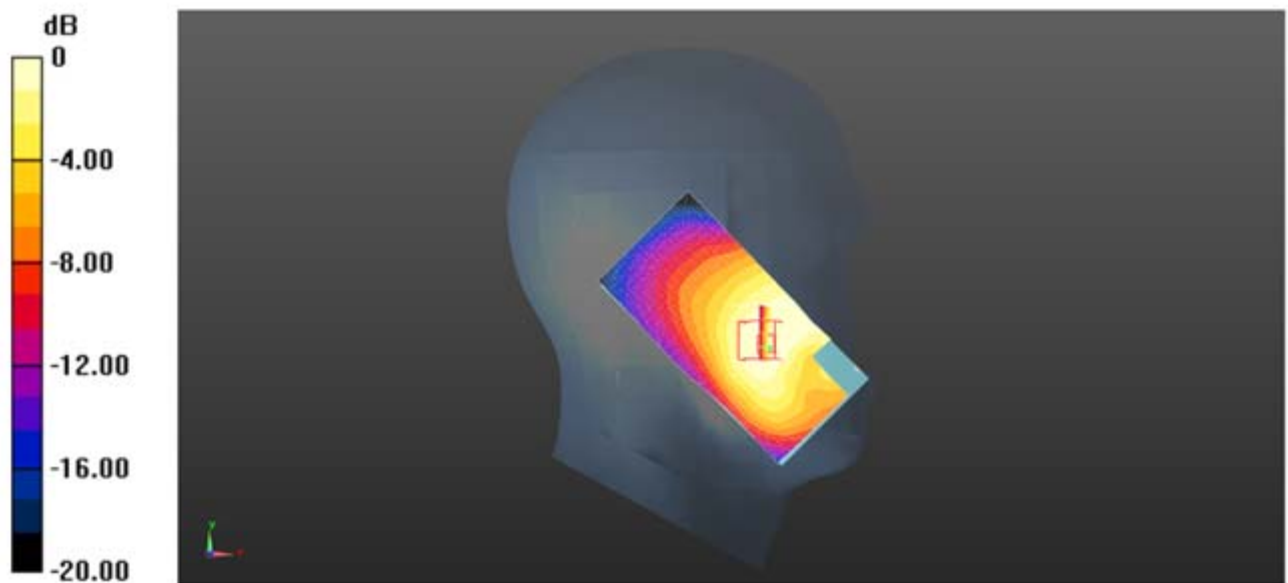

Left Head Cheek (GSM850 GPRS 4TS Middle Channel)

**Left Head Tilt (PCS1900 GPRS 4TS Middle Channel)**

Communication System: Customer System; Frequency: 1880.0 MHz; Duty Cycle: 1:2  
Medium parameters used(interpolated):  $f = 1880.0$  MHz;  $\sigma = 1.41$  mho/m;  $\epsilon = 40.01$ ;  $\rho = 1000$  kg/m<sup>3</sup>  
Phantom section: Left Head Section

**DASY5 Configuration:**


- Probe: ES3DV3 - SN3292; ConvF(5.03, 5.03, 5.03); Calibrated: 15/08/2015;
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1315; Calibrated: 22/07/2015
- Phantom: SAM 1; Type: SAM;
- Measurement SW: DASY52, Version 52.8 (2); SEMCAD X Version 14.6.6 (6824)

**Area Scan (51x91x1):** Interpolated grid:  $dx=1.500$  mm,  $dy=1.500$  mm  
Maximum value of SAR (interpolated) = 0.149 W/kg

**Zoom Scan (5x5x6)/Cube 0:** Measurement grid:  $dx=7$ mm,  $dy=7$ mm,  $dz=5$ mm  
Reference Value = 6.254 V/m; Power Drift = -0.07 dB  
Peak SAR (extrapolated) = 0.145 mW/g

**SAR(1 g) = 0.143 mW/g; SAR(10 g) = 0.087 mW/g**

Maximum value of SAR (measured) = 0.149 W/kg

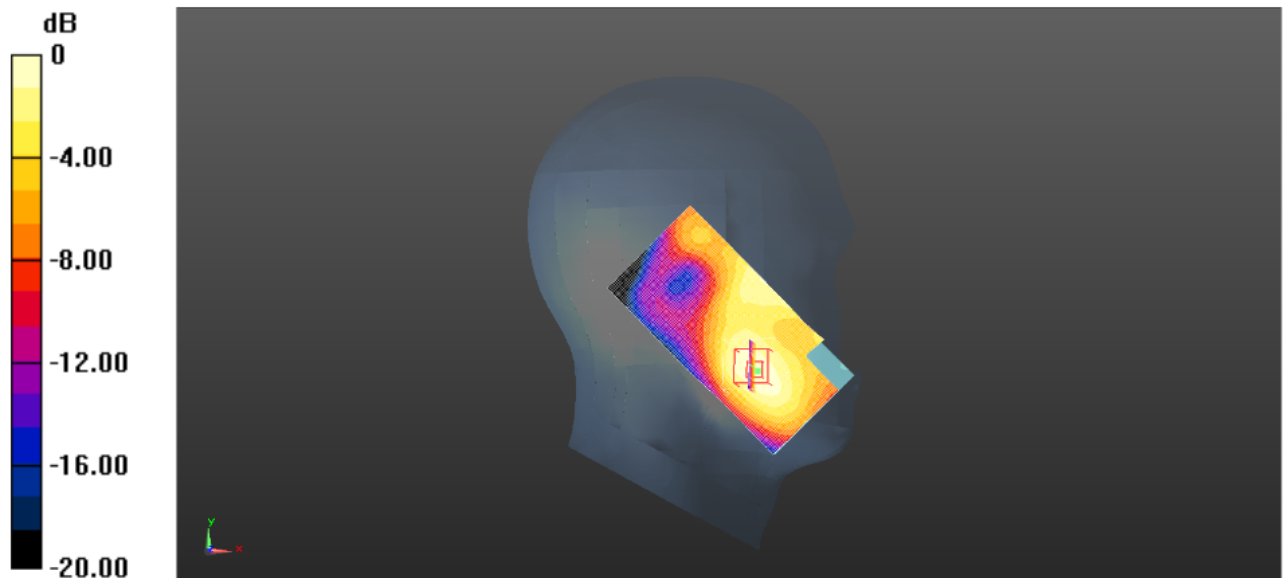

Left Head Tilt (PCS1900 Middle Channel)

**Left Head Cheek (WCDMA Band V Middle Channel)**

Communication System: Customer System; Frequency: 836.6 MHz; Duty Cycle: 1:1  
Medium parameters used (interpolated):  $f=836.6$  MHz;  $\sigma=0.91$  S/m;  $\epsilon_r=41.48$ ;  $\rho=1000$  kg/m<sup>3</sup>  
Phantom section: Left Head Section:

**DASY5 Configuration:**


- Probe: ES3DV3 - SN3292; ConvF(6.23, 6.23, 6.23); Calibrated: 15/08/2015;
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1315; Calibrated: 22/07/2015
- Phantom: SAM 1; Type: SAM;
- Measurement SW: DASY52, Version 52.8 (2); SEMCAD X Version 14.6.6 (6824)

**Area Scan (51x91x1):** Interpolated grid:  $dx=1.500$  mm,  $dy=1.500$  mm  
Maximum value of SAR (interpolated) = 0.209 W/kg

**Zoom Scan (5x5x6)/Cube 0:** Measurement grid:  $dx=7$ mm,  $dy=7$ mm,  $dz=5$ mm  
Reference Value = 13.868 V/m; Power Drift = -0.04 dB  
Peak SAR (extrapolated) = 0.269 mW/g

**SAR(1 g) = 0.209 mW/g; SAR(10 g) = 0.163 mW/g**

Maximum value of SAR (measured) = 0.211 W/kg

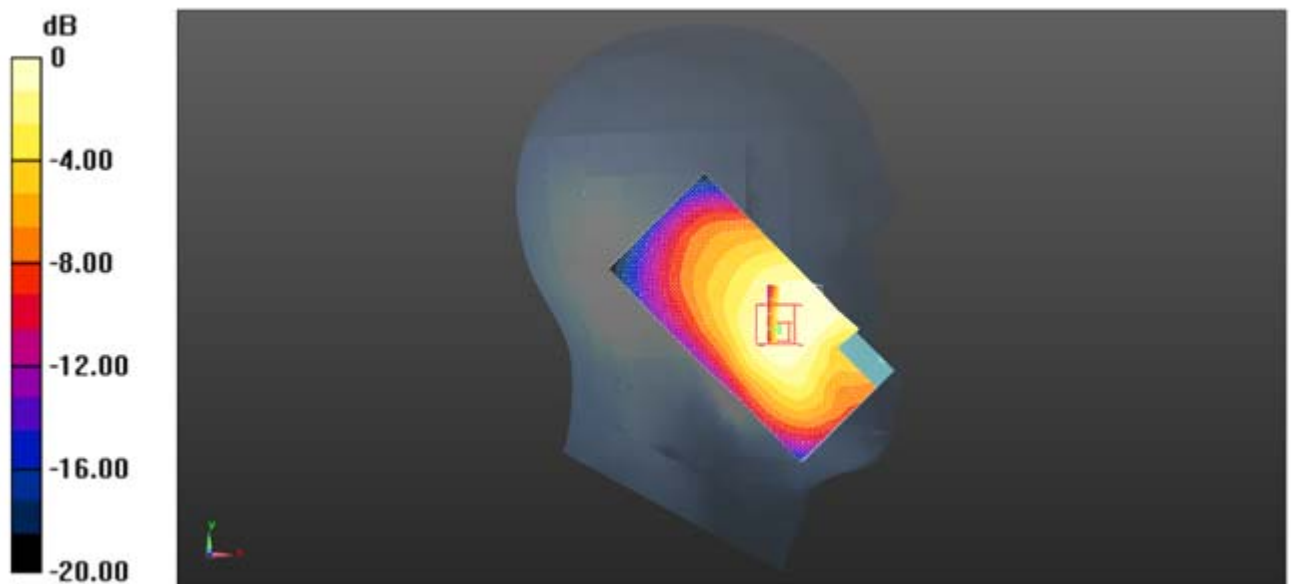

Left Head Cheek (WCDMA Band V Middle Channel)



**Left Head Cheek (WCDMA Band II Middle Channel)**

Communication System: Customer System; Frequency: 1880.0 MHz; Duty Cycle: 1:1  
Medium parameters used (interpolated):  $f = 1880.0$  MHz;  $\sigma = 1.41$  mho/m;  $\epsilon = 40.01$ ;  $\rho = 1000$  kg/m<sup>3</sup>  
Phantom section: Left Head Section:

**DASY5 Configuration:**


- Probe: ES3DV3 - SN3292; ConvF(5.03, 5.03, 5.03); Calibrated: 15/08/2015;
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1315; Calibrated: 22/07/2015
- Phantom: SAM 1; Type: SAM;
- Measurement SW: DASY52, Version 52.8 (2); SEMCAD X Version 14.6.6 (6824)

**Area Scan (51x91x1):** Interpolated grid:  $dx = 1.500$  mm,  $dy = 1.500$  mm  
Maximum value of SAR (interpolated) = 0.180 W/kg

**Zoom Scan (5x5x6)/Cube 0:** Measurement grid:  $dx = 7$  mm,  $dy = 7$  mm,  $dz = 5$  mm  
Reference Value = 12.316 V/m; Power Drift = -0.04 dB  
Peak SAR (extrapolated) = 0.284 mW/g

**SAR(1 g) = 0.178 mW/g; SAR(10 g) = 0.092 mW/g**

Maximum value of SAR (measured) = 0.178 W/kg

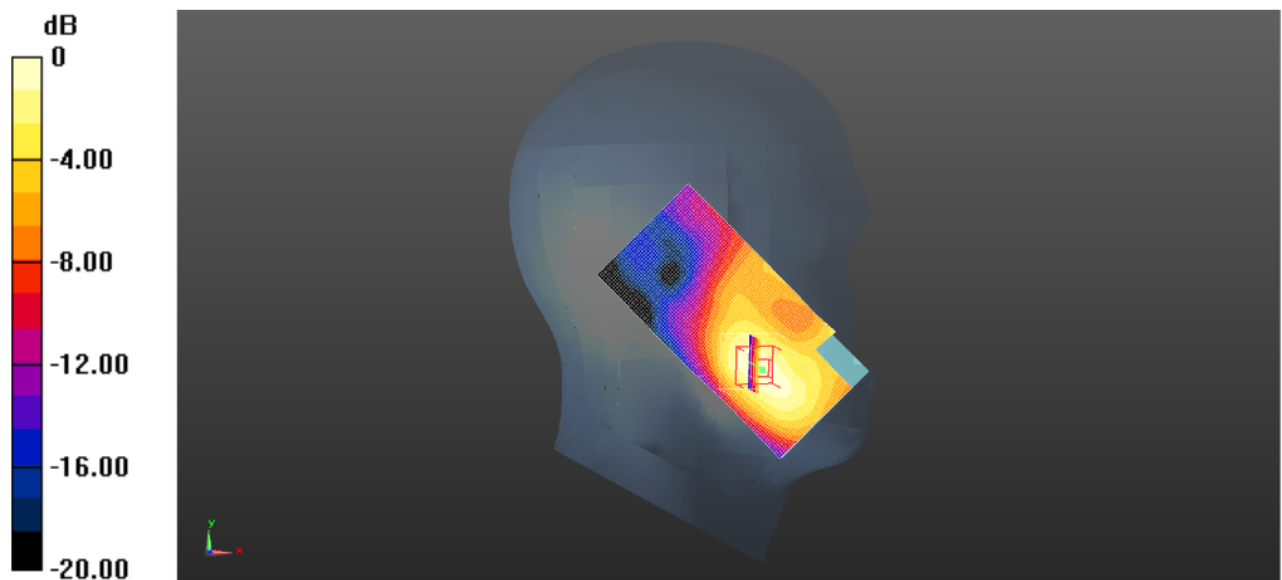

Left Head Cheek (WCDMA Band II Middle Channel)

**Left Head Cheek (WLAN 802.11b Middle Channel)**

Communication System: Customer System; Frequency: 2437.0 MHz; Duty Cycle: 1:1  
Medium parameters used (interpolated):  $f=2437.0$  MHz;  $\sigma=1.78$  S/m;  $\epsilon_r=39.00$ ;  $\rho=1000$  kg/m<sup>3</sup>  
Phantom section: Left Head Section:

**DASY5 Configuration:**


- Probe: ES3DV3 - SN3292; ConvF(4.43, 4.43, 4.43); Calibrated: 15/08/2015;
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1315; Calibrated: 22/07/2015
- Phantom: SAM 1; Type: SAM;
- Measurement SW: DASY52, Version 52.8 (2); SEMCAD X Version 14.6.6 (6824)

**Area Scan (51x91x1):** Interpolated grid:  $dx=1.200$  mm,  $dy=1.200$  mm  
Maximum value of SAR (interpolated) = 0.139 W/kg

**Zoom Scan (6x6x6)/Cube 0:** Measurement grid:  $dx=5$ mm,  $dy=5$ mm,  $dz=5$ mm  
Reference Value = 9.114 V/m; Power Drift = -0.14 dB  
Peak SAR (extrapolated) = 0.285 mW/g

**SAR(1 g) = 0.135 mW/g; SAR(10 g) = 0.084 mW/g**

Maximum value of SAR (measured) = 0.137 W/kg

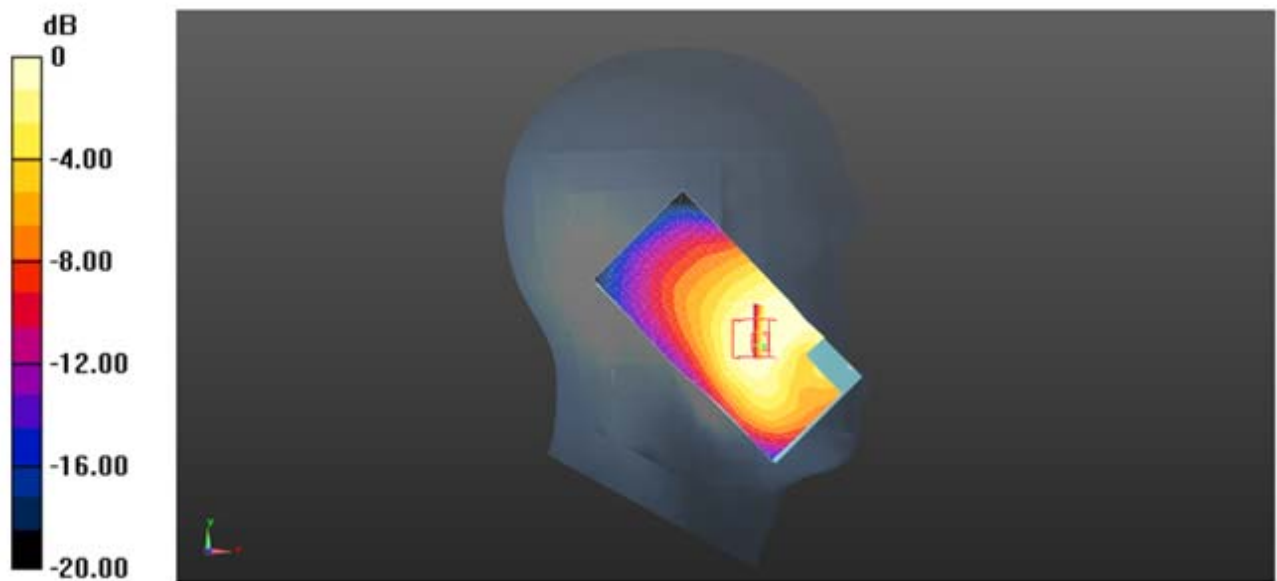

Left Head Cheek (WLAN middle Channel)

**Body- worn Rear Side (GSM850 GPRS 4TS Middle Channel)**

Communication System: Customer System; Frequency:836.6 MHz;Duty Cycle:1:2  
Medium parameters used (interpolated):  $f=836.6$  MHz;  $\sigma=0.97$  S/m;  $\epsilon_r=55.10$ ;  $\rho=1000$  kg/m<sup>3</sup>  
Phantom section: Flat Section:

**DASY 5 Configuration:**


- Probe: ES3DV3 - SN3292; ConvF(6.11, 6.11, 6.11); Calibrated: 15/08/2015;
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1315; Calibrated: 22/07/2015
- Phantom: SAM 1; Type: SAM;
- Measurement SW: DASY52, Version 52.8 (2); SEMCAD X Version 14.6.6 (6824)

**Area Scan (51x91x1):** Interpolated grid:  $dx=1.500$  mm,  $dy=1.500$  mm  
Maximum value of SAR (interpolated) =0.661 W/kg

**Zoom Scan (5x5x6)/Cube 0:** Measurement grid:  $dx=7$ mm,  $dy=7$ mm,  $dz=5$ mm  
Reference Value =21.467 V/m; Power Drift = -0.04 dB  
Peak SAR (extrapolated) = 1.309 mW/g

**SAR(1 g) = 0.651 mW/g; SAR(10 g) = 0.393 mW/g**

Maximum value of SAR (measured) = 0.653 W/kg

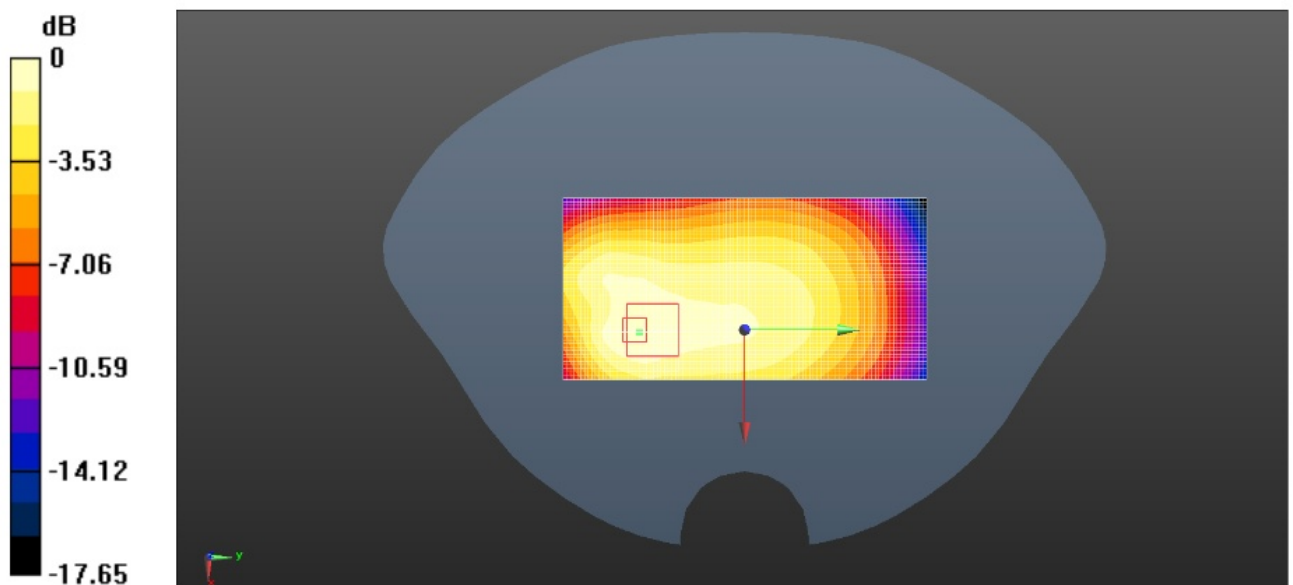

Body- worn Rear Side (GSM850 GPRS 4TS Middle Channel)

**Body- worn Rear Side (PCS1900 GPRS 4TS Middle Channel)**

Communication System: Customer System; Frequency: 1880.0 MHz; Duty Cycle: 1:2  
Medium parameters used(interpolated):  $f = 1880.0$  MHz;  $\sigma = 1.51$  mho/m;  $\epsilon = 53.21$ ;  $\rho = 1000$  kg/m<sup>3</sup>  
Phantom section: Flat Section

**DASY5 Configuration:**


- Probe: ES3DV3 - SN3292; ConvF(4.66, 4.66, 4.66); Calibrated: 15/08/2015;
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1315; Calibrated: 22/07/2015
- Phantom: SAM 1; Type: SAM;
- Measurement SW: DASY52, Version 52.8 (2); SEMCAD X Version 14.6.6 (6824)

**Area Scan (51x91x1):** Interpolated grid:  $dx=1.500$  mm,  $dy=1.500$  mm  
Maximum value of SAR (interpolated) = 0.556 W/kg

**Zoom Scan (5x5x6)/Cube 0:** Measurement grid:  $dx=7$ mm,  $dy=7$ mm,  $dz=5$ mm  
Reference Value = 19.278 V/m; Power Drift = 0.01 dB  
Peak SAR (extrapolated) = 1.138 mW/g

**SAR(1 g) = 0.551 mW/g; SAR(10 g) = 0.317 mW/g**

Maximum value of SAR (measured) = 0.554 W/kg

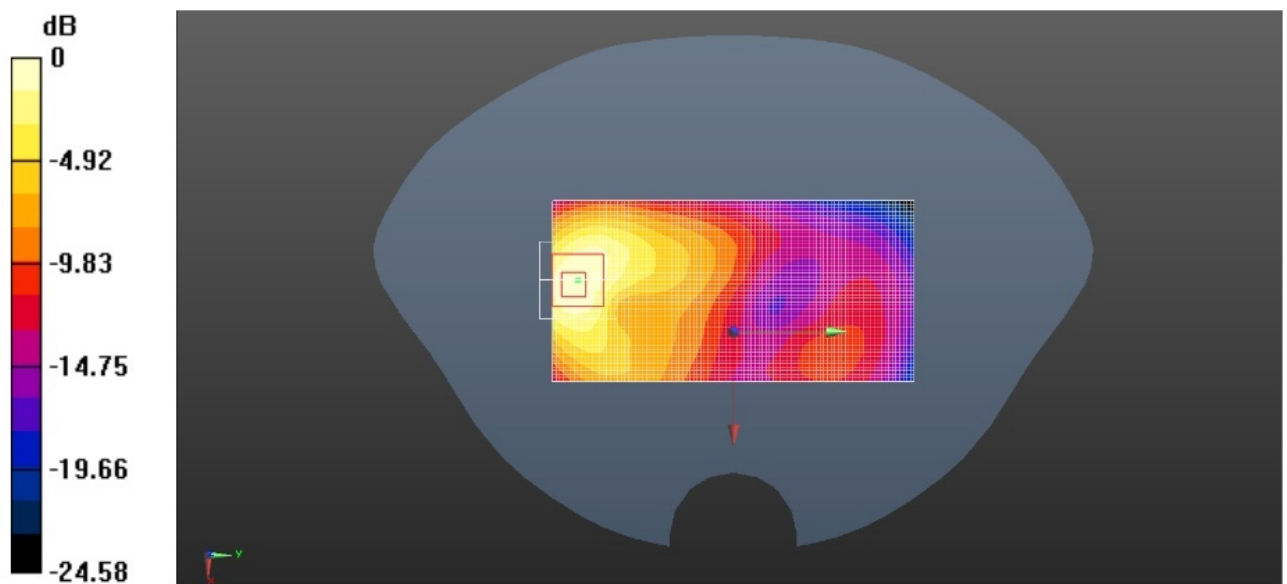

Body- worn Rear Side (PCS1900 GPRS 4TS Middle Channel)

**Body- worn Rear Side (WCDMA Band V Middle Channel)**

Communication System: Customer System; Frequency: 836.6 MHz; Duty Cycle: 1:1  
Medium parameters used (interpolated):  $f=836.6$  MHz;  $\sigma=0.97$  S/m;  $\epsilon_r=55.10$ ;  $\rho=1000$  kg/m<sup>3</sup>  
Phantom section: Flat Section

**DASY5 Configuration:**


- Probe: ES3DV3 - SN3292; ConvF(6.11, 6.11, 6.11); Calibrated: 15/08/2015;
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1315; Calibrated: 22/07/2015
- Phantom: SAM 1; Type: SAM;
- Measurement SW: DASY52, Version 52.8 (2); SEMCAD X Version 14.6.6 (6824)

**Area Scan (51x91x1):** Interpolated grid:  $dx=1.500$  mm,  $dy=1.500$  mm  
Maximum value of SAR (interpolated) = 0.461 W/kg

**Zoom Scan (5x5x6)/Cube 0:** Measurement grid:  $dx=7$ mm,  $dy=7$ mm,  $dz=5$ mm  
Reference Value = 13.725 V/m; Power Drift = -0.03 dB  
Peak SAR (extrapolated) = 0.751 mW/g

**SAR(1 g) = 0.442 mW/g; SAR(10 g) = 0.231 mW/g**

Maximum value of SAR (measured) = 0.443 W/kg

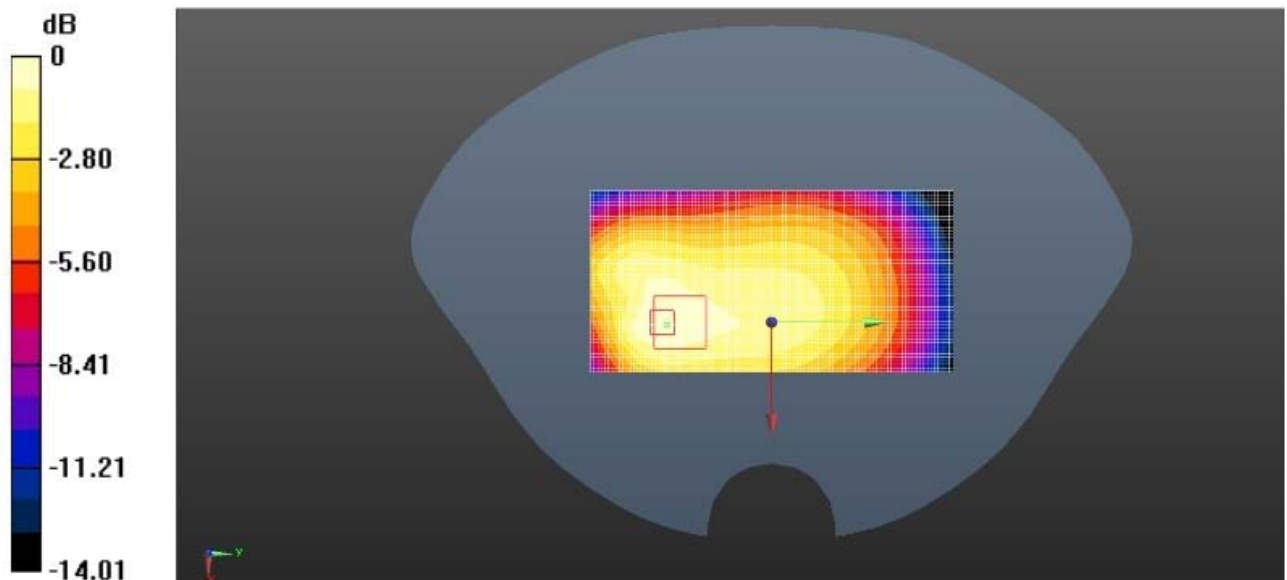

Body- worn Rear Side (WCDMA Band V Middle Channel)

**Body- worn Rear Side (WCDMA Band II Middle Channel)**

Communication System: Customer System; Frequency: 1880.0 MHz; Duty Cycle: 1:1  
Medium parameters used (interpolated):  $f=1880.0$  MHz;  $\sigma=1.51$  S/m;  $\epsilon_r=53.21$ ;  $\rho=1000$  kg/m<sup>3</sup>  
Phantom section: Flat Section

**DASY5 Configuration:**


- Probe: ES3DV3 - SN3292; ConvF(4.66, 4.66, 4.66); Calibrated: 15/08/2015;
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1315; Calibrated: 22/07/2015
- Phantom: SAM 1; Type: SAM;
- Measurement SW: DASY52, Version 52.8 (2); SEMCAD X Version 14.6.6 (6824)

**Area Scan (51x91x1):** Interpolated grid:  $dx=1.500$  mm,  $dy=1.500$  mm  
Maximum value of SAR (interpolated) = 0.359 W/kg

**Zoom Scan (5x5x6)/Cube 0:** Measurement grid:  $dx=7$ mm,  $dy=7$ mm,  $dz=5$ mm  
Reference Value = 10.673 V/m; Power Drift = -0.11 dB  
Peak SAR (extrapolated) = 0.756mW/g

**SAR(1 g) = 0.357 mW/g; SAR(10 g) = 0.219mW/g**

Maximum value of SAR (measured) = 0.358 W/kg

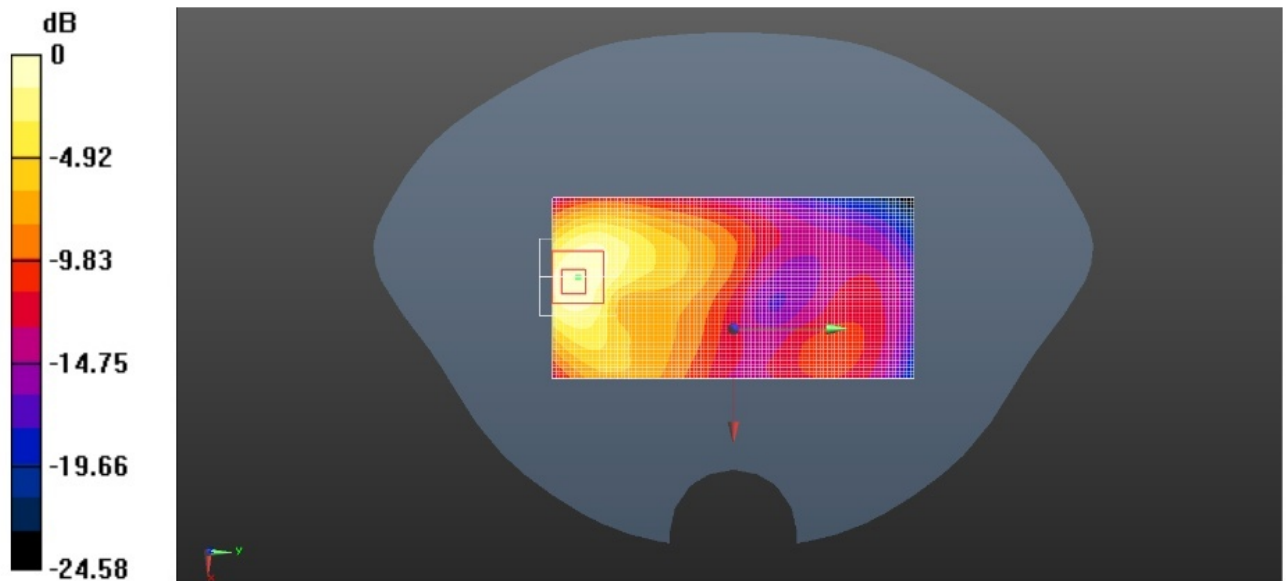

Body- worn Rear Side (WCDMA Band II Middle Channel)

**Body- worn Rear side (WLAN 802.11b Middle Channel)**

Communication System: Customer System; Frequency: 2437.0 MHz; Duty Cycle: 1:1  
Medium parameters used (interpolated):  $f = 2437.0$  MHz;  $\sigma = 1.93$  S/m;  $\epsilon_r = 52.65$ ;  $\rho = 1000$  kg/m<sup>3</sup>  
Phantom section : Flat Section

**DASY5 Configuration:**


- Probe: ES3DV3 - SN3292; ConvF(4.23, 4.23, 4.23); Calibrated: 15/08/2015;
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1315; Calibrated: 22/07/2015
- Phantom: SAM 1; Type: SAM;
- Measurement SW: DASY52, Version 52.8 (2); SEMCAD X Version 14.6.6 (6824)

**Area Scan (51x91x1):** Interpolated grid:  $dx = 1.200$  mm,  $dy = 1.200$  mm  
Maximum value of SAR (interpolated) = 0.281 W/kg

**Zoom Scan (6x6x6)/Cube 0:** Measurement grid:  $dx = 5$  mm,  $dy = 5$  mm,  $dz = 5$  mm  
Reference Value = 11.874 V/m; Power Drift = -0.06 dB  
Peak SAR (extrapolated) = 0.607 mW/g

**SAR(1 g) = 0.273 mW/g; SAR(10 g) = 0.162 mW/g**

Maximum value of SAR (measured) = 0.274 W/kg

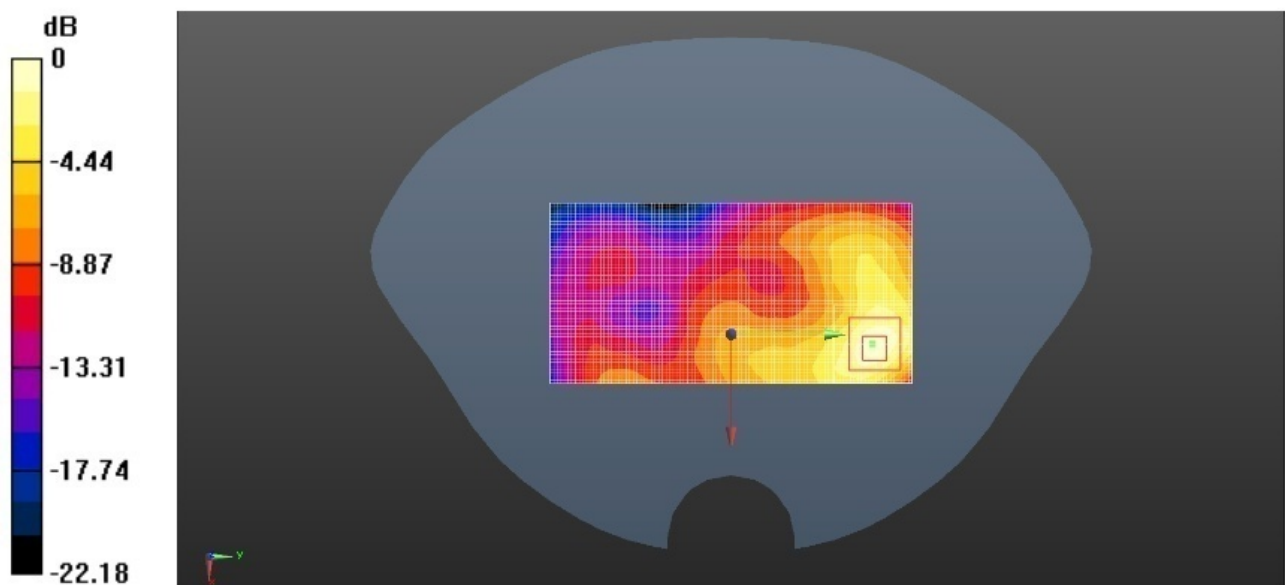

Body- worn Rear side (WLAN 802.11b Middle Channel)

## 15. Simultaneous Transmission analysis

No.	Simultaneous Transmission Configurations	Head	Body-worn	Hotspot	Note
1	GPRS (data) + Bluetooth (data)	Yes	Yes		
2	GPRS (data) + WIFI (data)	Yes	Yes		
3	WCDMA(voice) + Bluetooth (data)	Yes	Yes		
4	WCDMA(voice) + WIFI (data)	Yes	Yes		
5	GPRS (data) + Bluetooth (data)	Yes	Yes	Yes	
6	GPRS (data) + WIFI (data)	Yes	Yes	Yes	
7	WCDMA (data) + Bluetooth (data)	Yes	Yes	Yes	
8	WCDMA (data) + WIFI (data)	Yes	Yes	Yes	

General note:

1. This device support VoIP in GPRS and WCDMA, when evaluate the simultaneous transmit , will use GPRS function instead of GSM (Voice) function.
2. WLAN and Bluetooth share the same antenna, and cannot transmit simultaneously.
3. EUT will choose either GSM or WCDMA according to the network signal condition; therefore, they will not operate simultaneously at any moment.
4. The reported SAR summation is calculated based on the same configuration and test position
5. For simultaneous transmission analysis, Bluetooth SAR is estimated per KDB 447498 D01v05r02 based on the formula below
  - a)  $[(\text{max. Power of channel, including tune-up tolerance, mW}) / (\text{min. test separation distance, mm})] * [\sqrt{f(\text{GHz})}/x] \text{W/kg}$  for test separation distances  $\leq 50\text{mm}$ ; when  $x=7.5$  for 1-g SAR, and  $x=18.75$  for 10-g SAR.
  - b) When the minimum separation distance is  $<5\text{mm}$ , the distance is used 5mm to determine SAR test exclusion
  - c) 0.4 W/kg for 1-g SAR and 1.0W/kg for 10-g SAR, when the test separation distances is  $>50\text{mm}$ .

Bluetooth Max power	Exposure position	Head	Hotspot	Body worn
	Test separation	0mm	10mm	5mm
5.00dBm	Estimated SAR (W/kg)	0.132W/kg	0.066W/kg	0.132W/kg



**Head Exposure condition**

WWAN PCE +WIFI DTS					
WWAN Band		Exposure Position	Max SAR (W/kg)		Summed SAR (W/kg)
			WWAN PCS	WIFI DTS	
GSM	GSM850	Left Cheek	0.333	0.152	0.485
		Left Tilted	0.250	0.109	0.359
		Right Cheek	0.293	0.129	0.422
		Right Tilted	0.226	0.093	0.319
	PCS1900	Left Cheek	0.179	0.152	0.331
		Left Tilted	0.128	0.109	0.237
		Right Cheek	0.152	0.129	0.281
		Right Tilted	0.109	0.093	0.201
WCDMA	Band V	Left Cheek	0.216	0.152	0.368
		Left Tilted	0.154	0.109	0.263
		Right Cheek	0.183	0.129	0.312
		Right Tilted	0.131	0.093	0.224
	Band II	Left Cheek	0.198	0.152	0.351
		Left Tilted	0.142	0.109	0.251
		Right Cheek	0.168	0.129	0.297
		Right Tilted	0.121	0.093	0.213

WWAN PCE + Bluetooth DSS					
WWAN Band		Exposure Position	Max SAR (W/kg)		Summed SAR (W/kg)
			WWAN PCS	Bluetooth DSS	
GSM	GSM850	Left Cheek	0.333	0.132	0.465
		Left Tilted	0.250	0.132	0.382
		Right Cheek	0.293	0.132	0.425
		Right Tilted	0.226	0.132	0.358
	PCS1900	Left Cheek	0.179	0.132	0.311
		Left Tilted	0.128	0.132	0.260
		Right Cheek	0.152	0.132	0.284
		Right Tilted	0.109	0.132	0.241
WCDMA	Band V	Left Cheek	0.216	0.132	0.348
		Left Tilted	0.154	0.132	0.286
		Right Cheek	0.183	0.132	0.315
		Right Tilted	0.131	0.132	0.263
	Band II	Left Cheek	0.198	0.132	0.330
		Left Tilted	0.142	0.132	0.274
		Right Cheek	0.168	0.132	0.300
		Right Tilted	0.121	0.132	0.253

**Hotspot Exposure condition**


WWAN PCE + WIFI DTS					
WWAN Band		Exposure Position	Max SAR (W/kg)		Summed SAR (W/kg)
			WWAN PCS	WIFI DTS	
GSM	GSM850	Front	0.405	0.176	0.582
		Back	0.614	0.267	0.881
		Left side	0.270	0.000	0.270
		Right side	0.157	0.068	0.226
		Top side	0.000	0.152	0.152
		Bottom side	0.350	0.000	0.350
	PCS1900	Front	0.406	0.176	0.582
		Back	0.615	0.267	0.882
		Left side	0.271	0.000	0.271
		Right side	0.157	0.068	0.226
		Top side	0.000	0.152	0.152
		Bottom side	0.351	0.000	0.351
WCDMA	Band V	Front	0.271	0.176	0.447
		Back	0.411	0.267	0.678
		Left side	0.181	0.000	0.181
		Right side	0.105	0.068	0.174
		Top side	0.000	0.152	0.152
		Bottom side	0.234	0.000	0.234
	Band II	Front	0.247	0.176	0.423
		Back	0.374	0.267	0.642
		Left side	0.165	0.000	0.165
		Right side	0.096	0.068	0.164
		Top side	0.000	0.152	0.152
		Bottom side	0.213	0.000	0.213

WWAN PCE + Bluetooth DSS					
WWAN Band		Exposure Position	Max SAR (W/kg)		Summed SAR (W/kg)
			WWAN PCS	Bluetooth DSS	
GSM	GSM850	Front	0.405	0.066	0.471
		Back	0.614	0.066	0.680
		Left side	0.270	0.066	0.336
		Right side	0.157	0.066	0.223
		Top side	0.000	0.066	0.066
		Bottom side	0.350	0.066	0.416
	PCS1900	Front	0.406	0.066	0.472
		Back	0.615	0.066	0.681
		Left side	0.271	0.066	0.337
		Right side	0.157	0.066	0.223
		Top side	0.000	0.066	0.066
		Bottom side	0.351	0.066	0.417
WCDMA	Band V	Front	0.271	0.066	0.337
		Back	0.411	0.066	0.477
		Left side	0.181	0.066	0.247
		Right side	0.105	0.066	0.171
		Top side	0.000	0.066	0.066
		Bottom side	0.234	0.066	0.300
	Band II	Front	0.247	0.066	0.313
		Back	0.374	0.066	0.440
		Left side	0.165	0.066	0.231
		Right side	0.096	0.066	0.162
		Top side	0.000	0.066	0.066
		Bottom side	0.213	0.066	0.279

**Body-Worn Accessory Exposure condition**

WWAN PCE + WIFI DTS					
WWAN Band		Exposure Position	Max SAR (W/kg)		Summed SAR (W/kg)
			WWAN PCS	WIFI DTS	
GSM	GSM850	Front	0.523	0.203	0.726
		Back	0.792	0.308	1.099
		Back with headset	0.731	0.308	1.038
	PCS1900	Front	0.455	0.203	0.658
		Back	0.689	0.308	0.997
WCDMA	Band V	Front	0.301	0.203	0.504
		Back	0.456	0.308	0.764
	Band II	Front	0.263	0.203	0.466
		Back	0.398	0.308	0.706

WWAN PCE + Bluetooth DSS					
WWAN Band		Exposure Position	Max SAR (W/kg)		Summed SAR (W/kg)
			WWAN PCS	Bluetooth DTS	
GSM	GSM850	Front	0.523	0.132	0.655
		Back	0.792	0.132	0.924
		Back with headset	0.731	0.132	0.863
	PCS1900	Front	0.455	0.132	0.587
		Back	0.689	0.132	0.821
WCDMA	Band V	Front	0.301	0.132	0.433
		Back	0.456	0.132	0.588
	Band II	Front	0.263	0.132	0.395
		Back	0.398	0.132	0.530

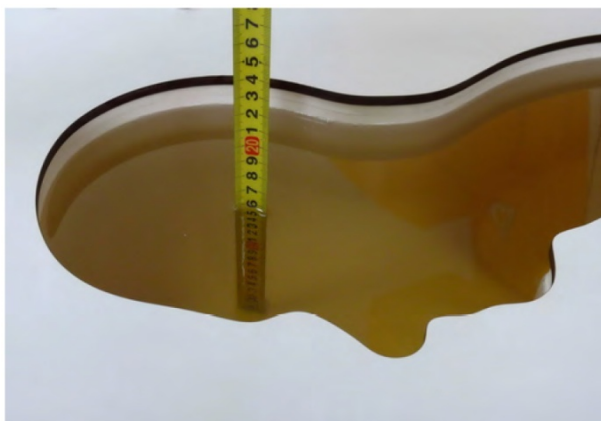**16. TestSetup Photos**

Liquid depth in the head phantom (835MHz)



Liquid depth in the body phantom (835MHz)



Liquid depth in the head phantom (1900MHz)




Liquid depth in the body phantom (1900MHz)



Liquid depth in the head phantom (2450MHz)




Liquid depth in the body phantom (2450MHz)

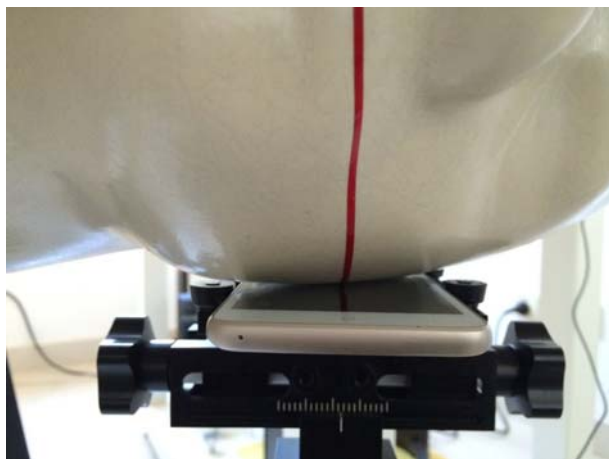


Left Head Touch



Right Head Touch

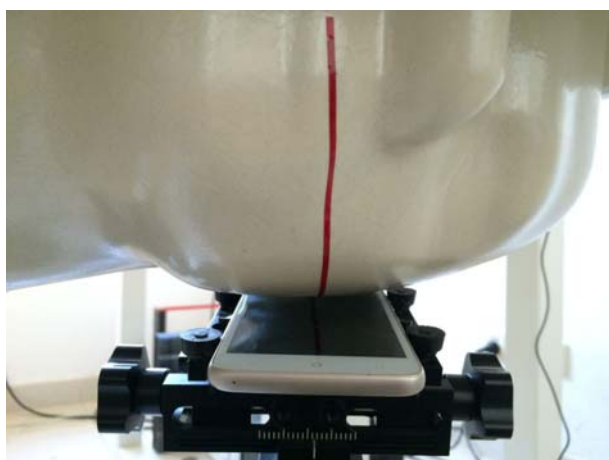


Left Head Tilt (15°)

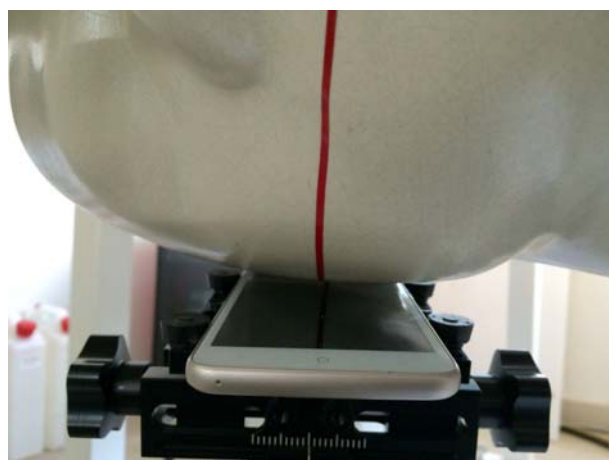

Right Head Tilt (15°)



Body-worn Front Side (5mm)

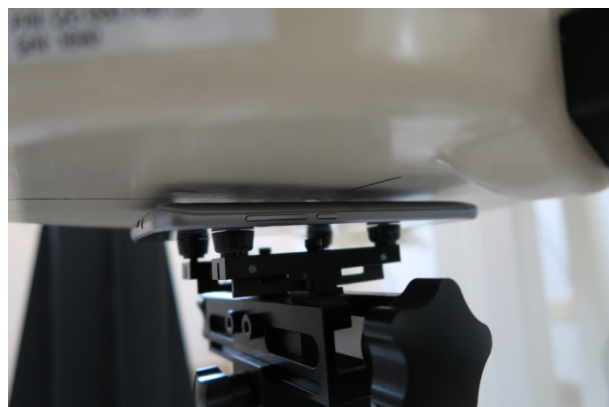

Body-worn Rear Side (5mm)





Hotspot mode - Front Side (10mm)




Hotspot mode - Rear Side (10mm)




Hotspot mode - Left Side (10mm)



Hotspot mode - Right Side (10mm)

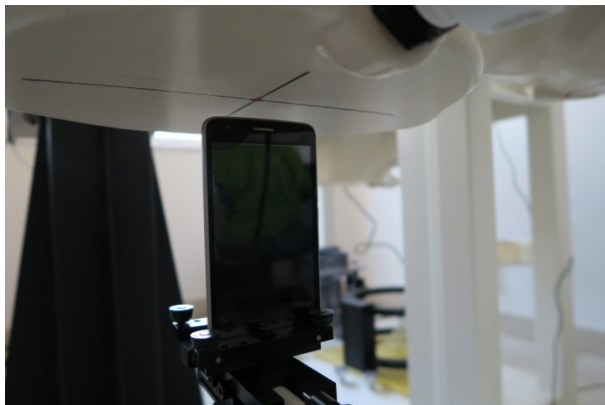

Hotspot mode - Top Side (10mm)

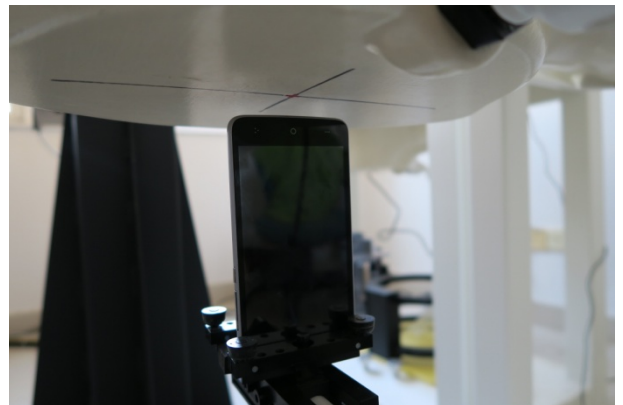

Hotspot mode - Bottom Side (10mm)

## **17. External and Internal Photos of the EUT**

Please reference to the report No.: TRE1511007601

-----End of Report-----