



TEST REPORT

APPLICANT : Jiangsu SEUIC Technology Co.,Ltd.

PRODUCT NAME : Portable Data Collection Terminal

MODEL NAME : CRUISE 1

BRAND NAME : CRUISE/SEUIC

FCC ID : 2AC68-CRUISE1P

STANDARD(S) : 47 CFR Part 15 Subpart C

RECEIPT DATE : 2018-10-15


TEST DATE : 2018-10-20 to 2018-10-31

ISSUE DATE : 2018-12-19

Edited by:


Zeng Xiaoying (Rapporteur)

Approved by:


Peng Huarui (Supervisor)

NOTE: This document is issued by MORLAB, the test report shall not be reproduced except in full without prior written permission of the company. The test results apply only to the particular sample(s) tested and to the specific tests carried out which is available on request for validation and information confirmed at our website.





DIRECTORY

1. Technical Information	4
1.1. Applicant and Manufacturer Information	4
1.2. Equipment Under Test (EUT) Description	4
1.3. Test Standards and Results	6
1.4. Environmental Conditions	6
2. 47 CFR Part 15C Requirements	7
2.1. Antenna requirement	7
2.2. Number of Hopping Frequency	7
2.3. Peak Output Power	11
2.4. 20dB Bandwidth	18
2.5. Carried Frequency Separation	25
2.6. Time of Occupancy (Dwell time)	28
2.7. Conducted Spurious Emissions	35
2.8. Conducted Emission	48
2.9. Restricted Frequency Bands	52
2.10. Radiated Emission	61
Annex A Test Uncertainty	74
Annex B Testing Laboratory Information	75



REPORT No.: SZ18090337W02

Change History		
Version	Date	Reason for change
1.0	2018-12-19	First edition



1. Technical Information

Note: Provide by applicant.

1.1. Applicant and Manufacturer Information

Applicant:	Jiangsu SEUIC Technology Co.,Ltd.
Applicant Address:	NO.15 Xinghuo Road,Nanjing New & High Technology Industry Development Zone,210061,Nanjing City,Jiangsu Province,China
Manufacturer:	Jiangsu SEUIC Technology Co.,Ltd.
Manufacturer Address:	NO.15 Xinghuo Road,Nanjing New & High Technology Industry Development Zone,210061,Nanjing City,Jiangsu Province,China

1.2. Equipment Under Test (EUT) Description

Product Name:	Portable Data Collection Terminal	
Serial No:	(N/A, marked #1 by test site)	
Hardware Version:	SLB761_MB_V1.02_PCB	
Software Version:	D700P_I_V1.1.5	
Modulation Type:	FHSS (GFSK(1Mbps), $\pi/4$ -DQPSK(EDR 2Mbps), 8-DPSK(EDR 3Mbps))	
Operating Frequency Range:	The frequency range used is 2402MHz – 2480MHz (79 channels, at intervals of 1MHz);	
Bluetooth Version:	Bluetooth classic	
Antenna Type:	PIFA Antenna	
Antenna Gain:	-2.5 dBi	
Accessory Information:	Battery	
	Brand Name:	N/A
	Model No.:	BT01700CRUISE
	Serial No.:	(N/A, marked #1 by test site)
	Capacity:	4500mAh
	Rated Voltage:	3.8V
	Charge Limit:	4.35V



Accessory Information:	AC Adapter	
	Brand Name:	SHENZHEN TIANYIN ELECTRONICS CO.,LTD
	Model No.:	TPA-23A050200UU01
	Serial No.:	(N/A, marked #1 by test site)
	Rated Input:	100-240V ~ 50/60Hz 0.3A
	Rated Output:	5V=2.0A

Note 1: The EUT contains Bluetooth Module operating at 2.4GHz ISM band; the frequencies is $F(\text{MHz})=2402+1*n$ ($0 \leq n \leq 78$). The lowest, middle, highest channel numbers of the Bluetooth Module used and tested in this report are separately 0 (2402MHz), 39 (2441MHz) and 78 (2480MHz).

Note 2: The EUT connected to the serial port of the computer with a serial communication cable, we use the dedicated software to control the EUT into the test mode, and then use MT8852B base station to control the EUT continuous transmission.

Note 3: For a more detailed description, please refer to Specification or User's Manual supplied by the applicant and/or manufacturer.



1.3. Test Standards and Results

The objective of the report is to perform testing according to 47 CFR Part 15 Subpart C for the EUT FCC ID Certification:

No	Identity	Document Title
1	47 CFR Part 15	Radio Frequency Devices

Test detailed items/section required by FCC rules and results are as below:

No.	Section in CFR 47	Description	Test Date	Test Engineer	Result
1	15.203	Antenna Requirement	N/A	N/A	PASS
2	15.247(a)	Number of Hopping Frequency	Oct 20, 2018	Wang Meng	PASS
3	15.247(b)	Peak Output Power	Oct 20, 2018	Wang Meng	PASS
4	15.247(a)	20dB Bandwidth	Oct 20, 2018	Wang Meng	PASS
5	15.247(a)	Carrier Frequency Separation	Oct 20, 2018	Wang Meng	PASS
6	15.247(a)	Time of Occupancy (Dwell time)	Oct 20, 2018	Wang Meng	PASS
7	15.247(d)	Conducted Spurious Emission	Oct 20, 2018	Wang Meng	PASS
8	15.207	Conducted Emission	Oct 27, 2018	Wang Dalong	PASS
9	15.247(d)	Restricted Frequency Bands	Oct 30, 2018	Wang Dalong	PASS
10	15.209, 15.247(d)	Radiated Emission	Oct 31, 2018	Wang Dalong	PASS

Note 1: The tests were performed according to the method of measurements prescribed in ANSI C63.10-2013.

Note 2: The path loss during the RF test is calibrated to correct the results by the offset setting in the test equipments. The Ref offset 1dB is the cable loss.

1.4. Environmental Conditions

During the measurement, the environmental conditions were within the listed ranges:

Temperature (°C):	15 - 35
Relative Humidity (%):	30 -60
Atmospheric Pressure (kPa):	86-106

2. 47 CFR Part 15C Requirements

2.1. Antenna requirement

2.1.1. Applicable Standard

According to FCC 15.203, an intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the provisions of this section.

2.1.2. Result: Compliant

The EUT has a permanently and irreplaceable attached antenna. Please refer to the EUT internal photos.


2.2. Number of Hopping Frequency

2.2.1. Requirement

According to FCC §15.247(a)(1)(iii), frequency hopping systems operating in the 2400MHz to 2483.5MHz bands shall use at least 15 hopping frequencies.

2.2.2. Test Description

A. Test Setup:

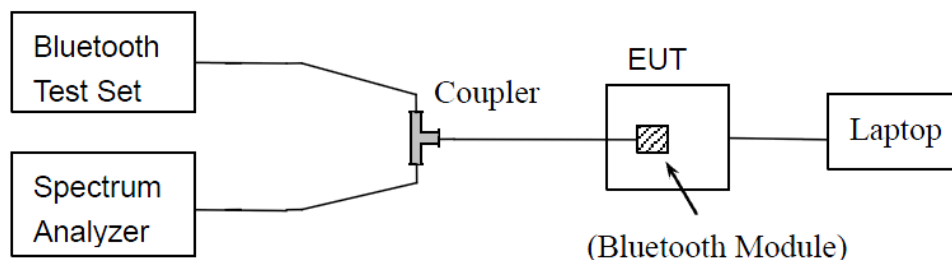

The Bluetooth Module of the EUT is coupled to the Spectrum Analyzer (SA) and the Bluetooth Test Set with Attenuators through the Power Splitter; the RF load attached to the EUT antenna terminal is 50Ohm; the path loss as the factor is calibrated to correct the reading. During the measurement, the Bluetooth Module of the EUT is activated and controlled by the SS, and is set to operate under test mode transmitting 339 bytes DH5 packages at maximum power.

**B. Equipments List:**

Please reference ANNEX A(1.5).

2.2.3. Test Procedure

The EUT must have its hopping function enabled. Use the following spectrum analyzer settings:

Span = the frequency band of operation

RBW \geq 1% of the span

VBW \geq RBW

Sweep = auto

Detector function = peak

Trace = max hold

Allow the trace to stabilize

2.2.4. Test Result


The Bluetooth Module operates at hopping-on test mode; the frequencies number employed is counted to verify the Module's using the number of hopping frequency.

A. Test Verdict:


Test Mode	Frequency Block (MHz)	Measured Channel Numbers	Min. Limit	Verdict
GFSK	2400 - 2483.5	79	15	PASS
$\pi/4$ -DQPSK	2400 - 2483.5	79	15	PASS
8-DPSK	2400 - 2483.5	79	15	PASS




B. Test Plots:

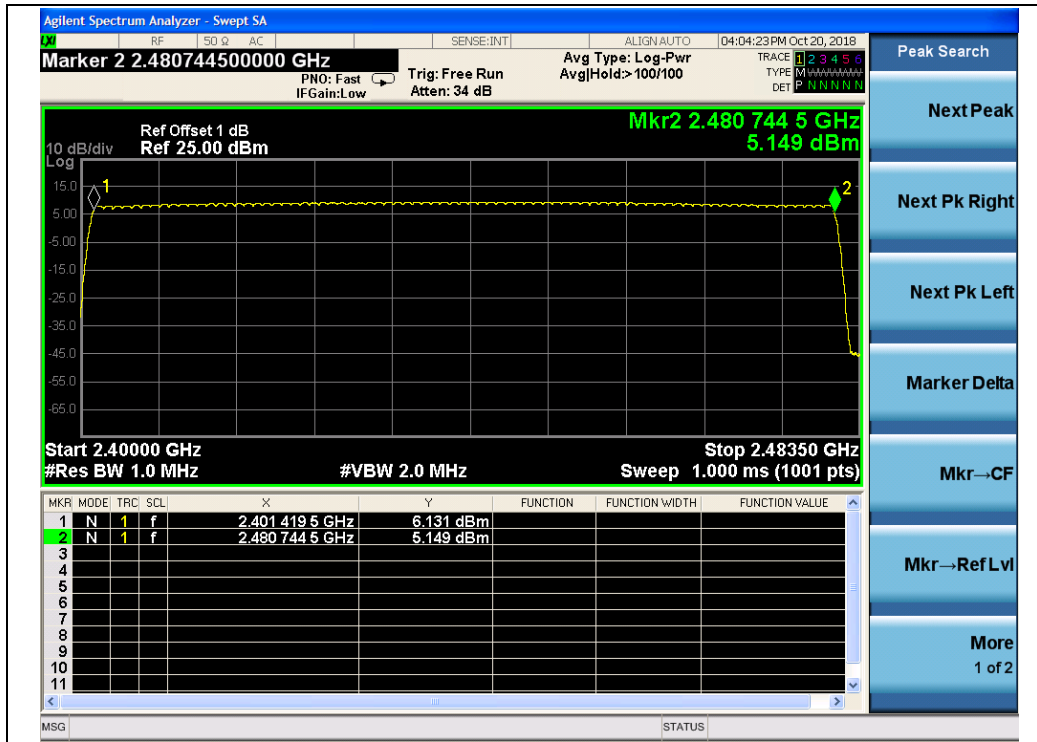

(GFSK)

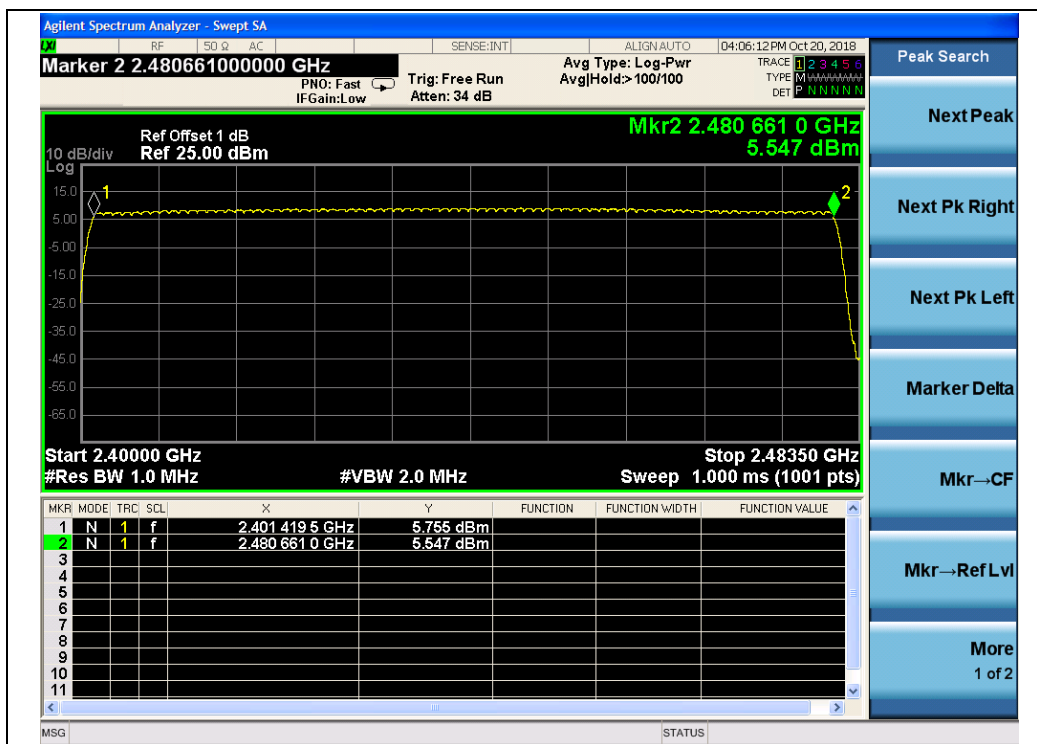 $(\pi/4\text{-DQPSK})$

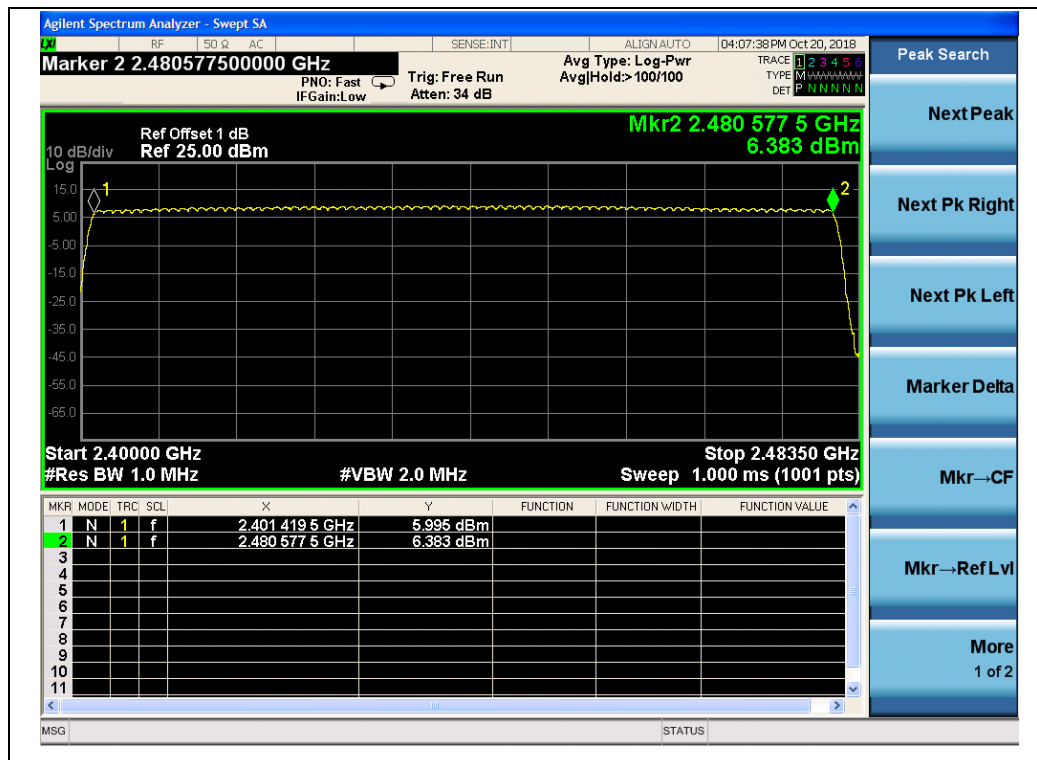

(8- DPSK)


2.3. Peak Output Power

2.3.1. Requirement

According to FCC §15.247(b)(1), for frequency hopping systems that operates in the 2400MHz to 2483.5MHz band employing at least 75 hopping channels, the maximum peak output power of the intentional radiator shall not exceed 1Watt. For all other frequency hopping systems in the 2400MHz to 2483.5MHz band, it is 0.125Watts.

2.3.2. Test Description

A. Test Setup:

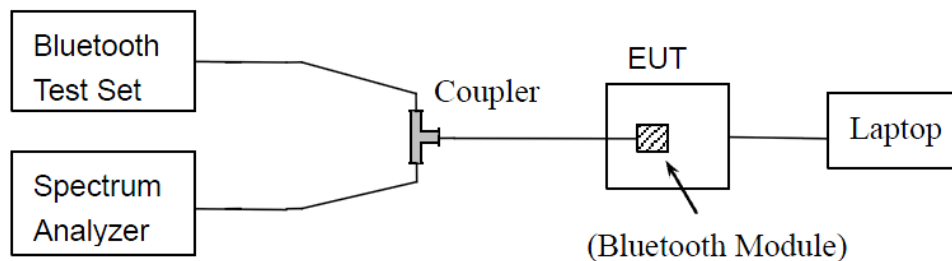

The Bluetooth Module of the EUT is coupled to the Spectrum Analyzer (SA) and the Bluetooth Test Set with Attenuators through the Power Splitter; the RF load attached to the EUT antenna terminal is 50Ohm; the path loss as the factor is calibrated to correct the reading. During the measurement, the Bluetooth Module of the EUT is activated and controlled by the SS, and is set to operate under test mode transmitting 339 bytes DH5 packages at maximum power.

B. Equipments List:

Please refer ANNEX A(1.5).

2.3.3. Test Result

The Bluetooth Module operates at hopping-off test mode. The lowest, middle and highest channels are selected to perform testing to verify the conducted RF output peak power of the module. The lowest, middle and highest channel were tested by USB Wideband Power Sensor.




GFSK Mode


A. Test Verdict:

Channel	Frequency (MHz)	Measured Output Peak Power		Limit		Verdict
		dBm	W	dBm	W	
0	2402	7.99	0.006	20.97	0.125	PASS
39	2441	9.41	0.009			PASS
78	2480	8.17	0.007			PASS


B. Test Plots:

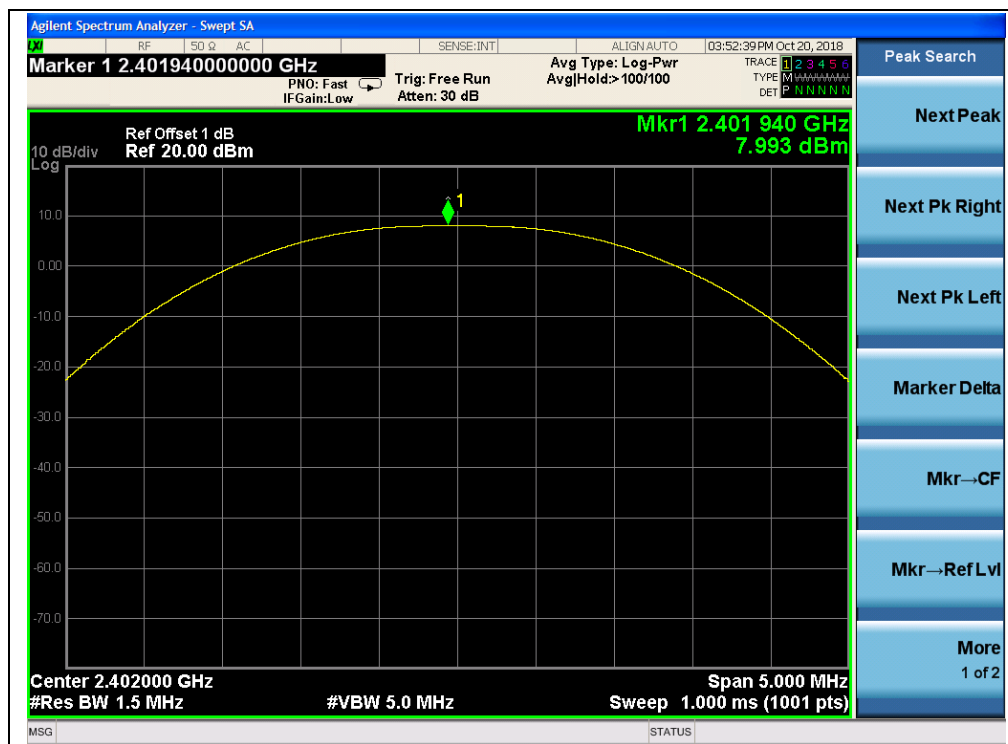

(GFSK, Channel 0, 2402MHz)

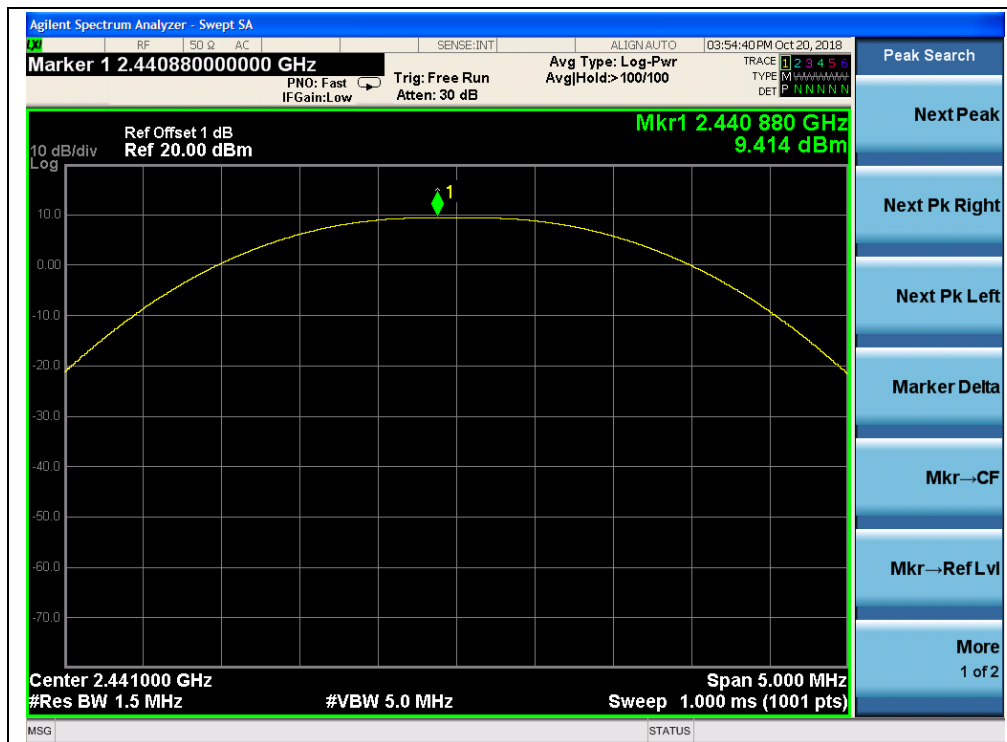

(GFSK, Channel 39, 2441MHz)

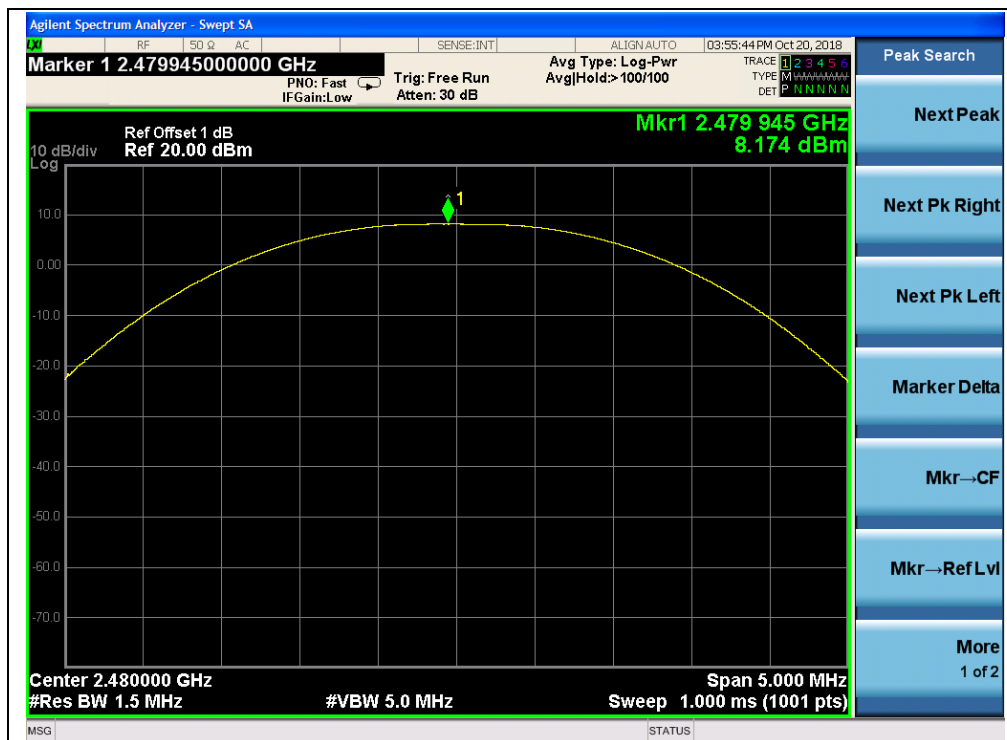

(GFSK, Channel 78, 2480MHz)




$\pi/4$ -DQPSK Mode



A. Test Verdict:

Channel	Frequency (MHz)	Measured Output Peak Power		Limit		Verdict
		dBm	W	dBm	W	
0	2402	7.84	0.006	20.97	0.125	PASS
39	2441	9.29	0.008			PASS
78	2480	8.09	0.006			PASS

B. Test Plots:

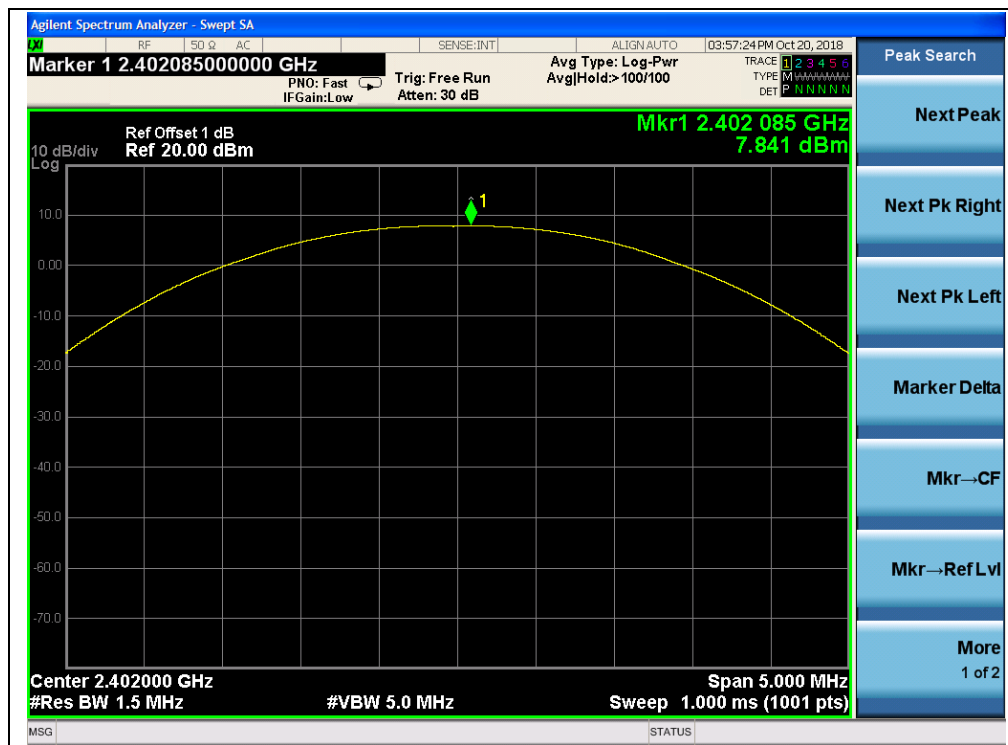


($\pi/4$ -DQPSK, Channel 0, 2402MHz)

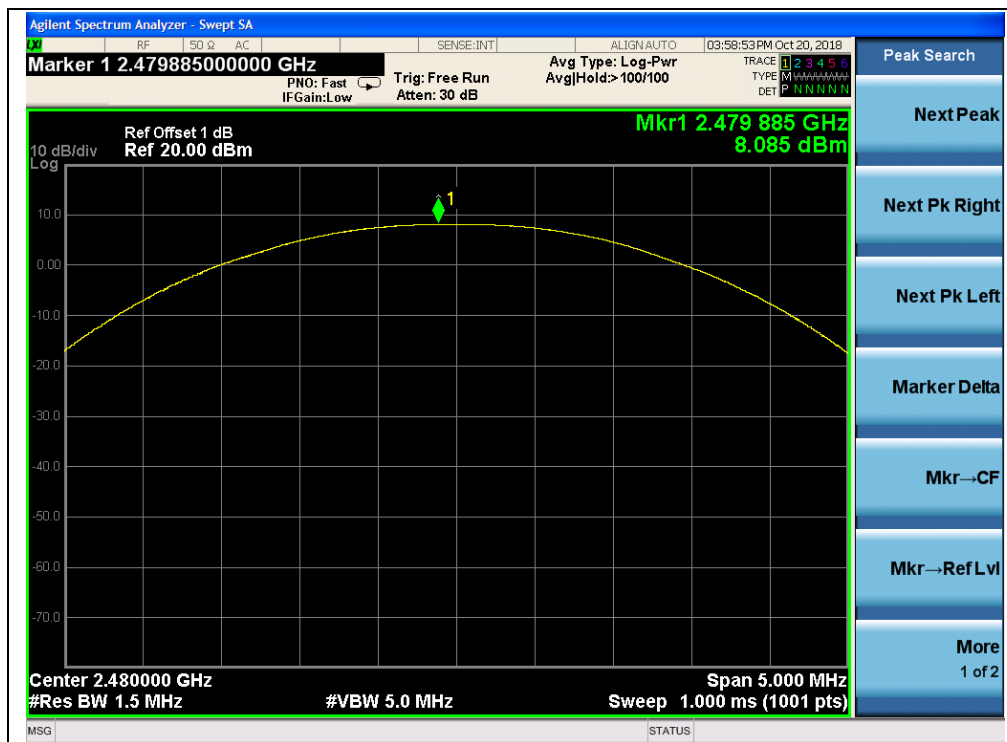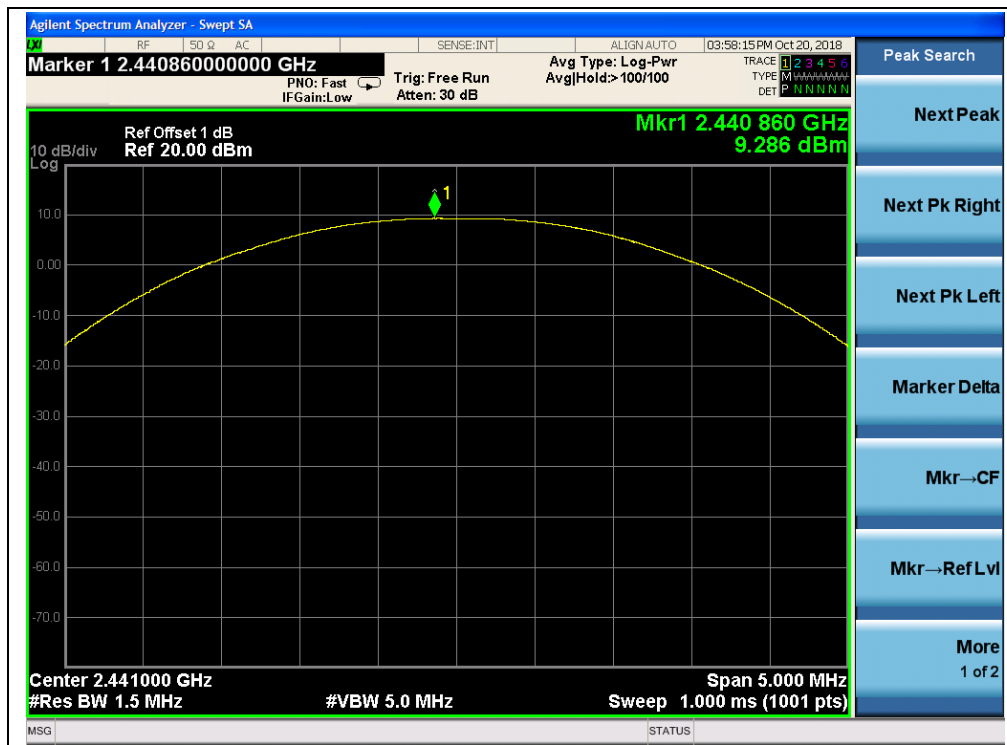


**8-DPSK Mode****A. Test Verdict:**


Channel	Frequency (MHz)	Measured Output Peak Power		Limit		Verdict
		dBm	W	dBm	W	
0	2402	8.03	0.006	20.97	0.125	PASS
39	2441	9.48	0.009			PASS
78	2480	8.28	0.007			PASS

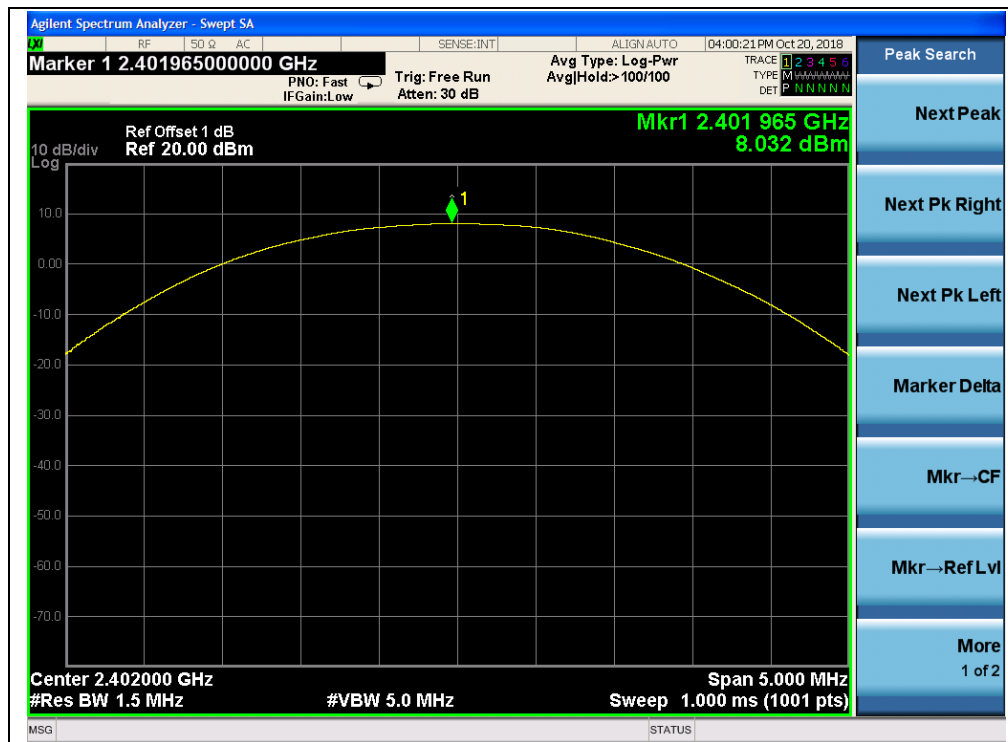B. Test Plots:

(8-DPSK, Channel 0, 2402MHz)

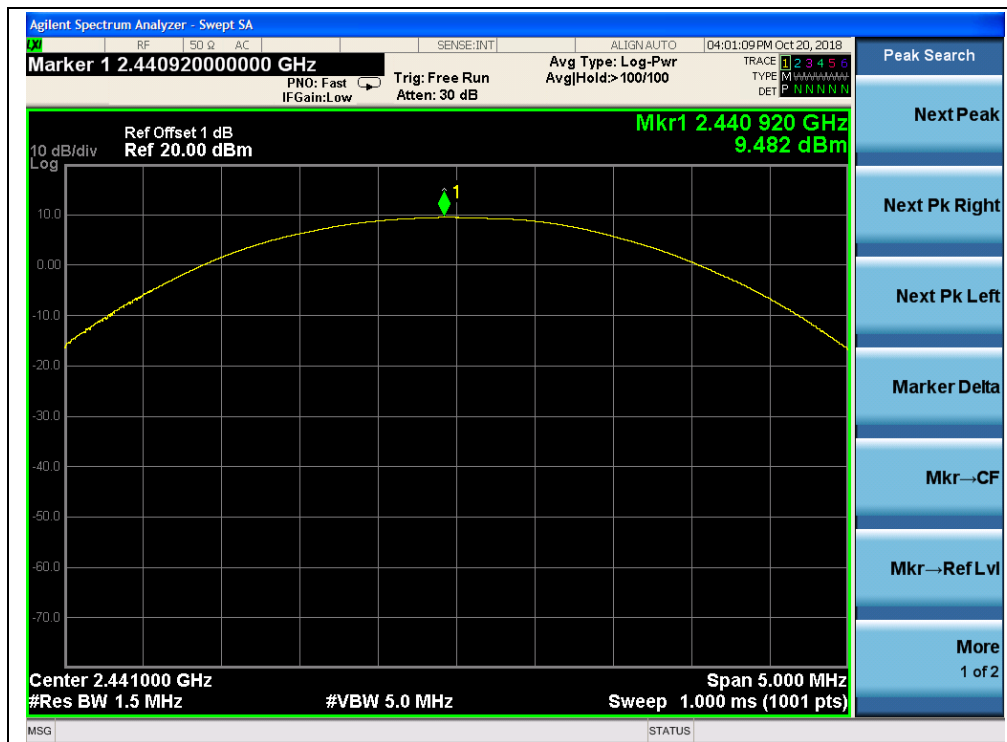

(8-DPSK, Channel 39, 2441MHz)

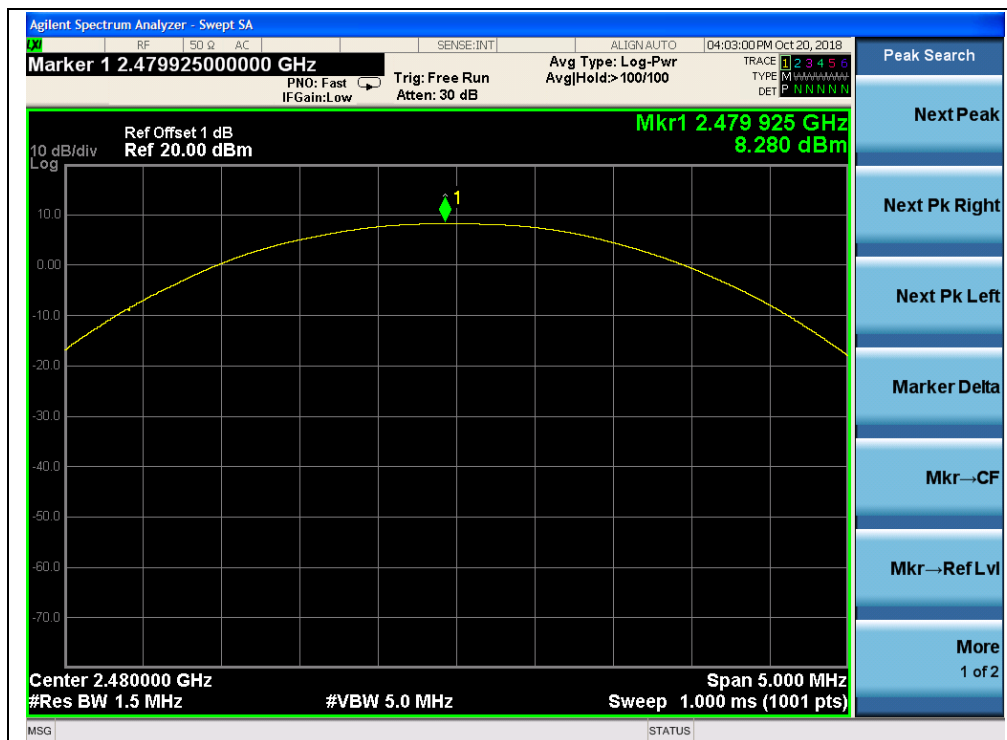

(8-DPSK, Channel 78, 2480MHz)


2.4. 20dB Bandwidth

2.4.1. Definition

According to FCC §15.247(a)(1), the 20dB bandwidth is known as the 99% emission bandwidth, or 20dB bandwidth ($10 \cdot \log 1\% = 20\text{dB}$) taking the total RF output power.

2.4.2. Test Description

A. Test Setup:

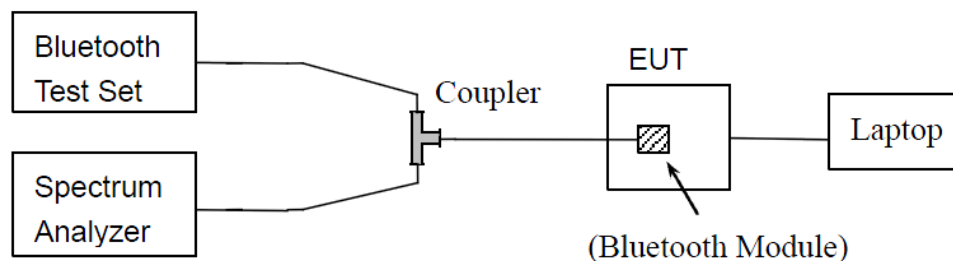

The Bluetooth Module of the EUT is coupled to the Spectrum Analyzer (SA) and the Bluetooth Test Set with Attenuators through the Power Splitter; the RF load attached to the EUT antenna terminal is 50Ohm; the path loss as the factor is calibrated to correct the reading. During the measurement, the Bluetooth Module of the EUT is activated and controlled by the SS, and is set to operate under test mode transmitting 339 bytes DH5 packages at maximum power.

B. Equipments List:

Please refer ANNEX A(1.5).

2.4.3. Test Procedure

Use the following spectrum analyzer settings:

Span = approximately 2 to 3 times the 20 dB bandwidth, centered on a hopping channel

RBW \geq 1% of the 20 dB bandwidth

VBW \geq RBW

Sweep = auto

Detector function = peak

Trace = max hold



2.4.4. Test Result

The Bluetooth Module operates at hopping-off test mode. The lowest, middle and highest channels are selected to perform testing to record the 20dB bandwidth of the Module.

GFSK Mode


A. Test Verdict:

Channel	Frequency (MHz)	20dB Bandwidth (MHz)	Result
0	2402	1.014	PASS
39	2441	1.015	PASS
78	2480	1.022	PASS

B. Test Plots:



(GFSK, Channel 0, 2402MHz)

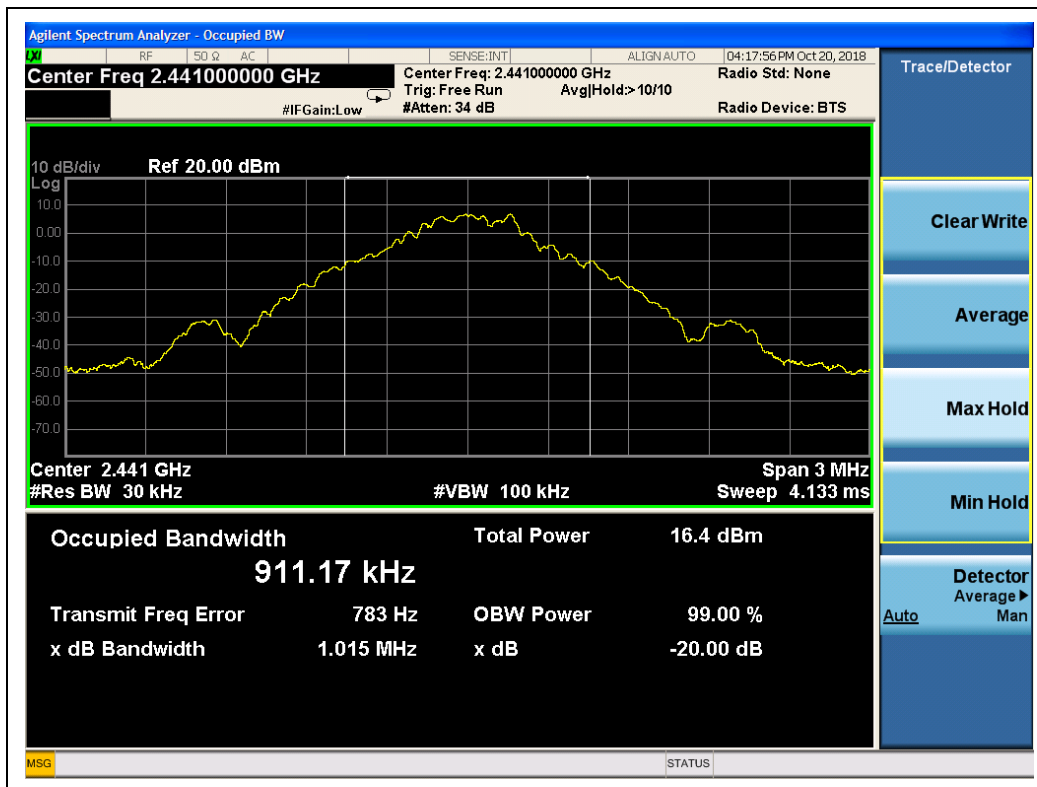

(GFSK, Channel 39, 2441MHz)




(GFSK, Channel 78, 2480MHz)

 $\pi/4$ -DQPSK Mode


A. Test Verdict:

Channel	Frequency (MHz)	20dB Bandwidth (MHz)	Result
0	2402	1.289	PASS
39	2441	1.308	PASS
78	2480	1.309	PASS


B. Test Plots:

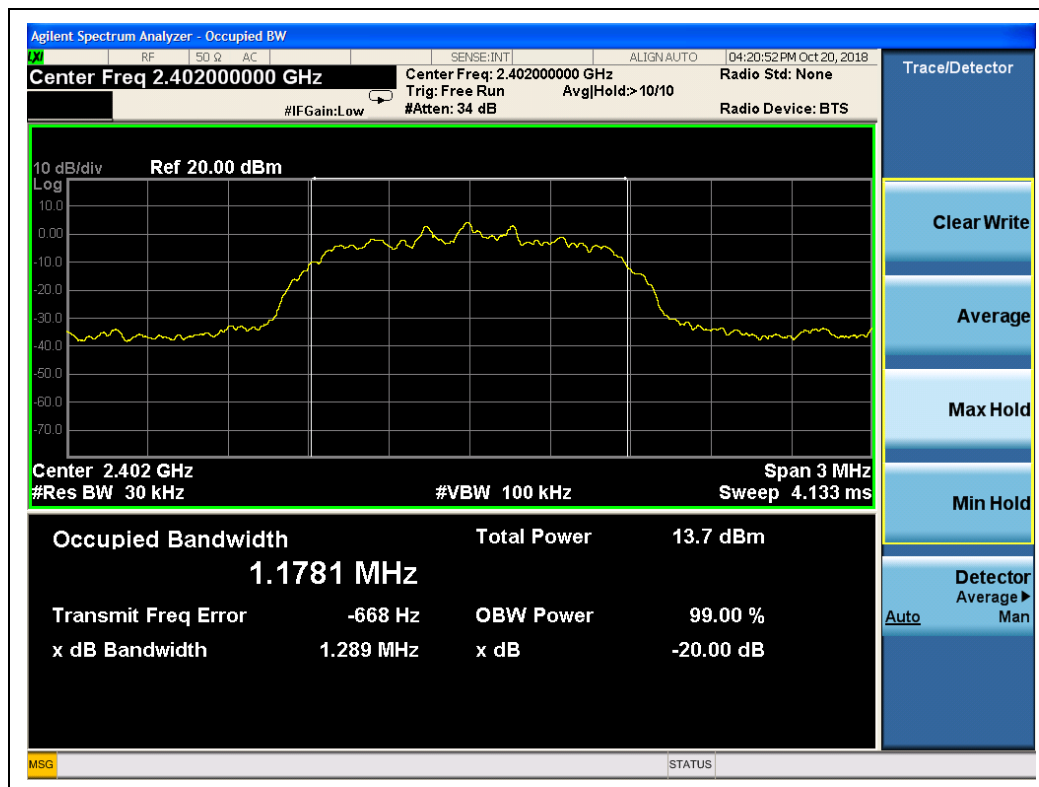

(π/4-DQPSK, Channel 0, 2402MHz)

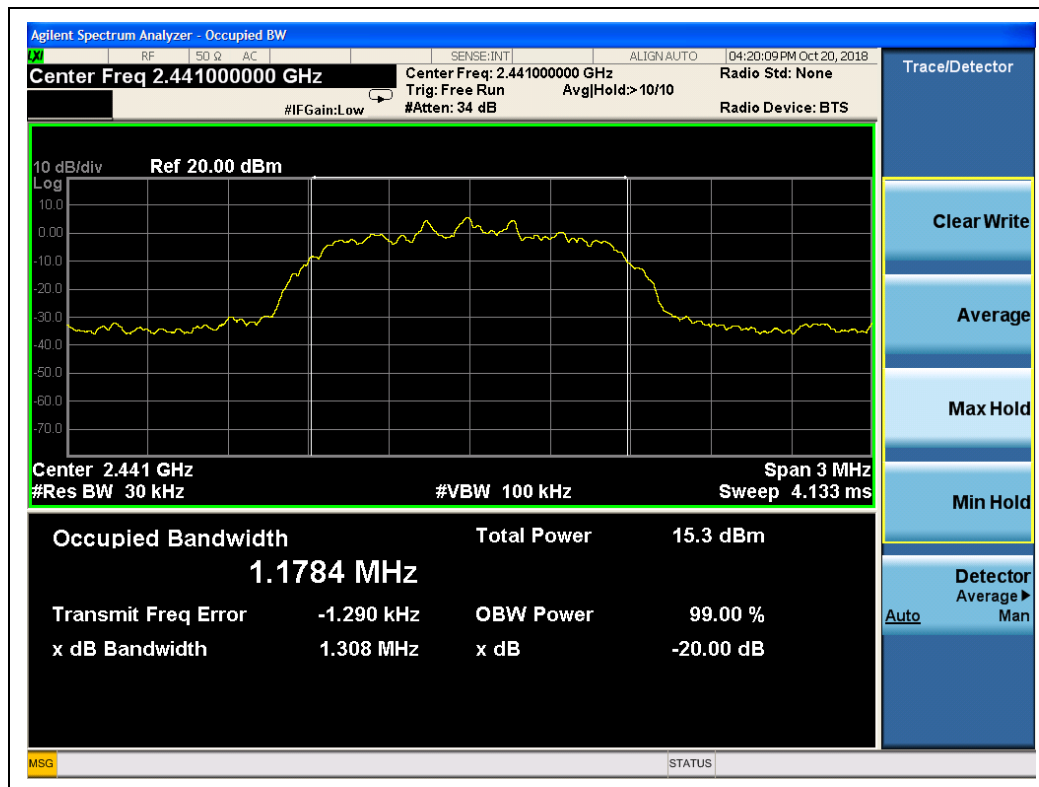


(π/4-DQPSK, Channel 39, 2441MHz)

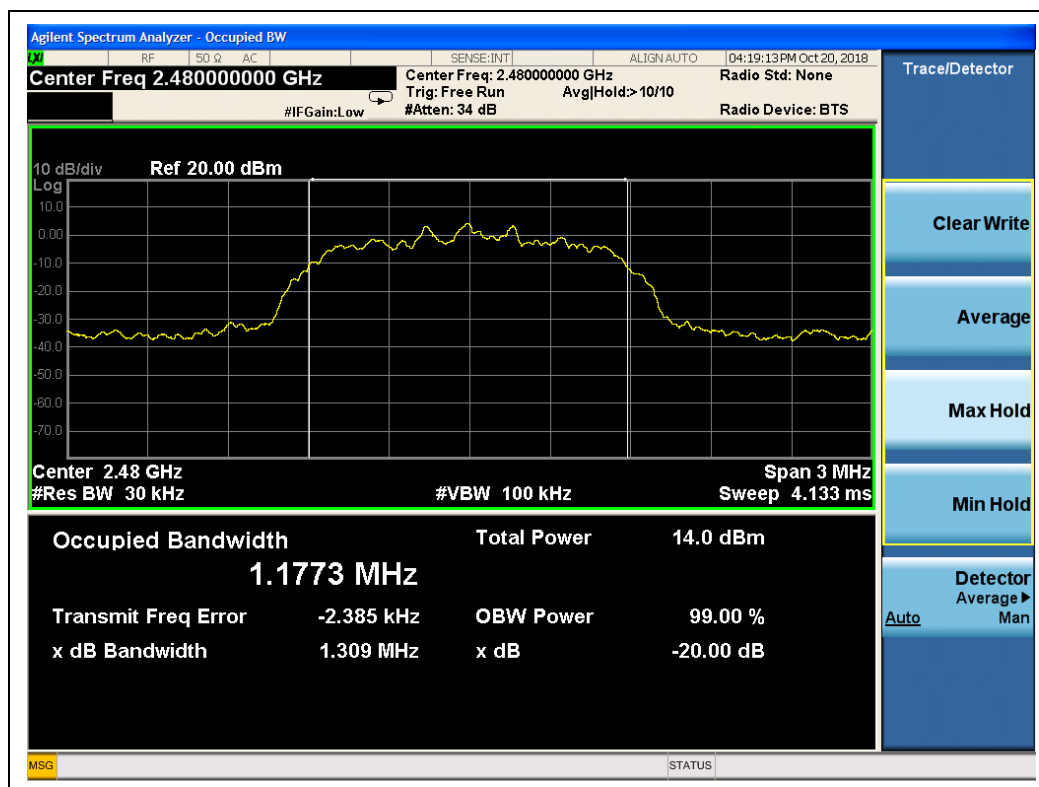


(π/4-DQPSK, Channel 78, 2480MHz)

**8-DPSK Mode****A. Test Verdict:**


Channel	Frequency (MHz)	20dB Bandwidth (MHz)	Result
0	2402	1.293	PASS
39	2441	1.298	PASS
78	2480	1.300	PASS

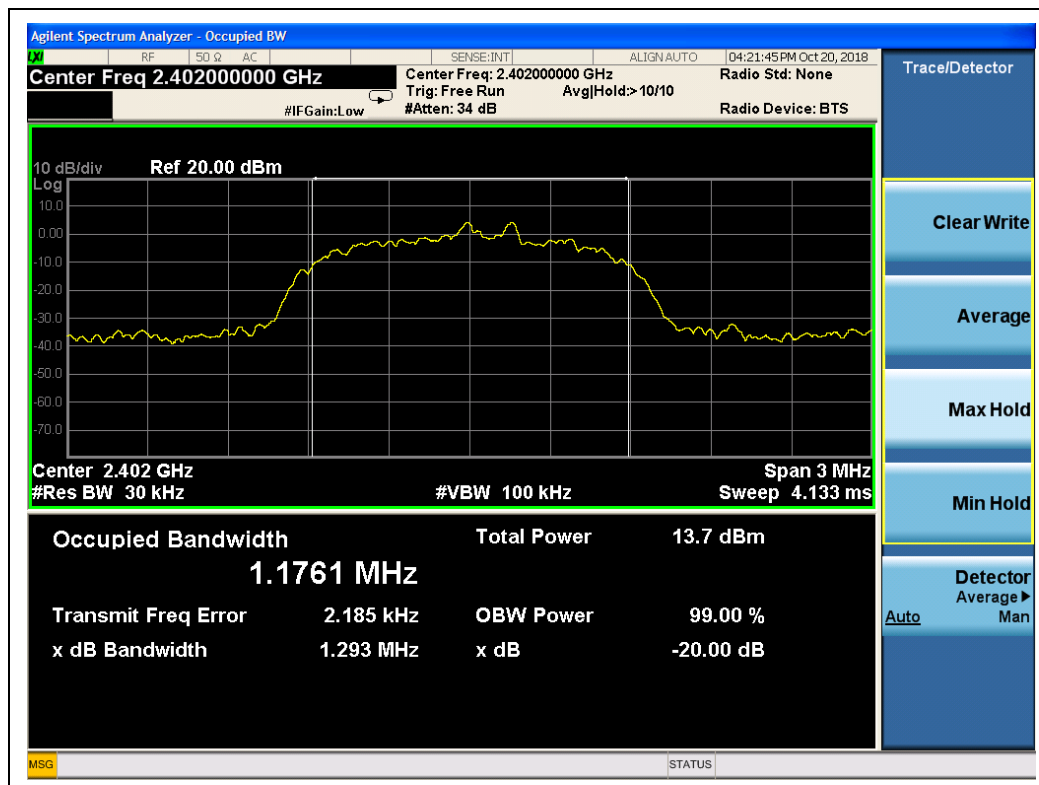B. Test Plots:

(8-DPSK, Channel 0, 2402MHz)

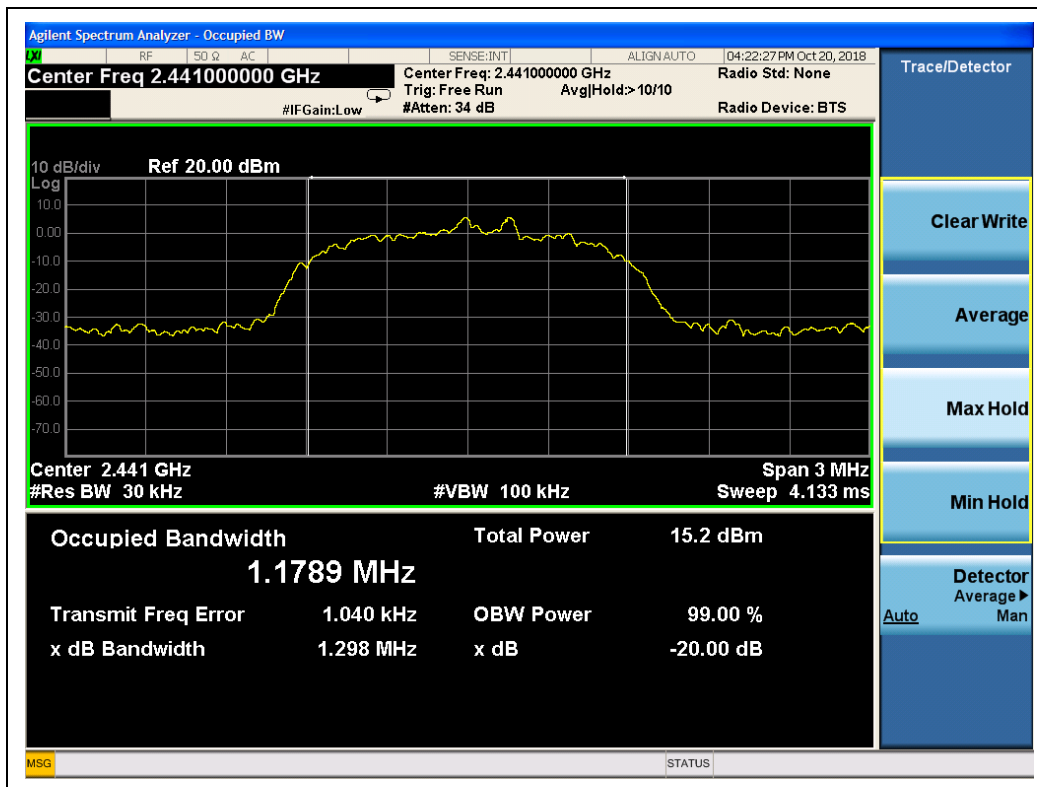

(8-DPSK, Channel 39, 2441MHz)

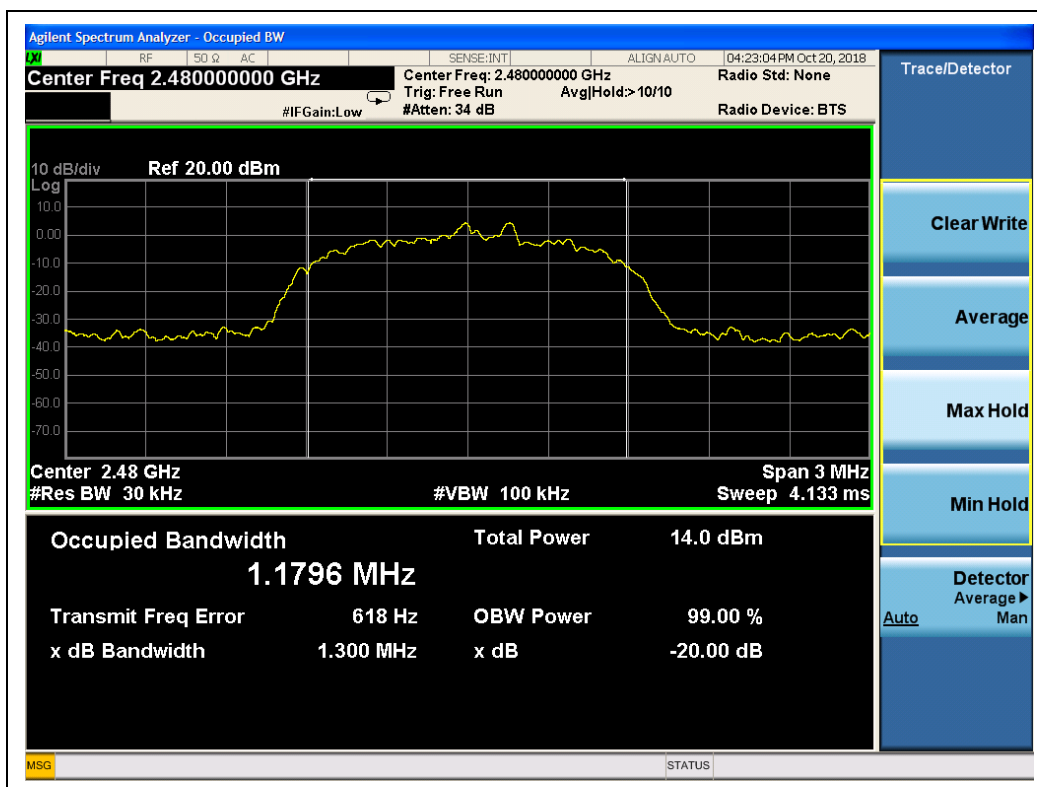

(8-DPSK, Channel 78, 2480MHz)


2.5. Carried Frequency Separation

2.5.1. Definition

According to FCC §15.247(a)(1), frequency hopping systems shall have hopping channel carrier frequencies separated by a minimum of 25kHz or two-thirds of the 20dB bandwidth of the hopping channel, whichever is greater.

2.5.2. Test Description

A. Test Setup:

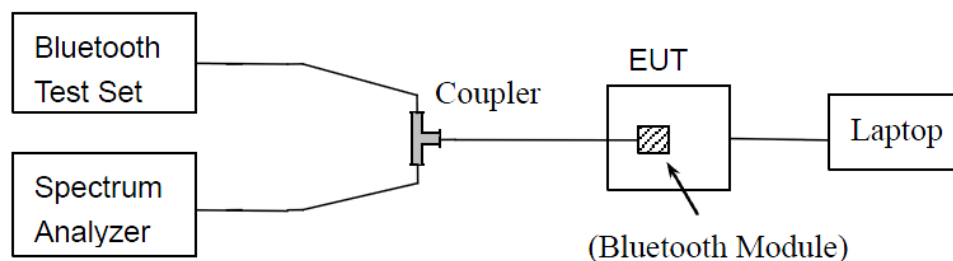

The Bluetooth Module of the EUT is coupled to the Spectrum Analyzer (SA) and the Bluetooth Test Set with Attenuators through the Power Splitter; the RF load attached to the EUT antenna terminal is 50Ohm; the path loss as the factor is calibrated to correct the reading. During the measurement, the Bluetooth Module of the EUT is activated and controlled by the SS, and is set to operate under test mode transmitting 339 bytes DH5 packages at maximum power.

B. Equipments List:

Please refer ANNEX A(1.5).

2.5.3. Test Procedure

The EUT must have its hopping function enabled. Use the following spectrum analyzer settings:

Span = wide enough to capture the peaks of two adjacent channels

Resolution (or IF) Bandwidth (RBW) $\geq 1\%$ of the span

Video (or Average) Bandwidth (VBW) \geq RBW

Sweep = auto

Detector function = peak


Trace = max hold

Allow the trace to stabilize. Use the marker-delta function to determine the separation between the peaks of the adjacent channels.



2.5.4. Test Result

The Bluetooth Module operates at hopping-on test mode. For any adjacent channels (e.g. the channel 39 and 40 as showed below), the Module does have hopping channel carrier frequencies separated by a minimum of 25kHz or two-thirds of the 20dB bandwidth of the hopping channel (refer to section 2.4.4), whichever is greater. So, the verdict is PASSING.

Test Mode	Measured Channel Numbers	Carried Frequency Separation	20dB bandwidth (MHz)	Min. Limit	Verdict
GFSK	39 and 40	1.020	1.014	two-thirds of the 20dB bandwidth	PASS
$\pi/4$ -DQPSK	39 and 40	1.008	1.289		PASS
8-DPSK	39 and 40	1.008	1.293		PASS

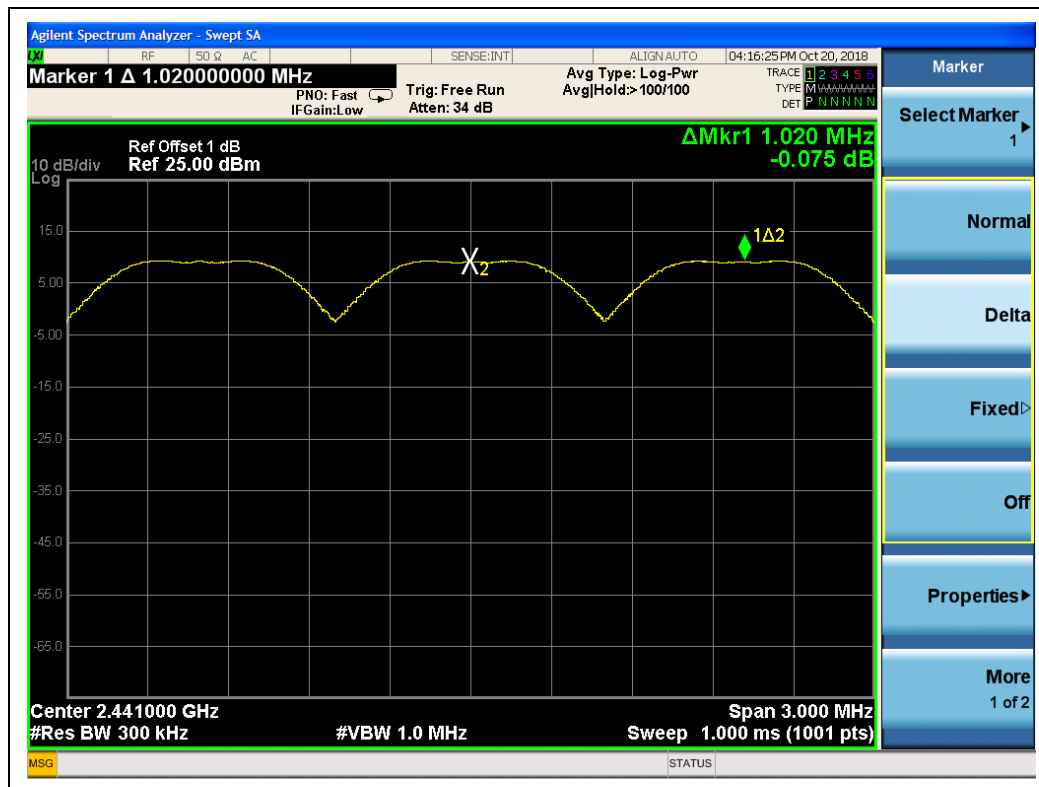

(GFSK)

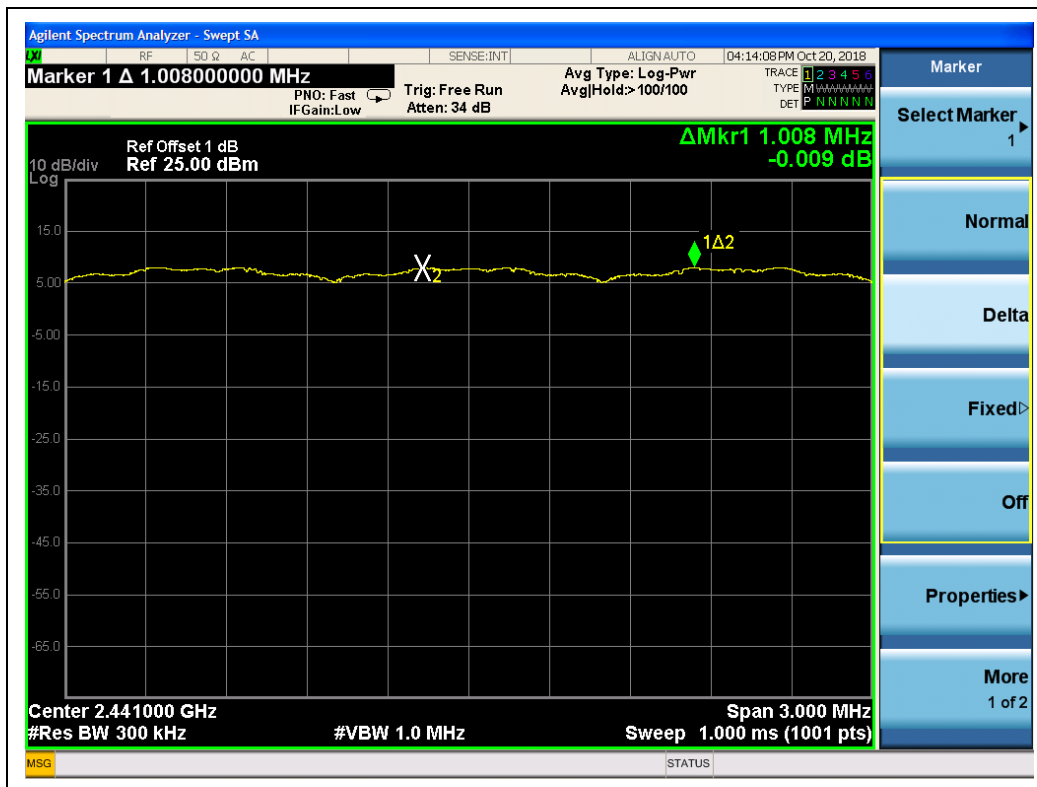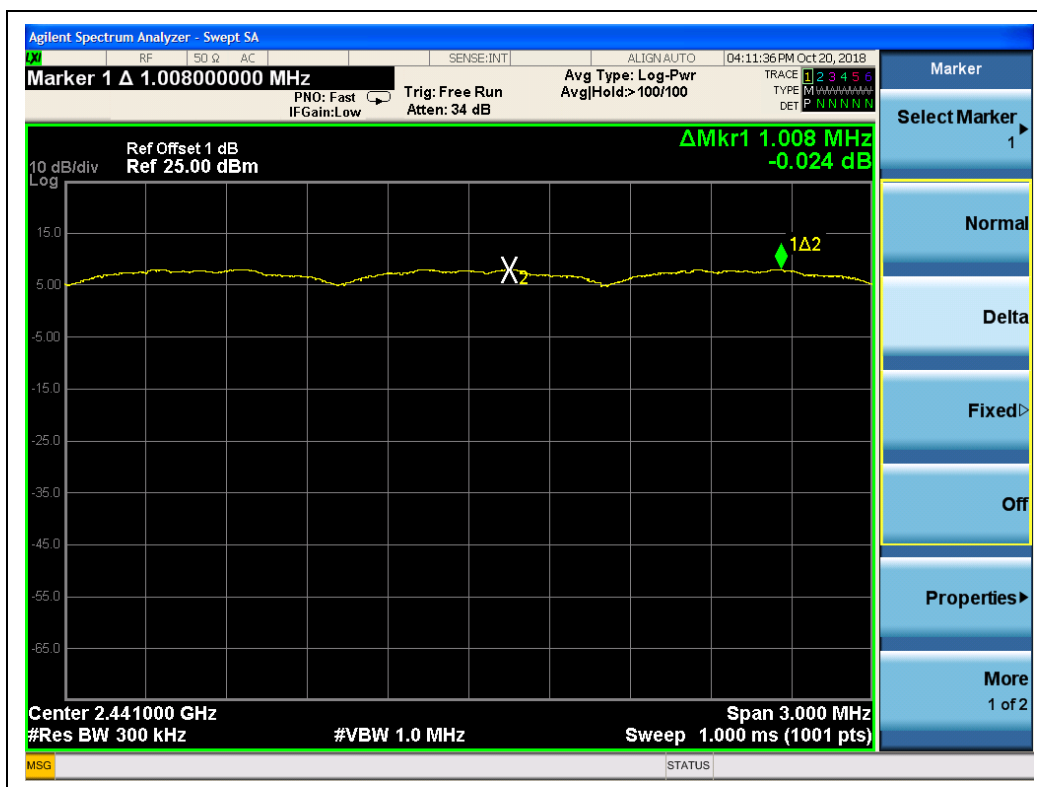 $(\pi/4\text{-DQPSK})$  (8-DPSK)


2.6. Time of Occupancy (Dwell time)

2.6.1. Requirement

According to FCC §15.247(a) (1) (iii), frequency hopping systems in the 2400 - 2483.5MHz band shall use at least 15 non-overlapping channels. The average time of occupancy on any channel shall not be greater than 0.4 seconds within a period of 0.4 seconds multiplied by the number of hopping channels employed. Frequency hopping systems may avoid or suppress transmissions on a particular hopping frequency provided that a minimum of 15 channels are used.

2.6.2. Test Description

A. Test Setup:

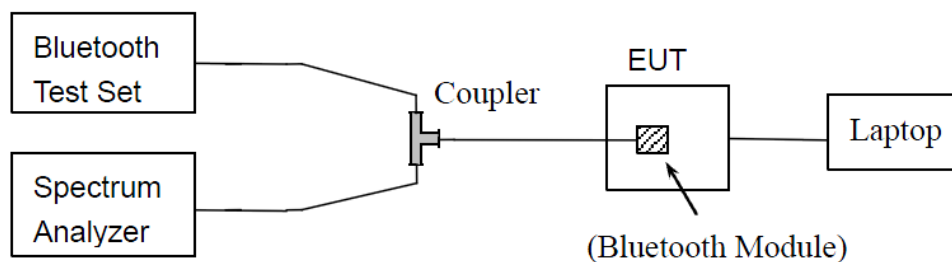

The Bluetooth Module of the EUT is coupled to the Spectrum Analyzer (SA) and the Bluetooth Test Set with Attenuators through the Power Splitter; the RF load attached to the EUT antenna terminal is 50Ohm; the path loss as the factor is calibrated to correct the reading. During the measurement, the Bluetooth Module of the EUT is activated and controlled by the SS, and is set to operate under test mode transmitting 339 bytes DH5 packages at maximum power.

B. Equipments List:

Please refer ANNEX A(1.5).

2.6.3. Test Procedure

Option 1:

DH1: Dwell time equal to Pulse time (ms) * (1600 / 2 / 79) * 31.6 Millisecond
DH3: Dwell time equal to Pulse time (ms) * (1600 / 4 / 79) * 31.6 Millisecond
DH5: Dwell time equal to Pulse Time (ms) * (1600 / 6 / 79) * 31.6 Millisecond



AFH Mode:

DH1: Dwell time equal to Pulse time (ms) * (800 / 2 / 20) * (0.4 * 20) Millisecond
DH3: Dwell time equal to Pulse time (ms) * (800 / 4 / 20) * (0.4 * 20) Millisecond
DH5: Dwell time equal to Pulse Time (ms) * (800 / 6 / 20) * (0.4 * 20) Millisecond


2.6.4. Test Result

GFSK Mode


A. Test Verdict:

DH Packet	Pulse Width (ms)	Dwell Time (ms)		Limit (sec)	Verdict
		Normal Mode	AFH Mode		
DH1	0.38	121.60	60.80	0.4	PASS
DH3	1.64	262.40	131.20		PASS
DH5	2.88	307.20	153.60		PASS


B. Test Plots:

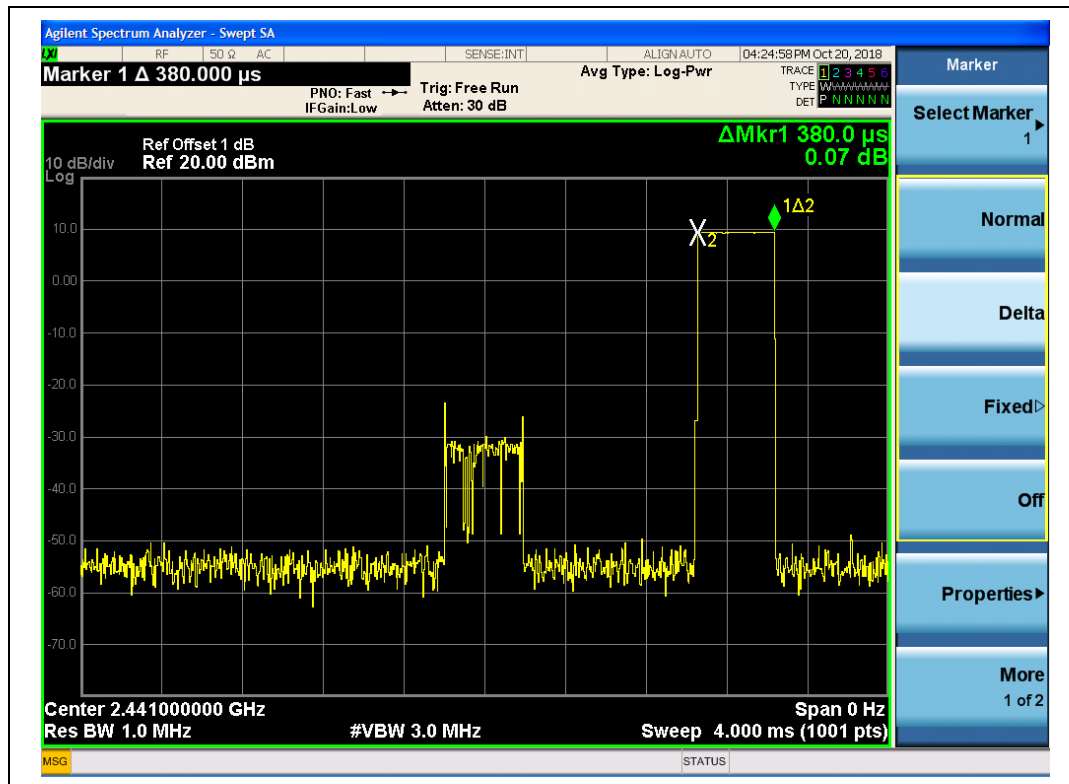

(DH1, GFSK)

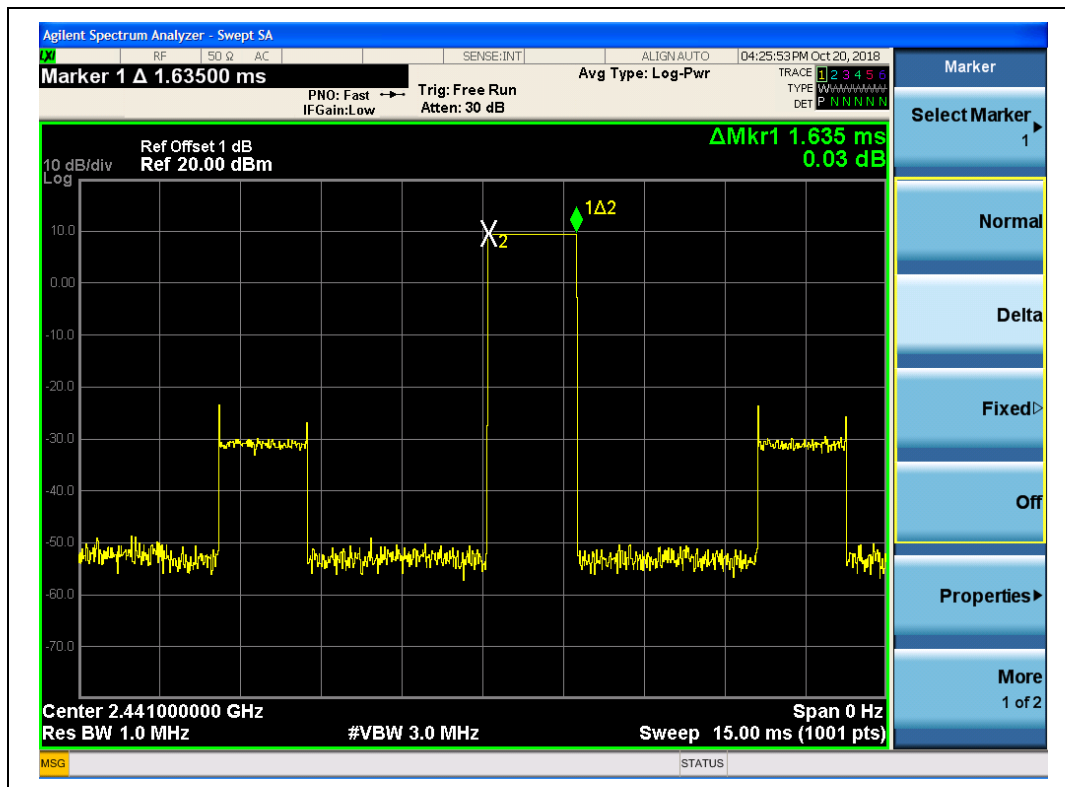

(DH3, GFSK)

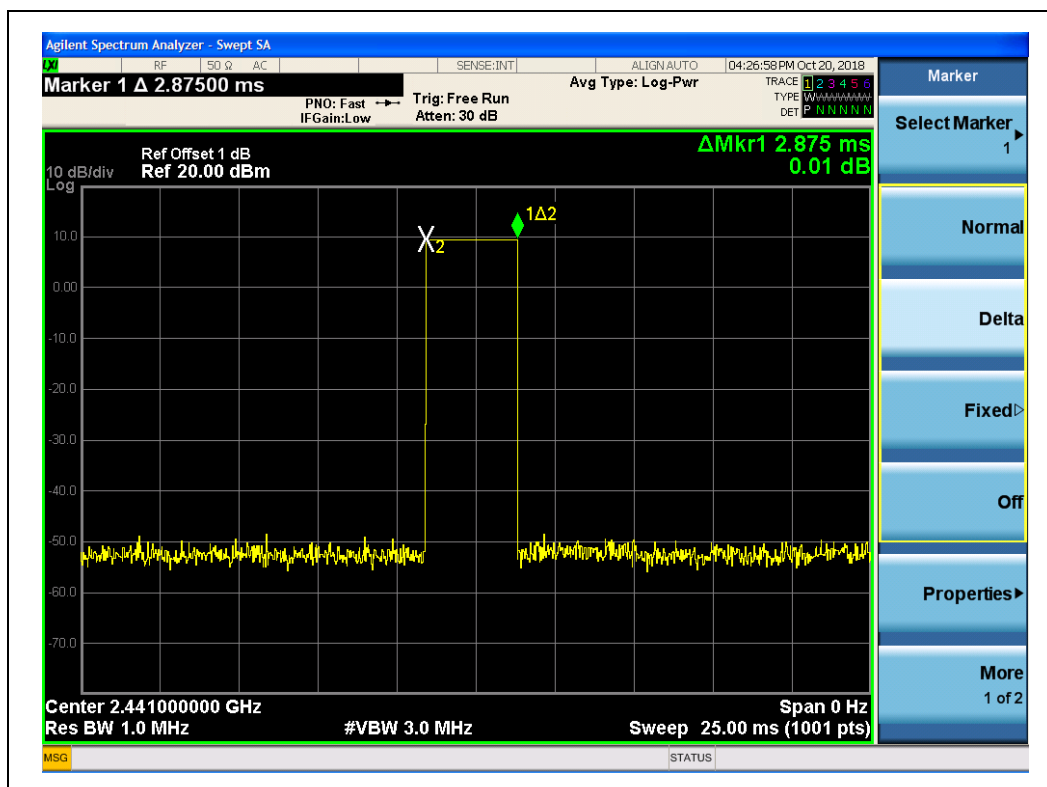

(DH5, GFSK)




$\pi/4$ -DQPSK Mode



A. Test Verdict:

DH Packet	Pulse Width (ms)	Dwell Time (ms)		Limit (sec)	Verdict
		Normal Mode	AFH Mode		
DH1	0.38	121.60	60.80	0.4	PASS
DH3	1.64	262.40	131.20		PASS
DH5	2.88	307.20	153.60		PASS

B. Test Plots:

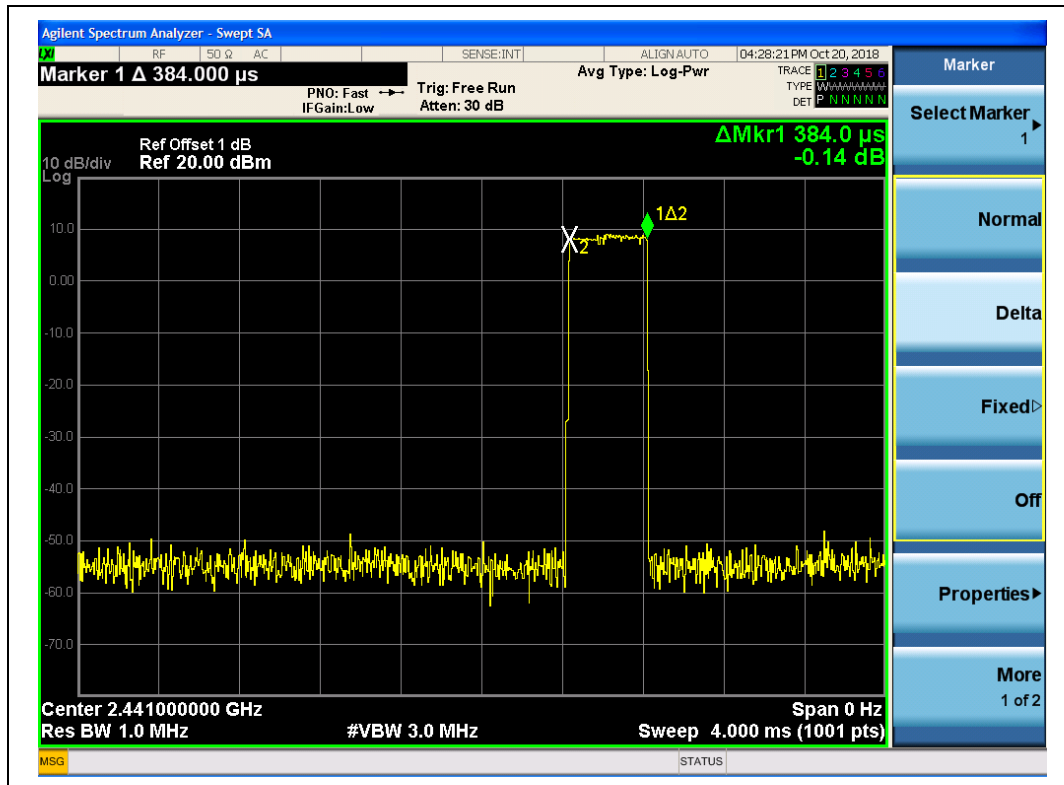

(DH1, $\pi/4$ -DQPSK)

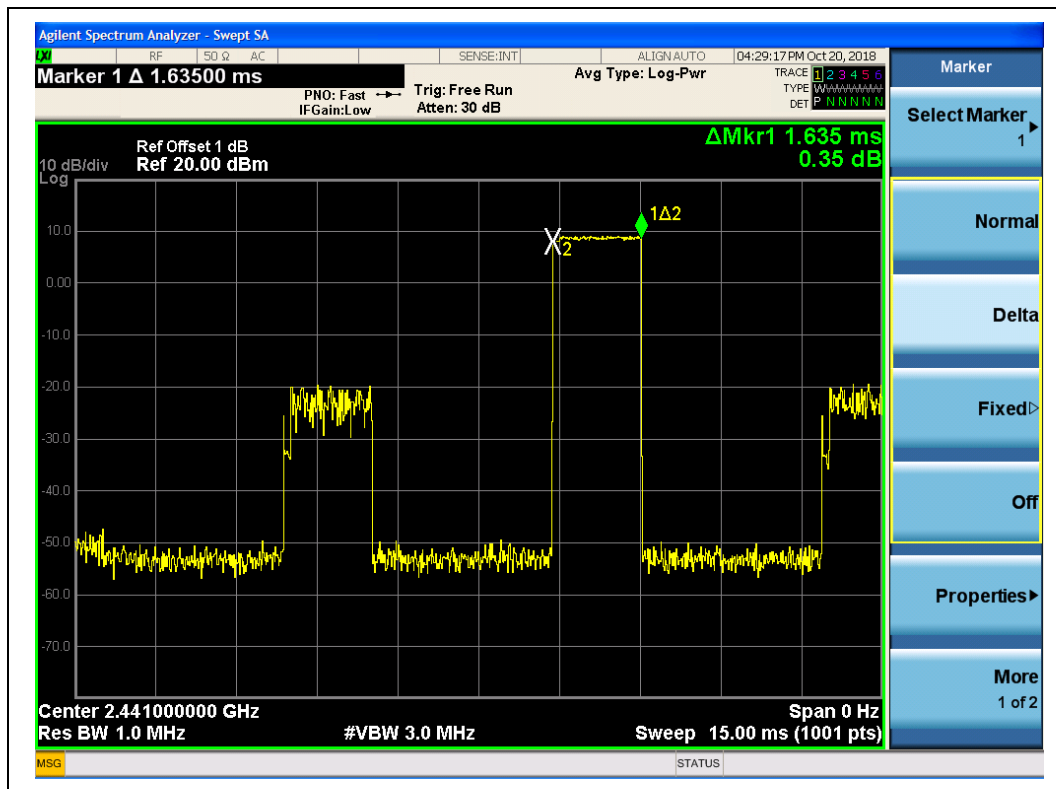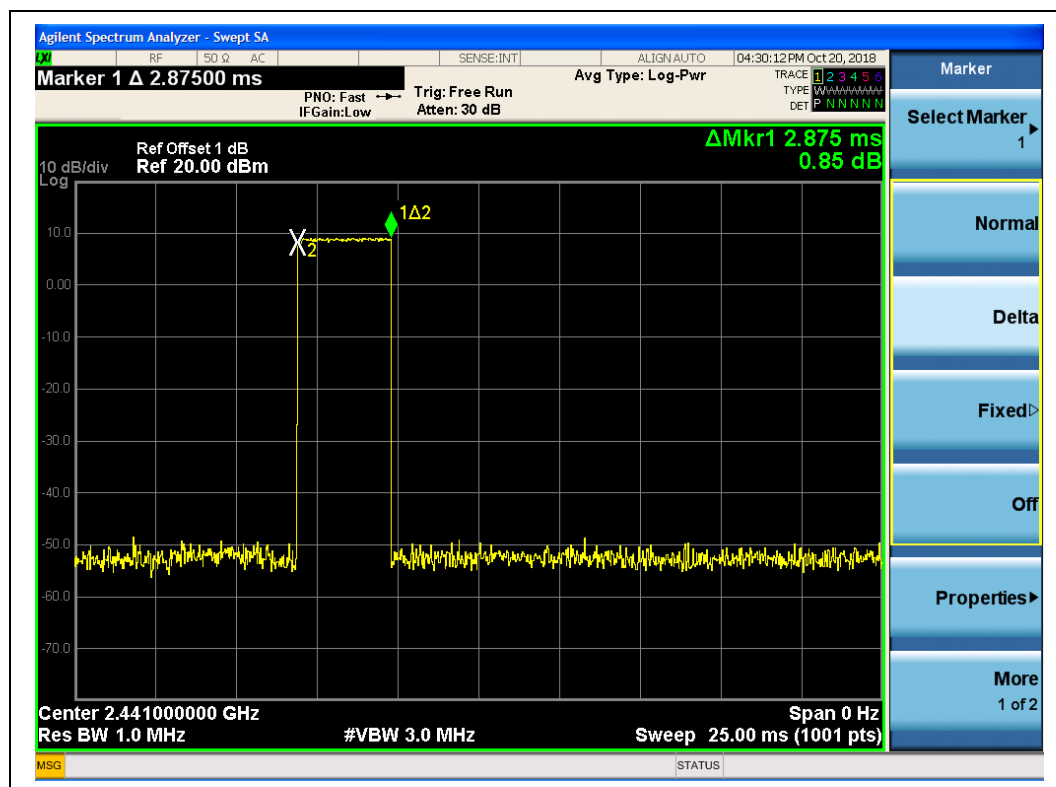
(DH3, $\pi/4$ -DQPSK)

(DH5, $\pi/4$ -DQPSK)




8-DPSK mode


A. Test Verdict:

DH Packet	Pulse Width (ms)	Dwell Time (ms)		Limit (sec)	Verdict
		Normal Mode	AFH Mode		
DH1	0.38	121.60	60.80	0.4	PASS
DH3	1.64	262.40	131.20		PASS
DH5	2.90	309.33	154.67		PASS


B. Test Plots:

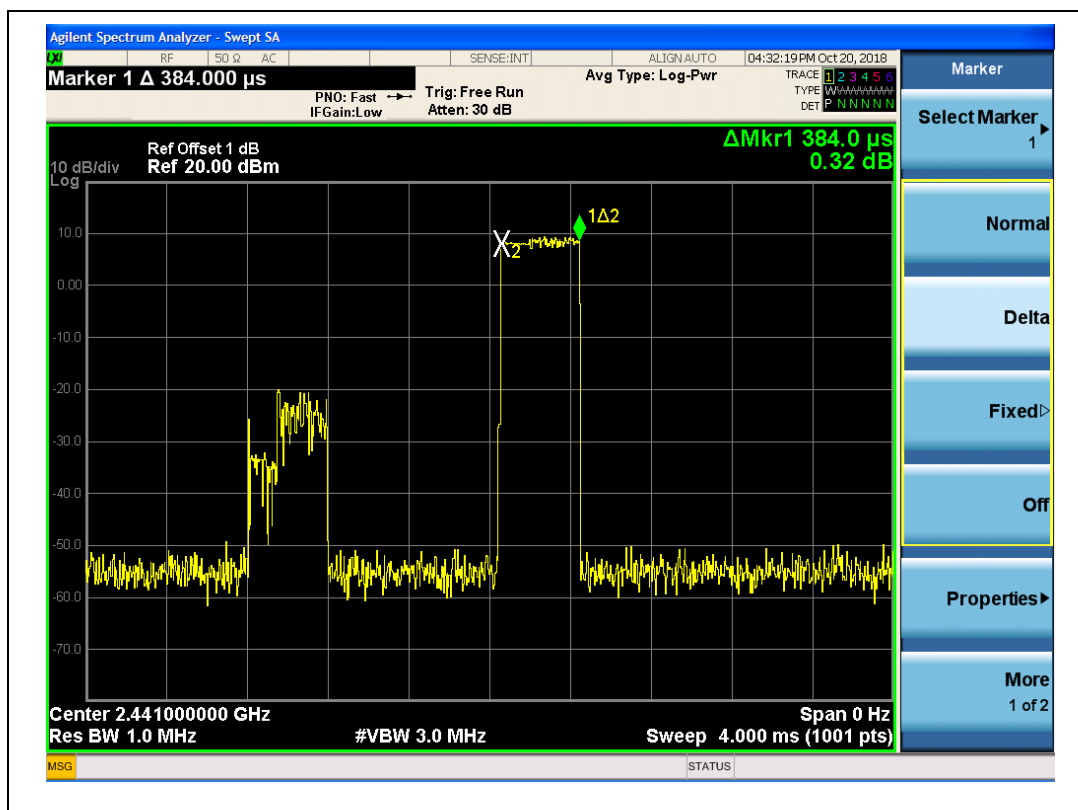

(DH1, 8-DPSK)

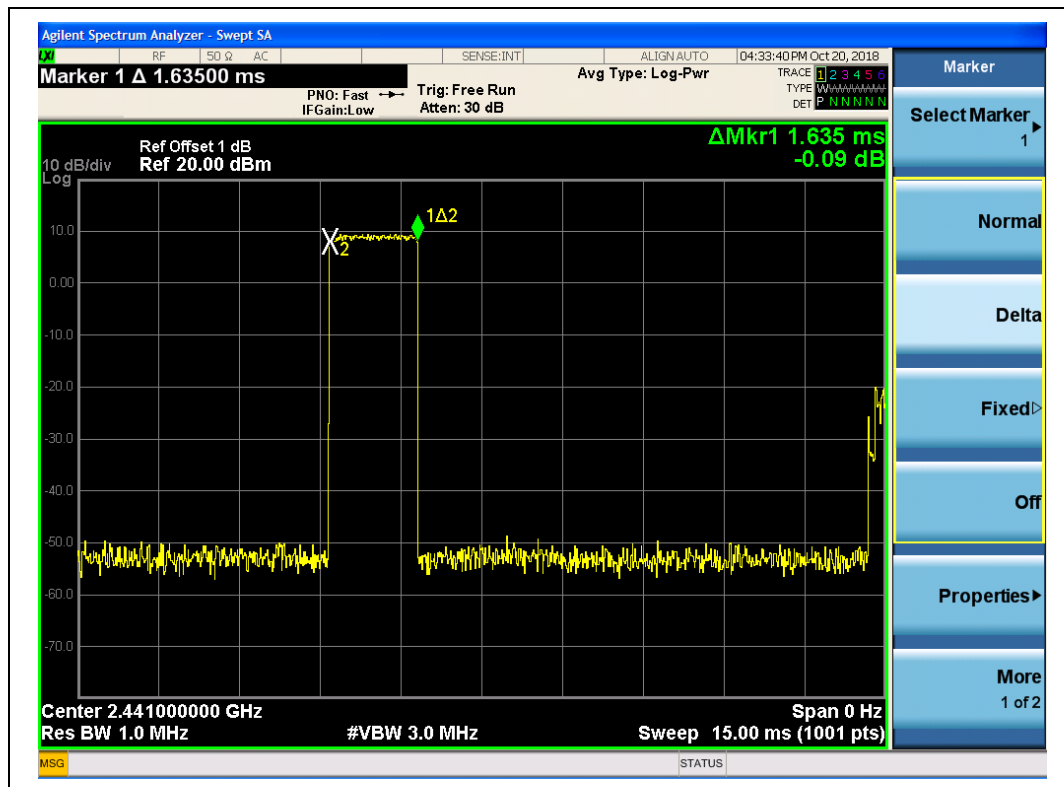

(DH3, 8-DPSK)

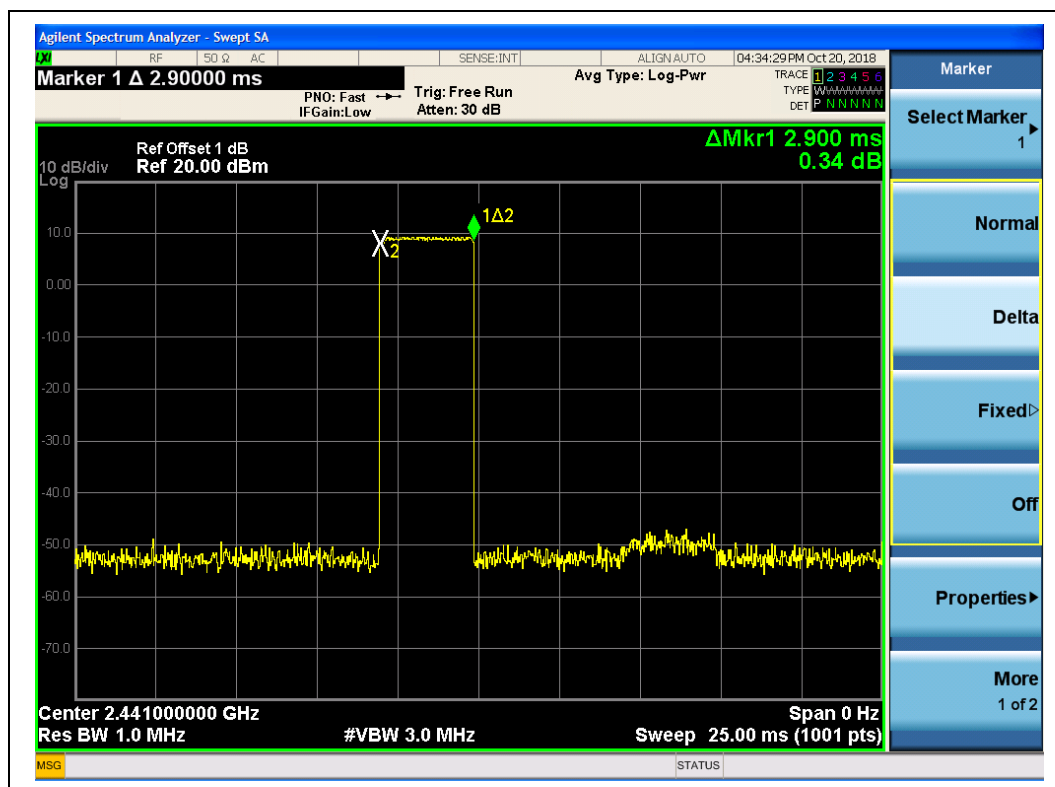

(DH5, 8-DPSK)


2.7. Conducted Spurious Emissions

2.7.1. Requirement

According to FCC §15.247(d), in any 100kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20dB below that in the 100kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement.

2.7.2. Test Description

A. Test Setup:

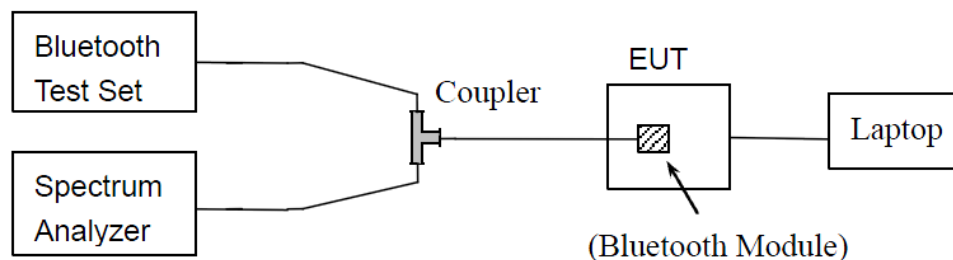

The Bluetooth Module of the EUT is coupled to the Spectrum Analyzer (SA) and the Bluetooth Test Set with Attenuators through the Power Splitter; the RF load attached to the EUT antenna terminal is 50Ohm; the path loss as the factor is calibrated to correct the reading. During the measurement, the Bluetooth Module of the EUT is activated and controlled by the SS, and is set to operate under test mode transmitting 339 bytes DH5 packages at maximum power.

B. Equipments List:

Please refer ANNEX A(1.5).

2.7.3. Test Procedure

Use the following spectrum analyzer settings:

Span = wide enough to capture the peak level of the in-band emission and all spurious emissions (e.g., harmonics) from the lowest frequency generated in the EUT up through the 10th harmonic. Typically, several plots are required to cover this entire span.

RBW = 100 kHz

VBW \geq RBW

Sweep = auto

Detector function = peak



Trace = max hold

Allow the trace to stabilize.

2.7.4. Test Result

The Bluetooth Module operates at hopping-off test mode. The measurement frequency range is from 30MHz to the 10th harmonic of the fundamental frequency. The lowest, middle and highest channels are tested to verify the spurious emissions.


GFSK Mode

A. Test Verdict:


Channel	Frequency (MHz)	Measured Max. Out of Band Emission (dBm)	Limit (dBm)		Verdict
			Carrier Level	Calculated -20dBc Limit	
0	2402	-39.50	7.14	-12.86	PASS
39	2441	-38.93	9.15	-10.85	PASS
78	2480	-42.65	7.40	-12.60	PASS

B. Test Plots:


Note: The power of the Module transmitting frequency should be ignored.

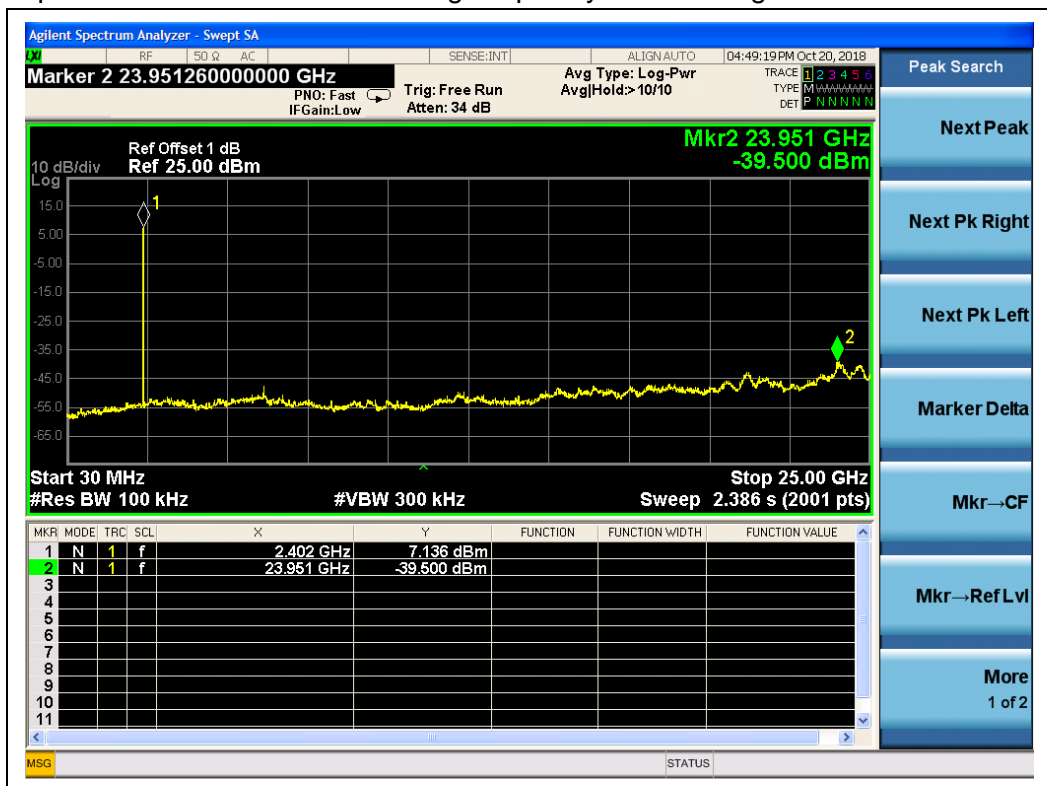


(Channel = 0, 30MHz to 25GHz, GFSK Mode)

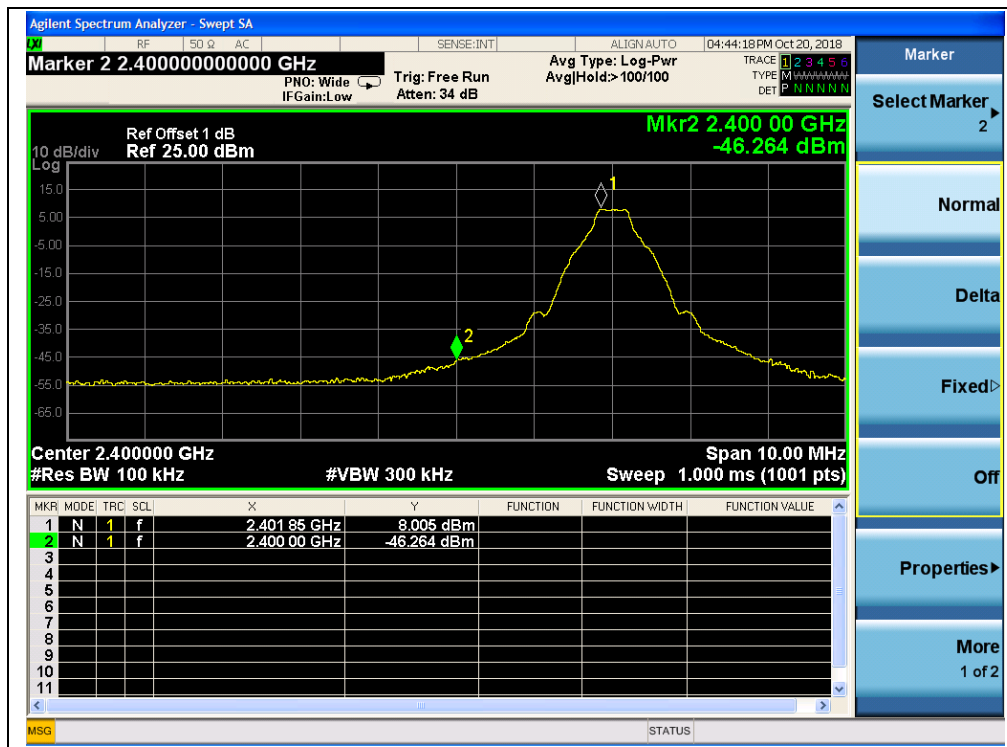


(Channel = 0, Band edge, GFSK Mode)

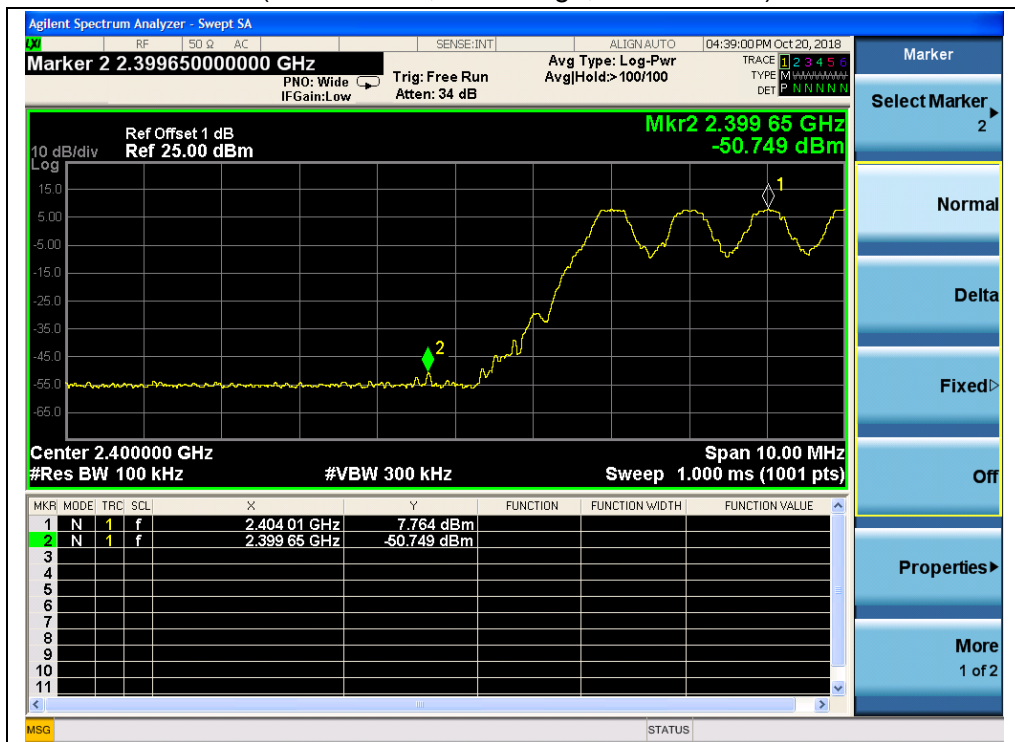


(Channel = 0, Band edge with hopping on, GFSK Mode)

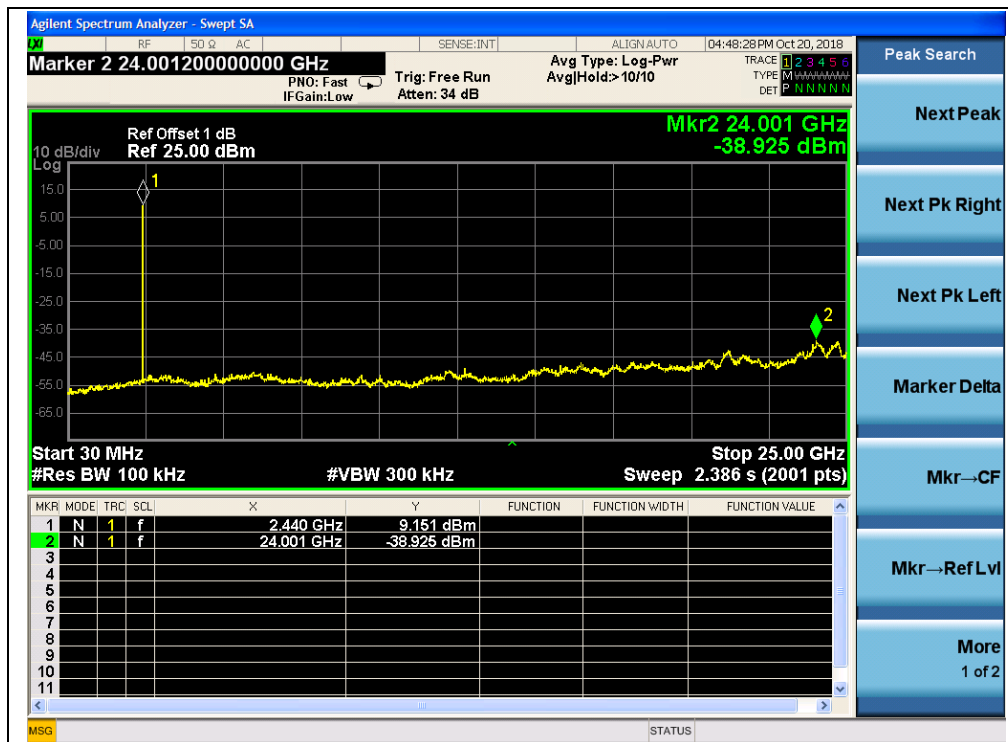

(Channel = 39, 30MHz to 25GHz, GFSK Mode)

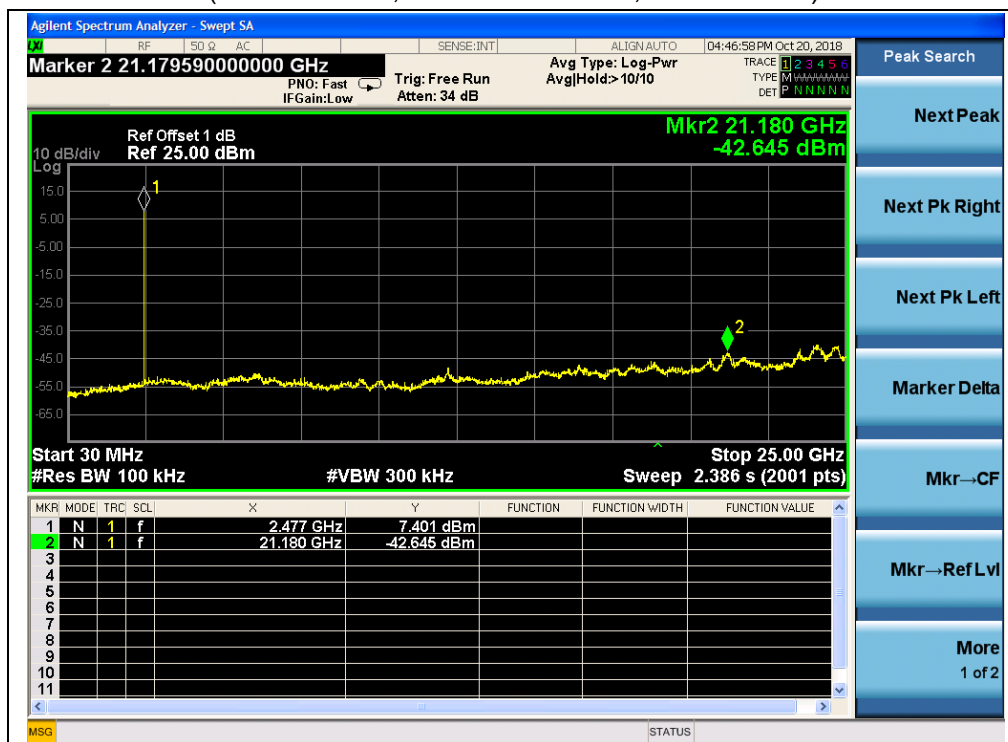

(Channel = 78, 30MHz to 25GHz, GFSK Mode)

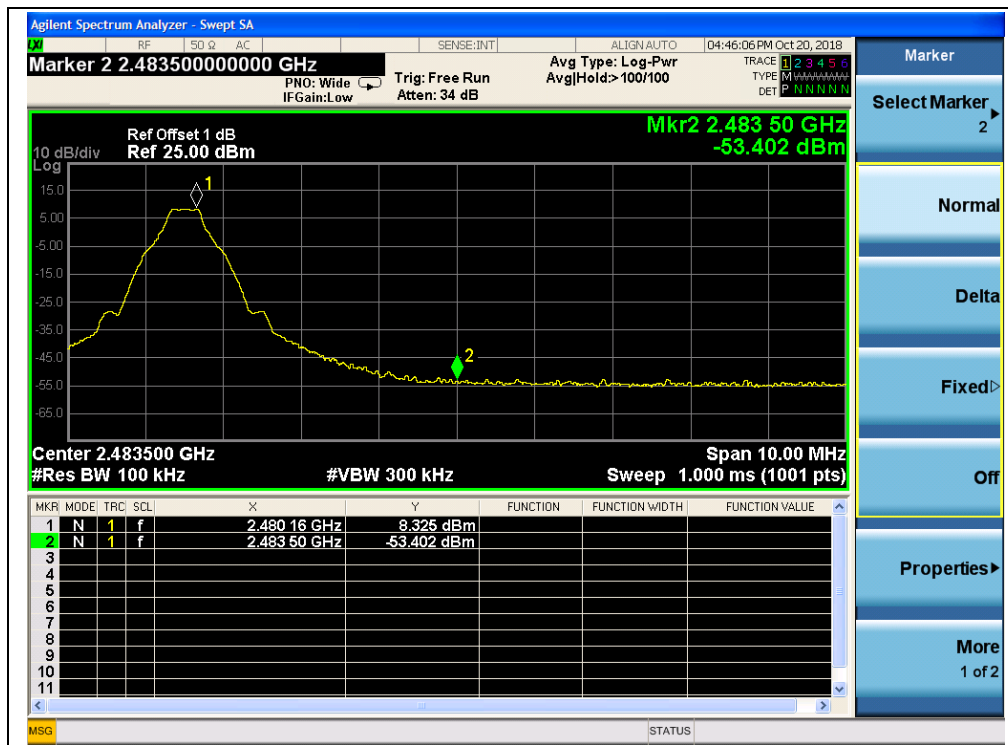

(Channel = 78, Band edge, GFSK Mode)



(Channel = 78, Band edge with hopping on, GFSK Mode)




$\pi/4$ -DQPSK Mode

A. Test Verdict:


Channel	Frequency (MHz)	Measured Max. Out of Band Emission (dBm)	Limit (dBm)		Verdict
			Carrier Level	Calculated -20dBc Limit	
0	2402	-39.17	5.25	-14.75	PASS
39	2441	-38.86	6.47	-13.53	PASS
78	2480	-39.53	6.40	-13.60	PASS

B. Test Plots:


Note: the power of the Module transmitting frequency should be ignored.

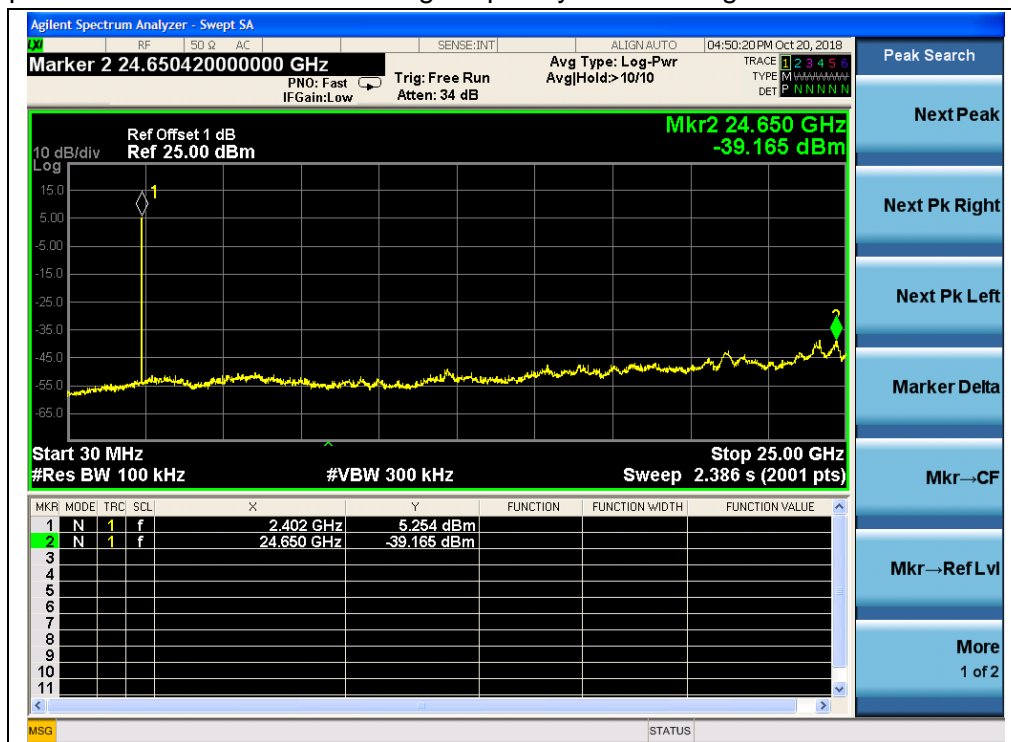



(Channel = 0, 30MHz to 25GHz, $\pi/4$ -DQPSK)

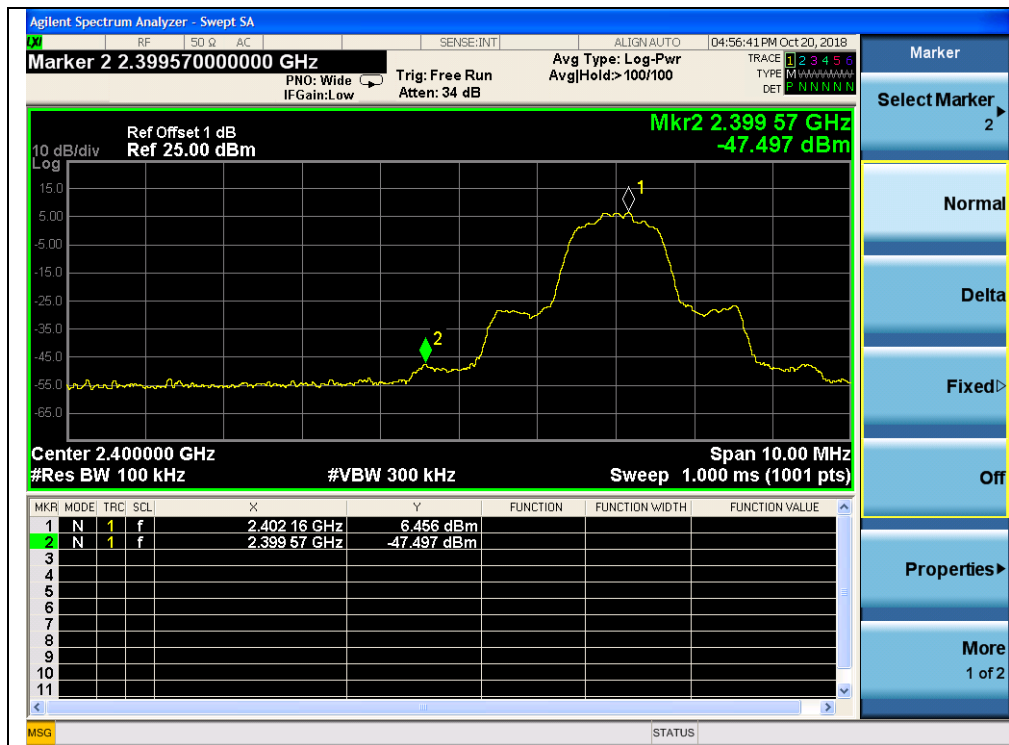


(Channel = 0, Band edge, $\pi/4$ -DQPSK)

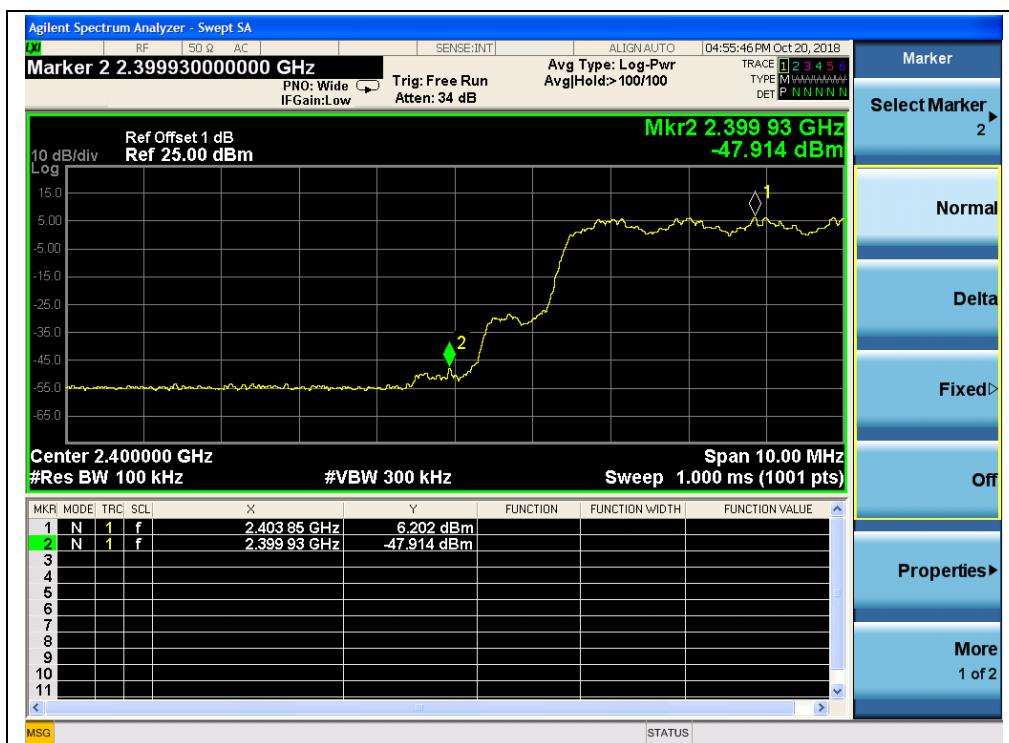


(Channel = 0, Band edge with hopping on, $\pi/4$ -DQPSK)

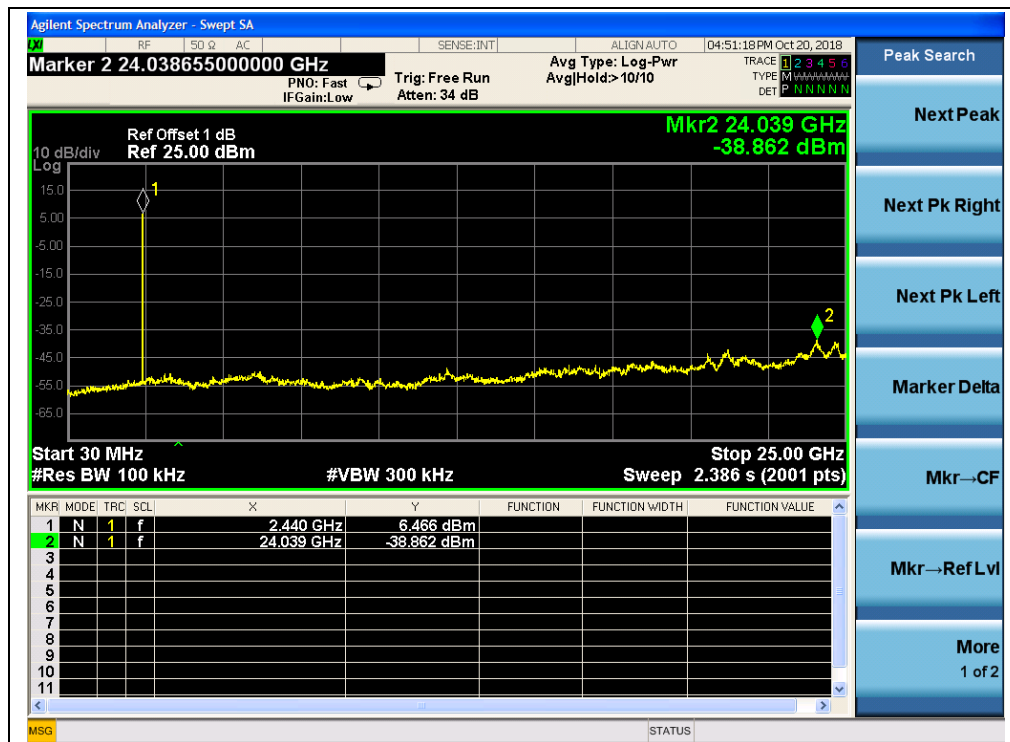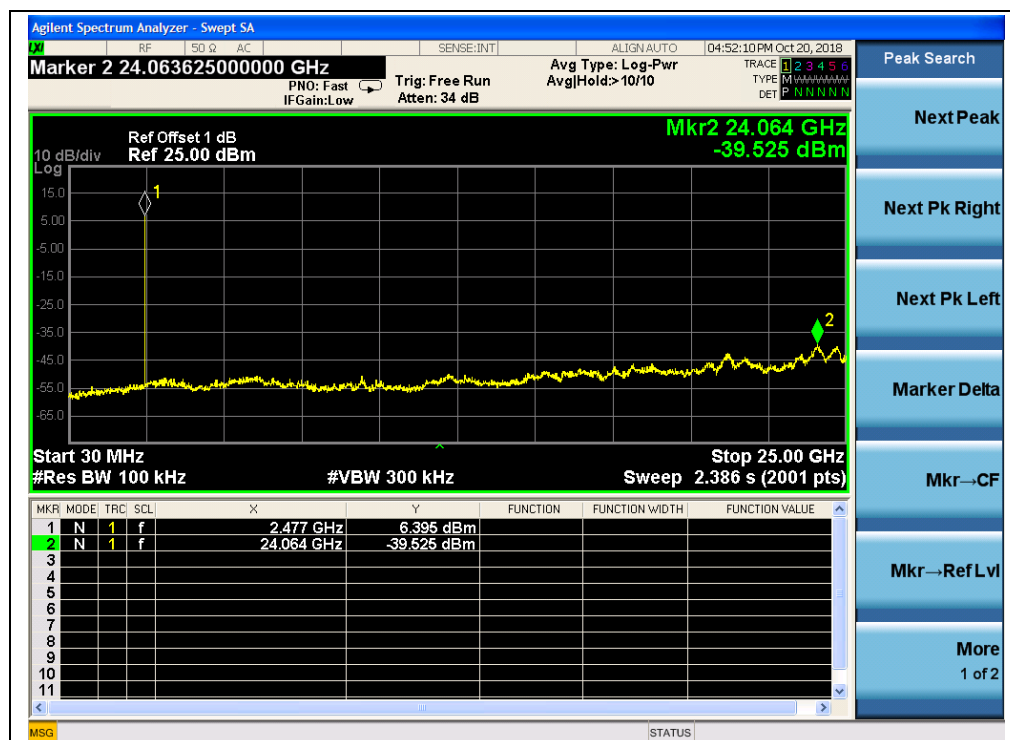(Channel = 39, 30MHz to 25GHz, $\pi/4$ -DQPSK)(Channel = 78, 30MHz to 25GHz, $\pi/4$ -DQPSK)

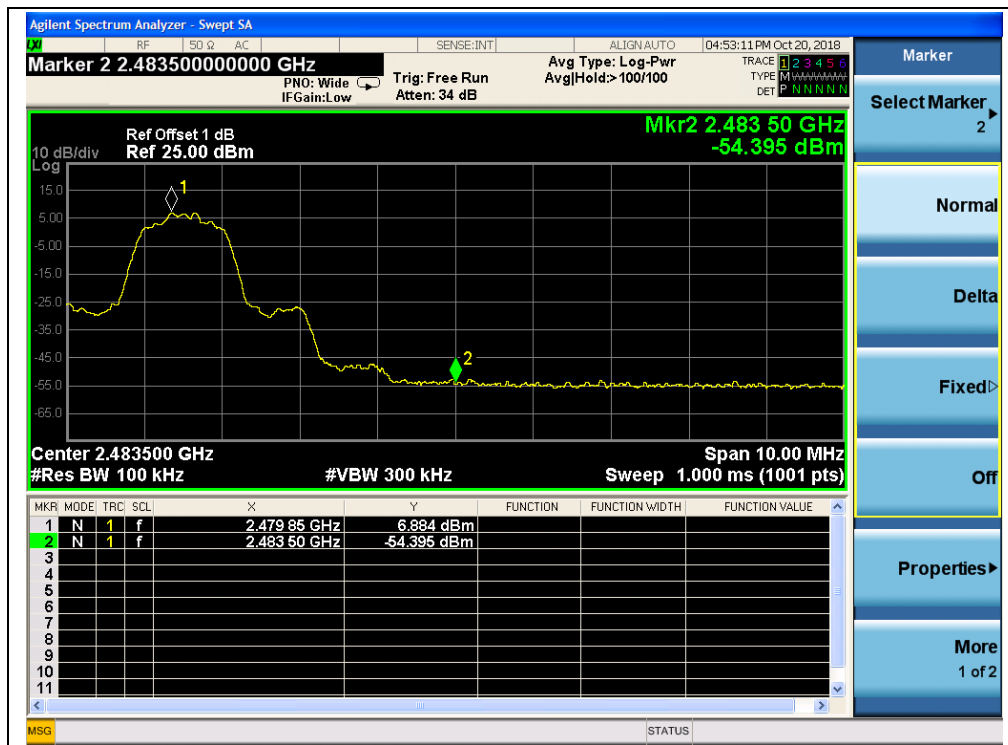

(Channel = 78, Band edge, $\pi/4$ -DQPSK)

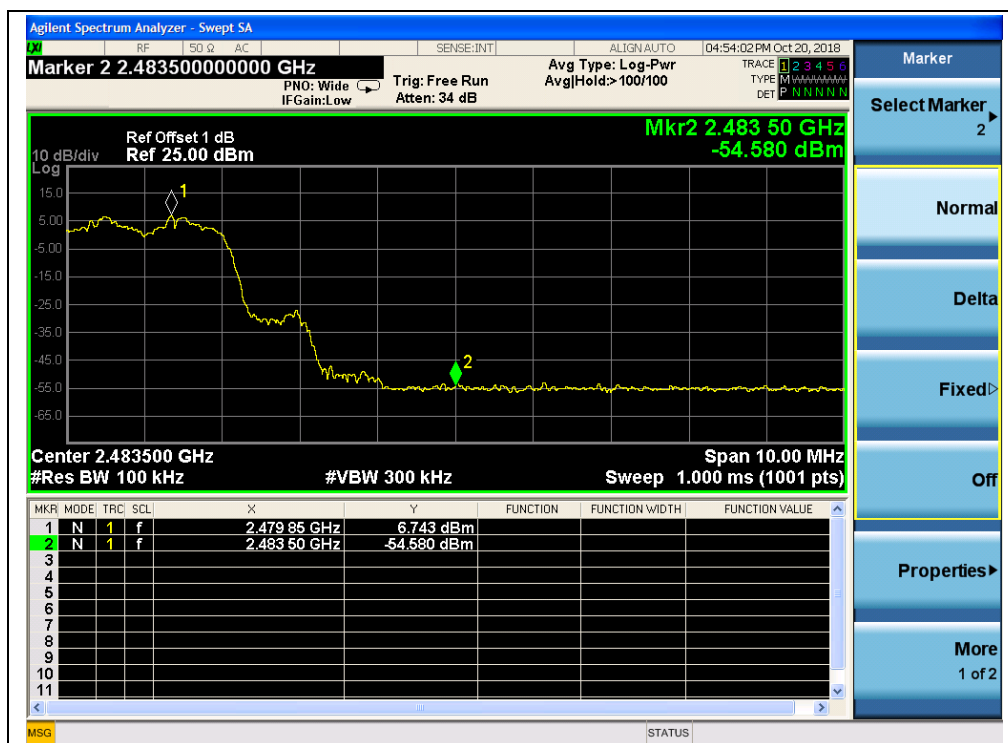

(Channel = 78, Band edge with hopping on, $\pi/4$ -DQPSK)




8-DPSK Mode

A. Test Verdict:


Channel	Frequency (MHz)	Measured Max. Out of Band Emission (dBm)	Limit (dBm)		Verdict
			Carrier Level	Calculated -20dBc Limit	
0	2402	-40.06	5.50	-14.50	PASS
39	2441	-39.68	8.01	-11.99	PASS
78	2480	-38.69	4.33	-15.67	PASS

B. Test Plots:

Note: the power of the Module transmitting frequency should be ignored.

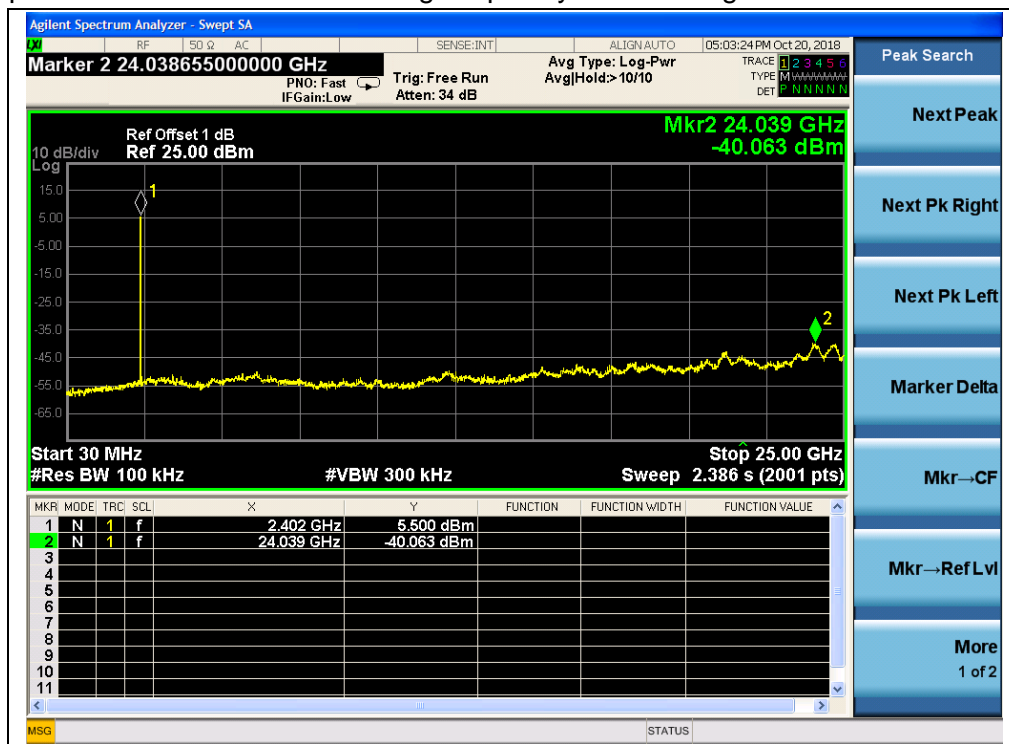


(Channel = 0, 30MHz to 25GH, 8-DPSK)

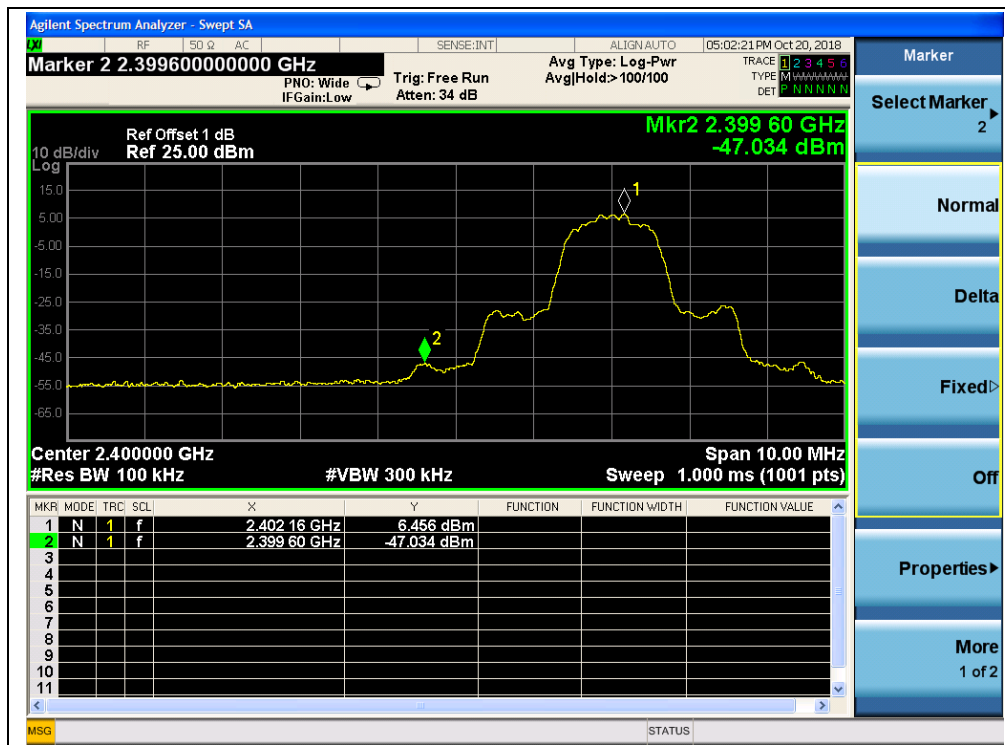


(Channel = 0, Band edge, 8-DPSK)




(Channel = 0, Band edge with hopping on, 8-DPSK)

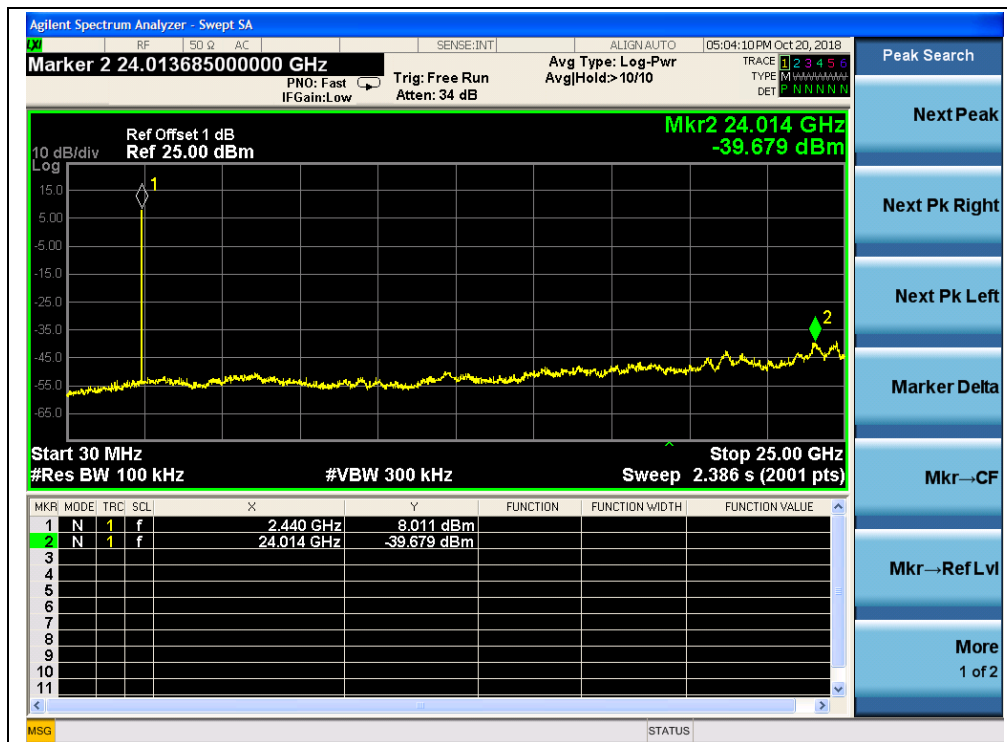


(Channel = 39, 30MHz to 25GHz, 8-DPSK)

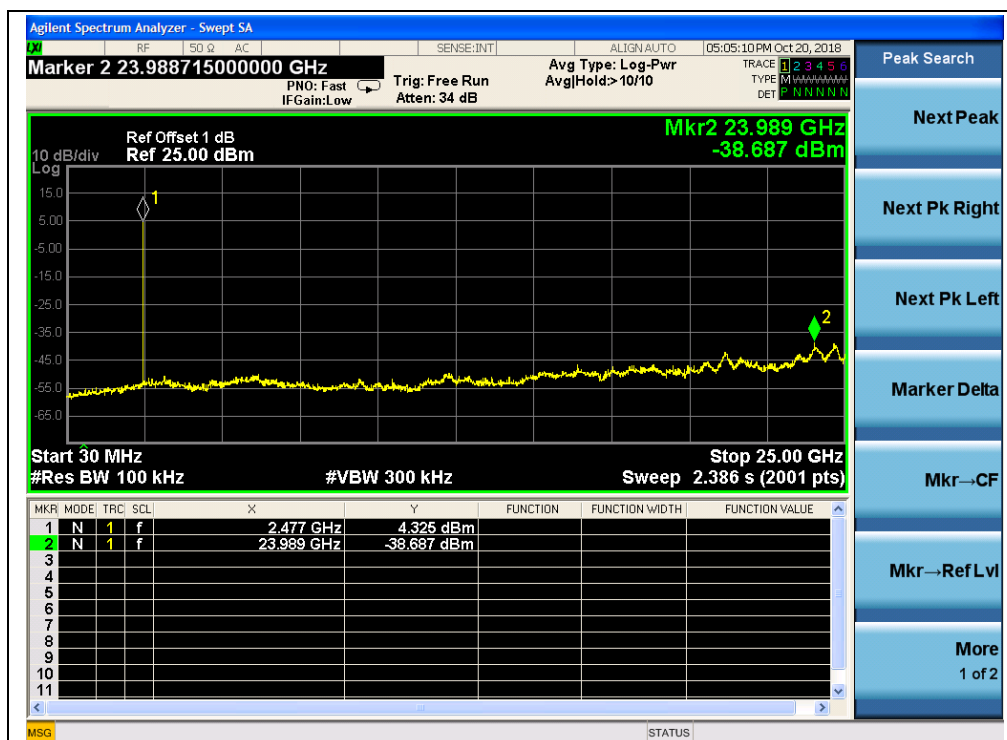

(Channel = 78, 30MHz to 25GH, 8-DPSK)

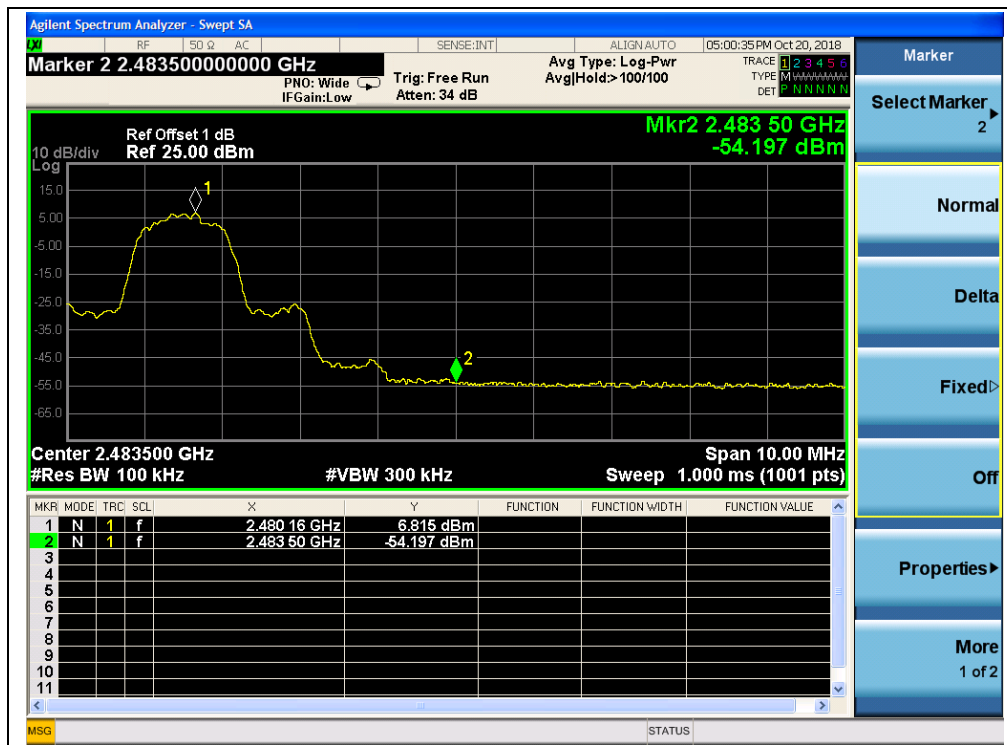

(Channel = 78, Band edge, 8-DPSK)

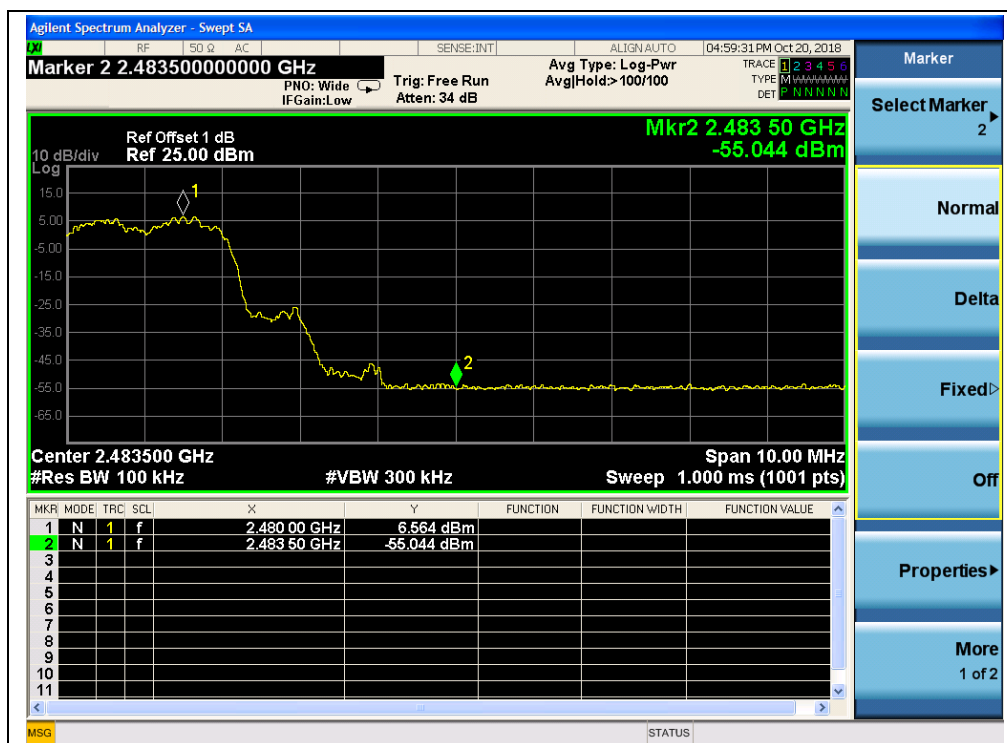

(Channel = 78, Band edge with hopping on, 8-DPSK)

2.8. Conducted Emission

2.8.1. Requirement

According to FCC section 15.207, for an intentional radiator that is designed to be connected to the public utility (AC) power line, the radio frequency voltage that is conducted back onto the AC power line on any frequency within the band 150kHz to 30MHz shall not exceed the limits in the following table, as measured using a 50 μ H/50 Ω line impedance stabilization network (LISN).

Frequency (MHz)	range	Conducted Limit (dB μ V)	
		Quai-peak	Average
0.15 - 0.50		66 to 56	56 to 46
0.50 - 5		56	46
5- 30		60	50

NOTE:

- The lower limit shall apply at the band edges.
- The limit decreases linearly with the logarithm of the frequency in the range 0.15 - 0.50MHz.

2.8.2. Test Description

A. Test Setup:



The Table-top EUT was placed upon a non-metallic table 0.8m above the horizontal metal reference ground plane. EUT was connected to LISN and LISN was connected to reference Ground Plane. EUT was 80cm from LISN. The set-up and test methods were according to ANSI C63.10: 2013.

The factors of the site are calibrated to correct the reading. During the measurement, the Bluetooth



EUT is activated and controlled by the Bluetooth Service Supplier (SS) via a Common Antenna, and is set to operate under hopping-on test mode transmitting 339 bytes DH5 packages at maximum power.

B. Equipments List:

Please reference ANNEX B(4).

2.8.3. Test Result

The maximum conducted interference is searched using Peak (PK), if the emission levels more than the AV and QP limits, and that have narrow margins from the AV and QP limits will be re-measured with AV and QP detectors. Tests for both L phase and N phase lines of the power mains connected to the EUT are performed. Refer to recorded points and plots below.

Note: Both of the test voltage AC 120V/60Hz and AC 230V/50Hz were considered and tested respectively, only the results of the worst case AC 120V/60Hz were recorded in this report.

A. Test setup:

Test Mode: EUT + Earphone + Battery + USB Cable+ Adapter+ Bluetooth TX

Test Voltage: AC 120V/60Hz


The measurement results are obtained as below:

$$E [\text{dB}\mu\text{V}] = U_R + L_{\text{Cable loss}} [\text{dB}] + A_{\text{Factor}}$$

U_R : Receiver Reading


A_{Factor} : Voltage division factor of LISN

B. Test Plots:

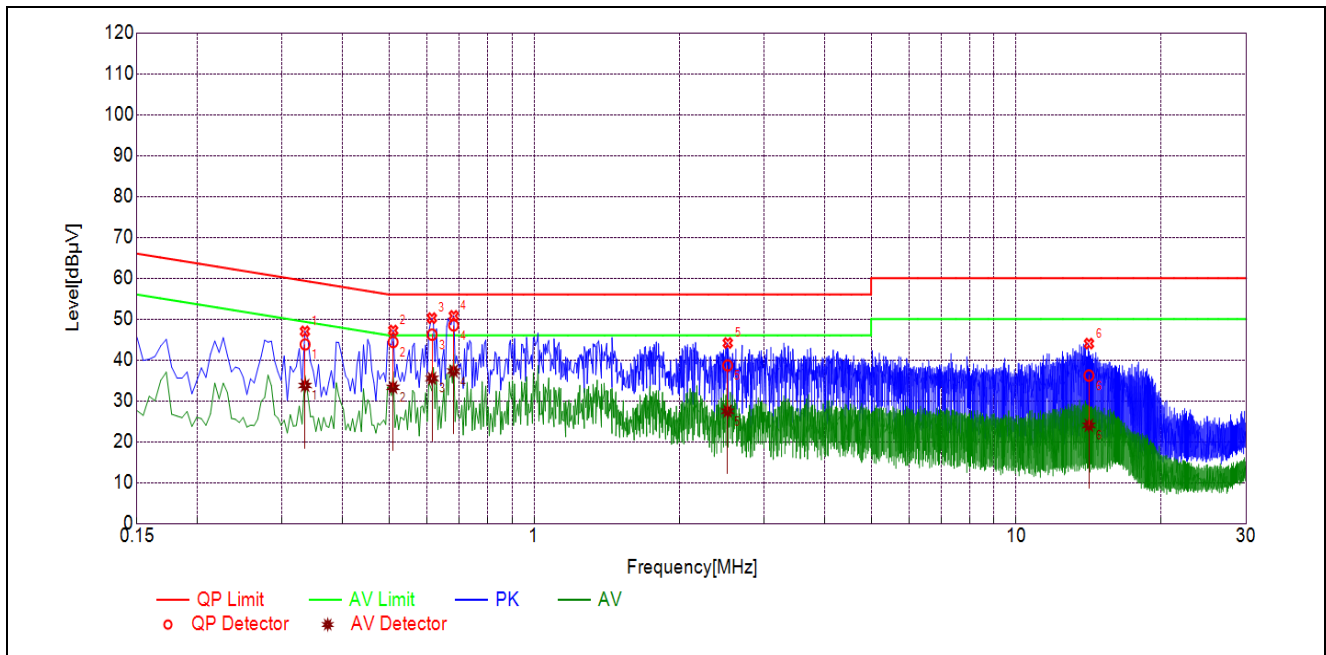

(L Phase)

NO.	Fre. (MHz)	Emission Level (dBμV)		Limit (dBμV)		Power-line	Verdict
		Quai-peak	Average	Quai-peak	Average		
1	0.3348	43.80	33.77	59.33	49.33	Line	PASS
2	0.5096	44.39	33.30	56.00	46.00		PASS
3	0.6139	46.18	35.49	56.00	46.00		PASS
4	0.6805	48.46	37.26	56.00	46.00		PASS
5	2.5198	38.66	27.47	56.00	46.00		PASS
6	14.1522	36.18	24.02	60.00	50.00		PASS

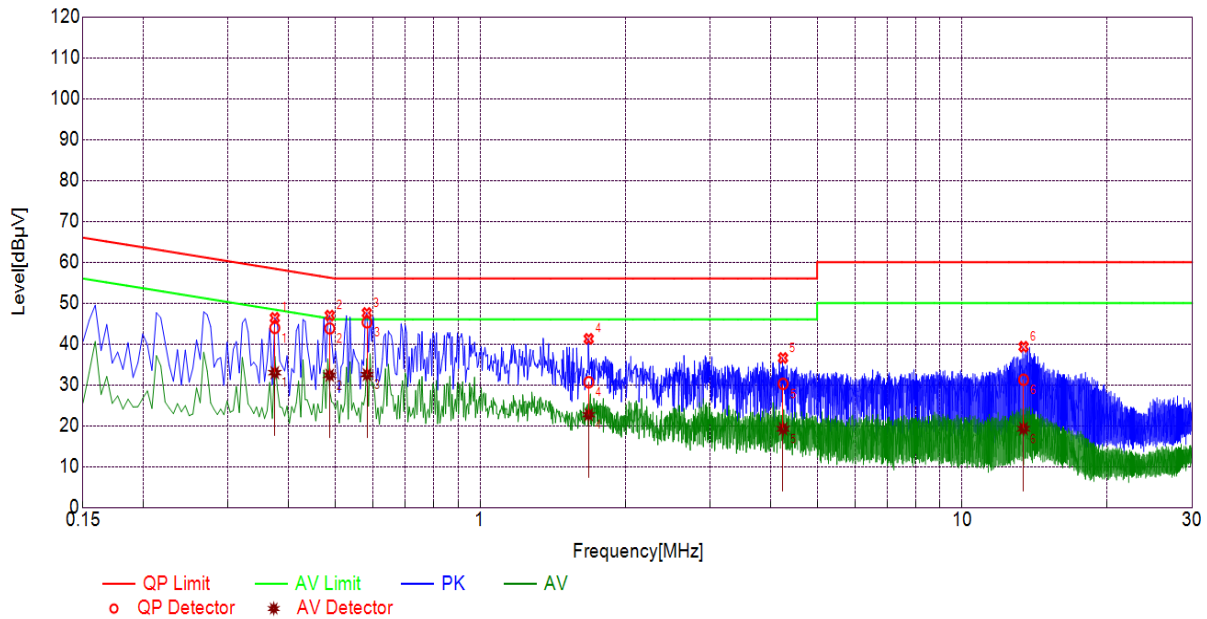

(N Phase)

NO.	Fre. (MHz)	Emission Level (dBμV)		Limit (dBμV)		Power-line	Verdict
		Quai-peak	Average	Quai-peak	Average		
1	0.3749	43.93	32.97	58.39	48.39	Neutral	PASS
2	0.4873	43.80	32.35	56.21	46.21		PASS
3	0.5824	45.30	32.50	56.00	46.00		PASS
4	1.6796	30.65	22.69	56.00	46.00		PASS
5	4.2501	30.24	19.26	56.00	46.00		PASS
6	13.4053	31.25	19.29	60.00	50.00		PASS


2.9. Restricted Frequency Bands

2.9.1. Requirement

According to FCC section 15.247(d), in any 100kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20dB below that in the 100kHz bandwidth within the band that contains the highest level of the desired power, In addition, radiated emissions which fall in the restricted bands, as defined in 15.205(a), must also comply with the radiated emission limits specified in 15.209(a).

2.9.2. Test Description

A. Test Setup:

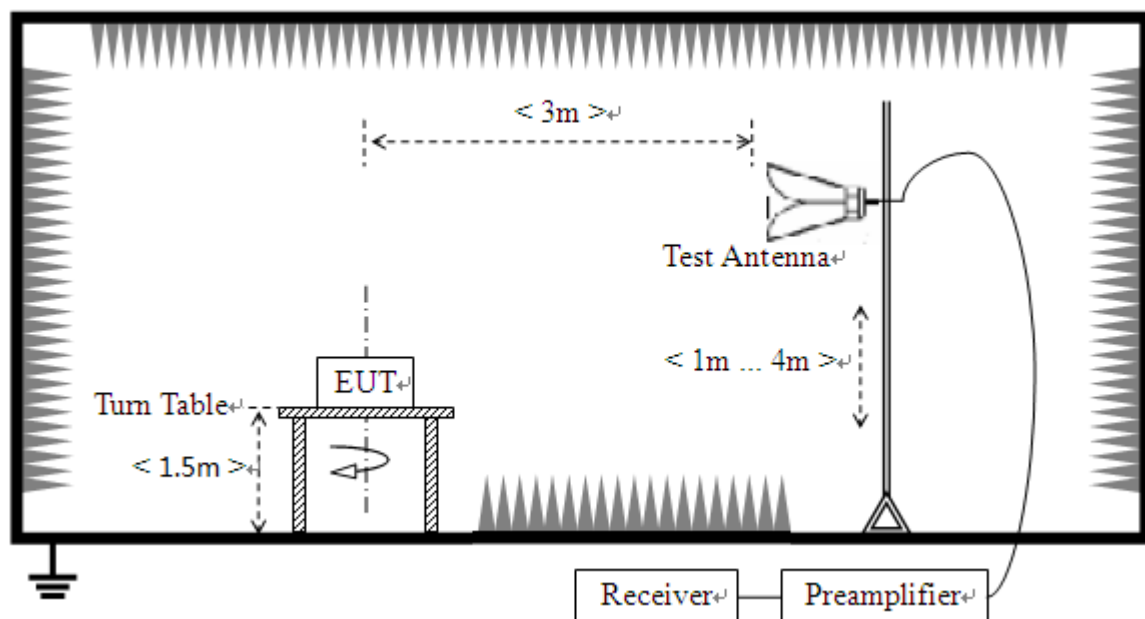

The EUT is located in a 3m Semi-Anechoic Chamber; the antenna factors, cable loss and so on of the site as factors are calculated to correct the reading. During the measurement, the Bluetooth Module of the EUT is activated and controlled by the Bluetooth Service Supplier (SS) via a Common Antenna, and is set to operate under non hopping-on test mode transmitting 339 bytes DH5, 679 bytes 2DH5 and 1021 bytes 3DH5 packages at maximum power.

For the Test Antenna:

Horn Test Antenna is 3m away from the EUT. Test Antenna height is varied from 1m to 4m above the ground to determine the maximum value of the field strength.

**B. Equipments List:**

Please refer ANNEX A(1.5).

2.9.3. Test Procedure

Span = wide enough to fully capture the emission being measured

RBW = 1 MHz for $f \geq 1\text{GHz}$, 100 KHz for $f < 1\text{GHz}$

VBW = 3 MHz for peak and 10Hz for average

Sweep = auto

Detector function = peak

Trace = max hold

Allow the trace to stabilize.

2.9.4. Test Result

The lowest and highest channels are tested to verify Restricted Frequency Bands.

The measurement results are obtained as below:

$$E [\text{dB}\mu\text{V/m}] = U_R + A_T + A_{\text{Factor}} [\text{dB}]; A_T = L_{\text{Cable loss}} [\text{dB}] - G_{\text{preamp}} [\text{dB}]$$

AT: Total correction Factor except Antenna

UR: Receiver Reading

Gpreamp: Preamplifier Gain


AFactor: Antenna Factor at 3m

Note: Restricted Frequency Bands were performed when antenna was at vertical and horizontal polarity, and only the worse test condition (vertical) was recorded in this test report.


GFSK Mode**A. Test Verdict:**

Channel	Frequency (MHz)	Detector	Receiver Reading U_R (dBuV)	A_T (dB)	A_{Factor} (dB@3m)	Max. Emission E (dB μ V/m)	Limit (dB μ V/m)	Verdict
		PK/ AV						
0	2381.50	PK	45.37	-29.67	32.56	48.26	74	PASS
0	2387.42	AV	32.69	-29.67	32.56	35.58	54	PASS
78	2483.83	PK	49.70	-29.67	32.56	52.59	74	PASS
78	2484.07	AV	32.59	-29.67	32.56	35.48	54	PASS


B. Test Plots:

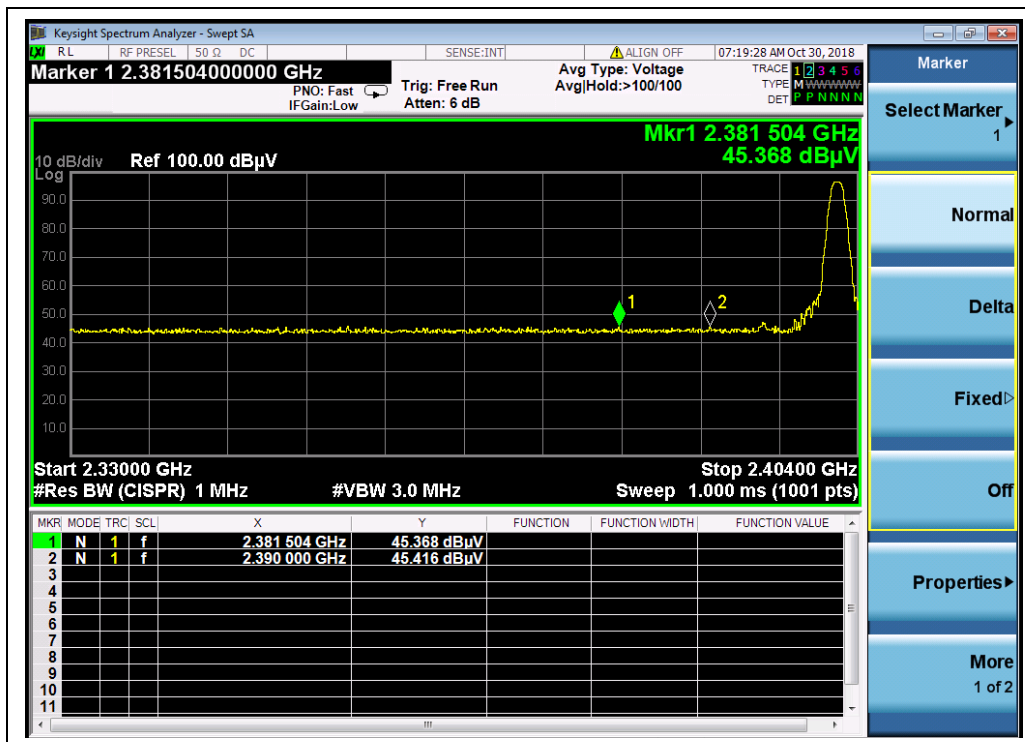


(Channel = 0, PEAK, GFSK)

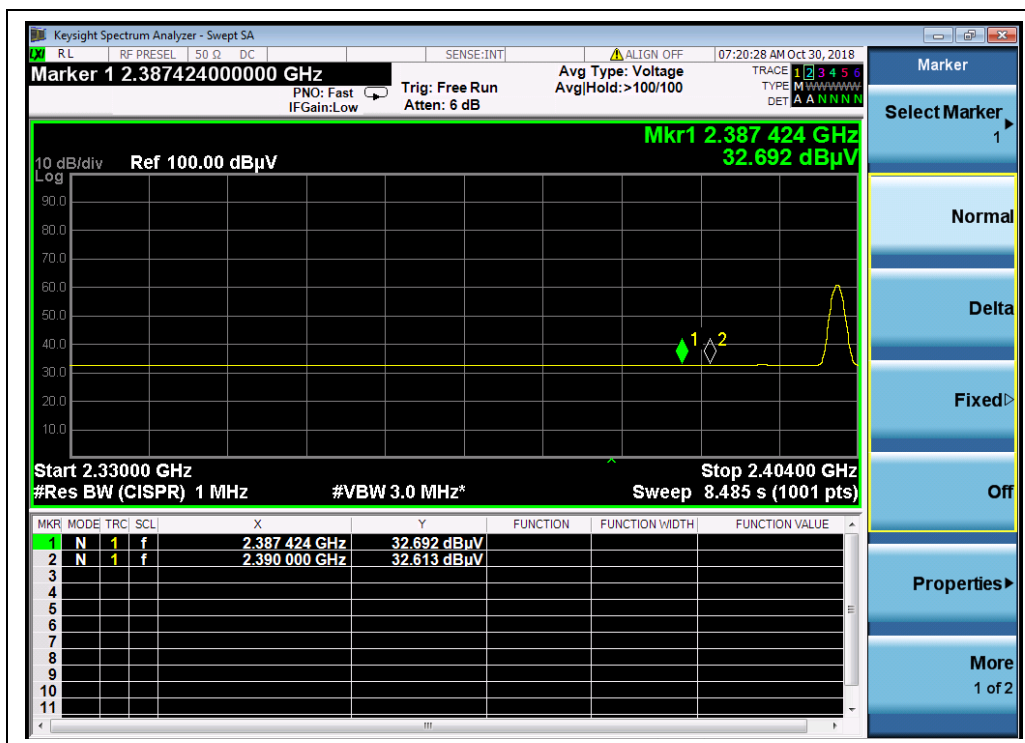

(Channel = 0, AVERAGE, GFSK)

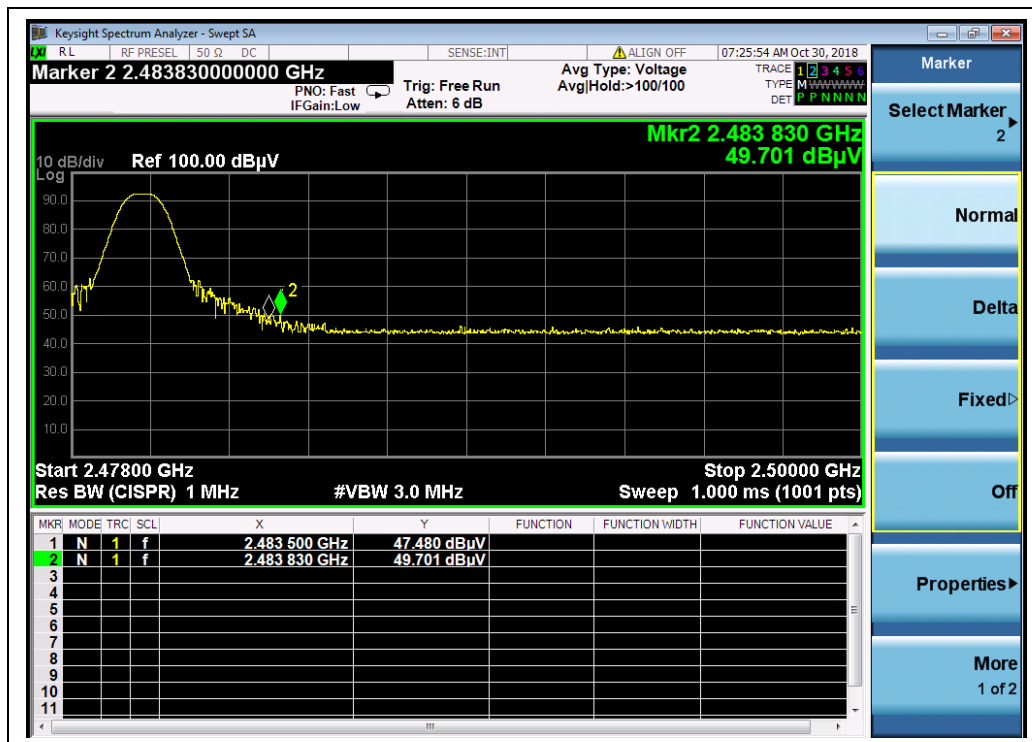

(Channel = 78, PEAK, GFSK)

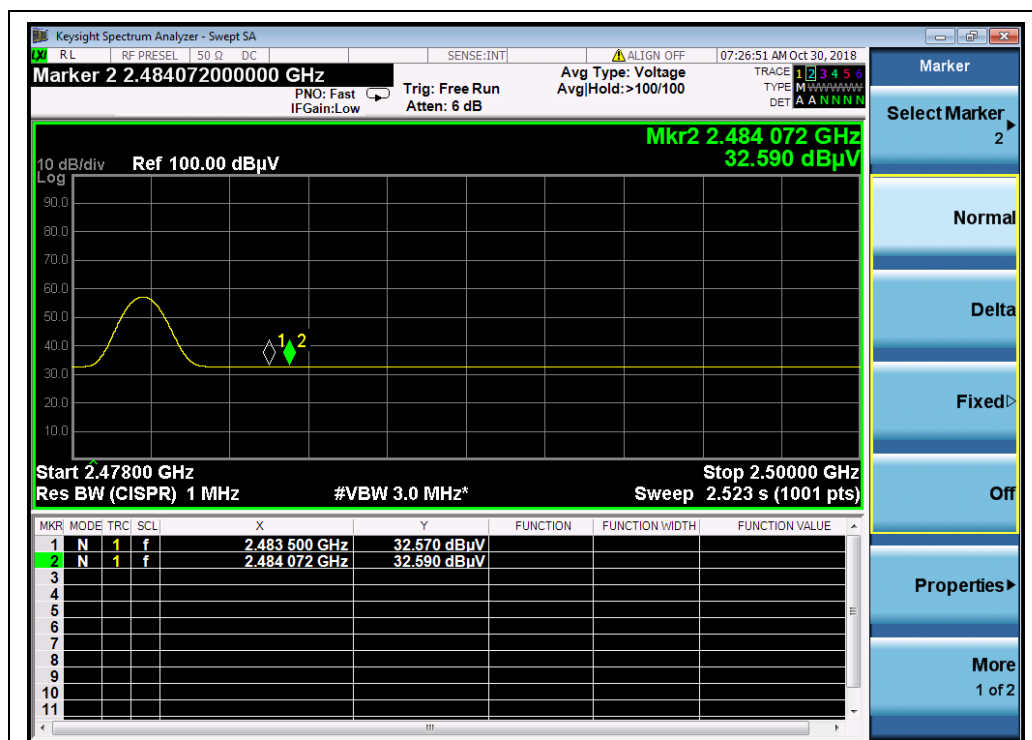

(Channel = 78, AVERAGE, GFSK)




$\pi/4$ -DQPSK Mode



A. Test Verdict:


Channel	Frequency (MHz)	Detector	Receiver Reading U_R (dBuV)	A_T (dB)	A_{Factor} (dB@3m)	Max. Emission E (dBuV/m)	Limit (dBuV/m)	Verdict
		PK/ AV						
0	2387.88	PK	45.68	-29.67	32.56	48.57	74	PASS
0	2387.88	AV	32.75	-29.67	32.56	35.64	54	PASS
78	2485.50	PK	45.37	-29.67	32.56	48.26	74	PASS
78	2484.31	AV	32.65	-29.67	32.56	35.54	54	PASS

B. Test Plots:

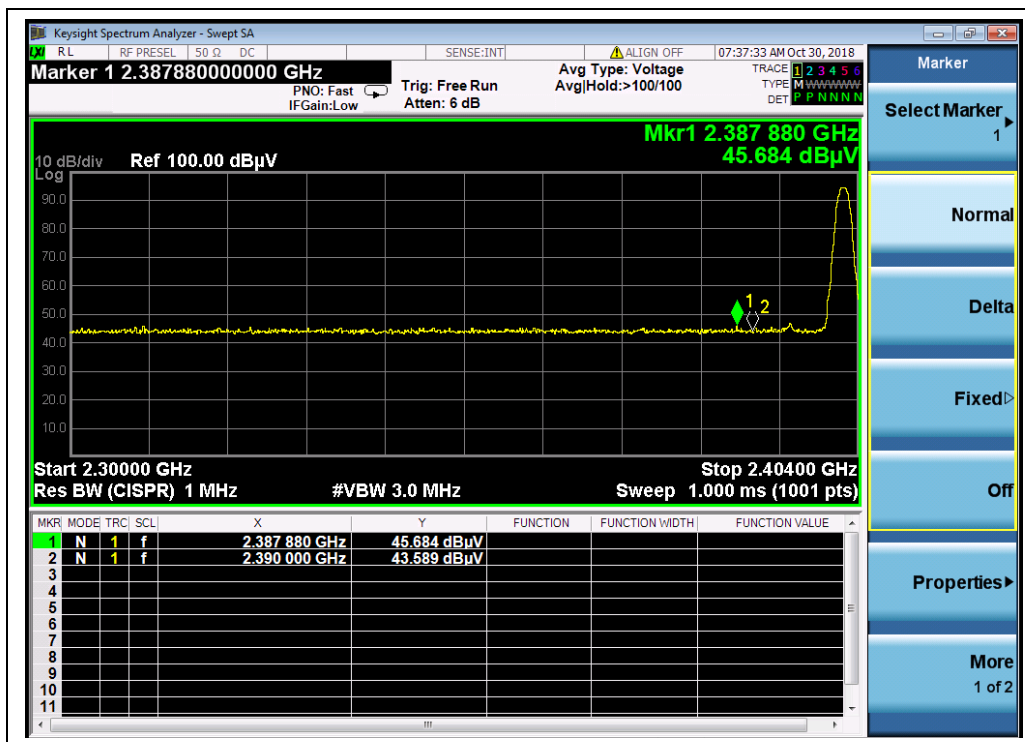

(Channel = 0, PEAK, $\pi/4$ -DQPSK)

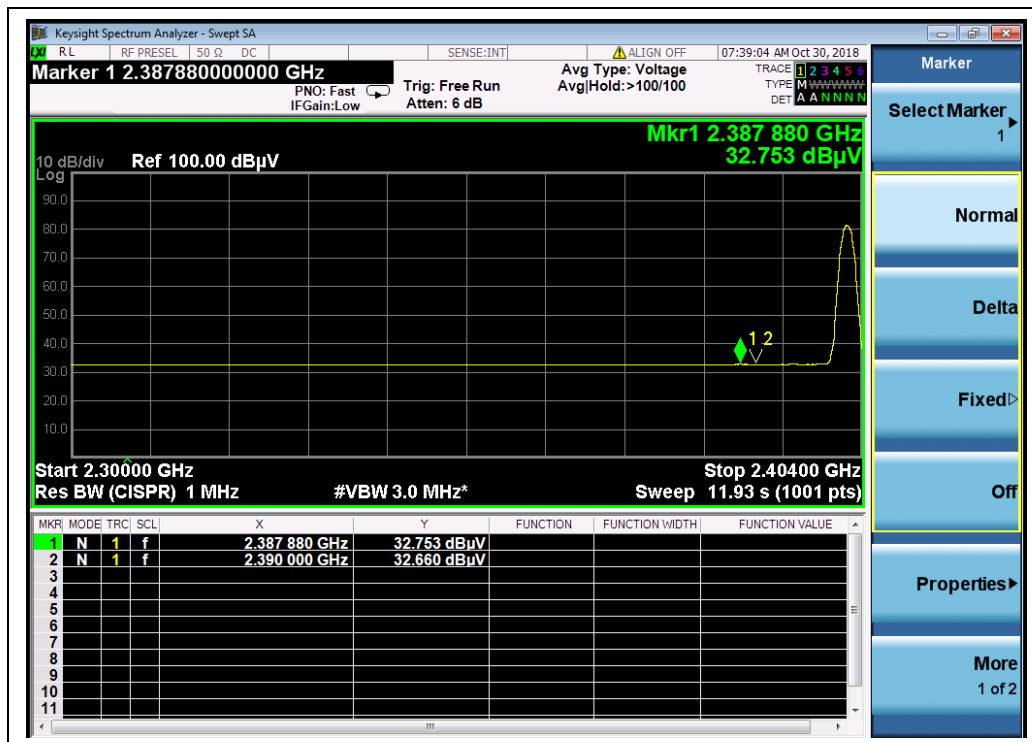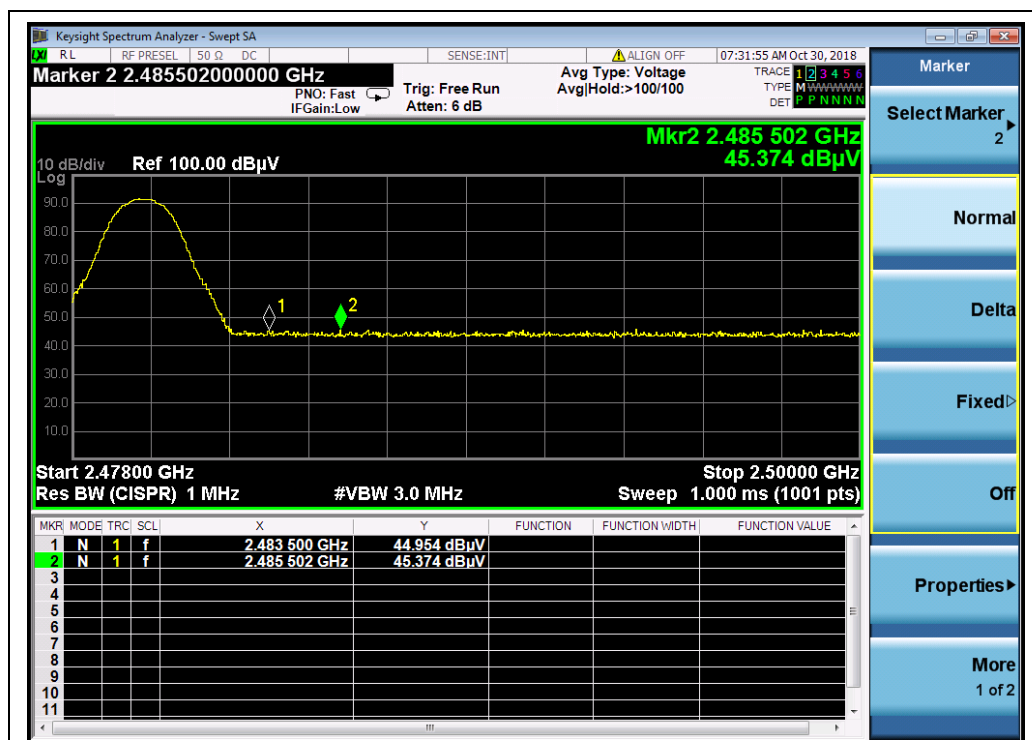(Channel = 0, AVERAGE, $\pi/4$ -DQPSK)(Channel = 78, PEAK, $\pi/4$ -DQPSK)

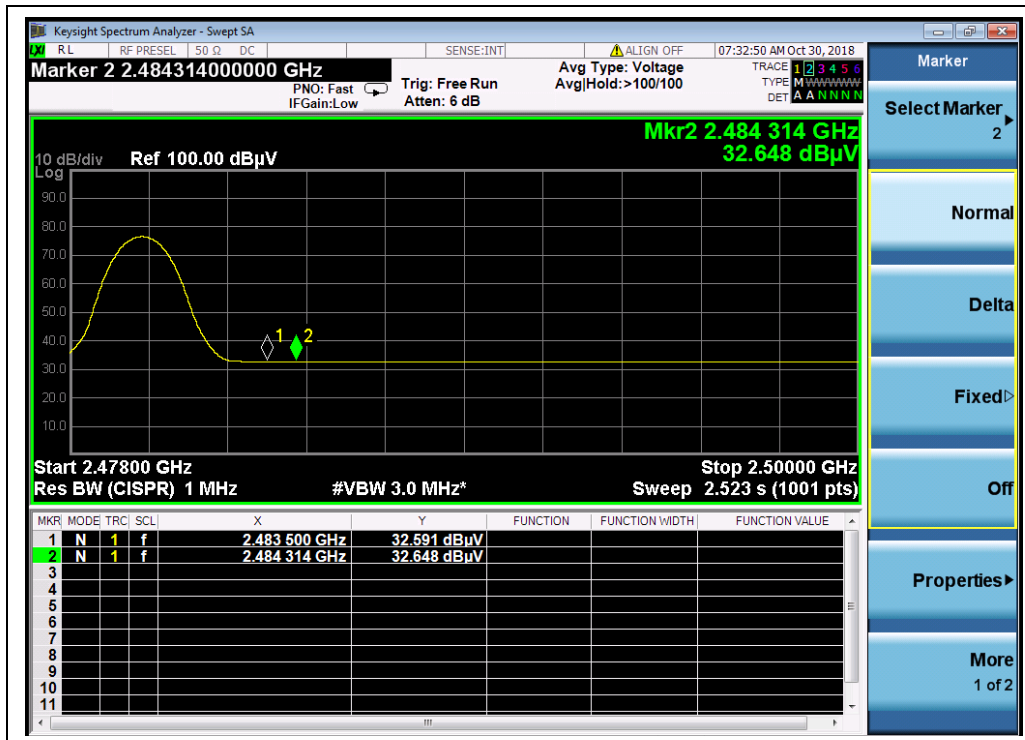


(Channel = 78, AVERAGE, $\pi/4$ -DQPSK)

8-DPSK Mode


A. Test Verdict:

Channel	Frequency (MHz)	Detector	Receiver Reading U_R (dBμV)	A_T (dB)	A_{Factor} (dB@3m)	Max. Emission E (dBμV/m)	Limit (dBμV/m)	Verdict
		PK/ AV						
0	2385.70	PK	45.02	-29.67	32.56	47.91	74	PASS
0	2388.30	AV	32.72	-29.67	32.56	35.61	54	PASS
78	2485.44	PK	45.43	-29.67	32.56	48.32	74	PASS
78	2484.12	AV	32.63	-29.67	32.56	35.52	54	PASS


B. Test Plots:

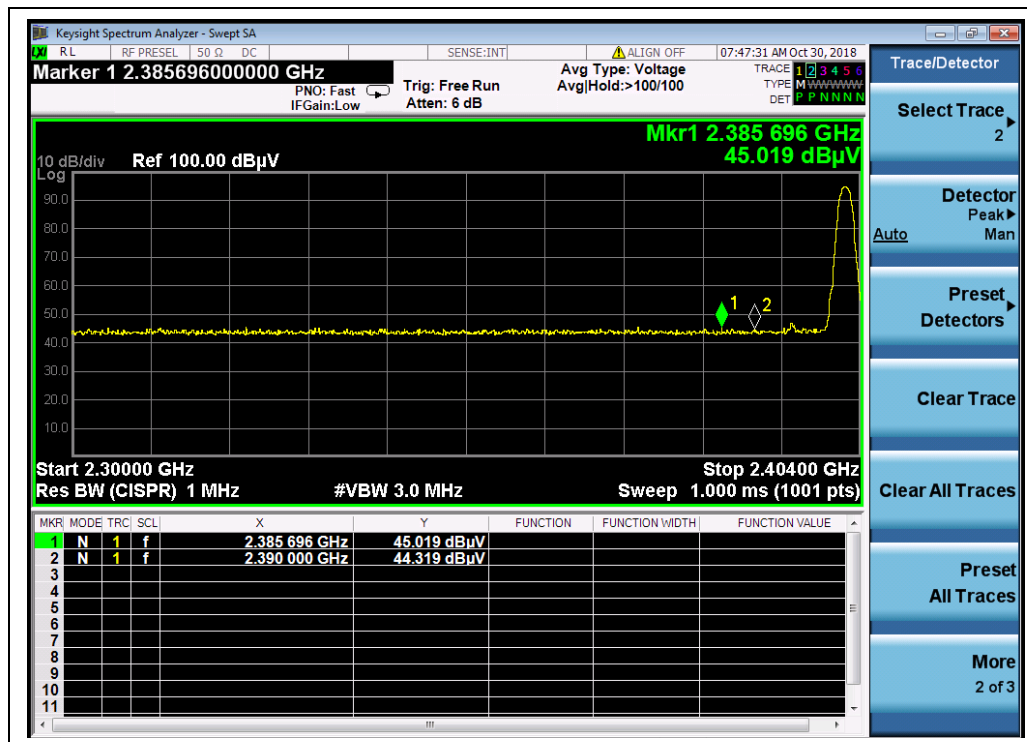


(Channel = 0, PEAK, 8-DPSK)

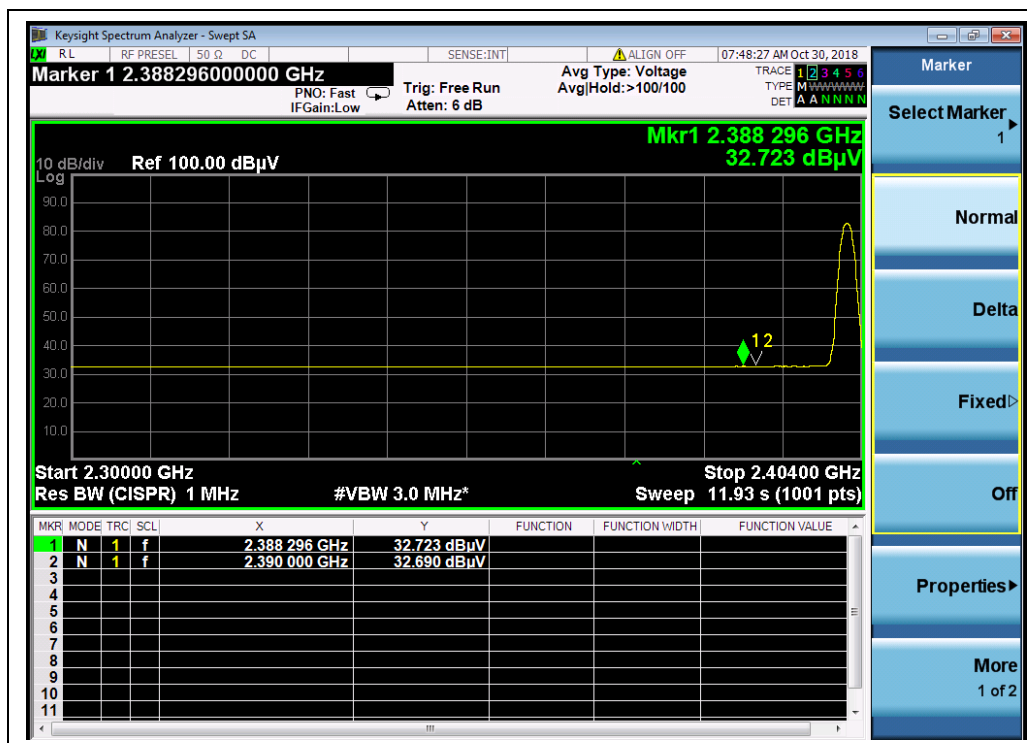

(Channel = 0, AVERAGE, 8-DPSK)

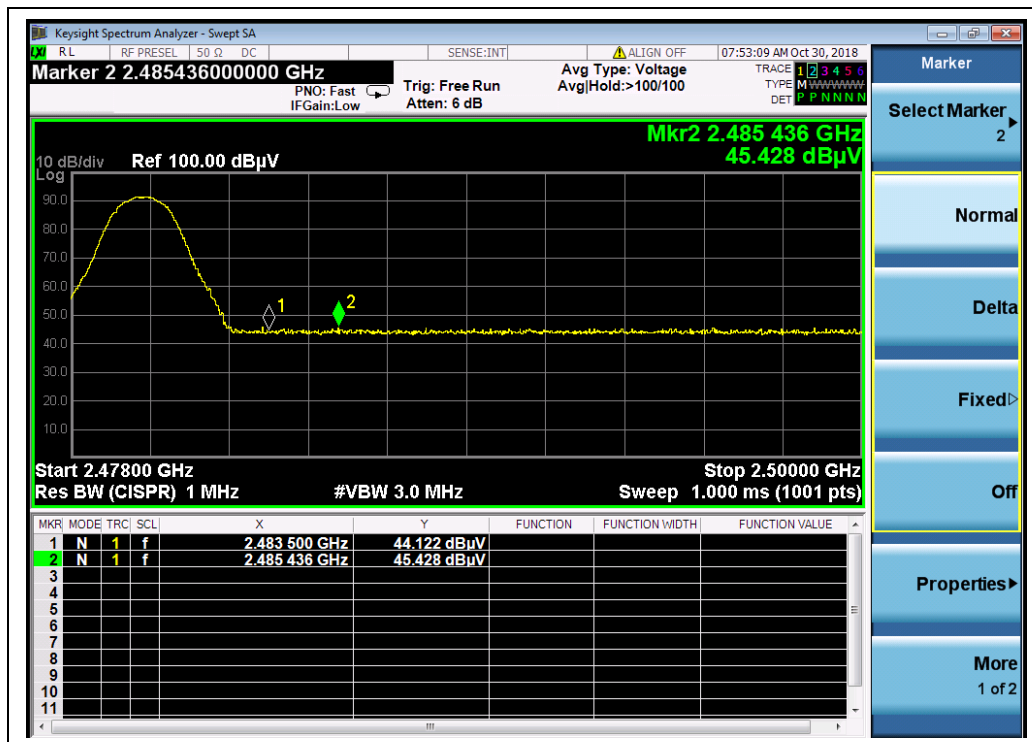

(Channel = 78, PEAK, 8-DPSK)

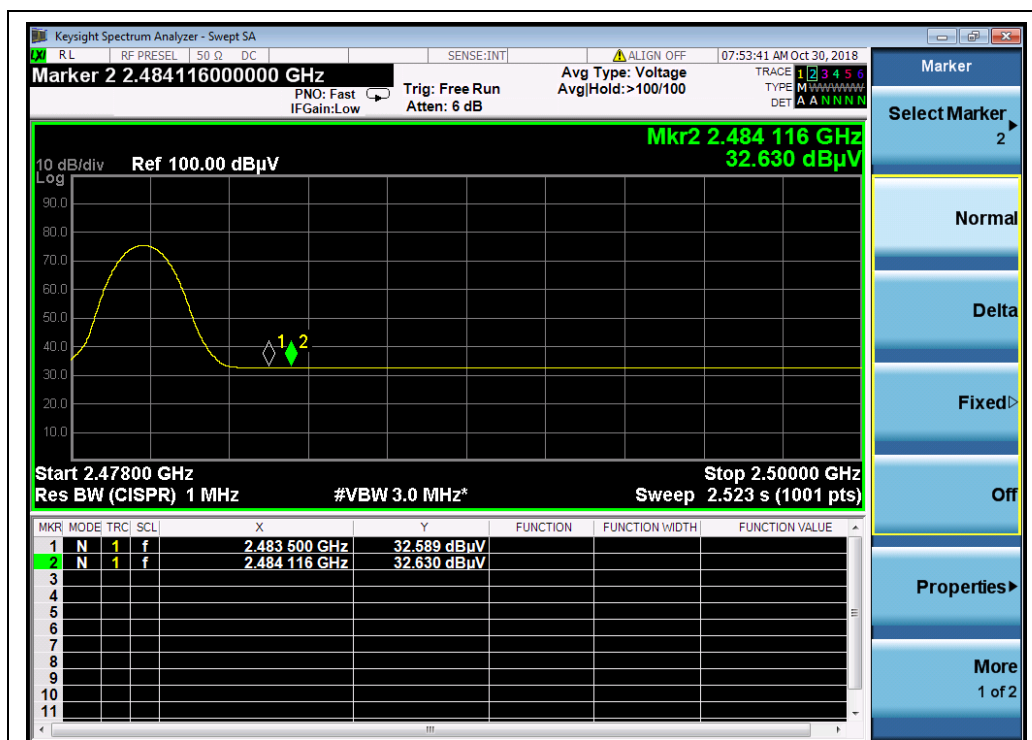

(Channel = 78, AVERAGE, 8-DPSK)

2.10. Radiated Emission

2.10.1. Requirement

According to FCC section 15.247(d), radiated emission outside the frequency band attenuation below the general limits specified in FCC section 15.209(a) is not required. In addition, radiated emissions which fall in the restricted bands, as defined in FCC section 15.205(a), must also comply with the radiated emission limits specified in FCC section 15.209(a).

According to FCC section 15.209 (a), except as provided elsewhere in this subpart, the emissions from an intentional radiator shall not exceed the field strength levels specified in the following table:

Frequency (MHz)	Field Strength ($\mu\text{V/m}$)	Measurement Distance (m)
0.009 - 0.490	2400/F(kHz)	300
0.490 - 1.705	24000/F(kHz)	30
1.705 - 30.0	30	30
30 - 88	100	3
88 - 216	150	3
216 - 960	200	3
Above 960	500	3

Note:


1. For Above 1000MHz, the emission limit in this paragraph is based on measurement instrumentation employing an average detector, measurement using instrumentation with a peak detector function, corresponding to 20dB above the maximum permitted average limit.
2. For above 1000MHz, limit field strength of harmonics: 54dBuV/m@3m (AV) and 74dBuV/m@3m (PK)

In addition, radiated emissions which fall in the restricted bands, as defined in Section 15.205(a), also should comply with the radiated emission limits specified in Section 15.209(a)(above table)


2.10.2. Test Description

A. Test Setup:


- 1) For radiated emissions from 9kHz to 30MHz

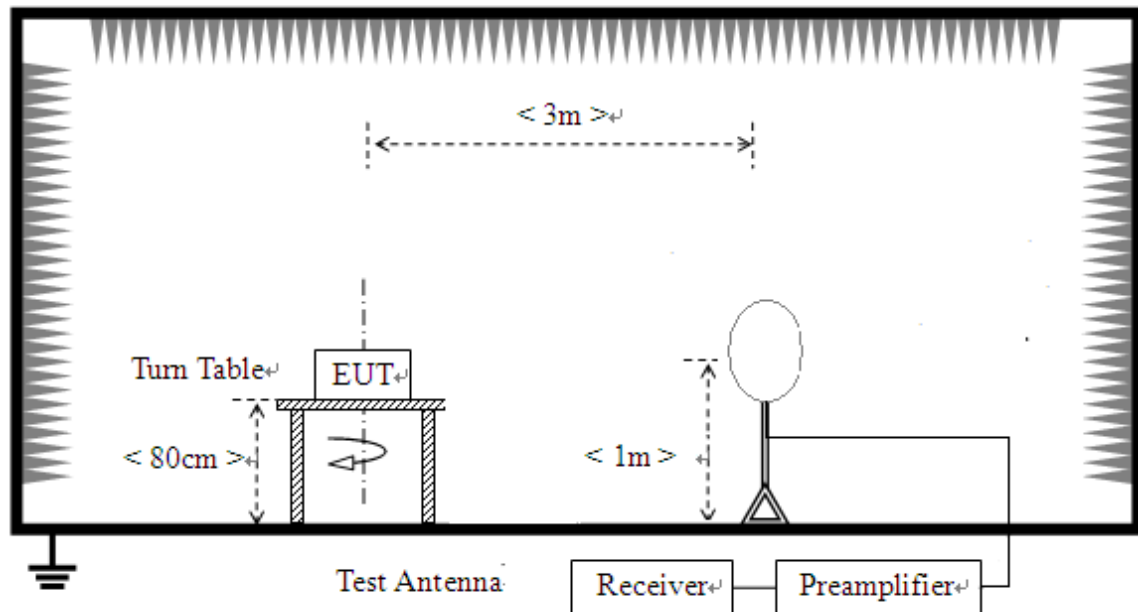

- 2) For radiated emissions from 30MHz to 1GHz

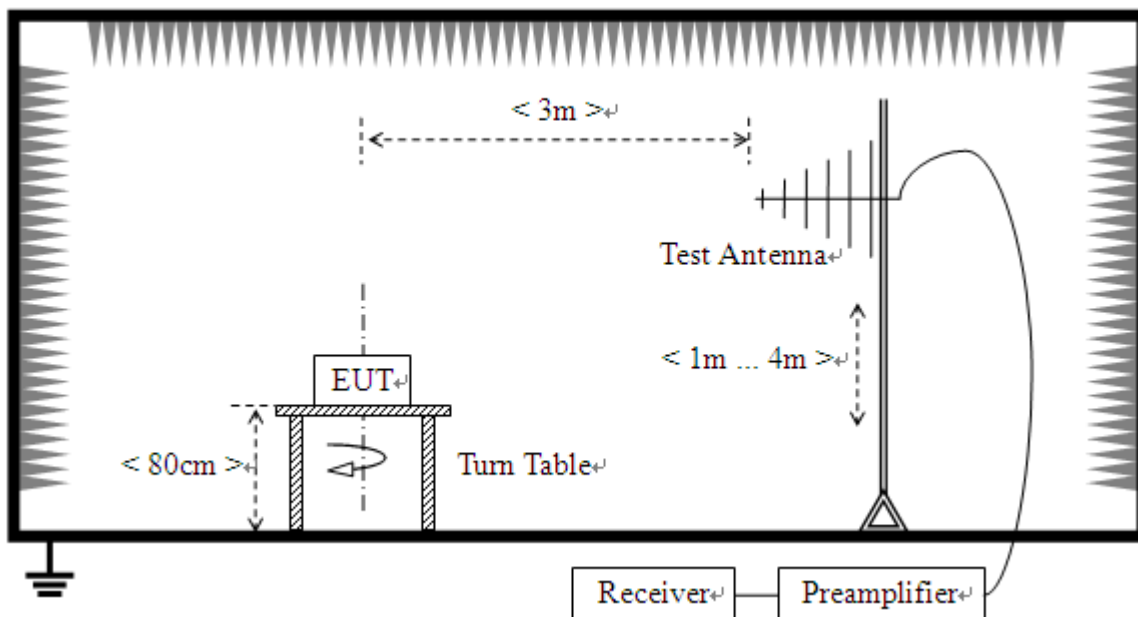

3) For radiated emissions above 1GHz

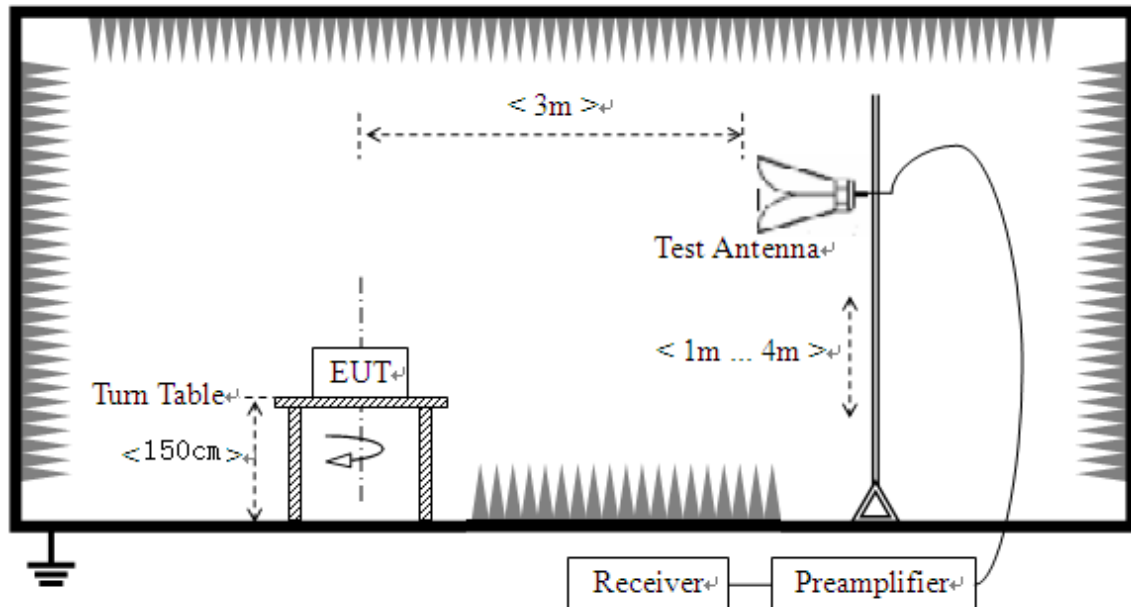

The RF absorbing material used on the reference ground plane and on the turntable have a maximum height (thickness) of 30 cm (12 in) and have a minimum-rated attenuation of 20 dB at all frequencies from 1 GHz to 18 GHz.

The test site semi-anechoic chamber has met the requirement of NSA tolerance 4dB according to the standards: ANSI C63.10 (2013). For radiated emissions below or equal to 1GHz, the EUT was set-up on insulator 80cm above the Ground Plane, For radiated emissions above 1GHz, The EUT was set-up on insulator 150cm above the Ground Plane. The set-up and test methods were according to ANSI C63.10.

The EUT is located in a 3m Semi-Anechoic Chamber; the antenna factors, cable loss and so on of the site as factors are calculated to correct the reading.

For the Test Antenna:

- In the frequency range of 9kHz to 30MHz, magnetic field is measured with Loop Test Antenna. The Test Antenna is positioned with its plane vertical at 1m distance from the EUT. The center of the Loop Test Antenna is 1m above the ground. During the measurement the Loop Test Antenna rotates about its vertical axis for maximum response at each azimuth about the EUT.
- In the frequency range above 30MHz, Bi-Log Test Antenna (30MHz to 1GHz) and Horn Test Antenna (above 1GHz) are used. Place the test antenna at 3m away from area of the EUT, while keeping the test antenna aimed at the source of emissions at each frequency of significant emissions, with polarization oriented for maximum response. The test antenna may have to be



higher or lower than the EUT, depending on the radiation pattern of the emission and staying aimed at the emission source for receiving the maximum signal. The final test antenna elevation shall be that which maximizes the emissions. The test antenna elevation for maximum emissions shall be restricted to a range of heights of from 1 m to 4 m above the ground or reference ground plane. The emission levels at both horizontal and vertical polarizations should be tested.

B. Equipments List:

Please reference ANNEX B(4).

2.10.3. Test Procedure

Use the following spectrum analyzer settings:

Span = wide enough to fully capture the emission being measured

RBW = 1 MHz for $f \geq 1$ GHz, 100 kHz for $f < 1$ GHz

VBW \geq RBW

Sweep = auto

Detector function = peak

Trace = max hold

2.10.4. Test Result

According to ANSI C63.10, because of peak detection will yield amplitudes equal to or greater than amplitudes measured with the quasi-peak (or average) detector, the measurement data from a spectrum analyzer peak detector will represent the worst-case results, if the peak measured value complies with the quasi-peak limit, it is unnecessary to perform an quasi-peak measurement.

The measurement results are obtained as below:

$$E [\text{dB}\mu\text{V/m}] = U_R + A_T + A_{\text{Factor}} [\text{dB}]; A_T = L_{\text{Cable loss}} [\text{dB}] - G_{\text{preamp}} [\text{dB}]$$

A_T : Total correction Factor except Antenna

U_R : Receiver Reading

G_{preamp} : Preamplifier Gain

A_{Factor} : Antenna Factor at 3m

During the test, the total correction Factor A_T and A_{Factor} were built in test software.

Note1: All radiated emission tests were performed in X, Y, Z axis direction. And only the worst axis test condition was recorded in this test report.

Note2: For the frequency, which started from 9 kHz to 30MHz, was pre-scanned and the result which was 20dB lower than the limit was not recorded.

Note3: For the frequency, which started from 25GHz to 40GHz, was pre-scanned and the result which was 20dB lower than the limit was not recorded.

**GFSK Mode**

Plots for Channel = 0



Fre. (MHz)	Pk (dBμV/m)	QP (dBμV/m)	AV (dBμV/m)	Limit-PK (dBμV/m)	Limit-QP (dBμV/m)	Limit-AV (dBμV/m)	Antenna	Verdict
157.472	26.71	N/A	N/A	N/A	43.50	N/A	Horizontal	PASS
269.161	26.82	N/A	N/A	N/A	46.00	N/A	Horizontal	PASS
1340.616	40.00	N/A	N/A	74.00	N/A	54.00	Horizontal	PASS
2946.245	44.85	N/A	N/A	74.00	N/A	54.00	Horizontal	PASS
5797.672	46.01	N/A	N/A	74.00	N/A	54.00	Horizontal	PASS
16046.518	48.35	N/A	N/A	74.00	N/A	54.00	Horizontal	PASS


(30MHz to 25GHz, Antenna Horizontal, GFSK, channel 0)



Fre. (MHz)	Pk (dBμV/m)	QP (dBμV/m)	AV (dBμV/m)	Limit-PK (dBμV/m)	Limit-QP (dBμV/m)	Limit-AV (dBμV/m)	Antenna	Verdict
32.428	27.05	N/A	N/A	N/A	40.00	N/A	Vertical	PASS
271.589	28.66	N/A	N/A	N/A	46.00	N/A	Vertical	PASS
1896.999	40.97	N/A	N/A	74.00	N/A	54.00	Vertical	PASS
4151.991	44.76	N/A	N/A	74.00	N/A	54.00	Vertical	PASS
11712.348	47.53	N/A	N/A	74.00	N/A	54.00	Vertical	PASS
20629.169	48.97	N/A	N/A	74.00	N/A	54.00	Vertical	PASS


(30MHz to 25GHz, Antenna Vertical, GFSK, channel 0)

Plot for Channel = 39

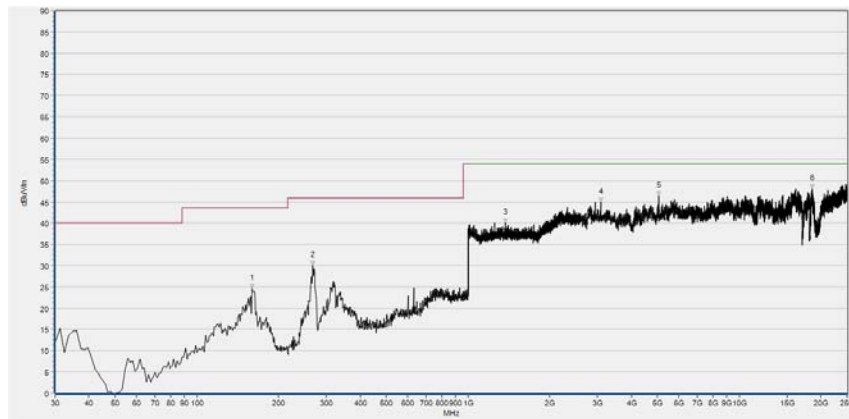

Fre. (MHz)	Pk (dBμV/m)	QP (dBμV/m)	AV (dBμV/m)	Limit-PK (dBμV/m)	Limit-QP (dBμV/m)	Limit-AV (dBμV/m)	Antenna	Verdict
159.900	24.61	N/A	N/A	N/A	43.50	N/A	Horizontal	PASS
267.947	30.04	N/A	N/A	N/A	46.00	N/A	Horizontal	PASS
1376.471	40.05	N/A	N/A	74.00	N/A	54.00	Horizontal	PASS
3084.743	45.00	N/A	N/A	74.00	N/A	54.00	Horizontal	PASS
5056.301	46.48	N/A	N/A	74.00	N/A	54.00	Horizontal	PASS
18592.435	48.06	N/A	N/A	74.00	N/A	54.00	Horizontal	PASS


(30MHz to 25GHz, Antenna Horizontal, GFSK, channel 39)

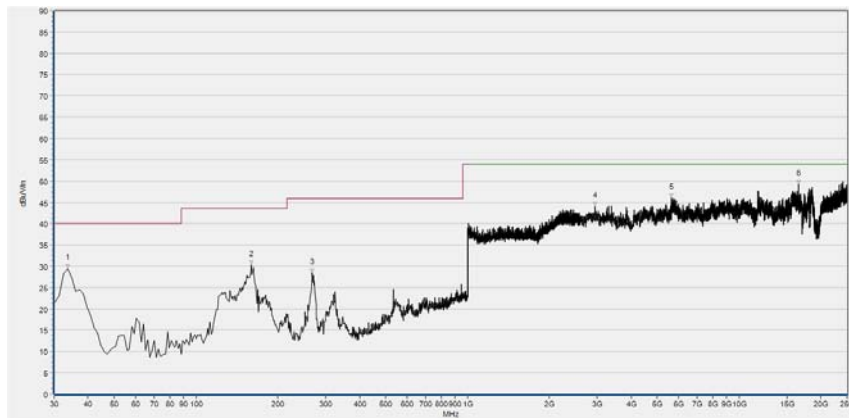

Fre. (MHz)	Pk (dBμV/m)	QP (dBμV/m)	AV (dBμV/m)	Limit-PK (dBμV/m)	Limit-QP (dBμV/m)	Limit-AV (dBμV/m)	Antenna	Verdict
33.642	29.47	N/A	N/A	N/A	40.00	N/A	Vertical	PASS
159.900	30.30	N/A	N/A	N/A	43.50	N/A	Vertical	PASS
267.947	28.56	N/A	N/A	N/A	46.00	N/A	Vertical	PASS
2950.318	44.12	N/A	N/A	74.00	N/A	54.00	Vertical	PASS
5634.734	46.13	N/A	N/A	74.00	N/A	54.00	Vertical	PASS
16563.848	49.20	N/A	N/A	74.00	N/A	54.00	Vertical	PASS

(30MHz to 25GHz, Antenna Vertical, GFSK, channel 39)

Plot for Channel = 78

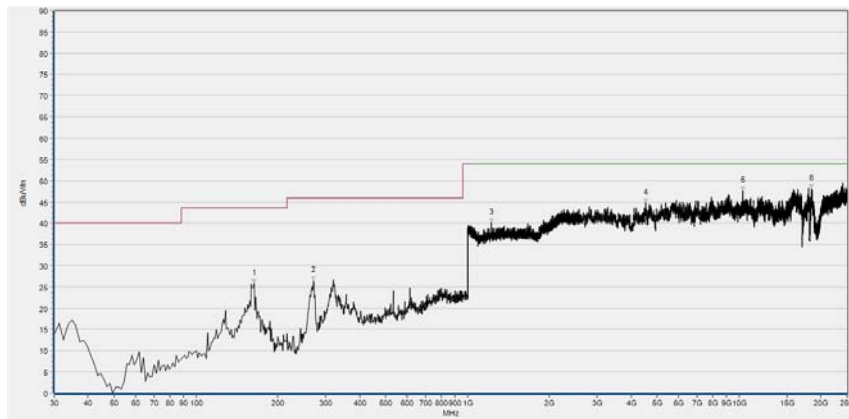

Fre. (MHz)	Pk (dBμV/m)	QP (dBμV/m)	AV (dBμV/m)	Limit-PK (dBμV/m)	Limit-QP (dBμV/m)	Limit-AV (dBμV/m)	Antenna	Verdict
163.542	25.88	N/A	N/A	N/A	43.50	N/A	Horizontal	PASS
270.375	26.50	N/A	N/A	N/A	46.00	N/A	Horizontal	PASS
1221.529	40.01	N/A	N/A	74.00	N/A	54.00	Horizontal	PASS
4534.897	44.77	N/A	N/A	74.00	N/A	54.00	Horizontal	PASS
10335.516	47.66	N/A	N/A	74.00	N/A	54.00	Horizontal	PASS
18482.451	48.12	N/A	N/A	74.00	N/A	54.00	Horizontal	PASS

(30MHz to 25GHz, Antenna Horizontal, GFSK, channel 78)




Fre. (MHz)	Pk (dBμV/m)	QP (dBμV/m)	AV (dBμV/m)	Limit-PK (dBμV/m)	Limit-QP (dBμV/m)	Limit-AV (dBμV/m)	Antenna	Verdict
33.642	29.44	N/A	N/A	N/A	40.00	N/A	Vertical	PASS
161.114	29.03	N/A	N/A	N/A	43.50	N/A	Vertical	PASS
1354.062	39.58	N/A	N/A	74.00	N/A	54.00	Vertical	PASS
3353.592	43.35	N/A	N/A	74.00	N/A	54.00	Vertical	PASS
10335.516	46.72	N/A	N/A	74.00	N/A	54.00	Vertical	PASS
18527.260	48.00	N/A	N/A	74.00	N/A	54.00	Vertical	PASS


(30MHz to 25GHz, Antenna Vertical, GFSK, channel 78)

 **$\pi/4$ -DQPSK Mode**

Plots for Channel = 0

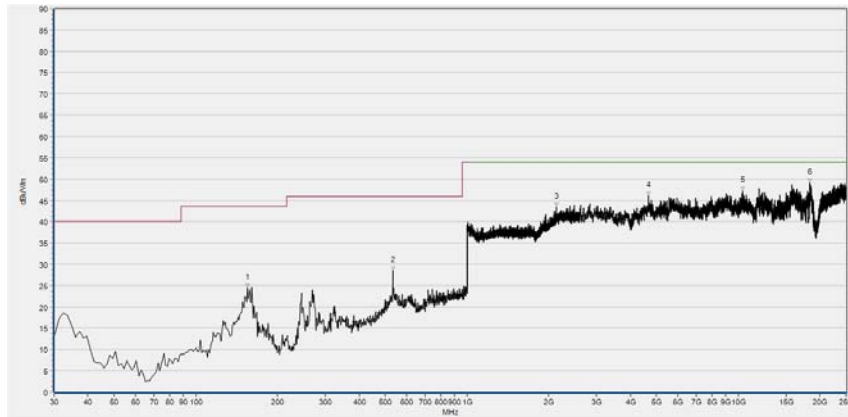


Fre. (MHz)	Pk (dBμV/m)	QP (dBμV/m)	AV (dBμV/m)	Limit-PK (dBμV/m)	Limit-QP (dBμV/m)	Limit-AV (dBμV/m)	Antenna	Verdict
155.044	24.45	N/A	N/A	N/A	43.50	N/A	Horizontal	PASS
532.603	28.57	N/A	N/A	N/A	46.00	N/A	Horizontal	PASS
2135.814	43.43	N/A	N/A	74.00	N/A	54.00	Horizontal	PASS
4673.395	46.05	N/A	N/A	74.00	N/A	54.00	Horizontal	PASS
10408.838	47.23	N/A	N/A	74.00	N/A	54.00	Horizontal	PASS
18392.835	49.08	N/A	N/A	74.00	N/A	54.00	Horizontal	PASS

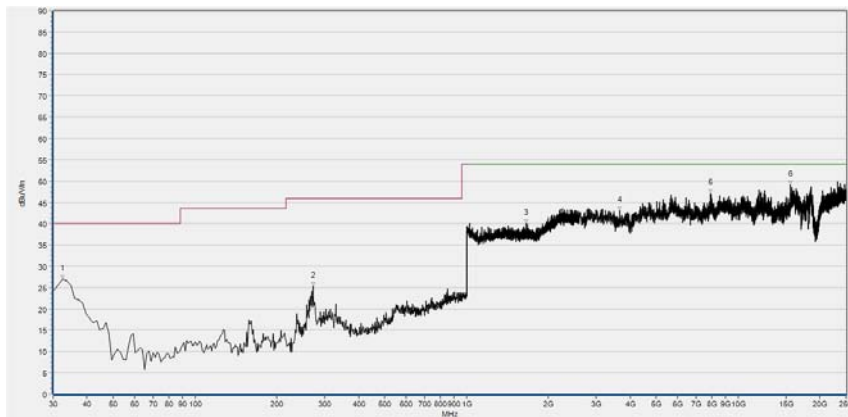(30MHz to 25GHz, Antenna Horizontal, $\pi/4$ -DQPSK, channel 0)

Fre. (MHz)	Pk (dBμV/m)	QP (dBμV/m)	AV (dBμV/m)	Limit-PK (dBμV/m)	Limit-QP (dBμV/m)	Limit-AV (dBμV/m)	Antenna	Verdict
32.428	26.94	N/A	N/A	N/A	40.00	N/A	Vertical	PASS
271.589	25.24	N/A	N/A	N/A	46.00	N/A	Vertical	PASS
1659.464	40.06	N/A	N/A	74.00	N/A	54.00	Vertical	PASS
3659.102	43.00	N/A	N/A	74.00	N/A	54.00	Vertical	PASS
7887.361	47.13	N/A	N/A	74.00	N/A	54.00	Vertical	PASS
15598.436	49.05	N/A	N/A	74.00	N/A	54.00	Vertical	PASS

(30MHz to 25GHz, Antenna Vertical, $\pi/4$ -DQPSK, channel 0)

Plot for Channel = 39

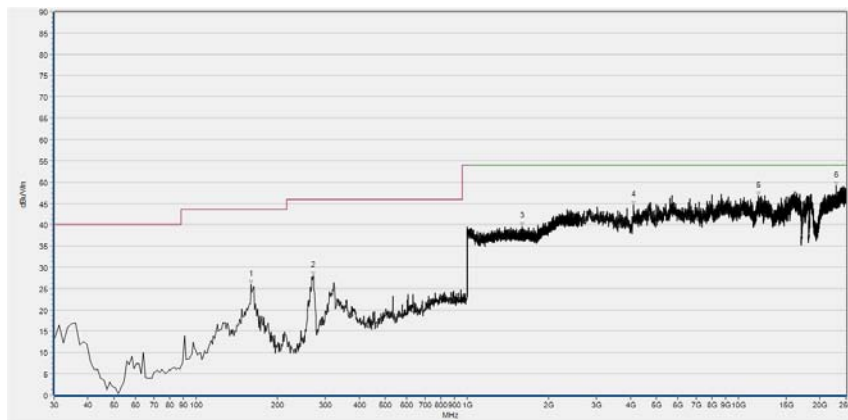

Fre. (MHz)	Pk (dBμV/m)	QP (dBμV/m)	AV (dBμV/m)	Limit-PK (dBμV/m)	Limit-QP (dBμV/m)	Limit-AV (dBμV/m)	Antenna	Verdict
159.900	25.92	N/A	N/A	N/A	43.50	N/A	Horizontal	PASS
270.375	27.91	N/A	N/A	N/A	46.00	N/A	Horizontal	PASS
1597.999	39.57	N/A	N/A	74.00	N/A	54.00	Horizontal	PASS
4111.257	44.50	N/A	N/A	74.00	N/A	54.00	Horizontal	PASS
11854.919	46.71	N/A	N/A	74.00	N/A	54.00	Horizontal	PASS
22926.605	49.17	N/A	N/A	74.00	N/A	54.00	Horizontal	PASS

(30MHz to 25GHz, Antenna Horizontal, $\pi/4$ -DQPSK, channel 39)



Fre. (MHz)	Pk (dBμV/m)	QP (dBμV/m)	AV (dBμV/m)	Limit-PK (dBμV/m)	Limit-QP (dBμV/m)	Limit-AV (dBμV/m)	Antenna	Verdict
33.642	30.28	N/A	N/A	N/A	40.00	N/A	Vertical	PASS
159.900	27.87	N/A	N/A	N/A	43.50	N/A	Vertical	PASS
318.936	22.00	N/A	N/A	N/A	46.00	N/A	Vertical	PASS
2222.889	43.57	N/A	N/A	74.00	N/A	54.00	Vertical	PASS
5357.738	46.95	N/A	N/A	74.00	N/A	54.00	Vertical	PASS
18458.011	48.39	N/A	N/A	74.00	N/A	54.00	Vertical	PASS

(30MHz to 25GHz, Antenna Vertical, $\pi/4$ -DQPSK, channel 39)

Plot for Channel = 78



Fre. (MHz)	Pk (dBμV/m)	QP (dBμV/m)	AV (dBμV/m)	Limit-PK (dBμV/m)	Limit-QP (dBμV/m)	Limit-AV (dBμV/m)	Antenna	Verdict
159.900	24.02	N/A	N/A	N/A	43.50	N/A	Horizontal	PASS
269.161	29.23	N/A	N/A	N/A	46.00	N/A	Horizontal	PASS
1242.017	40.32	N/A	N/A	74.00	N/A	54.00	Horizontal	PASS
2459.144	44.17	N/A	N/A	74.00	N/A	54.00	Horizontal	PASS
8005.492	46.77	N/A	N/A	74.00	N/A	54.00	Horizontal	PASS
18572.068	48.19	N/A	N/A	74.00	N/A	54.00	Horizontal	PASS

(30MHz to 25GHz, Antenna Horizontal, $\pi/4$ -DQPSK, channel 78)



Fre. (MHz)	Pk (dBμV/m)	QP (dBμV/m)	AV (dBμV/m)	Limit-PK (dBμV/m)	Limit-QP (dBμV/m)	Limit-AV (dBμV/m)	Antenna	Verdict
33.642	28.73	N/A	N/A	N/A	40.00	N/A	Vertical	PASS
159.900	30.00	N/A	N/A	N/A	43.50	N/A	Vertical	PASS
1297.079	39.53	N/A	N/A	74.00	N/A	54.00	Vertical	PASS
2836.261	43.61	N/A	N/A	74.00	N/A	54.00	Vertical	PASS
6054.301	45.47	N/A	N/A	74.00	N/A	54.00	Vertical	PASS
16009.856	48.27	N/A	N/A	74.00	N/A	54.00	Vertical	PASS

(30MHz to 25GHz, Antenna Vertical, $\pi/4$ -DQPSK, channel 78)


**8-DPSK Mode**

Plots for Channel = 0



Fre. (MHz)	Pk (dBμV/m)	QP (dBμV/m)	AV (dBμV/m)	Limit-PK (dBμV/m)	Limit-QP (dBμV/m)	Limit-AV (dBμV/m)	Antenna	Verdict
161.114	25.28	N/A	N/A	N/A	43.50	N/A	Horizontal	PASS
246.095	27.25	N/A	N/A	N/A	46.00	N/A	Horizontal	PASS
1238.816	39.74	N/A	N/A	74.00	N/A	54.00	Horizontal	PASS
3011.420	45.10	N/A	N/A	74.00	N/A	54.00	Horizontal	PASS
5797.672	46.70	N/A	N/A	74.00	N/A	54.00	Horizontal	PASS
21635.316	48.88	N/A	N/A	74.00	N/A	54.00	Horizontal	PASS

(30MHz to 25GHz, Antenna Horizontal, 8-DPSK, channel 0)

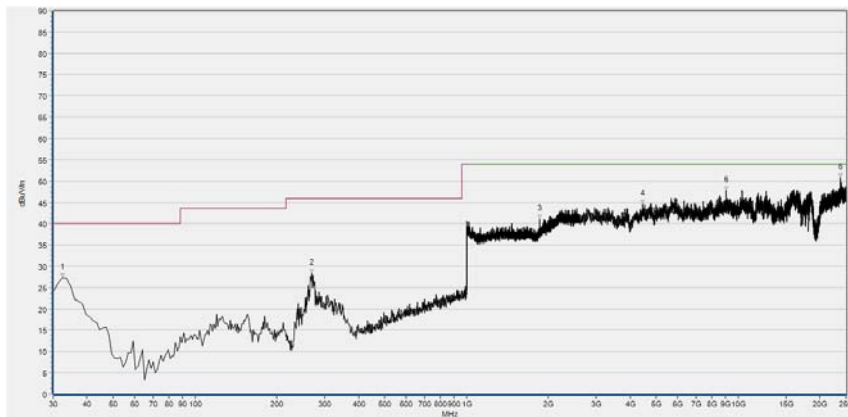


Fre. (MHz)	Pk (dBμV/m)	QP (dBμV/m)	AV (dBμV/m)	Limit-PK (dBμV/m)	Limit-QP (dBμV/m)	Limit-AV (dBμV/m)	Antenna	Verdict
32.428	27.31	N/A	N/A	N/A	40.00	N/A	Vertical	PASS
269.161	28.26	N/A	N/A	N/A	46.00	N/A	Vertical	PASS
1856.663	40.98	N/A	N/A	74.00	N/A	54.00	Vertical	PASS
4449.354	44.57	N/A	N/A	74.00	N/A	54.00	Vertical	PASS
9027.932	47.83	N/A	N/A	74.00	N/A	54.00	Vertical	PASS
23822.768	50.71	N/A	N/A	74.00	N/A	54.00	Vertical	PASS

(30MHz to 25GHz, Antenna Vertical, 8-DPSK, channel 0)




Plot for Channel = 39

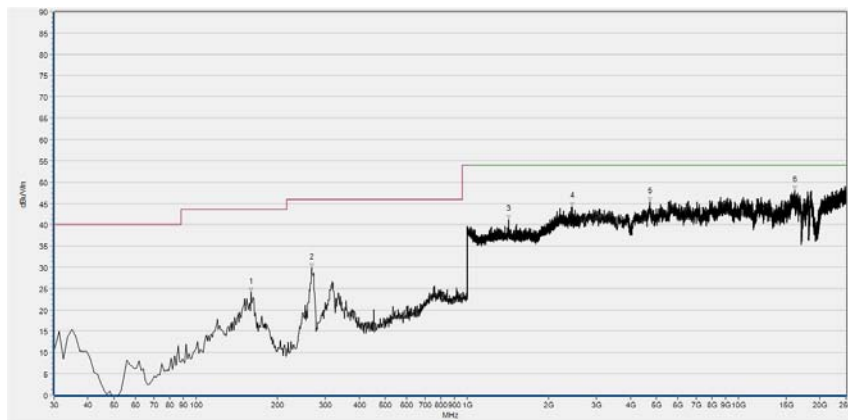

Fre. (MHz)	Pk (dBμV/m)	QP (dBμV/m)	AV (dBμV/m)	Limit-PK (dBμV/m)	Limit-QP (dBμV/m)	Limit-AV (dBμV/m)	Antenna	Verdict
159.900	24.18	N/A	N/A	N/A	43.50	N/A	Horizontal	PASS
266.733	29.79	N/A	N/A	N/A	46.00	N/A	Horizontal	PASS
1425.130	41.16	N/A	N/A	74.00	N/A	54.00	Horizontal	PASS
2438.015	44.22	N/A	N/A	74.00	N/A	54.00	Horizontal	PASS
4718.203	45.49	N/A	N/A	74.00	N/A	54.00	Horizontal	PASS
16148.354	48.10	N/A	N/A	74.00	N/A	54.00	Horizontal	PASS


(30MHz to 25GHz, Antenna Horizontal, 8-DPSK, channel 39)

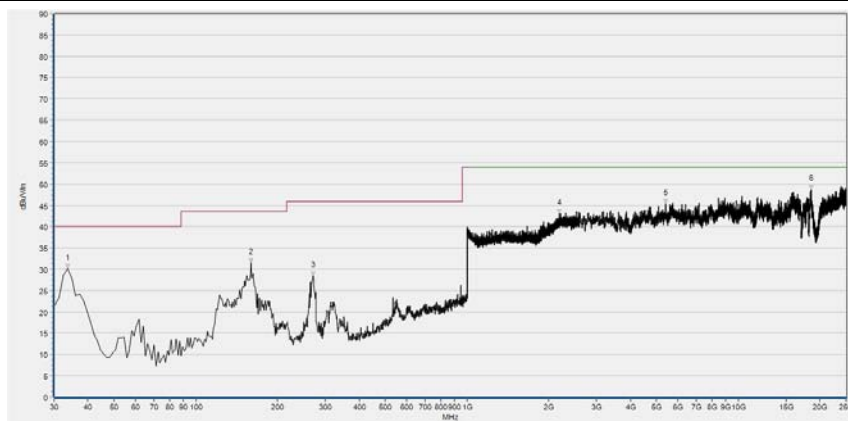

Fre. (MHz)	Pk (dBμV/m)	QP (dBμV/m)	AV (dBμV/m)	Limit-PK (dBμV/m)	Limit-QP (dBμV/m)	Limit-AV (dBμV/m)	Antenna	Verdict
33.642	30.15	N/A	N/A	N/A	40.00	N/A	Vertical	PASS
159.900	31.58	N/A	N/A	N/A	43.50	N/A	Vertical	PASS
270.375	28.48	N/A	N/A	N/A	46.00	N/A	Vertical	PASS
2190.876	43.09	N/A	N/A	74.00	N/A	54.00	Vertical	PASS
5398.472	45.47	N/A	N/A	74.00	N/A	54.00	Vertical	PASS
18543.553	48.72	N/A	N/A	74.00	N/A	54.00	Vertical	PASS


(30MHz to 25GHz, Antenna Vertical, 8-DPSK, channel 39)

Plot for Channel = 78

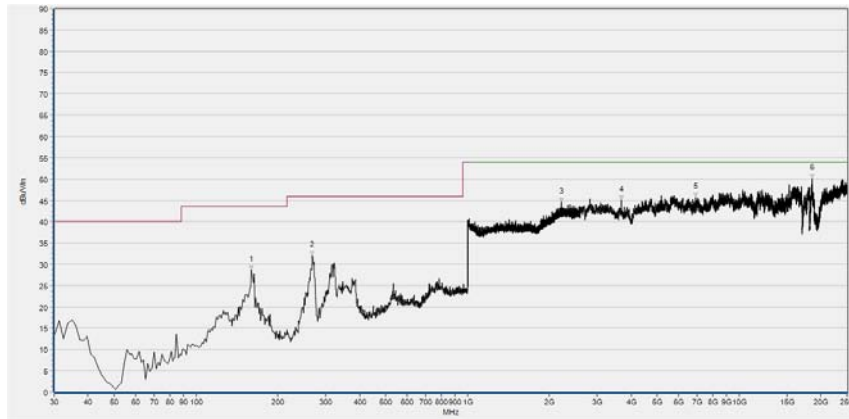

Fre. (MHz)	Pk (dBμV/m)	QP (dBμV/m)	AV (dBμV/m)	Limit-PK (dBμV/m)	Limit-QP (dBμV/m)	Limit-AV (dBμV/m)	Antenna	Verdict
159.900	28.71	N/A	N/A	N/A	43.50	N/A	Horizontal	PASS
267.947	31.97	N/A	N/A	N/A	46.00	N/A	Horizontal	PASS
2213.285	44.63	N/A	N/A	74.00	N/A	54.00	Horizontal	PASS
3687.616	45.01	N/A	N/A	74.00	N/A	54.00	Horizontal	PASS
6909.729	45.71	N/A	N/A	74.00	N/A	54.00	Horizontal	PASS
18523.186	50.06	N/A	N/A	74.00	N/A	54.00	Horizontal	PASS

(30MHz to 25GHz, Antenna Horizontal, 8-DPSK, channel 78)

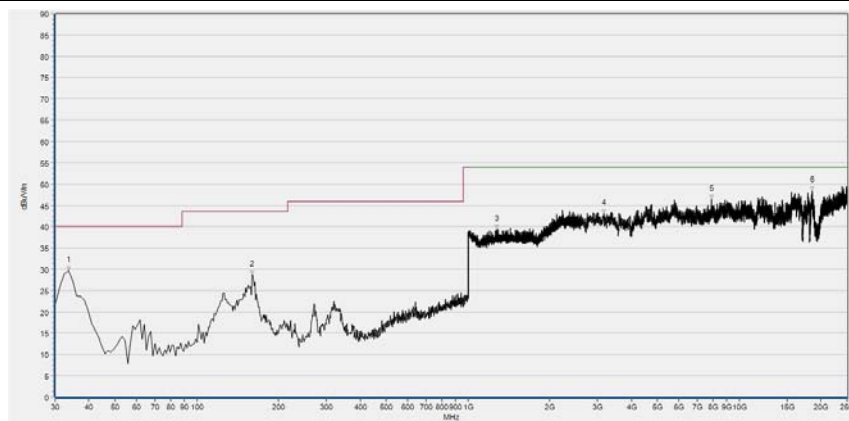

Fre. (MHz)	Pk (dBμV/m)	QP (dBμV/m)	AV (dBμV/m)	Limit-PK (dBμV/m)	Limit-QP (dBμV/m)	Limit-AV (dBμV/m)	Antenna	Verdict
33.642	29.67	N/A	N/A	N/A	40.00	N/A	Vertical	PASS
159.900	28.69	N/A	N/A	N/A	43.50	N/A	Vertical	PASS
1275.950	39.31	N/A	N/A	74.00	N/A	54.00	Vertical	PASS
3174.359	43.00	N/A	N/A	74.00	N/A	54.00	Vertical	PASS
7883.288	46.35	N/A	N/A	74.00	N/A	54.00	Vertical	PASS
18580.215	48.42	N/A	N/A	74.00	N/A	54.00	Vertical	PASS

(30MHz to 25GHz, Antenna Vertical, 8-DPSK, channel 78)

Annex A Test Uncertainty

Where relevant, the following measurement uncertainty levels have been estimated for test performed on the EUT as specified in CISPR 16-1-2:

Test items	Uncertainty
Number of Hopping Frequency	$\pm 5\%$
Peak Output Power	$\pm 2.22\text{dB}$
20dB Bandwidth	$\pm 5\%$
Carrier Frequency Separation	$\pm 5\%$
Time of Occupancy (Dwell time)	$\pm 5\%$
Conducted Spurious Emission	$\pm 2.77\text{ dB}$
Restricted Frequency Bands	$\pm 5\%$
Radiated Emission	$\pm 2.95\text{dB}$
Conducted Emission	$\pm 2.44\text{dB}$

This uncertainty represent an expanded uncertainty expressed at approximately the 95% confidence level using a coverage factor of $k=2$



Annex B Testing Laboratory Information

1. Identification of the Responsible Testing Laboratory

Laboratory Name:	Shenzhen Morlab Communications Technology Co., Ltd. Morlab Laboratory
Laboratory Address:	FL.3, Building A, FeiYang Science Park, No.8 LongChang Road, Block 67, BaoAn District, ShenZhen, GuangDong Province, P. R. China
Telephone:	+86 755 36698555
Facsimile:	+86 755 36698525

2. Identification of the Responsible Testing Location

Name:	Shenzhen Morlab Communications Technology Co., Ltd. Morlab Laboratory
Address:	FL.3, Building A, FeiYang Science Park, No.8 LongChang Road, Block 67, BaoAn District, ShenZhen, GuangDong Province, P. R. China

3. Facilities and Accreditations

All measurement facilities used to collect the measurement data are located at FL.3, Building A, FeiYang Science Park, Block 67, BaoAn District, Shenzhen, 518101 P. R. China. The test site is constructed in conformance with the requirements of ANSI C63.10-2013 and CISPR Publication 22; the FCC designation number is CN1192, the test firm registration number is 226174.



4. Test Equipments Utilized

4.1 Conducted Test Equipments

Equipment Name	Serial No.	Type	Manufacturer	Cal. Date	Cal. Due
Bluetooth Base Station	6K00006210	MT8852B	Anritsu	2018.04.17	2019.04.16
Directional coupler	17041703	DTO-5-30	ShangHai Huaxiang	N/A	N/A
EXA Signal Analyzer	MY53470836	N9010A	Agilent	2018.11.06	2019.11.05
RF cable (30MHz-26GHz)	CB01	RF01	Morlab	N/A	N/A
Coaxial cable	CB02	RF02	Morlab	N/A	N/A
SMA connector	CN01	RF03	HUBER-SUHNER	N/A	N/A
Computer	T430i	Think Pad	Lenovo	N/A	N/A

4.2 Conducted Emission Test Equipments

Equipment Name	Serial No.	Type	Manufacturer	Cal. Date	Cal. Due
Receiver	MY56400093	N9038A	KEYSIGHT	2018.05.08	2019.05.07
LISN	812744	NSLK 8127	Schwarzbeck	2018.05.08	2019.05.07
Pulse Limiter (20dB)	9391	VTSD 9561-D	Schwarzbeck	2018.05.08	2019.05.07
Coaxial cable(BNC) (30MHz-26GHz)	CB01	EMC01	Morlab	N/A	N/A

4.3 List of Software Used

Description	Manufacturer	Software Version
Test system	Tonscend	V2.6
Power Panel	Agilent	V3.8
MORLAB EMCR V1.2	MORLAB	V 1.0

**4.4 Radiated Test Equipments**

Equipment Name	Serial No.	Type	Manufacturer	Cal. Date	Cal. Due
Receiver	MY54130016	N9038A	Agilent	2018.08.04	2019.08.03
Test Antenna - Bi-Log	9163-519	VULB 9163	Schwarzbeck	2018.05.18	2019.05.17
Test Antenna - Loop	1519-022	FMZB1519	Schwarzbeck	2018.03.03	2019.03.02
Test Antenna – Horn	01774	BBHA 9120D	Schwarzbeck	2018.08.06	2019.08.05
Test Antenna – Horn	BBHA9170 #774	BBHA9170	Schwarzbeck	2018.08.02	2019.08.01
Coaxial cable (N male) (9KHz-30MHz)	CB04	EMC04	Morlab	N/A	N/A
Coaxial cable (N male) (30MHz-26GHz)	CB02	EMC02	Morlab	N/A	N/A
Coaxial cable (N male) (30MHz-26GHz)	CB03	EMC03	Morlab	N/A	N/A
1-18GHz pre-Amplifier	MA02	TS-PR18	Rohde& Schwarz	2018.05.08	2019.05.07
18-26.5GHz pre-Amplifier	MA03	TS-PR18	Rohde& Schwarz	2018.05.08	2019.05.07
Notch Filter	N/A	WRCG-2400-2483.5-60SS	Wainwright	2018.12.01	2019.11.30
Anechoic Chamber	N/A	9m*6m*6m	CRT	2017.11.19	2020.11.18

————— END OF REPORT —————