

TEST REPORT

of the accredited test laboratory

TÜV Nr.:INE-AT/FG-20/174

Applicant: SES-imagotag GmbH
Kalsdorfer Strasse 12
A – 8072 Fernitz-Mellach

Tested Product: Networking transceiver

Product Name: VUSION 2.2

Model: EDG3-0220-B

FCC-ID: 2ACQM-EDG3-0220-B

IC-ID: 12154A-EDG30220B

Manufacturer: SES-imagotag GmbH
Kalsdorfer Strasse 12
A – 8072 Fernitz-Mellach

Output power / field strength: 3,98 mV/m average @ 3m distance **power supply:** 3V DC internal battery

Frequency range: 2404,053 - 2479,285 MHz **Channel separation:** 0,35 MHz

Standard: FCC: 47 CFR Part 15 (Oct. 1st 2019 edition)
RSS-210 Issue 10, December 2019

Testing Laboratory,
Inspection Body,
Certification Body,
Calibration Laboratory,
Verifizierungsstelle**Notified Body 0408**
IC 2932K-1**Non-executive**
Board of Directors:
KR DI Johann
Marihart**Management:**
DI Dr. Stefan Haas
Mag. Christoph
Wenninger**Registered Office:**
Deutschstrasse 10
1230 Vienna/Austria**Branch Offices:**
www.tuv.at/standorte**Company Register**
Court / - Number:
Vienna / FN 288476 f**Bank Details:**
IBAN
AT131200052949001066
BIC BKAUATWWVAT ATU63240488
DVR 3002476TÜV AUSTRIA SERVICES GMBH
Test laboratory for EMC

Ing. Michael Emminger

examined by / Testing
Laboratory
TÜV AUSTRIA SERVICES
GMBH

21.10.2020

Ing. Wilhelm Seier

approved by / Testing
Laboratory
TÜV AUSTRIA SERVICES
GMBH

A publication of this test report is only permitted literally.

Copying or reproduction of partial sections needs a written permission of TÜV AUSTRIA
SERVICES GMBH.

The results of this test report only refer to the provided equipment.

Contents

	Designation	PAGE
1.	Applicant	3
2.	Description of EUT	4
3.	Standards / Final result	5
4.	Test results	
	List of measurements according to 47 CFR 15 and RSS-210	
4.1	Test object data	6
4.2	Number of channels and channel spacing	7
4.3	Duty Cycle for averaging	8
4.4	Field strength at 2400 – 2483,5 MHz	9-11
4.5	Emissions outside 2400 – 2483,5 MHz (15.209)	12-14
Appendix	Designation	PAGES
1	Test equipment used	4
2	Photodocumentation	8

1. Applicant

Company: SES-imagotag GmbH

Department: Product & Project Manager

Address: A – 8072 Fernitz-Mellach; Kalsdorfer Strasse 12

Contact person: Mr. Philipp Jauck

EUT received on: 09.09.2020

Tests were performed on: 09.09. and 07.10.2020

2. Description of EUT

EUT:	Networking transceiver
Product name:	VUSION 2.2
Model:	EDG3-0220-B
Serial Number:	Prototype
Manufacturer:	SES-imagotag GmbH A – 8072 Fernitz-Mellach; Kalsdorfer Strasse 12
Description:	SES-imagotag GmbH provided the following configuration for the measurements: Prototype with special test-firmware for continuous transmission
Operating mode:	The measurements were carried out at the following running states: test-firmware running, transmitting continuously
Technical data EUT:	Rated voltage: 3VDC Rated current: <1A Rated frequency: DC Mains voltage during the tests: 3VDC internal battery
Climatic conditions in the emc laboratory:	Relative humidity: 51% Temperature: 25°C

3. Standards / Final result

Name	Title	Deviation	Result
Title 47 CFR Part 15 1. October 2019 edition	RADIO FREQUENCY DEVICES	none	OK
RSS-210 Issue 10, December 2019	Licence-Exempt Radio Apparatus: Category I Equipment	none	OK
Result: Opinions and interpretation of testing laboratory OK: EUT passed NOK: EUT failed			

4.1 TEST OBJECT DATA

General EUT Description

This transceiver module is working in a network consisting of a controller station, so called Accesspoint, and various displays. The Accesspoint transmits information to the displays and receives acknowledgements. This device is a module to be used in displays operating in the network system. The device is equipped with a passive NFC chip onboard which does not have its own rf generation. It works as tag and can also receive information from the NFC reader station.

2.1033 (c) Technical description

2.1033 (4) Type of emission: Minimum shift keying – declared channel bandwidth 250 kHz –
'virtual' channel spacing about 0,35 MHz. Only 11 channels from the channel plan are used, therefore the channel spacing in reality is much higher and varies from 2,45 MHz minimum up to 17,15 MHz.

2.1033 (5) Frequency range: 2404,053 – 2479,285 MHz (channel center frequencies of channel 0 up to ch. 10)

2.1033 (6) Power range and Controls: The maximum field strength measured is 3,98 mV/m average @ 3m distance. There is no power control or regulation.

2.1033 (7) Maximum output power rating: 3,98 mV/m average @ 3m distance.

2.1033 (8) DC Voltage and Current: 3 VDC (internal battery)
maximum current consumption: 28,0mA during continuous transmission

RSS-135 This standard does not apply to:

- 1.1.(a) a receiver that scans radio frequencies for the purpose of enabling its associated transmitter to avoid transmitting in an occupied frequency but which does not have the capability of decoding the message (e.g. converting it to audio voice) contained in the radio signal

Tests were performed on: September 09th and October 7th 2020.

4.2 Number of channels and channel spacing

§ 2.1033

Channel plan:

ESL-CH	RF-CH	f_{G2} [GHz] (26.000000 MHz) (6049109)
CH0	12	2.404053
CH1	29	2.410002
CH2	63	2.421899
CH3	71	2.424698
CH4	120	2.441844
CH5	141	2.449192
CH6	177	2.461789
CH7	199	2.469487
CH8	213	2.474386
CH9	220	2.476835
CH10	227	2.479285


Tests were performed on ESL channels 0, 4 and 10.

Test Equipment used: N/A

4.3 Duty Cycle measurements for averaging

§ 15.249 (e)

Mode: data transmission (worst case in 100ms)

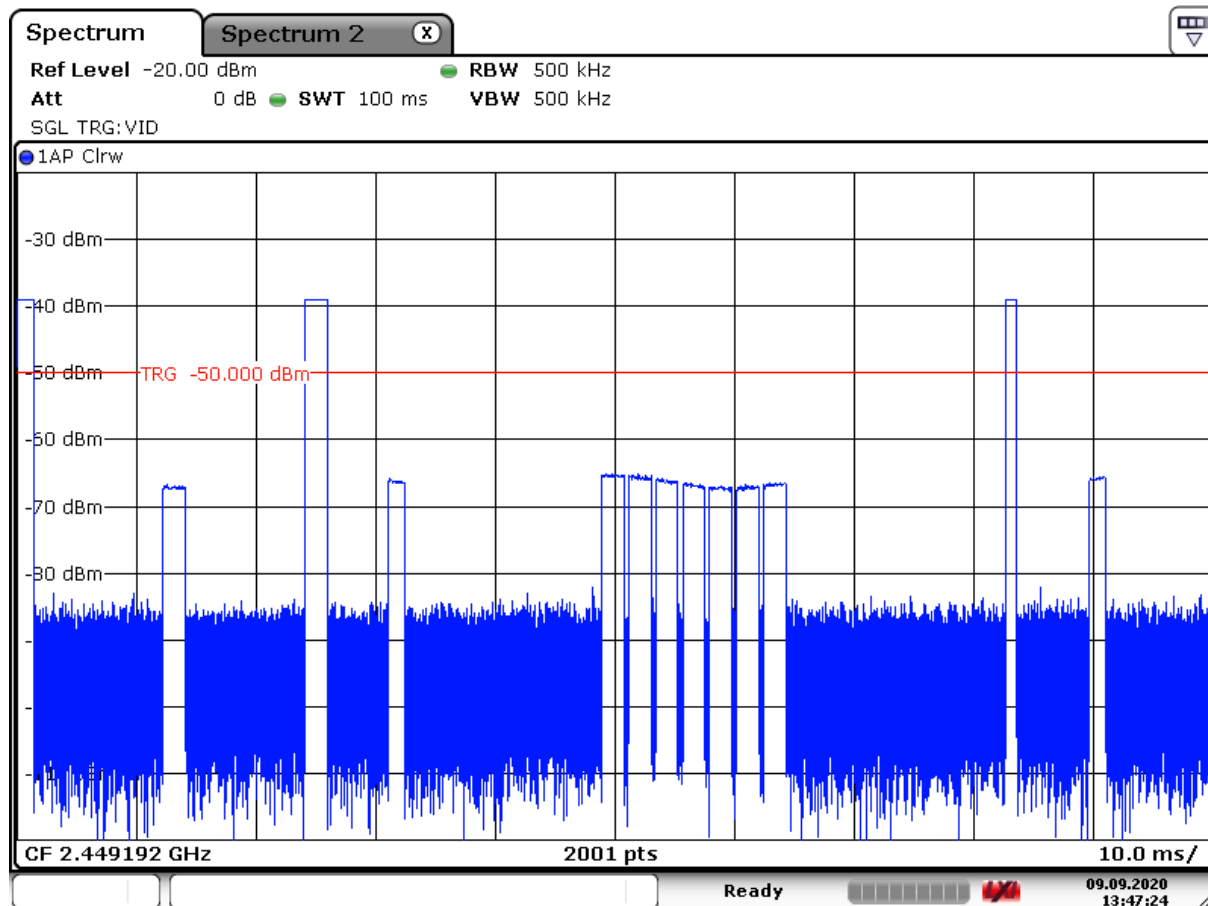

Date: 9.SEP.2020 13:47:24

According to the timing protocol description provided by the manufacturer and attached as technical description to the application for certification, the transmission burst time was checked to not exceed the declared value. The declared value was taken for calculation, as that gives the worst case. Transmission bursts of 1,48ms length occurring twice in 100ms with another handshaking burst of 1,97ms length give a duty cycle of 4,93% or an average factor of -26,1 dB.

LIMIT SUBCLAUSE 15.249(e)

(e) As shown in §15.35(b), for frequencies above 1000 MHz, the field strength limits in paragraphs (a) and (b) of this section are based on average limits. However, the peak field strength of any emission shall not exceed the maximum permitted average limits specified above by more than 20 dB under any condition of modulation. For point-to-point operation under paragraph (b) of this section, the peak field strength shall not exceed 2500 millivolts/meter at 3 meters along the antenna azimuth.

Test Equipment used: EMV-205

4.4 Field strength of emissions at 2400 – 2483,5 MHz

§ 15.249 (a) (c)

Operating on CH 0 (2404,053MHz)

The maximum peak value measured was 97,7 dBµV/m = 76,7 mV/m at 3m distance.

With the averaging factor calculated on page 8 of this test report of -26,1 dB the maximum average value is then 71,6 dBµV/m = 3,80 mV/m at 3m distance.

LIMIT SUBCLAUSE 15.249(a) (c)

(a) Except as provided in paragraph (b) of this section, the field strength of emissions from intentional radiators operated within these frequency bands shall comply with the following:

Fundamental frequency	Field strength of fundamental (millivolts/meter)	Field strength of harmonics (microvolts/meter)
902–928 MHz	50	500
2400–2483.5 MHz	50	500
5725–5875 MHz	50	500
24.0–24.25 GHz	250	2500

(c) Field strength limits are specified at a distance of 3 meters.

Test Equipment used: EMV-100; EMV-101; EMV-102; EMV-103; EMV-105; EMV-110; EMV-200

Field strength of emissions at 2400 – 2483,5 MHz

§ 15.249 (a) (c)

Operating on CH 4 (2441,844 MHz)

The maximum peak value measured was 97,5 dB μ V/m = 75,0 mV/m at 3m distance.

With the averaging factor calculated on page 8 of this test report of -26,1 dB the maximum average value is then 71,4 dB μ V/m = 3,72 mV/m at 3m distance.

LIMIT SUBCLAUSE 15.249(a) (c)

(a) Except as provided in paragraph (b) of this section, the field strength of emissions from intentional radiators operated within these frequency bands shall comply with the following:

Fundamental frequency	Field strength of fundamental (millivolts/meter)	Field strength of harmonics (microvolts/meter)
902–928 MHz	50	500
2400–2483.5 MHz	50	500
5725–5875 MHz	50	500
24.0–24.25 GHz	250	2500

(c) Field strength limits are specified at a distance of 3 meters.

Test Equipment used: EMV-100; EMV-101; EMV-102; EMV-103; EMV-105; EMV-110; EMV-200

Field strength of emissions at 2400 – 2483,5 MHz

§ 15.249 (a) (c)

Operating on CH 10 (2479,285 MHz)

The maximum peak value measured was 98,1 dBµV/m = 80,4 mV/m at 3m distance.

With the averaging factor calculated on page 8 of this test report of -26,1 dB the maximum average value is then 72,0 dBµV/m = 3,98 mV/m at 3m distance.

LIMIT SUBCLAUSE 15.249(a) (c)

(a) Except as provided in paragraph (b) of this section, the field strength of emissions from intentional radiators operated within these frequency bands shall comply with the following:

Fundamental frequency	Field strength of fundamental (millivolts/meter)	Field strength of harmonics (microvolts/meter)
902–928 MHz	50	500
2400–2483.5 MHz	50	500
5725–5875 MHz	50	500
24.0–24.25 GHz	250	2500


(c) Field strength limits are specified at a distance of 3 meters.

Test Equipment used: EMV-100; EMV-101; EMV-102; EMV-103; EMV-105; EMV-110; EMV-200

4.5 Emissions outside 2400 – 2483,5 MHz

§ 15.249 (d) (e)

Channel 0 (2404,053 MHz) – average values above 1 GHz are shown in magenta – green = peak

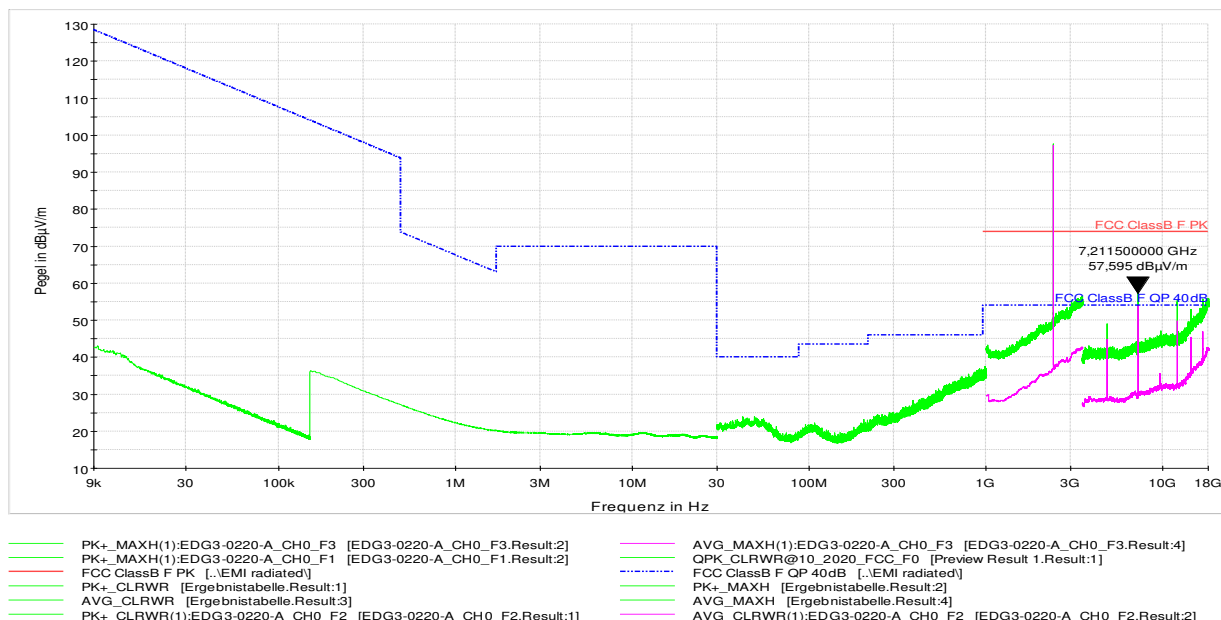

Worst case Emission: 57,6 dBµV/m Peak at 7211,5 MHz giving 31,5 dBµV/m average with the factor described on page 8.

LIMIT

SUBCLAUSE 15.249(d) (e) (15.209)

(d) Emissions radiated outside of the specified frequency bands, except for harmonics, shall be attenuated by at least 50 dB below the level of the fundamental or to the general radiated emission limits in §15.209, whichever is the lesser attenuation.

(e) As shown in §15.35(b), for frequencies above 1000 MHz, the field strength limits in paragraphs (a) and (b) of this section are based on average limits. However, the peak field strength of any emission shall not exceed the maximum permitted average limits specified above by more than 20 dB under any condition of modulation. For point-to-point operation under paragraph (b) of this section, the peak field strength shall not exceed 2500 millivolts/meter at 3 meters along the antenna azimuth.

Frequency (MHz)	Field strength (microvolts/meter)	Measurement distance (meters)
0.009–0.490	2400/F(kHz)	300
0.490–1.705	24000/F(kHz)	30
1.705–30.0	30	30
30–88	100**	3
88–216	150**	3
216–960	200**	3
Above 960	500	3

Test Equipment used:


EMV-100; EMV-101; EMV-102; EMV-103; EMV-105; EMV-110; EMV-111; EMV-112; EMV-200; NT-416

Remark: Although the measurements were made up to the 10th harmonic (25 GHz) the frequency range above 18 GHz is not automatized, so no graphs are available. Nevertheless no emissions above noise level were found in the frequency range above 18 GHz.

Emissions outside 2400 – 2483,5 MHz

§ 15.249 (d) (e)

Channel 4 (2441,844 MHz) – average values above 1 GHz are shown in magenta – green = peak

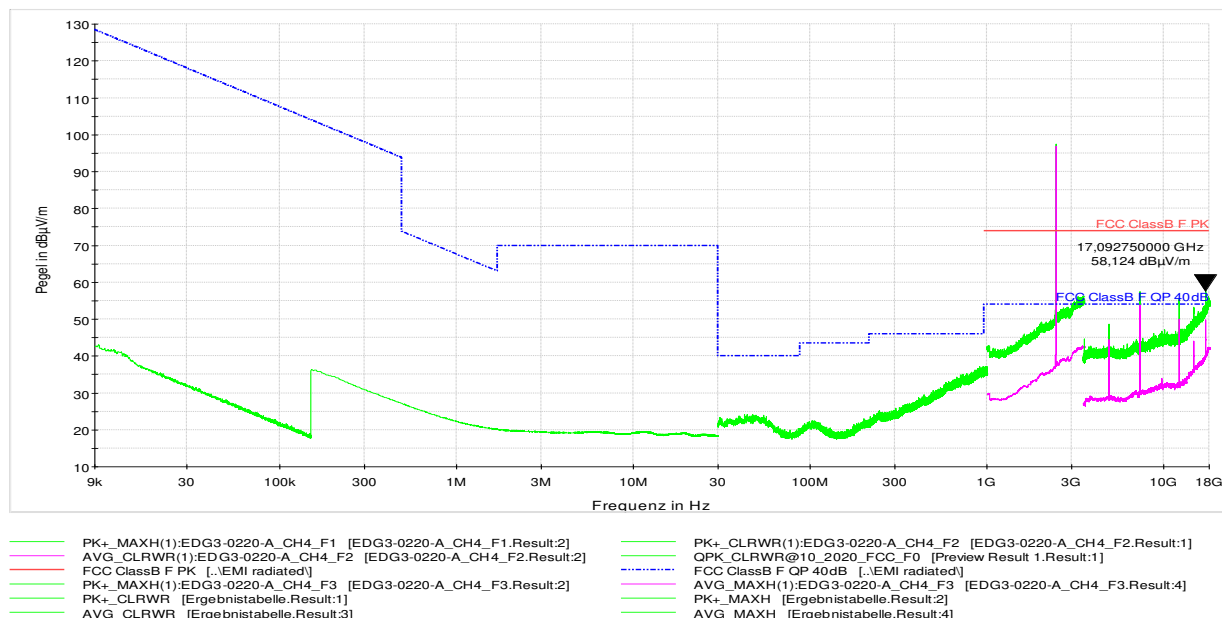

Worst case Emission: 58,1 dBµV/m Peak at 17092,75 MHz giving 32,0 dBµV/m average with the factor described on page 8.

LIMIT

SUBCLAUSE 15.249(d) (e) (15.209)

(d) Emissions radiated outside of the specified frequency bands, except for harmonics, shall be attenuated by at least 50 dB below the level of the fundamental or to the general radiated emission limits in §15.209, whichever is the lesser attenuation.

(e) As shown in §15.35(b), for frequencies above 1000 MHz, the field strength limits in paragraphs (a) and (b) of this section are based on average limits. However, the peak field strength of any emission shall not exceed the maximum permitted average limits specified above by more than 20 dB under any condition of modulation. For point-to-point operation under paragraph (b) of this section, the peak field strength shall not exceed 2500 millivolts/meter at 3 meters along the antenna azimuth.


Frequency (MHz)	Field strength (microvolts/meter)	Measurement distance (meters)
0.009–0.490	2400/F(kHz)	300
0.490–1.705	24000/F(kHz)	30
1.705–30.0	30	30
30–88	100**	3
88–216	150**	3
216–960	200**	3
Above 960	500	3

Test Equipment used:

EMV-100; EMV-101; EMV-102; EMV-103; EMV-105; EMV-110; EMV-111; EMV-112; EMV-200; NT-416

Remark: Although the measurements were made up to the 10th harmonic (25 GHz) the frequency range above 18 GHz is not automatized, so no graphs are available. Nevertheless no emissions above noise level were found in the frequency range above 18 GHz.

Emissions outside 2400 – 2483,5 MHz § 15.249 (d) (e)
Channel 10 (2479,285 MHz) – average values above 1 GHz are shown in magenta – green = peak

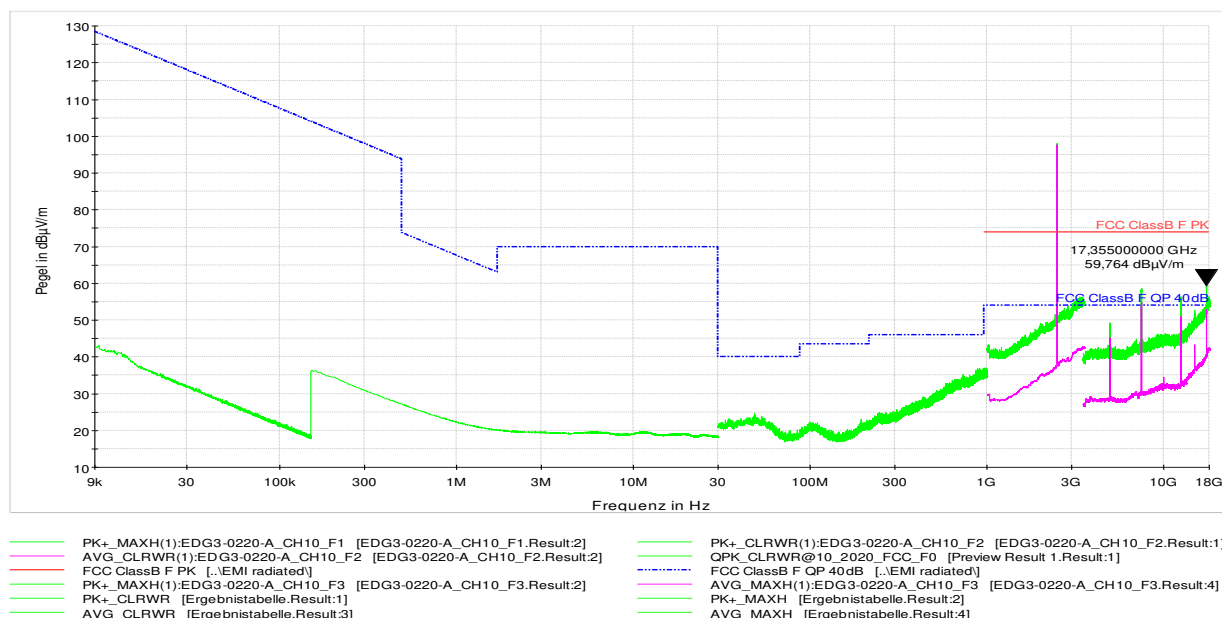

Worst case Emission: 59,8 dBµV/m Peak at 17335 MHz giving 33,7 dBµV/m average with the factor described on page 8.

LIMIT SUBCLAUSE 15.249(d) (e) (15.209)

(d) Emissions radiated outside of the specified frequency bands, except for harmonics, shall be attenuated by at least 50 dB below the level of the fundamental or to the general radiated emission limits in §15.209, whichever is the lesser attenuation.

(e) As shown in §15.35(b), for frequencies above 1000 MHz, the field strength limits in paragraphs (a) and (b) of this section are based on average limits. However, the peak field strength of any emission shall not exceed the maximum permitted average limits specified above by more than 20 dB under any condition of modulation. For point-to-point operation under paragraph (b) of this section, the peak field strength shall not exceed 2500 millivolts/meter at 3 meters along the antenna azimuth.

Frequency (MHz)	Field strength (microvolts/meter)	Measurement distance (meters)
0.009–0.490	2400/F(kHz)	300
0.490–1.705	24000/F(kHz)	30
1.705–30.0	30	30
30–88	100**	3
88–216	150**	3
216–960	200**	3
Above 960	500	3

Test Equipment used:

EMV-100; EMV-101; EMV-102; EMV-103; EMV-105; EMV-110; EMV-111; EMV-112; EMV-200; NT-416

Remark: Although the measurements were made up to the 10th harmonic (25 GHz) the frequency range above 18 GHz is not automatized, so no graphs are available. Nevertheless no emissions above noise level were found in the frequency range above 18 GHz.

Appendix 1

Test equipment used

Division:
Industry & Energy

Department: FG

Test report number:
INE-AT/FG-20/174

Page: 1 of 4

Date: 21.10.2020

☐	Anechoic Chamber with 3m measurement distance	NT-100	☐	Power quality analyzer Fluke 1760 (complete set)	NT-160 - NT-173
☐	Stripline according to ISO 11452-5	NT-108	☐	Spectrum analyzer – FSP7 9 kHz – 7 GHz	NT-200
☐	MA4000 - Antenna mast 1 - 4 m height	NT-110/1	☐	ESCI - Test receiver 9 kHz - 7 GHz	NT-203/1
☐	DS - Turntable 0 - 400 ° Azimuth	NT-111/1	☐	ESI26 – Test receiver 20 Hz – 26,5 GHz	NT-207
☐	CO3000 Controller Mast+Turntable	NT-112/1	☐	Digital Radio Tester CMW500	NT-208/1
☐	HUF-Z3 - Log. Per. Antenna 200 - 1000 MHz	NT-121	☐	Noise-gen., ITU-R 559-2 20 Hz – 20 kHz	NT-209
☐	FMZB1513 - Loop Antenna 9 kHz - 30 MHz	NT-122/1	☐	CMTA - Radiocommunication analyzer ; 0,1 - 1000 MHz	NT-210
☐	HFH-Z6 - Rod Antenna 9 kHz - 30 MHz	NT-123	☐	3271 - Spectrum analyzer 100 Hz - 26,5 GHz	NT-211
☐	3121C - Dipole Antenna 28 - 1000 MHz	NT-124	☐	Digital Radio Tester Aeroflex 3920	NT-212/1
☐	3115 - Horn Antenna 1 - 18 GHz (immunity)	NT-125	☐	Mixer M28HW 26,5 GHz - 40 GHz	NT-214
☐	3116 - Horn Antenna 18 - 40 GHz	NT-126	☐	RubiSource T&M Timing reference	NT-216
☐	SAS-200/543 - Bicon. Antenna 20 MHz - 300 MHz	NT-127	☐	Radiocommunication analyzer SWR 1180 MD	NT-217
☐	AT-1080 - Log. Per. Antenna 80 - 1000 MHz	NT-128	☐	Mixer M19HWD 40 GHz – 60 GHz	NT-218
☐	HK-116 - bicon. Antenna 20 MHz - 300 MHz	NT-129	☐	Mixer M12HWD 60 GHz – 90 GHz	NT-219
☐	HK-116 - bicon. Antenna 20 MHz - 300 MHz	NT-130	☐	DSO9104 Digital scope	NT-220/1
☐	3146 - Log. Per. Antenna 200 – 1000 MHz	NT-131	☐	TPS 2014 Digital scope	NT-222
☐	VULB 9163 Trilog Antenna 30 – 3000 MHz	NT-131/1	☐	Artificial Ear according to IEC 60318	NT-224
☐	Loop Antenna H-Field	NT-132	☐	1 kHz Sound calibrator	NT-225
☐	Horn Antenna 500 MHz - 2900 MHz	NT-133	☐	B10 - Harmonics and flicker analyzer	NT-232
☐	Horn Antenna 500 MHz - 6000 MHz	NT-133/1	☐	SRM-3006 Spectrum analyzer	NT-233/1a
☐	Log. per. Antenna 800 MHz - 2500 MHz	NT-134	☐	E-field probe SRM 75 MHz – 3 GHz	NT-234
☐	Log. per. Antenna 800 MHz - 2500 MHz	NT-135	☐	Field Meter NBM-500 incl. E- and H-Field probes	NT-240a-e
☐	BiConiLog Antenna 26 MHz – 2000 MHz	NT-137	☐	Hall-Teslameter ETM-1	NT-241
☐	Conical Dipol Antenna PCD8250	NT-138	☐	EFA-3 H-field- / E-field probe	NT-243
☐	HF 906 - Horn Antenna 1 - 18 GHz (emission)	NT-139	☐	EHP-50F H-field- / E-field probe	NT-243/1
☐	HZ-1 Antenna tripod	NT-150	☐	Field Meter EMR-200 100 kHz – 3 GHz	NT-244
☐	BN 1500 Antenna tripod	NT-151	☐	E-field probe 100 kHz – 3 GHz	NT-245
☐	Ant. tripod for EN61000-4-3 Model TP1000A	NT-156	☐	H-field probe 300 kHz – 30 MHz	NT-246

Appendix 1 (continued)

Test equipment used

☐ E-field probe 3 MHz – 18 GHz	NT-247	☐ T82-50 RF-Amplifier 2 GHz – 8 GHz	NT-331
☐ H-field probe 27 MHz – 1 GHz	NT-248	☐ 500W1000M7 - RF-Amplifier 80 - 1000 MHz / 500 W	NT-332
☐ ELT-400 1 Hz – 400 kHz	NT-249	☐ AS0102-65R - RF-Amplifier 1 GHz - 2 GHz	NT-333
☐ MDS 21 - Absorbing clamp 30 - 1000 MHz	NT-250	☐ APA01 – RF-Amplifier 0,5 GHz – 2,5 GHz	NT-334
☐ FCC-203I EM Injection clamp	NT-251	☐ Preamplifier 1 GHz - 4 GHz	NT-335
☐ FCC-203I-DCN Ferrite decoupling network	NT-252	☐ Preamplifier for GPS MKU 152 A	NT-336
☐ PR50 Current Probe	NT-253	☐ Preamplifier 100 MHz – 23 GHz	NT-337
☐ i310s Current Probe	NT-254/1	☐ DC Block 10 MHz – 18 GHz Model 8048	NT-338
☐ Fluke 87 V True RMS Multimeter	NT-260	☐ 2-97201 Electronic load	NT-341
☐ Model 2000 Digital Multimeter	NT-261	☐ TSX3510P - Power supply 0-30 V / 0 - 10 A	NT-344
☐ Fluke 87 V Digital Multimeter	NT-262/1	☐ TSX3510P - Power supply 0-30 V / 0 - 10 A	NT-345
☐ ESH2-Z5-U1 Artificial mains network 4x25A	NT-300	☐ VDS 200 Mobil-impuls-generator	NT-350
☐ ESH3-Z5-U1 Artificial mains network 2x10A	NT-301	☐ LD 200 Mobil-impuls-generator	NT-351
☐ ESH3-Z6-U1 Artificial mains network 1x100A	NT-302	☐ MPG 200 Mobil-Impuls-Generators	NT-352
☐ ESH3-Z6-U1 Artificial mains network 1x100A	NT-302a	☐ EFT 200 Mobil-impuls-generator	NT-353
☐ PHE 4500/B Power amplifier	NT-304	☐ AN 200 S1 Artificial Network	NT-354
☐ EZ10 T-Artificial Network	NT-305	☐ FP-EFT 32M 3 ph. Coupling filter (Burst)	NT-400/1
☐ SMG - Signal generator 0,1 - 1000 MHz	NT-310	☐ PHE 4500 - Mains impedance network	NT-401
☐ SMA100A - Signal generator 9 kHz - 6 GHz	NT-310/1	☐ IP 6.2 Coupling filter for data lines (Surge)	NT-403
☐ RefRad Reference generator	NT-312	☐ TK 9421 High Power Volt. Probe 150 kHz - 30 MHz	NT-409
☐ SMP 02 Signal generator 10 MHz - 20 GHz	NT-313	☐ ESH2-Z3 - Probe 9 kHz - 30 MHz	NT-410
☐ 40 MHz Arbitrary Generator TGA1241	NT-315	☐ IP 4 - Capacitive clamp (Burst)	NT-411
☐ Artificial mains network NSLK 8127-PLC	NT-316	☐ Highpass-Filter 100 MHz – 3 GHz	NT-412
☐		☐ Highpass-Filter 600 MHz – 4 GHz	NT-413
☐ PSURGE 4.1 Surge generator	NT-324	☐ Highpass-Filter 1250 MHz – 4 GHz	NT-414
☐ IMU4000 Immunity test system	NT-325/1	☐ Highpass-Filter 1800 MHz – 16 GHz	NT-415
☐ VCS 500-M6 Surge-Generator	NT-326		
☐ Oscillatory Wave Simulator incl. Coupling networks	NT-328a+b+c		
☐ BTA-250 - RF-Amplifier 9 kHz - 220 MHz / 250 W	NT-330		

Division:
Industry & Energy

Department: FG

Test report number:
INE-AT/FG-20/174

Page: 2 of 4

Date: 21.10.2020

Appendix 1 (continued)

Test equipment used

			Division:			
			Industry & Energy			
☐	Highpass-Filter 3500 MHz – 18 GHz	NT-416	☐	FCC-801-AF10 Coupling decoupling network	NT-461	Department: FG Test report number: INE-AT/FG-20/174 Page: 3 of 4 Date: 21.10.2020
☐	RF-Attenuator 10 dB DC – 18 GHz / 50 W	NT-417	☐	FCC-801-S25 Coupling decoupling network	NT-462	
☐	RF-Attenuator 6 dB DC – 18 GHz / 50 W	NT-418	☐	FCC-801-T4 Coupling decoupling network	NT-463	
☐	RF-Attenuator 3 dB DC – 18 GHz / 50 W	NT-419	☐	FCC-801-C1 Coupling decoupling network	NT-464	
☐	RF-Attenuator 20 dB DC - 1000 MHz / 25 W	NT-421	☐	SW 9605 - Current probe 150 kHz – 30 MHz	NT-465/1	
☐	RF-Attenuator 30 dB DC - 1000 MHz / 1 W	NT-423	☐	95242-1 – Current probe 1 MHz – 400 MHz	NT-468	
☐	RF-Attenuator 30 dB	NT-424	☐	94106-1L-1 – Current probe 100 kHz – 450 MHz	NT-471	
☐	RF-Attenuator 6 dB DC - 1000 MHz / 1 W	NT-425	☐	GA 1240 Power amplifier according to EN 61000-4-16	NT-480	
☐	RF-Attenuator 6 dB DC - 1000 MHz / 1 W	NT-426	☐	Coupling networks according to EN 61000-4-16	NT-481 - NT-483	
☐	RF-Attenuator 6 dB	NT-428	☐	Van der Hoofden Test Head	NT-484	
☐	RF-Attenuator 0 dB - 81 dB	NT-429	☐	EMC Video/Audiosystem	NT-511/1	
☐	WRU 27 - Band blocking 27 MHz	NT-430	☐	ES-K1 Version 1.71 SP2 Test software	NT-520	
☐	WHJ450C9 AA - High pass 450 MHz	NT-431	☐	EMC32 Version 10.60.15 Test software	NT-520/1	
☐	WHJ250C9 AA - High pass 250 MHz	NT-432	☐	SRM-TS Version 1.3 software for SRM-3000	NT-522	
☐	RF-Load 150 W	NT-433	☐	SRM-TS Version 1.3.1 software for SRM-3006	NT-522/1	
☐	Impedance transducer 1:4 ; 1:9 ; 1:16	NT-435	☐	Spitzenberger und Spies Test software V4.1	NT-525	
☐	RF-Attenuator DC – 18 GHz 6 dB	NT-436	☐	Noise power test apparatus according to EN 55014	NT-530	
☐	RF-Attenuator DC – 18 GHz 6 dB	NT-437	☐	Vertical coupling plane (ESD)	NT-531	
☐	RF-Attenuator DC – 18 GHz 10 dB	NT-438	☐	Test cable #4 for EN 61000-4-6	NT-553	
☐	RF-Attenuator DC – 18 GHz 20 dB	NT-439	☐	Test cable #3 for conducted emission	NT-554	
☐	I+P 7780 Directional coupler 100 - 2000 MHz	NT-440	☐	Test cable #5+#6 ESD-cable (2x470k)	NT-555 + NT-556	
☐	ESH3-Z2 - Pulse limiter 9 kHz - 30 MHz	NT-441	☐	Test cable #8 Sucoflex 104EA	NT-559	
☐	Power Divider 6 dB/1 W/50 Ohm	NT-443	☐	Test cable #9 (for outdoor measurements)	NT-580	
☐	Directional coupler 0,1 MHz – 70 MHz	NT-444	☐	Test cable #10 (for outdoor measurements)	NT-581	
☐	Directional coupler 0,1 MHz – 70 MHz	NT-445	☐	Test cable #13 Sucoflex 104PE	NT-584	
☐	Tube imitations according to EN 55015	NT-450	☐	Test cable #21 for SRM-3000	NT-592	
☐	FCC-801-M3-16A Coupling decoupling network	NT-458	☐	Shield chamber	NT-600	
☐	FCC-801-M2-50A Coupling decoupling network	NT-459	☐	Climatic chamber	M-1200	
☐	FCC-801-M5-25 Coupling decoupling network	NT-460				

Appendix 1 (continued)

Test equipment used

☐	Anechoic Chamber 3 m / 5 m measuring distance	EMV-100	☐	Log.per Antenna 0,7 – 9 GHz STLP9149	EMV-305
☐	Turntabel 6 m diameter	EMV-101	☐	HF- Amplifier 9 kHz-250 MHz BBA150 (low noise)	EMV-306
☐	Antenna mast + controller	EMV-102+ EMV-103	☐	ISO11451-2 TLS 10 kHz – 30 MHz	EMV-307
☐	EMC Video/Audiosystem	EMV-104	☐	Load Dump Generator LD 200N	EMV-350
☐	EMC Software EMC32 Version 10.60.15	EMV-105	☐	Ultra Compact Symulator UCS 200N100	EMV-351
☐	Hornantenna 1 – 18 GHz HF 907	EMV-110	☐	Automotive Power fail module PFM 200N100.1	EMV-352
☐	Antennapre.amp. 1 – 18 GHz ERZ-LNA0200-1800-30-2	EMV-111	☐	Voltage Drop Symulator VDS 200Q100	EMV-353
☐	Trilog Antenna 30-3000 MHz VULB9163	EMV-112	☐	Arb. Generator AutoWave	EMV-354
☐	Monopol 9 kHz – 30 MHz VAMP 9243	EMV-113	☐	Ultra Compact Symulator UCS 500N7	EMV-355
☐	Antennapre.amp 18 – 40 GHz BBV 9721	EMV-114	☐	Coupling decoupling network CNI 503B7 / 32 A	EMV-356
☐	Hornantenna 200 – 2000 MHz AH-220	EMV-115	☐	Coupling decoupling network CNI 503B7 / 63 A	EMV-357
☐	DC Artificial Network PVDC 8300	EMV-150	☐	Telecom Surge Generator TSurge 7	EMV-358
☐	AC Artificial Network NNLK 8121 RC	EMV-151	☐	Coupling decoupling network CNI 508N2	EMV-359
☐	EMI Receiver ESR26	EMV-200	☐	Coupling decoupling network CNV 504N2.2	EMV-360
☐	Signalgenerator 9 kHz – 40 GHz N5173B	EMV-201	☐	Immunity generator NSG4060/NSG4060-1	EMV-361
☐	GPS Frequency normal B-88	EMV-202	☐	Coupling network CDND M316-2	EMV-362
☐	DC Power supply N5745A	EMV-203	☐	Coupling network CT419-5	EMV-363
☐	Spektrum Analyzator FSV40	EMV-205	☐	ESD Generator NSG 437	EMV-364
☐	Thd Multimeter Model 2015	EMV-206	☐	Pulse Limiter VTSD 9561-F BNC	EMV-405
☐	Poweramplifier PAS15000	EMV- 207/abc	☐	Transient emission BSM200N40+BS200N100	EMV- 450+451
☐	Inrush Current Source	EMV- 208/abc	☐	Cap. Coupling Clamp HFK	EMV-455
☐	Arb.-generator Sycore	EMV-209	☐	Mag. Field System MS100N+MC26100+MC2630	EMV- 456-458
☐	Harmonics/Flicker analyzer ARS 16/3	EMV-210	☐	Coupling network CDN M2-100A	EMV-459
☐	HF- Amplifier 9 kHz-250 MHz BBA150	EMV-300	☐	Coupling network CDN M3-32A	EMV-460
☐	HF- Amplifier 80 -1000 MHz BBA150	EMV-301	☐	Coupling network CDN M5-100A	EMV-461
☐	HF- Amplifier 0,8 - 6 GHz BBA150	EMV-302	☐	Current Clamp CIP 9136A	EMV-462
☐	High Power Ant. 20-200 MHz HPBA-2510	EMV-303/1	☐	DC Artificial Network HV-AN 150	EMV- 464+465
☐	Log.per Antenna 80-2700 MHz STLP 9128 E special	EMV-304	☐	Coupling Clamp EM 101	EMV-466
			☐	Decoupling Clamp FTC 101	EMV-467
			☐	Power attenuator 10 dB / 250 Watt	EMV-469/2

Division:
Industry & Energy

Department: FG

Test report number:
INE-AT/FG-20/174

Page: 4 of 4

Date: 21.10.2020

Appendix 2

Photodocumentation

Description: Front view

Division:
Industry & Energy

Department: FG

Test report reference:
INE-AT/FG-20/174

Page: 1 of 8

Date: 21.10.2020



Appendix 2

Photodocumentation

Description: Backside view

Division:
Industry & Energy

Department: FG

Test report reference:
INE-AT/FG-20/174

Page: 2 of 8

Date: 21.10.2020



Appendix 2

Photodocumentation

Description: Battery compartment opened

Division:
Industry & Energy

Department: FG

Test report reference:
INE-AT/FG-20/174

Page: 3 of 8

Date: 21.10.2020



Appendix 2 Photodocumentation

Description: PCB view #1

Division:
Industry & Energy

Department: FG

Test report reference:
INE-AT/FG-20/174

Page: 4 of 8

Date: 21.10.2020



Appendix 2

Photodocumentation

Description: PCB view #2


Division:
Industry & Energy

Department: FG

Test report reference:
INE-AT/FG-20/174

Page: 5 of 8

Date: 21.10.2020

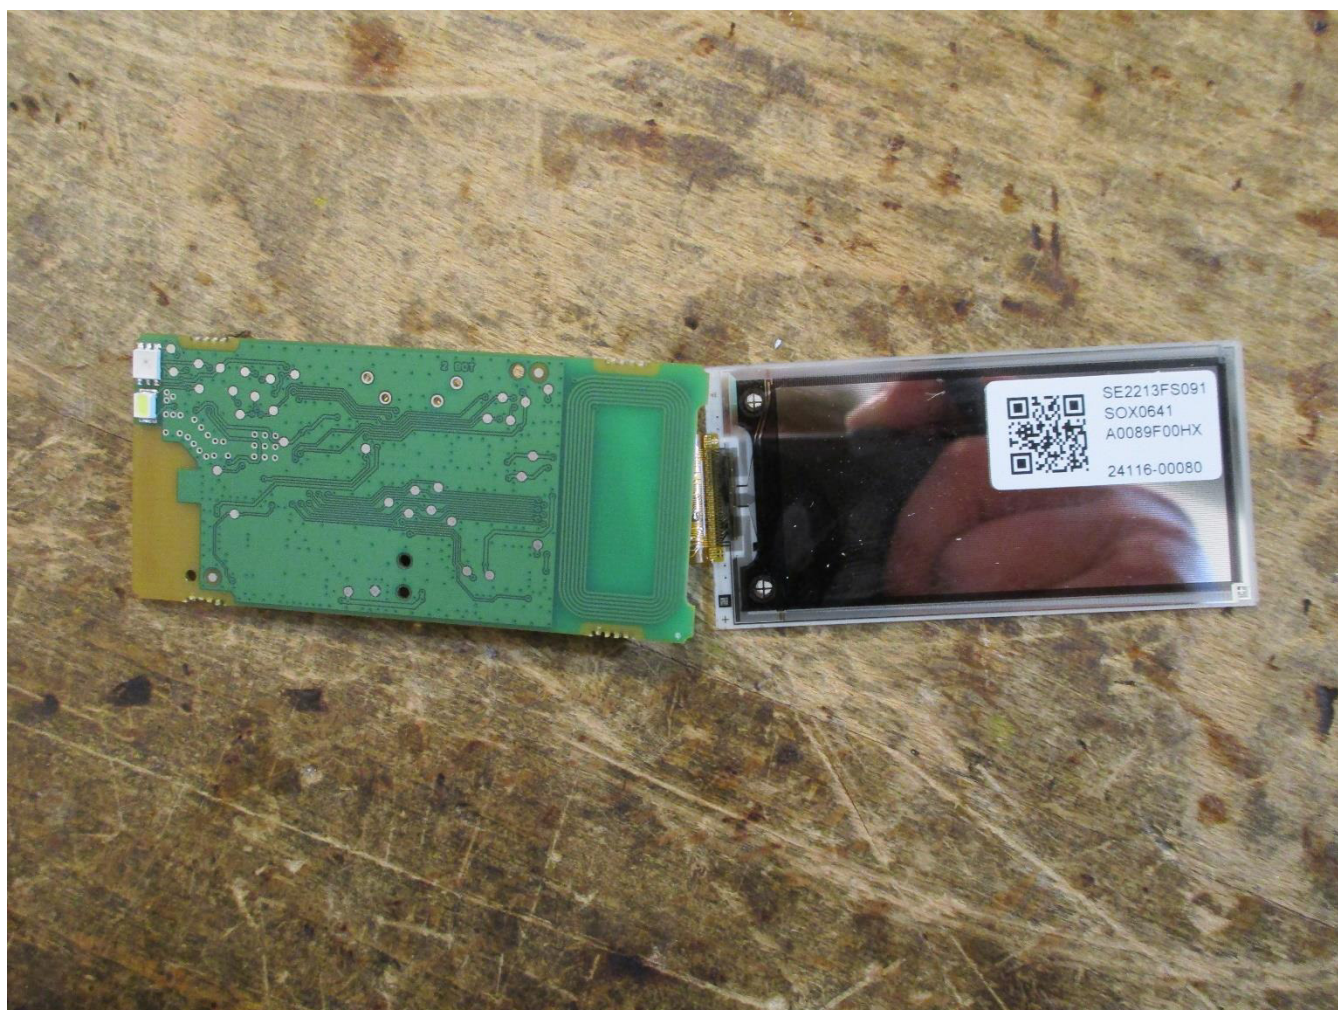

Appendix 2

Photodocumentation

Description: Test setup below 30 MHz


Division:
Industry & Energy

Department: FG

Test report reference:
INE-AT/FG-20/174

Page: 6 of 8

Date: 21.10.2020

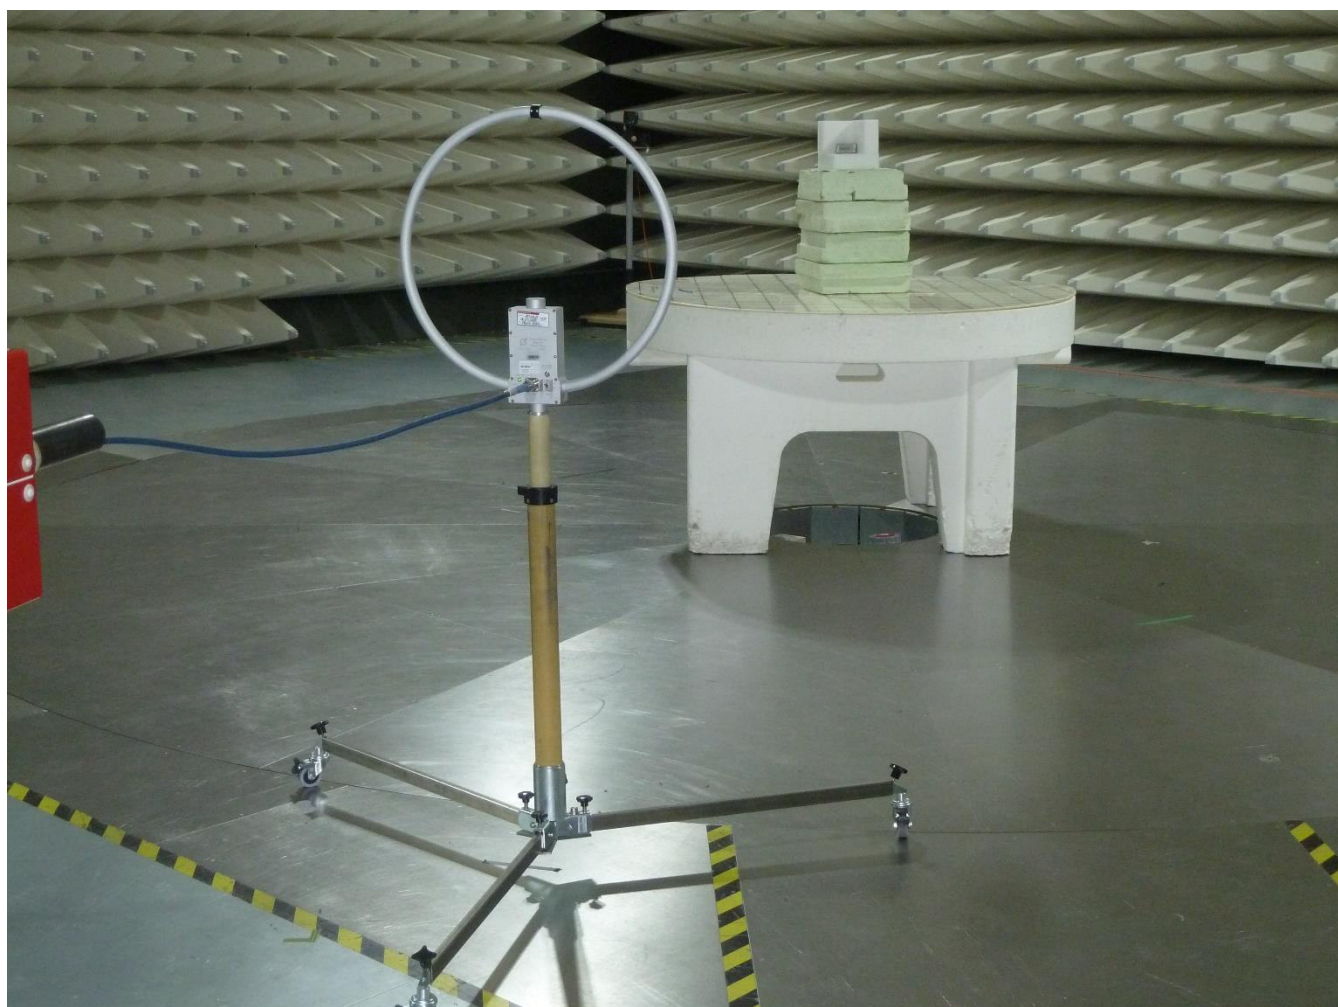

Appendix 2

Photodocumentation

Description: Test setup below 1 GHz


Division:
Industry & Energy

Department: FG

Test report reference:
INE-AT/FG-20/174

Page: 7 of 8

Date: 21.10.2020

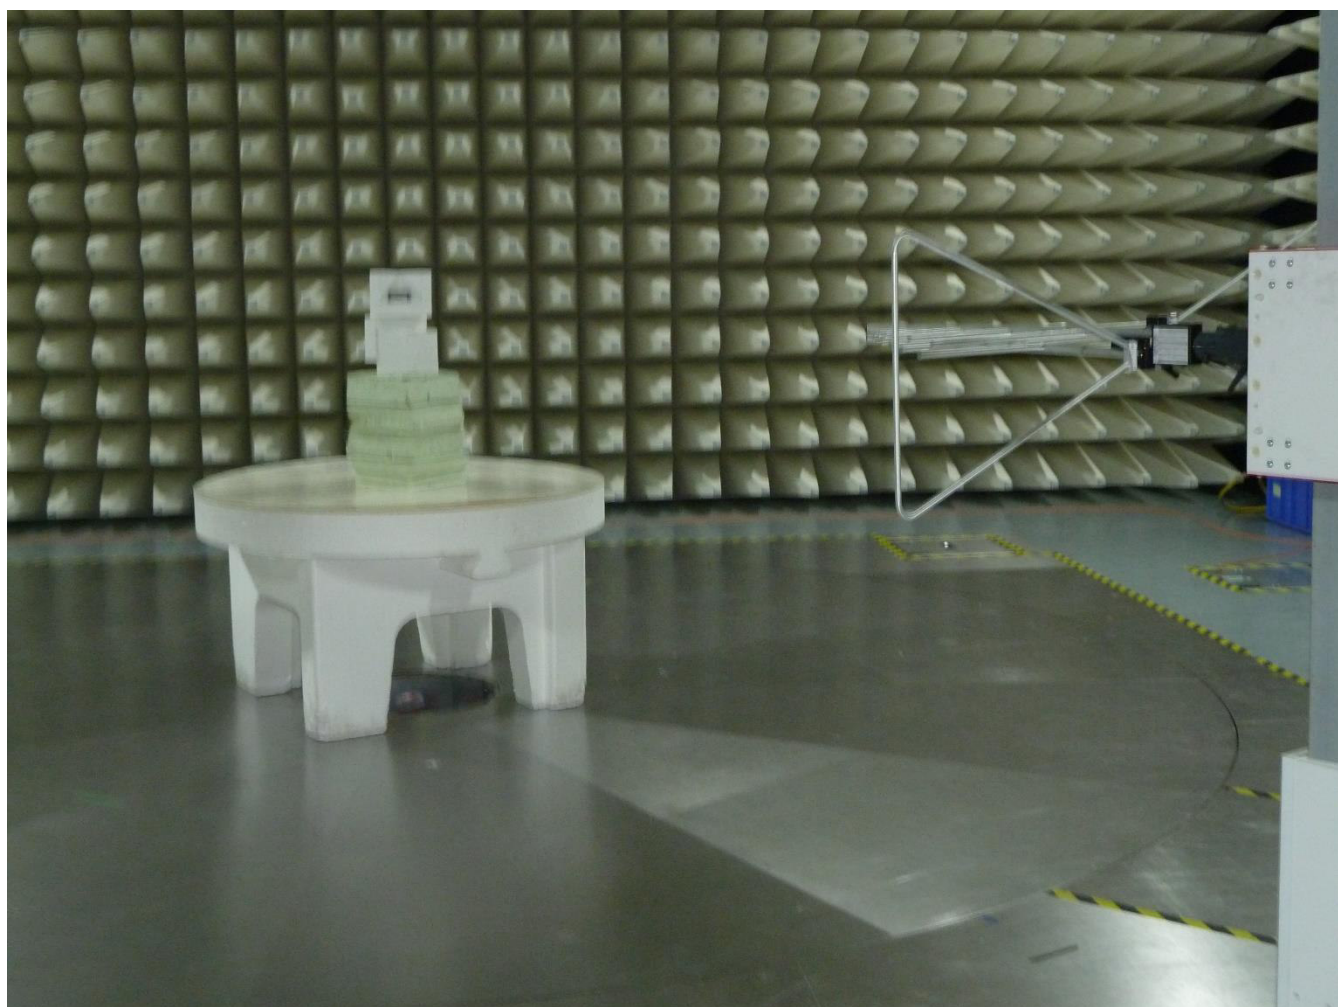

Appendix 2 Photodocumentation

Description: Test setup above 1 GHz


Division:
Industry & Energy

Department: FG

Test report reference:
INE-AT/FG-20/174

Page: 8 of 8

Date: 21.10.2020

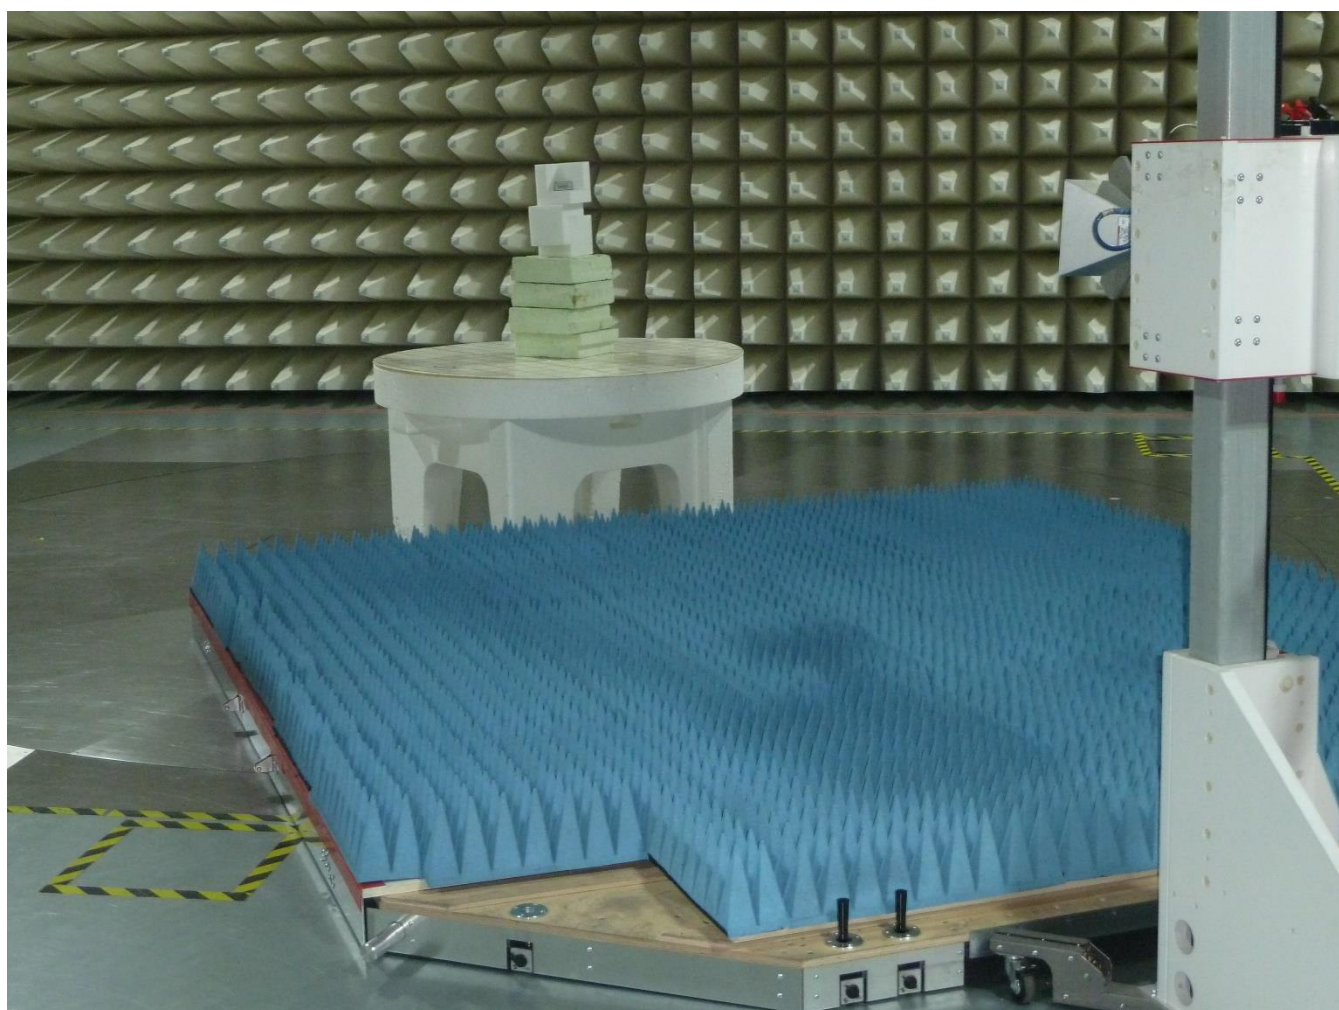

--- END OF TEST REPORT ---