


EUT	VAVA Chroma 4K UST Triple Laser Projector	Model Name	VA-SP003
Temperature	25°C	Relative Humidity	60%
Pressure	960hPa	Test Voltage	Normal Voltage
Test Mode	802.11b with data rate 1 2462MHz	Antenna	Horizontal

Test Graph for Peak Measurement



Test Graph for Average Measurement

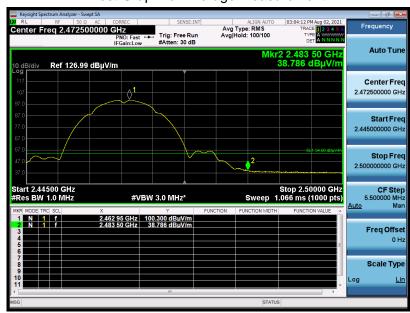

Any report having not been signed by authorized approver, or having been altered without authorization, or having not been stamped by the "Dedicated Testing/Inspection Stamp" is deemed to be invalid. Copying or excerpting portion of, or altering the content of the report is not permitted without the written authorization of AGC. The test results presented in the report apply only to the tested sample. Any objections to report issued by AGC should be submitted to AGC within 15days after the issuance of the test report. Further enquiry of validity or verification of the test report should be addressed to AGC by agc01@agccert.com.



EUT	VAVA Chroma 4K UST Triple Laser Projector	Model Name	VA-SP003
Temperature	25°C	Relative Humidity	60%
Pressure	960hPa	Test Voltage	Normal Voltage
Test Mode	802.11b with data rate 1 2462MHz	Antenna	Vertical

Test Graph for Peak Measurement



Test Graph for Average Measurement



Any report having not been signed by authorized approver, or having been altered without authorization, or having not been stamped by the "Dedicated Testing/Inspection Stamp" is deemed to be invalid. Copying or excerpting portion of, or altering the content of the report is not permitted without the written authorization of AGC. The test results presented in the report apply only to the tested sample. Any objections to report issued by AGC should be submitted to AGC within 15days after the issuance of the test report. Further enquiry of validity or verification of the test report should be addressed to AGC by agc01@agccert.com.




EUT	VAVA Chroma 4K UST Triple Laser Projector	Model Name	VA-SP003
Temperature	25°C	Relative Humidity	60%
Pressure	960hPa	Test Voltage	Normal Voltage
Test Mode	802.11g with data rate 6 2412MHz	Antenna	Horizontal

Test Graph for Peak Measurement



Test Graph for Average Measurement

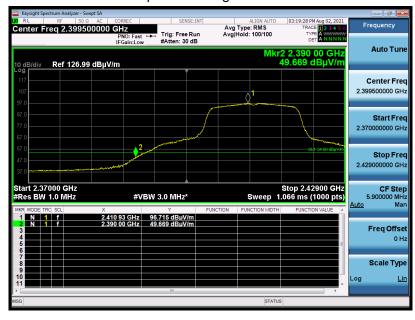

Any report having not been signed by authorized approver, or having been altered without authorization, or having not been stamped by the "Dedicated Testing/Inspection Stamp" is deemed to be invalid. Copying or excerpting portion of, or altering the content of the report is not permitted without the written authorization of AGC. The test results presented in the report apply only to the tested sample. Any objections to report issued by AGC should be submitted to AGC within 15days after the issuance of the test report. Further enquiry of validity or verification of the test report should be addressed to AGC by agc01@agccert.com.



EUT	VAVA Chroma 4K UST Triple Laser Projector	Model Name	VA-SP003
Temperature	25°C	Relative Humidity	60%
Pressure	960hPa	Test Voltage	Normal Voltage
Test Mode	802.11g with data rate 6 2412MHz	Antenna	Vertical

Test Graph for Peak Measurement



Test Graph for Average Measurement



Any report having not been signed by authorized approver, or having been altered without authorization, or having not been stamped by the "Dedicated Testing/Inspection Stamp" is deemed to be invalid. Copying or excerpting portion of, or altering the content of the report is not permitted without the written authorization of AGC. The test results presented in the report apply only to the tested sample. Any objections to report issued by AGC should be submitted to AGC within 15days after the issuance of the test report. Further enquiry of validity or verification of the test report should be addressed to AGC by agc01@agccert.com.



EUT	VAVA Chroma 4K UST Triple Laser Projector	Model Name	VA-SP003
Temperature	25°C	Relative Humidity	60%
Pressure	960hPa	Test Voltage	Normal Voltage
Test Mode	802.11g with data rate 6 2462MHz	Antenna	Horizontal

Test Graph for Peak Measurement



Test Graph for Average Measurement





EUT	VAVA Chroma 4K UST Triple Laser Projector	Model Name	VA-SP003
Temperature	25°C	Relative Humidity	60%
Pressure	960hPa	Test Voltage	Normal Voltage
Test Mode	802.11g with data rate 6 2462MHz	Antenna	Vertical

Test Graph for Peak Measurement



Test Graph for Average Measurement






EUT	VAVA Chroma 4K UST Triple Laser Projector	Model Name	VA-SP003
Temperature	25°C	Relative Humidity	60%
Pressure	960hPa	Test Voltage	Normal Voltage
Test Mode	802.11n20 with data rate 6.5 2412MHz	Antenna	Horizontal

Test Graph for Peak Measurement



Test Graph for Average Measurement

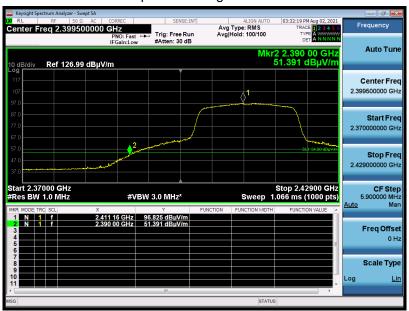

Any report having not been signed by authorized approver, or having been altered without authorization, or having not been stamped by the "Dedicated Testing/Inspection Stamp" is deemed to be invalid. Copying or excerpting portion of, or altering the content of the report is not permitted without the written authorization of AGC. The test results presented in the report apply only to the tested sample. Any objections to report issued by AGC should be submitted to AGC within 15days after the issuance of the test report. Further enquiry of validity or verification of the test report should be addressed to AGC by agc01@agccert.com.




EUT	VAVA Chroma 4K UST Triple Laser Projector	Model Name	VA-SP003
Temperature	25°C	Relative Humidity	60%
Pressure	960hPa	Test Voltage	Normal Voltage
Test Mode	802.11n20 with data rate 6.5 2412MHz	Antenna	Vertical

Test Graph for Peak Measurement



Test Graph for Average Measurement

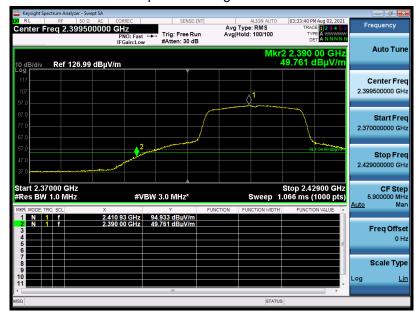



EUT	VAVA Chroma 4K UST Triple Laser Projector	Model Name	VA-SP003
Temperature	25°C	Relative Humidity	60%
Pressure	960hPa	Test Voltage	Normal Voltage
Test Mode	802.11n20 with data rate 6.5 2462MHz	Antenna	Horizontal

Test Graph for Peak Measurement



Test Graph for Average Measurement





EUT	VAVA Chroma 4K UST Triple Laser Projector	Model Name	VA-SP003
Temperature	25°C	Relative Humidity	60%
Pressure	960hPa	Test Voltage	Normal Voltage
Test Mode	802.11n20 with data rate 6.5 2462MHz	Antenna	Vertical

Test Graph for Peak Measurement



Test Graph for Average Measurement





EUT	VAVA Chroma 4K UST Triple Laser Projector	Model Name	VA-SP003
Temperature	25°C	Relative Humidity	60%
Pressure	960hPa	Test Voltage	Normal Voltage
Test Mode	802.11n40 with data rate 13.5 2422MHz	Antenna	Horizontal

Test Graph for Peak Measurement



Test Graph for Average Measurement



Any report having not been signed by authorized approver, or having been altered without authorization, or having not been stamped by the "Dedicated Testing/Inspection Stamp" is deemed to be invalid. Copying or excerpting portion of, or altering the content of the report is not permitted without the written authorization of AGC. The test results presented in the report apply only to the tested sample. Any objections to report issued by AGC should be submitted to AGC within 15days after the issuance of the test report. Further enquiry of validity or verification of the test report should be addressed to AGC by agc01@agccert.com.




EUT	VAVA Chroma 4K UST Triple Laser Projector	Model Name	VA-SP003
Temperature	25°C	Relative Humidity	60%
Pressure	960hPa	Test Voltage	Normal Voltage
Test Mode	802.11n40 with data rate 13.5 2422MHz	Antenna	Vertical

Test Graph for Peak Measurement



Test Graph for Average Measurement

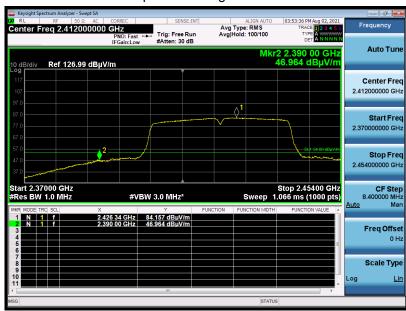




EUT	VAVA Chroma 4K UST Triple Laser Projector	Model Name	VA-SP003
Temperature	25°C	Relative Humidity	60%
Pressure	960hPa	Test Voltage	Normal Voltage
Test Mode	802.11n40 with data rate 13.5 2452MHz	Antenna	Horizontal

Test Graph for Peak Measurement



Test Graph for Average Measurement

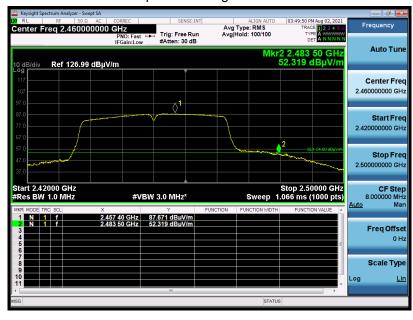



EUT	VAVA Chroma 4K UST Triple Laser Projector	Model Name	VA-SP003
Temperature	25°C	Relative Humidity	60%
Pressure	960hPa	Test Voltage	Normal Voltage
Test Mode	802.11n40 with data rate 13.5 2452MHz	Antenna	Vertical


Test Graph for Peak Measurement



Test Graph for Average Measurement



Note: All the antennas have been pre-tested, and all modes of each antenna are tested. The In 802.11b, 802.11g mode antenna 1 is the worst case and recorded in the report; in 802.11n mode, antenna 1+2 is the worst case and recorded in the report.





## 12. LINE CONDUCTED EMISSION TEST


## 12.1. LIMITS OF LINE CONDUCTED EMISSION TEST

F	Maximum RF	Line Voltage
Frequency	Q.P (dBµV)	Average (dBμV)
150kHz~500kHz	66-56	56-46
500kHz~5MHz	56	46
5MHz~30MHz	60	50

## Note:

- 1. The lower limit shall apply at the transition frequency.
- 2. The limit decreases linearly with the logarithm of the frequency in the range 0.15 MHz to 0.50 MHz.

## 12.2. BLOCK DIAGRAM OF LINE CONDUCTED EMISSION TEST

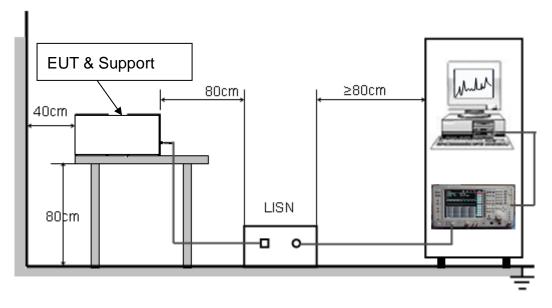



Report No.: AGC00210210705FE05 Page 111 of 120

#### 12.3. PRELIMINARY PROCEDURE OF LINE CONDUCTED EMISSION TEST

- 1. The equipment was set up as per the test configuration to simulate typical actual usage per the user's manual. When the EUT is a tabletop system, a wooden table with a height of 0.8 meters is used and is placed on the ground plane as per ANSI C63.10 (see Test Facility for the dimensions of the ground plane used). When the EUT is a floor-standing equipment, it is placed on the ground plane which has a 3-12 mm non-conductive covering to insulate the EUT from the ground plane.
- 2. Support equipment, if needed, was placed as per ANSI C63.10.
- 3. All I/O cables were positioned to simulate typical actual usage as per ANSI C63.10.
- 4. All support equipment received AC120V/60Hz power from a LISN, if any.
- 5. The EUT received AC120V/60Hz power from a LISN.
- 6. The test program was started. Emissions were measured on each current carrying line of the EUT using a spectrum Analyzer / Receiver connected to the LISN powering the EUT. The LISN has two monitoring points: Line 1 (Hot Side) and Line 2 (Neutral Side). Two scans were taken: one with Line 1 connected to Analyzer / Receiver and Line 2 connected to a 50 Ohm load; the second scan had Line 1 connected to a 50 Ohm load and Line 2 connected to the Analyzer / Receiver.
- 7. Analyzer / Receiver scanned from 150 kHz to 30MHz for emissions in each of the test modes.
- 8. During the above scans, the emissions were maximized by cable manipulation.
- 9. The test mode(s) were scanned during the preliminary test.

Then, the EUT configuration and cable configuration of the above highest emission level were recorded for reference of final testing.


## 12.4. FINAL PROCEDURE OF LINE CONDUCTED EMISSION TEST

- 1. EUT and support equipment was set up on the test bench as per step 2 of the preliminary test.
- 2. A scan was taken on both power lines, Line 1 and Line 2, recording at least the six highest emissions. Emission frequency and amplitude were recorded into a computer in which correction factors were used to calculate the emission level and compare reading to the applicable limit. If EUT emission level was less – 2dB to the A.V. limit in Peak mode, then the emission signal was re-checked using Q.P and Average detector.
- 3. The test data of the worst case was reported on the Summary Data page.



### 12.5. TEST RESULT OF LINE CONDUCTED EMISSION TEST

Power board A at 802.11b with date rate 1 2412MHz
Line Conducted Emission Test Line 1-L

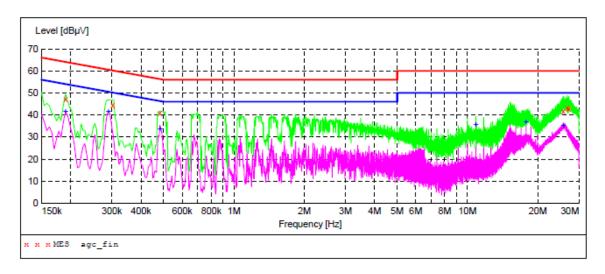

### MEASUREMENT RESULT: "agc\_fin"


2021/7/20 0:22	2					
Frequency MHz	Level dBµV	Transd dB	Limit dBµV	Margin dB	Detector	Line
0.190000	47.30	6.6	64	16.7	QP	L1
0.302000	44.50	6.0	60	15.7	QP	L1
0.482000	41.00	5.4	56	15.3	QP	L1
25.718000	41.70	9.2	60	18.3	QP	L1
26.734000	43.10	9.3	60	16.9	QP	L1
27.178000	42.80	9.4	60	17.2	QP	L1

## MEASUREMENT RESULT: "agc\_fin2"

2021/7/20 0:22	2					
Frequency MHz	Level dBµV	Transd dB	Limit dBµV	Margin dB	Detector	Line
0.190000	41.80	6.6	54	12.2	AV	L1
0.290000	41.60	6.1	51	8.9	AV	L1
0.482000	33.80	5.4	46	12.5	AV	L1
10.878000	35.60	7.2	50	14.4	AV	L1
17.838000	36.70	8.6	50	13.3	AV	L1
25.750000	35.20	9.2	50	14.8	AV	L1



### Line Conducted Emission Test Line 2-N

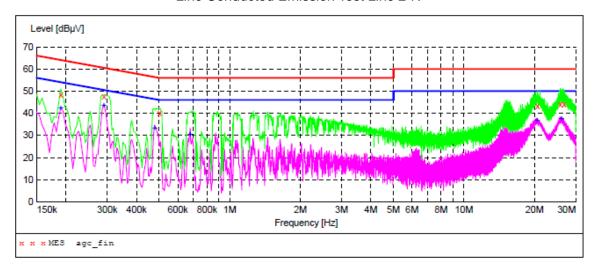

## MEASUREMENT RESULT: "agc\_fin"

2021/7/20 0:36 Frequency MHz		Transd dB	Limit dBµV	Margin dB	Detector	Line
0.190000	48.50	6.6	64	15.5	QP	N
0.290000	47.80	6.1	61	12.7	QP	N
0.502000	39.90	5.4	56	16.1	QP	N
20.618000	43.20	8.8	60	16.8	QP	N
25.790000	44.10	9.2	60	15.9	QP	N
26.790000	44.10	9.3	60	15.9	QP	N


## MEASUREMENT RESULT: "agc\_fin2"

2021/7/20 0:3	36					
Frequency MHz	Level dBµV	Transd dB	Limit dBµV	Margin dB	Detector	Line
0.190000	42.60	6.6	54	11.4	AV	N
0.290000	43.50	6.1	51	7.0	AV	N
0.478000	33.20	5.5	46	13.2	AV	N
0.678000	30.50	5.4	46	15.5	AV	N
20.478000	36.70	8.8	50	13.3	AV	N
26.074000	37.70	9.3	50	12.3	AV	N

#### **RESULT: PASS**



# Power board A at 802.11b with date rate 1 2437MHz Line Conducted Emission Test Line 1-L

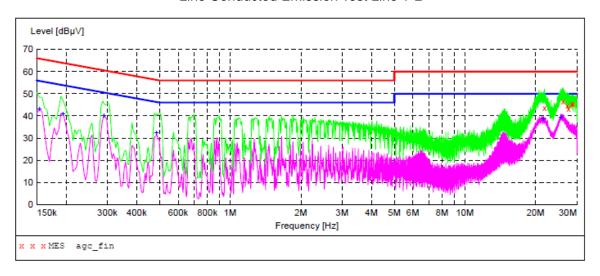

## MEASUREMENT RESULT: "agc\_fin"

2021/7/20 1:53

	-					
Frequency MHz	Level dBµV		Limit dBµV	Margin dB	Detector	Line
21.778000	43.50	8.9	60	16.5	_	L1
26.126000	46.40	9.3	60	13.6	QP	L1
27.338000	44.60	9.4	60	15.4	QP	L1
27.630000	43.40	9.4	60	16.6	QP	L1
28.514000	45.60	9.5	60	14.4	QP	L1
28.834000	45.40	9.5	60	14.6	QP	L1


# MEASUREMENT RESULT: "agc\_fin2"

2021/7/20 1:53

2021/1/20 1.	-					
Frequency MHz	Level dBµV		Limit dBµV	Margin dB	Detector	Line
0.154000	43.20	6.9	56	12.6	AV	L1
0.194000	41.20	6.6	54	12.7	AV	L1
0.290000	40.20	6.1	51	10.3	AV	L1
0.486000	32.50	5.4	46	13.7	AV	L1
21.502000	38.80	8.9	50	11.2	AV	L1
25.618000	39.50	9.2	50	10.5	AV	L1



### Line Conducted Emission Test Line 2-N

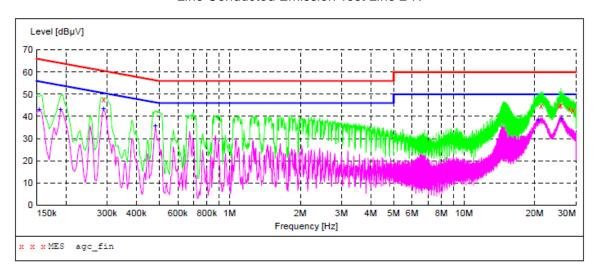

## MEASUREMENT RESULT: "agc\_fin"

2021/7/20 2:03

2021/1/20 2.	00					
Frequency MHz	Level dBµV	Transd dB	Limit dBµV	Margin dB	Detector	Line
0.290000	47.60	6.1	61	12.9	QP	N
21.306000	44.70	8.9	60	15.3	QP	N
25.514000	44.80	9.2	60	15.2	QP	N
25.830000	45.10	9.2	60	14.9	QP	N
28.070000	43.50	9.4	60	16.5	QP	N
29.158000	43.00	9.5	60	17.0	QP	N

# MEASUREMENT RESULT: "agc\_fin2"

2021/7/20 2:03


2021/1/20 2.	03					
Frequency MHz	Level dBµV	Transd dB	Limit dBµV	Margin dB	Detector	Line
0.154000	43.30	6.9	56	12.5	AV	N
0.190000	43.10	6.6	54	10.9	AV	N
0.290000	43.50	6.1	51	7.0	AV	N
0.482000	35.90	5.4	46	10.4	AV	N
20.670000	38.40	8.9	50	11.6	AV	N
26.006000	39.10	9.3	50	10.9	AV	N

#### **RESULT: PASS**

Any report having not been signed by authorized approver, or having been altered without authorization, or having not been stamped by the "Dedicated Testing/Inspection Stamp" is deemed to be invalid. Copying or excerpting portion of, or altering the content of the report is not permitted without the written authorization of AGC. The test results presented in the report apply only to the tested sample. Any objections to report issued by AGC should be submitted to AGC within 15days after the issuance of the test report. Further enquiry of validity or verification of the test report should be addressed to AGC by agc01@agccert.com.



# Power board A at 802.11b with date rate 1 2462MHz Line Conducted Emission Test Line 1-L

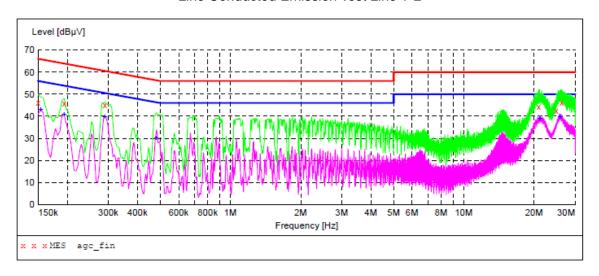

## MEASUREMENT RESULT: "agc\_fin"


2021/7/20 1	:56					
Frequency MHz	Level dBµV	Transd dB	Limit dBµV	Margin dB	Detector	Line
0.150000	46.20	6.9	66	19.8	QP	L1
0.194000	45.80	6.6	64	18.1	QP	L1
0.290000	45.10	6.1	61	15.4	QP	L1
20.890000	44.40	8.9	60	15.6	QP	L1
24.894000	42.60	9.2	60	17.4	QP	L1
26.226000	46.10	9.3	60	13.9	QP	L1

## MEASUREMENT RESULT: "agc fin2"

2021/7/20 1:	:56					
Frequency MHz	Level dBµV	Transd dB	Limit dBµV	Margin dB	Detector	Line
0.154000 0.194000 0.290000 0.482000 21.118000 25.774000	43.10 41.10 40.00 30.30 39.30 40.00	6.9 6.6 6.1 5.4 8.9 9.2	56 54 51 46 50 50	12.7 12.8 10.5 16.0 10.7 10.0	AV	L1 L1 L1 L1 L1



### Line Conducted Emission Test Line 2-N

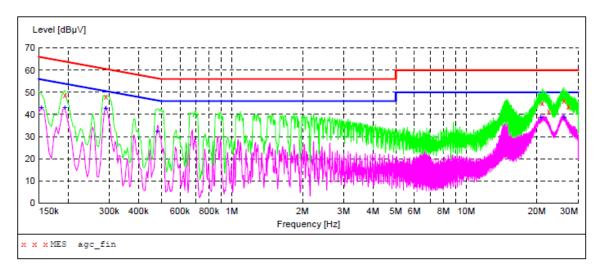

## MEASUREMENT RESULT: "agc\_fin"

2021/7/20	2:00					
Frequency MHz	Level dBµV	Transd dB	Limit dBµV	Margin dB	Detector	Line
0.194000	48.80	6.6	64	15.1	QP	N
0.290000	47.90	6.1	61	12.6	QP	N
21.054000	45.20	8.9	60	14.8	QP	N
22.498000	41.50	9.0	60	18.5	QP	N
26.062000	46.00	9.3	60	14.0	QP	N
27.182000	43.60	9.4	60	16.4	QP	N

## MEASUREMENT RESULT: "agc\_fin2"


2021/7/20 2:00								
Frequency MHz		Transd dB	Limit dBµV	Margin dB	Detector	Line		
0.154000		6.9	56	12.4	AV	N		
0.194000	43.20	6.6	54	10.7	AV	N		
0.290000	42.70	6.1	51	7.8	AV	N		
0.482000	32.50	5.4	46	13.8	AV	N		
20.734000	38.70	8.9	50	11.3	AV	N		
26.094000	38.90	9.3	50	11.1	AV	N		

#### **RESULT: PASS**

Note: All test modes had been pre-tested. The 802.11b of antenna 1 is the worst case and recorded in the report.



# Power board B at 802.11g with date rate 1 2462MHz Line Conducted Emission Test Line 1-L

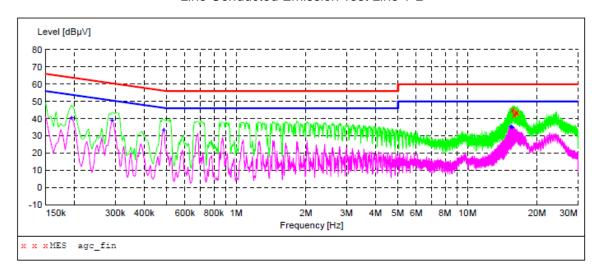

## MEASUREMENT RESULT: "agc\_fin"


2	022/3/9 16:5 Frequency MHz		Transd dB	Limit dBµV	Margin dB	Detector	Line
	15.658000	45.20	8.4	60	14.8	QP	L1
	15.790000	45.30	8.4	60	14.7	QP	L1
	15.922000	42.70	8.4	60	17.3	QP	L1
	15.990000	42.30	8.4	60	17.7	QP	L1
	16.246000	43.40	8.5	60	16.6	QP	L1
	16.442000	43.60	8.5	60	16.4	QP	L1

## MEASUREMENT RESULT: "agc\_fin2"

2022/3/9 16:5 Frequency MHz		Transd dB	Limit dBµV	Margin dB	Detector	Line
0.194000	40.90	6.6	54	13.0	AV	L1
0.290000	39.50	6.1	51	11.0	AV	L1
0.486000	33.60	5.4	46	12.6	AV	L1
15.338000	35.50	8.4	50	14.5	AV	L1
15.466000	35.40	8.4	50	14.6	AV	L1
15.538000	35.20	8.4	50	14.8	AV	L1



### Line Conducted Emission Test Line 2-N

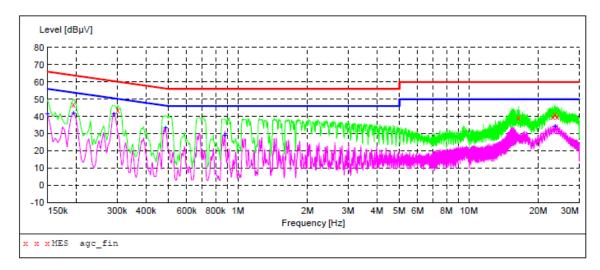

## MEASUREMENT RESULT: "agc\_fin"

2022/3/9 10 Frequency MH:	y Level	Transd dB	Limit dBµV	Margin dB	Detector	Line
0.194000	0 46.80	6.6	64	17.1	QP	N
0.302000	0 43.50	6.0	60	16.7	QP	N
16.442000	0 39.20	8.5	60	20.8	QP	N
23.074000	0 39.60	9.0	60	20.4	QP	N
23.606000	0 41.10	9.1	60	18.9	QP	N
24.138000	0 39.80	9.1	60	20.2	QP	N

## MEASUREMENT RESULT: "agc\_fin2"

-	юу Бе	evel Tra: dBµV	nsd Lim dB dB		gin De dB	etector I	Line
0.1500					4.4 AV	7	N
0.1940	00 42	2.30	6.6	54 1	1.6 AV	7 1	N
0.2900	00 41	L.60	6.1	51	8.9 AV	7	V
0.4860	00 33	3.60	5.4	46 13	2.6 AV	7	V
0.8780	00 29	9.20	5.4	46 1	6.8 AV	7	N
23.6140	000 34	1.60	9.1	50 1	5.4 AV	7 1	N

## **RESULT: PASS**

Note: All test modes had been pre-tested. The 802.11g with date rate 1 2462MHz of antenna 1 is the worst case and recorded in the report.



Report No.: AGC00210210705FE05

Page 120 of 120

## APPENDIX A: PHOTOGRAPHS OF TEST SETUP

Refer to the Report No.: AGC00210210705AP02

**APPENDIX B: PHOTOGRAPHS OF EUT** 

Refer to the Report No.: AGC00210210705AP04

----END OF REPORT----



# Conditions of Issuance of Test Reports

- 1. All samples and goods are accepted by the Attestation of Global Compliance (Shenzhen) Co., Ltd (the "Company") solely for testing and reporting in accordance with the following terms and conditions. The company provides its services on the basis that such terms and conditions constitute express agreement between the company and any person, firm or company requesting its services (the "Clients").
- 2. Any report issued by Company as a result of this application for testing services (the "Report") shall be issued in confidence to the Clients and the Report will be strictly treated as such by the Company. It may not be reproduced either in its entirety or in part and it may not be used for advertising or other unauthorized purposes without the written consent of the Company. The Clients to whom the Report is issued may, however, show or send it, or a certified copy thereof prepared by the Company to its customer, supplier or other persons directly concerned. The Company will not, without the consent of the Clients, enter into any discussion or correspondence with any third party concerning the contents of the Report, unless required by the relevant governmental authorities, laws or court orders.
- 3. The Company shall not be called or be liable to be called to give evidence or testimony on the Report in a court of law without its prior written consent, unless required by the relevant governmental authorities, laws or court orders.
- 4. In the event of the improper use of the report as determined by the Company, the Company reserves the right to withdraw it, and to adopt any other additional remedies which may be appropriate.
- 5. Samples submitted for testing are accepted on the understanding that the Report issued cannot form the basis of, or be the instrument for, any legal action against the Company.
- 6. The Company will not be liable for or accept responsibility for any loss or damage however arising from the use of information contained in any of its Reports or in any communication whatsoever about its said tests or investigations.
- 7.Clients wishing to use the Report in court proceedings or arbitration shall inform the Company to that effect prior to submitting the sample for testing.
- 8. The Company is not responsible for recalling the electronic version of the original report when any revision is made to them. The Client assumes the responsibility to providing the revised version to any interested party who uses them.
- 9. Subject to the variable length of retention time for test data and report stored hereinto as otherwise specifically required by individual accreditation authorities, the Company will only keep the supporting test data and information of the test report for a period of six years. The data and information will be disposed of after the aforementioned retention period has elapsed. Under no circumstances shall we provide any data and information which has been disposed of after retention period. Under no circumstances shall we be liable for damage of any kind, including (but not limited to) compensatory damages, lost profits, lost data, or any form of special, incidental, indirect, consequential or punitive damages of any kind, whether based on breach of contract of warranty, tort (including negligence), product liability or otherwise, even if we are informed in advance of the possibility of such damages.