



TEST REPORT

Reference No...... : WTF23F05111171W
FCC ID : 2BCMJ-FSHW2G4TX
Applicant..... : Foshan Shunde BIG Climatic Manufacture Co., Ltd
Address..... : C area, 2nd Floor, 9A building, factory buildings 2 and 3, section no. 10-6, Fu An industrial area (First phase), Leliu Town, Shunde District, Foshan City, Guangdong, China
Manufacturer : Foshan Shunde BIG Climatic Manufacture Co.,Ltd Zhongshan Branch
Address..... : No.20,Nantou Avenue East, Nantou town, Zhongshan City, Guangdong, China
Product Name..... : Remote Control
Model No...... : FSHW-2G4-TX-1, FSHW-2G4-TX-2
Test specification..... : FCC CFR47 Part 15 Subpart C (Section 15.249): 2021
Date of Receipt sample : 2023-06-27
Date of Test : 2023-06-28 to 2023-07-17
Date of Issue..... : 2023-08-29
Test Report Form No. : WEW-15249A-01A
Test Result..... **Pass**

Remarks:

The results shown in this test report refer only to the sample(s) tested, this test report cannot be reproduced, except in full, without prior written permission of the company. The report would be invalid without specific stamp of test institute and the signatures of approver.

Prepared By:

Waltek Testing Group (Foshan) Co., Ltd.

Address: No.13-19, 2/F., 2nd Building, Sunlink International Machinery City,
Chencun, Shunde District, Foshan, Guangdong, China

Tel:+86-757-23811398

Fax:+86-757-23811381

E-mail:info@waltek.com.cn

Tested by:

Roy Hong

Approved by:

Danny Zhou



1 Revision History

Test Report No.	Date of Issue	Description	Status
WTF23F05111171W	2023-08-29	Original	Valid

WALTEK



2 Contents

	Page
1 REVISION HISTORY.....	2
2 CONTENTS.....	3
3 GENERAL INFORMATION.....	4
3.1 GENERAL DESCRIPTION OF E.U.T.....	4
3.2 TECHNICAL CHARACTERISTICS OF EUT.....	4
3.3 STANDARDS APPLICABLE FOR TESTING.....	4
3.4 TEST FACILITY.....	5
3.5 SUBCONTRACTED.....	5
3.6 ABNORMALITIES FROM STANDARD CONDITIONS.....	5
3.7 DISCLAIMER.....	5
4 EUT SETUP AND TEST MODE.....	6
5 EQUIPMENT USED DURING TEST.....	7
5.1 EQUIPMENT LIST.....	7
5.2 TEST SOFTWARE.....	8
5.3 SPECIAL ACCESSORIES AND AUXILIARY EQUIPMENT.....	8
5.4 MEASUREMENT UNCERTAINTY.....	8
6 SUMMARY OF TEST RESULT.....	9
6.1 ANTENNA REQUIREMENT.....	10
6.1.1 <i>Standard Applicable</i>	10
6.1.2 <i>Evaluation Information</i>	10
6.2 RADIATED SPURIOUS EMISSIONS.....	11
6.2.1 <i>Standard Applicable</i>	11
6.2.2 <i>Test Procedure</i>	11
6.2.3 <i>Corrected Amplitude & Margin Calculation</i>	13
6.2.4 <i>Test Results</i>	14
6.3 OUT OF BAND EMISSIONS.....	22
6.3.1 <i>Standard Applicable</i>	22
6.3.2 <i>Test Procedure</i>	22
6.3.3 <i>Test Result</i>	22
6.4 EMISSION BANDWIDTH.....	26
6.4.1 <i>Standard Applicable</i>	26
6.4.2 <i>Test Procedure</i>	26
6.4.3 <i>Test Result</i>	26
6.5 DUTY CYCLE.....	28
6.5.1 <i>Standard Applicable</i>	28
6.5.2 <i>Test Procedure</i>	28
6.5.3 <i>Test Result</i>	28
7 PHOTOGRAPHS TEST SETUP.....	30
7.1 PHOTOGRAPHS - RADIATED EMISSION TEST SETUP.....	30
8 PHOTOGRAPHS - CONSTRUCTIONAL DETAILS.....	31
8.1 EUT - EXTERNAL PHOTOS.....	31
8.2 EUT – INTERNAL PHOTOS.....	37



3 General Information

3.1 General Description of E.U.T

Product Name : Remote Control

Model No. : FSHW-2G4-TX-1, FSHW-2G4-TX-2

Model Description : Two models are identical except for the button. Therefore the full tests were performed on model FSHW-2G4-TX-1.

Rated Voltage..... : Battery 3V (CR2025)

Battery Capacity : ---

Power Adapter : ---

3.2 Technical Characteristics of EUT

Frequency Band : 2402-2480MHz

Operating Frequency : 2403MHz, 2423MHz, 2453MHz

Max. Field Strength : 73.86 dB μ V/m

Modulation : GFSK

Quantity of Channels : 3

Channel Separation..... : 1MHz

Type of Antenna : PCB Antenna

Antenna Gain : 0dBi

3.3 Standards Applicable for Testing

The tests were performed according to following standards:

FCC Rules Part 15.249 Operation within the bands 902–928 MHz, 2400–2483.5 MHz, 5725–5875 MHz, and 24.0–24.25 GHz.

ANSI C63.10-2013 American National Standard for Testing Unlicensed Wireless Devices



3.4 Test Facility

The test facility has a test site registered with the following organizations:

- **ISED – Registration No.: 21895**

Waltek Testing Group (Foshan) Co., Ltd. has been registered and fully described in a report filed with the Innovation, Science and Economic Development Canada (ISED). The acceptance letter from the ISED is maintained in our files. Registration ISED number: 21895, March 12, 2019

- **FCC – Registration No.: 820106**

Waltek Testing Group (Foshan) Co., Ltd. EMC Laboratory has been registered and fully described in a report filed with the (FCC) Federal Communications Commission. The acceptance letter from the FCC is maintained in our files. Registration 820106, August 16, 2018

- **FCC – Designation No.: CN5034**

Waltek Testing Group (Foshan) Co., Ltd. EMC Laboratory has been registered and fully described in a report filed with the (FCC) Federal Communications Commission. The acceptance letter from the FCC is maintained in our files. Designation No. CN5034.

- **NVLAP – Lab Code: 600191-0**

Waltek Testing Group (Foshan) Co., Ltd. EMC Laboratory is accredited by the National Voluntary Laboratory Accreditation Program (NVLAP/NIST). NVLAP Code: 600191-0.

This report must not be used by the client to claim product certification, approval, or endorsement by NVLAP, NIST, or any agency of the Federal Government.

3.5 Subcontracted

Whether parts of tests for the product have been subcontracted to other labs:

☐ Yes ☒ No

If Yes, list the related test items and lab information:

Test items: ---

Lab information: ---

3.6 Abnormalities from Standard Conditions

None.

3.7 Disclaimer

The antenna gain information is provided by the customer. The laboratory is not responsible for the accuracy of the antenna gain information.



4 EUT Setup and Test Mode

The EUT was operated in the engineering mode to fix the Tx frequency that was for the purpose of the measurements. All testing shall be performed under maximum output power condition, with a duty cycle equal to 100%, and to measure its highest possible emissions level, more detailed description as follows:

Test Mode List

Test Mode	Description	Remark
TM1	Low Channel	2403 MHz
TM2	Middle Channel	2423 MHz
TM3	High Channel	2453 MHz

Test Conditions

Temperature:	22~25°C
Relative Humidity:	50~55%
Atmospheric pressure:	101.9kPa

WALTEK



5 Equipment Used during Test

5.1 Equipment List

☐ Conducted Emissions 1#						
Item	Equipment	Manufacturer	Model No.	Serial No.	Last Cal Date	Cal Due Date
1.	EMI Test Receiver	R&S	ESR3	102423	2023-01-05	2024-01-04
2.	LISN	R&S	ENV216	101343	2023-01-05	2024-01-04
3.	Cable	HUBER+SUHNER	CBL2-NN-6M	223NN624	2023-01-05	2024-01-04
4.	Switch	CD	RSU-A4 18G	RSUA4008	2023-01-05	2024-01-04
☐ Conducted Emissions 2#						
Item	Equipment	Manufacturer	Model No.	Serial No.	Last Cal Date	Cal Due Date
1.	EMI Test Receiver	R&S	ESCI	101178	2023-01-05	2024-01-04
2.	LISN	R&S	ENV216	101215	2023-01-05	2024-01-04
3.	Cable	HUBER+SUHNER	CBL2-NN-6M	6102701	2023-01-05	2024-01-04
4.	Switch	ESE	RSU/M2	---	2023-01-05	2024-01-04
☐ Conducted Emissions 3#						
Item	Equipment	Manufacturer	Model No.	Serial No.	Last Cal Date	Cal Due Date
1.	EMI Test Receiver	R&S	ESR3	102842	2023-01-05	2024-01-04
2.	LISN	R&S	ENV216	101542	2023-01-05	2024-01-04
3.	Cable	YIHENG	LMR195UF-NMNM-2.5	---	2023-01-05	2024-01-04
4.	Manual RF Switch	YIHENG	SW-2	RSU0402	2023-01-05	2024-01-04
☒ Radiation Emissions						
Item	Equipment	Manufacturer	Model No.	Serial No.	Last Calibration Date	Calibration Due Date
1.	3m Semi-anechoic Chamber	CHANGCHUANG	9m×6m×6m	-	2021-01-11	2024-01-10
2.	EMI Test Receiver	RS	ESR7	101566	2023-01-05	2024-01-04
3.	EMC Analyzer	Agilent	N9020A	MY48011796	2023-05-15	2024-05-14
4.	Active Loop Antenna	SCHWARZBECK	FMZB1519B	00004	2023-01-05	2024-01-04
5.	Trilog Broadband Antenna	SCHWARZBECK	VULB 9162	9162-117	2023-03-10	2024-03-09
6.	Coaxial Cable (below 1GHz)	H+S	CBL3-NN-12+3 m	214NN320	2023-01-06	2024-01-05
7.	Broad-band Horn Antenna	SCHWARZBECK	BBHA 9120 D	01561	2023-01-06	2024-01-05
8.	Broad-band Horn Antenna	SCHWARZBECK	BBHA 9170	01119	2023-01-06	2024-01-05
9.	Coaxial Cable (above 1GHz)	Times-Microwave	CBL5-NN	-	2023-01-05	2024-01-04
10.	Amplifier	Lunar E M	LNA1G18-40	20160501002	2023-01-05	2024-01-04



☒ RF Conducted Testing						
Item	Equipment	Manufacturer	Model No.	Serial No.	Last Calibration Date	Calibration Due Date
1.	Spectrum Analyzer	Agilent	N9020A	MY48011796	2023-05-15	2024-05-14
2.	Analog Signal Generator	Agilent	N5181A	MY48180720	2023-01-05	2024-01-04
3.	RF Control Unit	CHANGCHUANG	JS0806-2	-	2023-01-06	2024-01-05

☐: Not Used

☒: Used

5.2 Test Software

Description	Manufacturer	Model	Version
EMI Test Software (Conducted Emission 1#)	FARATRONIC	EZ-EMC	EMEC-3A1
EMI Test Software (Conducted Emission 2#)	FARATRONIC	EZ-EMC	CON-03A1
EMI Test Software (Conducted Emission 3#)	FARATRONIC	EZ-EMC	COM 3A1.1
EMI Test Software (Radiated Emission)	FARATRONIC	EZ-EMC	RA-03A1-1
RF Conducted Test Software	TONSCEND	JS1120-2	V2.6

5.3 Special Accessories and Auxiliary Equipment

Item	Equipment	Manufacturer	Model No.	Serial No.
1.	/	/	/	/

5.4 Measurement Uncertainty

Parameter	Uncertainty
RF Output Power	±2.2dB
Occupied Bandwidth	±1.5%
Conducted Emission	±2.6dB
Transmitter Spurious Emission	±3.8dB (for 25MHz-1GHz)
	±5.0dB (for 1GHz-18GHz)



6 Summary of Test Result

Test Items	FCC Rules	Result
Antenna Requirement	§15.203	Compliant
Conducted Emissions	§15.207(a)	N/A
Radiated Spurious Emissions	§15.209(a)	Compliant
Field Strength of Emissions	§15.249(a)	Compliant
Out of Band Emission	§15.249(d)	Compliant
Emission Bandwidth	§15.215(c)	Compliant

Remark:

Pass	Test item meets the requirement
Fail	Test item does not meet the requirement
N/A	Test case does not apply to the test object

WALTEK




6.1 Antenna Requirement

6.1.1 Standard Applicable

According to FCC Part 15.203, an intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the provisions of this section.

6.1.2 Evaluation Information

The EUT has a PCB Antenna, the gain is 0dBi, fulfil the requirement of this section.

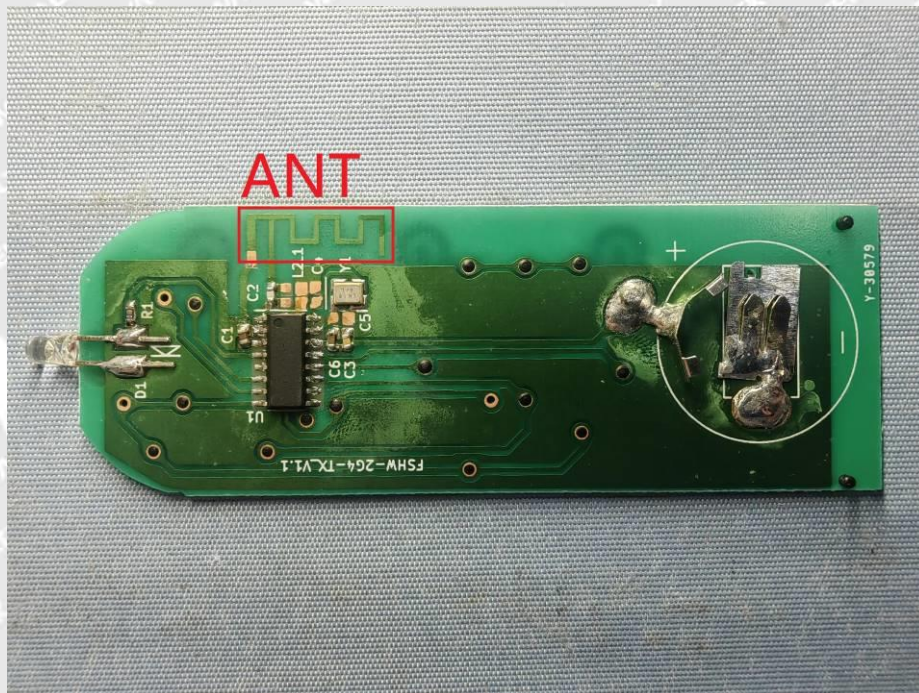



6.2 Radiated Spurious Emissions

6.2.1 Standard Applicable

According to §15.249(a), the field strength of emissions from intentional radiators operated within these frequency bands shall comply with the following:

Fundamental Frequency	Field strength of fundamental (milli-volts/meter)	Field strength of Harmonics (micro-volts/meter)
902-928MHz	50	500
2400-2483.5MHz	50	500
5725-5875MHz	50	500
24.0-24.25GHz	250	2500

(d) Emissions radiated outside of the specified frequency bands, except for harmonics, shall be attenuated by at least 50dB below the level of the fundamental or to the general radiated emission limits in §15.209, whichever is the lesser attenuation.

The emission limit in this paragraph is based on measurement instrumentation employing an average detector. The provisions in §15.35 for limiting peak emissions apply. Spurious Radiated Emissions measurements starting below or at the lowest crystal frequency.


6.2.2 Test Procedure

The setup of EUT is according with per ANSI C63.10-2013 measurement procedure. The specification used was with the FCC Part 15.205 15.249(a) and FCC Part 15.209 Limit.


The external I/O cables were draped along the test table and formed a bundle 30 to 40cm long in the middle. The spacing between the peripherals was 10cm.



The test setup for emission measurement below 30MHz.

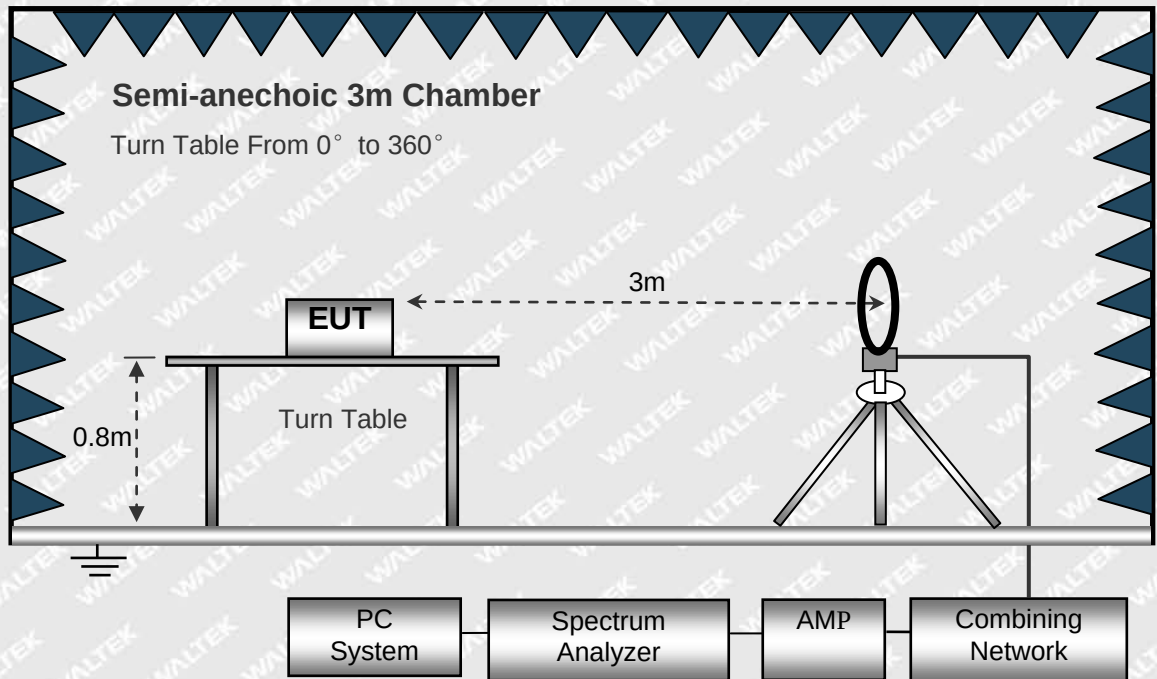


The test setup for emission measurement from 30 MHz to 1 GHz.

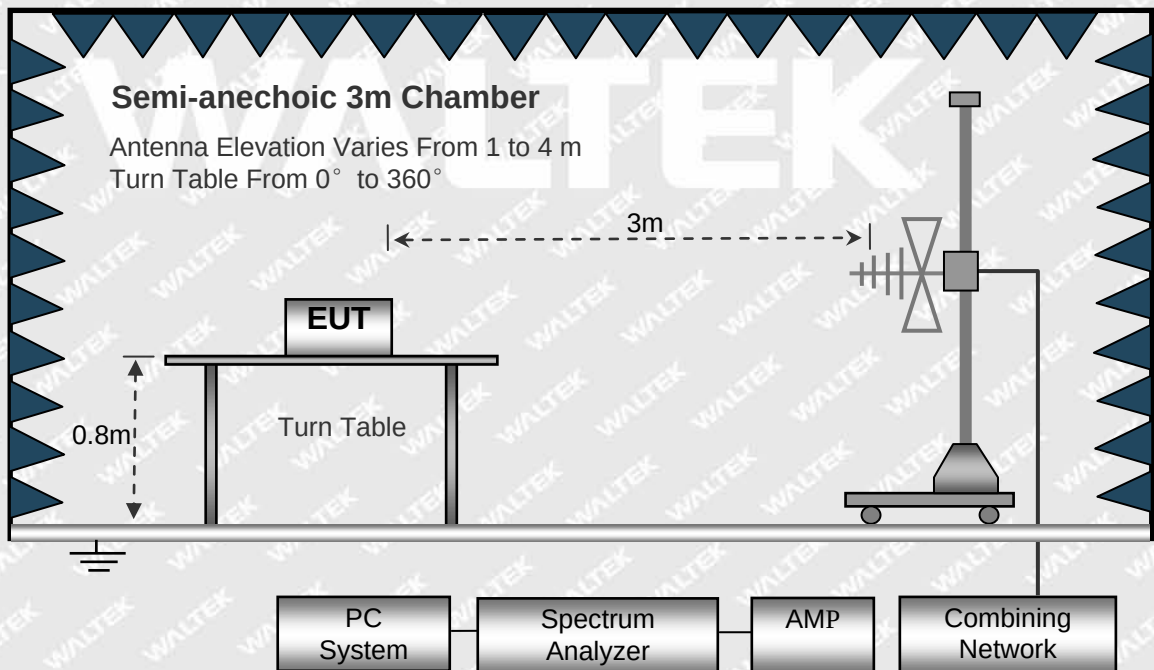



The test setup for emission measurement above 1 GHz.

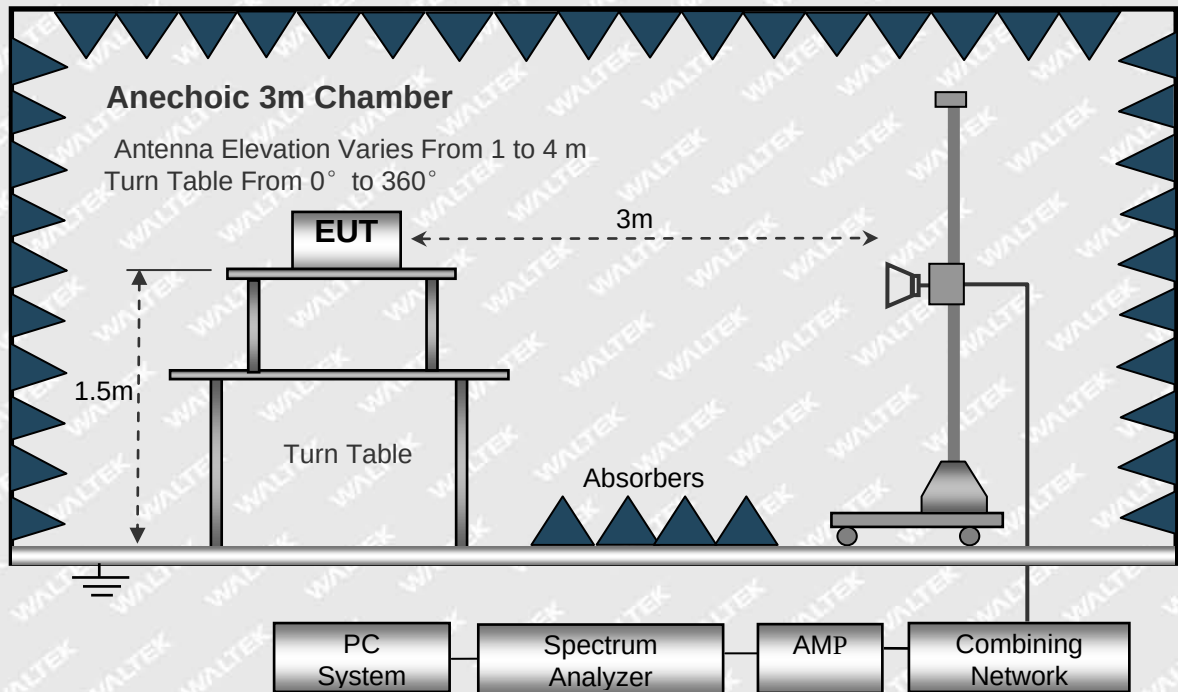

9KHz-30MHz

RBW=10kHz

VBW=30kHz

Sweep time=Auto

Trace=Max hold

Detector function=peak

30MHz-1GHz

RBW=120kHz

VBW=300kHz

Sweep time=Auto

Trace=Max hold

Detector function=peak, QP

Above 1GHz

RBW=1MHz

VBW=3MHz(Peak), 10MHz(AV)

Sweep time=Auto

Trace=Max hold

Detector function=peak, AV

6.2.3 Corrected Amplitude & Margin Calculation

The Corrected Amplitude is calculated by adding the Antenna Factor and Cable Factor, and subtracting the Amplifier Gain from the Amplitude reading. The basic equation is as follows:

$$\text{Corr. Ampl.} = \text{Indicated Reading} + \text{Corr. Factor}$$

$$\text{Corr. Factor} = \text{Antenna Factor} + \text{Cable Factor} - \text{Amplifier Gain}$$

The “Margin” column of the following data tables indicates the degree of compliance with the applicable limit. For example, a margin of -7dB means the emission is 7dB below the maximum limit for Class B. The equation for margin calculation is as follows:


$$\text{Margin} = \text{Corr. Ampl.} - \text{Limit}$$



6.2.4 Test Results

Test Frequency: Below 1GHz

Test Channel Low Channel Polarization Vertical

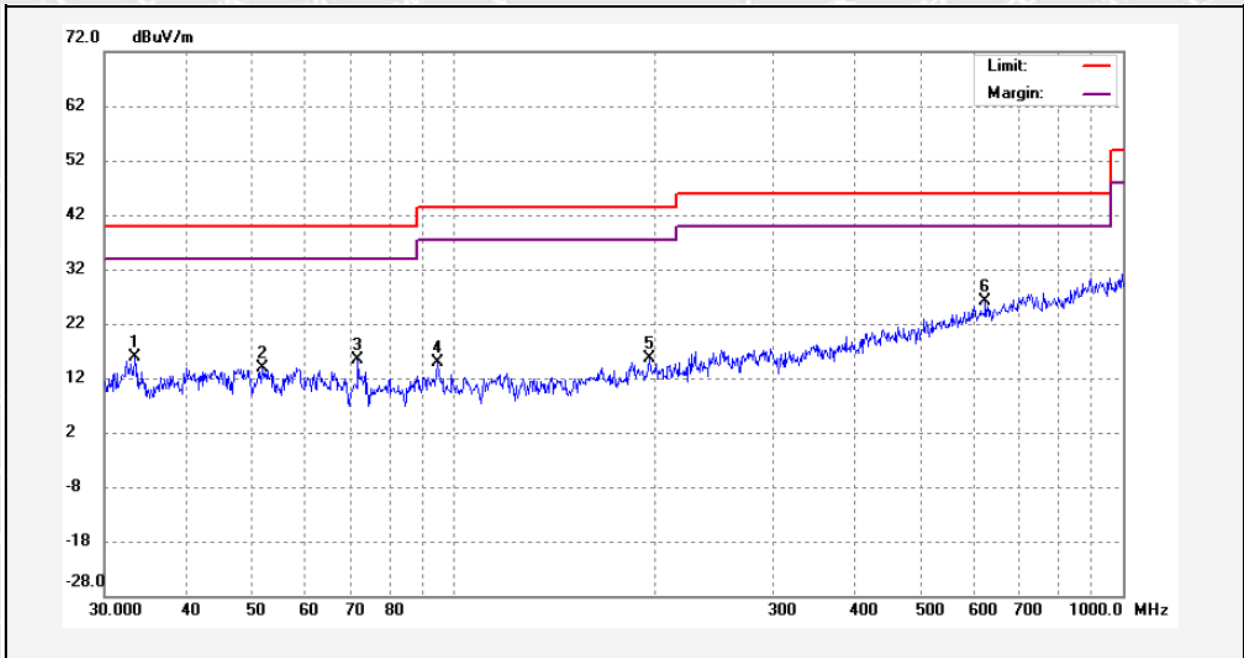


No.	Freq. (MHz)	Reading (dBuV/m)	Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Remark
1	33.3395	3.90	12.00	15.90	40.00	-24.10	QP	
2	51.7522	0.11	13.74	13.85	40.00	-26.15	QP	
3	71.9578	4.53	10.80	15.33	40.00	-24.67	QP	
4	94.6272	3.21	11.57	14.78	43.50	-28.72	QP	
5	196.1655	0.52	14.99	15.51	43.50	-27.99	QP	
6	623.1082	1.60	24.47	26.07	46.00	-19.93	QP	



Test Channel Low Channel

Polarization Horizontal

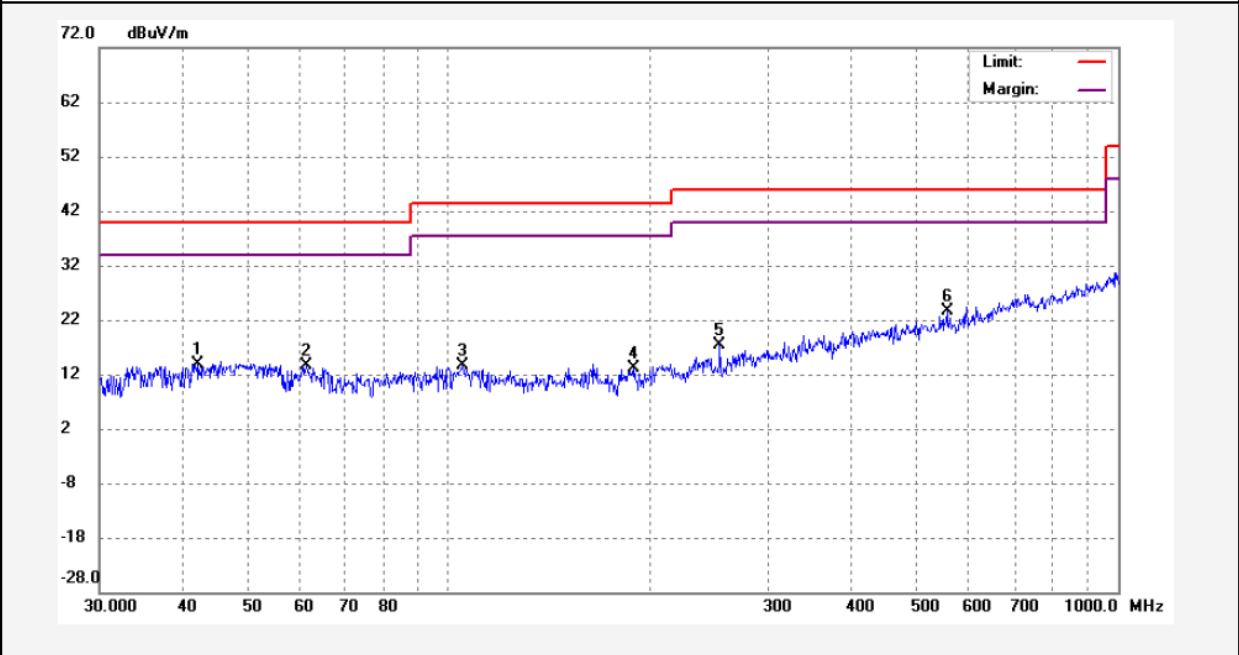


No.	Freq. (MHz)	Reading (dBuV/m)	Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Remark
1	42.0949	-1.51	15.43	13.92	40.00	-26.08	QP	
2	61.2817	0.19	13.51	13.70	40.00	-26.30	QP	
3	105.1979	-0.92	14.63	13.71	43.50	-29.79	QP	
4	189.1406	0.25	12.85	13.10	43.50	-30.40	QP	
5	254.1038	2.18	15.22	17.40	46.00	-28.60	QP	
6	555.4094	1.81	21.78	23.59	46.00	-22.41	QP	



Test Channel Middle Channel

Polarization


Vertical

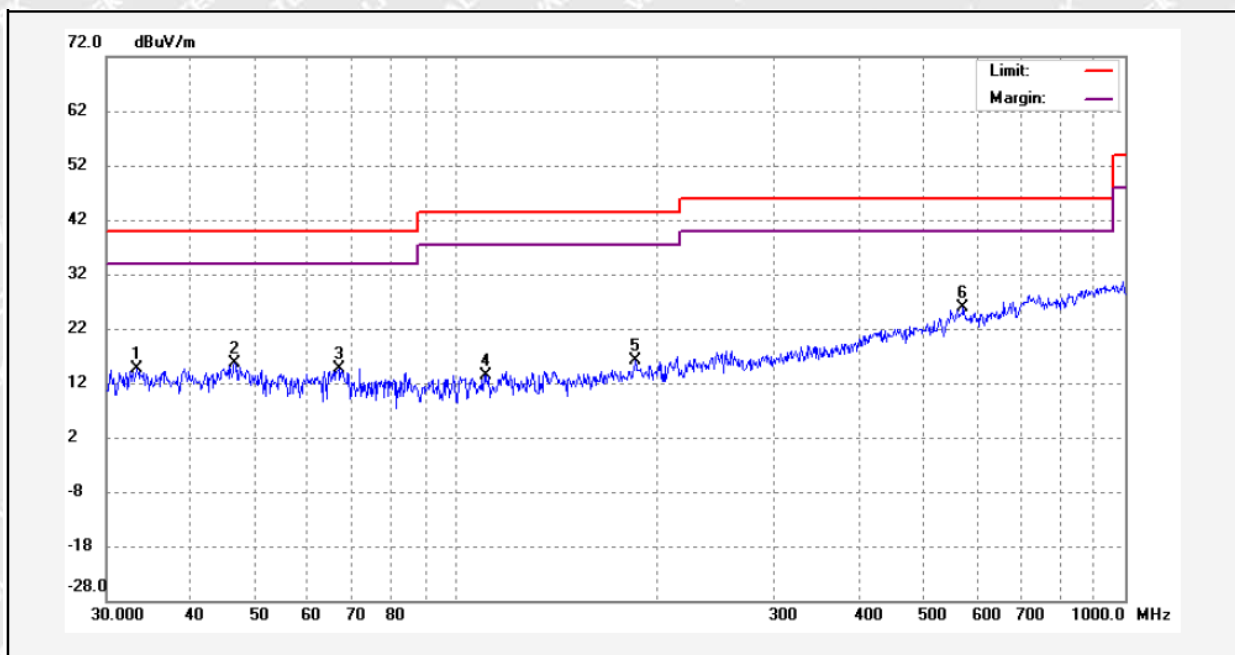

No.	Freq. (MHz)	Reading (dBuV/m)	Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Remark
1	33.4097	2.74	12.01	14.75	40.00	-25.25	QP	
2	46.7645	1.72	13.88	15.60	40.00	-24.40	QP	
3	66.8259	2.86	11.73	14.59	40.00	-25.41	QP	
4	110.6461	1.07	12.25	13.32	43.50	-30.18	QP	
5	185.2025	1.70	14.43	16.13	43.50	-27.37	QP	
6	572.8152	2.05	23.71	25.76	46.00	-20.24	QP	



Test Channel Middle Channel Polarization Horizontal

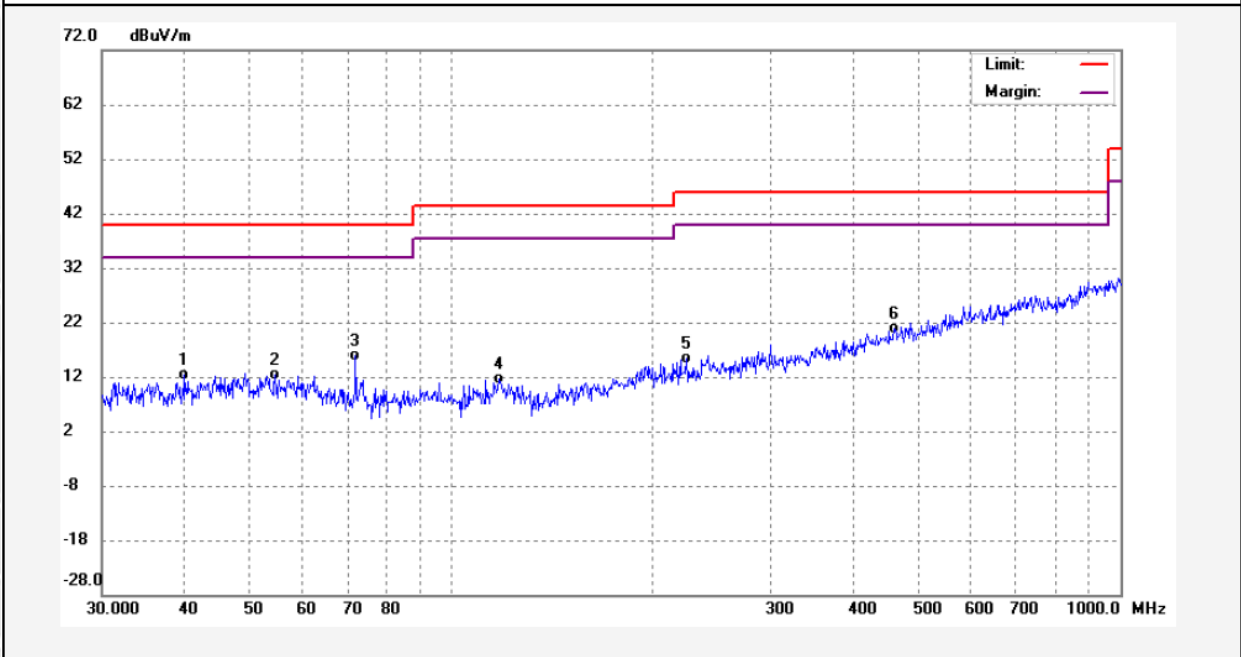


No.	Freq. (MHz)	Reading (dBuV/m)	Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Remark
1	39.8541	-2.68	15.06	12.38	40.00	-27.62	QP	
2	54.4705	-2.43	14.70	12.27	40.00	-27.73	QP	
3	71.9830	5.21	10.67	15.88	40.00	-24.12	QP	
4	117.7724	-1.09	12.70	11.61	43.50	-31.89	QP	
5	224.5192	1.02	14.24	15.26	46.00	-30.74	QP	
6	459.7588	0.58	20.20	20.78	46.00	-25.22	QP	



Test Channel High Channel

Polarization Vertical

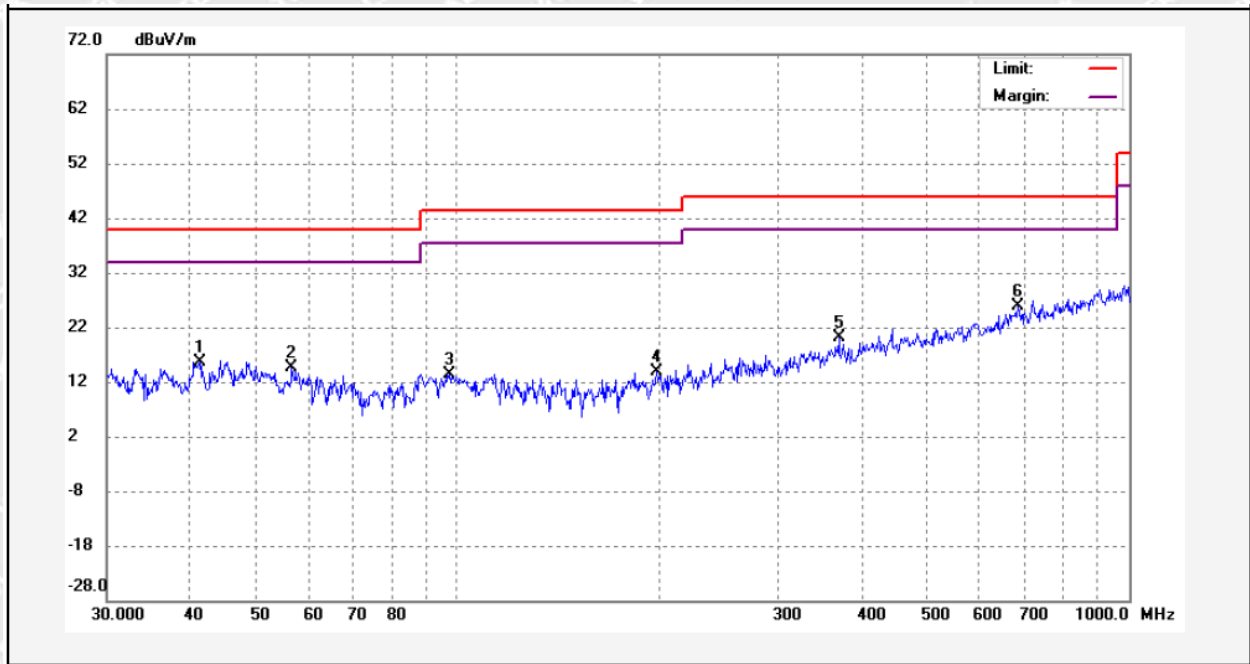


No.	Freq. (MHz)	Reading (dBuV/m)	Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Remark
1	41.2764	0.41	15.30	15.71	40.00	-24.29	QP	
2	56.7120	0.36	14.38	14.74	40.00	-25.26	QP	
3	97.2510	-0.69	14.02	13.33	43.50	-30.17	QP	
4	198.5183	0.57	13.38	13.95	43.50	-29.55	QP	
5	370.0529	1.82	18.41	20.23	46.00	-25.77	QP	
6	682.8269	1.34	24.49	25.83	46.00	-20.17	QP	



Test Channel High Channel

Polarization

Horizontal

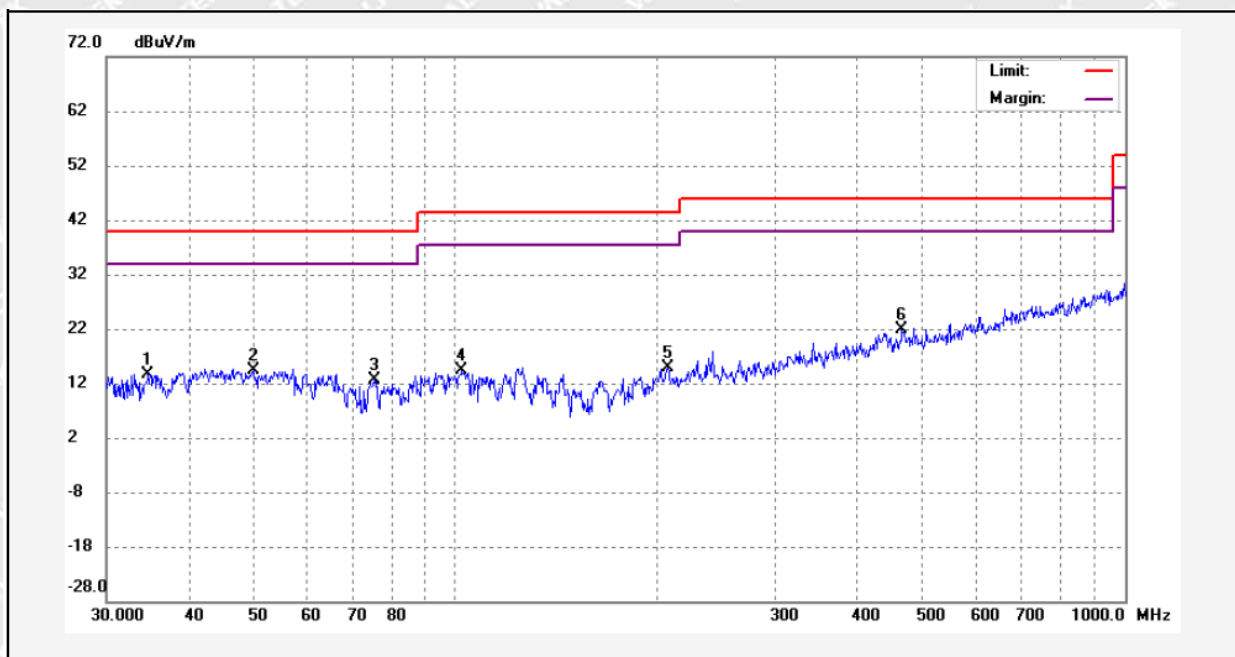

No.	Freq. (MHz)	Reading (dBuV/m)	Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Remark
1	34.7113	-0.35	14.06	13.71	40.00	-26.29	QP	
2	49.8639	-0.91	15.33	14.42	40.00	-25.58	QP	
3	75.6050	2.40	10.12	12.52	40.00	-27.48	QP	
4	102.0013	-0.18	14.45	14.27	43.50	-29.23	QP	
5	207.1225	1.27	13.70	14.97	43.50	-28.53	QP	
6	464.9467	1.48	20.32	21.80	46.00	-24.20	QP	

**Test Frequency: Above 1GHz**

Frequency (MHz)	Reading (dBuV/m)	Correct (dB/m)	Duty Cycle Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Polar (H/V)	Detector
Low Channel								
2403	83.49	-10.33	N/A	73.16	114.00	-40.84	H	PK
2403	/	/	-28.43	44.73	94.00	-49.27	H	AV
4806	49.08	-3.86	N/A	45.22	74.00	-28.78	H	PK
4806	/	/	-28.43	16.79	54.00	-37.21	H	AV
7209	44.85	2.02	N/A	46.87	74.00	-27.13	H	PK
7209	/	/	-28.43	18.44	54.00	-35.56	H	AV
2403	81.24	-10.39	N/A	70.85	114.00	-43.15	V	PK
2403	/	/	-28.43	42.42	94.00	-51.58	V	AV
4806	48.47	-3.44	N/A	45.03	74.00	-28.97	V	PK
4806	/	/	-28.43	16.60	54.00	-37.40	V	AV
7209	44.25	1.99	N/A	46.24	74.00	-27.76	V	PK
7209	/	/	-28.43	17.81	54.00	-36.19	V	AV
Middle Channel								
2423	84.1	-10.24	N/A	73.86	114.00	-40.14	H	PK
2423	/	/	-28.43	45.43	94.00	-48.57	H	AV
4846	48.73	-3.75	N/A	44.98	74.00	-29.02	H	PK
4846	/	/	-28.43	16.55	54.00	-37.45	H	AV
7269	44.78	2.14	N/A	46.92	74.00	-27.08	H	PK
7269	/	/	-28.43	18.49	54.00	-35.51	H	AV
2423	80.64	-10.28	N/A	70.36	114.00	-43.64	V	PK
2423	/	/	-28.43	41.93	94.00	-52.07	V	AV
4846	46.81	-3.36	N/A	43.45	74.00	-30.55	V	PK
4846	/	/	-28.43	15.02	54.00	-38.98	V	AV
7269	43.98	2.08	N/A	46.06	74.00	-27.94	V	PK
7269	/	/	-28.43	17.63	54.00	-36.37	V	AV
High Channel								
2453	82.69	-10.11	N/A	72.58	114.00	-41.42	H	PK
2453	/	/	-28.43	44.15	94.00	-49.85	H	AV
4906	48.62	-3.58	N/A	45.04	74.00	-28.96	H	PK
4906	/	/	-28.43	16.61	54.00	-37.39	H	AV
7359	43.86	2.31	N/A	46.17	74.00	-27.83	H	PK
7359	/	/	-28.43	17.74	54.00	-36.26	H	AV
2453	80.09	-10.14	N/A	69.95	114.00	-44.05	V	PK
2453	/	/	-28.43	41.52	94.00	-52.48	V	AV
4906	47.04	-3.22	N/A	43.82	74.00	-30.18	V	PK
4906	/	/	-28.43	15.39	54.00	-38.61	V	AV
7359	44.02	2.19	N/A	46.21	74.00	-27.79	V	PK
7359	/	/	-28.43	17.78	54.00	-36.22	V	AV



Note: Testing is carried out with frequency rang 9kHz to the tenth harmonics, which above 5th Harmonics are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured. The measurements greater than 20dB below the limit from 9kHz to 30MHz.

WALTEK



6.3 Out of Band Emissions

6.3.1 Standard Applicable

Emissions radiated outside of the specified frequency bands, except for harmonics, shall be attenuated by at least 50dB below the level of the fundamental or to the general radiated emission limits in §15.209, whichever is the lesser attenuation.

6.3.2 Test Procedure

As the radiation test, set the Lowest and Highest Transmitting Channel, observed the outside band of 2400MHz to 2483.5MHz, than mark the higher-level emission for comparing with the FCC rules.

6.3.3 Test Result

Test mode	Frequency (MHz)	Limit (dBuV / dBc)	Result
Lowest	2310.00	<54dBuV	Pass
	2390.00	<54dBuV	Pass
	2400.00	<54dBuV	Pass
Highest	2483.50	<54dBuV	Pass
	2500.00	<54dBuV	Pass

The edge emissions are below the FCC 15.209 Limits or complies with the 15.249 requirements.


Please refer to the test plots as below.



RBW: 1MHz; VBW: 3MHz

Test Channel Low Channel


Polarization Vertical (worst case)

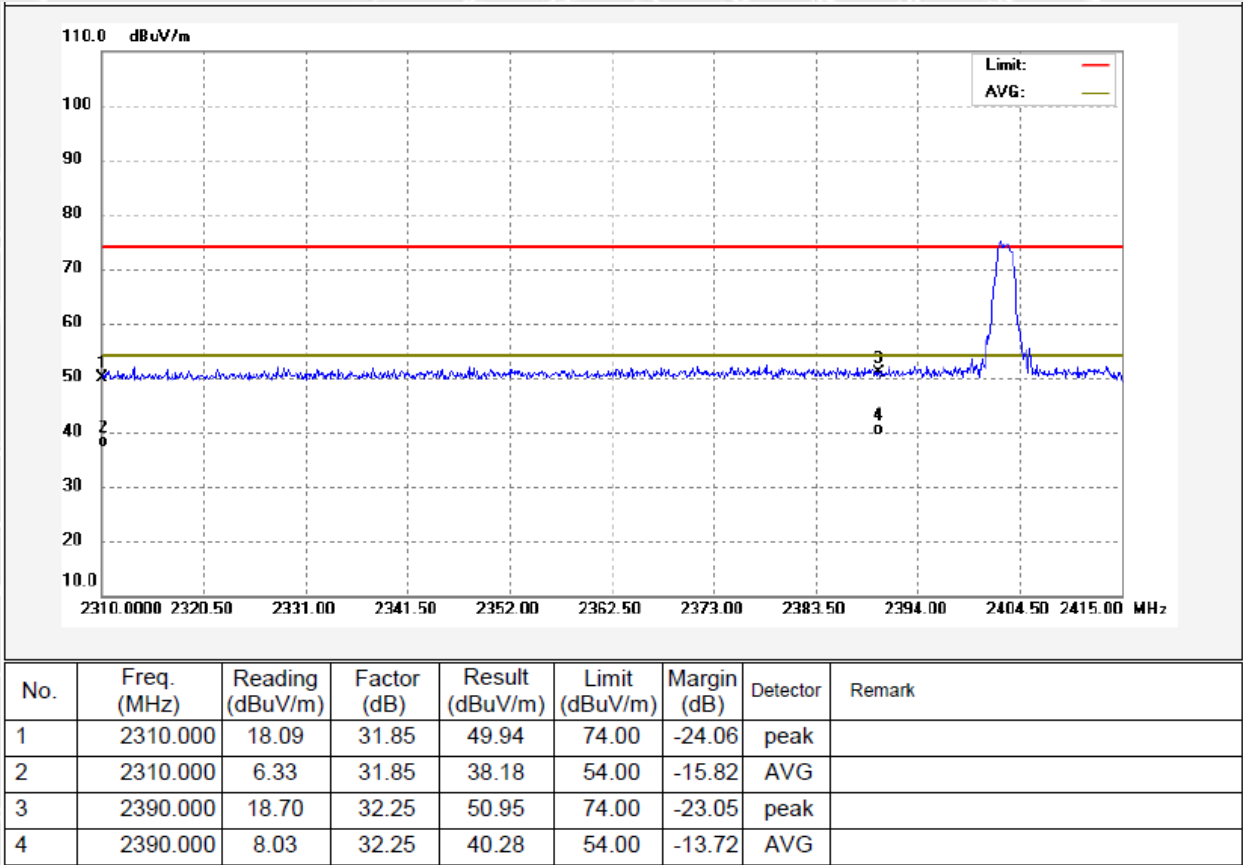



Test Channel High Channel

Polarization Horizontal (worst case)

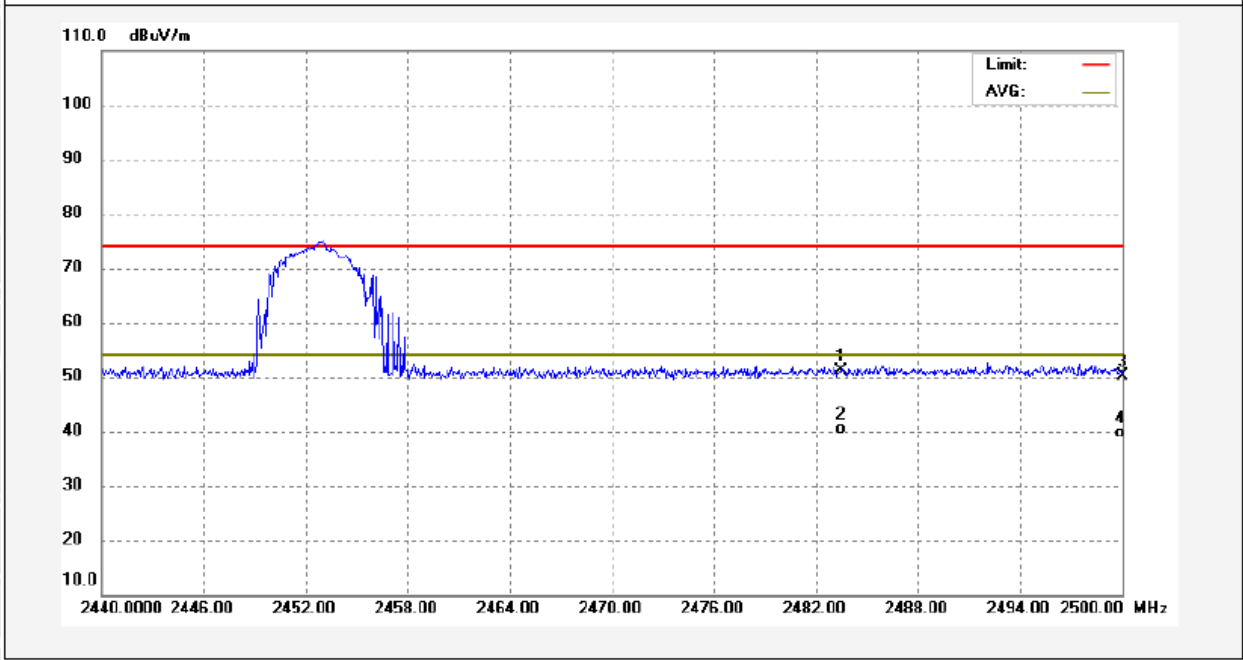

No.	Freq. (MHz)	Reading (dBuV/m)	Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Remark
1	2483.500	18.46	32.72	51.18	74.00	-22.82	peak	
2	2483.500	7.62	32.72	40.34	54.00	-13.66	AVG	
3	2500.000	17.29	32.80	50.09	74.00	-23.91	peak	
4	2500.000	6.85	32.80	39.65	54.00	-14.35	AVG	




Band Edge

RBW: 100kHz; VBW: 300kHz

Test Channel Low Channel

Polarization Vertical (worst case)

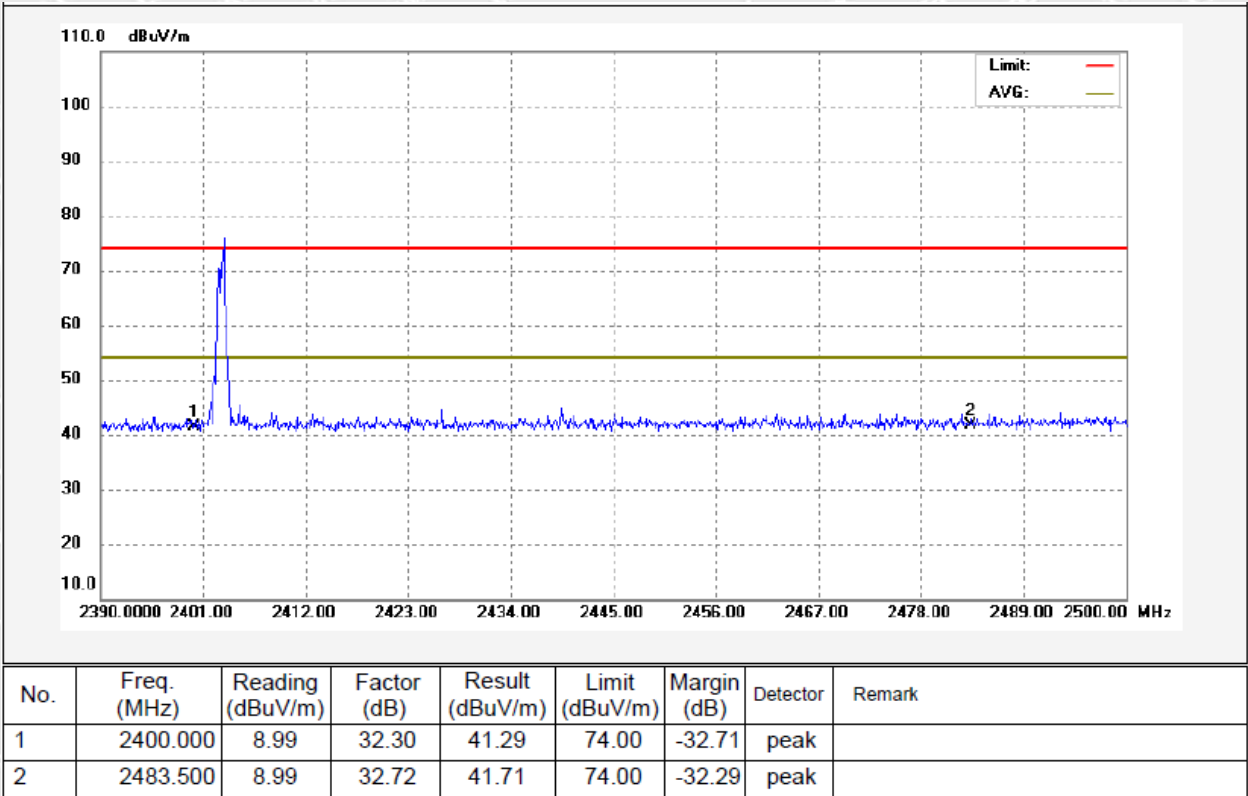



6.4 Emission Bandwidth

6.4.1 Standard Applicable

According to §15.215(c), intentional radiators operating under the alternative provisions to the general emission limits must be designed to ensure that the 20 dB bandwidth of the emission, or whatever bandwidth may otherwise be specified in the specific rule section under which the equipment operates, is contained within the frequency band designated in the rule section under which the equipment is operated. The requirement to contain the designated bandwidth of the emission within the specified frequency band includes the effects from frequency sweeping, frequency hopping and other modulation techniques that may be employed as well as the frequency stability of the transmitter over expected variations in temperature and supply voltage. If a frequency stability is not specified in the regulations, it is recommended that the fundamental emission be kept within at least the central 80% of the permitted band in order to minimize the possibility of out-of-band operation.

6.4.2 Test Procedure

According to the ANSI 63.10-2013, the emission bandwidth test method as follows.

Remove the antenna from the EUT and then connect a low loss RF cable from the antenna port to the spectrum analyzer.

Set span = 1MHz, centered on a transmitting channel RBW 1% 20dB Bandwidth, VBW RBW

Sweep = auto

Detector function = peak Trace = max hold

All the trace to stabilize, use the marker-to-peak function to set the marker to the peak of the emission, use the marker-delta function to measure and record the 20dB down and 99% bandwidth of the emission.

6.4.3 Test Result

Test Channel	20dB Bandwidth (kHz)	Band edge left		Band edge right		Result
		Frequency (MHz)	Limit (MHz)	Frequency (MHz)	Limit (MHz)	
Low Channel	924	2402.529	>2400	2403.453	<2483.5	Pass
Middle Channel	888	2422.550	>2400	2423.438	<2483.5	Pass
High Channel	918	2452.517	>2400	2453.435	<2483.5	Pass



Test result plot as follow:

Low Channel



Middle Channel



High Channel





6.5 Duty Cycle

6.5.1 Standard Applicable

According to FCC Part 15.35 (c), for pulse operation transmitter, the averaging pulsed emissions are calculated by peak value of measured emission plus duty cycle factor.

6.5.2 Test Procedure

With the EUT's antenna attached, the EUT's output signal was received by the test antenna, which was connected to the spectrum analyzer. Set the center frequency we need test, than set the spectrum analyzer to Zero Span for the release time reading. During the testing, the switch was released then the EUT automatically deactivated.

6.5.3 Test Result


Width of Pulse (ms)	Quantity of Pulse	Total Time(Ton)	Test Period (Periodic Time) (ms)	Duty Cycle(%)	Duty Cycle Factor (dB)
1.214	1	1.214	32.78	3.79	-28.43

WALTEK




Test result plot as follow:

Test Pattern 1

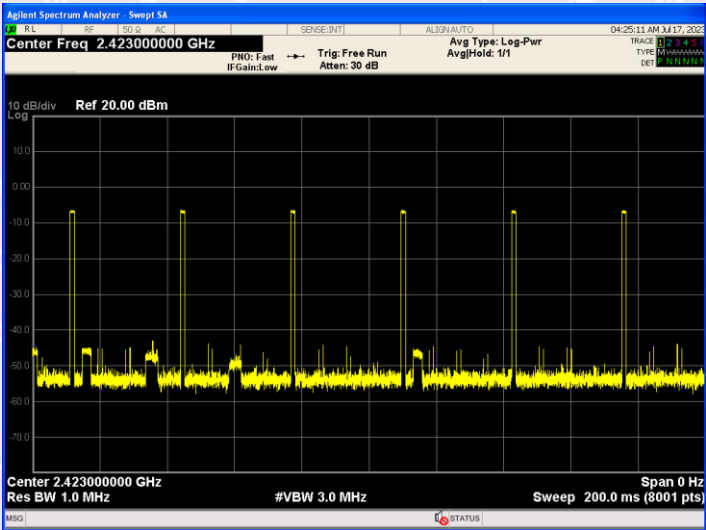

Test Pattern 2

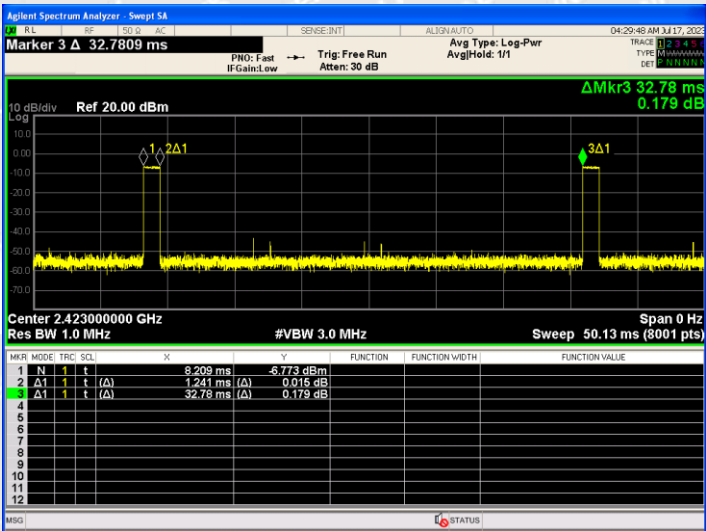




7 Photographs Test Setup

7.1 Photographs - Radiated Emission Test Setup

30MHz-1GHz

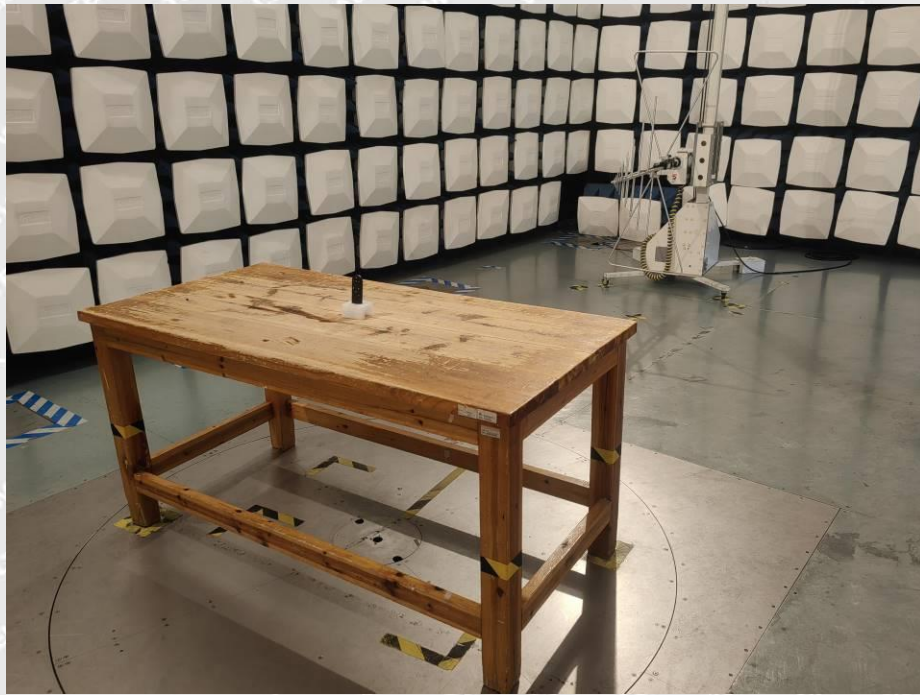

Above 1GHz





8 Photographs - Constructional Details

8.1 EUT - External Photos

Model FSHW-2G4-TX-1









Model FSHW-2G4-TX-2










8.2 EUT – Internal Photos

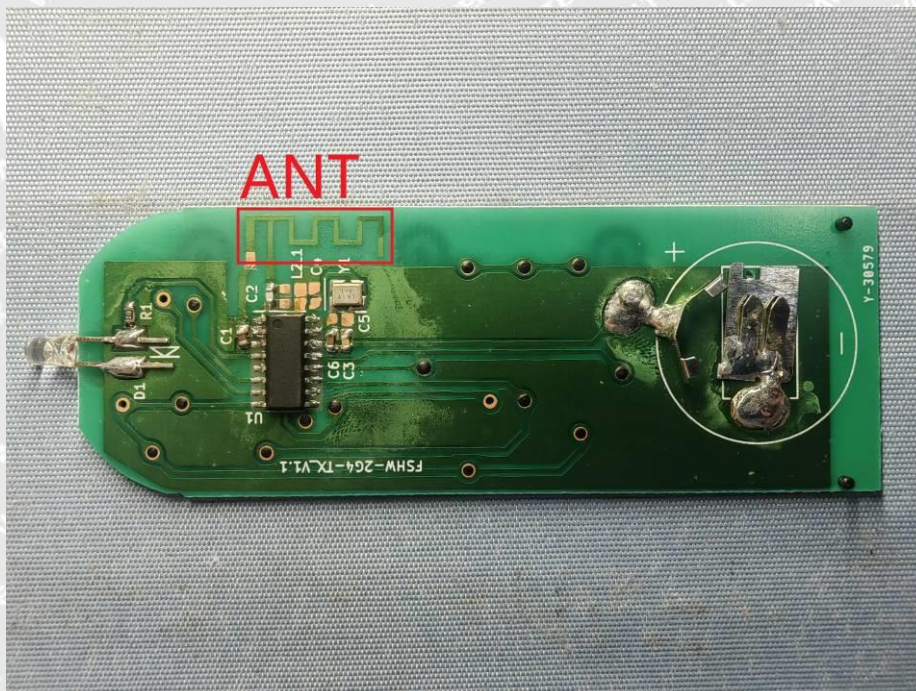



=====End of Report=====