
TEST REPORT FOR WLAN TESTING

Report No.: SRTC2021-9004(F)-21120101(F)

Product Name: Mobile phone

Applicant: Hisense International Co., Ltd.

Manufacturer: Hisense Communications Co., Ltd.

Specification: FCC Part 15 Subpart C (2020)

FCC ID: 2ADOBHLTE240E

The State Radio_monitoring_center Testing Center (SRTC)

15th Building, No.30 Shixing Street, Shijingshan District, Beijing, P.R.China

Tel: 86-10-57996183 Fax: 86-10-57996388

CONTENTS

1. GENERAL INFORMATION.....	2
1.1 Notes of the test report	2
1.2 Information about the testing laboratory	2
1.3 Applicant's details	2
1.4 Manufacturer's details.....	2
1.5 Test Environment.....	3
2 DESCRIPTION OF THE DEVICE UNDER TEST	4
2.1 Final Equipment Build Status.....	4
2.2 Description of Test Modes.....	5
2.2.1 Test Mode Applicability and Tested Channel Detail	5
2.3 EUT Operating conditions.....	6
2.4 Support Equipment	6
3 REFERENCE SPECIFICATION.....	7
4 KEY TO NOTES AND RESULT CODES.....	7
5 RESULT SUMMARY	8
6 TEST RESULT	9
6.1 Peak Power Output.....	9
6.2 6dB Bandwidth.....	10
6.3 Transmitter Power Spectral Density	11
6.4 Conducted Out of band emission measurement	12
6.5 Band-edge measurement	13
6.6 Spurious Radiated Emissions.....	14
6.7 AC Power line Conducted Emission	19
7 MEASUREMENT UNCERTAINTIES	21
8 TEST EQUIPMENTS.....	22
APPENDIX A – TEST DATA OF CONDUCTED EMISSION.....	23
APPENDIX B – TEST DATA OF RADIATED EMISSION	36

1. GENERAL INFORMATION

1.1 Notes of the test report

The test report may only be reproduced or published in full. Reproduction or publication of extracts from the report requires the prior written permission of The State Radio_monitoring_center Testing Center (SRTC). The test results relate only to individual items of the samples which have been tested. The certification and accreditation identifiers used in this report shall not be applicable to the tested or calibrated samples thereof. The manufacturer shall not mark the tested samples or items (or a separate part of the item) with the identifiers of certification and accreditation to mislead relevant parties about the tested samples or items.

1.2 Information about the testing laboratory

Company:	The State Radio_monitoring_center Testing Center (SRTC)
Address:	15th Building, No.30 Shixing Street, Shijingshan District, P.R.China
City:	Beijing
Country or Region:	P.R.China
Contacted person:	Liu Jia
Tel:	+86 10 57996183
Fax:	+86 10 57996388
Email:	liujiaf@srtc.org.cn
Designation Number:	CN1267
Registration number:	239125

1.3 Applicant's details

Company:	Hisense International Co., Ltd.
Address:	Floor 22, Hisense Tower, 17 Donghai Xi Road, Qingdao, 266071, China

1.4 Manufacturer's details

Company:	Hisense Communications Co., Ltd.
Address:	218 Qianwangang Road, Qingdao Economic & Technological Development Zone, Qingdao, China

1.5 Test Environment

Date of Receipt of test sample at SRTC:	2021-12-01
Testing Start Date:	2021-12-03
Testing End Date:	2021-12-05

Environmental Data:	Temperature (°C)	Humidity (%)
Ambient:	25	40
Maximum Extreme:	50	---
Minimum Extreme:	-30	---

Normal Supply Voltage (V d.c.):	3.80
Maximum Extreme Supply Voltage (V d.c.):	4.35
Minimum Extreme Supply Voltage (V d.c.):	3.50

2 DESCRIPTION OF THE DEVICE UNDER TEST

2.1 Final Equipment Build Status

Frequency Band:	2.412GHz~2.462GHz
Number of Channel For 20MHz:	11
Number of Channel For 40MHz:	7
Modulation Type:	802.11b 802.11g 802.11n (HT20)
Power Supply:	Charger
Software Revision:	Hisense_HLTE240E_S03_01_01_MX05
Hardware Revision:	FS192-MB-V0.1
IMEI	863504060001192/ 863504060001655
Antenna type:	Refer to Note
Antenna connector:	Refer to Note

Note: There are two types of products: single card and dual card. After verification, dual card is the worst case, so the data reflected in this report are dual card models.

Note: Antenna requirement (FCC part 15.203)

An intentional radiator antenna shall be designed to ensure that no antenna other than that furnished by the responsible party can be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the provisions of this section.

- The antenna(s) of the EUT are permanently attached.
- There are no provisions for connection to an external antenna.

Note: The antenna provides to the EUT, please refer to the following table:

Brand	Model	Antenna gain	Frequency band (GHz)	Antenna type	Connector Type
N/A	N/A	-0.39 dBi	2.4GHz~2.4835GHz	FPC Antenna	N/A

The antenna gain is provided by the customer and involved in the calculation and influence of the test results. Our laboratory takes the value declared by the customer as the criterion, and the customer is responsible for the antenna gain value. Manufacturers ensure that their designs will not be modified by the user or third party's arbitrary antenna parameters and performance.

d) *Unequal antenna gains, with equal transmit powers.* For antenna gains given by $G_1, G_2, \dots, G_N$ dBi

(i) If transmit signals are *correlated*, then

Directional gain = $10 \log[(10^{G_1/10} + 10^{G_2/10} + \dots + 10^{G_N/10})^2 / N_{ANT}]$ dBi [Note the "20"s in the denominator of each exponent and the square of the sum of terms; the object is to combine the signal levels coherently.]

(ii) If all transmit signals are *completely uncorrelated*, then

Directional gain = $10 \log[(10^{G_1/10} + 10^{G_2/10} + \dots + 10^{G_N/10}) / N_{ANT}]$ dBi

2.2 Description of Test Modes

11 channels are provided to this EUT:

CHANNEL	FREQ. (MHz)	CHANNEL	FREQ. (MHz)
1	2412	7	2442
2	2417	8	2447
3	2422	9	2452
4	2427	10	2457
5	2432	11	2462
6	2437	---	---

2.2.1 Test Mode Applicability and Tested Channel Detail

EUT CONFIGURE MODE	APPLICABLE TO				DESCRIPTION
	RE $\geq$ 1G	RE<1G	PLC	APCM	-
-	√	√	√	√	-

Where

RE $\geq$ 1G: Radiated Emission above 1GHz

RE<1G: Radiated Emission below 1GHz

PLC: Power Line Conducted Emission

APCM: Antenna Port Conducted Measurement

Radiated Emission Test (Above 1GHz):

Pre-Scan has been conducted to determine the worst-case mode from all possible combinations between available modulations, data rates and antenna ports (if EUT with antenna diversity architecture).

Following channel(s) was (were) selected for the final test as listed below.

AVAILABLE CHANNEL	TESTED CHANNEL	MODULATION TYPE	DATA RATE (Mbps)
1 to 11	1/6/11 For HT20	DBPSK/BPSK	1,6, 6.5,13.5 8.6,17.2

Radiated Emission Test (Below 1GHz):

Pre-Scan has been conducted to determine the worst-case mode from all possible combinations between available modulations, data rates and antenna ports (if EUT with antenna diversity architecture).

Following channel(s) was (were) selected for the final test as listed below.

AVAILABLE CHANNEL	TESTED CHANNEL	MODULATION TYPE	DATA RATE (Mbps)
1 to 11	1/6/11 For HT20	DBPSK/BPSK	1,6, 6.5,13.5 8.6,17.2

Power Line Conducted Emission Test:

Pre-Scan has been conducted to determine the worst-case mode from all possible combinations between available modulations, data rates and antenna ports (if EUT with antenna diversity architecture).

Following channel(s) was (were) selected for the final test as listed below.

AVAILABLE CHANNEL	TESTED CHANNEL	MODULATION TYPE	DATA RATE (Mbps)
1 to 11	6	DBPSK	1

Antenna Port Conducted Measurement:

This item includes all test value of each mode, but only includes spectrum plot of worst value of each mode.

Pre-Scan has been conducted to determine the worst-case mode from all possible combinations between available modulations, data rates and antenna ports (if EUT with antenna diversity architecture).

Following channel(s) was (were) selected for the final test as listed below.

AVAILABLE CHANNEL	TESTED CHANNEL	MODULATION TYPE	DATA RATE (Mbps)
1 to 11	1/6/11 For HT20	DBPSK/BPSK	1,6, 6.5,13.5 8.6,17.2

2.3 EUT Operating conditions

The software provided by client to enable the EUT under transmission condition continuously at lowest, middle and highest channel frequencies individually.

2.4 Support Equipment

The following support equipment was used to exercise the DUT during testing:
N/A

3 REFERENCE SPECIFICATION



Specification	Version	Title
FCC part15 Subpart C	2020	Intentional radiators
ANSI C63.10	2013	Standard of Procedures for Compliance Testing of Unlicensed Wireless Devices
KDB 558074D01 V05R02	April 2, 2019	Guidance for compliance measurements on Digital transmission system, frequency hopping spread spectrum system, and hybrid system devices operating under section 15.247 of the FCC rules

4 KEY TO NOTES AND RESULT CODES

Code	Meaning
PASS	Test result shows that the requirements of the relevant specification have been met.
FAIL	Test result shows that the requirements of the relevant specification have not been met.
N/T	Test case is not tested.

5 RESULT SUMMARY

No.	Test case	Reference	Verdict
1	Transmitter Output Power	15.247(b)(3)	Pass
2	6dB Bandwidth	15.247(a)(2)	Pass
3	Transmitter Power Spectral Density	15.247(e)	Pass
4	Conducted Out of band emission measurement	15.247(d)	Pass
5	Band Edge	15.247(d)	Pass
6	Spurious Radiated Emissions	15.205/15.209	Pass
7	AC Power line Conducted Emission	15.207	Pass
8	Antenna requirement	15.203	Pass(refer to section 2.1)

This Test Report Is Issued by: Mr. Peng Zhen 	Checked by: Mr. Li Bin 
Tested by: Mr. Wang Hao 	Issued date: 20211221

6 TEST RESULT

6.1 Peak Power Output

6.2.1 Test limit

Part15.247 (b) (3)

The maximum permissible conducted output power is 1 Watt.

6.2.2 Test Procedure Used

ANSI C63.10-2013 – Section 11.9.1.3

ANSI C63.10-2013 – Section 11.9.2.3.2

KDB 558074 D01 v05r02 – Section 8.3.1.3

6.2.3 Test Settings

Peak Power Measurement


The maximum peak conducted output power may be measured using a broadband peak RF power meter. The power meter shall have a video bandwidth that is greater than or equal to the DTS bandwidth and shall utilize a fast-responding diode detector.

Average Power Measurement

Average power measurements were performed only when the EUT was transmitting at its maximum power control level using a broadband power meter with a pulse sensor. The power meter implemented triggering and gating capabilities which were set up such that power measurements were recorded only during the ON time of the transmitter. The trace was averaged over 100 traces to obtain the final measured average power.

6.2.4 Test Setup

The EUT and measurement equipment were set up as shown in the diagram below.



6.2.5 Test result

The test results are shown in Appendix A.

6.2 6dB Bandwidth

6.1.1 Test limit

Part15.247 (a) (2)

The minimum permissible 6dB bandwidth is 500 kHz

6.1.2 Test Procedure Used

ANSI C63.10-2013 – Section 11.8.2 Option 2


KDB 558074 D01 v05r02 – Section 8.2

6.1.3 Test Settings

1. The signal analyzers' automatic bandwidth measurement capability of the spectrum analyzer was used to perform the 6dB bandwidth measurement. The "X" dB bandwidth parameter was set to $X = 6$. The bandwidth measurement was not influenced by any intermediate power nulls in the fundamental emission.
2. RBW = 100 kHz
3. VBW $\geq 3 \times$ RBW
4. Detector = Peak
5. Trace mode = max hold
6. Sweep = auto couple
7. The trace was allowed to stabilize

6.1.4 Test Setup

The EUT and measurement equipment were set up as shown in the diagram below.



6.1.5 Test result

The test results are shown in Appendix A.

6.3 Transmitter Power Spectral Density

6.3.1 Test limit

Part15.247 (e)

The maximum permissible power spectral density is 8.0dBm in any 3 kHz band.

6.3.2 Test Procedure Used

ANSI C63.10-2013 – Section 11.10.2 Method PKPSD


KDB 558074 D01 v05r02 – Section 8.4

6.3.3 Test Settings

1. Analyzer was set to the center frequency of the DTS channel under investigation
2. Span = 1.5 times the DTS channel bandwidth
3. RBW = 3 kHz
4. VBW = 10 kHz
5. Detector = peak
6. Sweep time = auto couple
7. Trace mode = max hold
8. Trace was allowed to stabilize

6.3.4 Test Setup

The EUT and measurement equipment were set up as shown in the diagram below.



6.3.5 Test result

The test results are shown in Appendix A.

6.4 Conducted Out of band emission measurement

6.4.1 Test limit

Part 15.247(d): The limit for out-of-band spurious emissions at the band edge is 20dB below the fundamental emission level, as determined from the in-band power measurement of the DTS channel performed in a 100 kHz bandwidth.

6.4.2 Test Procedure Used

ANSI C63.10-2013 – Section 11.11.3

KDB 558074 D01 v05r02 – Section 8.5

6.4.3 Reference level measurement Settings

Establish a reference level by using the following procedure:


- Set instrument center frequency to DTS channel center frequency.
- Set the span to ≥ 1.5 MHz
- Set the RBW = 100 kHz.
- Set the VBW ≥ 300 kHz.
- Detector = peak.
- Sweep time = auto couple.
- Trace mode = max hold.
- Allow trace to fully stabilize.
- Use the peak marker function to determine the maximum PSD level.

6.4.4 Test Settings

- Set the center frequency and span to encompass frequency range to be measured.
- Set the RBW = 100 kHz.
- Set the VBW ≥ 300 kHz.
- Detector = peak.
- Set span to encompass the spectrum to be examined
- Sweep time = auto couple.
- Trace mode = max hold.
- Allow trace to fully stabilize.
- Use the peak marker function to determine the maximum amplitude level.

6.4.5 Test Setup

The EUT and measurement equipment were set up as shown in the diagram below.



6.4.6 Test result

The spectrum plots are attached on the following pages. D1 line indicates the highest level, and D2 line indicates the 20dB offset below D1. It shows compliance with the requirement. The test results are shown in Appendix A.

6.5 Band-edge measurement

6.5.1 Test limit

Part 15.247(d): The limit for out-of-band spurious emissions at the band edge is 20dB below the fundamental emission level, as determined from the in-band power measurement of the DTS channel performed in a 100 kHz bandwidth.

6.5.2 Test Procedure Used

ANSI C63.10-2013 – Section 11.11.3
KDB 558074 D01 v05r02 – Section 8.7.2

6.5.3 Reference level measurement Settings

Establish a reference level by using the following procedure:


- Set instrument center frequency to DTS channel center frequency.
- Set the span to ≥ 1.5 MHz
- Set the RBW = 100 kHz.
- Set the VBW ≥ 300 kHz.
- Detector = peak.
- Sweep time = auto couple.
- Trace mode = max hold.
- Allow trace to fully stabilize.
- Use the peak marker function to determine the maximum PSD level.

6.5.4 Test Settings

- Set the center frequency and span to encompass frequency range to be measured.
- Set the RBW = 100 kHz.
- Set the VBW ≥ 300 kHz.
- Detector = peak.
- Set span to encompass the spectrum to be examined
- Sweep time = auto couple.
- Trace mode = max hold.
- Allow trace to fully stabilize.
- Use the peak marker function to determine the maximum amplitude level.

6.5.5 Test Setup

The EUT and measurement equipment were set up as shown in the diagram below.



6.5.6 Test result

The spectrum plots are attached on the following pages. D1 line indicates the highest level, and D2 line indicates the 20dB offset below D1. It shows compliance with the requirement. The test results are shown in Appendix A.

6.6 Spurious Radiated Emissions

6.6.1 Test Description

All out of band radiated spurious emissions are measured with a spectrum analyzer connected to a receive antenna while the EUT is operating at maximum power and at the appropriate frequencies. Only the radiated emissions of the configuration that produced the worst case emissions are reported in this section.

6.6.2 Test limit

Part15.205, 15.209, 15.247(d)

All out of band emissions appearing in a restricted band as specified in Section 15.205 of the Title 47 CFR must not exceed the limits shown in below Table per Section 15.209. The spectrum shall be investigated from the lowest radio frequency signal generated in the device

Frequency [MHz]	Field strength [$\mu\text{V/m}$]	Measured Distance [meters]
0.009~0.490	2400/F(kHz)	300
0.490~1.705	24000/F(kHz)	30
1.705~30.0	30	30
30~88	100	3
88~216	150	3
216~960	200	3
Above 960	500	3

Radiated Limits

Part15.35(b):

There is also a limit on the radio frequency emissions, as measured using instrumentation with a peak detector function, corresponding to 20 dB above the maximum permitted average limit

Used conversion factor: Limit (dB $\mu\text{V/m}$) = 20 log (Limit ($\mu\text{V/m}$)/1 $\mu\text{V/m}$)

Frequency [MHz]	Detector	Unit (dB $\mu\text{V/m}$)
30~88	Quasi-peak	40.0
88~216	Quasi-peak	43.5
216~960	Quasi-peak	46.0
960~1000	Quasi-peak	54.0
1000~5th harmonic of the highest frequency or 40GHz, whichever is lower	Average	54.0
	Peak	74.0

Conversion Radiated limits

6.6.3 Test Procedure Used

ANSI C63.10-2013

For Radiated emission below 30MHz

- The EUT was placed on the top of a rotating table 0.8 meters above the ground at chamber room. The table was rotated 360 degrees to determine the position of the highest radiation.
- The EUT was set 3 meters away from the interference-receiving antenna, which was mounted on the top of a variable-height antenna tower.
- Both X and Y axes of the antenna are set to make the measurement.
- For each suspected emission, the EUT was arranged to its worst case and the rotatable table was turned from 0 degrees to 360 degrees to find the maximum reading.
- The test-receiver system was set to Quasi-Peak Detect Function and recorded the reading with Maximum Hold Mode.

NOTE:

- The resolution bandwidth and video bandwidth of test receiver/spectrum analyzer complied the following setting:

Frequency	RBW
9-150kHz	200-300Hz
0.15-30MHz	9-10kHz

- Signals below 30MHz are not recorded in the report because they are lower than the limits by more than 20dB.

For Radiated emission above 30MHz

- The EUT was placed on the top of a rotating table 0.8 meters (for 30MHz ~ 1GHz) / 1.5 meters (for above 1GHz) above the ground in chamber room for test. The table was rotated 360 degrees to determine the position of the highest radiation.
- The EUT was set 3 meters away from the interference-receiving antenna, which was mounted on the top of a variable-height antenna tower.
- The height of antenna is varied from one meter to four meters above the ground to determine the maximum value of the field strength. Both horizontal and vertical polarizations of the antenna are set to make the measurement.
- For each suspected emission, the EUT was arranged to its worst case and then the antenna was tuned to heights from 1 meter to 4 meters and the rotatable table was turned from 0 degrees to 360 degrees to find the maximum reading.
- The test-receiver system was set to quasi-peak detect function and recorded the reading with Maximum Hold Mode when the test frequency is below 1 GHz.
- The test-receiver system was set to peak and average detector and recorded the reading with Maximum Hold Mode when the test frequency is above 1 GHz. If the peak reading value also meets average limit, measurement with the average detector is unnecessary.

For the radiated emission test above 1GHz:

Place the measurement antenna away from each area of the EUT determined to be a source of emissions at the specified measurement distance, while keeping the measurement antenna aimed at the source of emissions at each frequency of significant emissions, with polarization oriented for maximum response. The measurement antenna may have to be higher or lower than the EUT, depending on the radiation pattern of the emission and staying aimed at the emission source for receiving the maximum signal. The final measurement antenna elevation shall be that which maximizes the emissions. The measurement antenna elevation for maximum emissions shall be restricted to a range of heights of from 1 m to 4 m above the ground or reference ground plane.

NOTE:

1. The resolution bandwidth and video bandwidth of test receiver/spectrum analyzer is 120 kHz for Quasi-peak detection (QP) at frequency below 1GHz.
2. The resolution bandwidth of test receiver/spectrum analyzer is 1 MHz and the video bandwidth is 3 MHz for Peak detection (PK) at frequency above 1GHz.
3. The resolution bandwidth of test receiver/spectrum analyzer is 1 MHz and the video bandwidth is 3 MHz for Average detection (AV) at frequency above 1GHz. If duty cycle of test signal is < 98%, the duty factor need added to measured value.
4. All modes of operation were investigated and the worst-case emissions are reported.

6.6.4 Test Settings

Average Field Strength Measurements

Frequency	Detector
<1000MHz	Quasi-peak
>1000MHz	Peak and average

Peak Field Strength Measurements


1. Analyzer center frequency was set to the frequency of the radiated spurious emission of interest
2. RBW is set depending on measurement frequency, as specified in following table

Frequency	RBW
9-150kHz	200-300Hz
0.15-30MHz	9-10kHz
30-1000MHz	100-120kHz
>1000MHz	1MHz


3. VBW = 3MHz
4. Detector = peak
5. Sweep time = auto couple
6. Trace mode = max hold
7. Trace was allowed to stabilize

6.6.5 Test Setup


For Radiated emission below 30MHz

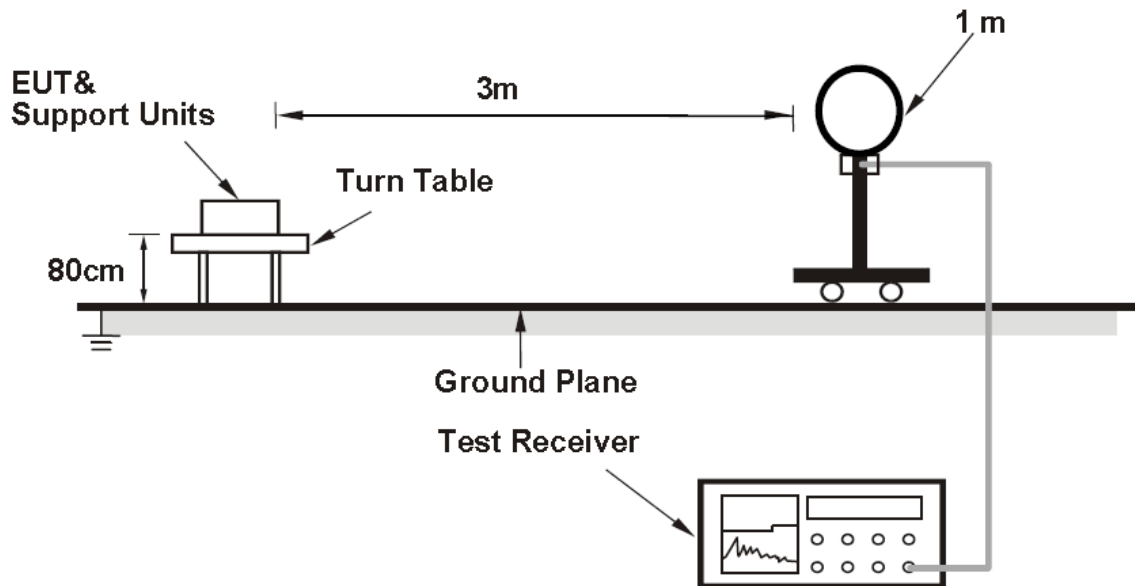

For Radiated emission 30MHz to 1GHz

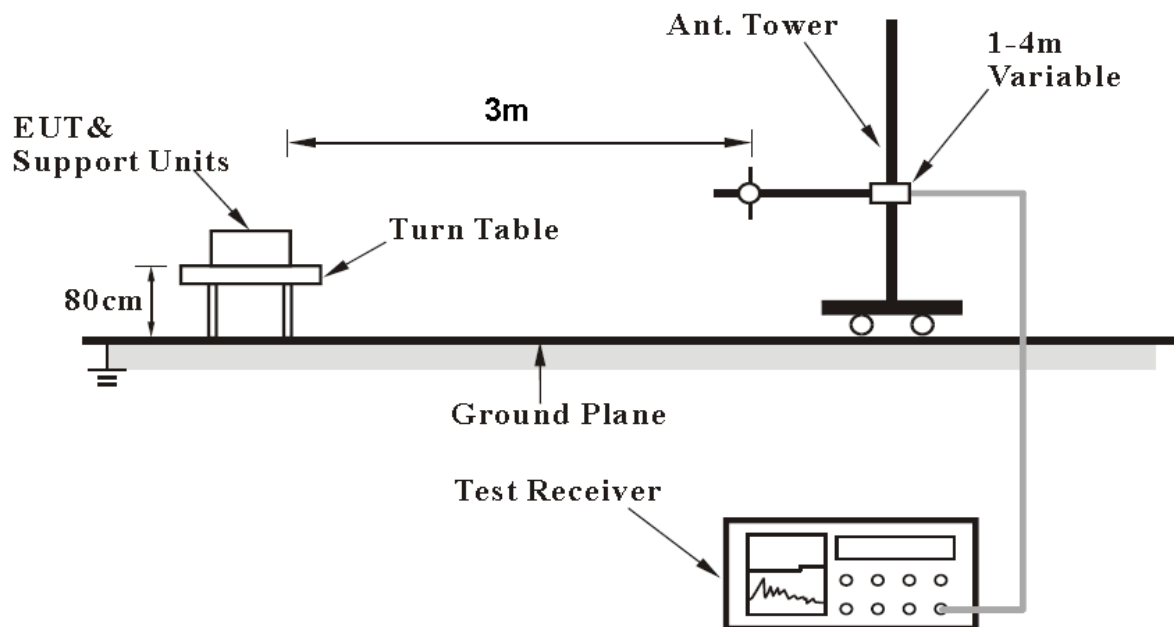

For Radiated emission above 1GHz

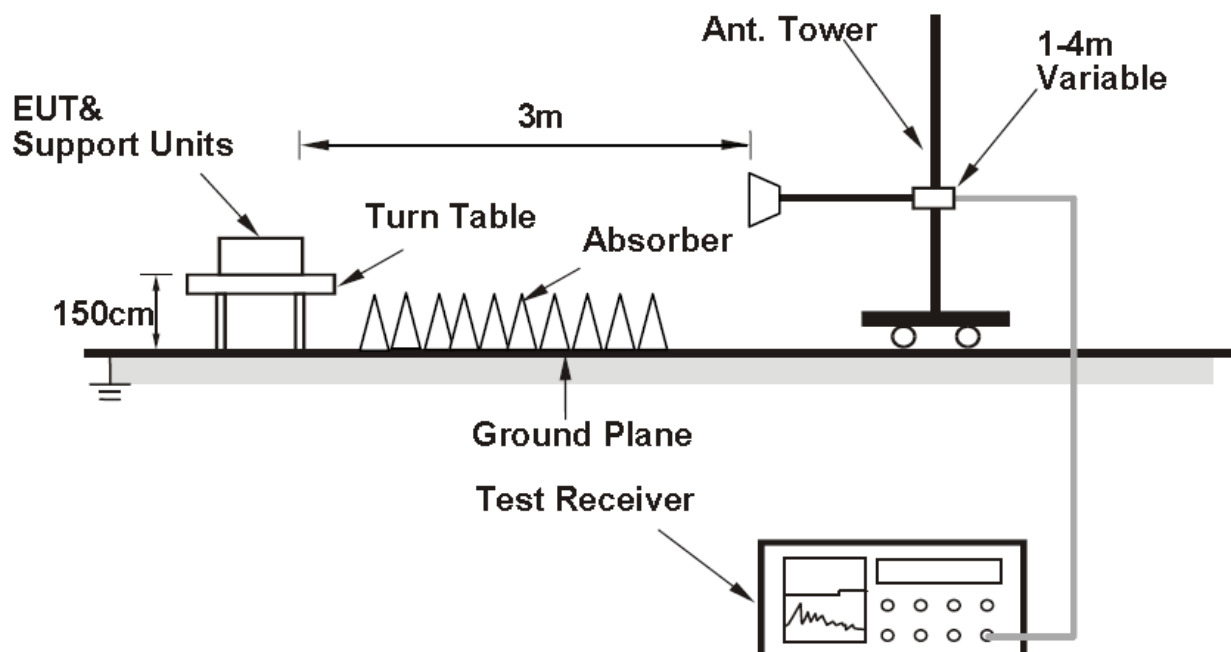

6.6.6 Test result

The test results are shown in Appendix B.

6.7 AC Power line Conducted Emission

6.7.1 Test limit

FCC Part15.207

Frequency of Emission (MHz)	Conducted Limit (dBuV)	
	Quasi-peak	Average
0.15-0.5	66 to 56 *	56 to 46 *
0.5-5	56	46
5-30	60	50

* Decreases with the logarithm of the frequency.

The measurement is made according to ANSI C63.10-2013

6.7.2 Test Procedures

a. The EUT was placed 0.4 meters from the conducting wall of the shielded room with EUT being connected to the power mains through a line impedance stabilization network (LISN). Other support units were connected to the power mains through another LISN. The two LISNs provide 50 ohm/ 50uH of coupling impedance for the measuring instrument.


b. Both lines of the power mains connected to the EUT were checked for maximum conducted interference.

c. The frequency range from 150kHz to 30MHz was searched. Emission levels under (Limit - 20dB) were not recorded.

NOTE: The resolution bandwidth and video bandwidth of test receiver is 9kHz for quasi-peak detection (QP) and average detection (AV) at frequency 0.15MHz-30MHz.

The EUT shall test under the power AC120V/240V/60Hz.

6.7.3 Test Setup

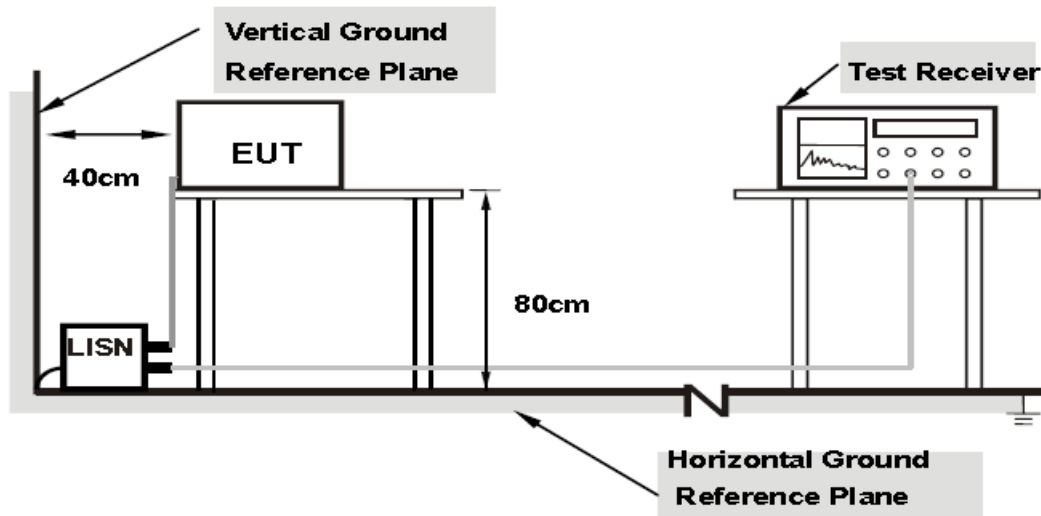

For the actual test configuration, please refer to the attached file (Test Setup Photo).

6.7.4 Test result

The test results are shown in Appendix B.

7 MEASUREMENT UNCERTAINTIES

Items	Uncertainty	
6dB Bandwidth	3kHz	
Peak power output	0.67dB	
Transmitter Power Spectral Density	0.75dB	
Band edge compliance	1.20dB	
Conducted Out of band emission measurement	30MHz~1GHz	2.83dB
	1GHz~12.75GHz	2.50dB
	12.75GHz~25GHz	2.75dB
Spurious Radiated Emissions	30MHz~200MHz	4.88dB
	200MHz~1GHz	4.87dB
	1GHz~18GHz	4.58dB
	18GHz~40GHz	4.35dB
AC Power line Conducted Emission	3.92dB	

8 TEST EQUIPMENTS

No.	Name/ Model	Manufacturer	S/N	Cal date	Cal Due date
1.	Spectrum Analyzer / FSV	ROHDE & SCHWARZ	101065	2021.06.21	2022.06.20
2.	Signal Analyzer / N9020A	Agilent	MY48010771	2021.05.18	2022.05.17
3.	Bluetooth Test Set / MT8852B	Anritsu	1329003	2021.06.21	2022.06.20
4.	Power Divider / 11667A	HP	19632	2021.06.21	2022.06.20
5.	Power Meter E4416A	Agilent	MY52370013	2021.04.13	2022.04.12
6.	Power Sensor E9323A	Agilent	MY52150008	2021.04.13	2022.04.12
7.	Signal Generator / SMBV100A	R&S	260910	2021.06.21	2022.06.20
8.	Temperature chamber / SH241	ESPEC	92013758	2021.06.21	2022.06.20
9.	Fully-Anechoic Chamber / 12.65m×8.03m×7.50m	FRANKONIA	----	----	----
10.	Semi-Anechoic/Chamber / 23.18m×16.88m×9.60m	FRANKONIA	---	----	----
11.	Turn table Diameter:1m	FRANKONIA	----	----	----
12.	Turn table Diameter:5m	FRANKONIA	----	----	----
13.	Antenna master FAC(MA4.0)	MATURO	----	----	----
14.	Antenna master SAC(MA4.0)	MATURO	----	----	----
15.	Shielding room / 9.080m×5.255m×3.525m	FRANKONIA	----	----	----
16.	Double-Ridged Waveguide Horn Antenna / HF 907	R&S	100512	2021.06.21	2022.06.20
17.	Double-Ridged Waveguide Horn Antenna / HF 907	R&S	100513	2021.06.21	2022.06.20
18.	Ultra log antenna / HL562	R&S	100016	2021.06.21	2022.06.20
19.	Receive antenna /3160-09	SCHWARZ-BECK	002058-002	2021.06.21	2022.06.20
20.	EMI test receiver / ESI 40	R&S	100015	2021.06.21	2022.06.20
21.	EMI test receiver / ESCS30	R&S	100029	2021.06.21	2022.06.20
22.	Receive antenna / HL562	R&S	100167	2021.06.21	2022.06.20
23.	AMN / ENV216	R&S	3560.6550.12	2021.06.21	2022.06.20
24.	WLAN AP WIA3300-20	SKSpruce	8152017060700339	---	---
25.	Notebook E470c	Lenovo	PF10UZW7	---	---
26.	Loop Antenna	R&S	100340	2021.08.20	2022.08.20

APPENDIX A – TEST DATA OF CONDUCTED EMISSION

Offset 10.48dB = = Attenuator 10dB +Temporary antenna connector loss 0.2dB+ Cable loss 0.28dB

Duty Cycle

Modulation Type	Frequency (MHz)	Antenna	Duty Cycle	Correction Factor(dB)
802.11b	2412	Chain0	96.43%	0.16
802.11g	2412	Chain0	85.21%	0.69
802.11n HT20	2412	Chain0	96.91%	0.14

Note: Correction Factor=10*log (1/Duty Cycle)


Conducted power

Test Mode	Tones/ RU Index	Freq(MHz)	Antenna	Peak power output (dBm)	Average power output (dBm)
802.11b	NA	2412	Chain0	17.86	13.37
802.11b	NA	2437	Chain0	15.61	11.53
802.11b	NA	2462	Chain0	18.18	14.91
802.11g	NA	2412	Chain0	20.69	11.13
802.11g	NA	2437	Chain0	18.51	8.99
802.11g	NA	2462	Chain0	21.50	11.91
802.11n HT20	NA	2412	Chain0	20.70	10.58
802.11n HT20	NA	2437	Chain0	18.72	8.58
802.11n HT20	NA	2462	Chain0	22.50	12.39

6dB Bandwidth


Test Mode	Antenna	6 dB bandwidth(MHz)		
		Channel No.1	Channel No.6	Channel No.11
		2412MHz	2437MHz	2462MHz
802.11b	Chain0	7.42	8.51	7.48
802.11g	Chain0	15.72	16.39	16.40
802.11n HT20	Chain0	16.75	16.90	17.58

Test Mode: 802.11b

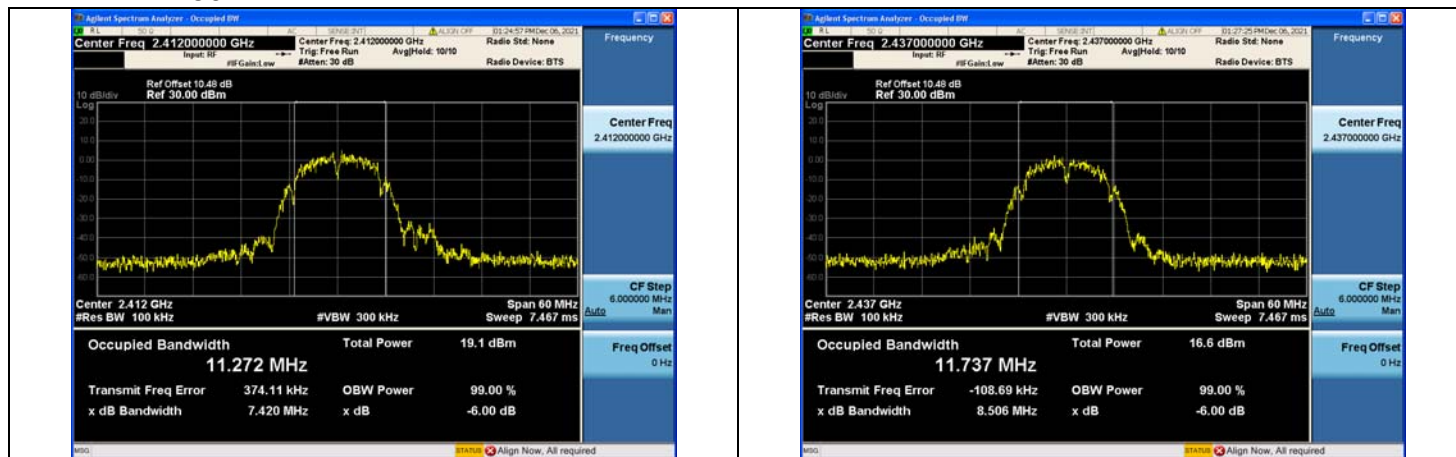


Test Mode:802.11b 2412MHz Chain0

Test Mode:802.11b 2437MHz Chain0

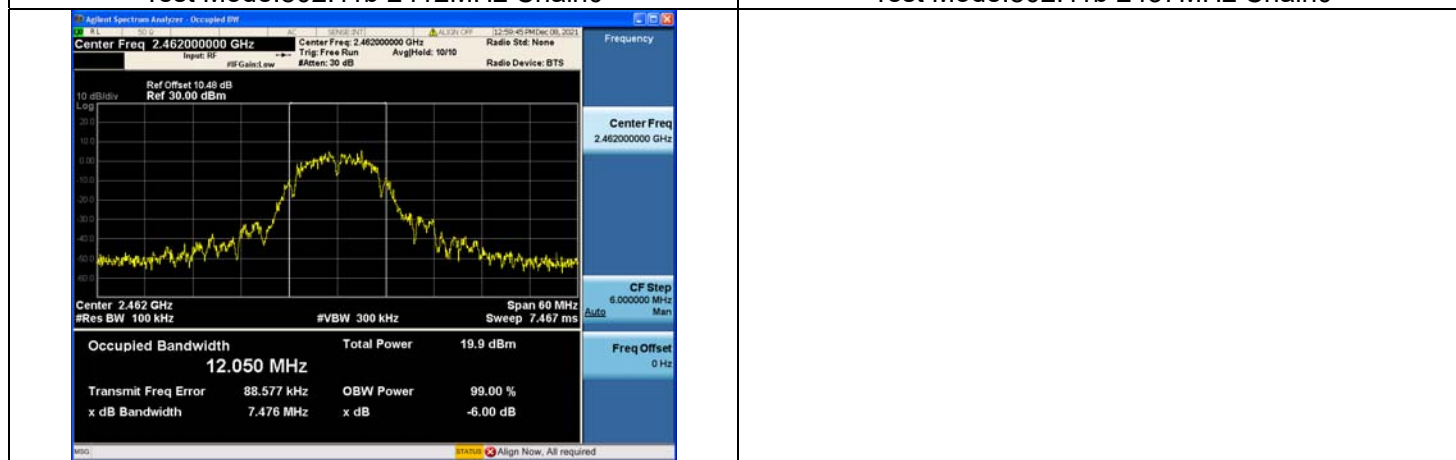


Test Mode:802.11b 2462MHz Chain0


Test Mode: 802.11g

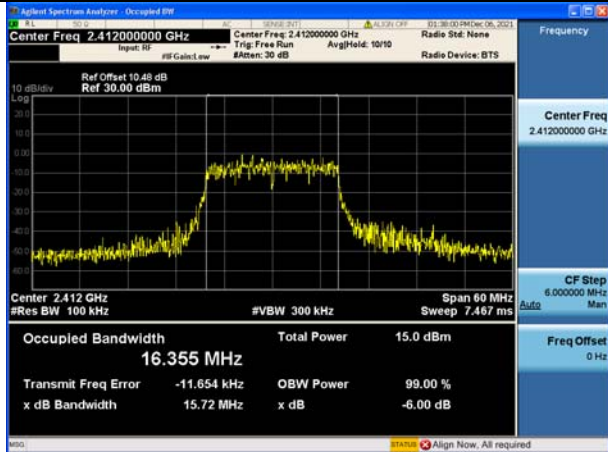

Test Mode:802.11g 2412MHz Chain0

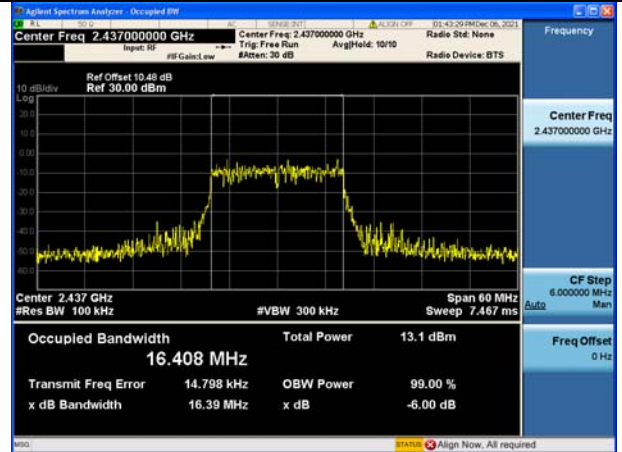


Test Mode:802.11g 2437MHz Chain0

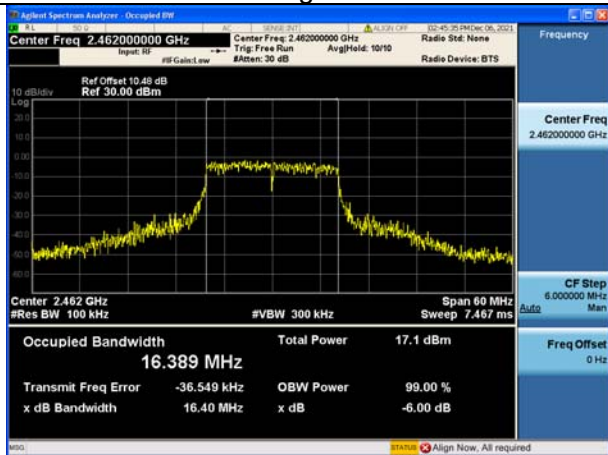


Test Mode:802.11g 2462MHz Chain0


Test Mode: 802.11n HT20

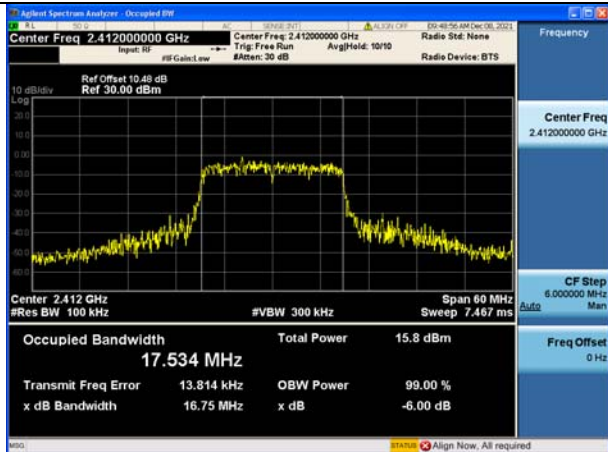

Test Mode:802.11n HT20 2412MHz Chain0

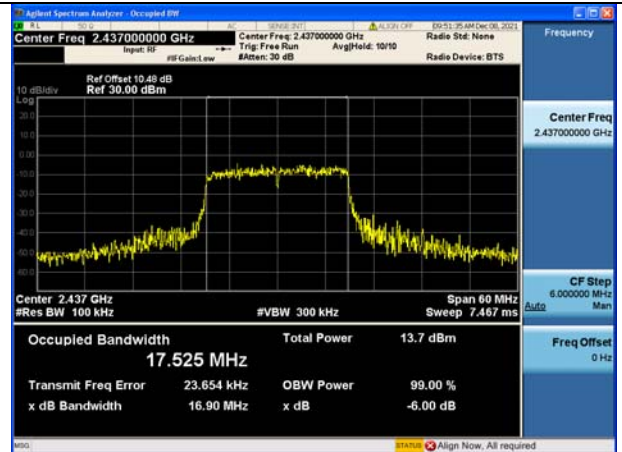

Test Mode:802.11n HT20 2437MHz Chain0

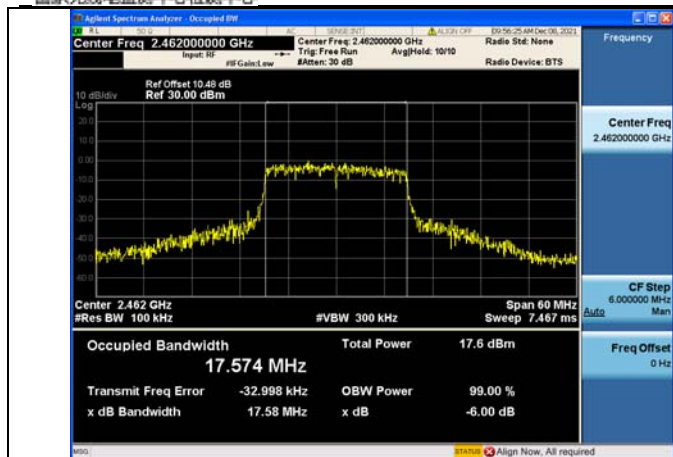


Test Mode:802.11n HT20 2462MHz Chain0

99% Bandwidth


Test Mode	Antenna	99% bandwidth(MHz)		
		Channel No.1	Channel No.6	Channel No.11
		2412MHz	2437MHz	2462MHz
802.11b	Chain0	11.578	11.801	12.081
802.11g	Chain0	16.543	16.614	16.598
802.11n HT20	Chain0	17.625	17.704	17.746

Test Mode: 802.11b

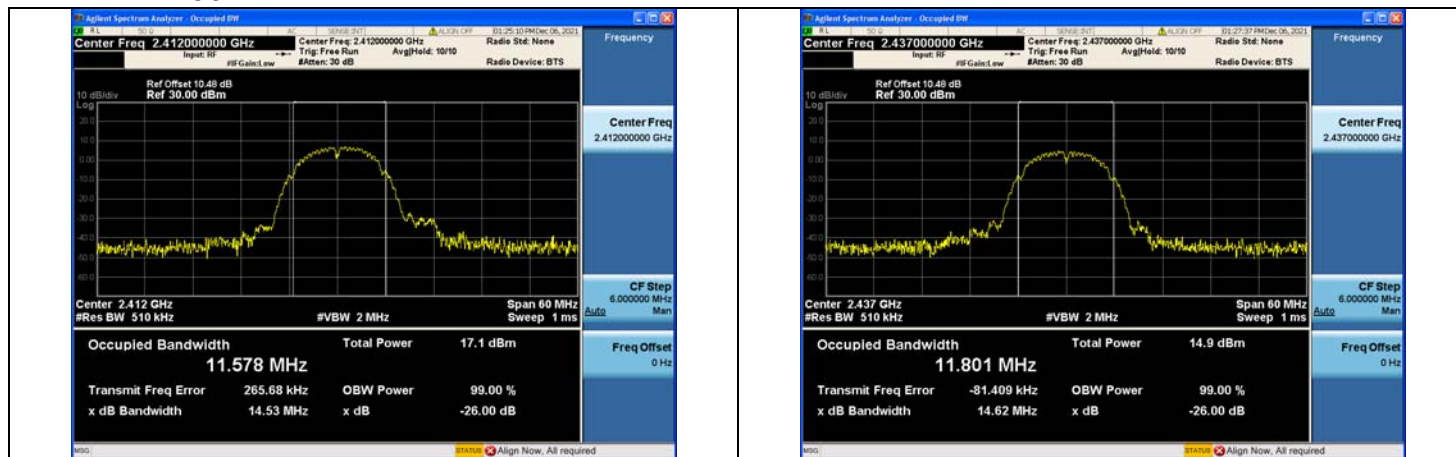


Test Mode:802.11b 2412MHz Chain0

Test Mode:802.11b 2437MHz Chain0

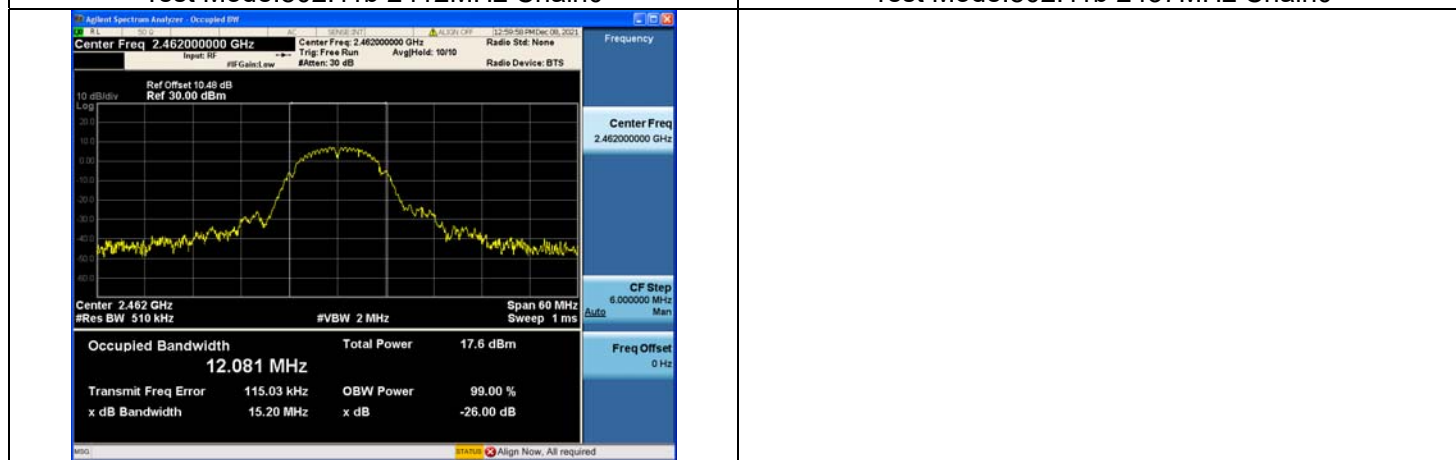


Test Mode:802.11b 2462MHz Chain0


Test Mode: 802.11g

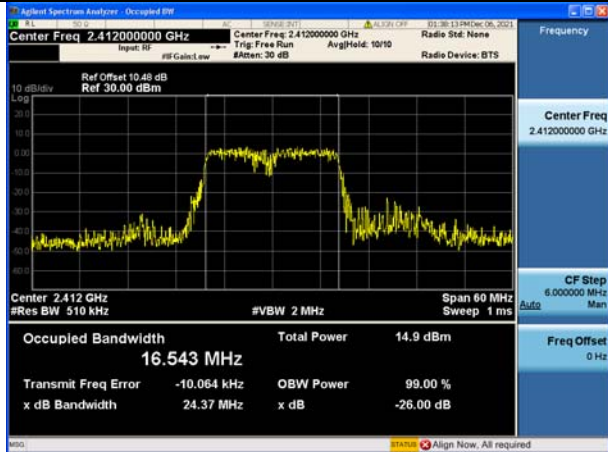

Test Mode:802.11g 2412MHz Chain0

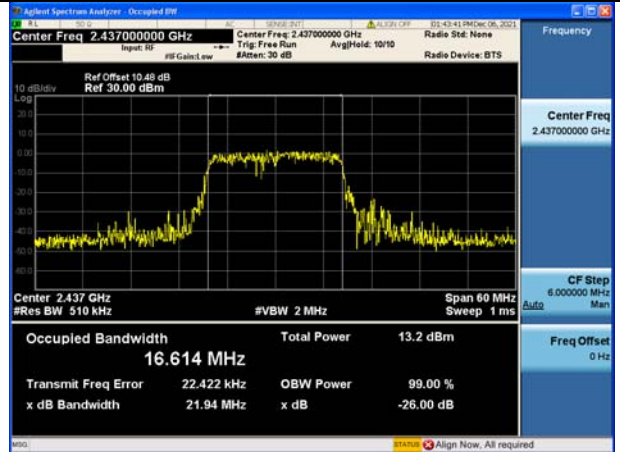


Test Mode:802.11g 2437MHz Chain0

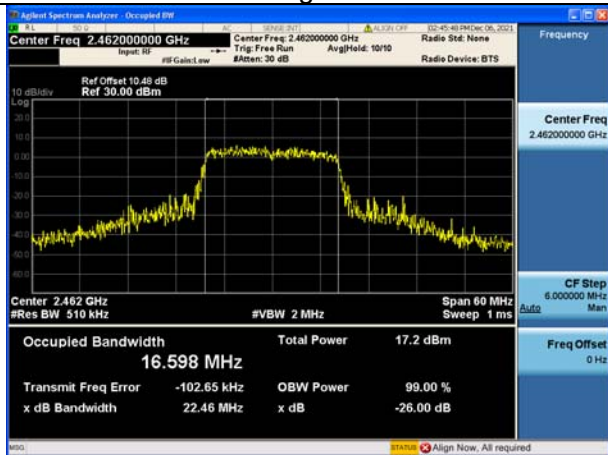


Test Mode:802.11g 2462MHz Chain0


Test Mode: 802.11n HT20

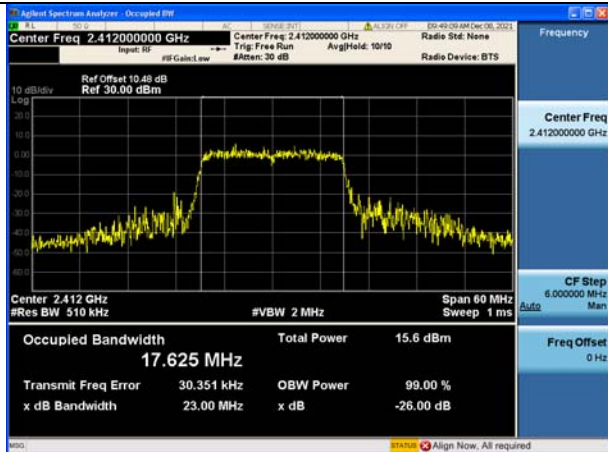

Test Mode:802.11n HT20 2412MHz Chain0

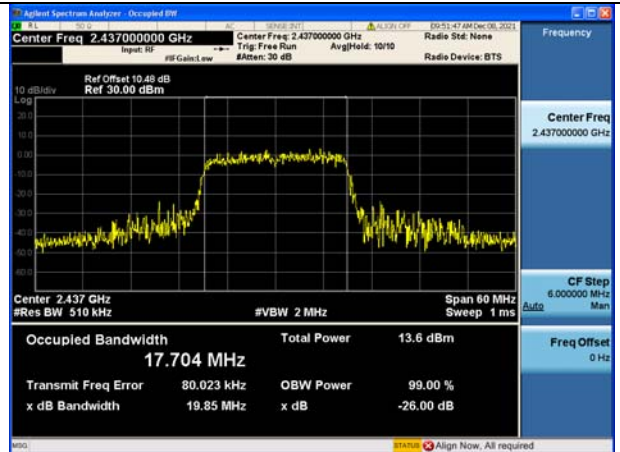

Test Mode:802.11n HT20 2437MHz Chain0

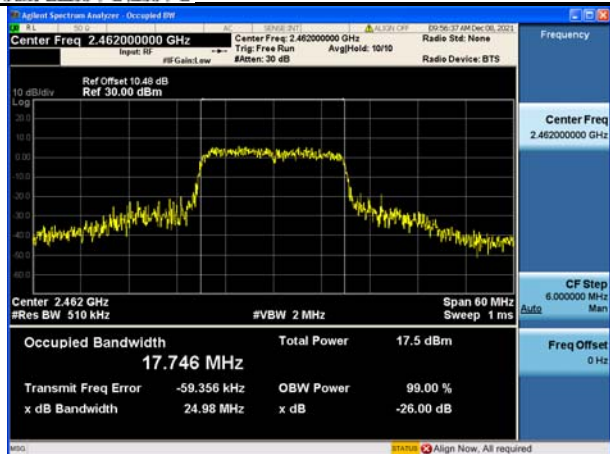

Test Mode:802.11n HT20 2462MHz Chain0

Transmitter Power Spectral Density

Test Mode	Antenna	Power Density(dBm)		
		Channel No.1	Channel No.6	Channel No.11
		2412MHz	2437MHz	2462MHz
802.11b	Chain0	-8.033	-10.857	-7.478
802.11g	Chain0	-16.154	-17.271	-11.451
802.11n HT20	Chain0	-14.713	-14.778	-13.194

Test Mode: 802.11b




Test Mode:802.11b 2412MHz Chain0

Test Mode:802.11b 2437MHz Chain0




Test Mode:802.11b 2462MHz Chain0


Test Mode: 802.11g

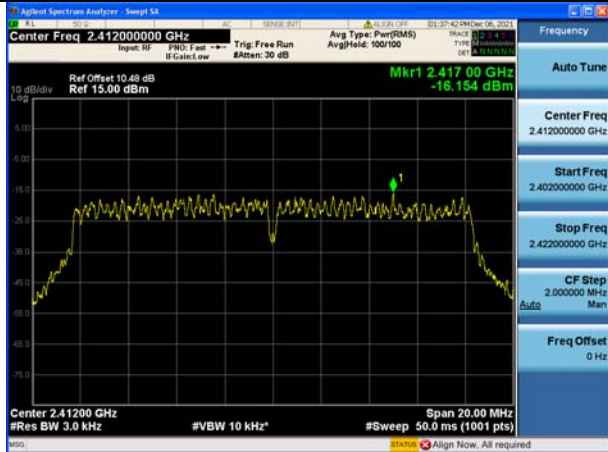

Test Mode:802.11g 2412MHz Chain0

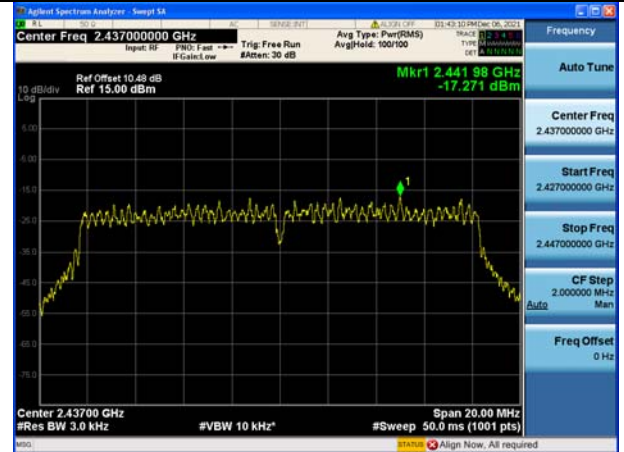


Test Mode:802.11g 2437MHz Chain0

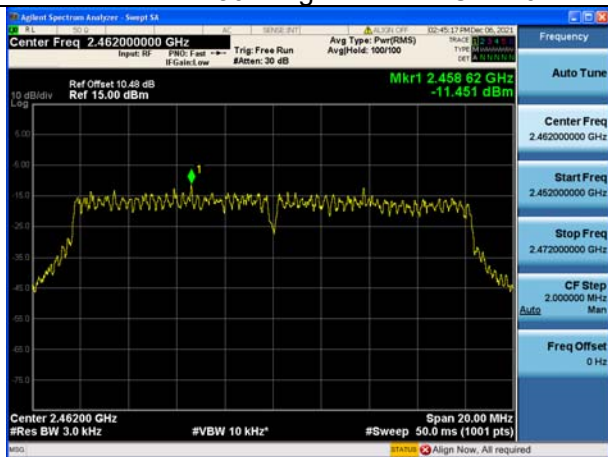


Test Mode:802.11g 2462MHz Chain0


Test Mode: 802.11n HT20

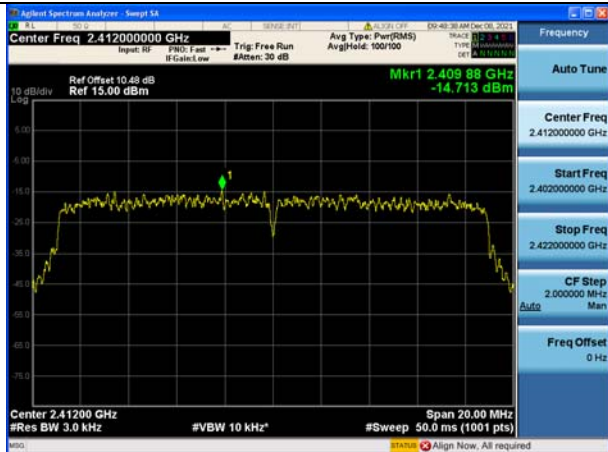

Test Mode:802.11n HT20 2412MHz Chain0

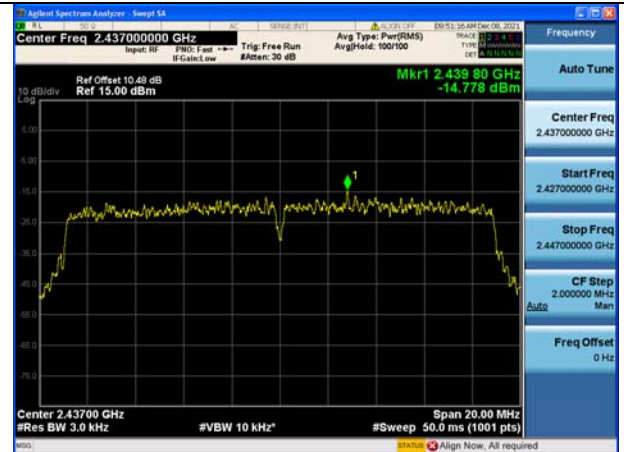


Test Mode:802.11n HT20 2437MHz Chain0

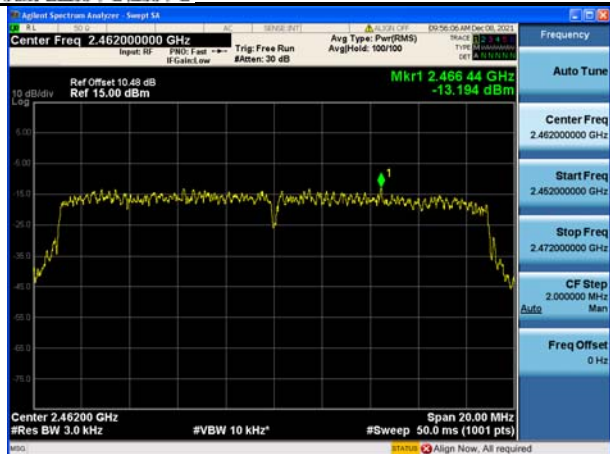

Test Mode:802.11n HT20 2462MHz Chain0


Conducted Out of band emission measurement

Test Mode: 802.11b

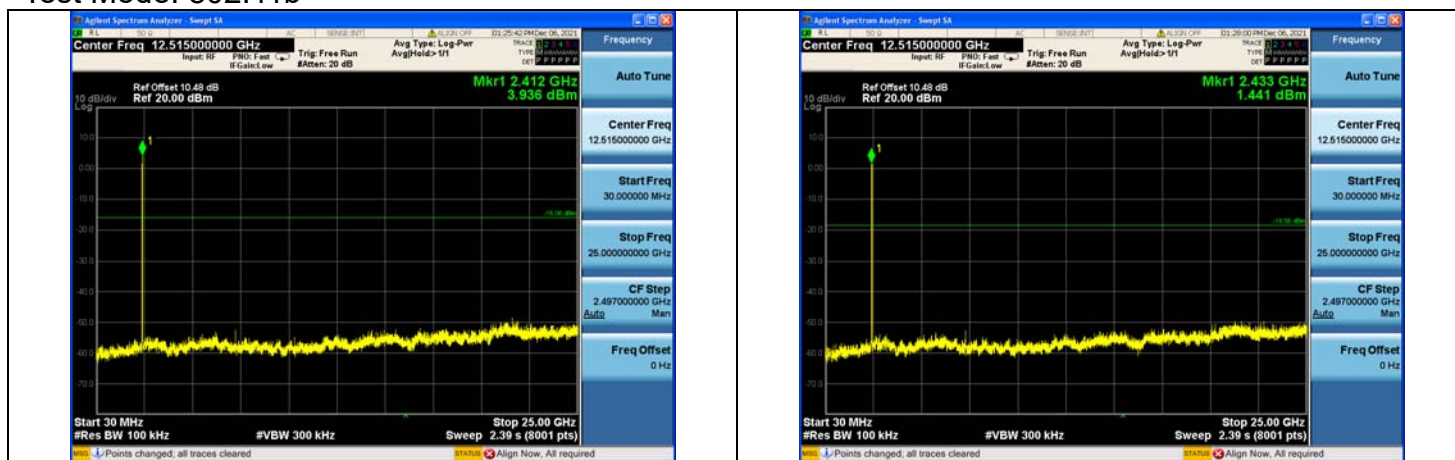


Test Mode:802.11b 2412MHz Chain0

Test Mode:802.11b 2437MHz Chain0

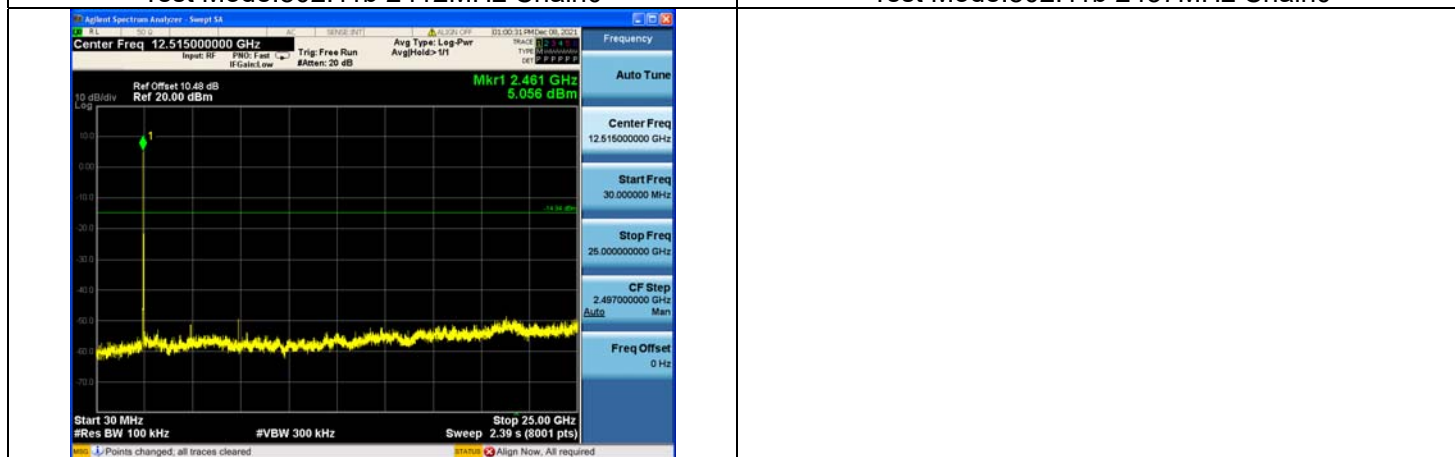


Test Mode:802.11b 2462MHz Chain0

Test Mode: 802.11g

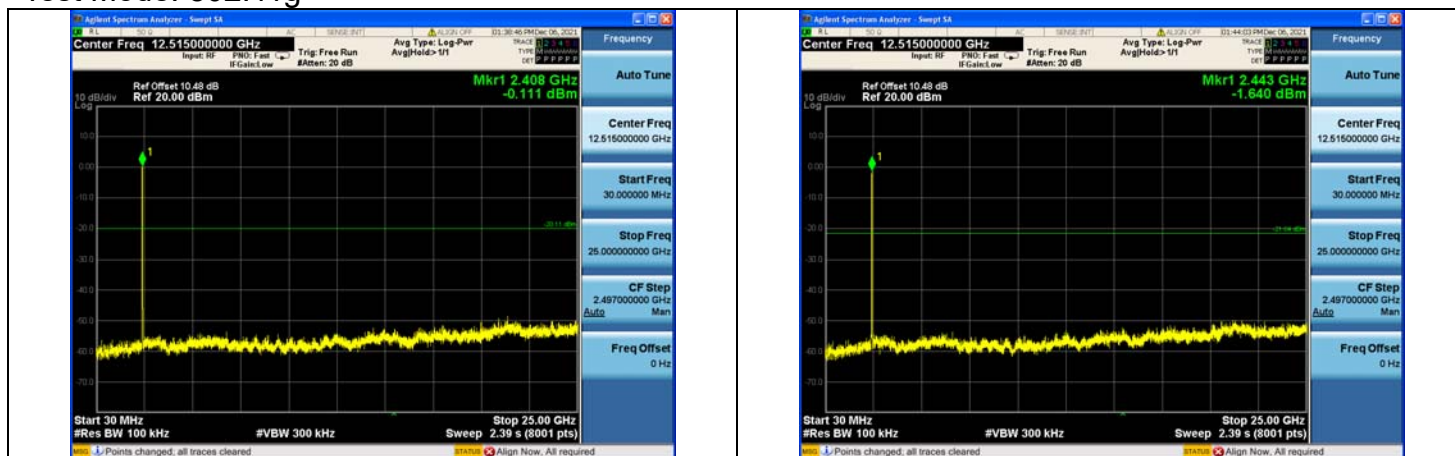


Test Mode:802.11g 2412MHz Chain0

Test Mode:802.11g 2437MHz Chain0

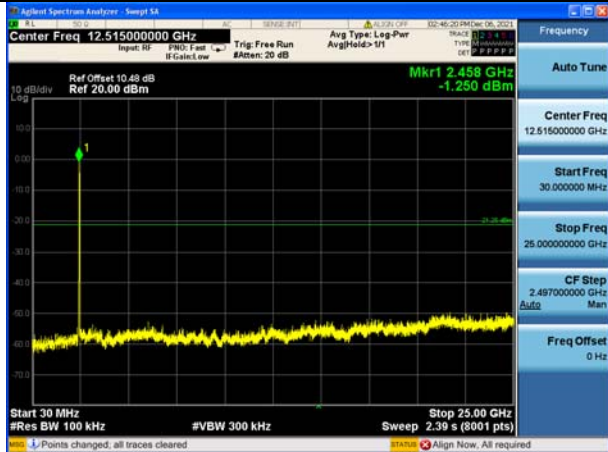


Test Mode:802.11g 2462MHz Chain0


Test Mode: 802.11n HT20

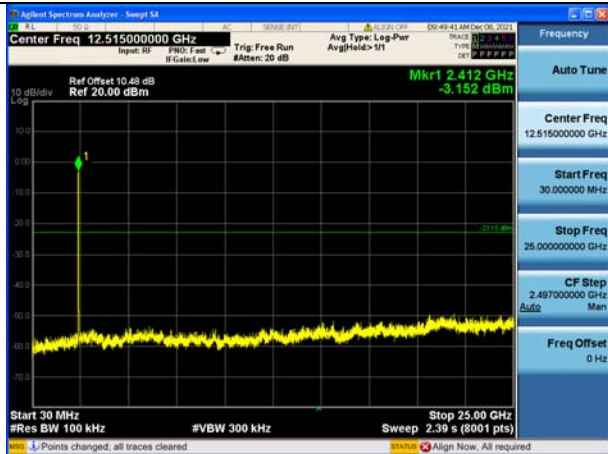

Test Mode:802.11n HT20 2412MHz Chain0

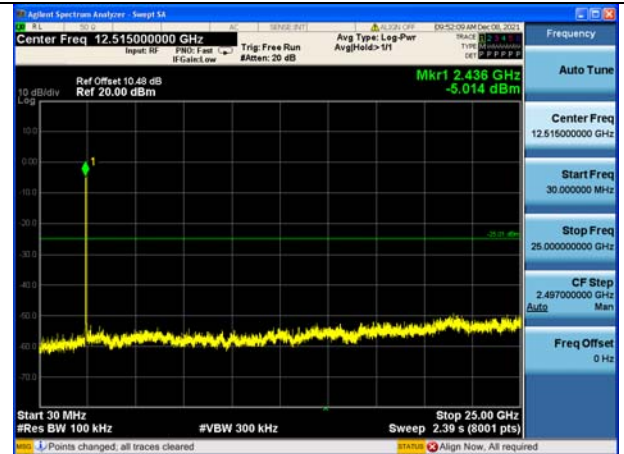

Test Mode:802.11n HT20 2437MHz Chain0

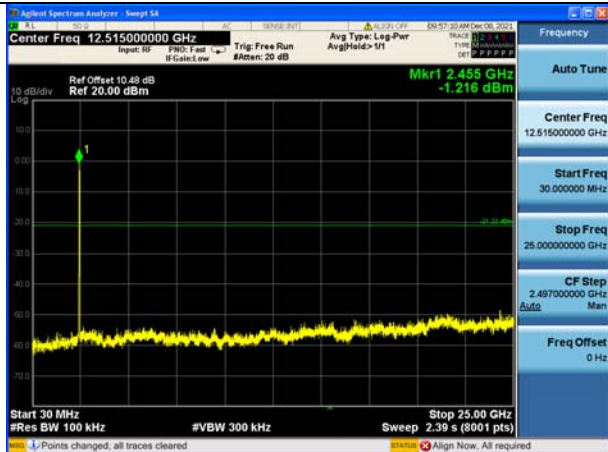

Test Mode:802.11n HT20 2462MHz Chain0

Band edge measurement

Test Mode: 802.11b




Test Mode:802.11b 2412MHz Chain0




Test Mode:802.11b 2462MHz Chain0

Test Mode: 802.11g

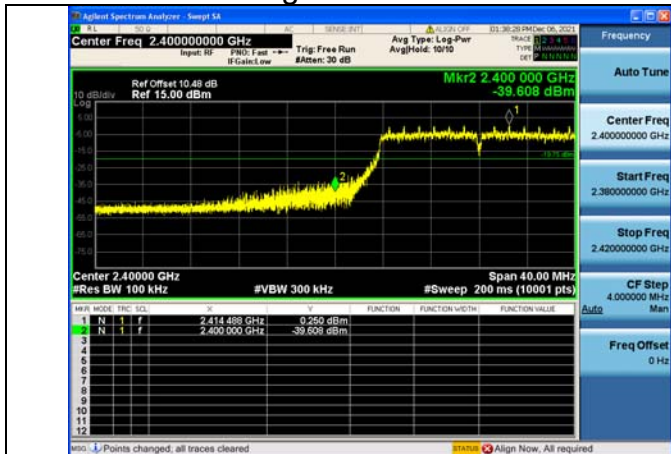


Test Mode:802.11g 2412MHz Chain0

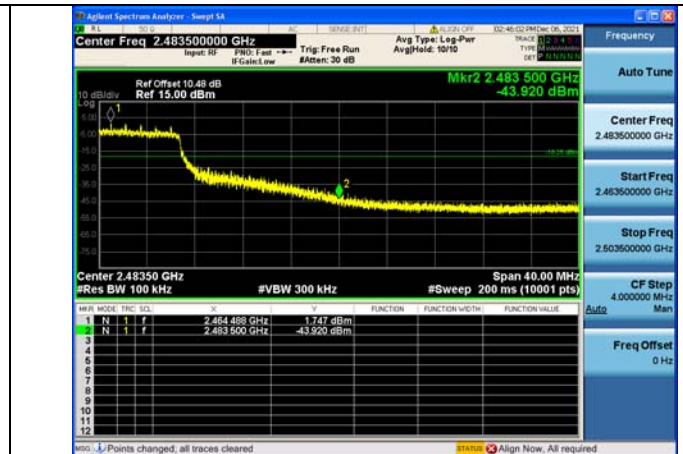


Test Mode:802.11g 2462MHz Chain0

Test Mode: 802.11n HT20

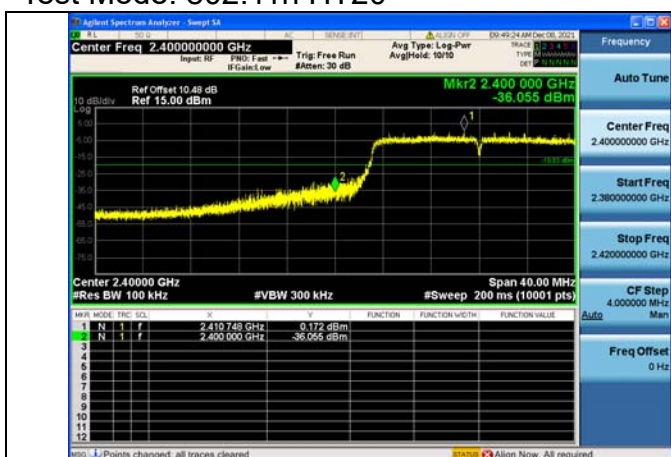

Test Mode:802.11n HT20 2412MHz Chain0

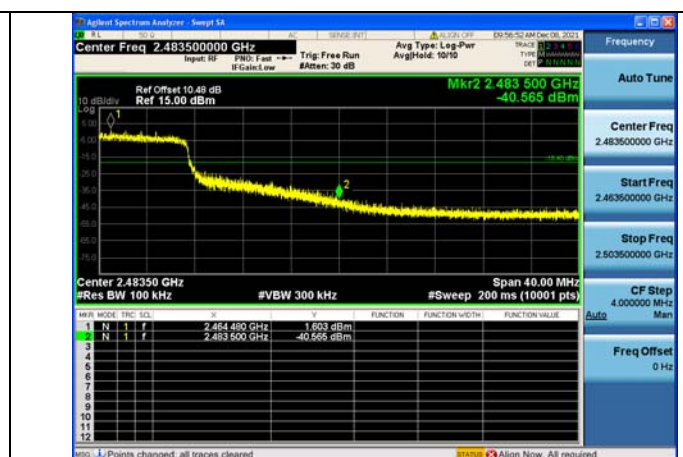

Test Mode:802.11n HT20 2462MHz Chain0

APPENDIX B – TEST DATA OF RADIATED EMISSION

Radiated Emission Band Edge

Pre-tests are needed at the presence of different data rate. Data rate below means worst-case rate of each test item. Worst-case data rates are shown as following table.

Test Mode	Data Rate
802.11b	1Mbps
802.11g	6Mbps
802.11n HT20	MCS0(6.5 Mbps)
802.11n HT40	MCS0(13.5 Mbps)

We chose the Worst-modes are shown as following table:

Test Mode	Chain	Note
802.11b	Chain0	---
802.11g	Chain0	---
802.11n HT20	Chain0+ Chain1	---
802.11n HT40	Chain0+ Chain1	---

The measurement results are obtained as described below:

Measure Level = Reading Level + cable loss + antenna factor

Sample calculation: (112.85 dBuV/m) = (78.85 dBμV) + (8.90 dB) + (25.10 dB/m), the corresponding frequency is 2412MHz.

The measurement results contain the correction factor of the duty cycle.

Carrier frequency (MHz): 2412

Channel No.:1

Test Mode: 802.11b

Polarity:Vertical

Detector: Peak

No	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	cable loss (dB)	antenna factor (dB/m)
1	2412	112.85	78.85	N/A	N/A	8.90	25.10
2	2390	45.75	11.75	-28.25	74.00	8.90	25.10

Carrier frequency (MHz): 2412

Channel No.:1

Test Mode: 802.11b

Polarity:Horizontal

Detector: Peak

No	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	cable loss (dB)	antenna factor (dB/m)
1	2412	110.00	76.00	N/A	N/A	8.90	25.10
2	2390	44.03	10.03	-29.97	74.00	8.90	25.10

Carrier frequency (MHz): 2412

Channel No.:1

Test Mode: 802.11b

Polarity:Vertical

Detector: Average

No	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	cable loss (dB)	antenna factor (dB/m)
1	2412	110.91	76.91	N/A	N/A	8.90	25.10
2	2390	35.06	1.06	-18.94	54.00	8.90	25.10

Carrier frequency (MHz): 2412

Channel No.:1

Test Mode: 802.11b

Polarity:Horizontal

Detector: Average

No	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	cable loss (dB)	antenna factor (dB/m)
1	2412	108.04	74.04	N/A	N/A	8.90	25.10
2	2390	33.80	-0.20	-20.20	54.00	8.90	25.10

Carrier frequency (MHz): 2462

Channel No.:11

Test Mode: 802.11b

Polarity:Vertical

Detector: Peak

No	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	cable loss (dB)	antenna factor (dB/m)
1	2462	112.49	78.49	N/A	N/A	8.90	25.10
2	2483.5	45.99	11.99	-28.01	74.00	8.90	25.10

Carrier frequency (MHz): 2462

Channel No.:11

Test Mode: 802.11b

Polarity:Horizontal

Detector: Peak

No	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	cable loss (dB)	antenna factor (dB/m)
1	2462	110.30	76.30	N/A	N/A	8.90	25.10
2	2483.5	43.02	9.02	-30.98	74.00	8.90	25.10

Carrier frequency (MHz): 2462

Channel No.:11

Test Mode: 802.11b

Polarity:Vertical

Detector: Average

No	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	cable loss (dB)	antenna factor (dB/m)
1	2462	109.54	75.54	N/A	N/A	8.90	25.10
2	2483.5	36.38	2.38	-17.62	54.00	8.90	25.10

Carrier frequency (MHz): 2462

Channel No.:11

Test Mode: 802.11b

Polarity:Horizontal

Detector: Average

No	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	cable loss (dB)	antenna factor (dB/m)
1	2462	106.62	72.62	N/A	N/A	8.90	25.10
2	2483.5	35.71	1.71	-18.29	54.00	8.90	25.10

Carrier frequency (MHz): 2412

Channel No.:1

Test Mode: 802.11g

Polarity: Vertical

Detector: Peak

No	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	cable loss (dB)	antenna factor (dB/m)
1	2412	112.41	78.41	N/A	N/A	8.90	25.10
2	2390	46.97	12.97	-27.03	74.00	8.90	25.10

Carrier frequency (MHz): 2412

Channel No.:1

Test Mode: 802.11g

Polarity:Horizontal

Detector: Peak

No	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	cable loss (dB)	antenna factor (dB/m)
1	2412	109.80	75.80	N/A	N/A	8.90	25.10
2	2390	45.22	11.22	-28.78	74.00	8.90	25.10

Carrier frequency (MHz): 2412

Channel No.:1

Test Mode: 802.11g

Polarity: Vertical

Detector: Average

No	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	cable loss (dB)	antenna factor (dB/m)
1	2412	110.38	76.38	N/A	N/A	8.90	25.10
2	2390	35.65	1.65	-18.35	54.00	8.90	25.10

Carrier frequency (MHz): 2412

Channel No.:1

Test Mode: 802.11g

Polarity:Horizontal

Detector: Average

No	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	cable loss (dB)	antenna factor (dB/m)
1	2412	110.38	76.38	N/A	N/A	8.90	25.10
2	2390	35.65	1.65	-18.35	54.00	8.90	25.10

1	2412	107.39	73.39	N/A	N/A	8.90	25.10
2	2390	34.70	0.70	-19.30	54.00	8.90	25.10

Carrier frequency (MHz): 2462

Channel No.:11

Test Mode: 802.11g

Polarity: Vertical

Detector: Peak

No	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	cable loss (dB)	antenna factor (dB/m)
1	2462	111.44	77.44	N/A	N/A	8.90	25.10
2	2483.5	46.36	12.36	-27.64	74.00	8.90	25.10

Carrier frequency (MHz): 2462

Channel No.:11

Test Mode: 802.11g

Polarity:Horizontal

Detector: Peak

No	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	cable loss (dB)	antenna factor (dB/m)
1	2462	108.72	74.72	N/A	N/A	8.90	25.10
2	2483.5	44.73	10.73	-29.27	74.00	8.90	25.10

Carrier frequency (MHz): 2462

Channel No.:11

Test Mode: 802.11g

Polarity: Vertical

Detector: Average

No	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	cable loss (dB)	antenna factor (dB/m)
1	2462	109.66	75.66	N/A	N/A	8.90	25.10
2	2483.5	36.26	2.26	-17.74	54.00	8.90	25.10

Carrier frequency (MHz): 2462

Channel No.:11

Test Mode: 802.11g

Polarity:Horizontal

Detector: Average

No	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	cable loss (dB)	antenna factor (dB/m)
1	2462	107.41	73.41	N/A	N/A	8.90	25.10
2	2483.5	35.15	1.15	-18.85	54.00	8.90	25.10

Carrier frequency (MHz): 2412

Channel No.:1

Test Mode: 802.11n(HT20)

Polarity: Vertical

Detector: Peak

No	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	cable loss (dB)	antenna factor (dB/m)
1	2412	112.58	78.58	N/A	N/A	8.90	25.10
2	2390	46.53	12.53	-27.47	74.00	8.90	25.10

Carrier frequency (MHz): 2412

Channel No.:1

Test Mode: 802.11n(HT20)

Polarity:Horizontal

Detector: Peak

No	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	cable loss (dB)	antenna factor (dB/m)
1	2412	110.38	76.38	N/A	N/A	8.90	25.10
2	2390	45.34	11.34	-28.66	74.00	8.90	25.10

Carrier frequency (MHz): 2412

Channel No.:1

Test Mode: 802.11n(HT20)

Polarity: Vertical

Detector: Average

No	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	cable loss (dB)	antenna factor (dB/m)
1	2412	110.25	76.25	N/A	N/A	8.90	25.10
2	2390	36.63	2.63	-17.37	54.00	8.90	25.10

Carrier frequency (MHz): 2412

Channel No.:1

Test Mode: 802.11n(HT20)

Polarity:Horizontal

Detector: Average

No	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	cable loss (dB)	antenna factor (dB/m)
1	2412	107.94	73.94	N/A	N/A	8.90	25.10
2	2390	35.94	1.94	-18.06	54.00	8.90	25.10

Carrier frequency (MHz): 2462

Channel No.:11

Test Mode: 802.11n(HT20)

Polarity: Vertical

Detector: Peak

No	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	cable loss (dB)	antenna factor (dB/m)
1	2462	111.79	77.79	N/A	N/A	8.90	25.10
2	2483.5	45.24	11.24	-28.76	74.00	8.90	25.10

Carrier frequency (MHz): 2462

Channel No.:11

Test Mode: 802.11n(HT20)

Polarity:Horizontal

Detector: Peak

No	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	cable loss (dB)	antenna factor (dB/m)
1	2462	109.42	75.42	N/A	N/A	8.90	25.10
2	2483.5	42.30	8.30	-31.70	74.00	8.90	25.10

Carrier frequency (MHz): 2462

Channel No.:11

Test Mode: 802.11n(HT20)

Polarity: Vertical

Detector: Average

No	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	cable loss (dB)	antenna factor (dB/m)
1	2462	110.72	76.72	N/A	N/A	8.90	25.10
2	2483.5	35.78	1.78	-18.22	54.00	8.90	25.10

Carrier frequency (MHz): 2462

Channel No.:11


Test Mode: 802.11n(HT20)

Polarity:Horizontal

Detector: Average

No	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	cable loss (dB)	antenna factor (dB/m)
1	2462	107.83	73.83	N/A	N/A	8.90	25.10
2	2483.5	35.14	1.14	-18.86	54.00	8.90	25.10

Full Spectrum

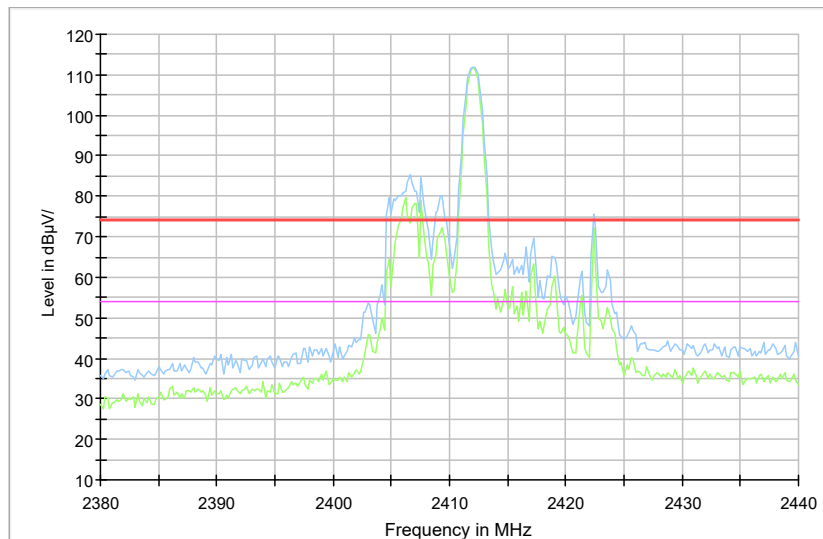

Comment

Radiated Emission Band Edge for 2412MHz

Sample Calculations

Determining Spurious Emissions Levels

A “reference path loss” is established and the A_{Rpl} is the attenuation of “reference path loss”, and including the gain of receive antenna, the gain of the preamplifier, the cable loss.

The measurement results are obtained as described below:

$$\text{Result} = P_{\text{mea}} + A_{Rpl}$$

Sample calculation: $(21.19 \text{ dB}\mu\text{V/m}) = (42.29 \text{ dB}\mu\text{V}) + (-21.1 \text{ dB/m})$, the corresponding frequency is 30.533500MHz.

The worst case attitude: The mobile lay down.

For 802.11b Channel No.:1

Frequency(MHz)	Result(dBuV/m)	ARpl (dB/m)	Pmea (dBuV)	Polarity	Limit (dBuV/m)
30.533500	21.19	-21.1	42.29	Vertical	40.00
52.358500	13.18	-17.8	30.98	Vertical	40.00
59.003000	23.97	-18.7	42.67	Vertical	40.00
86.066000	15.61	-22.5	38.11	Vertical	40.00
97.415000	13.75	-19.6	33.35	Vertical	43.50
918.083500	18.70	-3.0	21.70	Vertical	46.00

For 802.11g Channel No.:1

Frequency(MHz)	Result(dBuV/m)	ARpl (dB/m)	Pmea (dBuV)	Polarity	Limit (dBuV/m)
30.436500	21.66	-21.1	42.76	Vertical	40.00
40.864000	13.93	-18.4	32.33	Vertical	40.00
59.391000	23.28	-18.8	42.08	Vertical	40.00
87.327000	15.19	-22.1	37.29	Vertical	40.00
705.168500	14.34	-7.0	21.34	Vertical	46.00
951.160500	19.03	-2.7	21.73	Vertical	46.00

For 802.11n(HT20) Channel No.:1

Frequency(MHz)	Result(dBuV/m)	ARpl (dB/m)	Pmea (dBuV)	Polarity	Limit (dBuV/m)
30.000000	23.16	-21.3	44.46	Vertical	40.00
41.009500	13.77	-18.4	32.17	Vertical	40.00
59.536500	23.42	-18.8	42.22	Vertical	40.00
86.696500	15.16	-22.3	37.46	Vertical	40.00
97.657500	13.09	-19.6	32.69	Vertical	43.50
913.864000	18.69	-3.1	21.79	Vertical	46.00

For 802.11b Channel No.:6

Frequency(MHz)	Result(dBuV/m)	ARpl	Pmea	Polarity	Limit
----------------	----------------	------	------	----------	-------

		(dB/m)	(dBuV)		(dBuV/m)
30.679000	20.19	-21.1	41.29	Vertical	40.00
52.940500	13.04	-17.9	30.94	Vertical	40.00
59.730500	23.43	-18.8	42.23	Vertical	40.00
85.872000	15.47	-22.6	38.07	Vertical	40.00
97.124000	13.66	-19.7	33.36	Vertical	43.50
921.430000	18.72	-3.0	21.72	Vertical	46.00

For 802.11g Channel No.:6

Frequency(MHz)	Result(dBuV/m)	ARpl (dB/m)	Pmea (dBuV)	Polarity	Limit (dBuV/m)
30.339500	21.61	-21.2	42.81	Vertical	40.00
52.795000	13.19	-17.9	31.09	Vertical	40.00
59.488000	23.47	-18.8	42.27	Vertical	40.00
86.454000	15.17	-22.4	37.57	Vertical	40.00
97.851500	14.11	-19.5	33.61	Vertical	43.50
941.751500	19.17	-2.8	21.97	Vertical	46.00

For 802.11n(HT20) Channel No.:6

Frequency(MHz)	Result(dBuV/m)	ARpl (dB/m)	Pmea (dBuV)	Polarity	Limit (dBuV/m)
30.291000	21.56	-21.2	42.76	Vertical	40.00
52.552500	13.02	-17.9	30.92	Vertical	40.00
58.954500	23.25	-18.7	41.95	Vertical	40.00
86.163000	15.74	-22.5	38.24	Vertical	40.00
96.736000	14.37	-19.8	34.17	Vertical	43.50
918.471500	18.71	-3.0	21.71	Vertical	46.00

For 802.11b Channel No.:11

Frequency(MHz)	Result(dBuV/m)	ARpl (dB/m)	Pmea (dBuV)	Polarity	Limit (dBuV/m)
30.485000	20.65	-21.1	41.75	Vertical	40.00
40.573000	14.05	-18.4	32.45	Vertical	40.00
59.245500	23.51	-18.7	42.21	Vertical	40.00
86.211500	15.91	-22.5	38.41	Vertical	40.00
96.590500	13.21	-19.8	33.01	Vertical	43.50
927.929000	19.07	-2.9	21.97	Vertical	46.00

For 802.11g Channel No.:11


Frequency(MHz)	Result(dBuV/m)	ARpl (dB/m)	Pmea (dBuV)	Polarity	Limit (dBuV/m)
30.000000	22.83	-21.3	44.13	Vertical	40.00
40.961000	13.78	-18.4	32.18	Vertical	40.00
59.294000	23.50	-18.7	42.20	Vertical	40.00

84.999000	14.90	-22.9	37.80	Vertical	40.00
730.000500	14.91	-6.1	21.01	Vertical	46.00
939.472000	19.24	-2.8	22.04	Vertical	46.00

For 802.11n(HT20) Channel No.:11


Frequency(MHz)	Result(dBuV/m)	ARpl (dB/m)	Pmea (dBuV)	Polarity	Limit (dBuV/m)
30.533500	20.53	-21.1	41.63	Vertical	40.00
40.718500	13.93	-18.4	32.33	Vertical	40.00
59.391000	23.56	-18.8	42.36	Vertical	40.00
86.211500	15.87	-22.5	38.37	Vertical	40.00
161.338000	13.75	-22.0	35.75	Vertical	43.50
942.188000	19.19	-2.8	21.99	Vertical	46.00

Carrier frequency (MHz): 2412
Channel No.:1

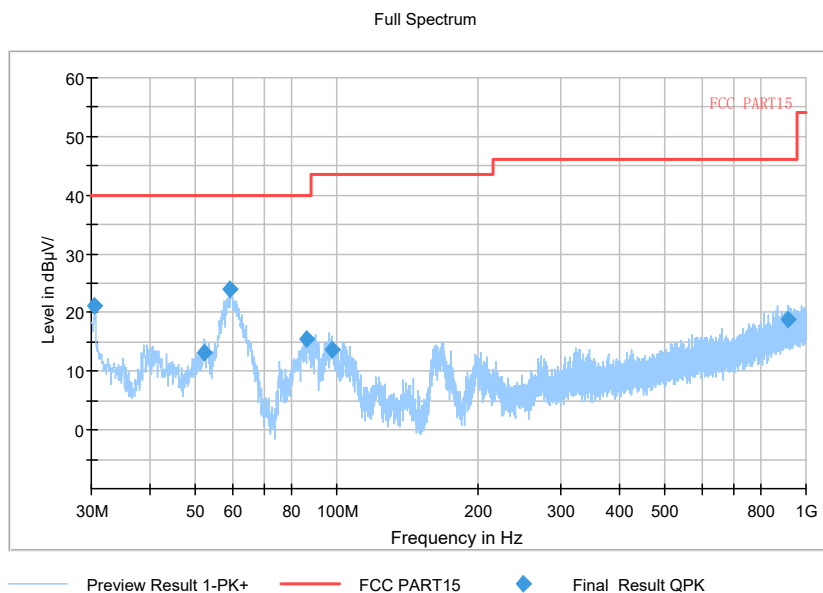

Comment


Frequency Range: 30MHz -1GHz
Detector: QP mode
Test Mode: 802.11b

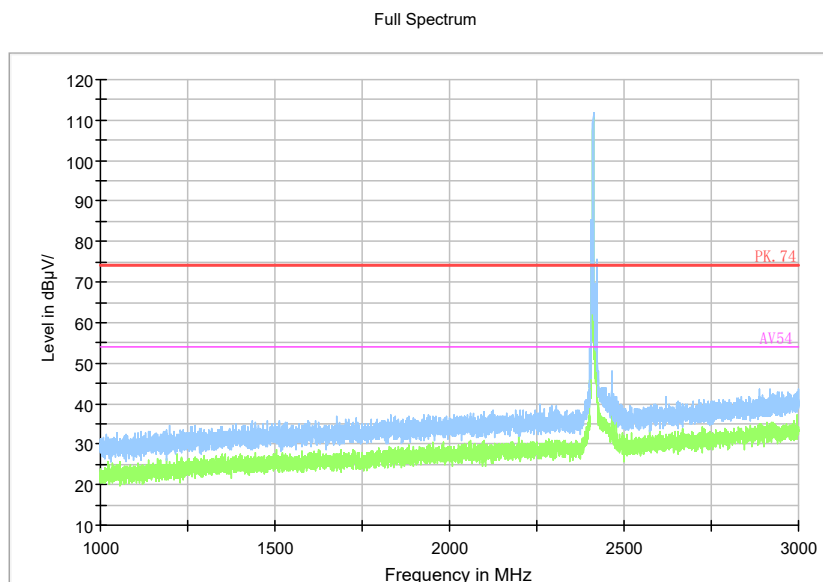

Comment

Frequency Range: 1GHz -3GHz
Detector: Av mode and PK mode
Modulation type: 802.11b


Full Spectrum

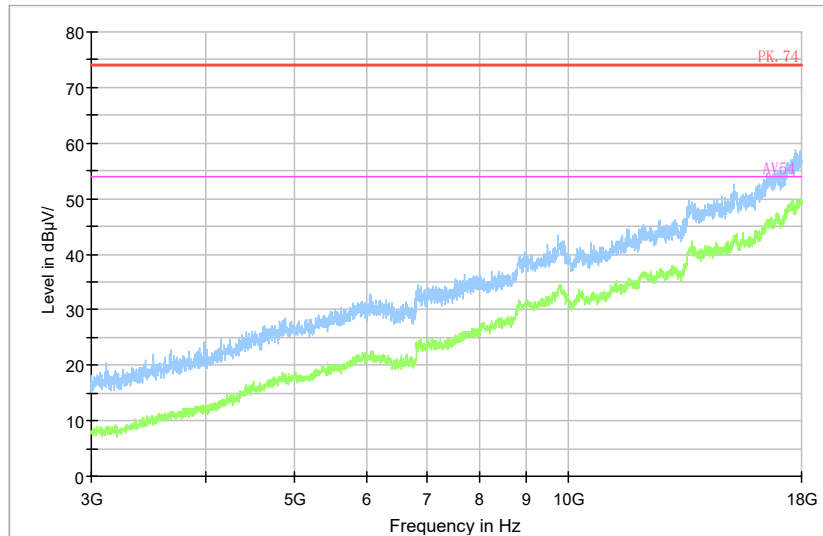

Comment

Frequency Range: 3GHz -18GHz
Detector: Av mode and PK mode
Modulation type: 802.11b

Full Spectrum

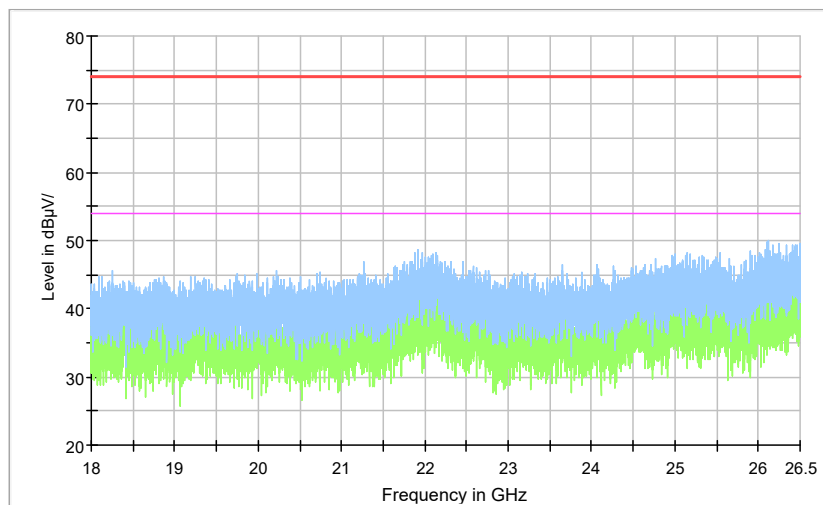


Preview Result 2-AVG Preview Result 1-PK+ PK70-74 AV50-54

Comment

Frequency Range: 18GHz -26GHz
Detector: Av mode and PK mode
Modulation type: 802.11b


Full Spectrum

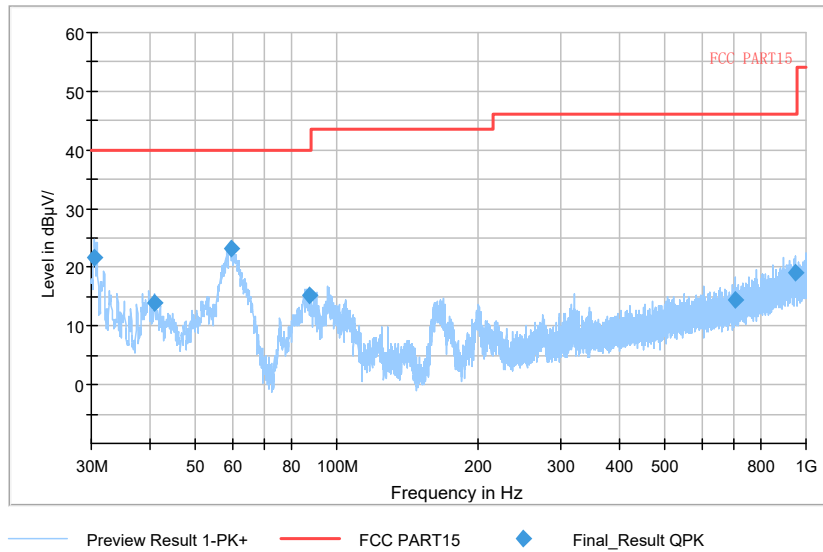

Comment

Frequency Range: 30MHz -1GHz
Detector: QP mode
Modulation type: 802.11g


Full Spectrum

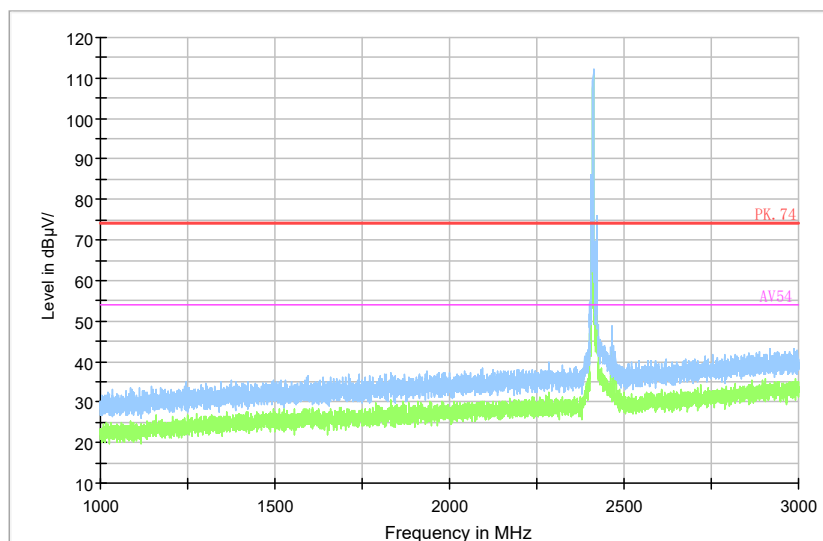

Comment

Frequency Range: 1GHz -3GHz
Detector: Av mode and PK mode
Modulation type: 802.11g


Full Spectrum

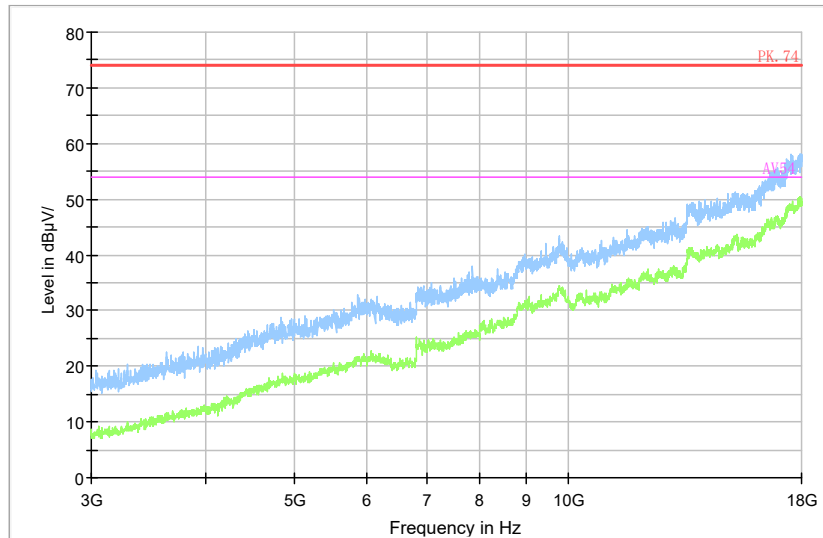

Comment

Frequency Range: 3GHz -18GHz
Detector: Av mode and PK mode
Modulation type: 802.11g

Full Spectrum

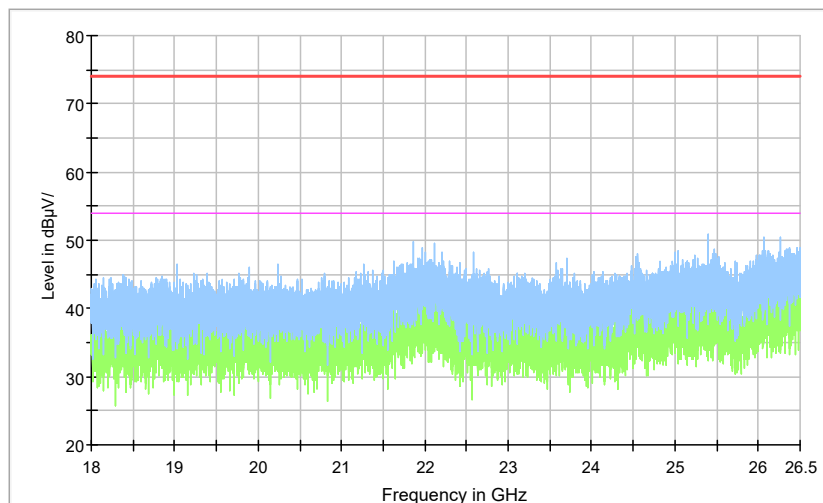


Preview Result 2-AVG Preview Result 1-PK+ PK70-74 AV50-54

Comment

Frequency Range: 18GHz -26GHz
Detector: Av mode and PK mode
Modulation type: 802.11g


Full Spectrum

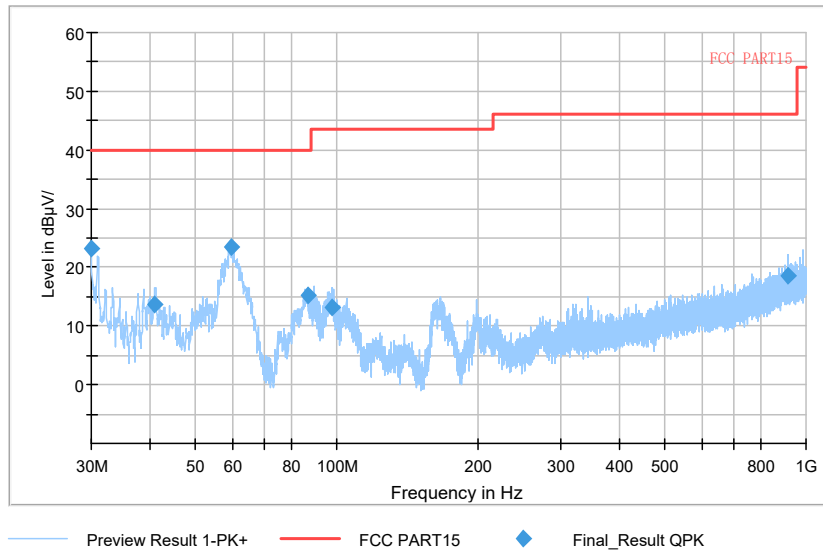

Comment

Frequency Range: 30MHz -1GHz
Detector: QP mode
Test Mode: 802.11n(HT20)


Full Spectrum

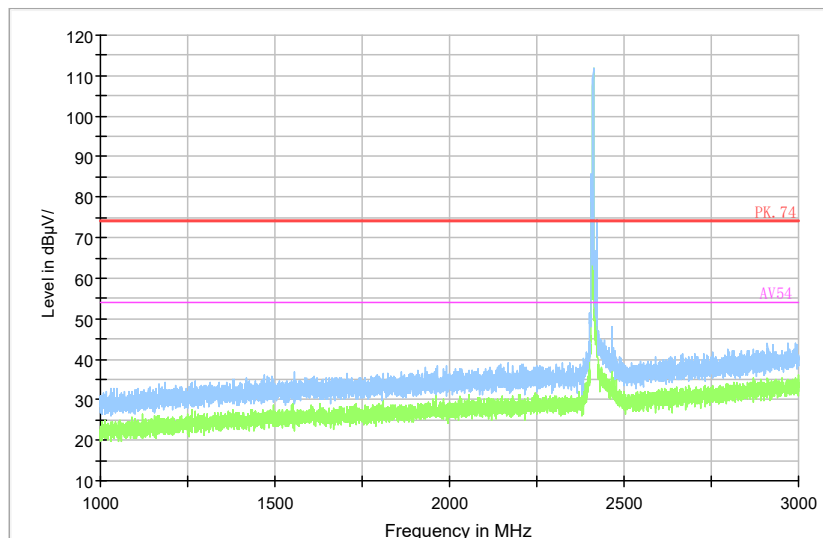

Comment

Frequency Range: 1GHz -3GHz
Detector: Av mode and PK mode
Modulation type: 802.11n(HT20)


Full Spectrum

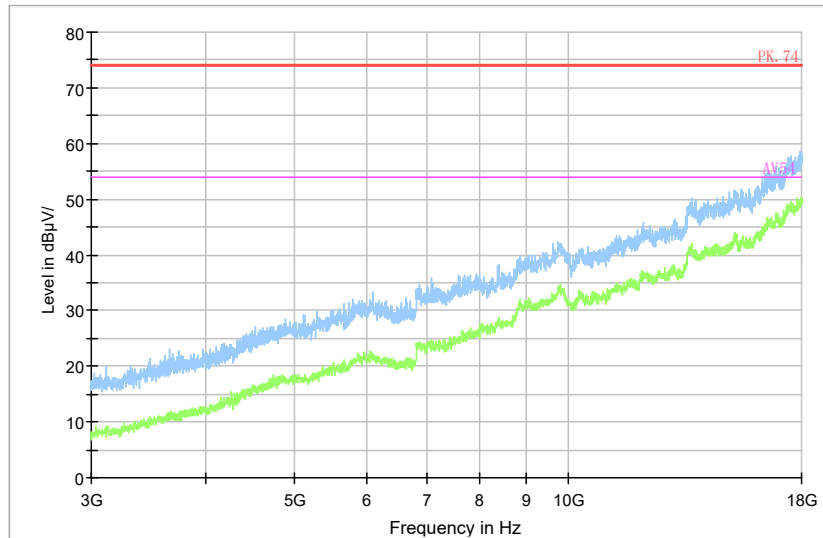

Comment

Frequency Range: 3GHz -18GHz
Detector: Av mode and PK mode
Modulation type: 802.11n(HT20)

Full Spectrum

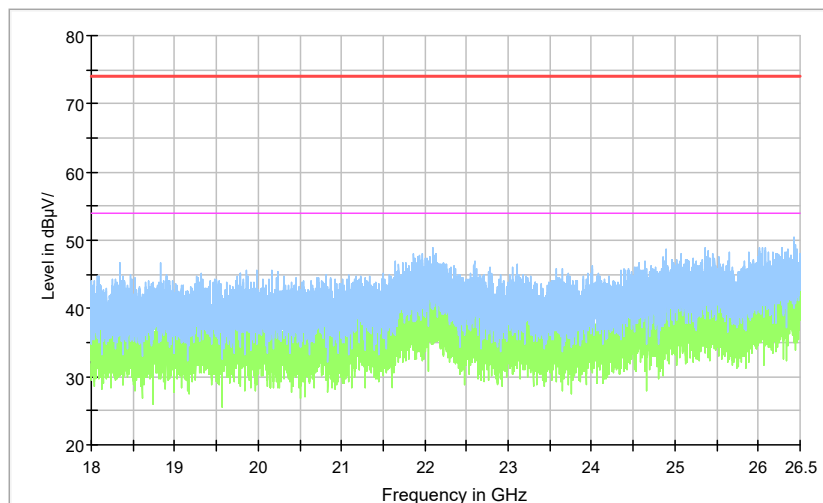


Preview Result 2-AVG Preview Result 1-PK+ PK70-74 AV50-54

Comment

Frequency Range: 18GHz -26GHz
Detector: Av mode and PK mode
Modulation type: 802.11n(HT20)

Carrier frequency (MHz): 2437
Channel No.:6

Full Spectrum

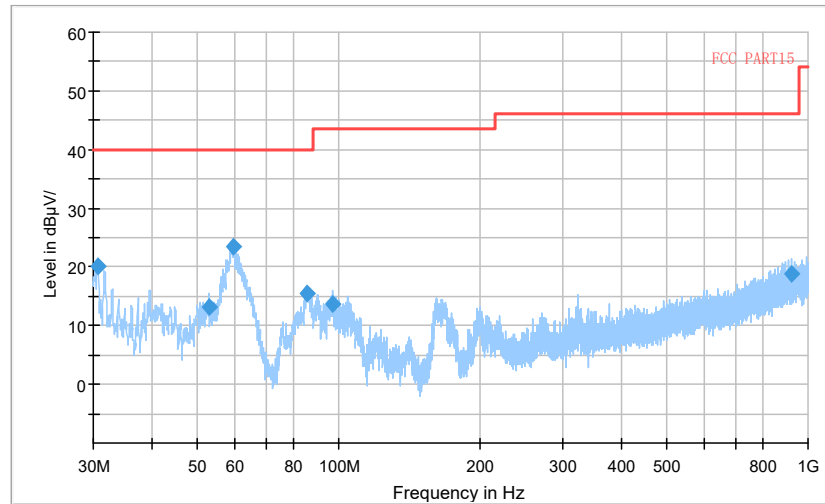


— Preview Result 1-PK+ — FCC PART15 ◆ Final_Result QPK

Comment

Frequency Range: 30MHz -1GHz
Detector: QP mode
Test Mode: 802.11b


Full Spectrum

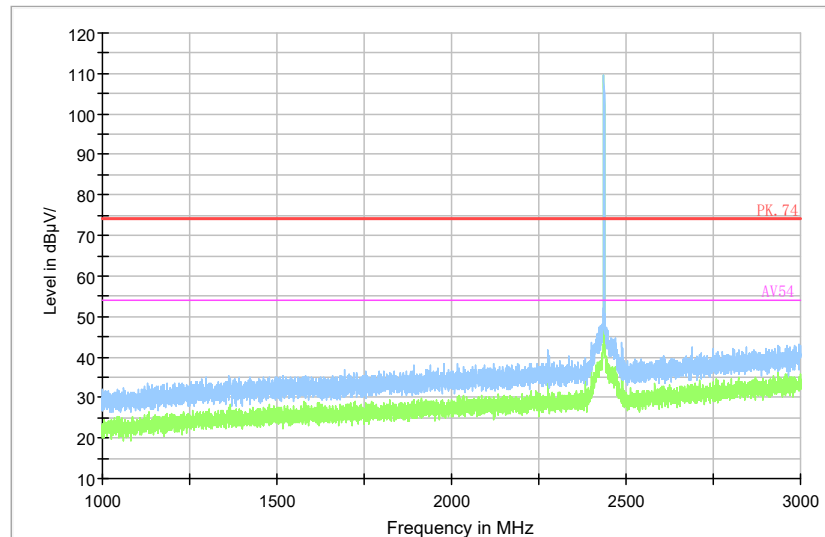

Comment

Frequency Range: 1GHz -3GHz
Detector: Av mode and PK mode
Modulation type: 802.11b


Full Spectrum

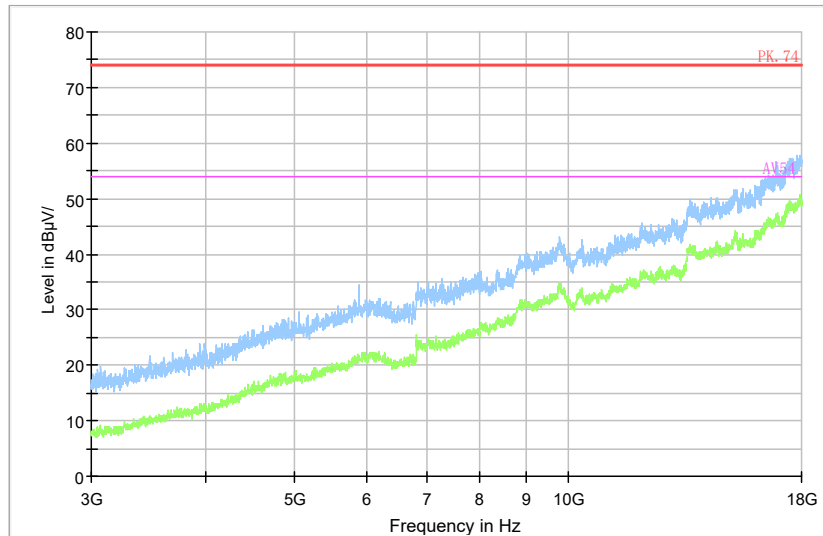

Comment

Frequency Range: 3GHz -18GHz
Detector: Av mode and PK mode
Modulation type: 802.11b

Full Spectrum

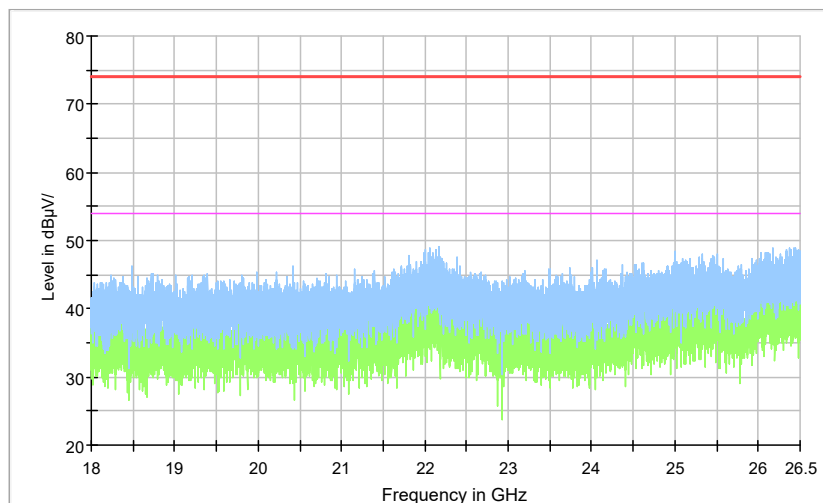


Preview Result 2-AVG Preview Result 1-PK+ PK70-74 AV50-54

Comment

Frequency Range: 18GHz -26GHz
Detector: Av mode and PK mode
Modulation type: 802.11b


Full Spectrum

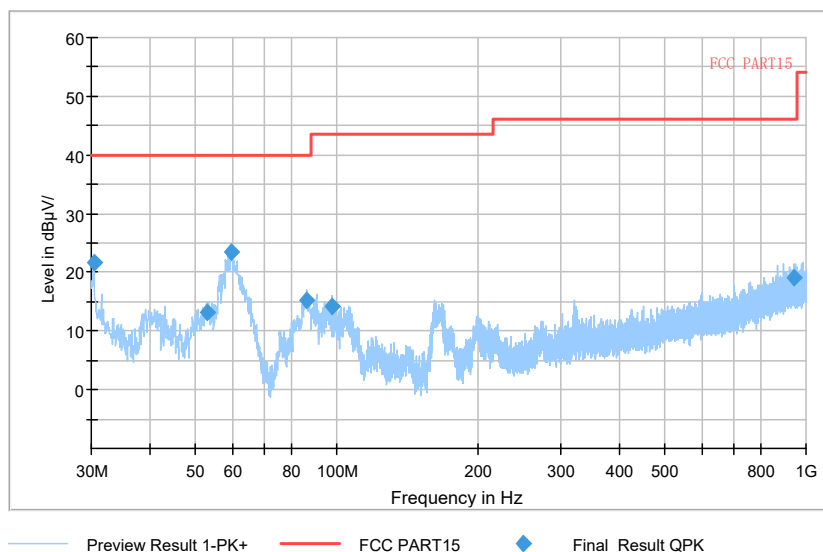

Comment

Frequency Range: 30MHz -1GHz
Detector: QP mode
Modulation type: 802.11g


Full Spectrum

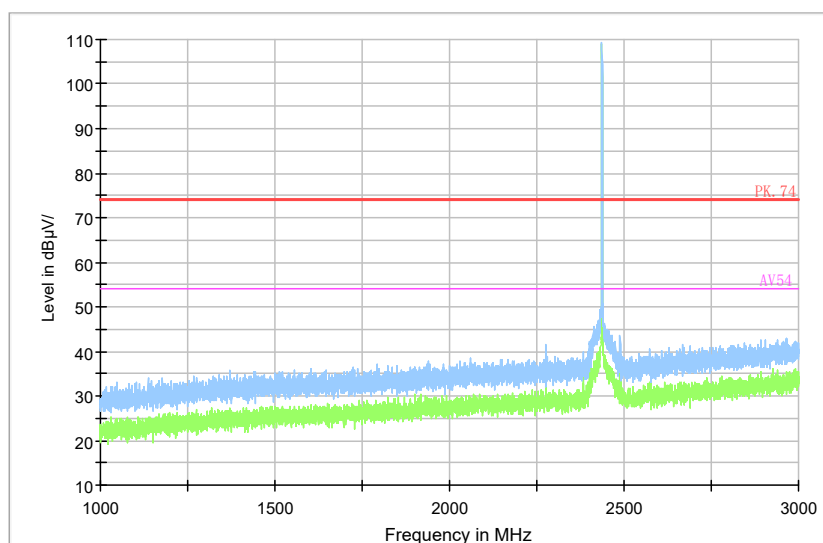

Comment

Frequency Range: 1GHz -3GHz
Detector: Av mode and PK mode
Modulation type: 802.11g


Full Spectrum

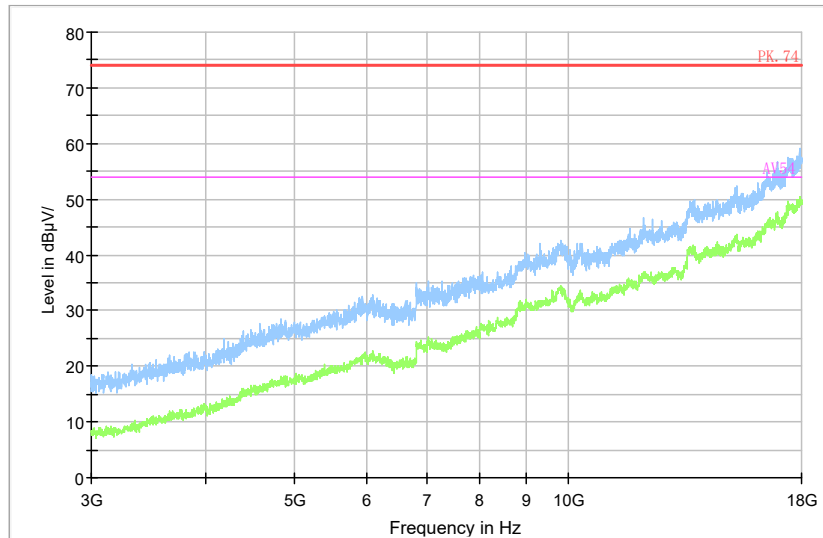

Comment

Frequency Range: 3GHz -18GHz
Detector: Av mode and PK mode
Modulation type: 802.11g

Full Spectrum

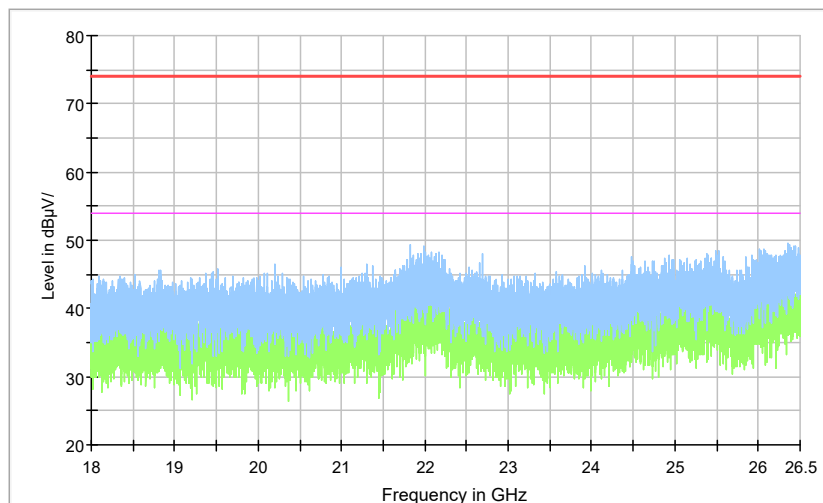


Preview Result 2-AVG Preview Result 1-PK+ PK70-74 AV50-54

Comment

Frequency Range: 18GHz -26GHz
Detector: Av mode and PK mode
Modulation type: 802.11g

Full Spectrum

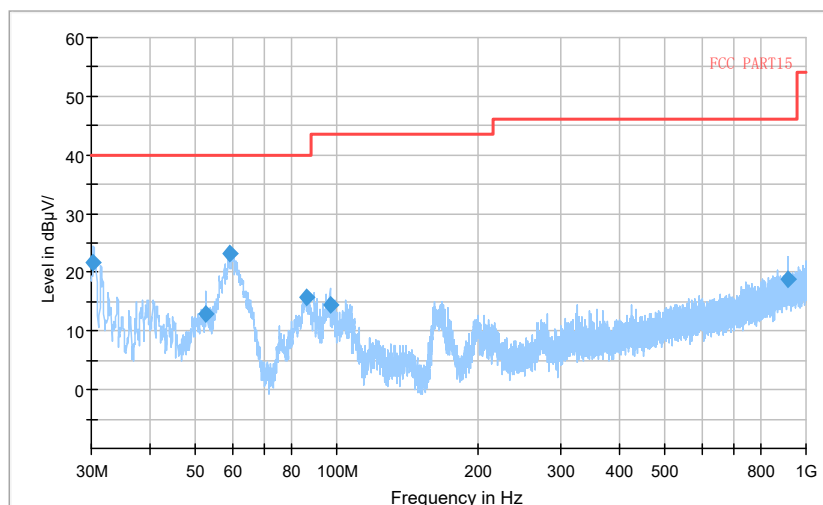

Preview Result 1-PK+ FCC PART15 Final_Result QPK


Comment

Frequency Range: 30MHz -1GHz

Detector: QP mode

Test Mode: 802.11n(HT20)

Full Spectrum

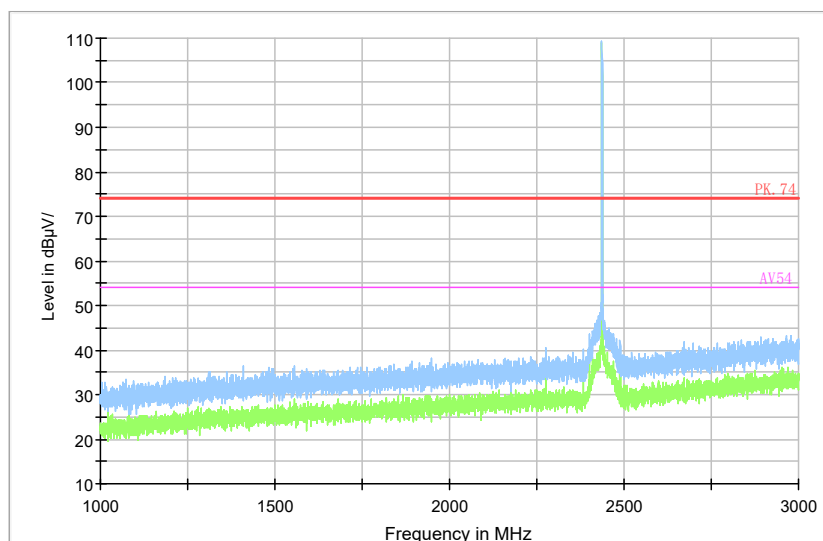


Comment

Frequency Range: 1GHz -3GHz

Detector: Av mode and PK mode

Modulation type: 802.11n(HT20)


Full Spectrum

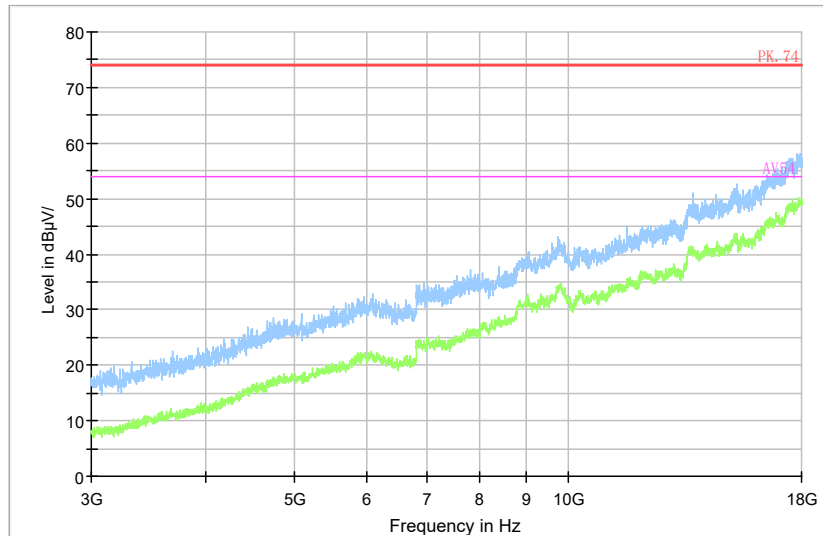

Comment

Frequency Range: 3GHz -18GHz
Detector: Av mode and PK mode
Modulation type: 802.11n(HT20)

Full Spectrum

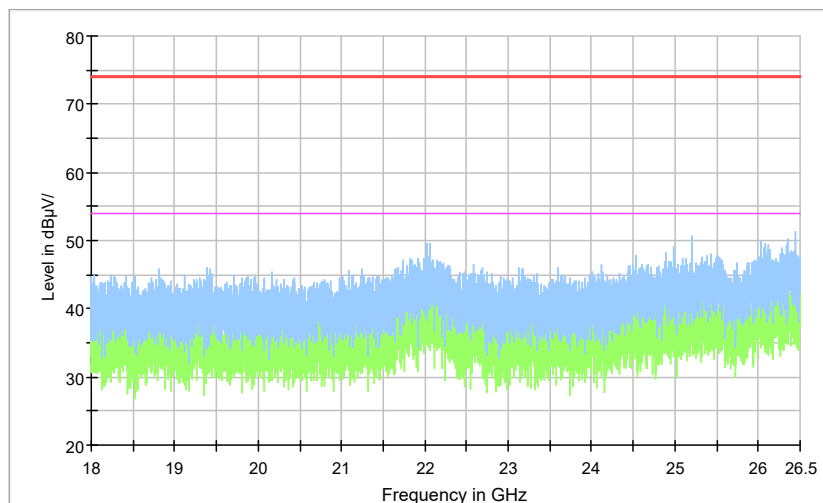


Preview Result 2-AVG Preview Result 1-PK+ PK70-74 AV50-54


Comment

Frequency Range: 18GHz -26GHz
Detector: Av mode and PK mode
Modulation type: 802.11n(HT20)

Carrier frequency (MHz): 2462
Channel No.:11

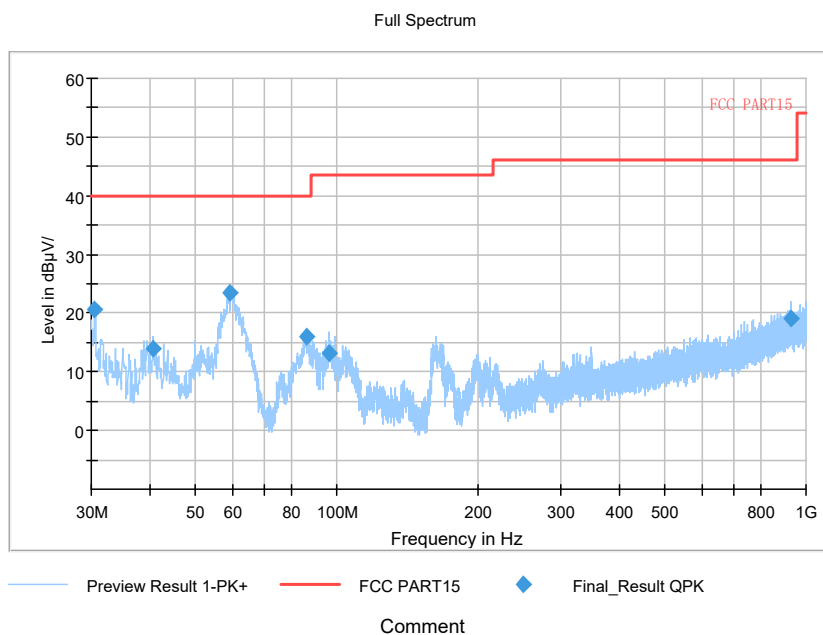


Frequency Range: 30MHz -1GHz
Detector: QP mode
Test Mode: 802.11b

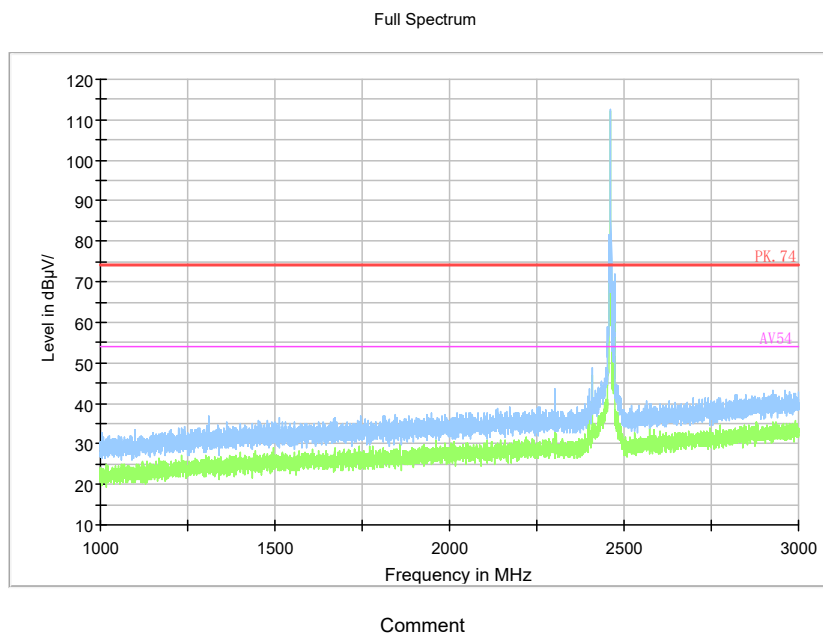

Frequency Range: 1GHz -3GHz
Detector: Av mode and PK mode
Modulation type: 802.11b


Full Spectrum

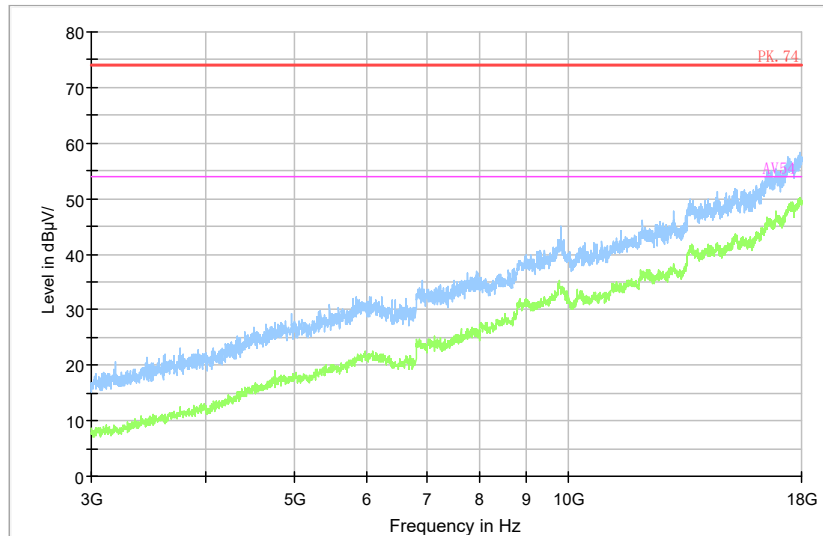

Comment

Frequency Range: 3GHz -18GHz
Detector: Av mode and PK mode
Modulation type: 802.11b

Full Spectrum

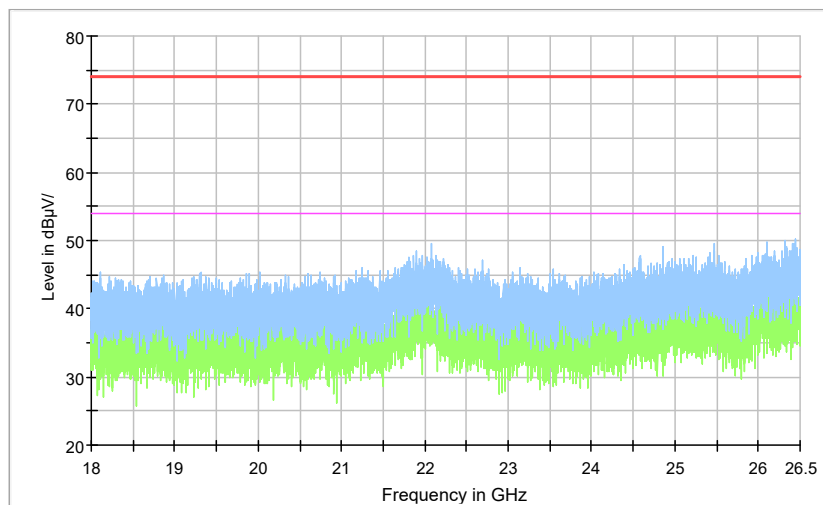


Preview Result 2-AVG Preview Result 1-PK+ PK70-74 AV50-54

Comment

Frequency Range: 18GHz -26GHz
Detector: Av mode and PK mode
Modulation type: 802.11b


Full Spectrum

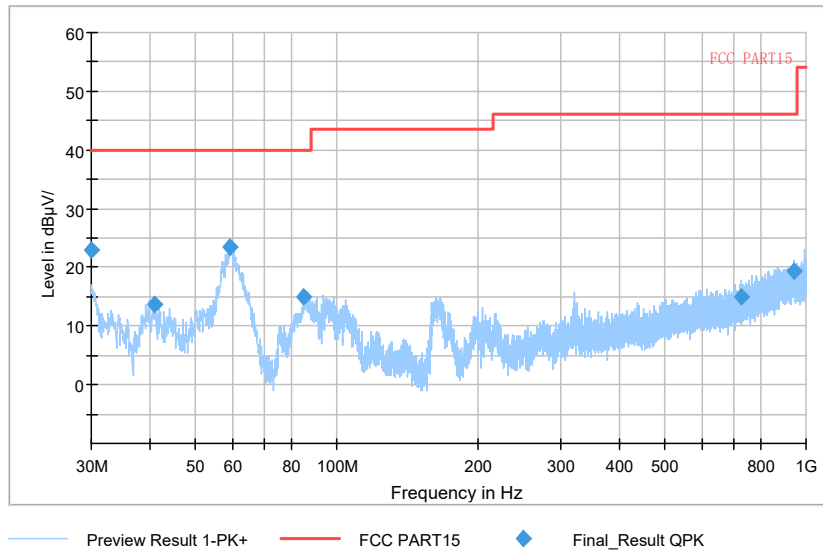

Comment

Frequency Range: 30MHz -1GHz
Detector: QP mode
Modulation type: 802.11g


Full Spectrum

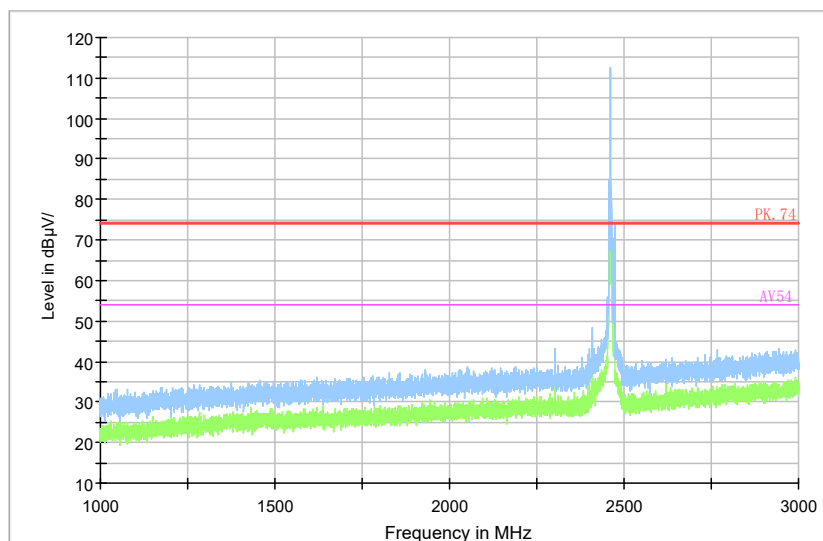

Comment

Frequency Range: 1GHz -3GHz
Detector: Av mode and PK mode
Modulation type: 802.11g


Full Spectrum

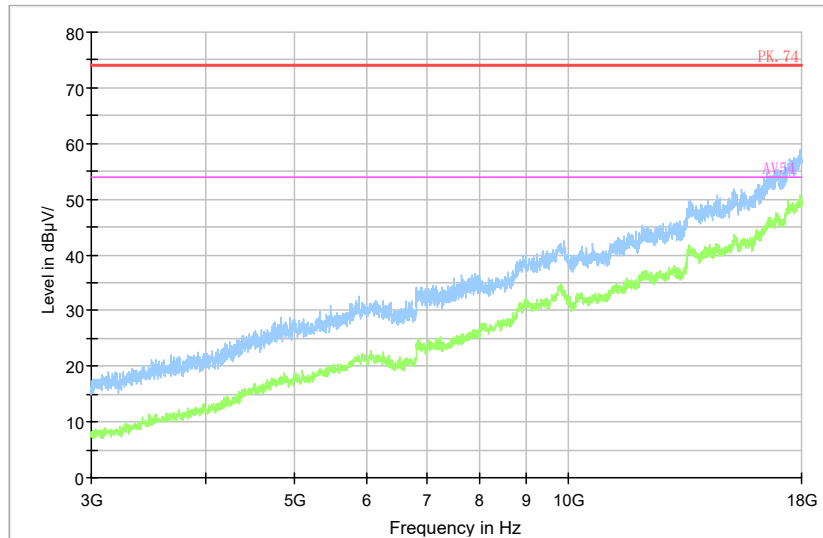

Comment

Frequency Range: 3GHz -18GHz
Detector: Av mode and PK mode
Modulation type: 802.11g

Full Spectrum

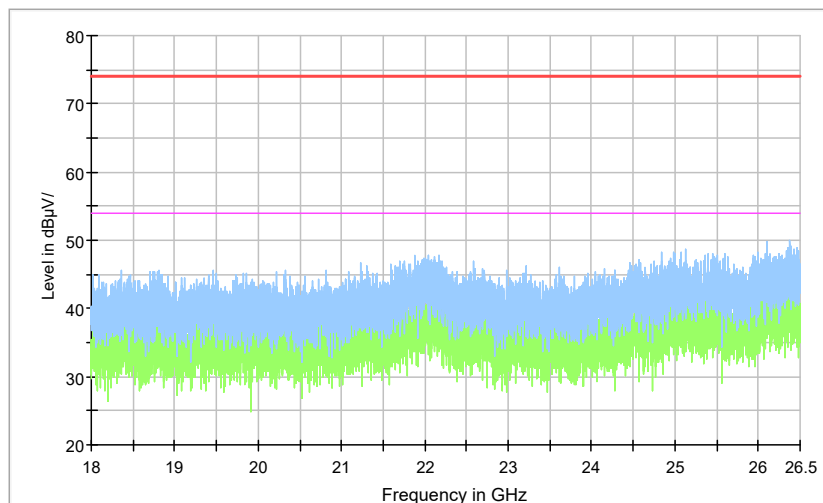


Preview Result 2-AVG Preview Result 1-PK+ PK70-74 AV50-54

Comment

Frequency Range: 18GHz -26GHz
Detector: Av mode and PK mode
Modulation type: 802.11g


Full Spectrum

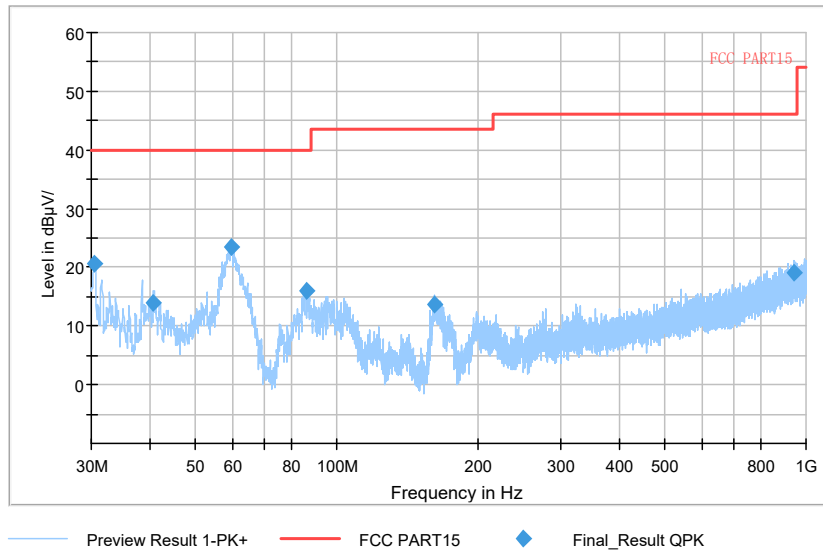

Comment

Frequency Range: 30MHz -1GHz
Detector: QP mode
Test Mode: 802.11n(HT20)


Full Spectrum

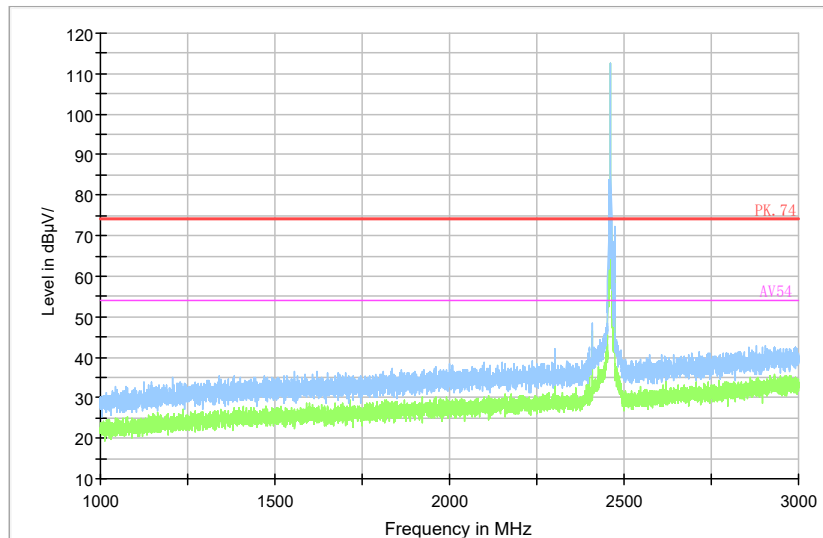

Comment

Frequency Range: 1GHz -3GHz
Detector: Av mode and PK mode
Modulation type: 802.11n(HT20)


Full Spectrum

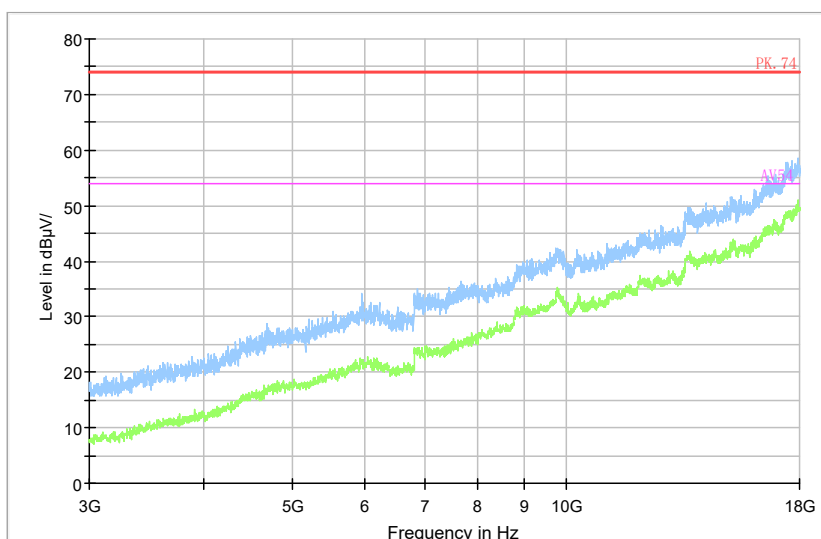

Comment

Frequency Range: 3GHz -18GHz
Detector: Av mode and PK mode
Modulation type: 802.11n(HT20)

Full Spectrum

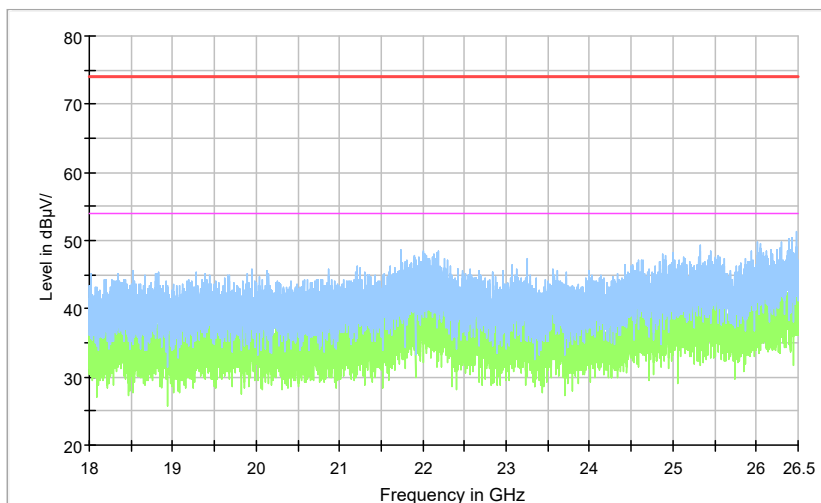

Preview Result 2-AVG Preview Result 1-PK+ PK70-74 AV50-54

Comment

Frequency Range: 18GHz -26GHz
Detector: Av mode and PK mode
Modulation type: 802.11n(HT20)


AC Power line Conducted Emission

A "reference path loss" Corr.(dB) is established and the $L_{\text{cable}} + \text{ATT} + \text{VDF}$ is the attenuation of "reference path loss", and including the cable loss, the attenuation of the attenuator, the voltage division factor of AMN.

The measurement results are obtained as described below:

$$P_{\text{result}} = P_{\text{mea}} + \text{Corr. (dB)}$$

Sample calculation: $(30.86 \text{ dB}\mu\text{V}) = (1.26 \text{ dB}\mu\text{V}) + (29.6 \text{ dB})$, the corresponding frequency is 0.329100MHz.

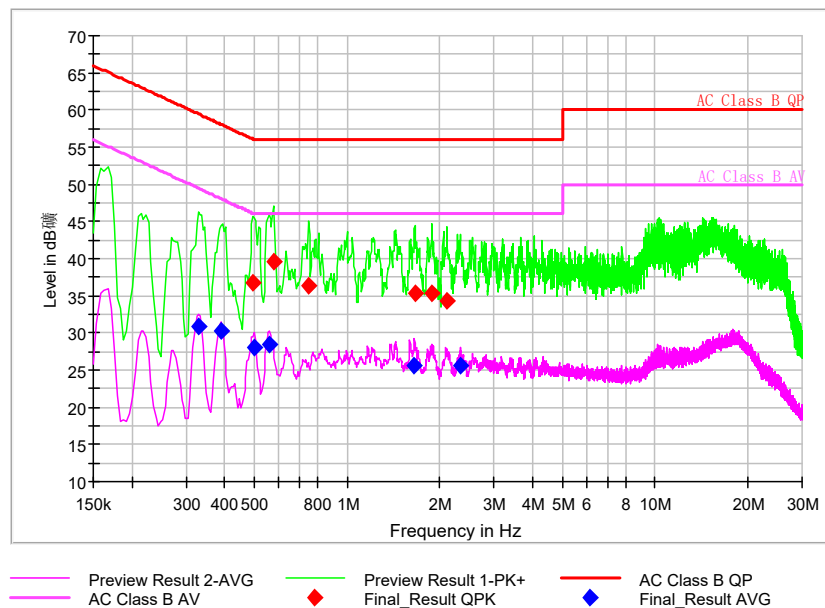

Comment

L+N Line

MEASUREMENT RESULT:

Frequency (MHz)	QuasiPeak (dBμV)	Average (dBμV)	Limit (dBμV)	Margin (dB)	Line	Corr (dB)	Pmea Quasi Peak (dBμV)	Pmea Average (dBμV)
0.329100	---	30.86	49.47	18.62	L1	29.6	---	1.26
0.388800	---	30.25	48.09	17.84	L1	29.6	---	0.65
0.495407	36.77	---	56.08	19.31	L1	29.6	7.17	---
0.499671	---	28.04	46.01	17.97	N	29.6	---	-1.56
0.559371	---	28.45	46.00	17.55	N	29.6	---	-1.15
0.576429	39.60	---	56.00	16.40	L1	29.6	10	---
0.751264	36.32	---	56.00	19.68	L1	29.6	6.72	---
1.655293	---	25.67	46.00	20.33	L1	29.7	---	-4.03
1.659557	35.24	---	56.00	20.76	L1	29.7	5.54	---
1.885564	35.32	---	56.00	20.68	L1	29.7	5.62	---
2.111571	34.38	---	56.00	21.62	L1	29.7	4.68	---
2.341843	---	25.53	46.00	20.47	L1	29.7	---	-4.17

---End of the test report---