



TEST REPORT

Test report no.: 1-7398-24-08-02_TR1-R01



Deutsche
Akkreditierungsstelle
D-PL-12047-01-00

Testing laboratory

cetecom advanced GmbH

Untertuerkheimer Strasse 6 – 10

66117 Saarbruecken / Germany

Phone: + 49 681 5 98 - 0

Fax: + 49 681 5 98 - 9075

Internet: <https://cetecomadvanced.com>

e-mail: mail@cetecomadvanced.com

Accredited Testing Laboratory:

The testing laboratory (area of testing) is accredited according to DIN EN ISO/IEC 17025 (2018-03) by the Deutsche Akkreditierungsstelle GmbH (DAkkS).

The accreditation is valid for the scope of testing procedures as stated in the accreditation certificate with the registration number:

D-PL-12047-01-00.

ISED Testing Laboratory Recognized Listing Number: DE0001

FCC designation number: DE0002

Applicant

Pepperl+Fuchs SE

Lilienthalstraße 200

68307 Mannheim / GERMANY

Phone: +49 621 776-0

Contact: Nils Bleshoy

e-mail: nbleshoy@de.pepperl-fuchs.com

Manufacturer

Pepperl+Fuchs SE

Lilienthalstraße 200

68307 Mannheim / GERMANY

Test standard/s

FCC - Title 47 CFR Part 15 FCC - Title 47 of the Code of Federal Regulations; Chapter I; Part 15 - Radio frequency devices

RSS - 210 Issue 11 Spectrum Management and Telecommunications Radio Standards Specification
- Licence-Exempt Radio Apparatus: Category I Equipment

RSS - Gen Issue 5 incl. Spectrum Management and Telecommunications Radio Standards Specification
Amendment 1 & 2 - General Requirements for Compliance of Radio Apparatus

For further applied test standards please refer to section 3 of this test report.

Test Item

Kind of test item: **RFID Reader 13.56MHz**

Model name: **IQH1-F61-V1**

FCC ID: **2AXZAIQR1F61V1**

ISED certification number: **7037A-IQR1F61V1**

Frequency: 13.56 MHz

Technology tested: RFID

Antenna: Integrated antenna

Power supply: 20 V to 30 V DC, by external power supply

Temperature range: -25°C to +70°C

This test report is electronically signed and valid without handwritten signature. For verification of the electronic signatures, the public keys can be requested at the testing laboratory.

Test report authorized:



Christoph Schneider
Lab Manager
Radio Labs

Test performed:



Hans-Joachim Wolsdorfer
Lab Manager
Radio Labs

1 Table of contents

| | | |
|------|---|----|
| 1 | Table of contents..... | 2 |
| 2 | General information..... | 3 |
| 2.1 | Notes and disclaimer..... | 3 |
| 2.2 | Application details..... | 3 |
| 2.3 | Test laboratories sub-contracted | 3 |
| 3 | Test standard/s, references and accreditations | 4 |
| 4 | Reporting statements of conformity – decision rule | 5 |
| 5 | Test environment | 6 |
| 6 | Test item | 6 |
| 6.1 | General description | 6 |
| 6.2 | Additional information..... | 6 |
| 7 | Description of the test setup..... | 7 |
| 7.1 | Shielded semi anechoic chamber | 8 |
| 7.2 | Shielded fully anechoic chamber | 10 |
| 7.3 | Conducted measurements normal and extreme conditions | 11 |
| 7.4 | AC conducted | 12 |
| 8 | Sequence of testing..... | 13 |
| 8.1 | Sequence of testing radiated spurious 9 kHz to 30 MHz..... | 13 |
| 8.2 | Sequence of testing radiated spurious 30 MHz to 1 GHz | 14 |
| 9 | Measurement uncertainty | 15 |
| 10 | Summary of measurement results | 16 |
| 11 | Additional comments | 16 |
| 12 | Measurement results | 17 |
| 12.1 | Occupied bandwidth | 17 |
| 12.2 | Field strength of the fundamental..... | 19 |
| 12.3 | Field strength of the harmonics and spurious..... | 20 |
| 12.4 | Conducted limits | 24 |
| 12.5 | Frequency error | 27 |
| 13 | Glossary..... | 28 |
| 14 | Document history | 29 |

2 General information

2.1 Notes and disclaimer

The test results of this test report relate exclusively to the test item specified in this test report. cetecom advanced GmbH does not assume responsibility for any conclusions and generalizations drawn from the test results with regard to other specimens or samples of the type of the equipment represented by the test item.

The test report may only be reproduced or published in full. Reproduction or publication of extracts from the report requires the prior written approval of cetecom advanced GmbH.

The testing service provided by cetecom advanced GmbH has been rendered under the current "General Terms and Conditions for cetecom advanced GmbH".

cetecom advanced GmbH will not be liable for any loss or damage resulting from false, inaccurate, inappropriate or incomplete product information provided by the customer.

Under no circumstances does the cetecom advanced GmbH test report include any endorsement or warranty regarding the functionality, quality or performance of any other product or service provided.

Under no circumstances does the cetecom advanced GmbH test report include or imply any product or service warranties from cetecom advanced GmbH, including, without limitation, any implied warranties of merchantability, fitness for purpose, or non-infringement, all of which are expressly disclaimed by cetecom advanced GmbH.

All rights and remedies regarding vendor's products and services for which cetecom advanced GmbH has prepared this test report shall be provided by the party offering such products or services and not by cetecom advanced GmbH.

In no case this test report can be considered as a Letter of Approval.

This test report is electronically signed and valid without handwritten signature. For verification of the electronic signatures, the public keys can be requested at the testing laboratory.

2.2 Application details

| | |
|------------------------------------|------------|
| Date of receipt of order: | 2024-09-19 |
| Date of receipt of test item: | 2024-10-28 |
| Start of test:* | 2024-11-08 |
| End of test:* | 2024-11-14 |
| Person(s) present during the test: | -/- |

*Date of each measurement, if not shown in the plot, can be requested. Dates are stored in the measurement software.

2.3 Test laboratories sub-contracted

None

3 Test standard/s, references and accreditations


| Test standard | Date | Description |
|---|---------------|---|
| FCC - Title 47 CFR Part 15 | | FCC - Title 47 of the Code of Federal Regulations; Chapter I; Part 15 - Radio frequency devices |
| RSS - 210 Issue 11 | June 2024 | Spectrum Management and Telecommunications Radio Standards Specification - Licence-Exempt Radio Apparatus: Category I Equipment |
| RSS - Gen Issue 5 incl. Amendment 1 & 2 | February 2021 | Spectrum Management and Telecommunications Radio Standards Specification - General Requirements for Compliance of Radio Apparatus |
| Guidance | Version | Description |
| ANSI C63.4a-2017 | -/- | American National Standard for Methods of Measurement of Radio-Noise Emissions from Low-Voltage Electrical and Electronic Equipment in the Range of 9 kHz to 40 GHz |
| ANSI C63.10-2020 | -/- | American National Standard of Procedures for Compliance Testing of Unlicensed Wireless Devices |

4 Reporting statements of conformity – decision rule

Only the measured values related to their corresponding limits will be used to decide whether the equipment under test meets the requirements of the test standards listed in chapter 3.

The measurement uncertainty is mentioned in this test report, see chapter 9, but is not taken into account - neither to the limits nor to the measurement results. Measurement results with a smaller margin to the corresponding limits than the measurement uncertainty have a potential risk of more than 5% that the decision might be wrong."

measured value, measurement uncertainty, verdict

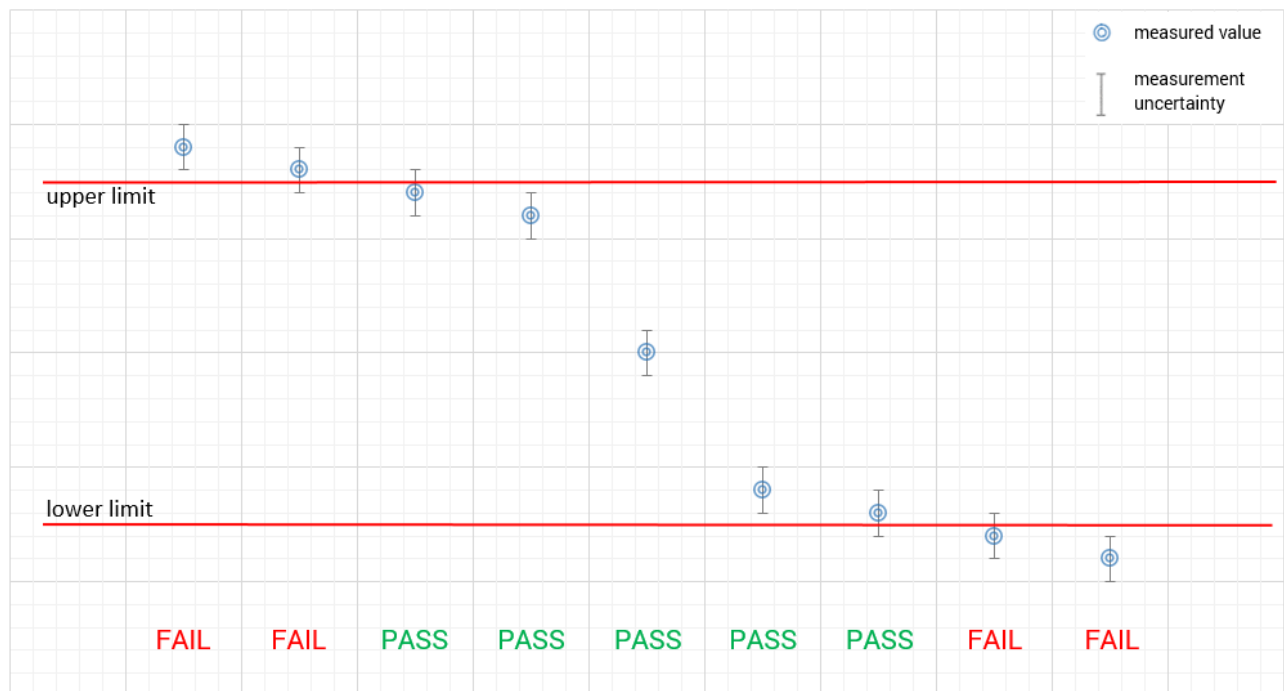

5 Test environment

| | | | |
|---------------------------|---|-------------------------------------|---|
| Temperature | : | T_{nom} T_{max} T_{min} | +22 °C during room temperature tests +70 °C during high temperature tests -25 °C during low temperature tests |
| Relative humidity content | : | | 55 % |
| Barometric pressure | : | | 1021 hpa |
| Power supply | : | V_{nom} V_{max} V_{min} | 24.0 V DC, by external power supply 30 V 20 V |

6 Test item

6.1 General description

| | | |
|----------------------------|---|---|
| Kind of test item | : | RFID Reader 13.56MHz |
| Model name | : | IQH1-F61-V1 |
| HMN | : | -/- |
| PMN | : | IQH1-F61-V1 |
| HVIN | : | IQR1F61V1 |
| FVIN | : | 18-31422 |
| S/N serial number | : | Rad. 4 000 017 7 179 812 Cond. pcb without housing and SMA connector |
| Hardware status | : | #204621 |
| Software status | : | -/- |
| Firmware status | : | 18-31422 |
| Frequency band | : | 13.56 MHz |
| Type of radio transmission | : | modulated carrier |
| Use of frequency spectrum | : | |
| Type of modulation | : | ASK |
| Number of channels | : | 1 |
| Antenna | : | Integrated antenna |
| Power supply | : | 20 V to 30 V DC, by external power supply |
| Temperature range | : | -25°C to +70°C |

6.2 Additional information

The content of the following annexes is defined in the QA. It may be that not all of the listed annexes are necessary for this report, thus some values in between may be missing.

Test setup and EUT photos are included in test report:

1-7398-24-08-01_TR1-A101-R01
1-7398-24-08-01_TR1-A102-R01
1-7398-24-08-01_TR1-A104-R01

7 Description of the test setup


Typically, the calibrations of the test apparatus are commissioned to and performed by an accredited calibration laboratory. The calibration intervals are determined in accordance with the DIN EN ISO/IEC 17025. In addition to the external calibrations, the laboratory executes comparison measurements with other calibrated test systems or effective verifications. Weekly chamber inspections and range calibrations are performed. Where possible, RF generating and signaling equipment as well as measuring receivers and analyzers are connected to an external high-precision 10 MHz reference (GPS-based or rubidium frequency standard).

In order to simplify the identification of the equipment used at some special tests, some items of test equipment and ancillaries can be provided with an identifier or number in the equipment list below (Lab/Item).

Each block diagram listed can contain several test setup configurations. All devices belonging to a test setup are identified with the same letter syntax. For example: Column Setup and all devices with an A.

7.1 Shielded semi anechoic chamber

The radiated measurements are performed in vertical and horizontal plane in the frequency range from 30 MHz to 1 GHz in semi-anechoic chambers. The EUT is positioned on a non-conductive support with a height of 0.80 m above a conductive ground plane that covers the whole chamber. The receiving antennas are conform to specifications ANSI C63. These antennas can be moved over the height range between 1.0 m and 4.0 m in order to search for maximum field strength emitted from EUT. The measurement distances between EUT and receiving antennas are indicated in the test setups for the various frequency ranges. For each measurement, the EUT is rotated in all three axes until the maximum field strength is received. The wanted and unwanted emissions are received by spectrum analyzers where the detector modes and resolution bandwidths over various frequency ranges are set according to requirement ANSI C63.

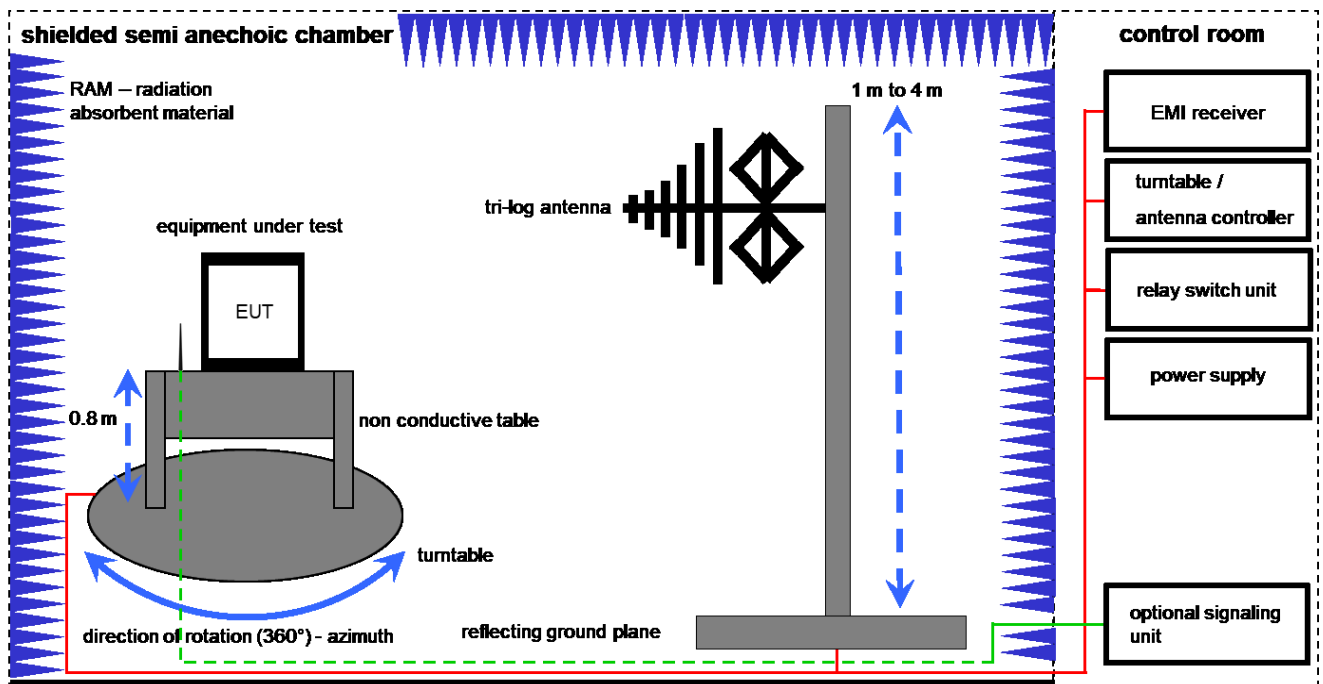

Measurement distance: tri-log antenna 10 meter
EMC32 software version: 10.59.00

FS = UR + CL + AF
(FS-field strength; UR-voltage at the receiver; CL-loss of the cable; AF-antenna factor)


Example calculation:

FS [dB μ V/m] = 12.35 [dB μ V/m] + 1.90 [dB] + 16.80 [dB/m] = 31.05 [dB μ V/m] (35.69 μ V/m)

Equipment table:

| No. | Setup | Equipment | Type | Manufacturer | Serial No. | INV. No. | Kind of Calibration | Last Calibration | Next Calibration |
|-----|-------|--|--------------|-------------------------------|------------|-----------|---------------------|------------------|------------------|
| 1 | A | Switch-Unit | 3488A | HP | 2719A14505 | 300000368 | ev | -/- | -/- |
| 2 | A | Semi anechoic chamber | 3000023 | MWB AG | -/- | 300000551 | ne | -/- | -/- |
| 3 | A | Antenna Tower | Model 2175 | ETS-Lindgren | 64762 | 300003745 | izw | -/- | -/- |
| 4 | A | Positioning Controller | Model 2090 | ETS-Lindgren | 64672 | 300003746 | izw | -/- | -/- |
| 5 | A | Turntable Interface-Box | Model 105637 | ETS-Lindgren | 44583 | 300003747 | izw | -/- | -/- |
| 6 | A | TRILOG Broadband Test-Antenna 30 MHz - 3 GHz | VULB9163 | Schwarzbeck Mess - Elektronik | 318 | 300003696 | vIKI! | 31.01.2024 | 30.01.2026 |
| 7 | A | Turntable | 2089-4.0 | EMCO | -/- | 300004394 | ne | -/- | -/- |
| 8 | A | PC | TecLine | F+W | -/- | 300004388 | ne | -/- | -/- |
| 9 | A | EMI Test Receiver | ESR3 | Rohde & Schwarz | 102587 | 300005771 | k | 06.12.2023 | 31.12.2024 |

7.2 Shielded fully anechoic chamber

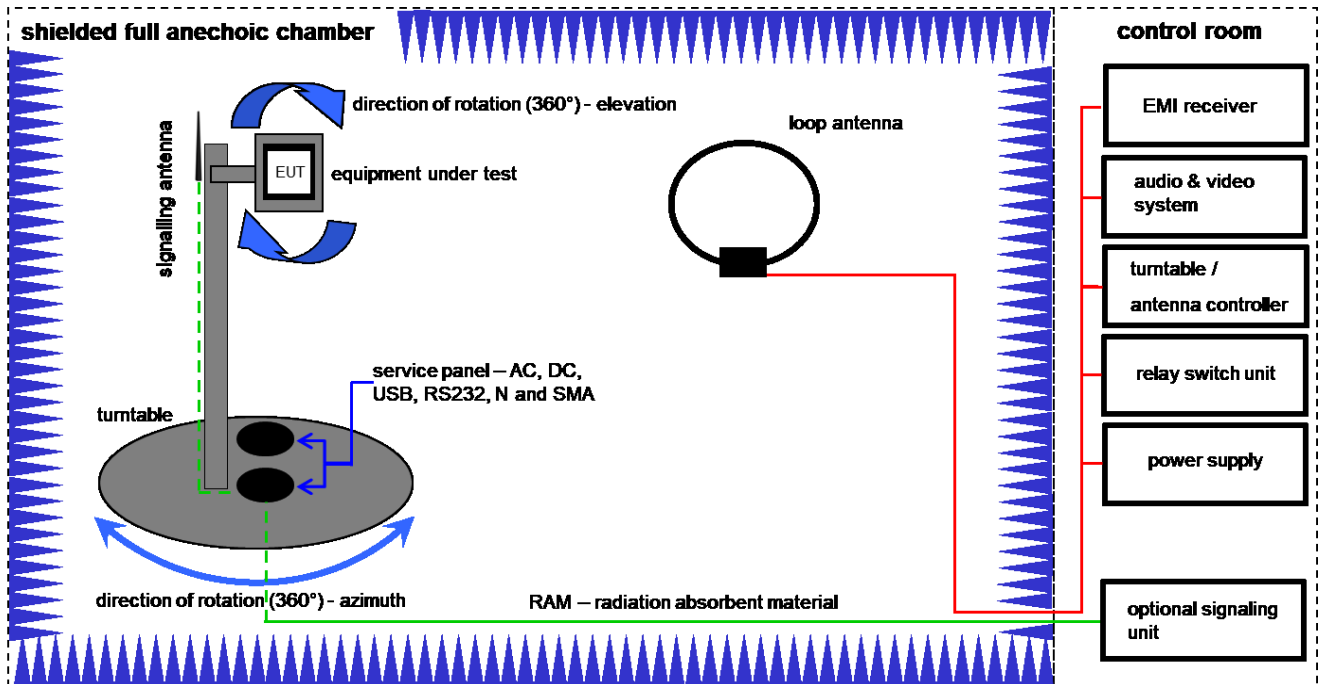

Measurement distance: loop antenna 3 meter

$$FS = UR + CA + AF$$

(FS-field strength; UR-voltage at the receiver; CA-loss of the signal path; AF-antenna factor)

Example calculation:


$$FS \text{ [dB}\mu\text{V/m]} = 40.0 \text{ [dB}\mu\text{V/m]} + (-35.8) \text{ [dB]} + 32.9 \text{ [dB/m]} = 37.1 \text{ [dB}\mu\text{V/m]} (71.61 \mu\text{V/m})$$

Equipment table:

| No. | Setup | Equipment | Type | Manufacturer | Serial No. | INV. No. | Kind of Calibration | Last Calibration | Next Calibration |
|-----|-------|-------------------------------------|----------------------|----------------------|------------|-----------|---------------------|------------------|------------------|
| 1 | A | Anechoic chamber | FAC 3/5m | MWB / TDK | 87400/02 | 300000996 | ev | -/- | -/- |
| 2 | A | EMI Test Receiver 20Hz- 26,5GHz | ESU26 | R&S | 100037 | 300003555 | k | 11.12.2023 | 31.12.2024 |
| 3 | A | 4U RF Switch Platform | L4491A | Agilent Technologies | MY50000037 | 300004509 | ne | -/- | -/- |
| 4 | A | NEXIO EMV-Software | BAT EMC V2022.0.32.0 | Nexio | | 300004682 | ne | -/- | -/- |
| 5 | A | Active Loop Antenna 9 kHz to 30 MHz | 6502 | EMCO | 2210 | 300001015 | vKI! | 02.08.2023 | 31.07.2025 |
| 6 | A | Power Supply | HMP2020 | Rhode & Schwarz | 120579 | 300006406 | k | 02.05.2023 | 31.05.2025 |

7.3 Conducted measurements normal and extreme conditions

Conducted measurements normal & extreme conditions

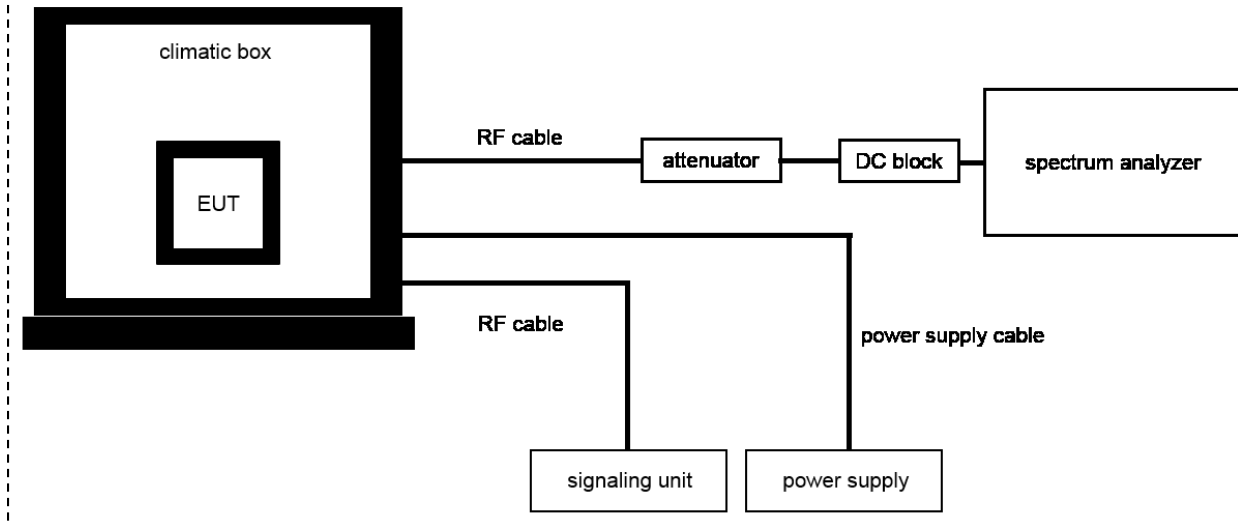

OP = AV + CA
 (OP-output power; AV-analyzer value; CA-loss signal path)


Example calculation:

OP [dBm] = 6.0 [dBm] + 11.7 [dB] = 17.7 [dBm] (58.88 mW)

Equipment table:

| No. | Setup | Equipment | Type | Manufacturer | Serial No. | INV. No. | Kind of Calibration | Last Calibration | Next Calibration |
|-----|-------|--------------------------|---------|------------------|------------|-----------|---------------------|------------------|------------------|
| 1 | A | Signal analyzer | FSV30 | Rohde&Schwarz | 104365 | 300005923 | k | 13.12.2023 | 31.12.2024 |
| 2 | A | Power Supply | HMP2020 | Rohde & Schwarz | 101961 | 300006102 | k | 15.12.2022 | 31.12.2024 |
| 3 | A | Loop Antenna | -/- | ZEG TS Steinfurt | -/- | 400001208 | ev | -/- | -/- |
| 4 | A | Temperature Test Chamber | VT 4002 | Heraeus Voetsch | 521/83761 | 300002326 | ev | 18.09.2024 | 30.09.2026 |

7.4 AC conducted

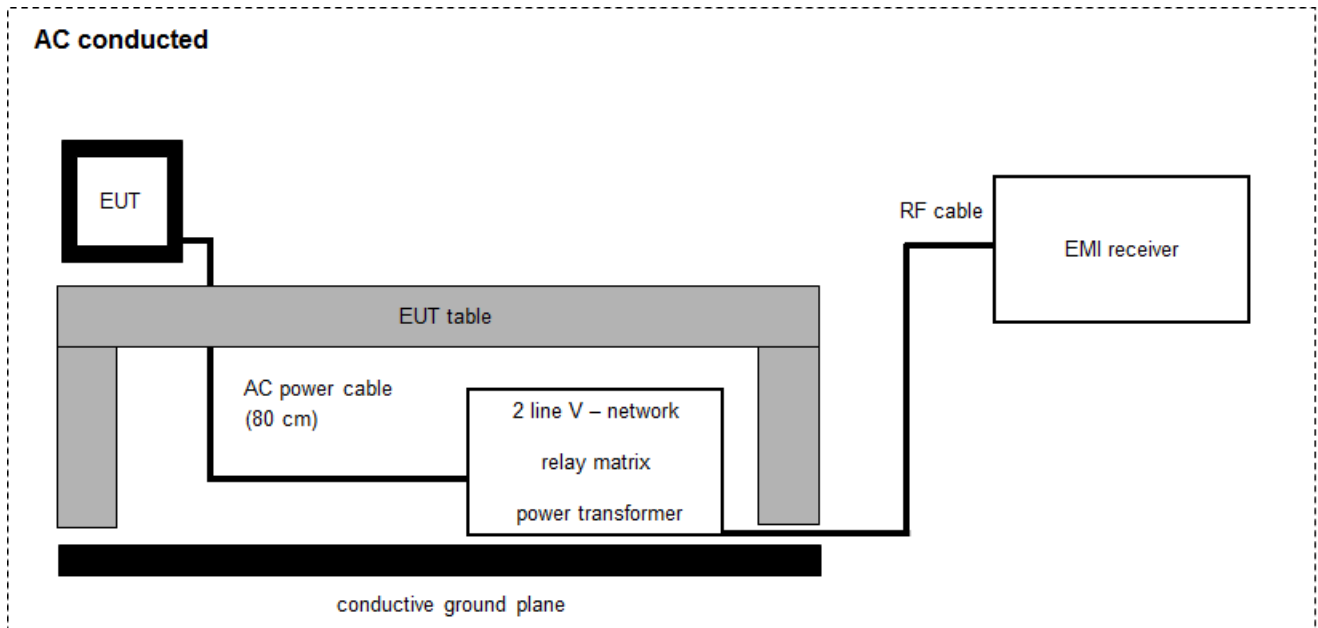

$$FS = UR + CF + VC$$

(FS-field strength; UR-voltage at the receiver; CR-loss of the cable and filter; VC-correction factor of the ISN)

Example calculation:

$$FS [dB\mu V/m] = 37.62 [dB\mu V/m] + 9.90 [dB] + 0.23 [dB] = 47.75 [dB\mu V/m] \quad (244.06 \mu V/m)$$

Equipment table:

| No. | Setup | Equipment | Type | Manufacturer | Serial No. | INV. No. | Kind of Calibration | Last Calibration | Next Calibration |
|-----|-------|---|---------|-------------------------------------|------------------|-----------|---------------------|------------------|------------------|
| 1 | A | Two-line V-Network (LISN) 9 kHz to 30 MHz | ESH3-Z5 | Rohde & Schwarz | 892475/017 | 300002209 | vKI! | 12.12.2023 | 31.12.2025 |
| 2 | A | RF-Filter-section | 85420E | HP | 3427A00162 | 300002214 | NK! | -/- | -/- |
| 3 | A | Hochpass 150 kHz | EZ-25 | R&S | 100010 | 300003798 | ev | -/- | -/- |
| 4 | A | PC | TecLine | F+W | | 300003532 | ne | -/- | -/- |
| 5 | A | Analyzer-Impedance-System | AIS16/1 | Spitzenberger + Spies GmbH & Co. KG | U02076 07/0 1023 | 400001751 | k | 19.10.2023 | 31.10.2025 |
| 6 | A | EMI Test Receiver 3.6 GHz | ESR3 | Rohde & Schwarz | 102981 | 300006318 | k | 08.12.2023 | 31.12.2024 |

8 Sequence of testing

8.1 Sequence of testing radiated spurious 9 kHz to 30 MHz

Setup

- The equipment is set up to simulate normal operation mode as described in the user manual or defined by the manufacturer.
- If the EUT is a tabletop system, it is placed on a table with 0.8 m height.
- If the EUT is a floor standing device, it is placed directly on the turn table.
- Auxiliary equipment and cables are positioned to simulate normal operation conditions as described in ANSI C 63.4.
- The AC power port of the EUT (if available) is connected to a power outlet below the turntable.
- Measurement distance is 3 m (see ANSI C 63.4) – see test details.
- EUT is set into operation.

Premeasurement*

- The turntable rotates from 0° to 315° using 45° steps.
- The antenna height is 1 m.
- At each turntable position the analyzer sweeps with positive-peak detector to find the maximum of all emissions.

Final measurement

- Identified emissions during the pre-measurement are maximized by the software by rotating the turntable from 0° to 360°.
- Loop antenna is rotated about its vertical axis for maximum response at each azimuth about the EUT. (For certain applications, the loop antenna plane may also need to be positioned horizontally at the specified distance from the EUT)
- The final measurement is done in the position (turntable and elevation) causing the highest emissions with quasi-peak (as described in ANSI C 63.4).
- Final levels, frequency, measuring time, bandwidth, turntable position, correction factor, margin to the limit and limit will be recorded. A plot with the graph of the premeasurement and the limit is stored.

*)Note: The sequence will be repeated three times with different EUT orientations.

8.2 Sequence of testing radiated spurious 30 MHz to 1 GHz

Setup

- The equipment is set up to simulate normal operation mode as described in the user manual or defined by the manufacturer.
- If the EUT is a tabletop system, a table with 0.8 m height is used, which is placed on the ground plane.
- If the EUT is a floor standing device, it is placed on the ground plane with insulation between both.
- Auxiliary equipment and cables are positioned to simulate normal operation conditions as described in ANSI C 63.4.
- The AC power port of the EUT (if available) is connected to a power outlet below the turntable.
- Measurement distance is 10 m or 3 m (see ANSI C 63.4) – see test details.
- EUT is set into operation.

Premeasurement

- The turntable rotates from 0° to 315° using 45° steps.
- The antenna is polarized vertical and horizontal.
- The antenna height changes from 1 m to 3 m.
- At each turntable position, antenna polarization and height the analyzer sweeps three times in peak to find the maximum of all emissions.

Final measurement

- The final measurement is performed for at least six highest peaks according to the requirements of the ANSI C63.4.
- Based on antenna and turntable positions at which the peak values are measured the software maximize the peaks by changing turntable position $\pm 45^\circ$ and antenna height between 1 and 4 m.
- The final measurement is done with quasi-peak detector (as described in ANSI C 63.4).
- Final levels, frequency, measuring time, bandwidth, antenna height, antenna polarization, turntable angle, correction factor, margin to the limit and limit are recorded. A plot with the graph of the premeasurement with marked maximum final results and the limit is stored.

9 Measurement uncertainty

| Measurement uncertainty | |
|--|----------------|
| Test case | Uncertainty |
| Occupied bandwidth | \pm used RBW |
| Field strength of the fundamental | ± 3 dB |
| Field strength of the harmonics and spurious | ± 3 dB |
| Receiver spurious emissions and cabinet radiations | ± 3 dB |
| Conducted limits | ± 2.6 dB |

10 Summary of measurement results

| | |
|-------------------------------------|---|
| <input checked="" type="checkbox"/> | No deviations from the technical specifications were ascertained |
| <input type="checkbox"/> | There were deviations from the technical specifications ascertained |
| <input type="checkbox"/> | This test report is only a partial test report. The content and verdict of the performed test cases are listed below. |

| TC Identifier | Description | Verdict | Date | Remark |
|---------------|--|------------|------------|--------|
| RF-Testing | CFR Part 15 RSS 210 Issue 11 RSS Gen Issue 5 | See table! | 2024-11-15 | -/- |

| Test specification clause | Test case | Temperature conditions | Power source conditions | C | NC | NA | NP | Remark |
|---|--|-----------------------------|-----------------------------|-------------------------------------|--------------------------|--------------------------|--------------------------|--------|
| RSS Gen Issue 5 | Occupied bandwidth | Nominal | Nominal | <input checked="" type="checkbox"/> | <input type="checkbox"/> | <input type="checkbox"/> | <input type="checkbox"/> | -/- |
| § 15.225 (a) RSS 210 Issue 11 | Field strength of the fundamental | Nominal | Nominal | <input checked="" type="checkbox"/> | <input type="checkbox"/> | <input type="checkbox"/> | <input type="checkbox"/> | -/- |
| § 15.209 § 15.225 (b-d) RSS Gen Issue 5 | Field strength of the harmonics and spurious | Nominal | Nominal | <input checked="" type="checkbox"/> | <input type="checkbox"/> | <input type="checkbox"/> | <input type="checkbox"/> | -/- |
| §15.107 §15.207 | Conducted limits | Nominal | Nominal | <input checked="" type="checkbox"/> | <input type="checkbox"/> | <input type="checkbox"/> | <input type="checkbox"/> | -/- |
| § 15.225 (a) RSS 210 Issue 11 | Frequency tolerance | Normal & extreme conditions | Normal & extreme conditions | <input checked="" type="checkbox"/> | <input type="checkbox"/> | <input type="checkbox"/> | <input type="checkbox"/> | -/- |

Note:

C Compliant
 NC Not compliant
 NA Not applicable
 NP Not performed

11 Additional comments

Reference documents: none

Special test descriptions: TestMode_Description_IQH1-xxxx_IdentControl_v01_en

Configuration descriptions: AC conducted measurement (chapter 12.4) has been performed on a device with SMA connector which was terminated with 50R (see photo annex)

12 Measurement results

12.1 Occupied bandwidth

Measurement:

The emission bandwidth (x dB) is defined as the frequency range between two points, one above and one below the carrier frequency, at which the spectral density of the emission is attenuated x dB below the maximum in-band spectral density of the modulated signal. Measurement performed according to ANSI C63.10, chapter 6.9.3, "Occupied bandwidth—power bandwidth (99%) measurement procedure"

| Measurement parameters | |
|--------------------------|-------------------------------------|
| Detector: | Peak |
| Resolution bandwidth: | 1 % – 5 % of the occupied bandwidth |
| Video bandwidth: | ≥ 3x RBW |
| Trace mode: | Max hold |
| Analyser function: | 99 % power function |
| Used equipment: | See chapter 7.3A |
| Measurement uncertainty: | See chapter 9 |

Limit:


| IC |
|---|
| for RSP-100 test report coversheet only |

Result:

| 99% emission bandwidth |
|------------------------|
| 25.18 kHz |

Plot:

Plot 1: 99 % emission bandwidth

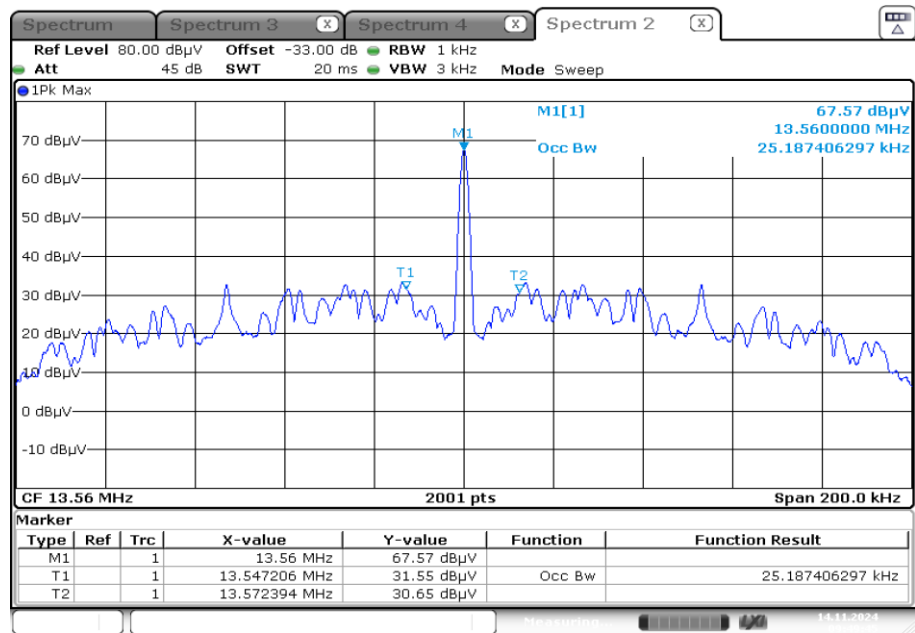

Date: 14.NOV.2024 09:49:45

12.2 Field strength of the fundamental

Measurement:

The maximum detected field strength for the carrier signal. Measurement performed according to ANSI C63.10 chapter 6.4

| Measurement parameters | |
|--------------------------|------------------|
| Detector: | Quasi Peak |
| Resolution bandwidth: | 9 kHz |
| Video bandwidth: | ≥ 3x RBW |
| Trace mode: | Max hold |
| Used equipment: | See chapter 7.2A |
| Measurement uncertainty: | See chapter 9 |

Limit:

| FCC & IC | | |
|--------------------|----------------------------|-----------------------------|
| Frequency / MHz | Field strength / (μV/m) | Measurement distance / m |
| 13.553 to 13.567 | 15,848 (84 dBμV/m) | 30 |

Recalculation:

| According to ANSI C63.10 | | |
|--------------------------|---|----------------------------|
| Frequency | Formula | Correction value |
| 13.56 MHz | $FS_{\text{limit}} = FS_{\text{max}} - 40 \log\left(\frac{d_{\text{nearfield}}}{d_{\text{measure}}}\right) - 20 \log\left(\frac{d_{\text{limit}}}{d_{\text{nearfield}}}\right)$ <p> FS_{limit} is the calculation of field strength at the limit distance, expressed in dBμV/m FS_{max} is the measured field strength, expressed in dBμV/m $d_{\text{near field}}$ is the $\lambda/2\pi$ distance d_{measure} is the distance of the measurement point from EUT d_{limit} is the reference limit distance </p> | -21.4 dB from 3m to 30m |

Result:

| Field strength of the fundamental | | |
|-----------------------------------|--------------|--------------|
| Frequency | 13.56 MHz | |
| Distance | @ 3 m | @ 30 m |
| Measured / calculated value | 67.26 dBμV/m | 45.86 dBμV/m |

12.3 Field strength of the harmonics and spurious

Measurement:

The maximum detected field strength for the harmonics and spurious. Measurement performed according to ANSI C63.10, chapter 6.4 and 6.5

| Measurement parameters | |
|--------------------------|--|
| Detector: | Quasi peak / average or peak (worst case – pre-scan) |
| Resolution bandwidth: | F < 150 kHz: 200 Hz 150 kHz < F < 30 MHz: 9 kHz 30 MHz < F < 1 GHz: 120 kHz |
| Video bandwidth: | F < 150 kHz: 1 kHz 150 kHz < F < 30 MHz: 100 kHz 30 MHz < F < 1 GHz: 300 kHz |
| Trace mode: | Max hold |
| Used equipment: | See chapter 7.1A & 7.2A & 7.3A |
| Measurement uncertainty: | See chapter 9 |

Limit:

| FCC | | |
|-----------------|-----------------------|--------------------------|
| Frequency (MHz) | Field strength (μV/m) | Measurement distance (m) |
| 0.009 – 0.490 | 2400/(F/kHz) | 300 |
| 0.490 – 1.705 | 24000/(F/kHz) | 30 |
| 1.705 – 30 | 30 (29.5 dBμV/m) | 30 |
| 30 – 88 | 100 (40 dBμV/m) | 3 |
| 88 – 216 | 150 (43.5 dBμV/m) | 3 |
| 216 – 960 | 200 (46 dBμV/m) | 3 |

| IC | | |
|-----------------|-----------------------|--------------------------|
| Frequency (MHz) | Field strength (μA/m) | Measurement distance (m) |
| 0.009 – 0.490 | 6.37/F (F in kHz) | 300 |
| 0.490 – 1.705 | 63.7/F (F in kHz) | 30 |
| 1.705 – 30 | 0.08 (-22 dBμA/m) | 30 |


Result:

| Detected emissions | | | |
|--------------------|----------|----------------------|-----------------------|
| Frequency | Detector | Resolution bandwidth | Detected value (@ 3m) |
| no peaks detected | | | |
| | | | |


for frequency range 30MHz to 1GHz see table below plot

Plots:


Plot 1: 9 kHz – 30 MHz, magnetic emissions FCC

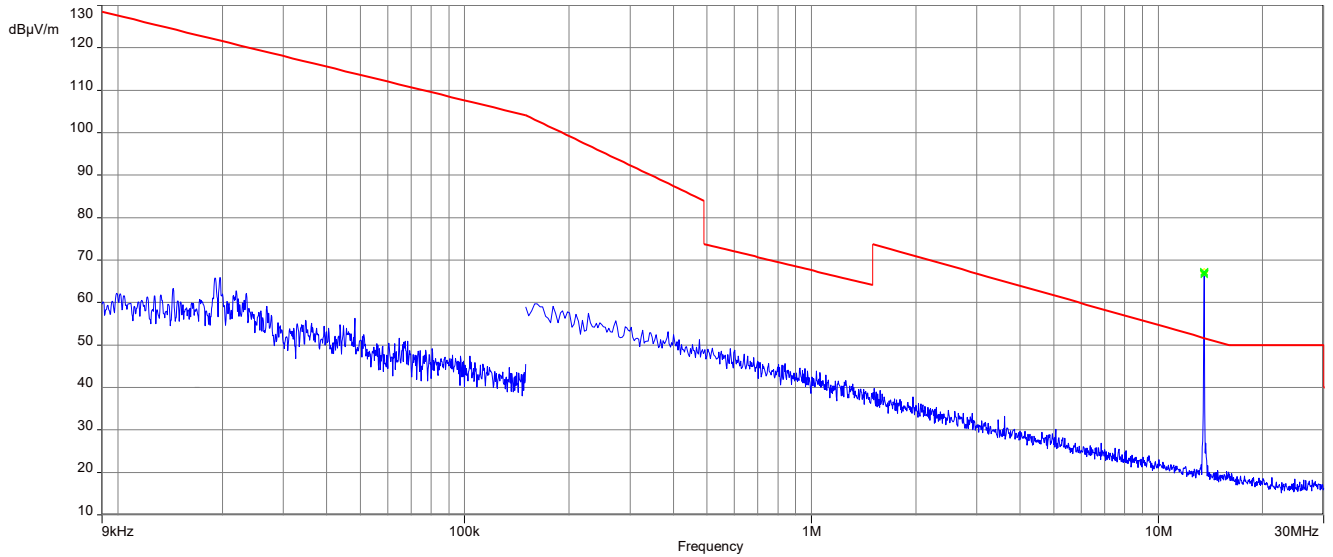


Plot 2: 9 kHz – 30 MHz, magnetic emissions IC

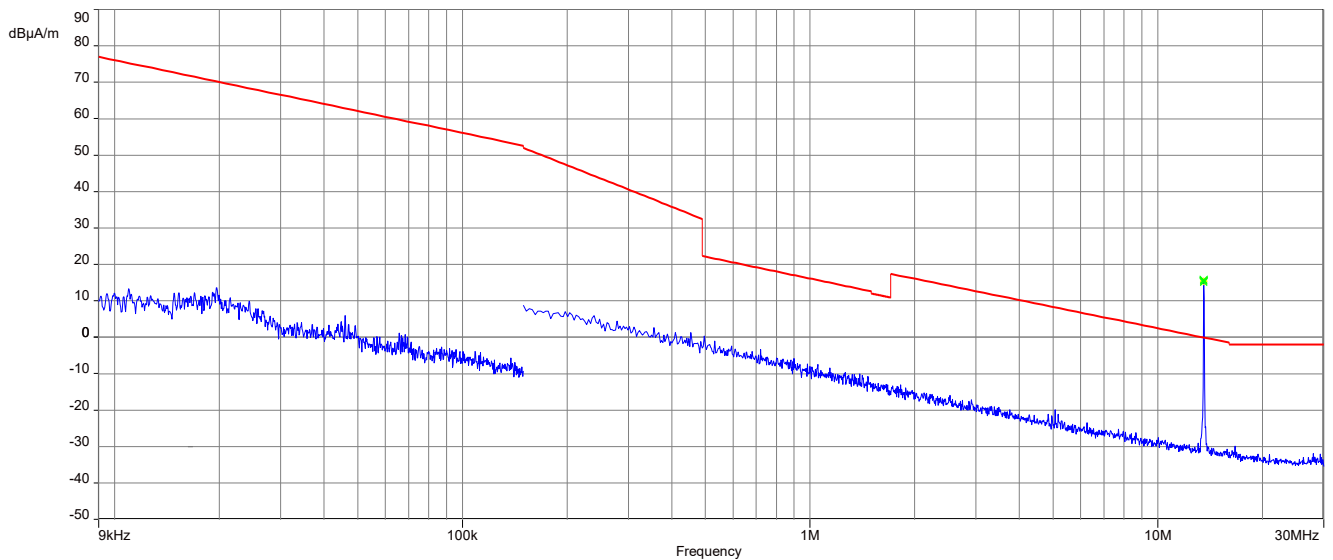

Plot 3: Spectrum mask (the limits are recalculated according to the ANSI C63.10-2013 sub clause 6.4)

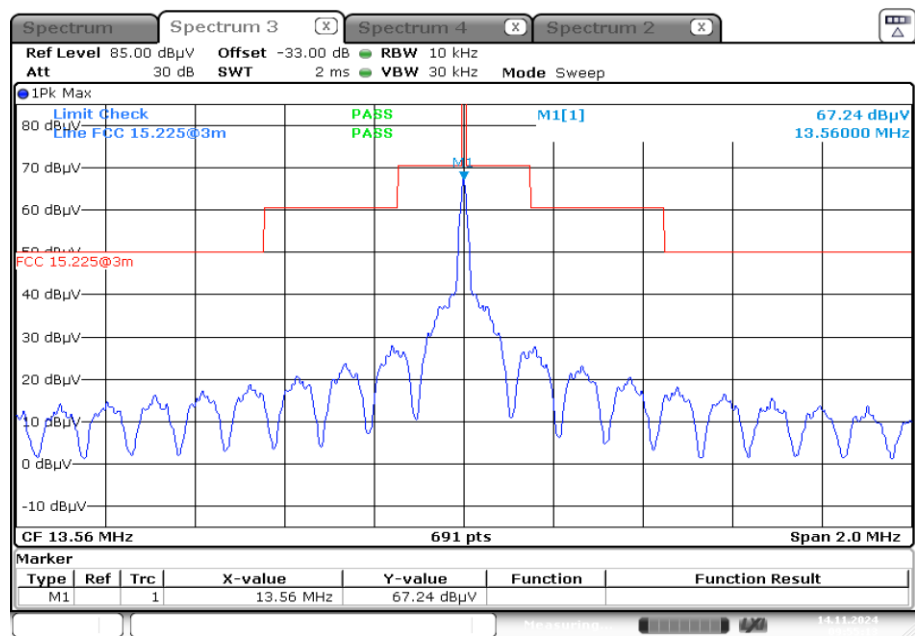

Date: 14.NOV.2024 09:55:13

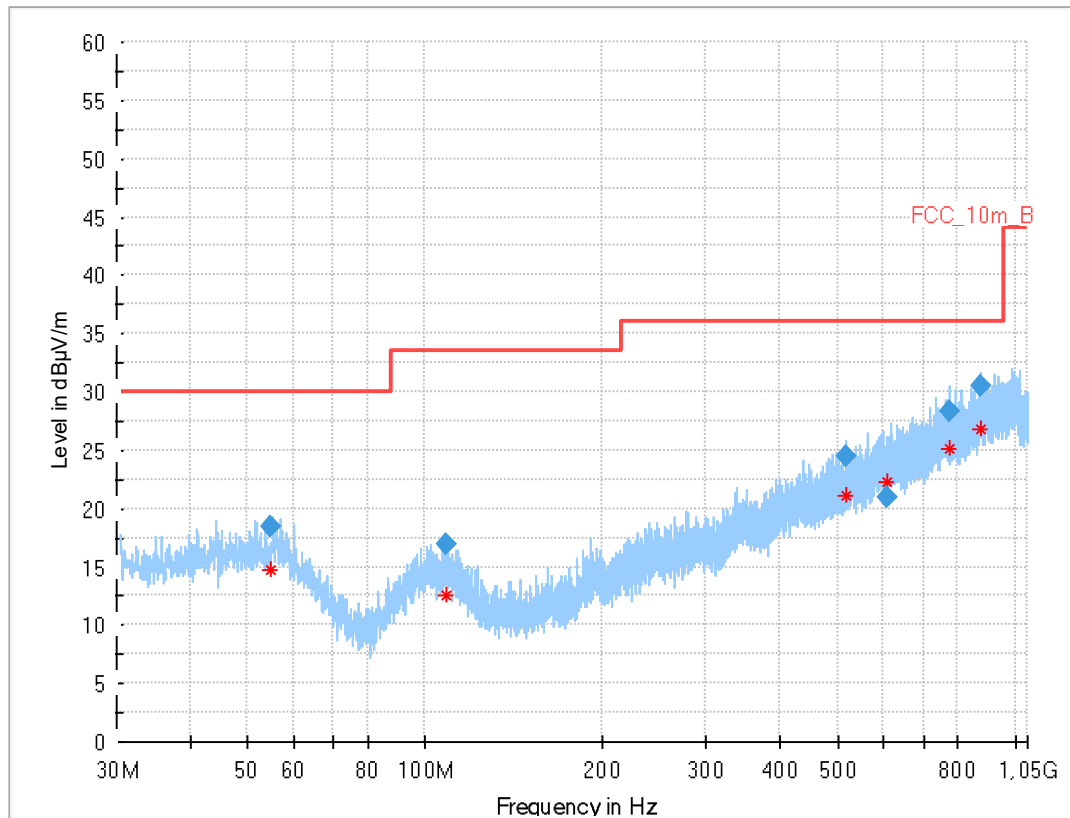Plot 5: 30 MHz – 1 GHz, vertical and horizontal polarisation

| Frequency (MHz) | QuasiPeak (dBµV/m) | Limit (dBµV/m) | Margin (dB) | Meas. Time (ms) | Bandwidth (kHz) | Height (cm) | Pol | Azimuth (deg) | Corr. (dB/m) |
|-----------------|--------------------|----------------|-------------|-----------------|-----------------|-------------|-----|---------------|--------------|
| 54.580 | 18.43 | 30.0 | 11.6 | 1000 | 120.0 | 182.0 | V | 9 | 15 |
| 108.869 | 16.93 | 33.5 | 16.6 | 1000 | 120.0 | 136.0 | H | -37 | 13 |
| 518.552 | 24.50 | 36.0 | 11.5 | 1000 | 120.0 | 195.0 | V | -37 | 20 |
| 607.455 | 20.95 | 36.0 | 15.1 | 1000 | 120.0 | 195.0 | V | 142 | 22 |
| 777.077 | 28.31 | 36.0 | 7.7 | 1000 | 120.0 | 109.0 | H | 142 | 24 |
| 871.459 | 30.42 | 36.0 | 5.6 | 1000 | 120.0 | 126.0 | H | 142 | 25 |

12.4 Conducted limits

Measurement:

Measurement of the conducted spurious emissions for an intentional radiator that is designed to be connected to the public utility (AC) power line. Measurement performed according to ANSI C63.10, chapter 6.2


| Measurement parameters | |
|--------------------------|--|
| Detector: | Quasi peak / average or peak (worst case – pre-scan) |
| Resolution bandwidth: | F < 150 kHz: 200 Hz F > 150 kHz: 9 kHz |
| Video bandwidth: | F < 150 kHz: 1 kHz F > 150 kHz: 100 kHz |
| Trace mode: | Max hold |
| Used equipment: | See chapter 7.4A |
| Measurement uncertainty: | See chapter 9 |

Limit:


| FCC & IC | | |
|--------------------|--------------------------------|-----------------------------|
| Frequency / MHz | Quasi-peak / (dB μ V/m) | Average / (dB μ V/m) |
| 0.15 – 0.5 | 66 to 56* | 56 to 46* |
| 0.5 – 5 | 56 | 46 |
| 5 – 30.0 | 60 | 50 |

Result:

see table below plots

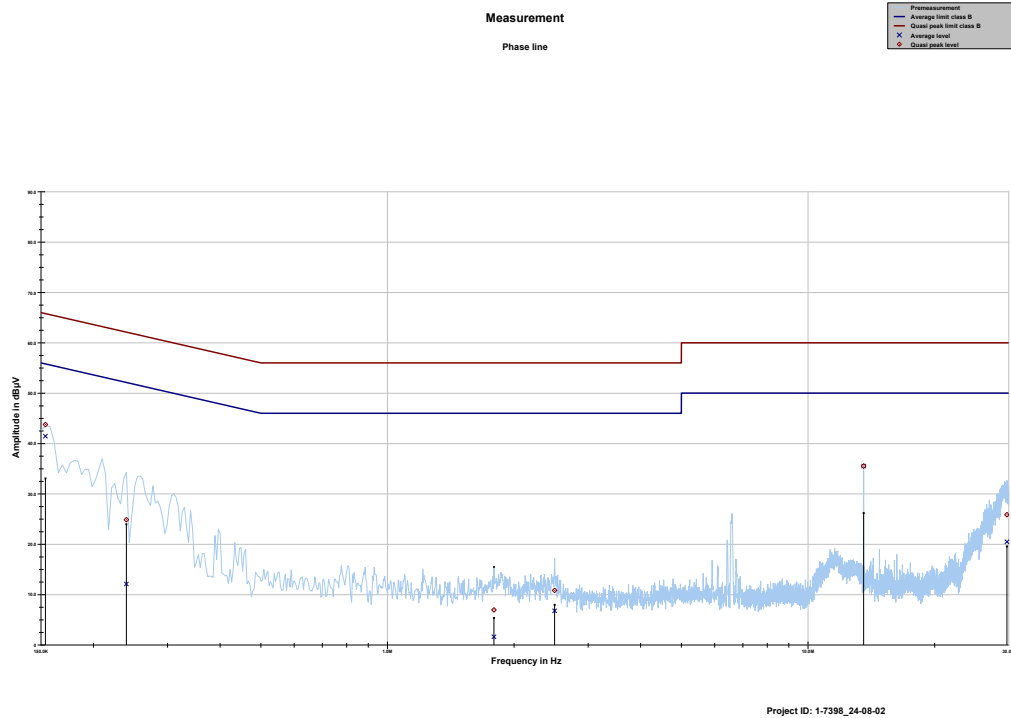Plots:**Plot 1:** 150 kHz to 30 MHz, phase line

| Frequency | Quasi peak level | Margin quasi peak | Limit QP | Average level | Margin average | Limit AV |
|-----------|------------------|-------------------|----------|---------------|----------------|----------|
| MHz | dBµV | dB | dBµV | dBµV | dB | dBµV |
| 0.153731 | 43.76 | 22.03 | 65.796 | 41.45 | 14.44 | 55.893 |
| 0.239550 | 24.85 | 37.26 | 62.112 | 12.10 | 41.34 | 53.441 |
| 1.791750 | 6.95 | 49.05 | 56.000 | 1.62 | 44.38 | 46.000 |
| 2.496956 | 10.82 | 45.18 | 56.000 | 6.78 | 39.22 | 46.000 |
| 13.560113 | 35.51 | 24.49 | 60.000 | 35.50 | 14.50 | 50.000 |
| 29.723888 | 25.86 | 34.14 | 60.000 | 20.49 | 29.51 | 50.000 |

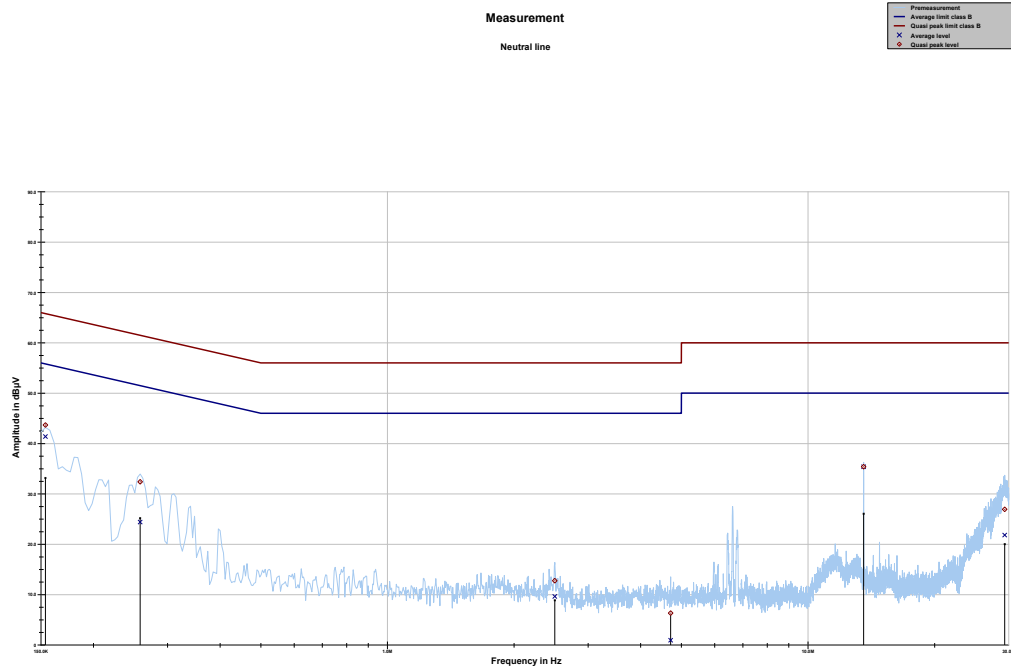Plot 2: 150 kHz to 30 MHz, neutral line

| Frequency | Quasi peak level | Margin quasi peak | Limit QP | Average level | Margin Average | Limit AV |
|-----------|------------------|-------------------|----------|---------------|----------------|----------|
| MHz | dBµV | dB | dBµV | dBµV | dB | dBµV |
| 0.153731 | 43.68 | 22.12 | 65.796 | 41.38 | 14.51 | 55.893 |
| 0.258206 | 32.39 | 29.10 | 61.489 | 24.41 | 28.50 | 52.908 |
| 2.500688 | 12.75 | 43.25 | 56.000 | 9.62 | 36.38 | 46.000 |
| 4.713319 | 6.32 | 49.68 | 56.000 | 0.93 | 45.07 | 46.000 |
| 13.560113 | 35.38 | 24.62 | 60.000 | 35.38 | 14.62 | 50.000 |
| 29.361956 | 26.92 | 33.08 | 60.000 | 21.80 | 28.20 | 50.000 |

12.5 Frequency error

Measurement:

The maximum detected field strength for the spurious. Measurement performed according to ANSI C63.10, chapter 6.8

| Measurement parameters | |
|--------------------------|------------------|
| Detector: | Peak detector |
| Resolution bandwidth: | 10 Hz / 100 Hz |
| Video bandwidth: | > RBW |
| Trace mode: | Max hold |
| Used equipment: | See chapter 7.3B |
| Measurement uncertainty: | See chapter 9 |

Limit:

| FCC & IC |
|--|
| The frequency tolerance of the carrier signal shall be maintained within +/- 0.01% of the operating frequency over a temperature variation of -20 degrees to +50 degrees C at normal supply voltage, and for a variation in the primary supply voltage from 85% to 115% of the rated supply voltage at a temperature of 20 degrees C. (± 1.356 kHz) |
| Carrier frequency stability shall be maintained to $\pm 0.01\%$ (± 100 ppm) |

Result: Temperature variation

| Frequency tolerance | | | |
|---------------------|-----------------|-----------------------|-----------|
| Measured frequency | Frequency error | Conditions | Result |
| 13.560351 | 25.89 | -20 °C & 100% voltage | compliant |
| 13.560328 | 24.22 | -10 °C & 100% voltage | compliant |
| 13.560277 | 20.43 | 0 °C & 100% voltage | compliant |
| 13.560215 | 15.84 | +10 °C & 100% voltage | compliant |
| 13.560078 | 5.72 | +30 °C & 100% voltage | compliant |
| 13.560014 | 1.00 | +40 °C & 100% voltage | compliant |
| 13.559964 | 2.69 | +50 °C & 100% voltage | compliant |

Result: Voltage variation

| Frequency tolerance | | | |
|---------------------|-----------------|-----------------------|-----------|
| Measured frequency | Frequency error | Conditions | Result |
| 13.560142 | 10.49 | +20 °C & 85% voltage | compliant |
| 13.560147 | 10.82 | +20 °C & 100% voltage | compliant |
| 13.560141 | 10.37 | +20 °C & 115% voltage | compliant |

13 Glossary

| | |
|------------------------|--|
| AVG | Average |
| C | Compliant |
| C/N₀ | Carrier to noise-density ratio, expressed in dB-Hz |
| CAC | Channel availability check |
| CW | Clean wave |
| DC | Duty cycle |
| DFS | Dynamic frequency selection |
| DSSS | Dynamic sequence spread spectrum |
| DUT | Device under test |
| EN | European Standard |
| ETSI | European Telecommunications Standards Institute |
| EMC | Electromagnetic Compatibility |
| EUT | Equipment under test |
| FCC | Federal Communications Commission |
| FCC ID | Company Identifier at FCC |
| FHSS | Frequency hopping spread spectrum |
| FVIN | Firmware version identification number |
| GNSS | Global Navigation Satellite System |
| GUE | GNSS User Equipment |
| HMN | Host marketing name |
| HVIN | Hardware version identification number |
| HW | Hardware |
| IC | Industry Canada |
| Inv. No. | Inventory number |
| MC | Modulated carrier |
| NA | Not applicable |
| NC | Not compliant |
| NOP | Non occupancy period |
| NP | Not performed |
| OBW | Occupied bandwidth |
| OC | Operating channel |
| OCW | Operating channel bandwidth |
| OFDM | Orthogonal frequency division multiplexing |
| OOB | Out of band |
| OP | Occupancy period |
| PER | Packet error rate |
| PMN | Product marketing name |
| PP | Positive peak |
| QP | Quasi peak |
| RLAN | Radio local area network |
| S/N or SN | Serial number |
| SW | Software |
| UUT | Unit under test |
| WLAN | Wireless local area network |

14 Document history

| Version | Applied changes | Date of release |
|---------|-----------------|-----------------|
| R01 | Initial release | 2024-11-15 |

END OF TEST REPORT