

Test Report

FCC ID: 2AUGB-M001

Date of issue: Oct. 12, 2019

Report number: MTi19061006-3E1

Sample description: Integrated Sensor

Model(s): M001, M002, M003, M004

Applicant: Waites Sensor Technologies Inc.

Address: 20 W 11th St, #200, Covington, KY 41011, USA

Date of test: July 17, 2019 to Oct. 12, 2019

Shenzhen Microtest Co., Ltd.
<http://www.mtitest.com>



Table of Contents

1	GENERAL DESCRIPTION	4
1.1	FEATURE OF EQUIPMENT UNDER TEST (EUT).....	4
1.2	OPERATION CHANNEL LIST	4
1.3	TEST FREQUENCY CHANNEL.....	4
1.4	EUT OPERATION MODE	4
1.5	ANCILLARY EQUIPMENT LIST.....	5
2	SUMMARY OF TEST RESULT	5
3	TEST FACILITIES AND ACCREDITATIONS	6
3.1	TEST LABORATORY.....	6
3.2	ENVIRONMENTAL CONDITIONS	6
3.3	MEASUREMENT UNCERTAINTY.....	6
3.4	TEST SOFTWARE	6
4	LIST OF TEST EQUIPMENT	7
5	TEST RESULT	8
5.1	ANTENNA REQUIREMENT	8
5.1.1	<i>Standard requirement</i>	8
5.1.2	<i>EUT Antenna</i>	8
5.2	AC POWER LINE CONDUCTED EMISSION	9
5.2.1	<i>Limits</i>	9
5.2.2	<i>Test setup</i>	9
5.2.3	<i>Test procedure</i>	10
5.2.4	<i>Test results</i>	10
5.3	FIELD STRENGTH OF FUNDAMENTAL AND HARMONIC EMISSIONS	11
5.3.1	<i>Limits</i>	11
5.3.2	<i>Test Method</i>	11
5.3.3	<i>Test Result</i>	12
5.4	20DB BANDWIDTH	13
5.4.1	<i>Limits</i>	13
5.4.2	<i>Test method</i>	13
5.4.3	<i>Test result</i>	14
5.5	RADIATED SPURIOUS EMISSION	16
5.5.1	<i>Limit</i>	16
5.5.2	<i>Test method</i>	16
5.5.3	<i>Test Result</i>	17
5.5.4	<i>Band edge-radiated</i>	31
	PHOTOGRAPHS OF THE TEST SETUP	35
	PHOTOGRAPHS OF THE EUT	36



Test Result Certification

Applicant's name: Waites Sensor Technologies Inc.

Address: 20 W 11th St, #200, Covington, KY 41011, USA

Manufacture's name: Waites Sensor Technologies Inc.

Address: 20 W 11th St, #200, Covington, KY 41011, USA

Product name: Integrated Sensor

Trademark: N/A

Model name: M001, M002, M003, M004

Standards: FCC Part 15.249

Test procedure: ANSI C63.10-2013

This device described above has been tested by Shenzhen Microtest Co., Ltd. and the test results show that the equipment under test (EUT) compliance with the FCC requirements. And it is applicable only to the tested sample identified in the report.

Tested by:

Demi Mu

Oct. 12, 2019

Reviewed by:

Blue Zheng

Oct. 12, 2019

Approved by:

Smith Chen

Oct. 12, 2019

1 General description

1.1 Feature of equipment under test (EUT)

Equipment:	Integrated Sensor
Trade Name:	N/A
Model Name:	M001
Serial Model:	M002, M003, M004
Model Difference:	All the model are the same circuit and RF module, different model is using different accelerometer. This is the only difference.
Operation Frequency:	2405 - 2470 MHz
Modulation Type:	GFSK
Antenna Type:	PCB antenna
Antenna Gain:	3.6dBi
Max. Field Strength:	111.37dBuV/m@3m
Power Source:	DC 3V from battery
Battery:	DC 3V 1500mAh
Hardware version:	M001-001, M002-001, M003-001, M004-001
Software version:	1.6.3

1.2 Operation channel list

Channel	Frequency(MHz)	Channel	Frequency(MHz)	Channel	Frequency(MHz)
0	2405	6	2435	12	2465
1	2410	7	2440	13	2470
2	2415	8	2445		
3	2420	9	2450		
4	2425	10	2455		
5	2430	11	2460		

1.3 Test Frequency Channel

Channel	Frequency(MHz)
Low	2405
Middle	2440
High	2470

1.4 EUT operation mode

During testing, RF test program provided by the manufacture to control the Tx operation followed the test requirement.



1.5 Ancillary equipment list

Equipment	Model	S/N	Manufacturer
/	/	/	/
/	/	/	/

2 Summary of Test Result

Test procedures according to the technical standards:

Item	FCC Part No.	Description of Test	Result
1	FCC Part15.203	Antenna Requirement	Pass
2	FCC Part15.207	AC power line conducted emission	N/A
3	FCC Part15.249(a)	Field strength of fundamental and harmonic emissions	Pass
4	FCC Part 15.215	20dB Bandwidth	Pass
5	FCC Part15.249(d)	Radiated spurious emission	Pass

3 Test Facilities and Accreditations

3.1 Test laboratory

Test Laboratory	Shenzhen Microtest Co., Ltd
Location	No.102A & 302A, East Block, Hengfang Industrial Park, Xingye Road, Xixiang, Bao'an District, Shenzhen, Guangdong, China
FCC Registration No.	448573

3.2 Environmental conditions

Temperature:	15°C~35°C
Humidity	20%~75%
Atmospheric pressure	98kPa~101kPa

3.3 Measurement uncertainty

The reported uncertainty of measurement $y \pm U$, where expanded uncertainty U is based on a standard uncertainty multiplied by a coverage factor of $k=2$, providing a level of confidence of approximately 95 %

RF frequency	1×10^{-7}
RF power, conducted	± 1 dB
Conducted emission(150kHz~30MHz)	± 2.5 dB
Radiated emission(30MHz~1GHz)	± 4.2 dB
Radiated emission (above 1GHz)	± 4.3 dB
Temperature	± 1 degree
Humidity	± 5 %

3.4 Test software

Software Name	Manufacturer	Model	Version
Bluetooth and WiFi Test System	Shenzhen JS tonscent co.,ltd	JS1120-3	2.5.77.0418

4 List of test equipment

Equipment No.	Equipment Name	Manufacturer	Model	Serial No.	Calibration date	Due date
MTI-E001	Spectrum Analyzer	Agilent	E4407B	MY41441082	2019/03/06	2020/03/07
MTI-E004	EMI Test Receiver	Rohde&schwarz	ESPI	1000314	2018/10/9	2019/10/08
MTI-E006	Broadband antenna	schwarabeck	VULB9163	872	2018/10/15	2019/10/14
MTI-E007	Horn antenna	schwarabeck	BBHA9120D	1201	2018/10/15	2019/10/14
MTI-E014	amplifier	America	8447D	3113A06150	2018/10/09	2019/10/8
MTI-E015	Conduction Immunity Signal Generator	Schloder	CDG6000	126A1343/2015	2018/10/09	2019/10/08
MTI-E016	Coupled decoupling network	Schloder	CND M2/M3	A2210332/2015	2018/10/09	2019/10/08
MTI-E034	amplifier	Agilent	8449B	3008A02400	2018/10/09	2019/10/08
MTI-E040	Spectrum analyzer	Agilent	N9020A	MY49100060	2019/03/06	2020/03/07
MTI-E041	Signal generator	Agilent	N5182A	MY49060455	2019/03/06	2020/03/07
MTI-E042	Analog signal generator	Agilent	E4421B	GB40051240	2018/10/09	2019/10/08
MTI-E043	Power probe	Dare Instruments	RPR3006W	16I00054SN016	2018/10/09	2019/10/08
MTI-E047	10dB attenuator	Mini-Circuits	UNAT-10+	15542	2018/10/09	2019/10/08
MTI-E049	spectrum analyzer	Rohde&schwarz	FSP-38	100019	2018/10/09	2019/10/08
MTI-E050	PSG Signal generator	Agilent	E8257D	MY46520873	2018/10/09	2019/10/08
MTI-E061	Active Loop Antenna 9kHz - 30MHz	Schwarzbeek	FMZB 1519 B	00044	2018/10/09	2019/10/08
MTI-E052	18-40GHz amplifier	Chengdu step Micro Technology	ZLNA-18-40G-21	1608001	2018/10/09	2019/10/08
MTI-E053	15-40G Antenna	Schwarzbeek	BBHA9170	BBHA9170582	2018/10/09	2019/10/08
Note: the calibration interval of the above test instruments is 12 months and the calibrations are traceable to international system unit (SI).						

This test report is valid for the tested samples only. It cannot be reproduced except in full without prior written consent of Shenzhen Microtest Co., Ltd.

5 Test Result

5.1 Antenna requirement

5.1.1 Standard requirement

FCC PART 15.203 and 15.247(b);

An intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the provisions of this section. The manufacturer may design the unit so that a broken antenna can be replaced by the user, but the use of a standard antenna jack or electrical connector is prohibited.

This requirement does not apply to carrier current devices or to devices operated under the provisions of §§15.211, 15.213, 15.217, 15.219, 15.221, or §15.236. Further, this requirement does not apply to intentional radiators that must be professionally installed, such as perimeter protection systems and some field disturbance sensors, or to other intentional radiators which, in accordance with §15.31(d), must be measured at the installation site. However, the installer shall be responsible for ensuring that the proper antenna is employed so that the limits in this part are not exceeded.

5.1.2 EUT Antenna

The antenna is a PCB antenna, which was permanently affixed to the device and un-replaced, complies with 15.203. In addition, the maximum antenna gain is 3.6dBi.



5.2 AC power line conducted emission

5.2.1 Limits

FCC §15.207;


For an intentional radiator that is designed to be connected to the public utility (AC) power line, the radio frequency voltage that is conducted back onto the AC power line on any frequency within the band 150 kHz to 30 MHz shall not exceed the limits in the following table, as measured using a 50 μ H/50 Ω line impedance stabilization network (LISN).

Frequency (MHz)	Quasi-peak	Average
0.15 -0.5	66 - 56 ^{note2}	56 - 46 ^{note2}
0.50 -5.0	56.00	46.00
5.0 -30.0	60.00	50.00

Note1: The tighter limit applies at the band edges.

Note2: The limit of " * " marked band means the limitation decreases linearly with the logarithm of the frequency in the range.

5.2.2 Test setup

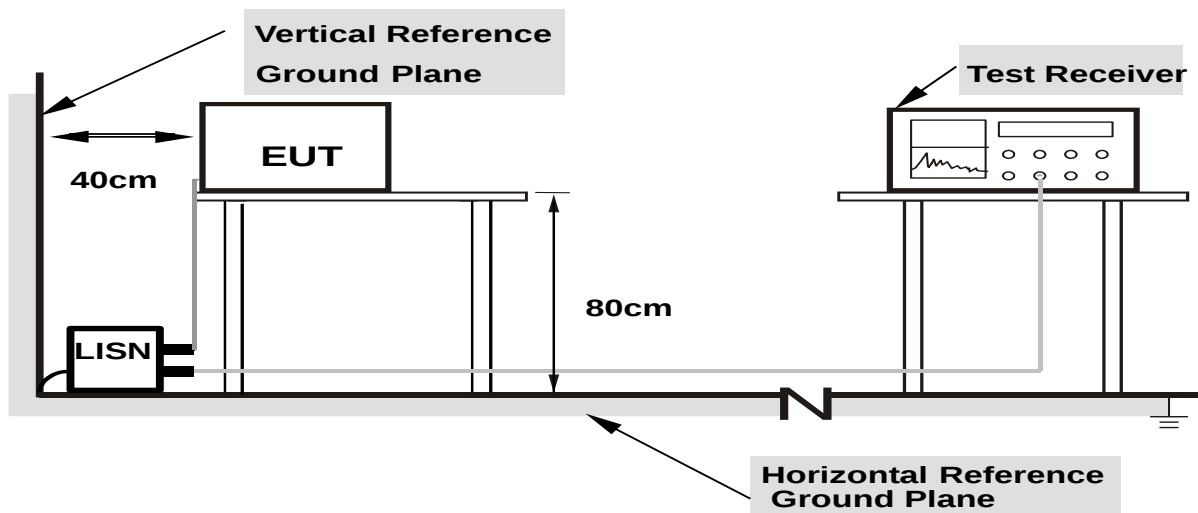

Note: 1.Support units were connected to second LISN.

2.Both of LISNs (AMN) are 80 cm from EUT and at least 80 from other units and other metal planes



5.2.3 Test procedure

a. EUT Operating Conditions

The EUT was configured for testing in a typical fashion (as a customer would normally use it). The EUT has been programmed to continuously transmit during test. This operating condition was tested and used to collect the included data.

b. The following table is the setting of the receiver

Receiver Parameters	Setting
Attenuation	10 dB
Start Frequency	0.15 MHz
Stop Frequency	30 MHz
IF Bandwidth	9 kHz

- c. The EUT was placed 0.8 meters from the horizontal ground plane with EUT being connected to the power mains through a line impedance stabilization network (LISN). All other support equipment's powered from additional LISN(s). The LISN provide 50 Ohm/ 50uH of coupling impedance for the measuring instrument.
- d. Interconnecting cables that hang closer than 40 cm to the ground plane shall be folded back and forth in the center forming a bundle 30 to 40 cm long.
- e. I/O cables that are not connected to a peripheral shall be bundled in the center. The end of the cable may be terminated, if required, using the correct terminating impedance. The overall length shall not exceed 1 m.
- f. LISN at least 80 cm from nearest part of EUT chassis.

For the actual test configuration, please refer to the related Item –EUT Test Photos.

5.2.4 Test results

Note: This device is battery powered and does not apply to conducted emission.

5.3 Field strength of fundamental and harmonic emissions

5.3.1 Limits

FCC §15.249(a);

The field strength of fundamental and harmonic emissions, measured at 3 m, shall not exceed 50 mV/m and 0.5 mV/m respectively.

The field strength limits shall be measured using an average detector, except for the fundamental emission in the frequency band 902-928 MHz, which is based on measurements using an International Special Committee on Radio Interference (CISPR) quasi-peak detector

Fundamental frequency	Field strength of fundamental (millivolts/meter)	Field strength of harmonics (microvolts/meter)
902-928 MHz	50	500
2400-2483.5 MHz	50	500
5725-5875 MHz	50	500
24.0-24.25 GHz	250	2500

Frequency	Field Strength(dBuv/m)	Detector
Fundamental	114	PK
Fundamental	94	AV
Harmonic emissions	74	PK
Harmonic emissions	54	AV

Note: 50mV/m=50000uv/m

$20 \cdot \log(50000 \text{ uV/m}) = 94 \text{ dBuV/m}$

PK limit reference 15.249(e)

5.3.2 Test Method

1. The EUT is placed on a turntable, which is 0.8m above ground plane for test frequency range below 1GHz, and 1.5m above ground plane for test frequency range above 1GHz.

2. EUT is set 3m away from the receiving antenna, which is varied from 1m to 4m to find out the highest emissions.

3. Use the following spectrum analyser settings:

Span = wide enough to fully capture the emission being measured, RBW = 1 MHz for $f \geq 1 \text{ GHz}$, 100 kHz for $f < 1 \text{ GHz}$, VBW $\geq$ RBW, Sweep = auto, Detector function = peak, Trace = max hold

4. Follow the guidelines in ANSI C63.4-2014 with respect to maximizing the emission by rotating the EUT, adjusting the measurement antenna height and polarization, etc. The peak reading of the emission, after being corrected by the antenna factor, cable loss, pre-amp gain, etc., is the peak field strength, submit this data. Each emission was to be maximized by changing the polarization of receiving antenna both horizontal and vertical.

5. The peak level, once corrected, must comply with the limit specified in Section 15.209. Set the RBW = 1MHz, VBW = 10Hz, Detector = PK for AV value, while maintaining all of the other instrument settings.

This test report is valid for the tested samples only. It cannot be reproduced except in full without prior written consent of Shenzhen Microtest Co., Ltd.



5.3.3 Test Result

Transmitter channel: 2405MHz

Frequency	Ant. Polarization	Emission level	Limits	Detector	Result
(MHz)	H / V	dBμV/m	dBμV/m		
2405	V	110.50	114	PK	
2405	H	111.37	114	PK	
2405	V	92.01	94	AV	
2405	H	91.85	94	AV	
4810	V	55.90	74	PK	
4810	H	56.42	74	PK	
4810	V	44.12	54	AV	
4810	H	45.37	54	AV	

Transmitter channel: 2440MHz

Frequency	Ant. Polarization	Emission level	Limits	Detector	Result
(MHz)	H / V	dBμV/m	dBμV/m		
2440	V	110.23	114	PK	
2440	H	111.24	114	PK	
2440	V	91.61	94	AV	
2440	H	91.72	94	AV	
4880	V	55.98	74	PK	
4880	H	56.75	74	PK	
4880	V	47.21	54	AV	
4880	H	47.19	54	AV	

Transmitter channel: 2470MHz

Frequency	Ant. Polarization	Emission level	Limits	Detector	Result
(MHz)	H / V	dBμV/m	dBμV/m		
2470	V	110.88	114	PK	
2470	H	111.14	114	PK	
2470	V	90.78	94	AV	
2470	H	91.78	94	AV	
4940	V	56.52	74	PK	
4940	H	57.50	74	PK	
4940	V	48.41	54	AV	
4940	H	47.98	54	AV	

5.4 20dB bandwidth

5.4.1 Limits

FCC §15.215(c)

Intentional radiators operating under the alternative provisions to the general emission limits, as contained in § 15.217 through 15.257 and in Subpart E of this part, must be designed to ensure that the 20 dB bandwidth of the emission, or whatever bandwidth may otherwise be specified in the specific rule section under which the equipment operates, is contained within the frequency band designated in the rule section under which the equipment is operated.

5.4.2 Test method

Use the following spectrum analyzer settings:

For 20 dB bandwidth

Span = approximately 2 to 3 times the 20 dB bandwidth,

RBW = 1% to 5% of the 20 dB bandwidth

VBW ≥ RBW

Sweep = auto

Detector function = peak

Trace = max hold

The EUT should be transmitting at its maximum data rate. Allow the trace to stabilize. Use the marker-to-peak function to set the marker to the peak of the emission. Use the marker-delta function to measure 20 dB down one side of the emission. Reset the marker-delta function, and move the marker to the other side of the emission, until it is (as close as possible to) even with the reference marker level. The marker-delta reading at this point is the 20 dB bandwidth and 99% occupied bandwidth of the emission

5.4.3 Test result

Frequency (MHz)	20dB bandwidth (MHz)
2405	2.527
2440	2.526
2470	2.532


Test plots



This test report is valid for the tested samples only. It cannot be reproduced except in full without prior written consent of Shenzhen Microtest Co., Ltd.



2470MHz

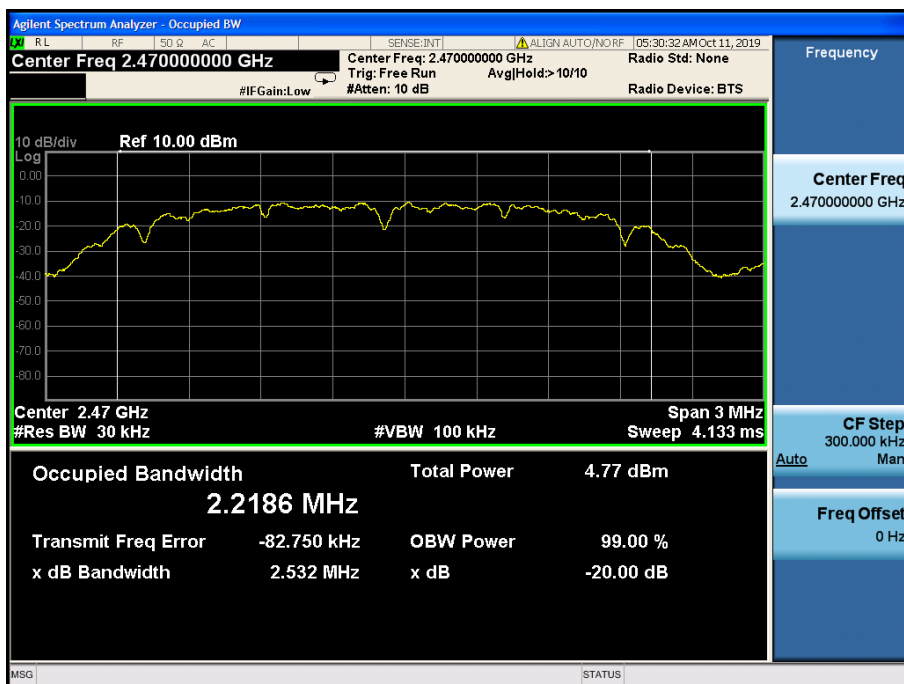



5.5 Radiated spurious emission

5.5.1 Limit

FCC PART 15.249(a);

Except as provided in paragraph (a) of this section, the field strength of emissions from intentional radiators operated within these frequency bands shall comply with the following:

Frequency (MHz)	Field Strength of Fundamental (mV/m)	Field Strength of Harmonics ($\mu\text{V/m}$)
902-928	50	500
2400-2483.5	50	500
5725-5875	50	500

Emissions radiated outside of the specified frequency bands, except for harmonics, shall be attenuated by at least 50 dB below the level of the fundamental or to the general radiated emission limits in §15.209, whichever is the lesser attenuation.

According to FCC section 15.209 (a), except as provided elsewhere in this subpart, the emissions from an intentional radiator shall not exceed the field strength levels specified in the following table:

Frequency (MHz)	Field Strength ($\mu\text{V/m}$)	Measurement Distance (m)
0.009 - 0.490	$2400/F(\text{kHz})$	300
0.490 - 1.705	$24000/F(\text{kHz})$	30
1.705 - 30.0	30	30
30 - 88	100	3
88 - 216	150	3
216 - 960	200	3
Above 960	500	3

5.5.2 Test method


- The EUT is placed on a turntable, which is 0.8m above ground plane for test frequency range below 1GHz, and 1.5m above ground plane for test frequency range above 1GHz.
- EUT is set 3m away from the receiving antenna, which is varied from 1m to 4m to find out the highest emissions.
- Use the following spectrum analyser settings:
 - Span = wide enough to fully capture the emission being measured
 - RBW = 1 MHz for $f \geq 1\text{GHz}$, 100 kHz for $f < 1\text{GHz}$
 - VBW $\geq$ RBW, Sweep = auto
 - Detector function = peak
 - Trace = max hold
- Follow the guidelines in ANSI C63.4-2014 with respect to maximizing the emission by rotating the EUT, adjusting the measurement antenna height and polarization, etc. The peak reading of the emission, after being corrected by the antenna factor, cable loss, pre-amp gain, etc., is the peak field strength, submit this data. Each emission was to be maximized by changing the polarization of receiving antenna both horizontal and vertical.
- The peak level, once corrected, must comply with the limit specified in Section 15.209. Set the RBW = 1MHz, VBW = 10Hz, Detector = PK for AV value, while maintaining all of the other instrument settings.

5.5.3 Test Result

Radiation (30MHz – 1GHz)

Note: The high, medium and low channels have been tested. The report only shows the worst mode. The worst mode is Low Channel 2405MHz.


EUT:	Integrated Sensor	Model name:	M001
Pressure:	1010hPa	Polarization:	H
Test voltage:	DC 3V from battery	Test mode:	TX (2405MHz)

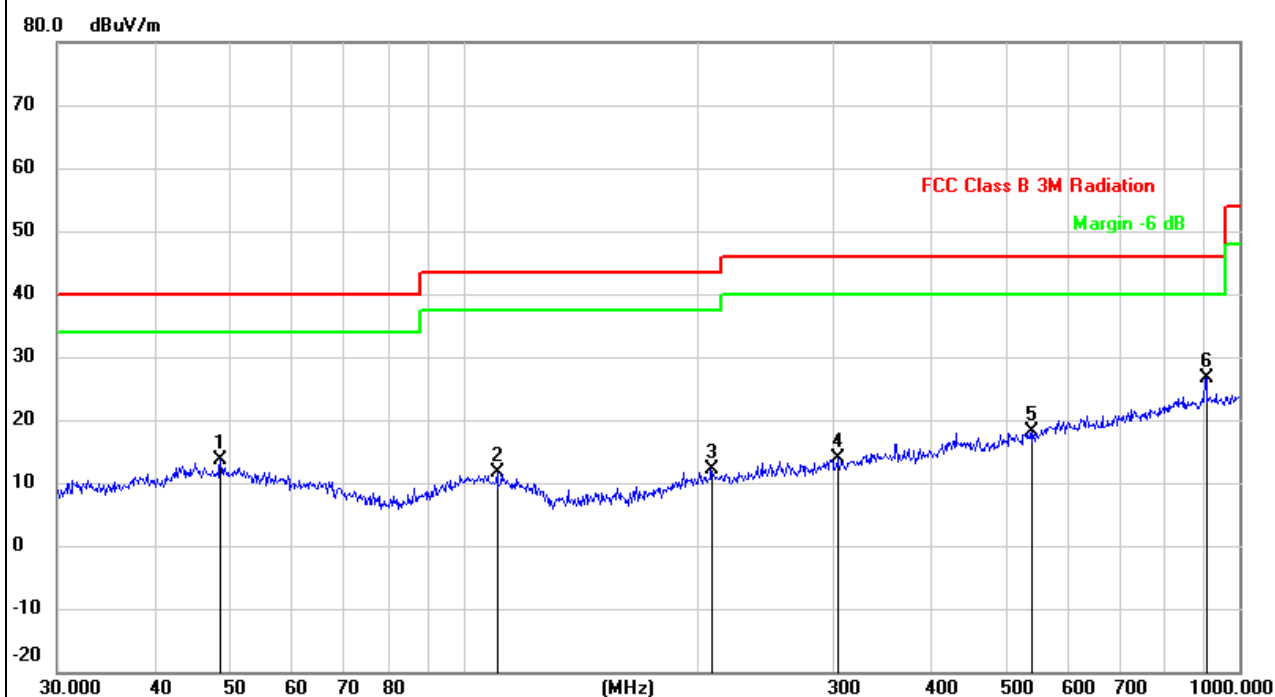

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dBuV/m	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector
1		48.6719	26.29	-12.54	13.75	40.00	-26.25	QP
2		110.5687	25.48	-13.87	11.61	43.50	-31.89	QP
3		208.5803	25.12	-13.00	12.12	43.50	-31.38	QP
4		303.5437	24.67	-10.82	13.85	46.00	-32.15	QP
5		541.3725	25.91	-7.84	18.07	46.00	-27.93	QP
6	*	906.4824	28.95	-2.32	26.63	46.00	-19.37	QP



EUT:	Integrated Sensor	Model name:	M001
Pressure:	1010hPa	Polarization:	V
Test voltage:	DC 3V from battery	Test mode:	TX (2405MHz)

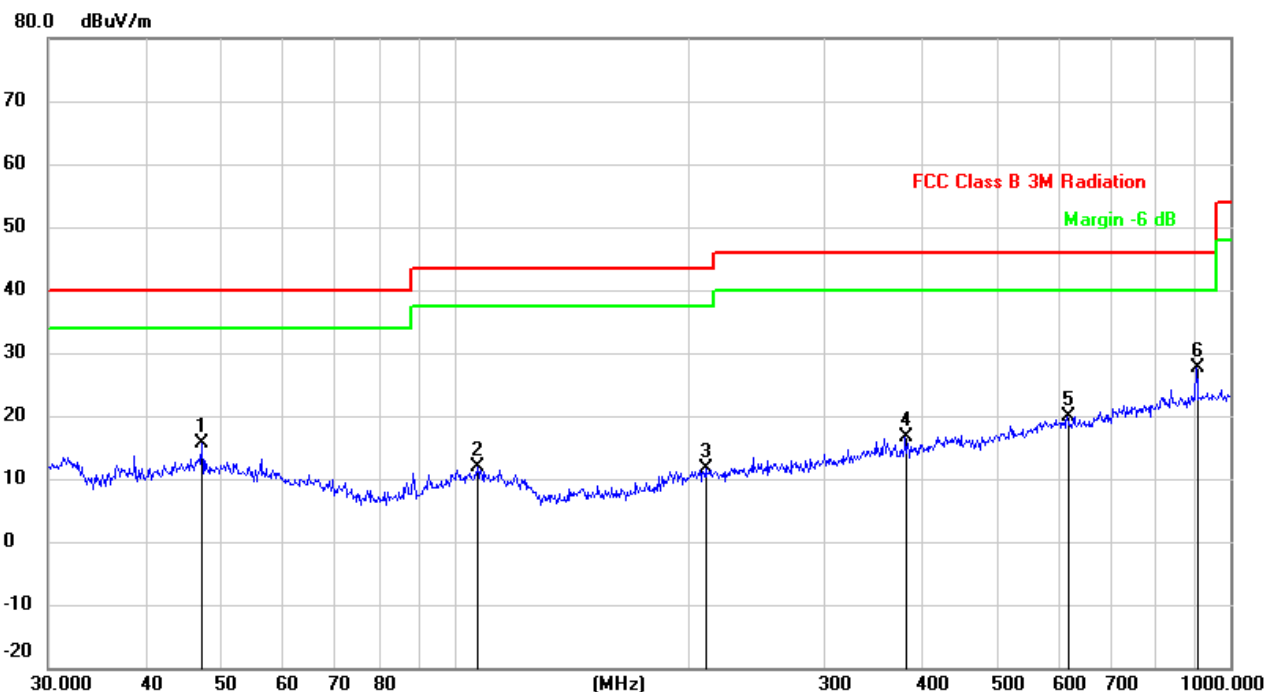


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dBuV/m	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector
1		47.3255	28.28	-12.55	15.73	40.00	-24.27	QP
2		107.1337	25.63	-13.81	11.82	43.50	-31.68	QP
3		210.7860	24.59	-12.98	11.61	43.50	-31.89	QP
4		381.2487	26.66	-9.91	16.75	46.00	-29.25	QP
5		616.3718	26.32	-6.39	19.93	46.00	-26.07	QP
6	*	903.3094	30.04	-2.35	27.69	46.00	-18.31	QP




Above 1GHz:

Note: Test with 2.4GHz-2.4835GHz notch Filter

EUT:	Integrated Sensor	Model name:	M001
Pressure:	1010hPa	Polarization:	H
Test voltage :	DC 3V from battery	Test mode:	TX
Test channel:	2405MHz		

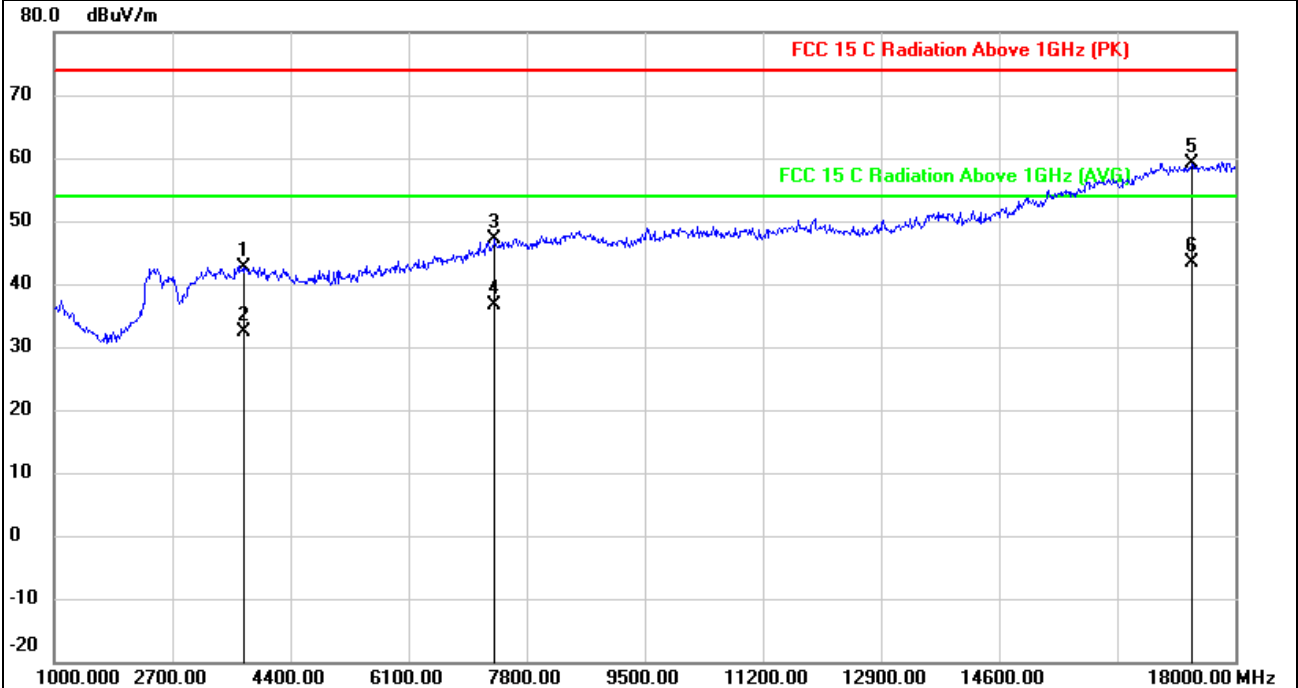


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	
		MHz	dBuV	dBuV/m	dBuV/m	dBuV/m	dB	Detector
1		3720.000	58.00	-15.38	42.62	74.00	-31.38	peak
2		3720.000	47.68	-15.38	32.30	54.00	-21.70	AVG
3		7341.000	52.37	-5.20	47.17	74.00	-26.83	peak
4		7341.000	41.90	-5.20	36.70	54.00	-17.30	AVG
5		17371.000	58.04	1.08	59.12	74.00	-14.88	peak
6	*	17371.000	42.32	1.08	43.40	54.00	-10.60	AVG

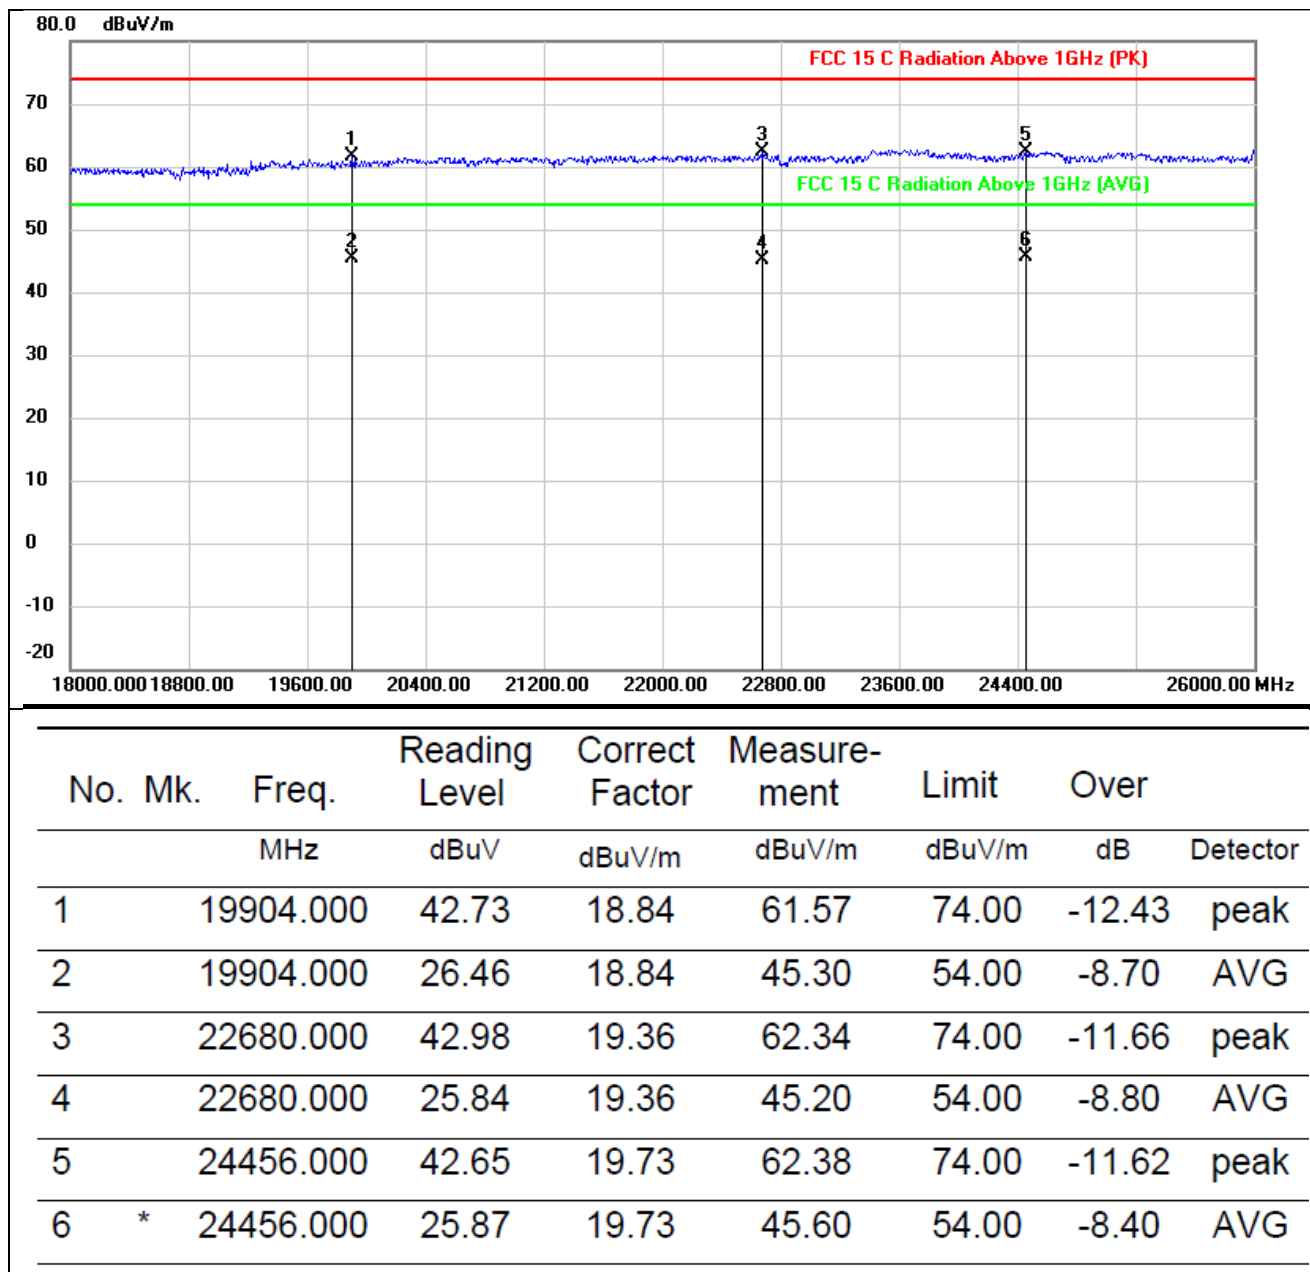




EUT:	Integrated Sensor	Model name:	M001
Pressure:	1010hPa	Polarization:	V
Test voltage :	DC 3V from battery	Test mode:	TX
Test channel:	2405MHz		

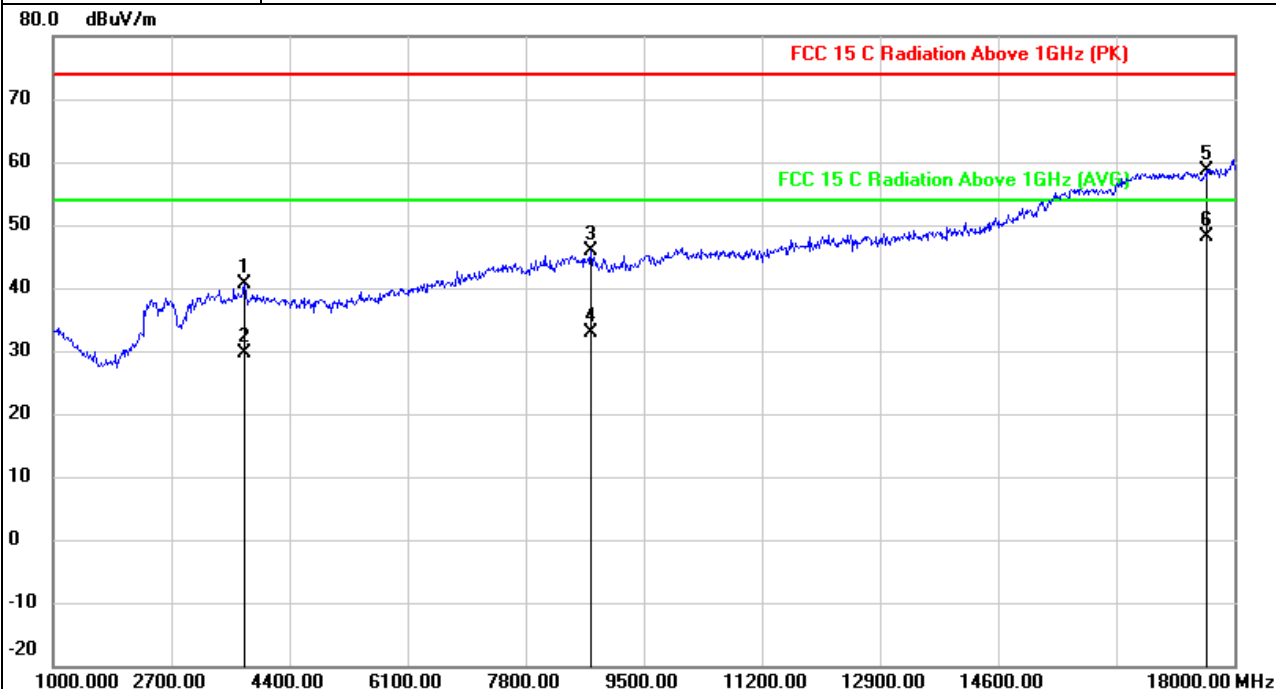


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	
		MHz	dBuV	dBuV/m	dBuV/m	dBuV/m	dB	Detector
1		3754.000	55.84	-15.30	40.54	74.00	-33.46	peak
2		3754.000	45.00	-15.30	29.70	54.00	-24.30	AVG
3		8735.000	49.94	-4.18	45.76	74.00	-28.24	peak
4		8735.000	37.18	-4.18	33.00	54.00	-21.00	AVG
5		17609.000	55.82	2.92	58.74	74.00	-15.26	peak
6	*	17609.000	45.22	2.92	48.14	54.00	-5.86	AVG

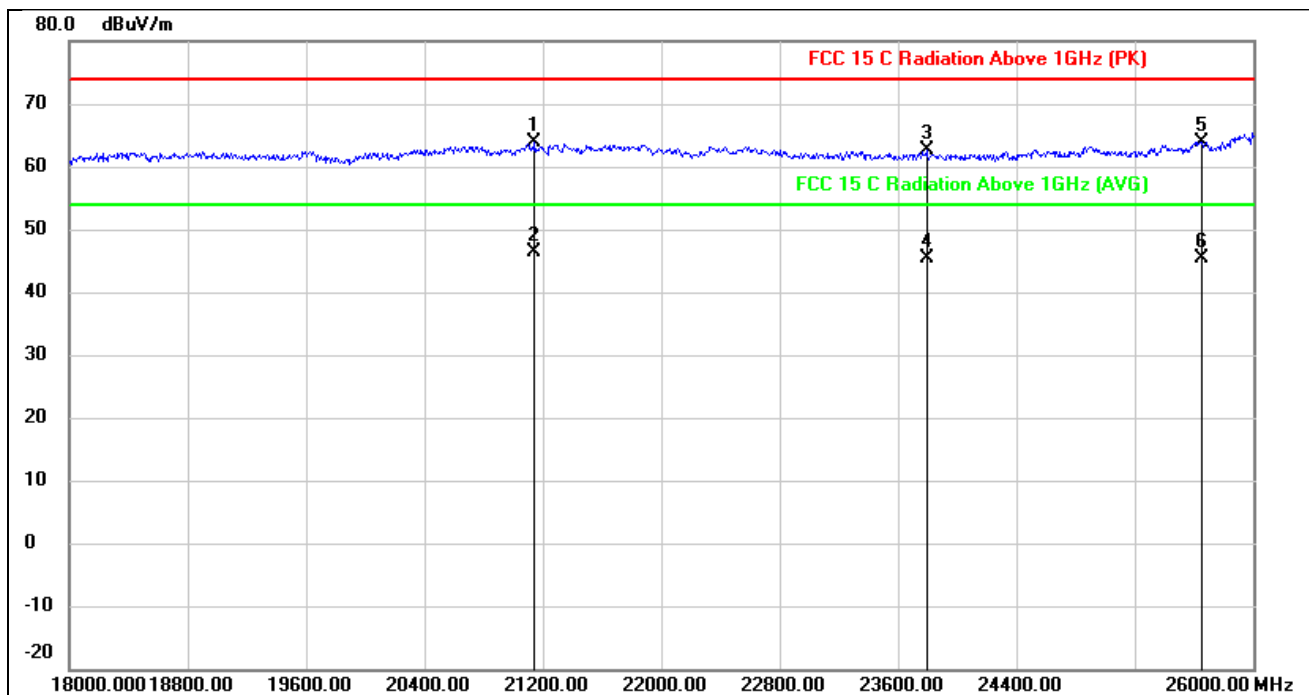


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dBuV/m	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector
1		21144.000	44.84	19.05	63.89	74.00	-10.11	peak
2	*	21144.000	27.25	19.05	46.30	54.00	-7.70	AVG
3		23792.000	43.05	19.59	62.64	74.00	-11.36	peak
4		23792.000	25.81	19.59	45.40	54.00	-8.60	AVG
5		25656.000	44.58	19.40	63.98	74.00	-10.02	peak
6		25656.000	25.90	19.40	45.30	54.00	-8.70	AVG



EUT:	Integrated Sensor	Model name:	M001
Pressure:	1010hPa	Polarization:	H
Test voltage :	DC 3V from battery	Test mode:	TX
Test channel:	2440MHz		

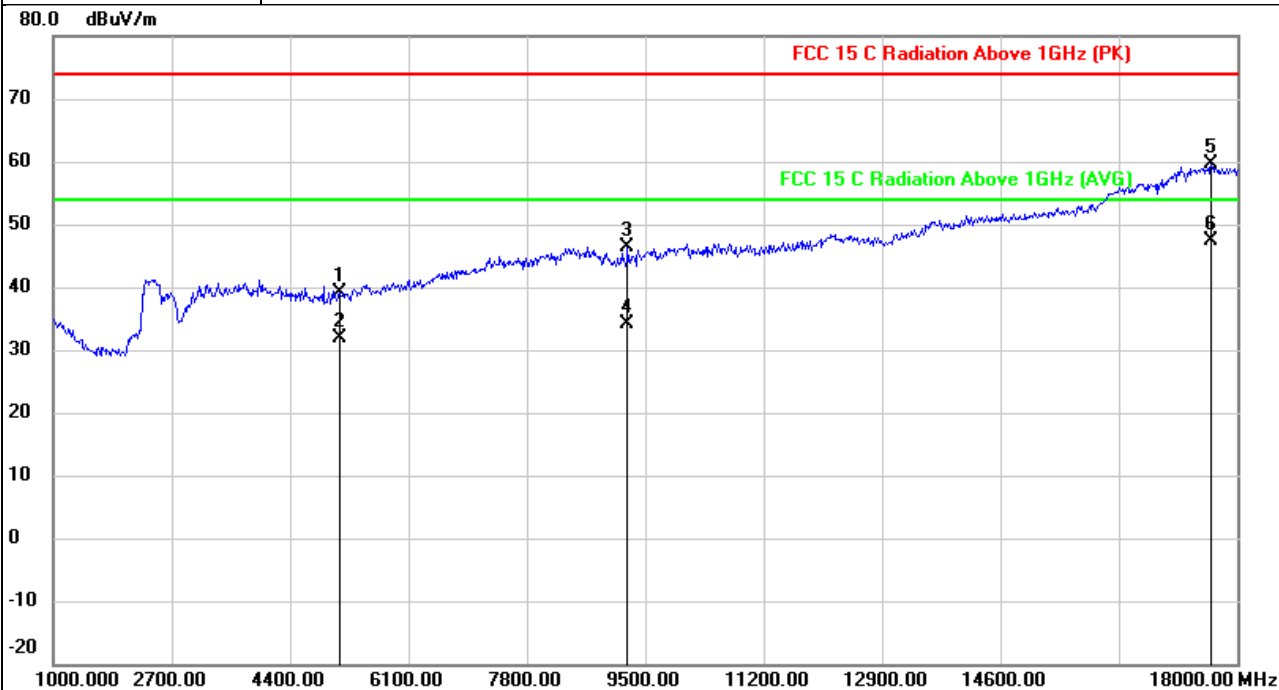


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dBuV/m	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector
1		5114.000	50.44	-11.23	39.21	74.00	-34.79	peak
2		5114.000	43.13	-11.23	31.90	54.00	-22.10	AVG
3		9245.000	50.61	-4.25	46.36	74.00	-27.64	peak
4		9245.000	38.35	-4.25	34.10	54.00	-19.90	AVG
5		17626.000	56.58	3.05	59.63	74.00	-14.37	peak
6	*	17626.000	44.34	3.05	47.39	54.00	-6.61	AVG

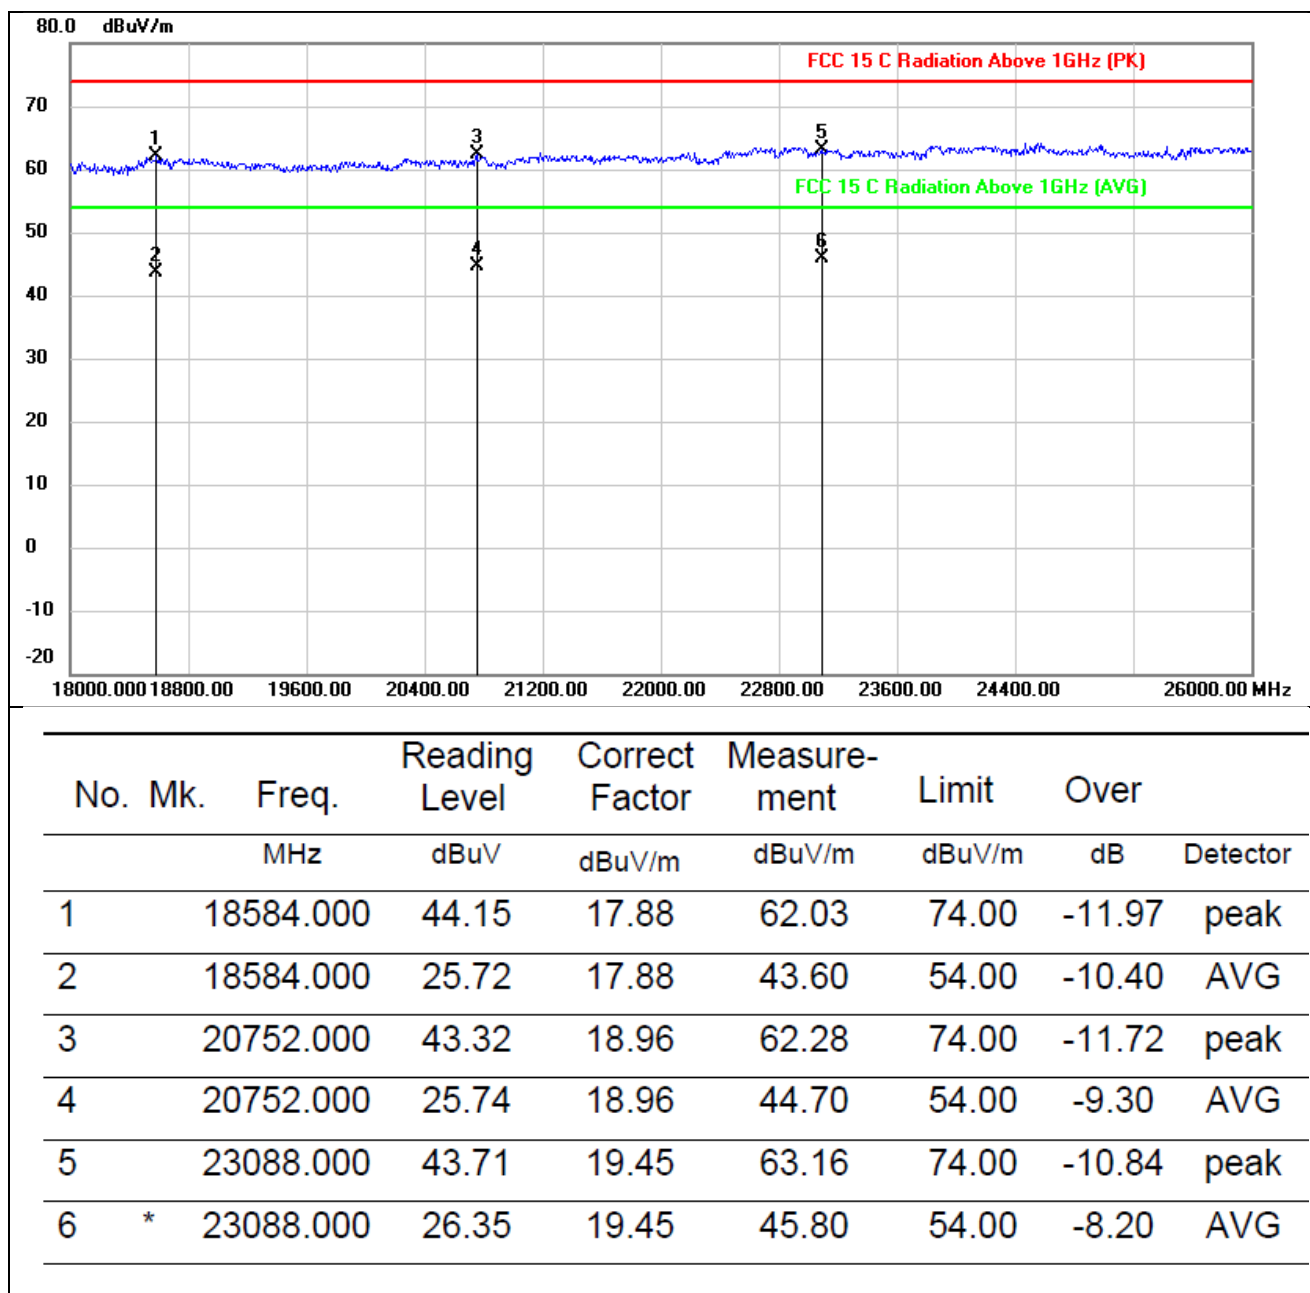




EUT:	Integrated Sensor	Model name:	M001
Pressure:	1010hPa	Polarization:	V
Test voltage :	DC 3V from battery	Test mode:	TX
Test channel:	2440MHz		

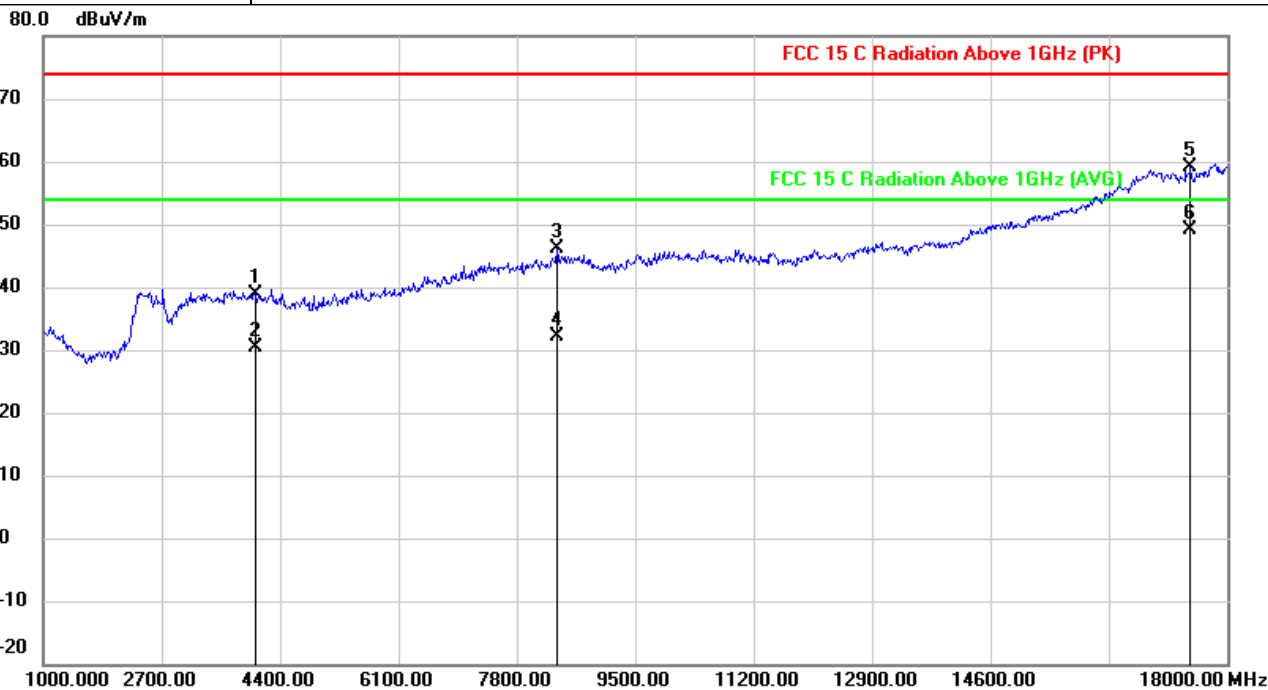


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	
		MHz	dBuV	dBuV/m	dBuV/m	dBuV/m	dB	Detector
1		4043.000	53.52	-14.60	38.92	74.00	-35.08	peak
2		4043.000	45.00	-14.60	30.40	54.00	-23.60	AVG
3		8378.000	50.06	-3.96	46.10	74.00	-27.90	peak
4		8378.000	36.06	-3.96	32.10	54.00	-21.90	AVG
5		17473.000	57.32	1.93	59.25	74.00	-14.75	peak
6	*	17473.000	47.32	1.93	49.25	54.00	-4.75	AVG

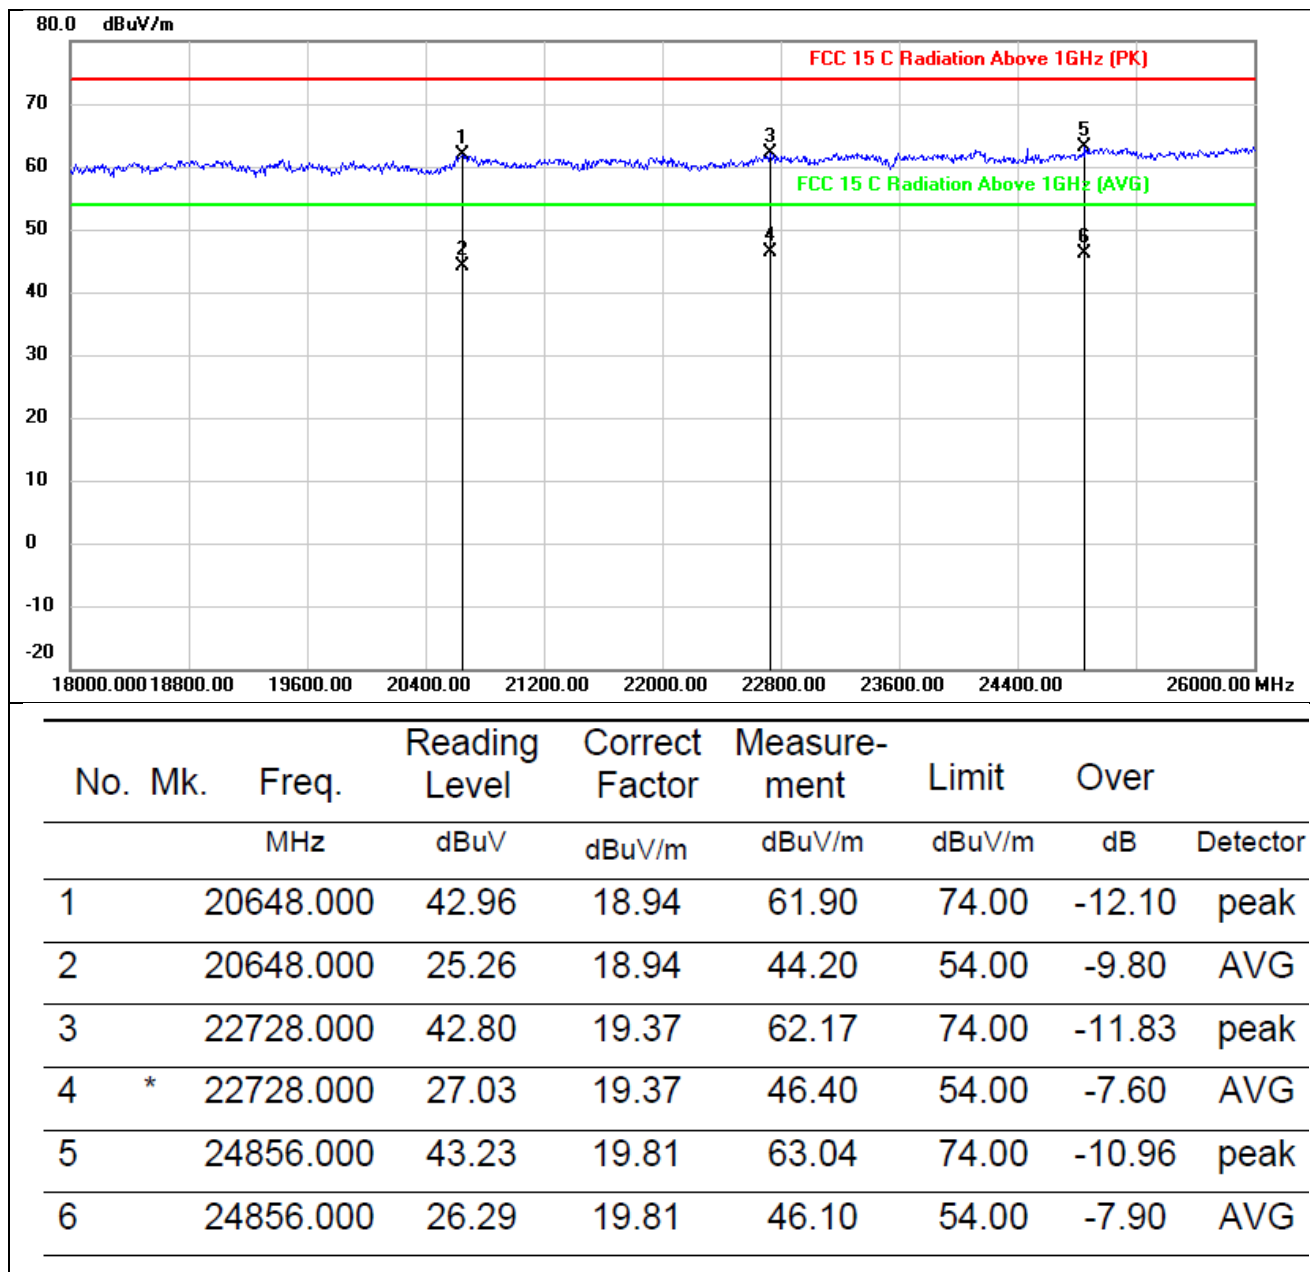




EUT:	Integrated Sensor	Model name:	M001
Pressure:	1010hPa	Polarization:	H
Test voltage :	DC 3V from battery	Test mode:	TX
Test channel:	2470MHz		

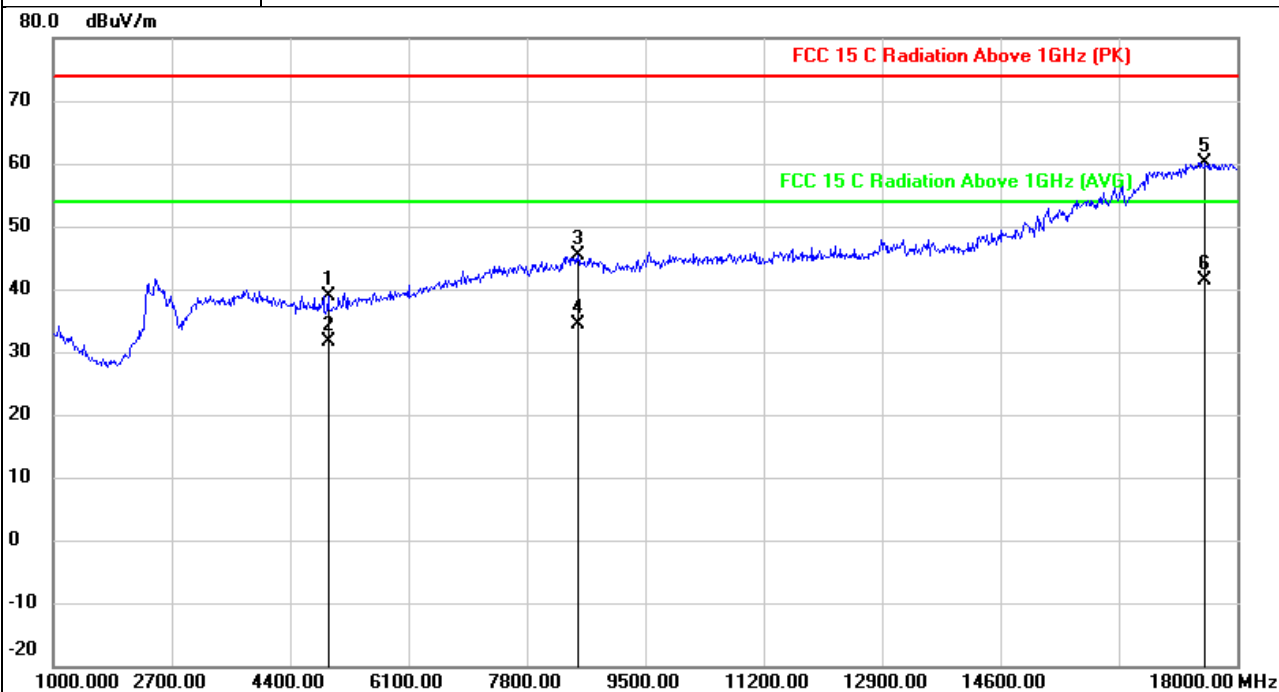


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dBuV/m	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector
1		4944.000	50.64	-11.70	38.94	74.00	-35.06	peak
2		4944.000	43.30	-11.70	31.60	54.00	-22.40	AVG
3		8531.000	49.06	-3.76	45.30	74.00	-28.70	peak
4		8531.000	38.16	-3.76	34.40	54.00	-19.60	AVG
5		17541.000	57.79	2.44	60.23	74.00	-13.77	peak
6	*	17541.000	38.93	2.44	41.37	54.00	-12.63	AVG

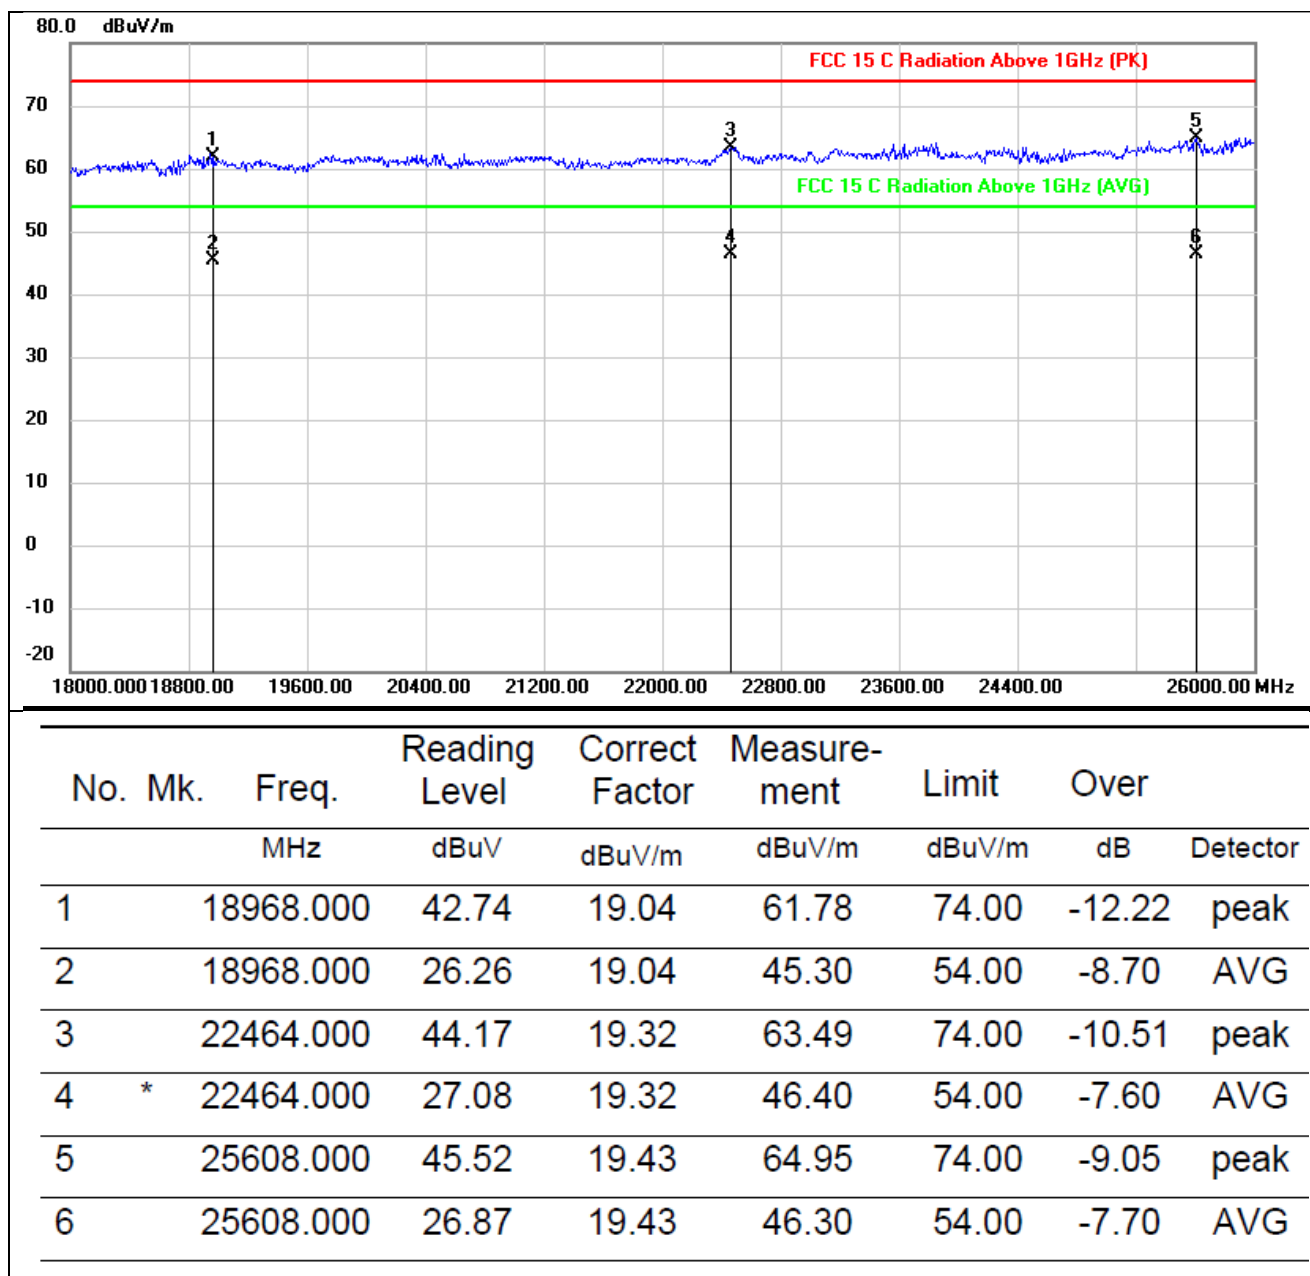




EUT:	Integrated Sensor	Model name:	M001
Pressure:	1010hPa	Polarization:	V
Test voltage :	DC 3V from battery	Test mode:	TX
Test channel:	2470MHz		

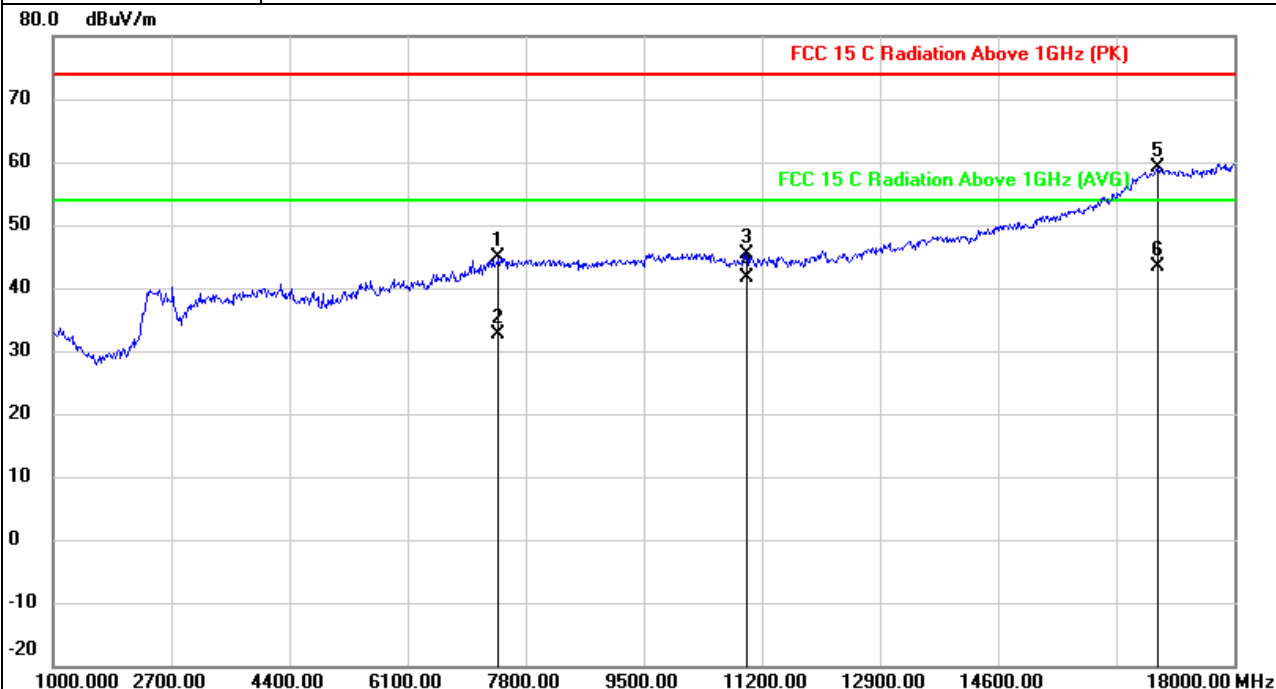

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	
		MHz	dBuV	dBuV/m	dBuV/m	dBuV/m	dB	Detector
1		7409.000	49.81	-4.97	44.84	74.00	-29.16	peak
2		7409.000	37.57	-4.97	32.60	54.00	-21.40	AVG
3		10979.000	47.33	-1.88	45.45	74.00	-28.55	peak
4		10979.000	43.48	-1.88	41.60	54.00	-12.40	AVG
5		16895.000	61.34	-2.30	59.04	74.00	-14.96	peak
6	*	16895.000	45.80	-2.30	43.50	54.00	-10.50	AVG

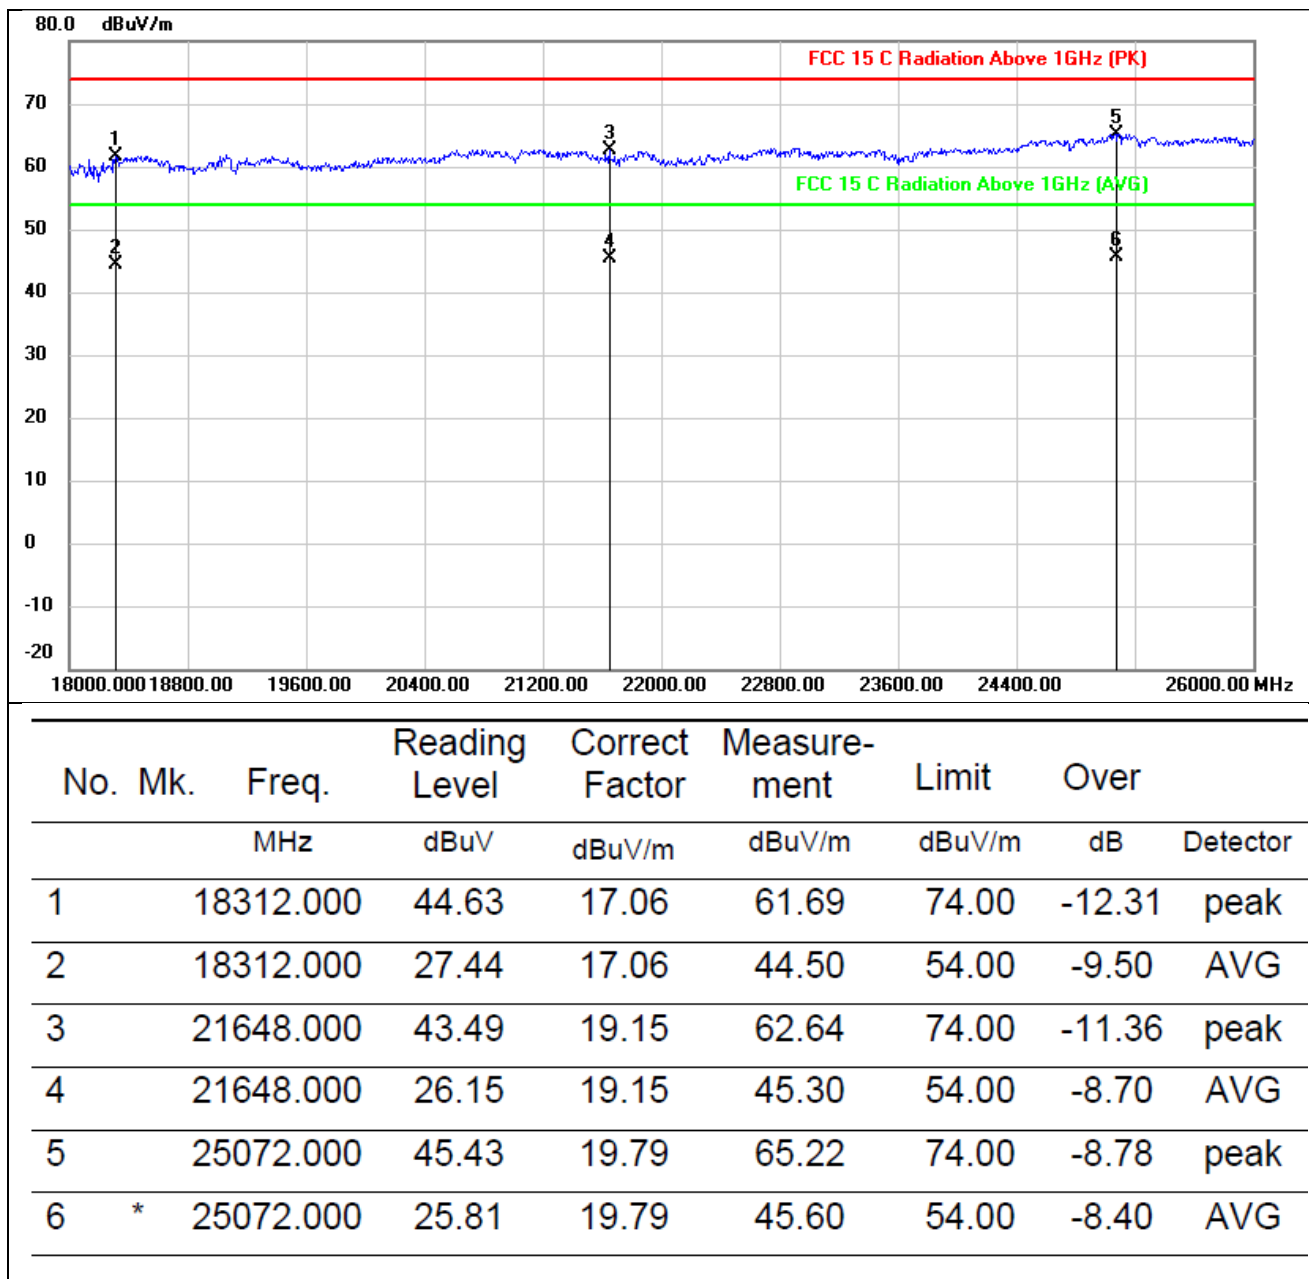





5.5.4 Band edge-radiated

Note: (1) All Readings are Peak Value (VBW=3MHz) and AV Value (VBW=10Hz).
(2) Emission Level= Antenna Factor + Cable Loss + Read Level - Preamp Factor
(3) All other emissions more than 20dB below the limit.


All the modulation modes have been tested, and the worst result was report as below:

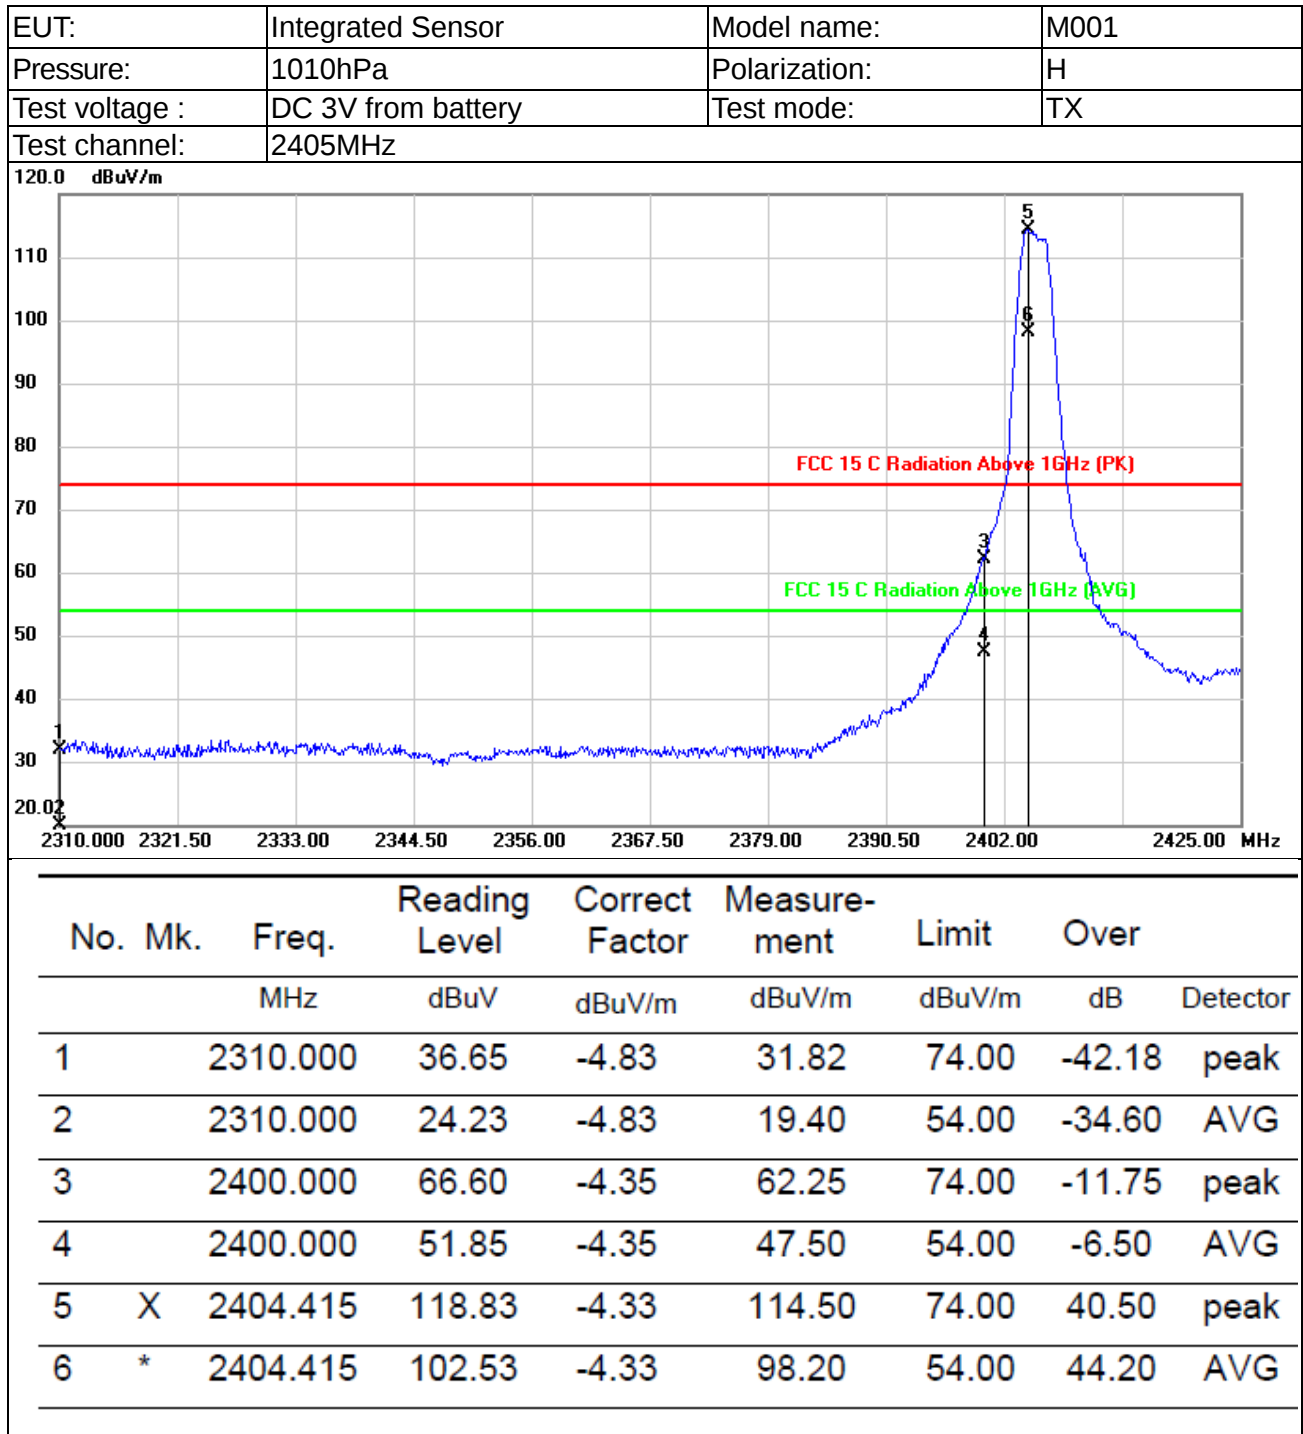

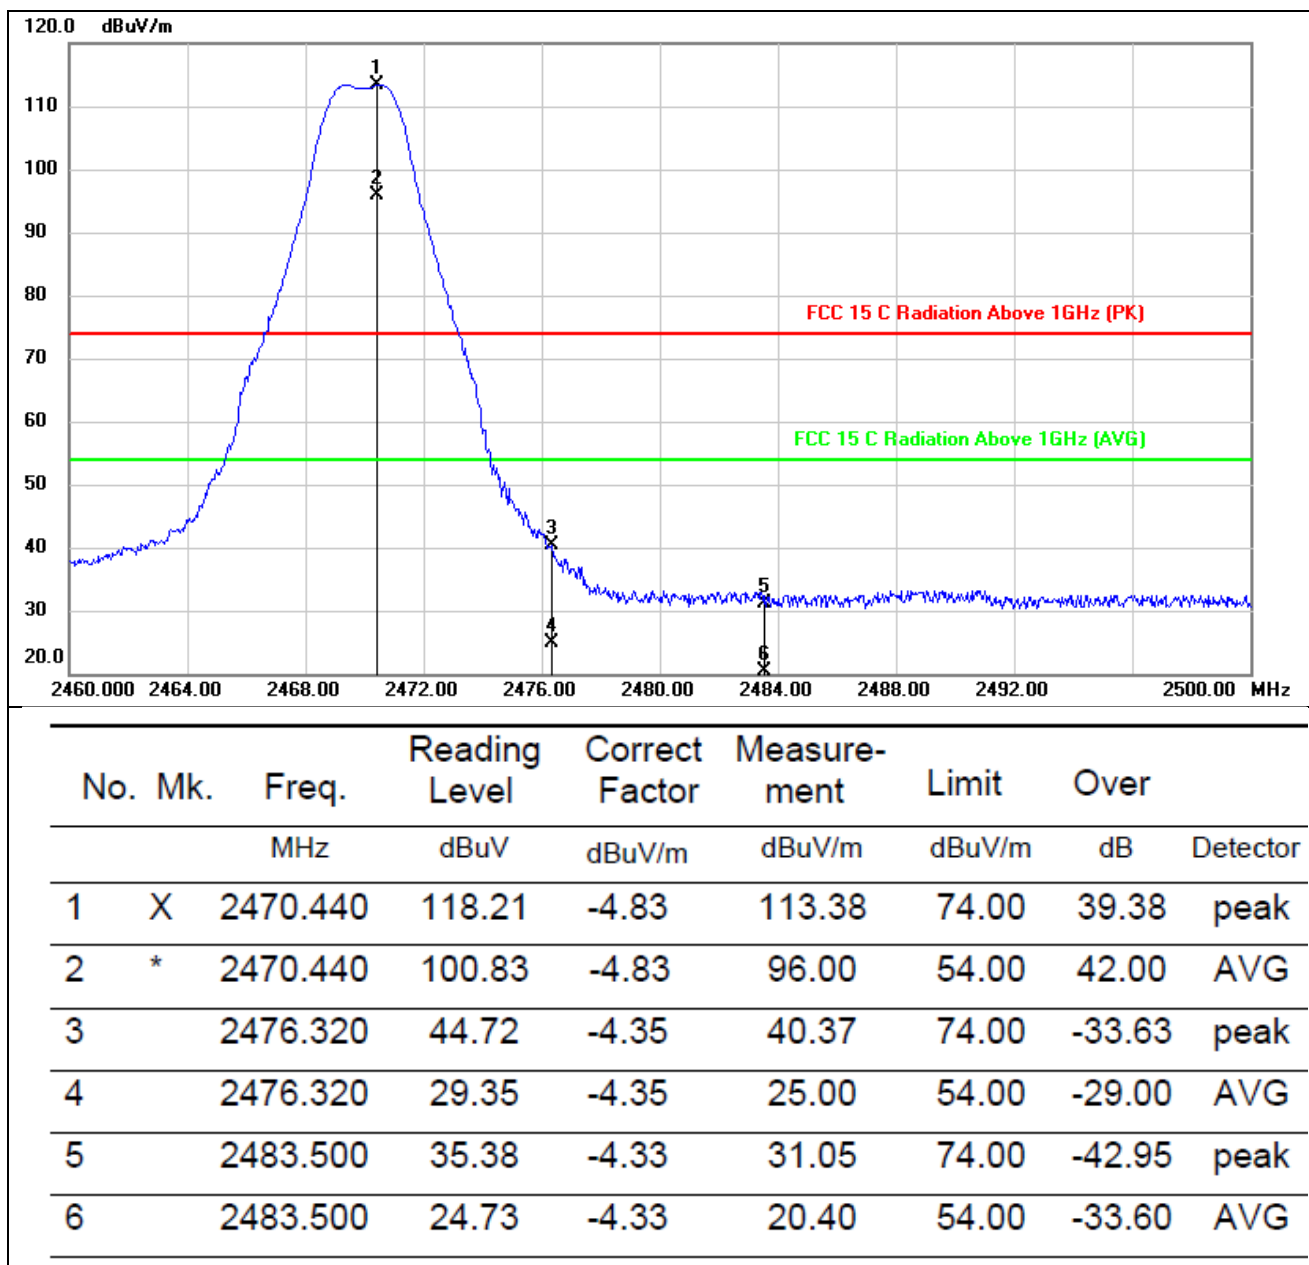




EUT:	Integrated Sensor	Model name:	M001
Pressure:	1010hPa	Polarization:	V
Test voltage :	DC 3V from battery	Test mode:	TX
Test channel:	2470MHz		

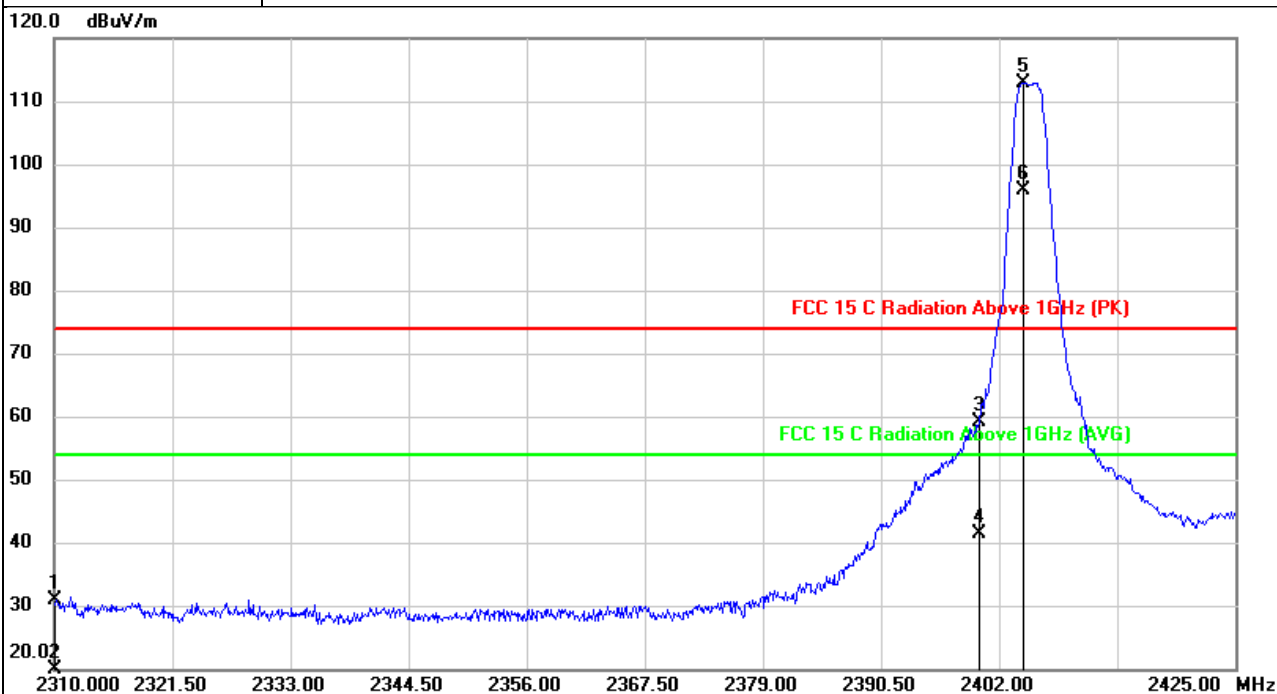


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	
		MHz	dBuV	dBuV/m	dBuV/m	dBuV/m	dB	Detector
1		2310.000	35.65	-4.83	30.82	74.00	-43.18	peak
2		2310.000	22.33	-4.83	17.50	54.00	-36.50	AVG
3		2400.000	63.60	-4.35	59.25	74.00	-14.75	peak
4		2400.000	45.65	-4.35	41.30	54.00	-12.70	AVG
5	X	2404.415	115.70	-4.33	111.37	74.00	39.00	peak
6	*	2404.415	96.18	-4.33	91.85	54.00	41.80	AVG

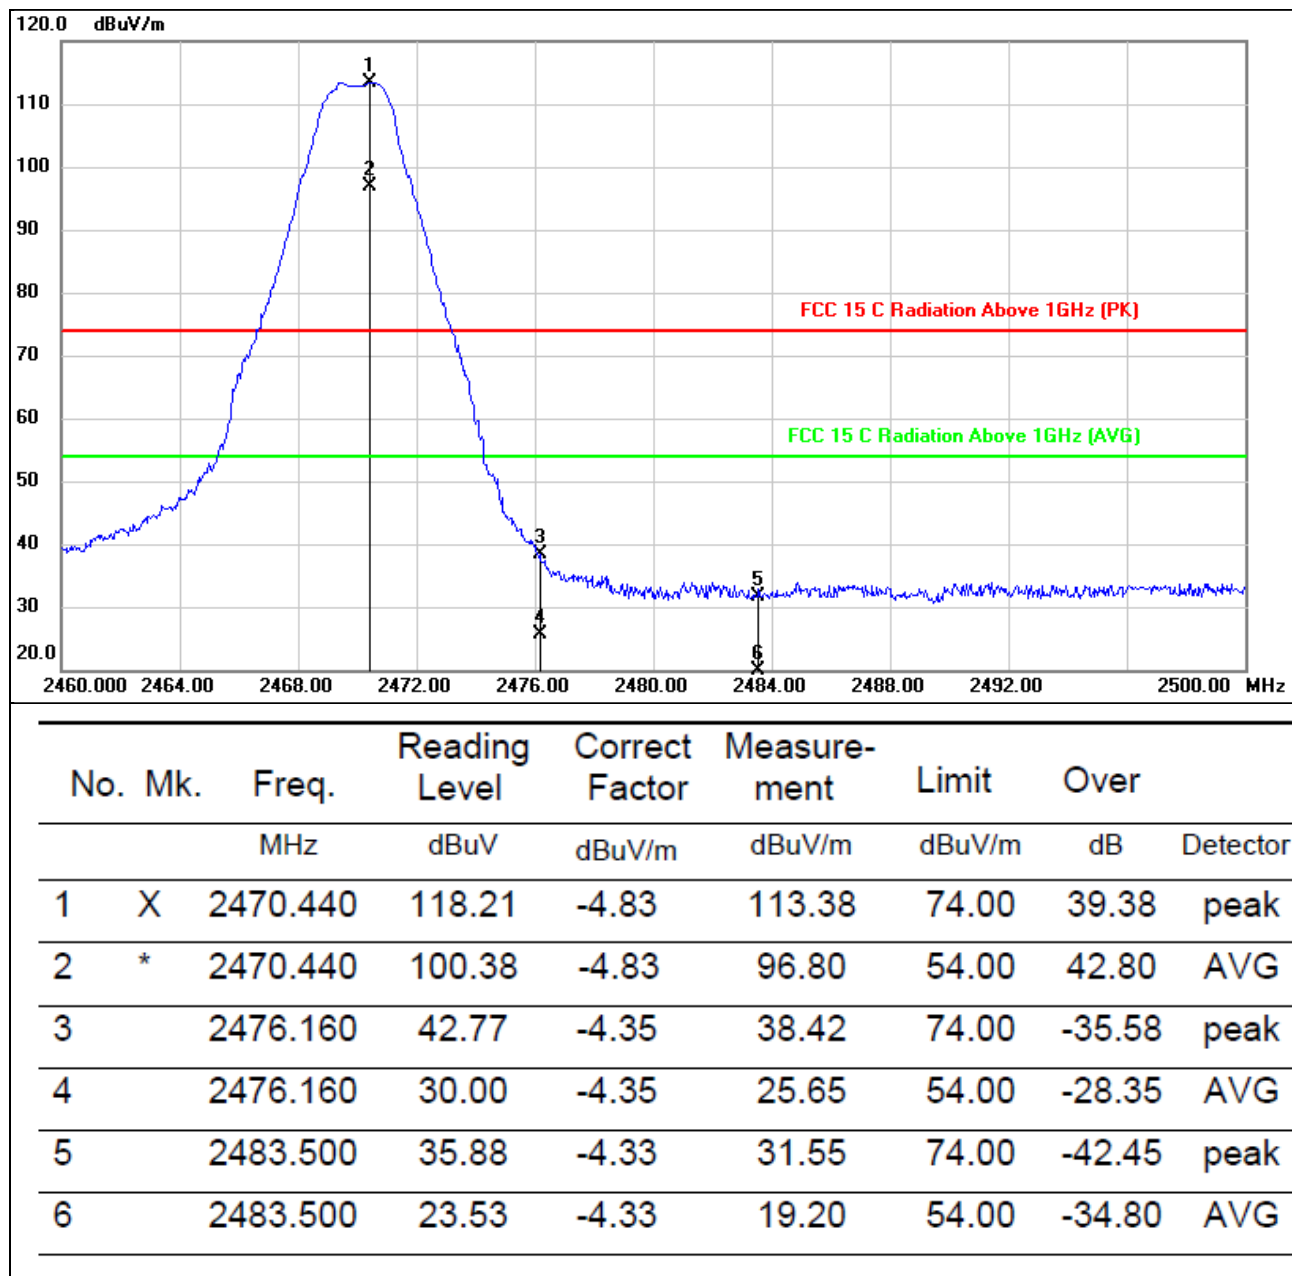




Photographs of the Test Setup

Radiated emission – below 1GHz

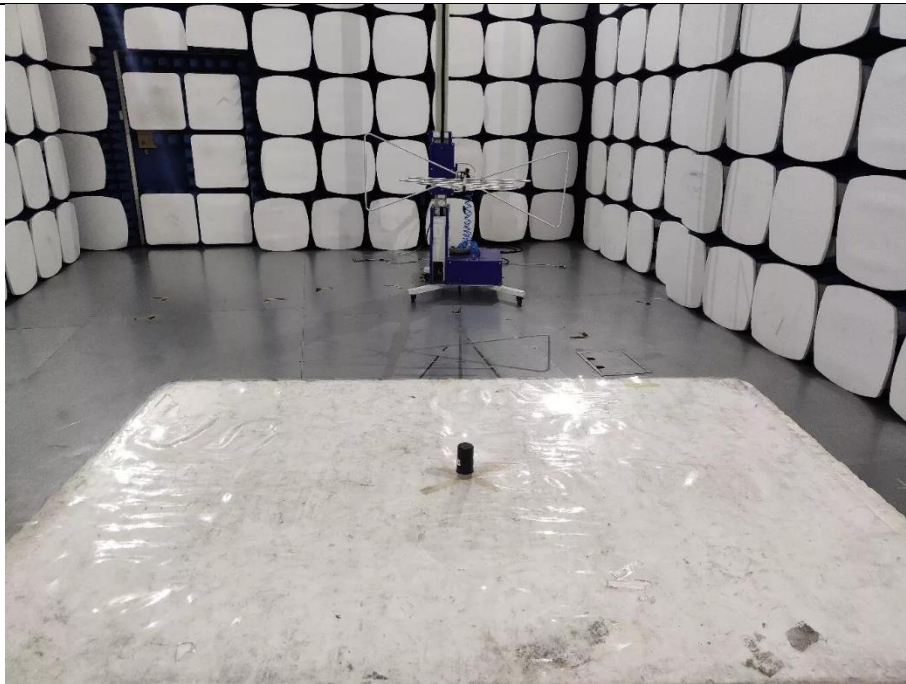

Radiated emission – above 1GHz

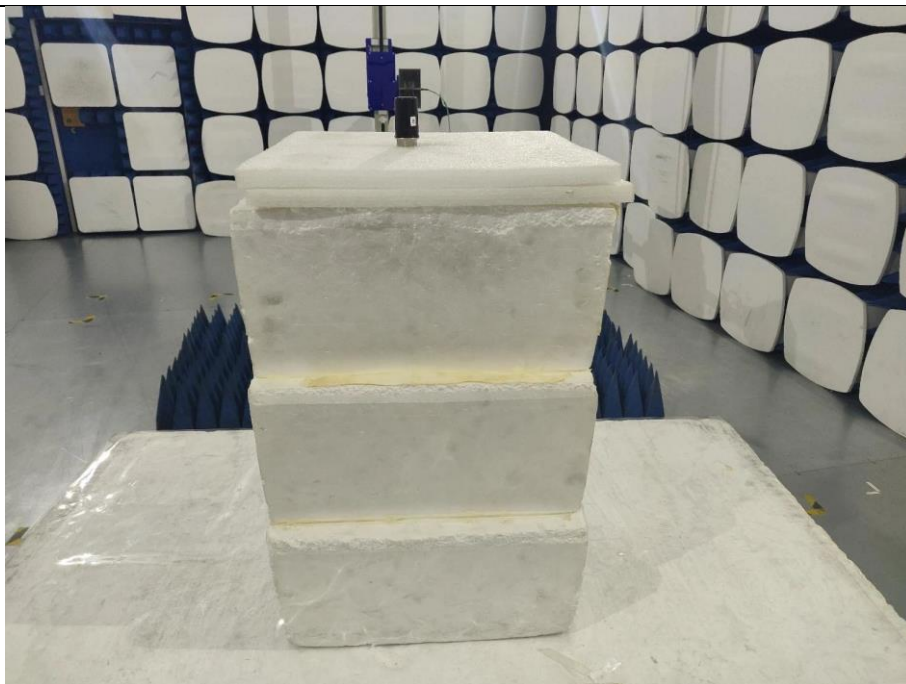



Photographs of the EUT

See the APPENDIX 1: EUT PHOTO in the report No.: MTi19061006-3E1-1.

----END OF REPORT----