

Regulatory WLAN Antenna Information

Platform information										
Brand	ODM		RMN	Intel platform (ex: Yes, No or NA)		Platform type (ex: regular NB, convertible PC, AIO...etc)		*SAR minimum separation (mm)		
HP Inc.	Compal		TPN-C164	Yes		Notebook PC		5.32mm		
*****Please fill in exact product model name and make sure the model name is visible on product cover or any parts for end users recognize for authority inspection.										
Antenna information										
Vendor		Type		Antenna Part number (Main/Tx1)			Antenna Part number (Aux/Tx2)			
Wistron Neweb Corporation		PIFA		81EABP15.G41			81EABP15.G42			
Peak gain w/ cable loss (dBi)*										
	2.4GHz 2400-2483.5 MHz	5.2GHz 5150-5250MHz	5.3GHz 5250-5350MHz	5.6GHz 5470-5725MHz	5.8GHz 5725-5850MHz	5.9GHz 5850-5895MHz	6.2GHz 5925-6425MHz	6.5GHz 6425-6525MHz	6.7GHz 6525-6875MHz	7.0 GHz 6875-7125MHz
Main	0.79	-0.53	-0.12	0.66	1.06	0.71	0.77	0.34	0.04	-0.4
Aux	0.16	0.78	0.32	-0.02	0.16	0.75	0.64	-0.49	1.29	0.66
Module Information										
Model		Form factor and suffixes								
RTL8852CE		Realtek Champagne 8852CE Wi-Fi 6E +Bluetooth 5.3 M.2 2230 PCI-e+USB WW WLAN								

Vendor: Wistron NeWeb Corporation Headquarters (Taiwan)	
Tel: +886-3-666-7799	
Fax: +886-3-666-7711	
Address: Wistron NeWeb Corporation Headquarters (Taiwan) Add: 20 Park Avenue II (or Yuanchiu 2nd Rd.), Hsinchu Science Park, Hsinchu 300, Taiwan	
https://www.wnc.com.tw	

Antenna Information


Section 1. Antenna Assembly Specifications

1A	1B	1C	1D		1E	1F	1G	1H
Antenna Part Number	Manufacturer	Antenna Type	Cable Assembly Part Number and Information	Freq Range MHz	* Peak Gain W/ Cable loss (dBi)	Peak Gain w/o Cable Loss (dBi)	Max VSWR	Cable Loss (dB)
(P/N:81EABP15.G41) Main Antenna	Wistron Neweb Corporation	PIFA	P/N: MHF-4L PLUG -20565-001R-13 50 ohm Coaxial length: 127cm diameter: 1.13mm	2400-2495	0.79	1.14	3	0.35
				5150-5250	-0.53	-0.01	3	0.52
				5250-5350	-0.12	0.41	3	0.53
				5470-5725	0.66	1.2	3	0.54
				5725-5850	1.06	1.61	3	0.55
				5850-5895	0.71	1.26	3	0.55
				5925-6425	0.77	1.34	3	0.57
				6425-6525	0.34	0.93	3	0.59
				6525-6875	0.04	0.64	3	0.60
				6875-7125	-0.4	0.22	3	0.62
(P/N: 81EABP15.G42) Aux Antenna	Wistron Neweb Corporation	PIFA	P/N: MHF-4L PLUG -20565-001R-13 50 ohm Coaxial length: 191cm diameter: 1.13mm	2400-2495	0.16	0.69	3	0.53
				5150-5250	0.78	1.57	3	0.79
				5250-5350	0.32	1.11	3	0.79
				5470-5725	-0.02	0.79	3	0.81
				5725-5850	0.16	0.99	3	0.83
				5850-5895	0.75	1.58	3	0.83
				5925-6425	0.64	1.5	3	0.86
				6425-6525	-0.49	0.39	3	0.88
				6525-6875	1.29	2.19	3	0.90
				6875-7125	0.66	1.59	3	0.93


Section 3. Radiation characteristics of antenna loaded in Host Platform

Main Antenna


Max Antenna 3D Radiation Pattern 2400 – 2483.5 MHz

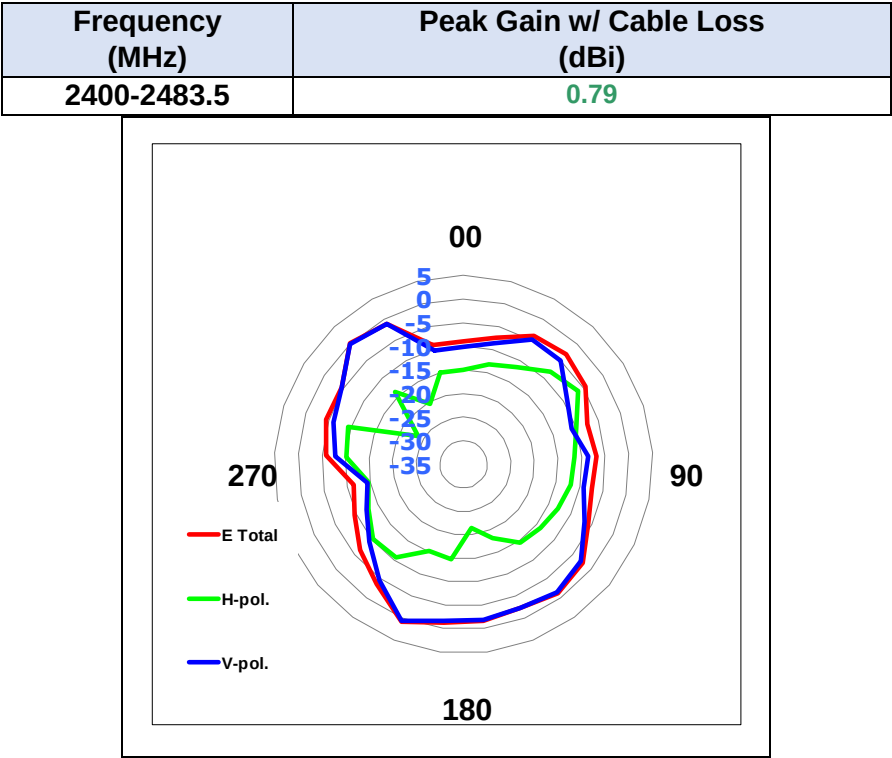


Max Antenna 3D Radiation Pattern 5150-5250 MHz

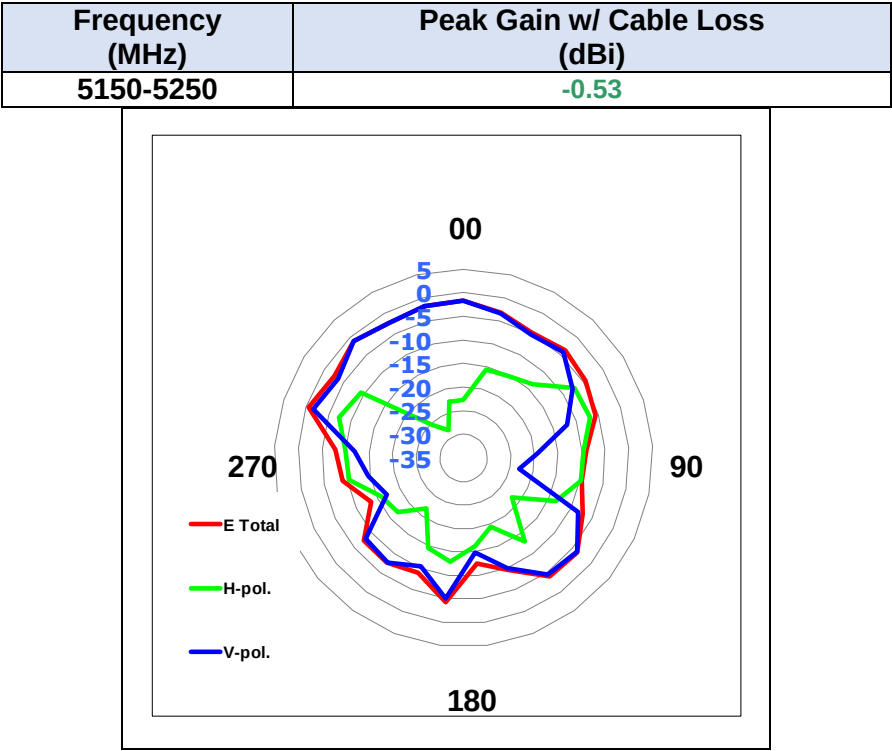

Max Antenna 3D Radiation Pattern 5250-5350 MHz

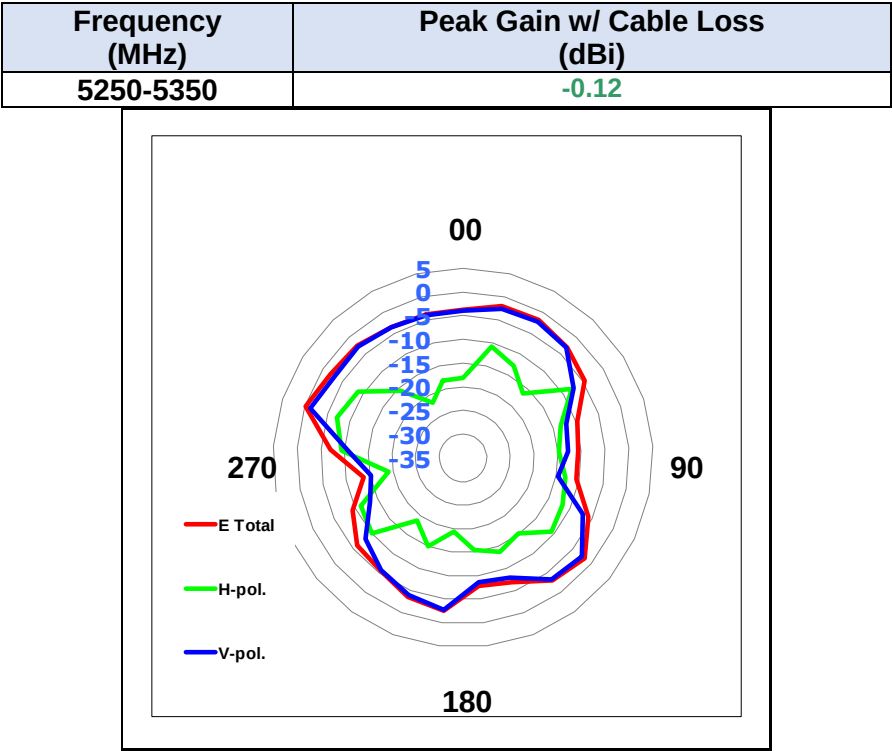


Max Antenna 3D Radiation Pattern 5470-5725 MHz

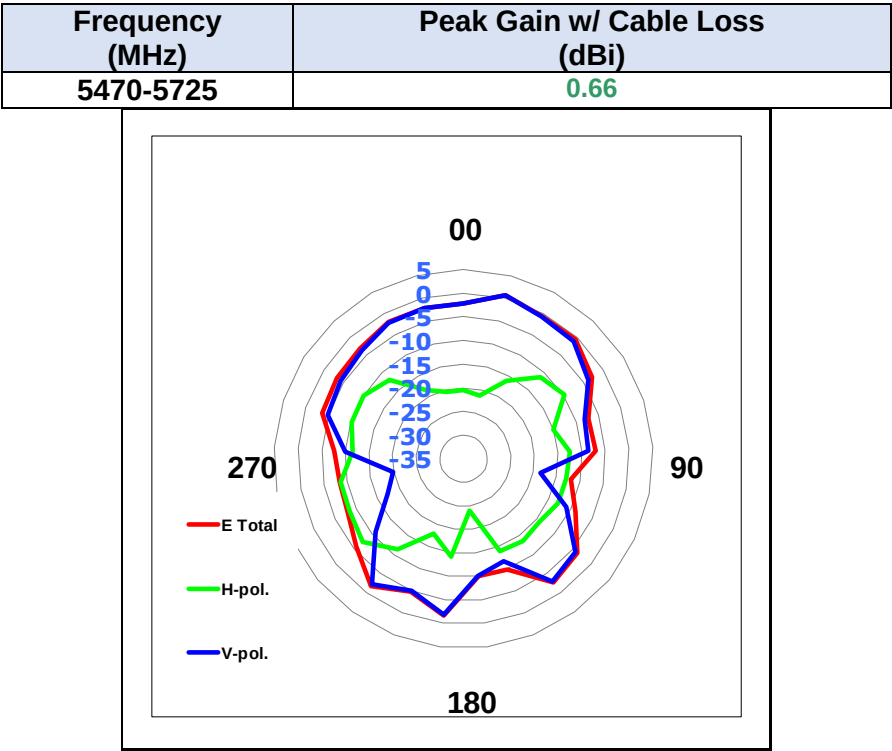


Max Antenna 3D Radiation Pattern 5725-5850 MHz

Frequency (MHz)	Peak Gain w/ Cable Loss (dBi)
5725-5850	1.06

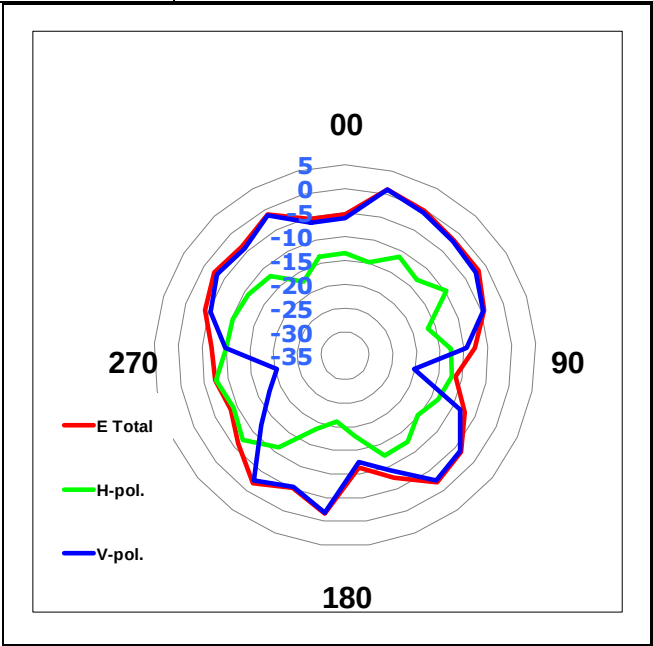


Max Antenna 3D Radiation Pattern 5850-5895 MHz


Frequency (MHz)	Peak Gain w/ Cable Loss (dBi)
5850-5895	0.71

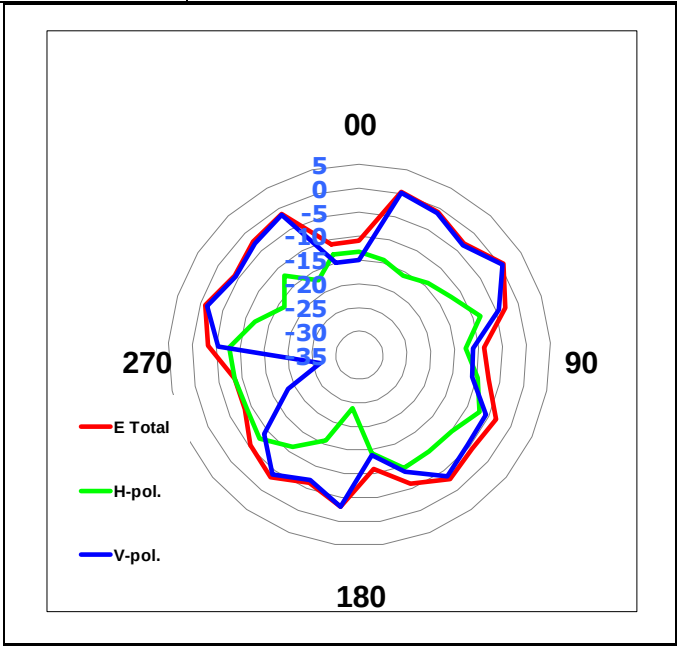


Max Antenna 3D Radiation Pattern 5925-6425 MHz

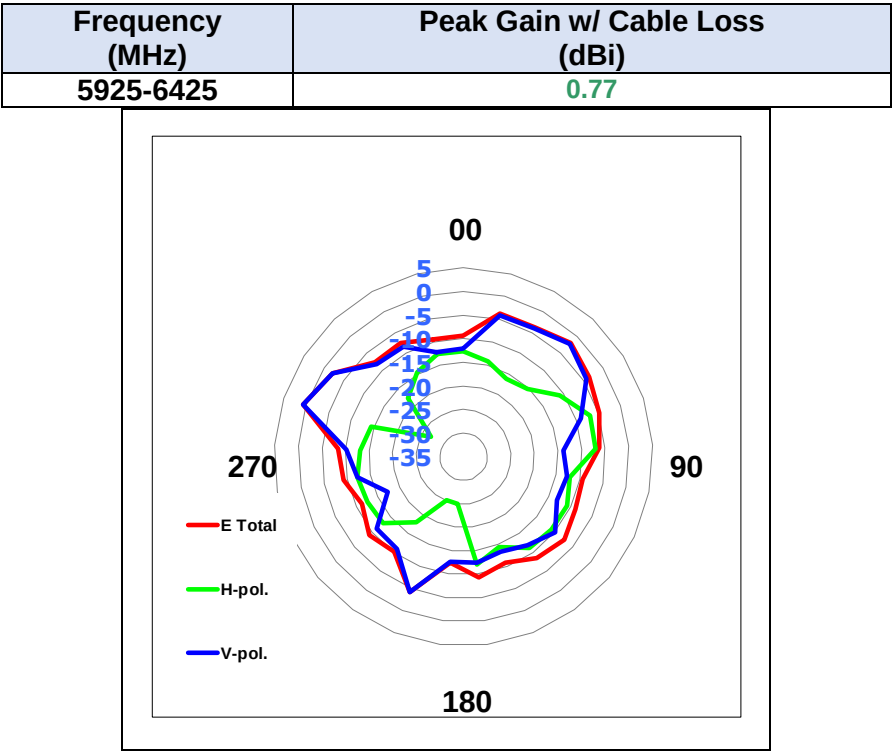


Max Antenna 3D Radiation Pattern 6425-6525 MHz

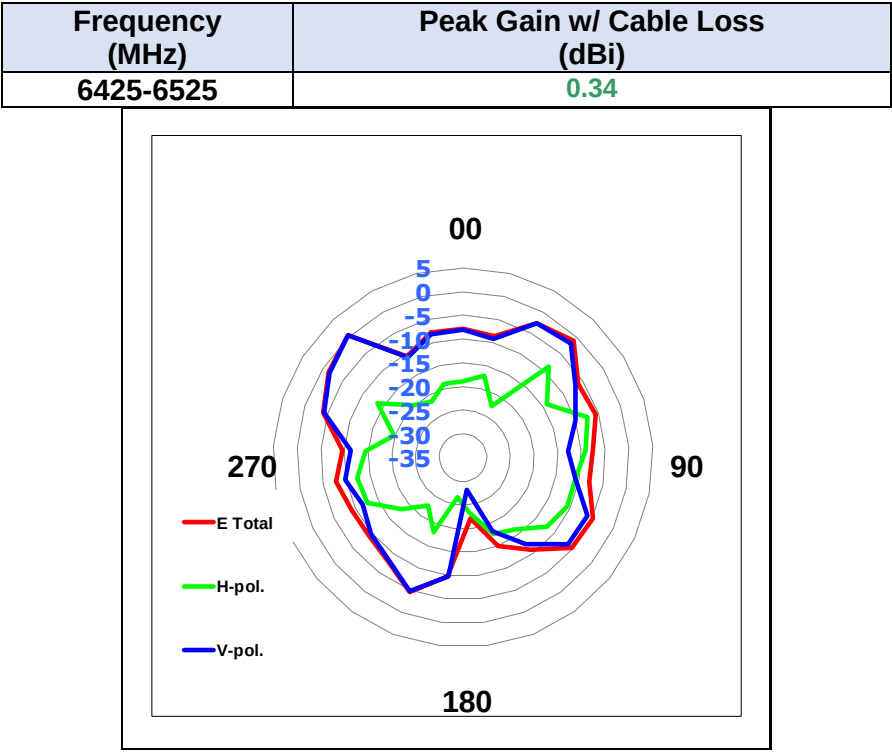

Max Antenna 3D Radiation Pattern 6525-6875 MHz

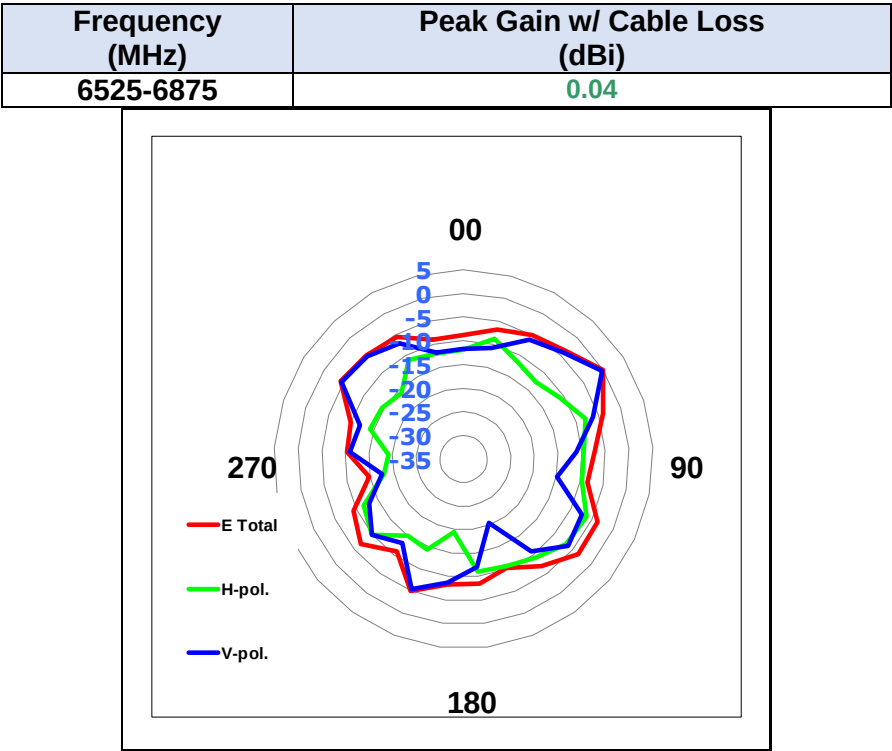


Max Antenna 3D Radiation Pattern 6875-7125 MHz

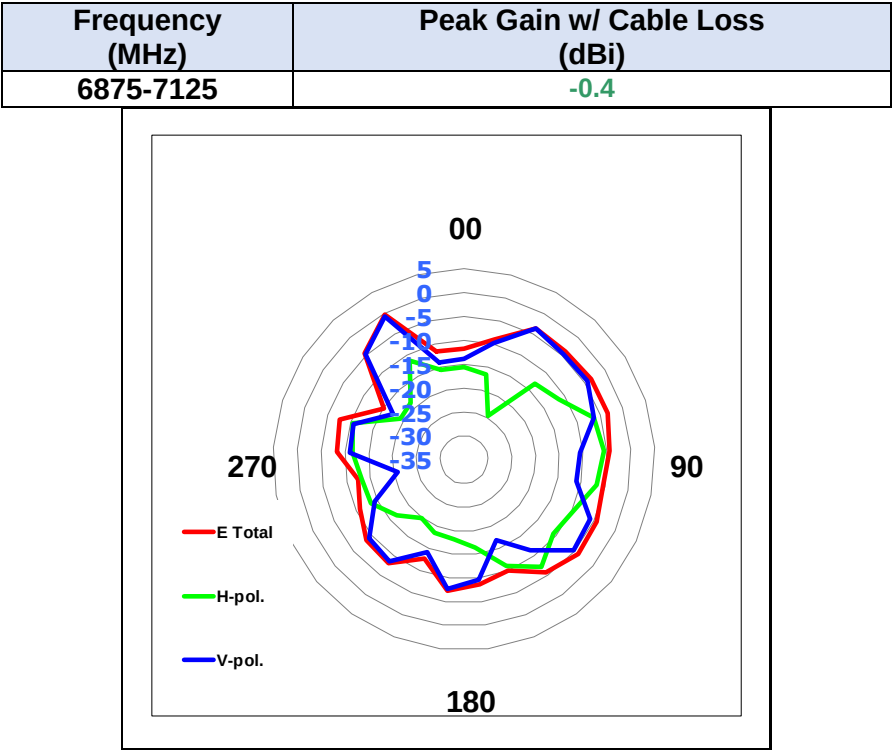


Auxiliary Antenna


Max Antenna 3D Radiation Pattern 2400 – 2483.5 MHz

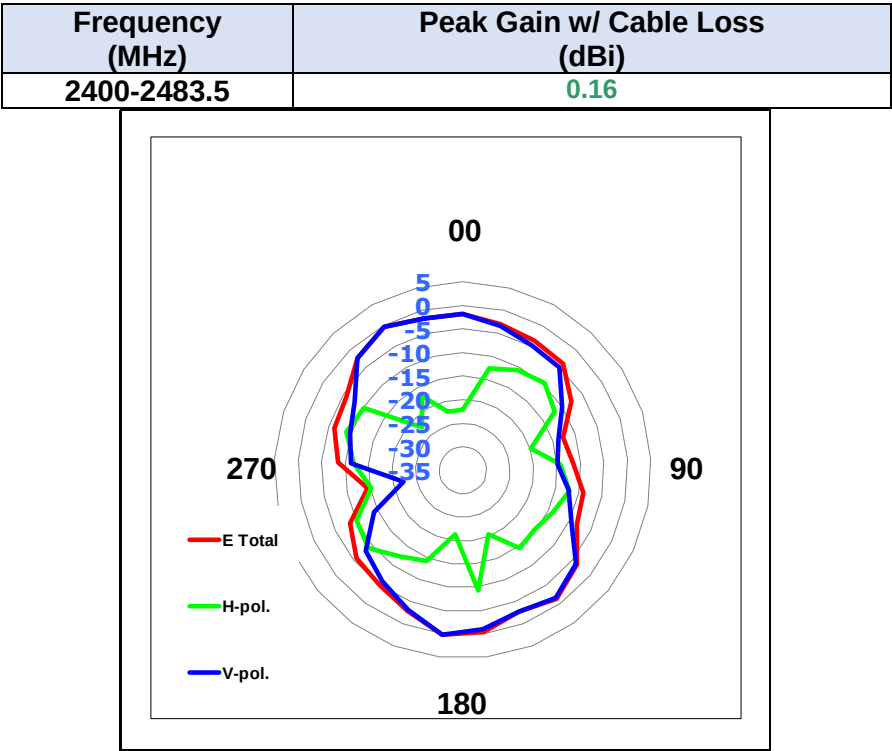


Max Antenna 3D Radiation Pattern 5150-5250 MHz

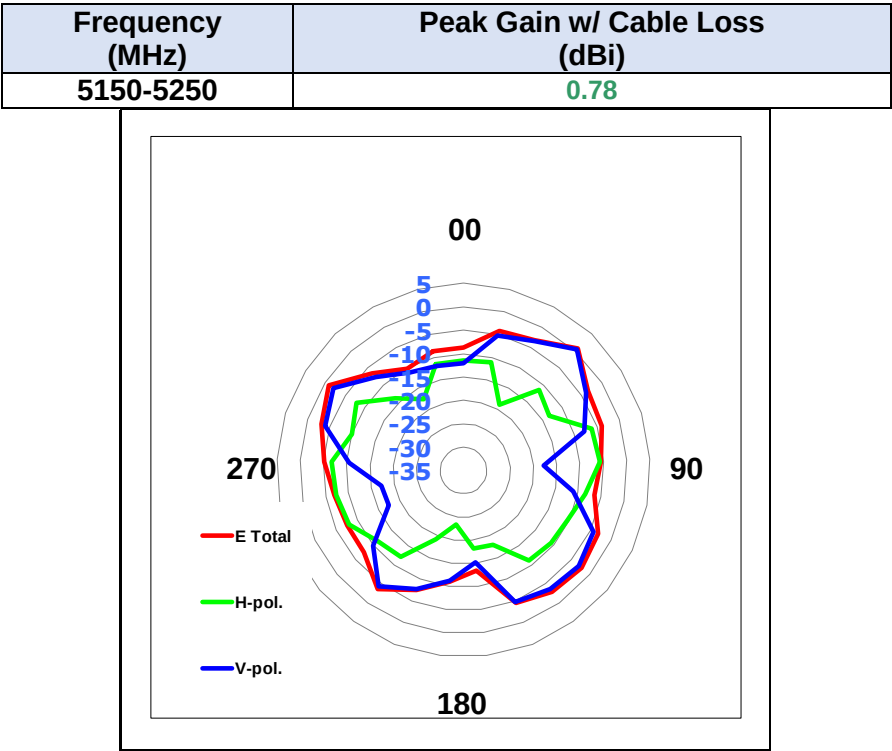


Max Antenna 3D Radiation Pattern 5250-5350 MHz

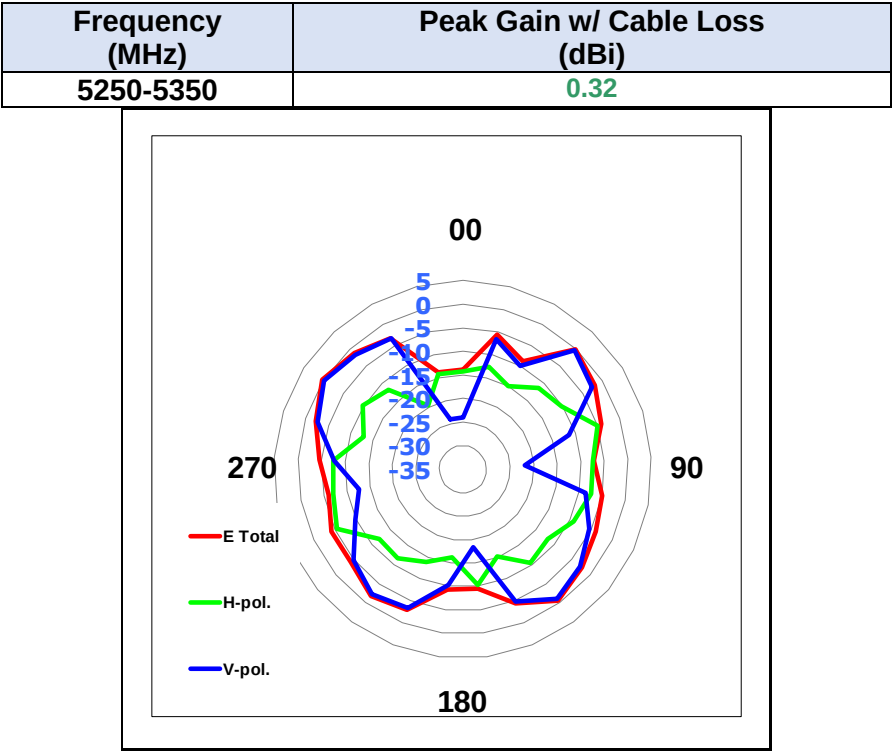


Max Antenna 3D Radiation Pattern 5470-5725 MHz

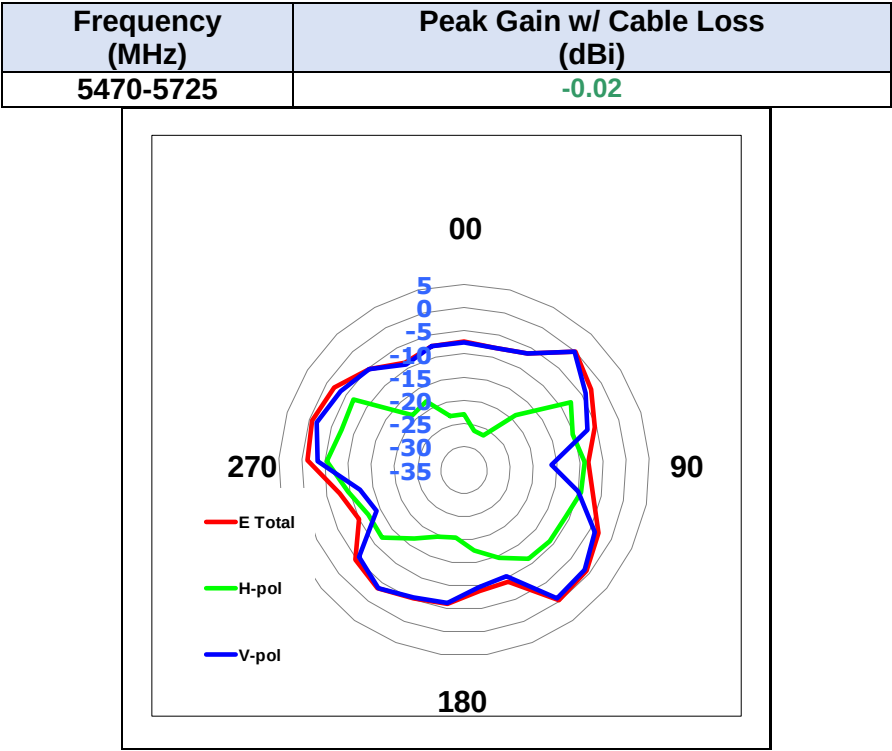


Max Antenna 3D Radiation Pattern 5725-5850 MHz

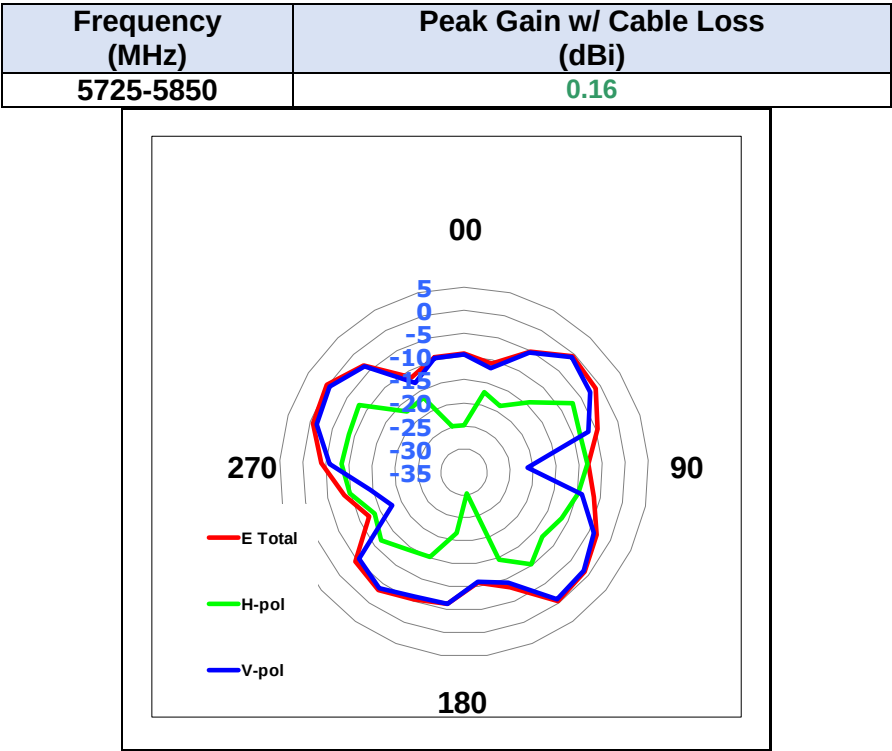


Max Antenna 3D Radiation Pattern 5850-5895 MHz

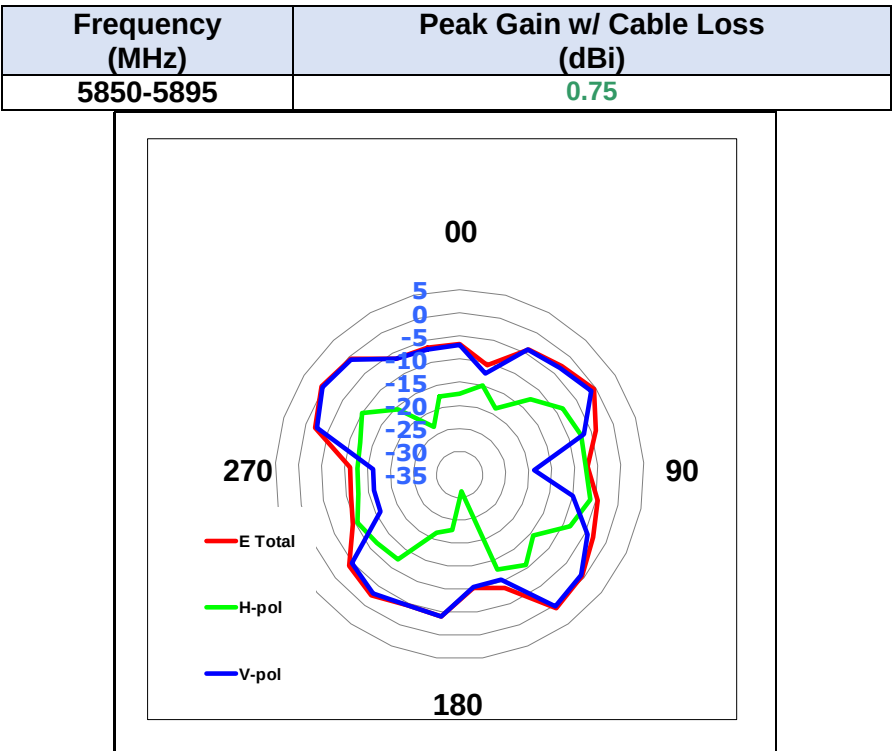


Max Antenna 3D Radiation Pattern 5925-6425 MHz

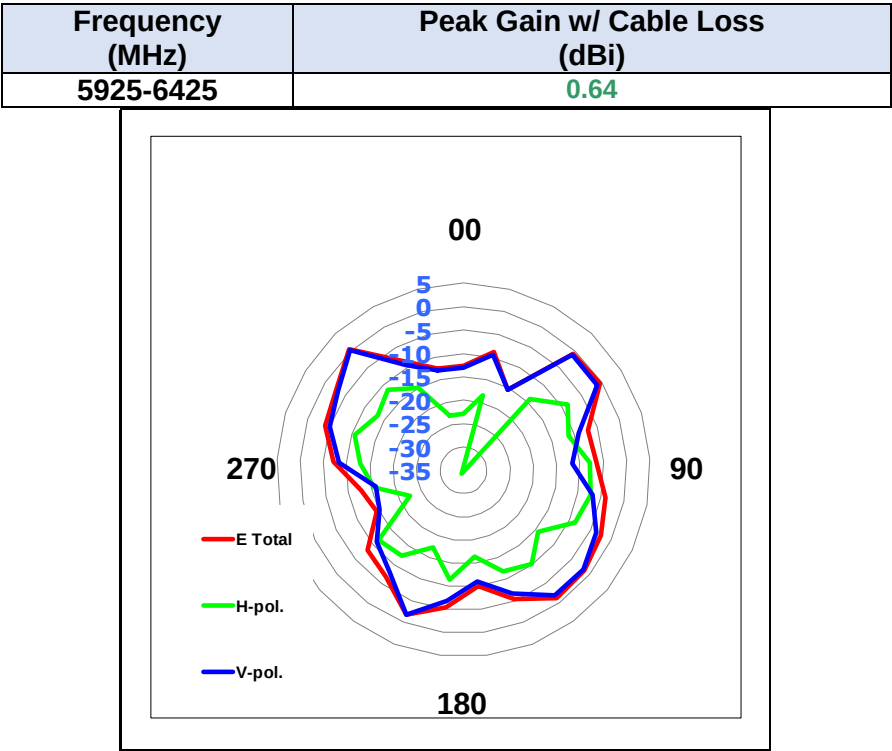

Max Antenna 3D Radiation Pattern 6425-6525 MHz

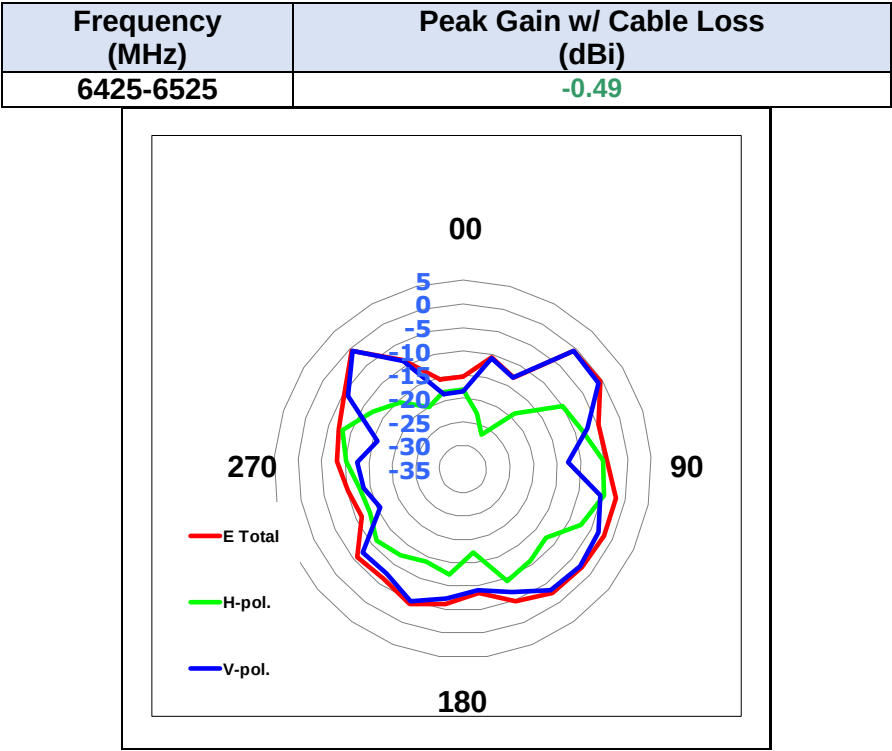

Max Antenna 3D Radiation Pattern 6525-6875 MHz

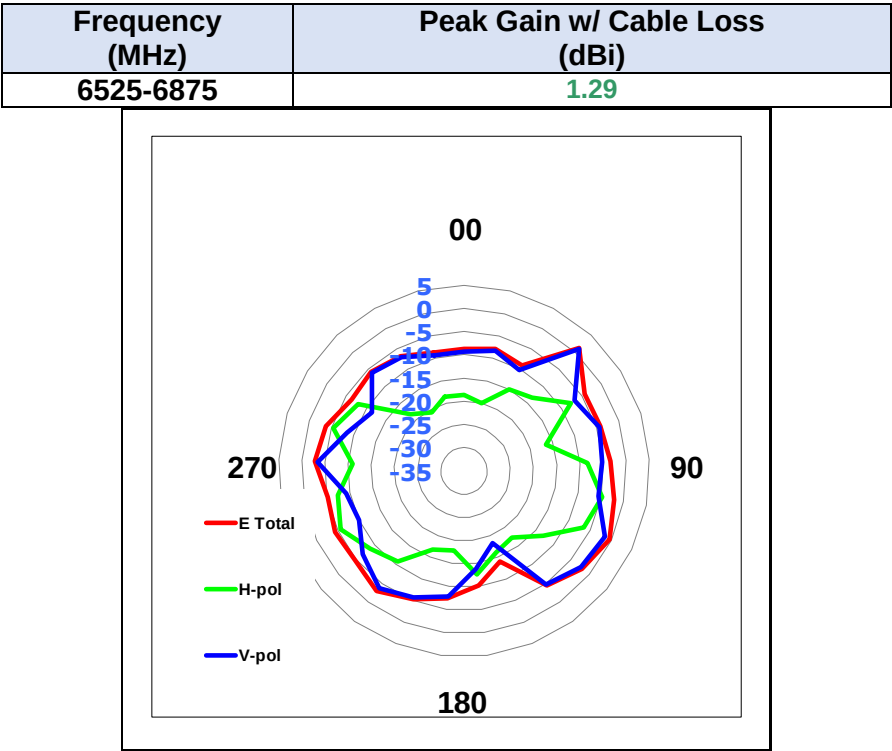

Max Antenna 3D Radiation Pattern 6875-7125 MHz

