



TEST REPORT

Report Number : TZ0059250216FRF03
Product Name : CLOUD DIGITAL PHOTO FRAME
Model/Type reference : K10, F1041P0VP
FCC ID : 2AASZ-F1041P0VP
Prepared for : SHENZHEN IPRODA TECHNOLOGY CO., LTD
Room 1001B, 10th Floor, Office Building, Plaza Xindizhongyang, District
Guangming, Shenzhen, China

Prepared By : Shenzhen Tongzhou Testing Co.,Ltd.
1st Floor, Building 1, Haomai High-tech Park, Huating Road 387, Dalang Street,
Longhua, Shenzhen, China
Standards : FCC CFR Title 47 Part 15C, ANSI C63.10: 2013
Date of Test : Mar. 05, 2025 ~ Mar. 24, 2025
Date of Issue : Mar. 24, 2025

Prepared by : Nancy Li
(File administrators) Nancy Li
Reviewed by : Max Zhang
(Technical Manager) Max Zhang
Approved by : Matte He
(General Manager) Matte He

This publication may be reproduced in whole or in part for non-commercial purposes as long as the Shenzhen Tongzhou Testing Co.,Ltd. is acknowledged as copyright owner and source of the material. Shenzhen Tongzhou Testing Co.,Ltd. takes no responsibility for and will not assume liability for damages resulting from the reader's interpretation of the reproduced material due to its placement and context. The test report apply only to the specific sample(s) tested under stated test conditions. It is not permitted to copy extracts of these test result without the written permission of the test laboratory.



Report No.: TZ0059250216FRF03

**** Report Revise Record ****

| Report Version | Revise Time | Issued Date | Valid Version | Notes |
|----------------|-------------|---------------|---------------|-----------------|
| V1.0 | / | Mar. 24, 2025 | Valid | Initial release |



TABLE OF CONTENTS

| | | |
|-----------|---|-----------|
| 1. | GENERAL INFORMATION | 4 |
| 1.1. | Client Information | 4 |
| 1.2. | Description of Device (EUT) | 4 |
| 1.3. | Wireless Function Tested in this Report | 4 |
| 1.4. | EUT configuration | 5 |
| 1.5. | Description of Test Facility | 5 |
| 1.6. | Statement of the Measurement Uncertainty | 5 |
| 1.7. | Measurement Uncertainty | 6 |
| 1.8. | Description of Test Modes | 6 |
| 1.9. | Frequency of Channels | 7 |
| 2. | TEST METHODOLOGY | 8 |
| 2.1. | EUT Configuration | 8 |
| 2.2. | EUT Exercise..... | 8 |
| 2.3. | Test Sample | 8 |
| 3. | SYSTEM TEST CONFIGURATION | 9 |
| 3.1. | Justification | 9 |
| 3.2. | EUT Exercise Software..... | 9 |
| 3.3. | Special Accessories..... | 9 |
| 3.4. | Block Diagram/Schematics | 9 |
| 3.5. | Equipment Modifications | 9 |
| 3.6. | Test Setup..... | 9 |
| 4. | SUMMARY OF TEST RESULTS | 10 |
| 5. | TEST RESULT | 11 |
| 5.1. | On Time and Duty Cycle..... | 11 |
| 5.2. | Maximum Conducted Output Power Measurement | 12 |
| 5.3. | Power Spectral Density Measurement | 13 |
| 5.4. | 6 dB Spectrum Bandwidth Measurement | 15 |
| 5.5. | Radiated Emissions Measurement | 16 |
| 5.6. | Conducted Spurious Emissions and Band Edges Test..... | 26 |
| 5.7. | Power Line Conducted Emissions | 27 |
| 5.8. | Band-Edge Measurements For Radiated Emissions | 30 |
| 5.9. | Antenna Requirements | 36 |
| 6. | LIST OF MEASURING EQUIPMENTS | 37 |
| 7. | TEST SETUP PHOTOGRAPHS OF EUT | 38 |
| 8. | EXTERIOR PHOTOGRAPHS OF THE EUT..... | 38 |
| 9. | INTERIOR PHOTOGRAPHS OF THE EUT | 38 |



1. GENERAL INFORMATION

1.1. Client Information

| | |
|--------------|---|
| Applicant | : SHENZHEN IPRODA TECHNOLOGY CO., LTD |
| Address | : Room 1001B, 10th Floor, Office Building, Plaza Xindizhongyang, District Guangming, Shenzhen, China |
| Manufacturer | : SHENZHEN IPRODA TECHNOLOGY CO., LTD |
| Address | : Room 1001B, 10th Floor, Office Building, Plaza Xindizhongyang, District Guangming, Shenzhen, China |

1.2. Description of Device (EUT)

| | |
|-------------------|---|
| Product Name | : CLOUD DIGITAL PHOTO FRAME |
| Trade Mark | : N/A |
| Model Number | : K10, F1041P0VP |
| Model Declaration | : All the same except for the model name. |
| Test Model | : K10 |
| Power Supply | : DC 5V by dadpter |
| Hardware version | : ZM692_MB_V2.5 |
| Software version | : iproda_v1.0_20250307 |

1.3. Wireless Function Tested in this Report

| | |
|-----------------------|---|
| WiFi 2.4GHz Band | |
| Supported | : IEEE 802.11b/g/n |
| Operation Frequency | IEEE 802.11b:2412-2462MHz |
| | IEEE 802.11g:2412-2462MHz |
| Channel Number | IEEE 802.11n HT20:2412-2462MHz |
| | IEEE 802.11n HT40:2422-2452MHz |
| Modulation Technology | 11 Channels for 2412-2462MHz(IEEE 802.11b/g/n HT20) |
| | 7 Channels for 2422-2452MHz(IEEE 802.11n HT40) |
| | IEEE 802.11b: DSSS(CCK,DQPSK,DBPSK) |
| Antenna Type And Gain | IEEE 802.11g: OFDM (64QAM, 16QAM, QPSK, BPSK) |
| | IEEE 802.11n: OFDM (64QAM, 16QAM, QPSK, BPSK) |
| FPC Antenna, 1.99dBi | |

Note 1: Antenna position refer to EUT Photos.

Note 2: the above information was supplied by the applicant.



1.4. EUT configuration

The following peripheral devices and interface cables were connected during the measurement:

● supplied by the manufacturer

○ supplied by the lab

| | | | |
|---|---------|---------|--------------------------|
| ● | Adapter | Model: | AS1207A-0502000USU |
| | | Input: | 100-240V~ 50/60Hz, 0.35A |
| | | Output: | DC 5V, 2000mA |

1.5. Description of Test Facility

FCC

Designation Number: CN1275

Test Firm Registration Number: 167722

Shenzhen Tongzhou Testing Co.,Ltd. has been listed on the US Federal Communications Commission list of test facilities recognized to perform electromagnetic emissions measurements.

A2LA

Certificate Number: 5463.01

Shenzhen Tongzhou Testing Co.,Ltd. has been listed by American Association for Laboratory Accreditation to perform electromagnetic emission measurement.

IC

ISED#: 22033

CAB identifier: CN0099

Shenzhen Tongzhou Testing Co.,Ltd. has been listed by Innovation, Science and Economic Development Canada to perform electromagnetic emission measurement.

The 3m-Semi anechoic test site fulfils CISPR 16-1-4 according to ANSI C63.4 and CISPR 16-1-4:2010

1.6. Statement of the Measurement Uncertainty

The data and results referenced in this document are true and accurate. The reader is cautioned that there may be errors within the calibration limits of the equipment and facilities. The measurement uncertainty was calculated for all measurements listed in this test report acc. To CISPR 16 – 4 “Specification for radio disturbance and immunity measuring apparatus and methods – Part 4: Uncertainty in EMC Measurements” and is documented in the Shenzhen Tongzhou Testing Co.,Ltd. 's quality system acc. To DIN EN ISO/IEC 17025. Furthermore, component and process variability of devices similar to that tested may result in additional deviation. The manufacturer has the sole responsibility of continued compliance of the device.



1.7. Measurement Uncertainty

| Test Item | Uncertainty | Note |
|--------------------------------------|-----------------------|------|
| Radiation Uncertainty(9KHz~30MHz) | : $\pm 3.26\text{dB}$ | (1) |
| Radiation Uncertainty(30MHz~1000MHz) | : $\pm 3.92\text{dB}$ | (1) |
| Radiation Uncertainty(1GHz~40GHz) | : $\pm 5.62\text{dB}$ | (1) |
| Conduction Uncertainty | : $\pm 2.71\text{dB}$ | (1) |
| Occupied Channel Bandwidth | : $\pm 3.0\%$ | (1) |
| RF power, conducted | : $\pm 0.16\text{dB}$ | (1) |
| Power Spectral Density, conducted | : $\pm 1.3\text{dB}$ | (1) |
| Unwanted Emissions, conducted | : $\pm 1.3\text{dB}$ | (1) |
| Time | : $\pm 1.0\%$ | (1) |
| Duty Cycle | : $\pm 3.0\%$ | (1) |

(1). This uncertainty represents an expanded uncertainty expressed at approximately the 95% confidence level using a coverage factor of $k=2$.

1.8. Description of Test Modes

The EUT has been tested under operating condition.

This test was performed with EUT in X, Y, Z position and the worst case was found when EUT in X position.

AC power line conducted emission pre-test at both at AC 120V/60Hz and AC 240V/50Hz modes, recorded worst case.

Worst-case mode and channel used for 150 KHz-30 MHz power line conducted emissions was the mode and channel with the highest output power, that was determined to be **802.11ax HE40, High Channel** and recorded in this report.

Worst-case mode and channel used for 9 KHz-1000 MHz radiated emissions was the mode and channel with the highest output power, that was determined to be **802.11ax HE40, High Channel** and recorded in this report.

Worst-Case data rates were utilized from preliminary testing of the Chipset, worst-case data rates used during the testing are as follows:

IEEE 802.11b Mode: 1 Mbps, DSSS.

IEEE 802.11g Mode: 6 Mbps, OFDM.

IEEE 802.11n Mode HT20: MCS0, OFDM.

IEEE 802.11n Mode HT40: MCS0, OFDM.

Antenna & Bandwidth

| Antenna | Antenna 1 | | Antenna 2 | | Simultaneously |
|----------------|-------------------------------------|-------------------------------------|--------------------------|--------------------------|--------------------------|
| Bandwidth Mode | 20MHz | 40MHz | 20MHz | 40MHz | / |
| IEEE 802.11b | <input checked="" type="checkbox"/> | <input type="checkbox"/> | <input type="checkbox"/> | <input type="checkbox"/> | <input type="checkbox"/> |
| IEEE 802.11g | <input checked="" type="checkbox"/> | <input type="checkbox"/> | <input type="checkbox"/> | <input type="checkbox"/> | <input type="checkbox"/> |
| IEEE 802.11n | <input checked="" type="checkbox"/> | <input checked="" type="checkbox"/> | <input type="checkbox"/> | <input type="checkbox"/> | <input type="checkbox"/> |
| IEEE 802.11ax | <input type="checkbox"/> | <input type="checkbox"/> | <input type="checkbox"/> | <input type="checkbox"/> | <input type="checkbox"/> |



1.9. Frequency of Channels

IEEE 802.11b/g/n HT20

| Frequency Band | Channel No. | Frequency(MHz) | Channel No. | Frequency(MHz) |
|----------------|-------------|----------------|-------------|----------------|
| 2412~2462MHz | 1 | 2412 | 7 | 2442 |
| | 2 | 2417 | 8 | 2447 |
| | 3 | 2422 | 9 | 2452 |
| | 4 | 2427 | 10 | 2457 |
| | 5 | 2432 | 11 | 2462 |
| | 6 | 2437 | -- | -- |

IEEE 802.11n HT40

| Frequency Band | Channel No. | Frequency(MHz) | Channel No. | Frequency(MHz) |
|----------------|-------------|----------------|-------------|----------------|
| 2422~2452MHz | -- | -- | 7 | 2442 |
| | -- | -- | 8 | 2447 |
| | 3 | 2422 | 9 | 2452 |
| | 4 | 2427 | -- | -- |
| | 5 | 2432 | -- | -- |
| | 6 | 2437 | -- | -- |



2. TEST METHODOLOGY

All measurements contained in this report were conducted with ANSI C63.10-2013, American National Standard of Procedures for Compliance Testing of Unlicensed Wireless Devices.

The radiated testing was performed at an antenna-to-EUT distance of 3 meters. All radiated and conducted emissions measurement was performed at Shenzhen Tongzhou Testing Co.,Ltd.

2.1. EUT Configuration

The EUT configuration for testing is installed on RF field strength measurement to meet the Commissions requirement and operating in a manner that intends to maximize its emission characteristics in a continuous normal application.

2.2. EUT Exercise

The EUT was operated in the engineering mode to fix the TX frequency that was for the purpose of the measurements.

According to FCC's request, Test Procedure KDB 558074 D01 DTS Meas Guidance v04 and KDB 662911 D01 Multiple Transmitter Output v02r01 are required to be used for this kind of FCC 15.247 digital modulation device.

According to its specifications, the EUT must comply with the requirements of the Section 15.203, 15.205, 15.207, 15.209 and 15.247 under the FCC Rules Part 15 Subpart C.

2.3. Test Sample

| Sample ID | Description |
|-----------------|---------------------------------------|
| TZ0059250216-1# | Engineer sample – continuous transmit |
| TZ0059250216-2# | Normal sample – Intermittent transmit |



3. SYSTEM TEST CONFIGURATION

3.1. Justification

The system was configured for testing in a continuous transmits condition.

3.2. EUT Exercise Software

The system was configured for testing in a continuous transmits condition and change test channels by software (REALTEK WLAN Test Tool Version 2.0.0) provided by application.

3.3. Special Accessories

| No. | Equipment | Manufacturer | Model No. | Serial No. | Length | shielded/ unshielded | Notes |
|-----|-----------|--------------|-----------|------------|--------|-------------------------|-------|
| 1 | / | / | / | / | / | / | / |

3.4. Block Diagram/Schematics

Please refer to the related document

3.5. Equipment Modifications

Shenzhen Tongzhou Testing Co.,Ltd. has not done any modification on the EUT.

3.6. Test Setup

Please refer to the test setup photo.



4. SUMMARY OF TEST RESULTS

| FCC Rules | Description of Test | Sample ID | Result |
|---------------------|---|------------------------------------|-----------|
| / | Duty Cycle | TZ0059250216-1# | Note1 |
| §15.247(b) | Maximum Conducted Output Power | TZ0059250216-1# | Compliant |
| §15.247(e) | Power Spectral Density | TZ0059250216-1# | Compliant |
| §15.247(a)(2) | 6dB Bandwidth | TZ0059250216-1# | Compliant |
| / | Occupied Bandwidth | TZ0059250216-1# | Note1 |
| §15.209, §15.247(d) | Radiated and Conducted Spurious Emissions | TZ0059250216-1# TZ0059250216-2# | Compliant |
| §15.205 | Emissions at Restricted Band | TZ0059250216-1# | Compliant |
| §15.207(a) | Conducted Emissions | TZ0059250216-1# | Compliant |
| §15.203 | Antenna Requirements | TZ0059250216-2# | Compliant |

Note1: for report purposes only.

Remark: The measurement uncertainty is not included in the test result.




5. TEST RESULT

5.1. On Time and Duty Cycle

5.1.1. Standard Applicable

None. for reporting purpose only.

5.1.2. Block Diagram of Test Setup

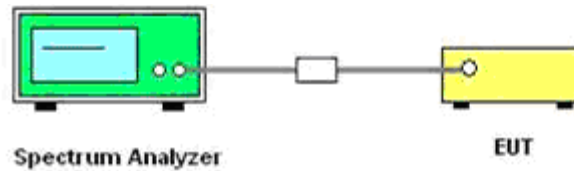

5.1.3. Test Procedures

1. Set the center frequency of the spectrum analyzer to the transmitting frequency.
2. Set the span=0MHz, RBW to the largest available value, VBW \geq RBW
3. Detector = peak.
4. Trace mode = Single hold.

5.1.4. EUT Operation during Test

The EUT was programmed to be in continuously transmitting mode.

5.1.5. Test Results

Pass

Remark:

1. Test results including cable loss.
2. Please refer to Appendix G of Appendix Test Data for WLAN(2.4G) for test data.




5.2. Maximum Conducted Output Power Measurement

5.2.1. Standard Applicable

According to §15.247(b): For systems using digital modulation in the 2400-2483.5 MHz and 5725-5850 MHz band, the limit for maximum peak conducted output power is 30dBm. The limit has to be reduced by the amount in dB that the gain of the antenna exceeds 6dBi. In case of point-to-point operation, the limit has to be reduced by 1dB for every 3dB that the directional gain of the antenna exceeds 6dBi.

Systems operating in the 5725-5850 MHz band that are used exclusively for fixed, point-to-point operations may employ transmitting antennas with directional gain greater than 6dBi without any corresponding reduction in transmitter peak output power.

5.2.2. Block Diagram of Test Setup

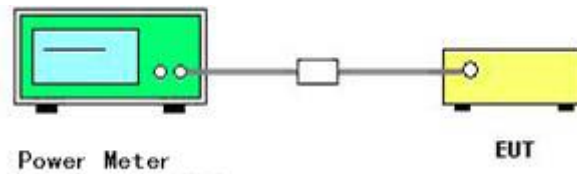

5.2.3. Test Procedures

☐ According to KDB558074 D01 DTS Measurement Guidance Section 9.1 Maximum peak conducted output power, 9.1.2 the maximum peak conducted output power may be measured using a broadband peak RF power meter. The power meter shall have a video bandwidth that is greater than or equal to the DTS bandwidth and shall utilize a fast-responding diode detector.

☒ According to KDB558074 D01 DTS Measurement Guidance Section 9.2 Maximum average conducted output power, 9.2.3.1 Method AVGPM (Measurement using an RF average power meter)

(a) As an alternative to spectrum analyzer or EMI receiver measurements, measurements may be performed using a wideband RF power meter with a thermocouple detector or equivalent if all of the conditions listed below are satisfied.

- 1) The EUT is configured to transmit continuously, or to transmit with a constant duty factor.
- 2) At all times when the EUT is transmitting, it shall be transmitting at its maximum power control level.
- 3) The integration period of the power meter exceeds the repetition period of the transmitted signal by at least a factor of five.

(b) If the transmitter does not transmit continuously, measure the duty cycle (x) of the transmitter output signal as described in Section 6.0.

(c) Measure the average power of the transmitter. This measurement is an average over both the on and off periods of the transmitter.

(d) Adjust the measurement in dBm by adding $10\log(1/x)$, where x is the duty cycle to the measurement result.

5.2.4. EUT Operation during Test

The EUT was programmed to be in continuously transmitting mode.

5.2.5. Test Results

Pass

Remark:

1. Test results including cable loss.
2. Please refer to Appendix C of Appendix Test Data for WLAN(2.4G) for test data.




5.3. Power Spectral Density Measurement

5.3.1. Standard Applicable

According to §15.247(e): For digitally modulated systems, the power spectral density conducted from the intentional radiator to the antenna shall not be greater than 8 dBm in any 3 kHz band during any time interval of continuous transmission.

5.3.2. Block Diagram of Test Setup

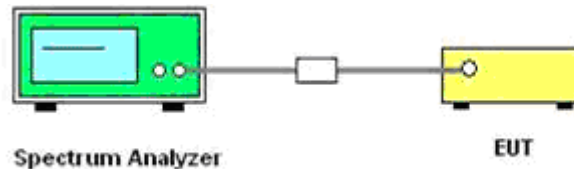

5.3.3. Test Procedures

☐ Peak Power Spectral Density

1. The transmitter was connected directly to a Spectrum Analyzer.
2. The power was monitored at the coupler port with a Spectrum Analyzer. The power level was set to the maximum level.
3. Set the RBW = 3 KHz
4. Set the VBW $\geq 3 \times \text{RBW}$
5. Set the span to 1.5 times the DTS channel bandwidth.
6. Detector = peak.
7. Sweep time = auto couple.
8. Trace mode = max hold.
9. Allow trace to fully stabilize.
10. Use the peak marker function to determine the maximum power level in any 3 kHz band segment within the fundamental EBW.
11. If measured value exceeds limit, reduce RBW (no less than 3 kHz) and repeat.
12. When the measurement bandwidth of the maximum PSD is 3 kHz, a constant factor of $10 \times \log(3\text{kHz}/20\text{kHz}) = -8.23 \text{ dB}$ is added to the measurement result.

☒ Maximum Power Spectral Density

1. The transmitter was connected directly to a Spectrum Analyzer.
2. The power was monitored at the coupler port with a Spectrum Analyzer. The power level was set to the maximum level.
3. Set the RBW = 3 KHz~100 KHz.
4. Set the VBW $\geq 3 \times \text{RBW}$
5. Set the span to 1.5 times the DTS channel bandwidth.
6. Detector = power averaging (rms)
7. Sweep points = 30000
8. Trace mode = max hold.
9. Employ trace averaging (rms) mode over a minimum of 100 traces.
10. Use the peak marker function to determine the maximum power level in any 3 kHz band segment within the fundamental EBW.
11. If measured value exceeds limit, reduce RBW (no less than 3 kHz) and repeat.
12. When the measurement bandwidth of the maximum PSD is 3 kHz, a constant factor of $10 \times \log(3\text{kHz}/20\text{kHz}) = -8.23 \text{ dB}$ is added to the measurement result.

5.3.4. EUT Operation during Test

The EUT was programmed to be in continuously transmitting mode.

5.3.5. Test Results

Pass

Remark:

1. Test results including cable loss.




2. Please refer to Appendix D of Appendix Test Data for WLAN(2.4G) for test data.

5.4. 6 dB Spectrum Bandwidth Measurement

5.4.1. Standard Applicable

According to §15.247(a) (2): For digital modulation systems, the minimum 6 dB bandwidth shall be at least 500 kHz.

5.4.2. Block Diagram of Test Setup

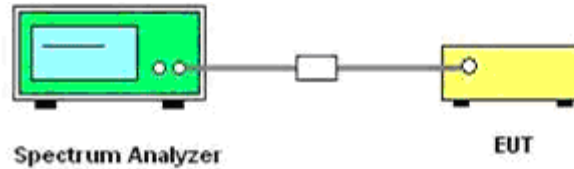

5.4.3. Test Procedures

1. The transmitter output (antenna port) was connected to the spectrum analyzer in peak hold mode.
2. The resolution bandwidth and the video bandwidth were set according to KDB558074.
3. Measured the spectrum width with power higher than 6dB below carrier.

5.4.4. EUT Operation during Test

The EUT was programmed to be in continuously transmitting mode.

5.4.5. Test Results

Pass

Remark:

1. Test results including cable loss.
2. Please refer to Appendix A of Appendix Test Data for WLAN(2.4G) for test data.



5.5. Radiated Emissions Measurement

5.5.1. Standard Applicable

15.205 (a) Except as shown in paragraph (d) of this section, only spurious emissions are permitted in any of the frequency bands listed below:

| MHz | MHz | MHz | GHz |
|-------------------|---------------------|---------------|-------------|
| 0.090-0.110 | 16.42-16.423 | 399.9-410 | 4.5-5.15 |
| \1\ 0.495-0.505 | 16.69475-16.69525 | 608-614 | 5.35-5.46 |
| 2.1735-2.1905 | 16.80425-16.80475 | 960-1240 | 7.25-7.75 |
| 4.125-4.128 | 25.5-25.67 | 1300-1427 | 8.025-8.5 |
| 4.17725-4.17775 | 37.5-38.25 | 1435-1626.5 | 9.0-9.2 |
| 4.20725-4.20775 | 73-74.6 | 1645.5-1646.5 | 9.3-9.5 |
| 6.215-6.218 | 74.8-75.2 | 1660-1710 | 10.6-12.7 |
| 6.26775-6.26825 | 108-121.94 | 1718.8-1722.2 | 13.25-13.4 |
| 6.31175-6.31225 | 123-138 | 2200-2300 | 14.47-14.5 |
| 8.291-8.294 | 149.9-150.05 | 2310-2390 | 15.35-16.2 |
| 8.362-8.366 | 156.52475-156.52525 | 2483.5-2500 | 17.7-21.4 |
| 8.37625-8.38675 | 156.7-156.9 | 2690-2900 | 22.01-23.12 |
| 8.41425-8.41475 | 162.0125-167.17 | 3260-3267 | 23.6-24.0 |
| 12.29-12.293 | 167.72-173.2 | 3332-3339 | 31.2-31.8 |
| 12.51975-12.52025 | 240-285 | 3345.8-3358 | 36.43-36.5 |
| 12.57675-12.57725 | 322-335.4 | 3600-4400 | (2\) |
| 13.36-13.41 | | | |

\1\ Until February 1, 1999, this restricted band shall be 0.490-0.510 MHz.


\2\ Above 38.6

According to §15.247 (d): 20dBc in any 100 kHz bandwidth outside the operating frequency band. In case the emission fall within the restricted band specified on 15.205(a), then the 15.209(a) limit in the table below has to be followed.


| Frequencies (MHz) | Field Strength (microvolts/meter) | Measurement Distance (meters) |
|-------------------|-----------------------------------|-------------------------------|
| 0.009~0.490 | 2400/F (KHz) | 300 |
| 0.490~1.705 | 24000/F (KHz) | 30 |
| 1.705~30.0 | 30 | 30 |
| 30~88 | 100 | 3 |
| 88~216 | 150 | 3 |
| 216~960 | 200 | 3 |
| Above 960 | 500 | 3 |

5.5.2. Block Diagram of Test Setup


For radiated emissions below 30MHz

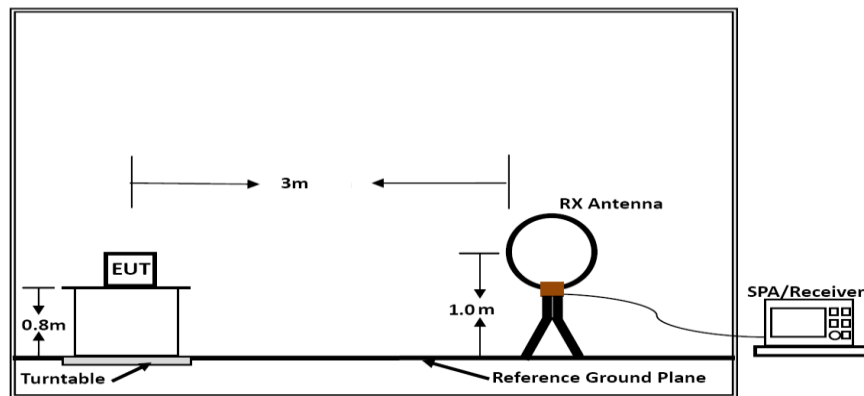

Below 30MHz

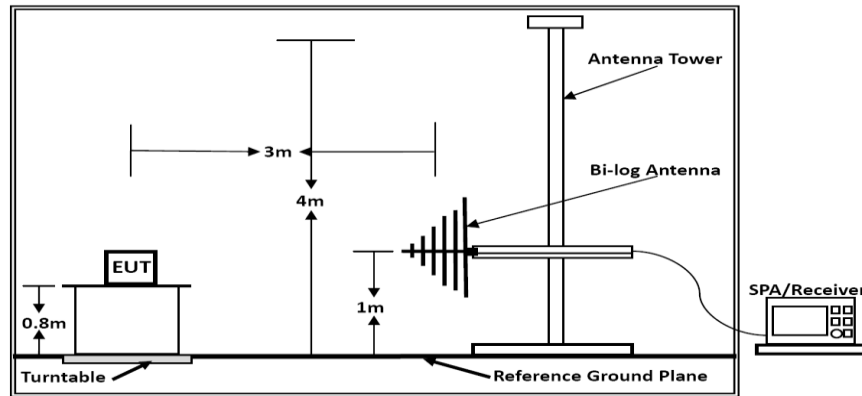

Below 1GHz

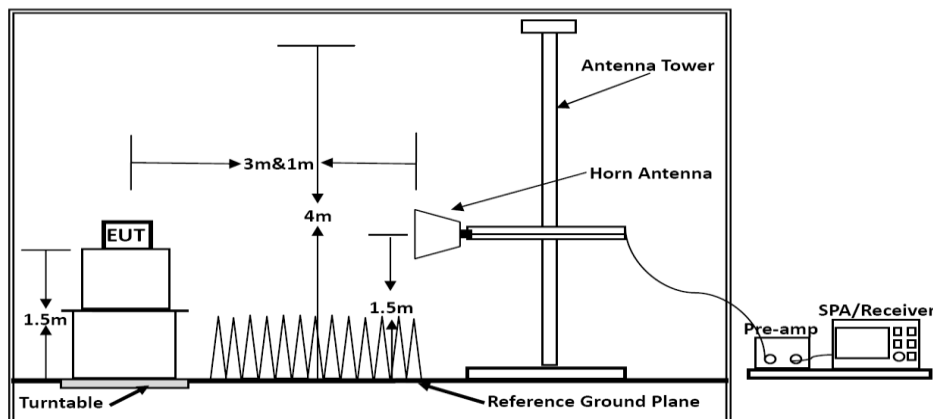

Above 1GHz

Above 18 GHz shall be extrapolated to the specified distance using an extrapolation factor of 20 dB/decade from 3m to 1m.

Distance extrapolation factor = $20 \log (\text{specific distance [3m]} / \text{test distance [1m]})$ (dB).

Limit line = specific limits (dBuV) + distance extrapolation factor [6 dB].

5.5.3. Test Procedures

1) Sequence of testing 9 kHz to 30 MHz

Setup:

- The equipment was set up to simulate a typical usage like described in the user manual or described by manufacturer.
- If the EUT is a tabletop system, a rotatable table with 0.8 m height is used.
- If the EUT is a floor standing device, it is placed on the ground.
- Auxiliary equipment and cables were positioned to simulate normal operation conditions.
- The AC power port of the EUT (if available) is connected to a power outlet below the turntable.
- The measurement distance is 3 meter.
- The EUT was set into operation.

Premeasurement:

- The turntable rotates from 0° to 315° using 45° steps.
- The antenna height is 1.0 meter.
- At each turntable position the analyzer sweeps with peak detection to find the maximum of all emissions

Final measurement:

- Identified emissions during the premeasurement the software maximizes by rotating the turntable position (0° to 360°) and by rotating the elevation axes (0° to 360°).
- The final measurement will be done in the position (turntable and elevation) causing the highest emissions with QPK detector.
- The final levels, frequency, measuring time, bandwidth, turntable position, correction factor, margin to the limit and limit will be recorded. Also a plot with the graph of the premeasurement and the limit will be stored.



2) Sequence of testing 30 MHz to 1 GHz

Setup:

- The equipment was set up to simulate a typical usage like described in the user manual or described by manufacturer.
- If the EUT is a tabletop system, a table with 0.8 m height is used, which is placed on the ground plane.
- If the EUT is a floor standing device, it is placed on the ground plane with insulation between both.
- Auxiliary equipment and cables were positioned to simulate normal operation conditions
- The AC power port of the EUT (if available) is connected to a power outlet below the turntable.
- The measurement distance is 3 meter.
- The EUT was set into operation.

Premeasurement:

- The turntable rotates from 0° to 315° using 45° steps.
- The antenna is polarized vertical and horizontal.
- The antenna height changes from 1 to 3 meter.
- At each turntable position, antenna polarization and height the analyzer sweeps three times in peak to find the maximum of all emissions.

Final measurement:

- The final measurement will be performed with minimum the six highest peaks.
- According to the maximum antenna and turntable positions of premeasurement the software maximize the peaks by changing turntable position ($\pm 45^\circ$) and antenna movement between 1 and 4 meter.
- The final measurement will be done with QP detector with an EMI receiver.
- The final levels, frequency, measuring time, bandwidth, antenna height, antenna polarization, turntable angle, correction factor, margin to the limit and limit will be recorded. Also a plot with the graph of the premeasurement with marked maximum final measurements and the limit will be stored.

3) Sequence of testing 1 GHz to 40 GHz

Setup:

- The equipment was set up to simulate a typical usage like described in the user manual or described by manufacturer.
- If the EUT is a tabletop system, a rotatable table with 1.5 m height is used.
- If the EUT is a floor standing device, it is placed on the ground plane with insulation between both.
- Auxiliary equipment and cables were positioned to simulate normal operation conditions
- The AC power port of the EUT (if available) is connected to a power outlet below the turntable.
- The measurement distance is 3 meter.
- The EUT was set into operation.

Premeasurement:

- The turntable rotates from 0° to 315° using 45° steps.
- The antenna is polarized vertical and horizontal.
- The antenna height scan range is 1 meter to 2.5 meter.
- At each turntable position and antenna polarization the analyzer sweeps with peak detection to find the maximum of all emissions.

Final measurement:

- The final measurement will be performed with minimum the six highest peaks.
- According to the maximum antenna and turntable positions of premeasurement the software maximize the peaks by changing turntable position ($\pm 45^\circ$) and antenna movement between 1 and 4 meters. This procedure is repeated for both antenna polarizations.
- The final measurement will be done in the position (turntable, EUT-table and antenna polarization) causing the highest emissions with Peak and Average detector.
- The final levels, frequency, measuring time, bandwidth, turntable position, EUT-table position, antenna polarization, correction factor, margin to the limit and limit will be recorded. Also a plot with the graph of the premeasurement with marked maximum final measurements and the limit will be stored.

4) Sequence of testing above 18 GHz

Setup:

- The equipment was set up to simulate a typical usage like described in the user manual or described by manufacturer.
- If the EUT is a tabletop system, a rotatable table with 1.5 m height is used.
- If the EUT is a floor standing device, it is placed on the ground plane with insulation between both.



- Auxiliary equipment and cables were positioned to simulate normal operation conditions
- The AC power port of the EUT (if available) is connected to a power outlet below the turntable.
- The measurement distance is 1 meter.
- The EUT was set into operation.

Premeasurement:

- The antenna is moved spherical over the EUT in different polarizations of the antenna.

Final measurement:

- The final measurement will be performed at the position and antenna orientation for all detected emissions that were found during the premeasurements with Peak and Average detector.
- The final levels, frequency, measuring time, bandwidth, correction factor, margin to the limit and limit will be recorded. Also a plot with the graph of the premeasurement and the limit will be stored.

5.5.4. Measuring Instruments and Setting

The following table is the setting of spectrum analyzer and receiver.

| Spectrum Parameter | Setting |
|---|---|
| Attenuation | Auto |
| Start Frequency | 1000 MHz |
| Stop Frequency | 10 th carrier harmonic |
| RB / VB (Emission in restricted band) | 1MHz / 3MHz for Peak, 1 MHz / 3 MHz for Average |
| RB / VB (Emission in non-restricted band) | 1MHz / 3MHz for Peak, 1 MHz / 3 MHz for Average |

| Receiver Parameter | Setting |
|------------------------|--|
| Attenuation | Auto |
| Start ~ Stop Frequency | 9kHz~150kHz / RB/VB 200Hz/1KHz for QP/AVG |
| Start ~ Stop Frequency | 150kHz~30MHz / RB/VB 9kHz/30KHz for QP/AVG |
| Start ~ Stop Frequency | 30MHz~1000MHz / RB/VB 120kHz/1MHz for QP |

**5.5.5. EUT Operation during Test**

The EUT was programmed to be in continuously transmitting mode.

5.5.6. Test Results

Pass

Results of Radiated Emissions (9 KHz~30MHz)

| | | | |
|---------------|----------|----------------|------------------|
| Temperature | 23.9℃ | Humidity | 58% |
| Test Engineer | Tony Luo | Configurations | IEEE 802.11b/g/n |

| Freq. (MHz) | Level (dBuV) | Over Limit (dB) | Over Limit (dBuV) | Remark |
|----------------|-----------------|--------------------|----------------------|----------|
| - | - | - | - | See Note |

Note:

The amplitude of spurious emissions which are attenuated by more than 20 dB below the permissible value has no need to be reported.

Distance extrapolation factor = $40 \log (\text{specific distance} / \text{test distance})$ (dB).

Limit line = specific limits (dBuV) + distance extrapolation factor.


Results of Radiated Emissions (30MHz~1GHz)

| | | | |
|---------------|----------|----------------|------------------|
| Temperature | 18.5℃ | Humidity | 56.1% |
| Test Engineer | Tony Luo | Configurations | IEEE 802.11b/g/n |



Below 1GHz

Vertical

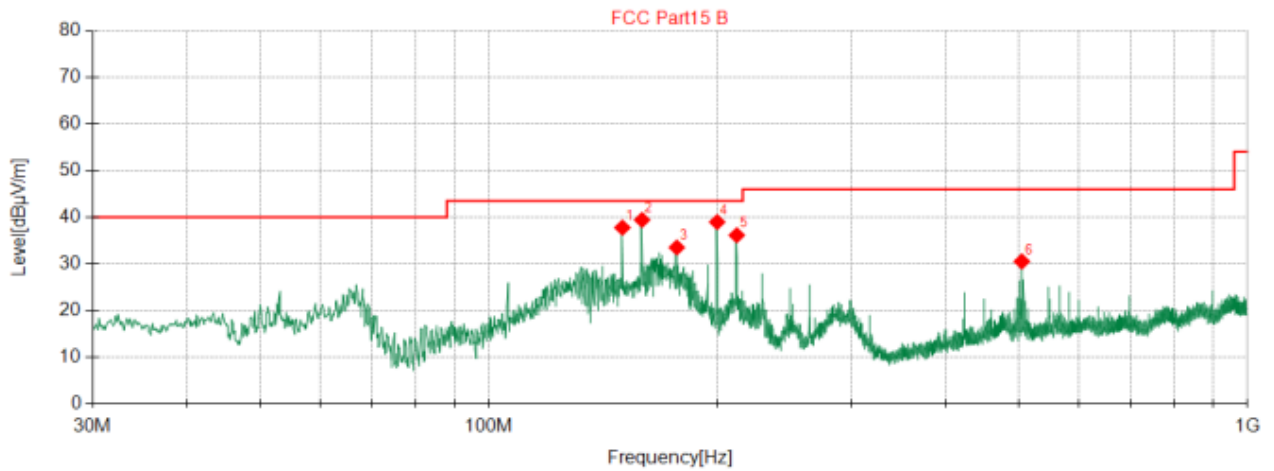


◆ QP Detector

Suspected Data List

| NO. | Freq. [MHz] | Reading [dBμV] | Factor [dB/m] | Level [dBμV/m] | Limit [dBμV/m] | Margin [dB] | Height [cm] | Angle [°] | Polarity |
|-----|-------------|----------------|---------------|----------------|----------------|-------------|-------------|-----------|----------|
| 1 | 149.9 | 56.89 | -19.09 | 37.80 | 43.50 | 5.70 | 100 | 315 | Vertical |
| 2 | 159.1 | 58.17 | -18.72 | 39.45 | 43.50 | 4.05 | 100 | 344 | Vertical |
| 3 | 176.8 | 51.19 | -17.65 | 33.54 | 43.50 | 9.96 | 100 | 354 | Vertical |
| 4 | 199.8 | 54.44 | -15.45 | 38.99 | 43.50 | 4.51 | 100 | 30 | Vertical |
| 5 | 212.1 | 51.23 | -15.06 | 36.17 | 43.50 | 7.33 | 100 | 195 | Vertical |
| 6 | 503.9 | 38.52 | -7.96 | 30.56 | 46.00 | 15.44 | 100 | 328 | Vertical |

***Note:

1. Level [dBμV/m] = Reading [dBμV] + Factor [dB/m]
2. Margin [dB] = Limit [dBμV/m] - Level [dBμV/m]

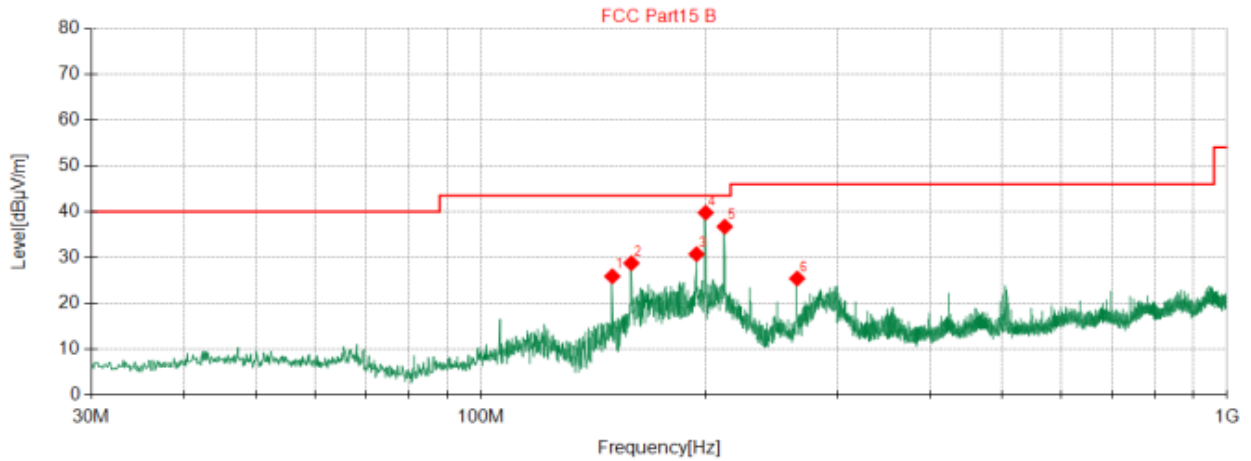**Horizontal****Suspected Data List**

| NO. | Freq. [MHz] | Reading [dBμV] | Factor [dB/m] | Level [dBμV/ m] | Limit [dBμV/ m] | Margin [dB] | Height [cm] | Angle [°] | Polarity |
|-----|----------------|-------------------|------------------|-----------------------|-----------------------|----------------|----------------|--------------|------------|
| 1 | 149.9 | 45.03 | -19.09 | 25.94 | 43.50 | 17.56 | 100 | 225 | Horizontal |
| 2 | 159.0 | 47.51 | -18.72 | 28.79 | 43.50 | 14.71 | 100 | 264 | Horizontal |
| 3 | 194.4 | 46.77 | -16.00 | 30.77 | 43.50 | 12.73 | 100 | 89 | Horizontal |
| 4 | 199.9 | 55.24 | -15.44 | 39.80 | 43.50 | 3.70 | 100 | 96 | Horizontal |
| 5 | 212.1 | 51.81 | -15.06 | 36.75 | 43.50 | 6.75 | 100 | 67 | Horizontal |
| 6 | 265.2 | 38.99 | -13.54 | 25.45 | 46.00 | 20.55 | 100 | 118 | Horizontal |

***Note:

1. Level [dBμV/m] = Reading [dBμV] + Factor [dB/m]
2. Margin [dB] = Limit [dBμV/m] - Level [dBμV/m]

**Results for Radiated Emissions (1GHz to 25GHz)**

| | | | |
|---------------|----------|----------------|---------------------|
| Temperature | 26°C | Humidity | 57.3% |
| Test Engineer | Tony Luo | Configurations | IEEE 802.11b/g/n/ax |

Remark: Measured all modes and recorded worst case.

IEEE 802.11b

Channel 1 / 2412 MHz

| Freq. MHz | Reading dBμV | Ant. Fac. dB/m | Pre. Fac. dB | Cab. Loss dB | Level dBμV/m | Limit dBμV/m | Margin dB | Remark | Pol. |
|-----------|--------------|----------------|--------------|--------------|--------------|--------------|-----------|---------|------------|
| 4824.00 | 56.84 | 33.06 | 35.04 | 3.94 | 58.80 | 74.00 | 15.20 | Peak | Horizontal |
| 4824.00 | 40.42 | 33.06 | 35.04 | 3.94 | 42.38 | 54.00 | 11.62 | Average | Horizontal |
| 4824.00 | 54.76 | 33.06 | 35.04 | 3.94 | 56.72 | 74.00 | 17.28 | Peak | Vertical |
| 4824.00 | 39.31 | 33.06 | 35.04 | 3.94 | 41.27 | 54.00 | 12.73 | Average | Vertical |

Channel 6 / 2437 MHz

| Freq. MHz | Reading dBμV | Ant. Fac. dB/m | Pre. Fac. dB | Cab. Loss dB | Level dBμV/m | Limit dBμV/m | Margin dB | Remark | Pol. |
|-----------|--------------|----------------|--------------|--------------|--------------|--------------|-----------|---------|------------|
| 4874.00 | 55.98 | 33.16 | 35.15 | 3.96 | 57.95 | 74.00 | 16.05 | Peak | Horizontal |
| 4874.00 | 41.93 | 33.16 | 35.15 | 3.96 | 43.90 | 54.00 | 10.10 | Average | Horizontal |
| 4874.00 | 59.28 | 33.16 | 35.15 | 3.96 | 61.25 | 74.00 | 12.75 | Peak | Vertical |
| 4874.00 | 41.83 | 33.16 | 35.15 | 3.96 | 43.80 | 54.00 | 10.20 | Average | Vertical |

Channel 11 / 2462 MHz

| Freq. MHz | Reading dBμV | Ant. Fac. dB/m | Pre. Fac. dB | Cab. Loss dB | Level dBμV/m | Limit dBμV/m | Margin dB | Remark | Pol. |
|-----------|--------------|----------------|--------------|--------------|--------------|--------------|-----------|---------|------------|
| 4924.00 | 57.06 | 33.26 | 35.14 | 3.98 | 59.16 | 74.00 | 14.84 | Peak | Horizontal |
| 4924.00 | 43.44 | 33.26 | 35.14 | 3.98 | 45.54 | 54.00 | 8.46 | Average | Horizontal |
| 4924.00 | 58.18 | 33.26 | 35.14 | 3.98 | 60.28 | 74.00 | 13.72 | Peak | Vertical |
| 4924.00 | 43.76 | 33.26 | 35.14 | 3.98 | 45.86 | 54.00 | 8.14 | Average | Vertical |

IEEE 802.11g

Channel 1 / 2412 MHz

| Freq. MHz | Reading dBμV | Ant. Fac. dB/m | Pre. Fac. dB | Cab. Loss dB | Level dBμV/m | Limit dBμV/m | Margin dB | Remark | Pol. |
|-----------|--------------|----------------|--------------|--------------|--------------|--------------|-----------|---------|------------|
| 4824.00 | 53.14 | 33.06 | 35.04 | 3.94 | 55.10 | 74.00 | 18.90 | Peak | Horizontal |
| 4824.00 | 43.07 | 33.06 | 35.04 | 3.94 | 45.03 | 54.00 | 8.97 | Average | Horizontal |
| 4824.00 | 55.50 | 33.06 | 35.04 | 3.94 | 57.46 | 74.00 | 16.54 | Peak | Vertical |
| 4824.00 | 43.70 | 33.06 | 35.04 | 3.94 | 45.66 | 54.00 | 8.34 | Average | Vertical |

Channel 6 / 2437 MHz

| Freq. MHz | Reading dBμV | Ant. Fac. dB/m | Pre. Fac. dB | Cab. Loss dB | Level dBμV/m | Limit dBμV/m | Margin dB | Remark | Pol. |
|-----------|--------------|----------------|--------------|--------------|--------------|--------------|-----------|---------|------------|
| 4874.00 | 54.20 | 33.16 | 35.15 | 3.96 | 56.17 | 74.00 | 17.83 | Peak | Horizontal |
| 4874.00 | 41.52 | 33.16 | 35.15 | 3.96 | 43.49 | 54.00 | 10.51 | Average | Horizontal |
| 4874.00 | 59.99 | 33.16 | 35.15 | 3.96 | 61.96 | 74.00 | 12.04 | Peak | Vertical |
| 4874.00 | 40.32 | 33.16 | 35.15 | 3.96 | 42.29 | 54.00 | 11.71 | Average | Vertical |



Channel 11 / 2462 MHz

| Freq. MHz | Reading dBμV | Ant. Fac. dB/m | Pre. Fac. dB | Cab. Loss dB | Level dBμV/m | Limit dBμV/m | Margin dB | Remark | Pol. |
|-----------|--------------|----------------|--------------|--------------|--------------|--------------|-----------|---------|------------|
| 4924.00 | 54.62 | 33.26 | 35.14 | 3.98 | 56.72 | 74.00 | 17.28 | Peak | Horizontal |
| 4924.00 | 43.32 | 33.26 | 35.14 | 3.98 | 45.42 | 54.00 | 8.58 | Average | Horizontal |
| 4924.00 | 52.59 | 33.26 | 35.14 | 3.98 | 54.69 | 74.00 | 19.31 | Peak | Vertical |
| 4924.00 | 41.55 | 33.26 | 35.14 | 3.98 | 43.65 | 54.00 | 10.35 | Average | Vertical |

IEEE 802.11n HT20

Channel 1 / 2412 MHz

| Freq. MHz | Reading dBμV | Ant. Fac. dB/m | Pre. Fac. dB | Cab. Loss dB | Level dBμV/m | Limit dBμV/m | Margin dB | Remark | Pol. |
|-----------|--------------|----------------|--------------|--------------|--------------|--------------|-----------|---------|------------|
| 4824.00 | 55.97 | 33.06 | 35.04 | 3.94 | 57.93 | 74.00 | 16.07 | Peak | Horizontal |
| 4824.00 | 39.04 | 33.06 | 35.04 | 3.94 | 41.00 | 54.00 | 13.00 | Average | Horizontal |
| 4824.00 | 58.99 | 33.06 | 35.04 | 3.94 | 60.95 | 74.00 | 13.05 | Peak | Vertical |
| 4824.00 | 40.52 | 33.06 | 35.04 | 3.94 | 42.48 | 54.00 | 11.52 | Average | Vertical |

Channel 6 / 2437 MHz

| Freq. MHz | Reading dBμV | Ant. Fac. dB/m | Pre. Fac. dB | Cab. Loss dB | Level dBμV/m | Limit dBμV/m | Margin dB | Remark | Pol. |
|-----------|--------------|----------------|--------------|--------------|--------------|--------------|-----------|---------|------------|
| 4874.00 | 56.06 | 33.16 | 35.15 | 3.96 | 58.03 | 74.00 | 15.97 | Peak | Horizontal |
| 4874.00 | 39.36 | 33.16 | 35.15 | 3.96 | 41.33 | 54.00 | 12.67 | Average | Horizontal |
| 4874.00 | 53.14 | 33.16 | 35.15 | 3.96 | 55.11 | 74.00 | 18.89 | Peak | Vertical |
| 4874.00 | 42.47 | 33.16 | 35.15 | 3.96 | 44.44 | 54.00 | 9.56 | Average | Vertical |

Channel 11 / 2462 MHz

| Freq. MHz | Reading dBμV | Ant. Fac. dB/m | Pre. Fac. dB | Cab. Loss dB | Level dBμV/m | Limit dBμV/m | Margin dB | Remark | Pol. |
|-----------|--------------|----------------|--------------|--------------|--------------|--------------|-----------|---------|------------|
| 4924.00 | 59.20 | 33.26 | 35.14 | 3.98 | 61.30 | 74.00 | 12.70 | Peak | Horizontal |
| 4924.00 | 39.41 | 33.26 | 35.14 | 3.98 | 41.51 | 54.00 | 12.49 | Average | Horizontal |
| 4924.00 | 54.83 | 33.26 | 35.14 | 3.98 | 56.93 | 74.00 | 17.07 | Peak | Vertical |
| 4924.00 | 42.04 | 33.26 | 35.14 | 3.98 | 44.14 | 54.00 | 9.86 | Average | Vertical |

IEEE 802.11n HT40

Channel 3 / 2422 MHz

| Freq. MHz | Reading dBμV | Ant. Fac. dB/m | Pre. Fac. dB | Cab. Loss dB | Level dBμV/m | Limit dBμV/m | Margin dB | Remark | Pol. |
|-----------|--------------|----------------|--------------|--------------|--------------|--------------|-----------|---------|------------|
| 4844.00 | 54.61 | 33.06 | 35.04 | 3.94 | 56.57 | 74.00 | 17.43 | Peak | Horizontal |
| 4844.00 | 42.79 | 33.06 | 35.04 | 3.94 | 44.75 | 54.00 | 9.25 | Average | Horizontal |
| 4844.00 | 59.64 | 33.06 | 35.04 | 3.94 | 61.60 | 74.00 | 12.40 | Peak | Vertical |
| 4844.00 | 39.78 | 33.06 | 35.04 | 3.94 | 41.74 | 54.00 | 12.26 | Average | Vertical |



Channel 6 / 2437 MHz

| Freq. MHz | Reading dB μ V | Ant. Fac. dB/m | Pre. Fac. dB | Cab. Loss dB | Level dB μ V/m | Limit dB μ V/m | Margin dB | Remark | Pol. |
|-----------|--------------------|----------------|--------------|--------------|--------------------|--------------------|-----------|---------|------------|
| 4874.00 | 58.69 | 33.16 | 35.15 | 3.96 | 60.66 | 74.00 | 13.34 | Peak | Horizontal |
| 4874.00 | 40.39 | 33.16 | 35.15 | 3.96 | 42.36 | 54.00 | 11.64 | Average | Horizontal |
| 4874.00 | 55.65 | 33.16 | 35.15 | 3.96 | 57.62 | 74.00 | 16.38 | Peak | Vertical |
| 4874.00 | 39.74 | 33.16 | 35.15 | 3.96 | 41.71 | 54.00 | 12.29 | Average | Vertical |

Channel 9 / 2452 MHz

| Freq. MHz | Reading dB μ V | Ant. Fac. dB/m | Pre. Fac. dB | Cab. Loss dB | Level dB μ V/m | Limit dB μ V/m | Margin dB | Remark | Pol. |
|-----------|--------------------|----------------|--------------|--------------|--------------------|--------------------|-----------|---------|------------|
| 4904.00 | 53.81 | 33.26 | 35.14 | 3.98 | 55.91 | 74.00 | 18.09 | Peak | Horizontal |
| 4904.00 | 39.58 | 33.26 | 35.14 | 3.98 | 41.68 | 54.00 | 12.32 | Average | Horizontal |
| 4904.00 | 52.54 | 33.26 | 35.14 | 3.98 | 54.64 | 74.00 | 19.36 | Peak | Vertical |
| 4904.00 | 40.77 | 33.26 | 35.14 | 3.98 | 42.87 | 54.00 | 11.13 | Average | Vertical |

Notes:

1. Measuring frequencies from 9 KHz - 10th harmonic or 26.5GHz (which is less), No emission found between lowest internal used/generated frequency to 30MHz.
2. Radiated emissions measured in frequency range from 9 KHz ~10th harmonic or 26.5GHz (which is less) were made with an instrument using Peak detector mode.
3. Data of measurement within this frequency range shown “---” in the table above means the reading of emissions are attenuated more than 30dB below the permissible limits or the field strength is too small to be measured.
4. Level = Reading + Ant. Fac - Pre. Fac. + Cab. Loss. Margin = Limit – Level.



5.6. Conducted Spurious Emissions and Band Edges Test

5.6.1. Standard Applicable


According to §15.247 (d): In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement. Attenuation below the general limits specified in Section 15.209(a) is not required. In addition, radiated emissions which fall in the restricted bands, as defined in Section 15.205(a), must also comply with the radiated emission limits specified in Section 15.209(a) (see Section 15.205(c)).

5.6.2. Test Procedures

The transmitter output is connected to a spectrum analyzer. The resolution bandwidth is set to 100 kHz. The video bandwidth is set to 300 kHz

The spectrum from 9 KHz to 26.5GHz is investigated with the transmitter set to the lowest, middle, and highest channels.

5.6.3. Block Diagram of Test Setup

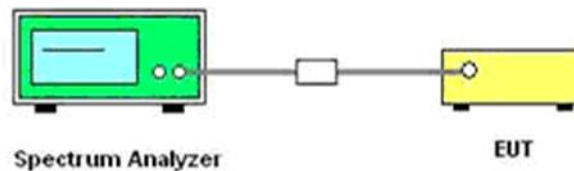

5.6.4. EUT Operation during Test

The EUT was programmed to be in continuously transmitting mode.

5.6.5. Test Results

Pass

Remark:

1. Test results including cable loss.
2. "----" means that the fundamental frequency not for 15.209 limits requirement.
3. Please refer to Appendix E and F of Appendix Test Data for WLAN(2.4G) for test data.

5.7. Power Line Conducted Emissions


5.7.1. Standard Applicable

According to §15.207 (a): For an intentional radiator which is designed to be connected to the public utility (AC) power line, the radio frequency voltage that is conducted back onto the AC power line on any frequency or frequencies within the band 150 kHz to 30 MHz shall not exceed 250 microvolts (The limit decreases linearly with the logarithm of the frequency in the range 0.15 MHz to 0.50 MHz). The limits at specific frequency range are listed as follows:

| Frequency Range (MHz) | Limits (dB μ V) | |
|-----------------------|---------------------|----------|
| | Quasi-peak | Average |
| 0.15 to 0.50 | 66 to 56 | 56 to 46 |
| 0.50 to 5 | 56 | 46 |
| 5 to 30 | 60 | 50 |

* Decreasing linearly with the logarithm of the frequency

5.7.2. Block Diagram of Test Setup

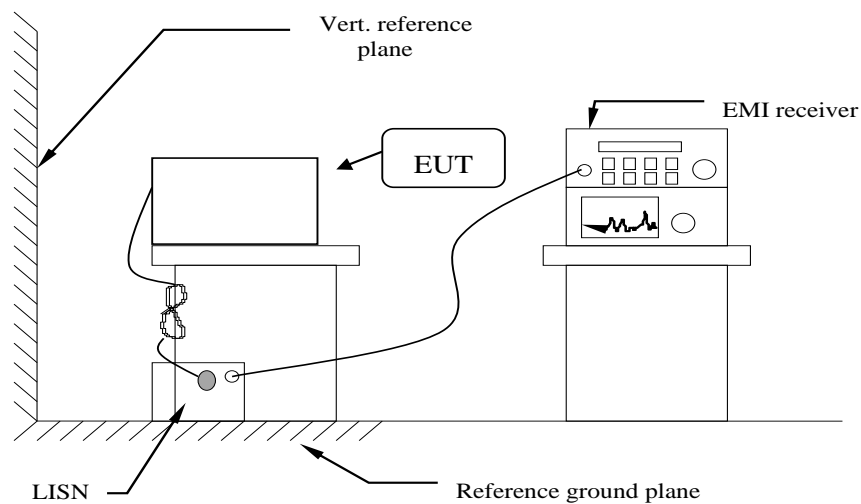

Note: the distance between LISN and Vertical reference plane is 40 cm and the distance between LISN and EUT is 80 cm.


5.7.3. Test Results

Pass

| | | | |
|---------------|----------|----------------|------------------|
| Temperature | 23.5°C | Humidity | 63.3% |
| Test Engineer | Tony Luo | Configurations | IEEE 802.11b/g/n |



Neutral Line

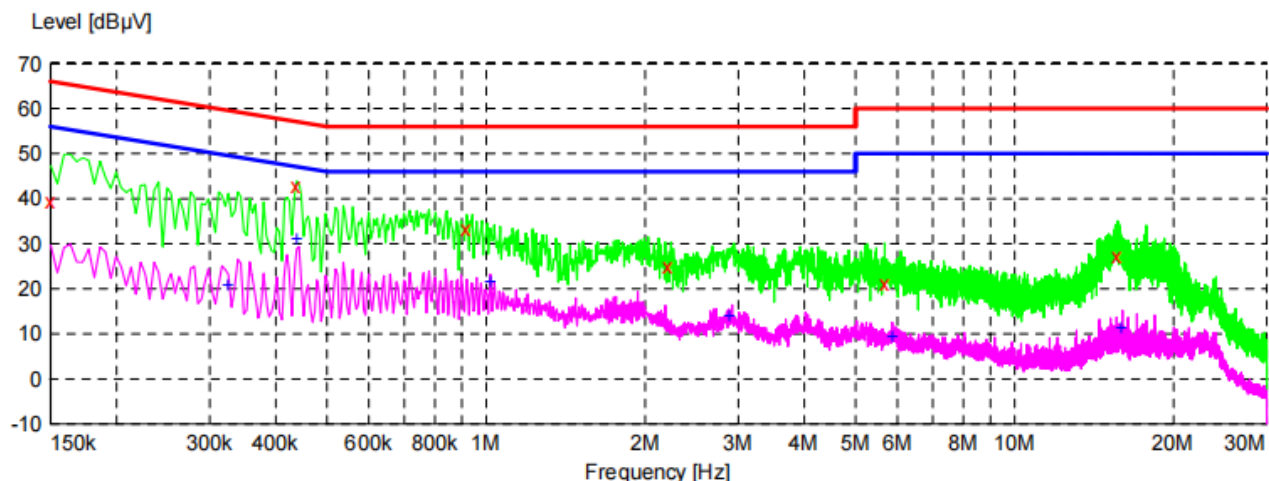

| Frequency MHz | Level dBμV | Transd dB | Limit dBμV | Margin dB | Detector | Line | PE |
|------------------|---------------|--------------|---------------|--------------|----------|------|-----|
| 0.150000 | 39.50 | 9.8 | 66 | 26.5 | QP | N | GND |
| 0.438000 | 42.80 | 10.0 | 57 | 14.3 | QP | N | GND |
| 0.919500 | 33.30 | 9.8 | 56 | 22.7 | QP | N | GND |
| 2.202000 | 24.90 | 9.7 | 56 | 31.1 | QP | N | GND |
| 5.676000 | 21.10 | 9.8 | 60 | 38.9 | QP | N | GND |
| 15.625500 | 27.40 | 9.9 | 60 | 32.6 | QP | N | GND |


| Frequency MHz | Level dBμV | Transd dB | Limit dBμV | Margin dB | Detector | Line | PE |
|------------------|---------------|--------------|---------------|--------------|----------|------|-----|
| 0.325500 | 20.70 | 10.1 | 50 | 28.9 | AV | N | GND |
| 0.438000 | 31.10 | 10.0 | 47 | 16.0 | AV | N | GND |
| 1.018500 | 21.50 | 9.7 | 46 | 24.5 | AV | N | GND |
| 2.899500 | 14.00 | 9.7 | 46 | 32.0 | AV | N | GND |
| 5.869500 | 9.50 | 9.8 | 50 | 40.5 | AV | N | GND |
| 15.909000 | 11.40 | 10.0 | 50 | 38.6 | AV | N | GND |

Note:

- Margin(dB)= Limit(dBμV) - Level(dBμV)
- If QP Result complies with AV limit, AV Result is deemed to comply with AV limit.
- Test setup: RBW: 9 kHz (150 kHz—30 MHz), Step size: 4 kHz, Scan time: auto.



Live Line

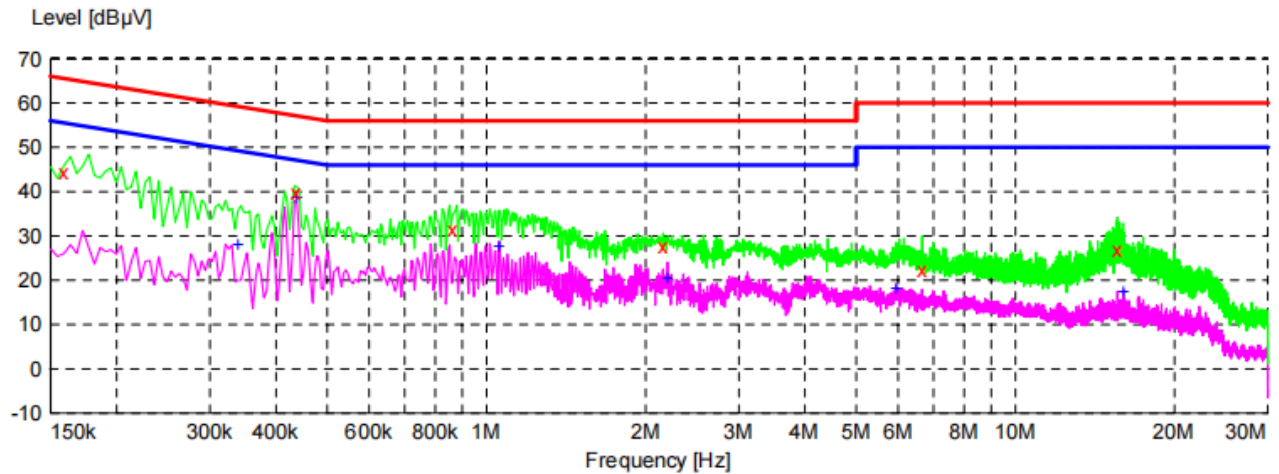

| Frequency MHz | Level dBμV | Transd dB | Limit dBμV | Margin dB | Detector | Line | PE |
|------------------|---------------|--------------|---------------|--------------|----------|------|-----|
| 0.159000 | 44.50 | 10.0 | 66 | 21.0 | QP | L1 | GND |
| 0.438000 | 39.90 | 10.0 | 57 | 17.2 | QP | L1 | GND |
| 0.865500 | 31.30 | 9.8 | 56 | 24.7 | QP | L1 | GND |
| 2.157000 | 27.60 | 9.7 | 56 | 28.4 | QP | L1 | GND |
| 6.670500 | 22.40 | 9.8 | 60 | 37.6 | QP | L1 | GND |
| 15.666000 | 27.00 | 10.0 | 60 | 33.0 | QP | L1 | GND |

| Frequency MHz | Level dBμV | Transd dB | Limit dBμV | Margin dB | Detector | Line | PE |
|------------------|---------------|--------------|---------------|--------------|----------|------|-----|
| 0.339000 | 27.90 | 10.1 | 49 | 21.3 | AV | L1 | GND |
| 0.438000 | 38.60 | 10.0 | 47 | 8.5 | AV | L1 | GND |
| 1.059000 | 27.60 | 9.7 | 46 | 18.4 | AV | L1 | GND |
| 2.202000 | 20.30 | 9.7 | 46 | 25.7 | AV | L1 | GND |
| 5.946000 | 18.30 | 9.8 | 50 | 31.7 | AV | L1 | GND |
| 15.990000 | 17.30 | 10.0 | 50 | 32.7 | AV | L1 | GND |

Note:

1. Margin(dB)= Limit(dBμV) - Level(dBμV)
2. If QP Result complies with AV limit, AV Result is deemed to comply with AV limit.
3. Test setup: RBW: 9 kHz (150 kHz—30 MHz), Step size: 4 kHz, Scan time: auto.




5.8. Band-Edge Measurements For Radiated Emissions

5.8.1. Standard Applicable

In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided the transmitter demonstrates compliance with the peak conducted power limits. If the transmitter complies with the conducted power limits based on the use of RMS averaging over a time interval, as permitted under paragraph (b)(3) of this section, the attenuation required under this paragraph shall be 30 dB instead of 20 dB. Attenuation below the general limits specified in §15.209(a) is not required. In addition, radiated emissions which fall in the restricted bands, as defined in §15.205(a), must also comply with the radiated emission limits specified in §15.209(a) (see §15.205(c)).


5.8.2. Block Diagram of Test Setup

☒ For Radiated

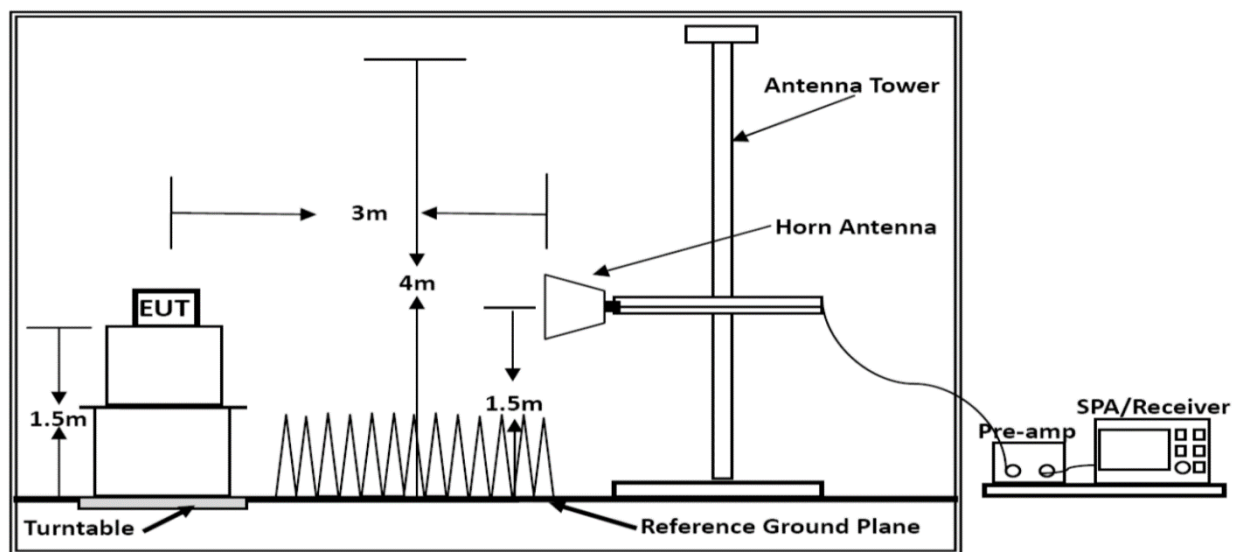

Above 1GHz

☐ For Conducted

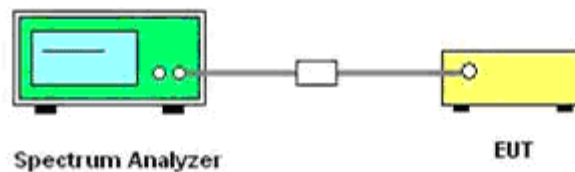

5.8.3. Test Procedures

☒ Radiated Method:

1. The EUT was placed on a turn table which is 1.5m above ground plane.
2. Maximum procedure was performed by raising the receiving antenna from 1m to 4m and rotating the turn table from 0°C to 360°C to acquire the highest emissions from EUT.
3. And also, each emission was to be maximized by changing the polarization of receiving antenna both horizontal and vertical.
4. Repeat above procedures until all frequency measurements have been completed..
5. Setting test receiver/spectrum as following table states:



| Test Frequency range | Test Receiver/Spectrum Setting | Detector |
|----------------------|--|----------|
| 1GHz-40GHz | Peak Value: RBW=1MHz/VBW=3MHz, Sweep time=Auto | Peak |
| | Average Value: RBW=1MHz/VBW=3MHz, Sweep time=Auto | Average |

☐ **Conducted Method:**

According to KDB 558074 D01 for Antenna-port conducted measurement. Antenna-port conducted measurements may also be used as an alternative to radiated measurements for demonstrating compliance in the restricted frequency bands. If conducted measurements are performed, then proper impedance matching must be ensured and an additional radiated test for cabinet/case spurious emissions is required.

1. Check the calibration of the measuring instrument using either an internal calibrator or a known signal from an external generator.
2. Remove the antenna from the EUT and then connect to a low loss RF cable from the antenna port to an EMI test receiver, then turn on the EUT and make it operate in transmitting mode. Then set it to Low Channel and High Channel within its operating range, and make sure the instrument is operated in its linear range.
3. Set both RBW and VBW of spectrum analyzer to 100 kHz with a convenient frequency span including 100kHz bandwidth from band edge, for Radiated emissions restricted band RBW=1MHz, VBW=3MHz for peak detector and RBW=1MHz, VBW=3MHz for AV detector.
4. Measure the highest amplitude appearing on spectral display and set it as a reference level. Plot the graph with marking the highest point and edge frequency.
5. Repeat above procedures until all measured frequencies were complete.
6. Measure the conducted output power (in dBm) using the detector specified by the appropriate regulatory agency (see 12.2.2, 12.2.3, and 12.2.4 for guidance regarding measurement procedures for determining quasi-peak, peak, and average conducted output power, respectively).
7. Add the maximum transmit antenna gain (in dBi) to the measured output power level to determine the EIRP level (see 12.2.5 for guidance on determining the applicable antenna gain)
8. Add the appropriate maximum ground reflection factor to the EIRP level (6 dB for frequencies ≤ 30 MHz, 4.7 dB for frequencies between 30 MHz and 1000 MHz, inclusive and 0 dB for frequencies > 1000 MHz).
9. For devices with multiple antenna-ports, measure the power of each individual chain and sum the EIRP of all chains in linear terms (e.g., Watts, mW).
10. Convert the result ant EIRP level to an equivalent electric field strength using the following relationship:

$$E = \text{EIRP} - 20\log D + 104.77 = \text{EIRP} + 95.23$$

Where:

E = electric field strength in dB μ V/m,

EIRP = equivalent isotropic radiated power in dBm

D = specified measurement distance in meters.

11. Since the out-of-band characteristics of the EUT transmit antenna will often be unknown, the use of a conservative antenna gain value is necessary. Thus, when determining the EIRP based on the measured conducted power, the upper bound on antenna gain for a device with a single RF output shall be selected as the maximum in-band gain of the antenna across all operating bands, or 2 dBi, whichever is greater. However, for devices that operate in multiple frequency bands while using



the same transmit antenna, the highest gain of the antenna within the operating band nearest in frequency to the restricted band emission being measured may be used in lieu of the overall highest gain when the emission is at a frequency that is within 20 percent of the nearest band edge frequency, but in no case shall a value less than 2 dBi be used.

12. Per KDB662911 D01 section b) In cases where a combination of conducted measurements and cabinet radiated measurements are permitted to demonstrate compliance with absolute radiated out-of-band and spurious limits (e.g., KDB Publications 558074 for DTS and 789033 for U-NII), the conducted measurements must be combined with directional gain to compute the radiated levels of the out-of-band and spurious emissions as described in this section.
13. Compare the resultant electric field strength level to the applicable regulatory limit.
14. Perform radiated spurious emission test duress until all measured frequencies were complete.

**5.8.4. Test Results****Pass**

| | | | |
|---------------|----------|----------------|------------------|
| Temperature | 27.5°C | Humidity | 56% |
| Test Engineer | Tony Luo | Configurations | IEEE 802.11b/g/n |

| 802.11b-2412MHz | | | | | | | | | | |
|-----------------|-----------|--------------|----------------|---------------|---------------|--------------|--------------|-----------|-------------------|------------|
| Item (Mark) | Freq. MHz | Reading dBμV | Ant. Fac. dB/m | PRM Factor dB | Cable Loss dB | Level dBμV/m | Limit dBμV/m | Margin dB | Detector | Pol. |
| 1 | 2390.00 | 52.99 | 29.99 | 30.21 | 8.35 | 61.12 | 74 | 12.88 | Peak | Horizontal |
| 1 | 2390.00 | 37.44 | 29.99 | 30.21 | 8.35 | 45.57 | 54 | 8.43 | AV ^[1] | Horizontal |
| 2 | 2390.00 | 57.19 | 29.99 | 30.21 | 8.35 | 65.32 | 74 | 8.68 | Peak | Vertical |
| 2 | 2390.00 | 39.10 | 29.99 | 30.21 | 8.35 | 47.23 | 54 | 6.77 | AV ^[1] | Vertical |

| 802.11b-2462MHz | | | | | | | | | | |
|-----------------|-----------|--------------|----------------|---------------|---------------|--------------|--------------|-----------|-------------------|------------|
| Item (Mark) | Freq. MHz | Reading dBμV | Ant. Fac. dB/m | PRM Factor dB | Cable Loss dB | Level dBμV/m | Limit dBμV/m | Margin dB | Detector | Pol. |
| 1 | 2483.50 | 57.95 | 30.25 | 30.25 | 8.5 | 66.45 | 74 | 7.55 | Peak | Horizontal |
| 1 | 2483.50 | 29.41 | 30.25 | 30.25 | 8.5 | 37.91 | 54 | 16.09 | AV ^[1] | Horizontal |
| 2 | 2483.50 | 48.49 | 30.25 | 30.25 | 8.5 | 56.99 | 74 | 17.01 | Peak | Vertical |
| 2 | 2483.50 | 26.95 | 30.25 | 30.25 | 8.5 | 35.45 | 54 | 18.55 | AV ^[1] | Vertical |
| 3 | 2488.68 | 56.31 | 30.25 | 30.25 | 8.5 | 64.81 | 74 | 9.19 | Peak | Horizontal |
| 3 | 2489.00 | 34.02 | 30.25 | 30.25 | 8.5 | 42.52 | 54 | 11.48 | AV ^[1] | Horizontal |
| 4 | 2495.26 | 48.33 | 30.25 | 30.25 | 8.5 | 56.83 | 74 | 17.17 | Peak | Vertical |
| 4 | 2496.19 | 36.16 | 30.25 | 30.25 | 8.5 | 44.66 | 54 | 9.34 | AV ^[1] | Vertical |

| 802.11g-2412MHz | | | | | | | | | | |
|-----------------|-----------|--------------|----------------|---------------|---------------|--------------|--------------|-----------|-------------------|------------|
| Item (Mark) | Freq. MHz | Reading dBμV | Ant. Fac. dB/m | PRM Factor dB | Cable Loss dB | Level dBμV/m | Limit dBμV/m | Margin dB | Detector | Pol. |
| 1 | 2390.00 | 53.25 | 29.99 | 30.21 | 8.35 | 61.38 | 74 | 12.62 | Peak | Horizontal |
| 1 | 2390.00 | 37.82 | 29.99 | 30.21 | 8.35 | 45.95 | 54 | 8.05 | AV ^[1] | Horizontal |
| 2 | 2390.00 | 55.30 | 29.99 | 30.21 | 8.35 | 63.43 | 74 | 10.57 | Peak | Vertical |
| 2 | 2390.00 | 38.85 | 29.99 | 30.21 | 8.35 | 46.98 | 54 | 7.02 | AV ^[1] | Vertical |

| 802.11g-2462MHz | | | | | | | | | | |
|-----------------|-----------|--------------|----------------|---------------|---------------|--------------|--------------|-----------|-------------------|------------|
| Item (Mark) | Freq. MHz | Reading dBμV | Ant. Fac. dB/m | PRM Factor dB | Cable Loss dB | Level dBμV/m | Limit dBμV/m | Margin dB | Detector | Pol. |
| 1 | 2483.50 | 53.80 | 30.25 | 30.25 | 8.5 | 62.30 | 74 | 11.70 | Peak | Horizontal |
| 1 | 2483.50 | 25.77 | 30.25 | 30.25 | 8.5 | 34.27 | 54 | 19.73 | AV ^[1] | Horizontal |
| 2 | 2483.50 | 52.54 | 30.25 | 30.25 | 8.5 | 61.04 | 74 | 12.96 | Peak | Vertical |
| 2 | 2483.50 | 25.37 | 30.25 | 30.25 | 8.5 | 33.87 | 54 | 20.13 | AV ^[1] | Vertical |



Report No.: TZ0059250216FRF03

| | | | | | | | | | | |
|---|---------|-------|-------|-------|-----|-------|----|-------|-------------------|------------|
| 3 | 2489.40 | 55.42 | 30.25 | 30.25 | 8.5 | 63.92 | 74 | 10.08 | Peak | Horizontal |
| 3 | 2485.11 | 38.49 | 30.25 | 30.25 | 8.5 | 46.99 | 54 | 7.01 | AV ^[1] | Horizontal |
| 4 | 2496.33 | 50.73 | 30.25 | 30.25 | 8.5 | 59.23 | 74 | 14.77 | Peak | Vertical |
| 4 | 2498.82 | 36.53 | 30.25 | 30.25 | 8.5 | 45.03 | 54 | 8.97 | AV ^[1] | Vertical |

| 802.11n HT20-2412MHz | | | | | | | | | | |
|----------------------|-----------|--------------|----------------|---------------|---------------|--------------|--------------|-----------|-------------------|------------|
| Item (Mark) | Freq. MHz | Reading dBμV | Ant. Fac. dB/m | PRM Factor dB | Cable Loss dB | Level dBμV/m | Limit dBμV/m | Margin dB | Detector | Pol. |
| 1 | 2390.00 | 56.16 | 29.99 | 30.21 | 8.35 | 64.29 | 74 | 9.71 | Peak | Horizontal |
| 1 | 2390.00 | 39.91 | 29.99 | 30.21 | 8.35 | 48.04 | 54 | 5.96 | AV ^[1] | Horizontal |
| 2 | 2390.00 | 56.75 | 29.99 | 30.21 | 8.35 | 64.88 | 74 | 9.12 | Peak | Vertical |
| 2 | 2390.00 | 37.76 | 29.99 | 30.21 | 8.35 | 45.89 | 54 | 8.11 | AV ^[1] | Vertical |

| 802.11n HT20-2462MHz | | | | | | | | | | |
|----------------------|-----------|--------------|----------------|---------------|---------------|--------------|--------------|-----------|-------------------|------------|
| Item (Mark) | Freq. MHz | Reading dBμV | Ant. Fac. dB/m | PRM Factor dB | Cable Loss dB | Level dBμV/m | Limit dBμV/m | Margin dB | Detector | Pol. |
| 1 | 2483.50 | 54.85 | 30.25 | 30.25 | 8.5 | 63.35 | 74 | 10.65 | Peak | Horizontal |
| 1 | 2483.50 | 25.12 | 30.25 | 30.25 | 8.5 | 33.62 | 54 | 20.38 | AV ^[1] | Horizontal |
| 2 | 2483.50 | 49.49 | 30.25 | 30.25 | 8.5 | 57.99 | 74 | 16.01 | Peak | Vertical |
| 2 | 2483.50 | 27.71 | 30.25 | 30.25 | 8.5 | 36.21 | 54 | 17.79 | AV ^[1] | Vertical |
| 3 | 2485.24 | 58.67 | 30.25 | 30.25 | 8.5 | 67.17 | 74 | 6.83 | Peak | Horizontal |
| 3 | 2487.29 | 34.06 | 30.25 | 30.25 | 8.5 | 42.56 | 54 | 11.44 | AV ^[1] | Horizontal |
| 4 | 2498.82 | 48.39 | 30.25 | 30.25 | 8.5 | 56.89 | 74 | 17.11 | Peak | Vertical |
| 4 | 2498.85 | 39.43 | 30.25 | 30.25 | 8.5 | 47.93 | 54 | 6.07 | AV ^[1] | Vertical |

| 802.11n HT40-2422MHz | | | | | | | | | | |
|----------------------|-----------|--------------|----------------|---------------|---------------|--------------|--------------|-----------|-------------------|------------|
| Item (Mark) | Freq. MHz | Reading dBμV | Ant. Fac. dB/m | PRM Factor dB | Cable Loss dB | Level dBμV/m | Limit dBμV/m | Margin dB | Detector | Pol. |
| 1 | 2390.00 | 53.99 | 29.99 | 30.21 | 8.35 | 62.12 | 74 | 11.88 | Peak | Horizontal |
| 1 | 2390.00 | 38.32 | 29.99 | 30.21 | 8.35 | 46.45 | 54 | 7.55 | AV ^[1] | Horizontal |
| 2 | 2390.00 | 55.41 | 29.99 | 30.21 | 8.35 | 63.54 | 74 | 10.46 | Peak | Vertical |
| 2 | 2390.00 | 36.88 | 29.99 | 30.21 | 8.35 | 45.01 | 54 | 8.99 | AV ^[1] | Vertical |

| 802.11n HT40-2452MHz | | | | | | | | | | |
|----------------------|-----------|--------------|----------------|---------------|---------------|--------------|--------------|-----------|-------------------|------------|
| 、 | Freq. MHz | Reading dBμV | Ant. Fac. dB/m | PRM Factor dB | Cable Loss dB | Level dBμV/m | Limit dBμV/m | Margin dB | Detector | Pol. |
| 1 | 2483.50 | 55.74 | 30.25 | 30.25 | 8.5 | 64.24 | 74 | 9.76 | Peak | Horizontal |
| 1 | 2483.50 | 25.95 | 30.25 | 30.25 | 8.5 | 34.45 | 54 | 19.55 | AV ^[1] | Horizontal |
| 2 | 2483.50 | 52.11 | 30.25 | 30.25 | 8.5 | 60.61 | 74 | 13.39 | Peak | Vertical |
| 2 | 2483.50 | 24.75 | 30.25 | 30.25 | 8.5 | 33.25 | 54 | 20.75 | AV ^[1] | Vertical |
| 3 | 2483.63 | 58.92 | 30.25 | 30.25 | 8.5 | 67.42 | 74 | 6.58 | Peak | Horizontal |
| 3 | 2483.56 | 38.02 | 30.25 | 30.25 | 8.5 | 46.52 | 54 | 7.48 | AV ^[1] | Horizontal |
| 4 | 2496.34 | 47.99 | 30.25 | 30.25 | 8.5 | 56.49 | 74 | 17.51 | Peak | Vertical |



Report No.: TZ0059250216FRF03

| | | | | | | | | | | |
|---|---------|-------|-------|-------|-----|-------|----|------|-------------------|----------|
| 4 | 2495.13 | 36.97 | 30.25 | 30.25 | 8.5 | 45.47 | 54 | 8.53 | AV ^[1] | Vertical |
|---|---------|-------|-------|-------|-----|-------|----|------|-------------------|----------|

Note:

1. Level = Read Level + Antenna Factor + Cable loss - PRM Factor.
2. The other emission levels were very low against the limit.
3. Margin = Limit - Level.
4. The average measurement was not performed when the peak measured data under the limit of average detection.
5. Detector AV is setting spectrum/receiver. RBW=1MHz/VBW=3MHz/Sweep time=Auto/Detector=Average.



5.9. Antenna Requirements

5.9.1. Standard Applicable

According to antenna requirement of §15.203.

An intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the provisions of this Section. The manufacturer may design the unit so that a broken antenna can be re-placed by the user, but the use of a standard antenna jack or electrical connector is prohibited. This requirement does not apply to carrier current devices or to devices operated under the provisions of Sections 15.211, 15.213, 15.217, 15.219, or 15.221. Further, this requirement does not apply to intentional radiators that must be professionally installed, such as perimeter protection systems and some field disturbance sensors, or to other intentional radiators which, in accordance with Section 15.31(d), must be measured at the installation site. However, the installer shall be responsible for ensuring that the proper antenna is employed so that the limits in this Part are not exceeded.

And according to §15.247(4)(1), system operating in the 2400-2483.5MHz bands that are used exclusively for fixed, point-to-point operations may employ transmitting antennas with directional gain greater than 6dBi provided the maximum peak output power of the intentional radiator is reduced by 1 dB for every 3 dB that the directional gain of the antenna exceeds 6dBi.

5.9.2. Antenna Connector Construction

The directional gains of antenna used for transmitting is refer to section 1.1 of this report, and the antenna is an internal antenna connect to PCB board and no consideration of replacement. Please see EUT photo for details.

5.9.3. Results

Compliance



6. LIST OF MEASURING EQUIPMENTS

| Item | Test Equipment | Manufacturer | Model No. | Serial No. | Calibration Date | Calibration Due Date |
|------|----------------------|-----------------|---------------|------------|------------------|----------------------|
| 1 | MXA Signal Analyzer | Keysight | N9020A | MY52091623 | 2024-12-31 | 2025-12-30 |
| 2 | Power Sensor | Agilent | U2021XA | MY5365004 | 2024-12-31 | 2025-12-30 |
| 3 | Power Meter | Agilent | U2531A | TW53323507 | 2024-12-31 | 2025-12-30 |
| 4 | Loop Antenna | schwarzbeck | FMZB1519B | 00023 | 2022-11-13 | 2025-11-12 |
| 5 | Wideband Antenna | schwarzbeck | VULB 9163 | 958 | 2022-11-13 | 2025-11-12 |
| 6 | Horn Antenna | schwarzbeck | BBHA 9120D | 01989 | 2022-11-13 | 2025-11-12 |
| 7 | EMI Test Receiver | R&S | ESCI | 100849/003 | 2024-12-31 | 2025-12-30 |
| 8 | Controller | MF | MF7802 | N/A | N/A | N/A |
| 9 | Amplifier | schwarzbeck | BBV 9743 | 209 | 2024-12-31 | 2025-12-30 |
| 10 | Amplifier | Tonscend | TSAMP-0518SE | -- | 2024-12-31 | 2025-12-30 |
| 11 | RF Cable(below 1GHz) | HUBER+SUHNER | RG214 | N/A | 2024-12-31 | 2025-12-30 |
| 12 | RF Cable(above 1GHz) | HUBER+SUHNER | RG214 | N/A | 2024-12-31 | 2025-12-30 |
| 13 | Artificial Mains | ROHDE & SCHWARZ | ENV 216 | 101333-IP | 2024-12-31 | 2025-12-30 |
| 14 | EMI Test Software | ROHDE & SCHWARZ | ESK1 | V1.71 | N/A | N/A |
| 15 | Horn Antenna | A-INFO | LB-180400-KF | J211020657 | 2023-10-12 | 2025-10-11 |
| 16 | Spectrum Analyzer | R&S | FSV40 | 101321 | 2024-06-06 | 2025-06-05 |
| 17 | Fixed Attenuator | Mini circuits | BW-S6-2W263A+ | N/A | 2024-12-31 | 2025-12-30 |

Test software used:

| Item | Test Software | Manufacturer | Name | Version |
|------|-------------------|-----------------|----------|----------|
| 1 | EMI Test Software | ROHDE & SCHWARZ | ESK1 | V1.71 |
| 2 | RE test software | Tonscend | JS32-RE | V5.0.0.0 |
| 3 | Test Software | Tonscend | JS1120-3 | V3.2.22 |



7. TEST SETUP Photographs of EUT

Please refer to separated files for Test Setup Photos of the EUT.

8. EXTERIOR PHOTOGRAPHS OF THE EUT

Please refer to separated files for External Photos of the EUT.

9. INTERIOR PHOTOGRAPHS OF THE EUT

Please refer to separated files for Internal Photos of the EUT.

-----THE END OF REPORT-----