

FCC PART 15 SUBPART C TEST REPORT

FCC PART 15.247


Report Reference No.....: MWR1411000405

FCC ID.....: RQQHLT-E425


Compiled by
(position+printed name+signature)..: File administrators Martin Ao



Supervised by
(position+printed name+signature)..: Test Engineer Martin Ao



Approved by
(position+printed name+signature)..: Manager Dixon Hao



Date of issue.....: Nov 19, 2014

Representative Laboratory Name ..: Maxwell International Co., Ltd.

Address: Room 509, Hongfa center building, Baoan District, Shenzhen, Guangdong, China

Testing Laboratory Name: Shenzhen CTL Testing Technology Co., Ltd.

Address: Floor 1-A, Baisha Technology Park, No. 3011, Shaheixi Road, Nanshan, Shenzhen, China

Applicant's name.....: HYUNDAI CORPORATION

Address: 140-2, Kye-dong, Chongro-ku, Seoul, South Korea

Test specification

Standard: **FCC Part 15.247: Operation within the bands 902-928 MHz, 2400-2483.5 MHz and 5725-5850 MHz**

TRF Originator: Maxwell International Co., Ltd.

Master TRF: Dated 2011-05

Maxwell International Co., Ltd. All rights reserved.

This publication may be reproduced in whole or in part for non-commercial purposes as long as the Maxwell International Co., Ltd. as copyright owner and source of the material.
Maxwell International Co., Ltd. takes no responsibility for and will not assume liability for damages resulting from the reader's interpretation of the reproduced material due to its placement and context.

Test item description Mobile Phone

Trade Mark: HYUNDAI

Manufacturer.....: WASAM TECHNOLOGY (SHEN ZHEN) CO.,LTD.

Model/Type reference.....: E425

Listed Models: E420

Modulation Type: DSSS(CCK,DQPSK,DBPSK),OFDM(64QAM,16QAM,QPSK, BPSK)

Operation Frequency.....: From 2412MHz to 2462MHz

Rating: DC 3.70V

Hardware version: DR315 V0.1

Software version: S11P_HS_W412_HYUNDAI_B24859_2014-10-22_64P8_32P8_FWVGA_W25[D]_GpsL_DC_FL_GS_LED_170552

Result.....: **PASS**

TEST REPORT

Test Report No. :	MWR1411000405	Nov 19, 2014
		Date of issue

Equipment under Test : Mobile Phone

Model /Type : E425

Listed Models : E420

Applicant : **HYUNDAI CORPORATION**

Address : 140-2, Kye-dong, Chongro-ku, Seoul, South Korea

Manufacturer **WASAM TECHNOLOGY (SHEN ZHEN) CO.,LTD.**

Address : B,F Building, (Hengqiang Industrial Park), Bogang Taifeng Industrial Zone, Shajing Town, Bao'an District, Shenzhen, China.

Test Result	PASS
--------------------	-------------

The test report merely corresponds to the test sample.

It is not permitted to copy extracts of these test result without the written permission of the test laboratory.

Contents

1.	<u>TEST STANDARDS</u>	<u>4</u>
2.	<u>SUMMARY</u>	<u>5</u>
2.1.	General Remarks	5
2.2.	Product Description	5
2.3.	Equipment Under Test	5
2.4.	Description of the test mode	5
2.5.	Short description of the Equipment under Test (EUT)	5
2.6.	EUT operation mode	7
2.7.	EUT configuration	7
2.8.	Internal Identification of AE used during the test	8
2.9.	Related Submittal(s) / Grant (s)	8
2.10.	Modifications	8
2.11.	Test Environments	8
3.	<u>TEST ENVIRONMENT</u>	<u>9</u>
3.1.	Address of the test laboratory	9
3.2.	Test Facility	9
3.3.	Environmental conditions	9
3.4.	Test Description	9
3.5.	Statement of the measurement uncertainty	9
3.6.	Equipments Used during the Test	10
4.	<u>TEST CONDITIONS AND RESULTS.....</u>	<u>11</u>
4.1.	AC Power Conducted Emission	11
4.2.	Radiated Emission	14
4.3.	Maximum Peak Output Power	21
4.4.	Power Spectral Density	23
4.5.	Band Edge Compliance of RF Emission	32
4.6.	Spurious RF Conducted Emission	46
4.7.	6dB Bandwidth	62
4.8.	Antenna Requirement	71
5.	<u>TEST SETUP PHOTOS OF THE EUT</u>	<u>72</u>

1. TEST STANDARDS

The tests were performed according to following standards:

[FCC Rules Part 15.247](#): Frequency Hopping, Direct Spread Spectrum and Hybrid Systems that are in operation within the bands of 902-928 MHz, 2400-2483.5 MHz, and 5725-5850 MHz.

[ANSI C63.10](#): American National Standard for Testing Unlicensed Wireless Devices

[KDB558074 D01 V03](#): Guidance for Performing Compliance Measurements on Digital Transmission Systems (DTS) Operating Under §15.247

2. SUMMARY

2.1. General Remarks

Date of receipt of test sample	:	Oct 10, 2014
Testing commenced on	:	Oct 11, 2014
Testing concluded on	:	Nov 17, 2014

2.2. Product Description

The **HYUNDAI CORPORATION's** Model: E425 or the "EUT" as referred to in this report; more general information as follows, for more details, refer to the user's manual of the EUT.

Name of EUT	Mobile Phone
Model Number	E425
FCC ID	RQQHLT-E425
Modulation Type	GMSK for GSM/GPRS;QPSK for WCDMA
Antenna Type	Internal
GSM/EDGE/GPRS	Supported GPRS
Extreme temp. Tolerance	-30°C to +50°C
Extreme vol. Limits	3.40VDC to 4.20VDC (nominal: 3.70VDC)
GSM Operation Frequency Band	GSM 850MHz/ PCS 1900MHz
GSM Release Version	R99
GPRS operation mode	Class B
GPRS Multislot Class	12
EGPRS Multislot Class	Only support downlink mode

2.3. Equipment Under Test

Power supply system utilised

Power supply voltage	:	<input type="radio"/> 120V / 60 Hz	<input type="radio"/> 115V / 60Hz
		<input type="radio"/> 12 V DC	<input type="radio"/> 24 V DC
		<input checked="" type="radio"/> Other (specified in blank below)	

DC 3.70V

2.4. Description of the test mode

IEEE 802.11b/g/n: The product support Third channels but only use Eleventh channels in USA.

Channel	Frequency(MHz)	Channel	Frequency(MHz)
1	2412	8	2447
2	2417	9	2452
3	2422	10	2457
4	2427	11	2462
5	2432		
6	2437		
7	2442		

2.5. Short description of the Equipment under Test (EUT)

2.5.1 General Description

E425 is subscriber equipment in the WCDMA/GSM system. The HSPA/UMTS frequency band is Band II, Band V; The GSM/GPRS/EDGE (EDGE downlink only) frequency and includes GSM850 and GSM900 and DCS1800 and PCS1900, but only Band II and Band V and GSM850 and PCS1900 bands test data included in

this report. The Mobile Phone implements such functions as RF signal receiving/transmitting, HSPA/UMTS and GSM/GPRS/EDGE protocol processing, voice, video MMS service, GPS, AGPS and WIFI etc. Externally it provides micro SD card interface, earphone port (to provide voice service) and SIM card interface. It also provides Bluetooth module to synchronize data between a PC and the phone, or to use the built-in modem of the phone to access the Internet with a PC, or to exchange data with other Bluetooth devices.

NOTE: Unless otherwise noted in the report, the functional boards installed in the units shall be selected from the below list, but not means all the functional boards listed below shall be installed in one unit.

2.5.2 Test Modes

Test Case	Test Conditions	
	Configuration	Description
DTS (6 dB) Bandwidth	Measurement Method	FCC KDB 558074 §7.1.1Option2.
	Test Environment	NTNV
	EUT Configuration	11b_L,11b_M,11b_H 11g_L,11g_M,11g_H 11n HT20_L, 11n HT20_M, 11n HT20_H 11n HT40_L, 11n HT40_M, 11n HT40_H
Maximum Peak Conducted Output Power	Measurement Method	FCC KDB 558074§7.2.1.1
	Test Environment	NTNV
	Test Setup	Test Setup 1
	EUT Configuration	11b_L,11b_M,11b_H 11g_L,11g_M,11g_H 11n HT20_L, 11n HT20_M, 11n HT20_H 11n HT40_L, 11n HT40_M, 11n HT40_H
Maximum Power Spectral Density Level	Measurement Method	FCC KDB 558074 §7.3.1Option 1 (peak PSD).
	Test Environment	NTNV
	EUT Configuration	11b_L,11b_M,11b_H 11g_L,11g_M,11g_H 11n HT20_L, 11n HT20_M, 11n HT20_H 11n HT40_L, 11n HT40_M, 11n HT40_H
Unwanted Emissions into Non-Restricted Frequency Bands	Measurement Method	FCC KDB 558074§7.4.1, use Peak PSD.
	Test Environment	NTNV
	Test Setup	Test Setup 1
	EUT Configuration	11b_L,11b_M,11b_H 11g_L,11g_M,11g_H 11n HT20_L, 11n HT20_M, 11n HT20_H 11n HT40_L, 11n HT40_M, 11n HT40_H
Unwanted Emissions into Restricted Frequency Bands (Conducted)	Measurement Method	FCC KDB 558074§7.4.2, Conducted (antenna-port).
	Test Environment	NTNV
	EUT Configuration	11b_L,11b_M,11b_H 11g_L,11g_M,11g_H 11n HT20_L, 11n HT20_M, 11n HT20_H 11n HT40_L, 11n HT40_M, 11n HT40_H
Unwanted Emissions into Restricted	Measurement Method	FCC KDB 558074§7.4.2,Radiated(cabinet/case emissions with Impedance matching for antenna-port).
	Test Environment	NTNV
	EUT Configuration	11b_L,11b_M,11b_H 11g_L,11g_M,11g_H 11n HT20_L, 11n HT20_M, 11n HT20_H 11n HT40_L, 11n HT40_M, 11n HT40_H

Test Case	Test Conditions	
	Configuration	Description
AC Power Line Conducted Emissions	Measurement Method	AC mains conducted.
	Test Environment	NTNV
	EUT Configuration	11g_M (Worst Conf.).

Note: 1. For Radiated Emissions, By preliminary testing and verifying three axis (X, Y and Z) position of EUT transmitted status, it was found that "Z axis" position was the worst, then the final test was executed the worst condition and test data were recorded in this report.

2. Typical working modes for each IEEE 802.11 mode are selected to perform tests. The manufacturer provide special test software to control TX duty cycle >98% for TX test; recorded worst case at difference data rate as follows:

Test Mode	Test Modes Description
11b	IEEE 802.11b with data rate of 1 Mbps using SISO mode.
11g	IEEE 802.11g with data rate of 6 Mbps using SISO mode.
11n HT20	IEEE 802.11n with data date of MCS0 and bandwidth of 20MHz using SISO mode.
11n HT40	IEEE 802.11n with data date of MCS7 and bandwidth of 40MHz using SISO mode.

2.6. EUT operation mode

Test Mode	RF Ch.	BG Port	TX Freq. [MHz]	RX Freq. [MHz]	Ch. BW [MHz]
11b	L	BG 1	Ch No. 1 / 2412MHz	---	20
		BG2		---	20
	M	BG 1	Ch No. 6 / 2437 MHz	---	20
		BG2		---	20
	H	BG 1	Ch No. 11/ 2462MHz	---	20
		BG2		---	20
11g	L	BG 1	Ch No. 1 / 2412MHz	---	20
		BG2		---	20
	M	BG 1	Ch No. 6 / 2437 MHz	---	20
		BG2		---	20
	H	BG 1	Ch No. 11/ 2462MHz	---	20
		BG2		---	20
11n HT20	L	BG 1	Ch No. 1 / 2412MHz	---	20
		BG2		---	20
	M	BG 1	Ch No. 6 / 2437 MHz	---	20
		BG2		---	20
	H	BG 1	Ch No. 11/ 2462MHz	---	20
		BG2		---	20
11n HT40	L	BG 1	Ch No. 3/ 2422MHz	---	40
		BG2		---	40
	M	BG 1	Ch No. 6 / 2437 MHz	---	40
		BG2		---	40
	H	BG 1	Ch No. 9/ 2452 MHz	---	40
		BG2		---	40

2.7. EUT configuration

The following peripheral devices and interface cables were connected during the measurement:

- - supplied by the manufacturer
- - supplied by the lab

○	Power Cable	Length (m) :	/
		Shield :	/
		Detachable :	/
○	Multimeter	Manufacturer :	/
		Model No. :	/

2.8. Internal Identification of AE used during the test

AE ID*	Description
AE1	Charger

AE1

Model: E425

INPUT: 100-300V 50/60HZ 0.15A

OUTPUT: DC 5.0V,500mAh

*AE ID: is used to identify the test sample in the lab internally.

2.9. Related Submittal(s) / Grant (s)

This submittal(s) (test report) is intended for **FCC ID: RQQHLT-E425** filing to comply with Section 15.247 of the FCC Part 15, Subpart C Rules.

2.10. Modifications

No modifications were implemented to meet testing criteria.

2.11. Test Environments

NOTE: The values used in the test report maybe stringent than the declared.

Environment Parameter	Selected Values During Tests		
NTNV	Temperature	Voltage	Relative Humidity
	Ambient	3.7VDC	Ambient

1. The frequency bands used in this EUT are listed as follows:

Frequency Band(MHz)	2400-2483.5	5150-5350	5470-5725	5725-5850
802.11b	√	—	—	—
802.11g	√	—	—	—
802.11n HT20	√	—	—	—
802.11n HT40	√	—	—	—

2. The EUT incorporates a SISO function,Physically,the EUT provides one completed transmitter and one completed receiver.

Modulation Mode	TX Function
802.11b	1TX
802.11g	1TX
802.11n HT20	1TX
802.11n HT40	1TX

3. TEST ENVIRONMENT

3.1. Address of the test laboratory

Shenzhen CTL Testing Technology Co., Ltd.

Floor 1-A, Baisha Technology Park, No. 3011, Shahexi Road, Nanshan, Shenzhen, China

The sites are constructed in conformance with the requirements of ANSI C63.7, ANSI C63.4 (2003) and CISPR Publication 22.

3.2. Test Facility

The test facility is recognized, certified, or accredited by the following organizations:

FCC-Registration No.: 970318

Shenzhen CTL Testing Technology Co., Ltd. has been registered and fully described in a report filed with the (FCC) Federal Communications Commission. The acceptance letter from the FCC is maintained in our files. Registration 970318, Dec 19, 2013

3.3. Environmental conditions

During the measurement the environmental conditions were within the listed ranges:

Temperature: 15-35 ° C

Humidity: 30-60 %

Atmospheric pressure: 950-1050mbar

3.4. Test Description

Test Item	FCC Part No.	Requirements	Verdict
DTS (6 dB) Bandwidth	15.247(a)(2)	≥ 500 kHz.	PASS
Maximum Peak Conducted Output Power	15.247(b)(3)	For directional gain: $< 30\text{dBm} - (G[\text{dBi}] - 6 [\text{dB}])$, peak; Otherwise : $< 30\text{dBm}$, peak.	PASS
Maximum Power Spectral Density Level	15.247(e)	For directional gain : $< 8\text{dBm}/3$ kHz – $(G[\text{dBi}] - 6[\text{dB}])$, peak. Otherwise : $< 8\text{dBm}/3$ kHz, peak.	PASS
Band Edges Compliance	15.247(d)	$< -20\text{dBm}/100$ kHz if total peak power \leq power limit.	PASS
Unwanted Emissions into Non-Restricted Frequency Bands	15.247(d)	$< -20\text{dBm}/100$ kHz if total peak power \leq power limit.	PASS
Unwanted Emissions into Restricted Frequency Bands (Conducted)	15.247(d) 15.209	$< -20\text{dBm}/100$ kHz if total peak power \leq power limit.	PASS
Unwanted Emissions into Restricted Frequency Bands (Radiated)	15.247(d) 15.209	FCC Part 15.209 field strength limit;	PASS
AC Power Line Conducted Emissions	15.207	FCC Part 15.207 conducted limit;	PASS

Remark: The measurement uncertainty is not included in the test result.

3.5. Statement of the measurement uncertainty

The data and results referenced in this document are true and accurate. The reader is cautioned that there may be errors within the calibration limits of the equipment and facilities. The measurement uncertainty was calculated for all measurements listed in this test report acc. to CISPR 16 - 4 „Specification for radio disturbance and immunity measuring apparatus and methods – Part 4: Uncertainty in EMC Measurements“ and is documented in the Shenzhen CTL Testing Technology Co., Ltd. quality system acc. to DIN EN ISO/IEC 17025. Furthermore, component and process variability of devices similar to that tested may

result in additional deviation. The manufacturer has the sole responsibility of continued compliance of the device.

Hereafter the best measurement capability for Shenzhen CTL Testing Technology Co., Ltd. is reported:

Test Items	Measurement Uncertainty	Notes
Frequency stability	25 Hz	(1)
Transmitter power conducted	0.57 dB	(1)
Transmitter power Radiated	2.20 dB	(1)
Conducted spurious emission 9KHz-40 GHz	1.60 dB	(1)
Radiated spurious emission 9KHz-12.75 GHz	2.20 dB	(1)
Conducted Emission 9KHz-30MHz	3.39 dB	(1)
Radiated Emission 9KHz-30MHz	2.88 dB	(1)
Radiated Emission 30~1000MHz	4.24 dB	(1)
Radiated Emission 1~18GHz	5.16 dB	(1)
Radiated Emission 18-40GHz	5.54 dB	(1)
Occupied Bandwidth	-----	(1)
Emission Mask	-----	(1)
Modulation Characteristic	-----	(1)
Transmitter Frequency Behavior	-----	(1)

3.6. Equipments Used during the Test

AC Power Conducted Emission					
Item	Test Equipment	Manufacturer	Model No.	Serial No.	Last Cal.
1	Artificial Mains	Rohde&Schwarz	ENV216	101316	2014/07/02
2	EMI Test Receiver	Rohde&Schwarz	ESCI3	103710	2014/07/02
3	Pulse Limiter	Com-Power	LIT-153	53226	2014/07/01
4	EMI Test Software	Rohde&Schwarz	ES-K1 V1.71	N/A	N/A
5	RF Cable4	/	Cable000001	/	2014/07/06

Radiated Emission					
Item	Test Equipment	Manufacturer	Model No.	Serial No.	Last Cal.
1	Bilog Antenna	Sunol Sciences Corp.	JB1	A061713	2014/07/12
2	EMI TEST Receivcer	Rohde&Schwarz	ESCI3	103710	2014/07/02
3	EMI TEST Software	Audix	E3	N/A	N/A
4	EMI TEST Software	Rohde&Schwarz	ESK1	N/A	N/A
5	HORN ANTENNA	Sunol Sciences Corp.	DRH-118	A062013	2014/07/12
6	Amplifer	HP	8447D	3113A07663	2014/10/26
7	Preamplifier	HP	8349B	3155A00882	2014/07/03
8	Amplifer	Compliance Direction systems	PAP1-4060	129	2014/07/03
9	Loop Antenna	Rohde&Schwarz	HFH2-Z2	100020	2014/06/29
10	TURNTABLE	MATURO	TT2.0	----	N/A
11	ANTENNA MAST	MATURO	TAM-4.0-P	----	N/A
12	Horn Antenna	SCHWARZBECK	BBHA9170	25849	2014/06/21
13	Spectrum Analyzer	Rohde&Schwarz	FSU26	201148	2014/07/02
14	RF Cable 5	/	Cable000005	/	2014/07/06
15	RF Cable 6	/	Cable000006	/	2014/07/06


Maximum Peak Output Power / Power Spectral Density / 6dB Bandwidth / Band Edge Compliance of RF Emission / Spurious RF Conducted Emission					
Item	Test Equipment	Manufacturer	Model No.	Serial No.	Last Cal.
1	Spectrum Analyzer	Rohde&Schwarz	FSU26	201148	2014/07/02
2	Power Sensor	Rohde&Schwarz	NRR-Z81	256697	2014/07/02
3	MXA Signal Analyzer	Agilent	N9020A	MY53420615	2014/05/12
4	RF Cable1	/	Cable000001	/	2014/07/06

The Cal.Interval was one year

4. TEST CONDITIONS AND RESULTS

4.1. AC Power Conducted Emission

TEST CONFIGURATION

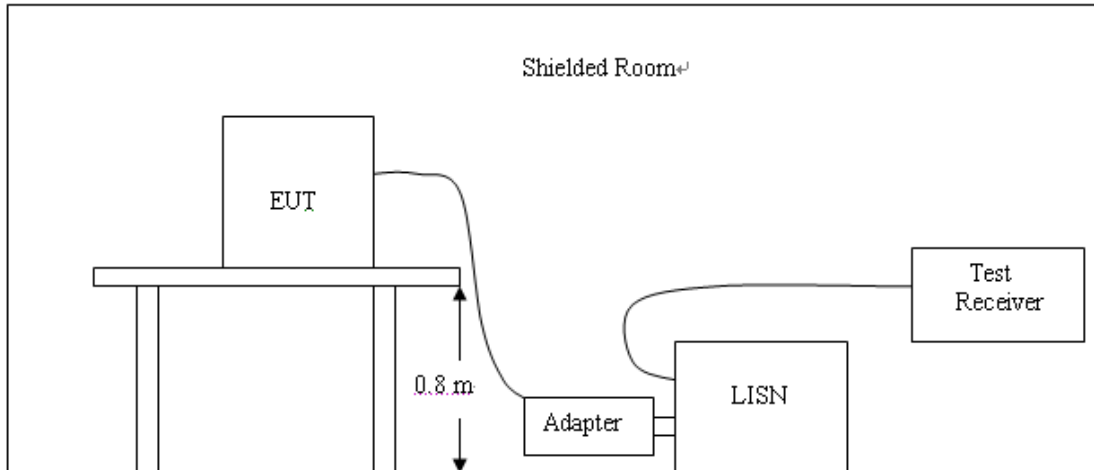

TEST PROCEDURE

1. The equipment was set up as per the test configuration to simulate typical actual usage per the user's manual. The EUT is a tabletop system, a wooden table with a height of 0.8 meters is used and is placed on the ground plane as per ANSI C63.10-2009.
2. Support equipment, if needed, was placed as per ANSI C63.10-2009
3. All I/O cables were positioned to simulate typical actual usage as per ANSI C63.10-2009
4. The EUT received DC5V power from the adapter, the adapter received AC120V/60Hz power through a Line Impedance Stabilization Network (LISN) which supplied power source and was grounded to the ground plane.
5. All support equipments received AC power from a second LISN, if any.
6. The EUT test program was started. Emissions were measured on each current carrying line of the EUT using a spectrum Analyzer / Receiver connected to the LISN powering the EUT. The LISN has two monitoring points: Line 1 (Hot Side) and Line 2 (Neutral Side). Two scans were taken: one with Line 1 connected to Analyzer / Receiver and Line 2 connected to a 50 ohm load; the second scan had Line 1 connected to a 50 ohm load and Line 2 connected to the Analyzer / Receiver.
7. Analyzer / Receiver scanned from 150 KHz to 30MHz for emissions in each of the test modes.
8. During the above scans, the emissions were maximized by cable manipulation.

AC Power Conducted Emission Limit

For intentional device, according to § 15.207(a) AC Power Conducted Emission Limits is as following:

Frequency (MHz)	Maximum RF Line Voltage (dBμV)			
	CLASS A		CLASS B	
	Q.P.	Ave.	Q.P.	Ave.
0.15 - 0.50	79	66	66-56*	56-46*
0.50 - 5.00	73	60	56	46
5.00 - 30.0	73	60	60	50


* Decreasing linearly with the logarithm of the frequency

TEST RESULTS

The AC Power Conducted Emission measurement is performed the each test mode (b/g/n) and channel (low/mid/high), the datum recorded below (802.11b mode, the middle channel) is the worst case for all the test modes and channels.

SCAN TABLE: "Voltage (9K-30M)FIN"

Short Description: 150K-30M Voltage

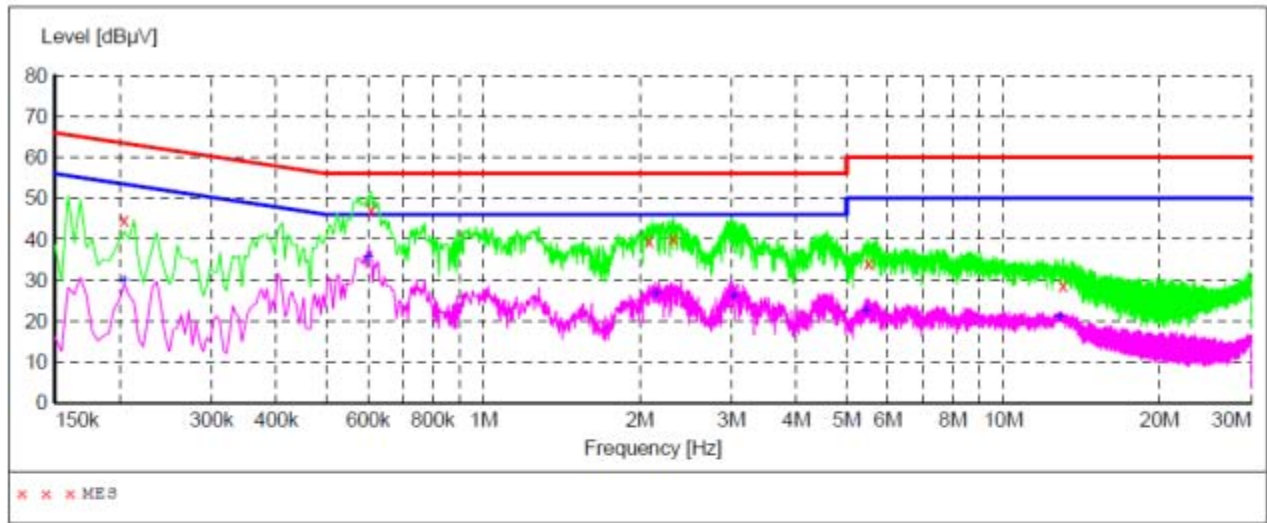
MEASUREMENT RESULT:


Frequency MHz	Level dBμV	Transd dB	Limit dBμV	Margin dB	Detector	Line	PE
0.204000	44.70	10.4	63.4	18.7	QP	L1	GND
0.609000	47.00	10.3	56.0	9.0	QP	L1	GND
2.085000	39.50	10.3	56.0	16.5	QP	L1	GND
2.319000	40.20	10.3	56.0	15.8	QP	L1	GND
5.514000	34.20	10.3	60.0	25.8	QP	L1	GND
13.042500	28.80	10.7	60.0	31.2	QP	L1	GND

MEASUREMENT RESULT:

Frequency MHz	Level dBμV	Transd dB	Limit dBμV	Margin dB	Detector	Line	PE
0.204000	29.80	10.4	53.4	23.6	AV	L1	GND
0.600000	35.50	10.3	46.0	10.5	AV	L1	GND
2.152500	26.70	10.3	46.0	19.3	AV	L1	GND
3.030000	26.00	10.3	46.0	20.0	AV	L1	GND
5.446500	22.40	10.3	50.0	27.6	AV	L1	GND
12.840000	20.80	10.7	50.0	29.2	AV	L1	GND

SCAN TABLE: "Voltage (9K-30M) FIN"

Short Description: 150K-30M Voltage

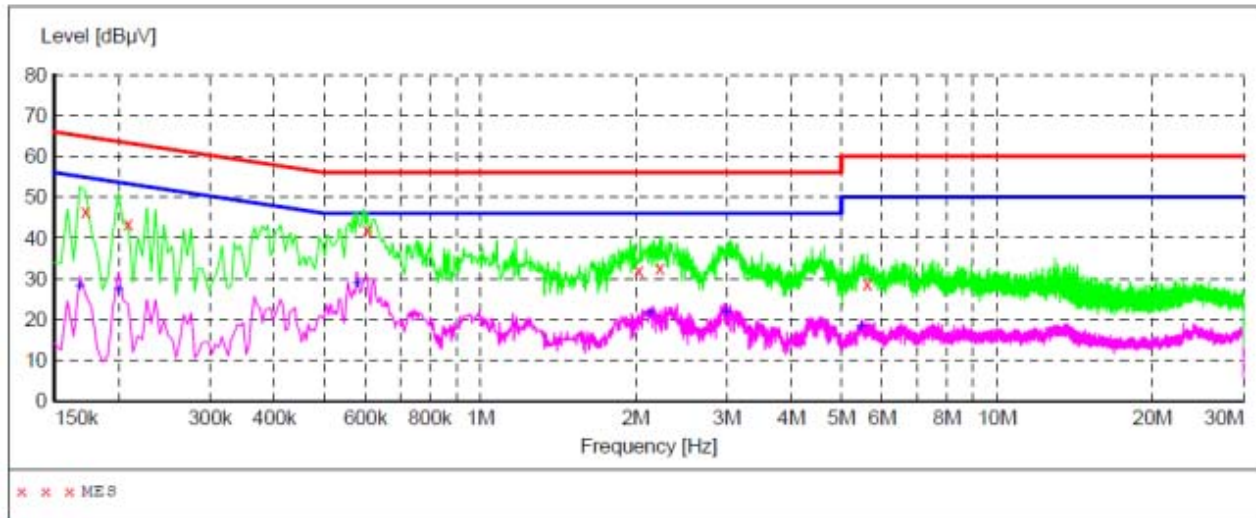**MEASUREMENT RESULT: "HTW0410325_fin"**

Frequency MHz	Level dBμV	Transd dB	Limit dBμV	Margin dB	Detector	Line	PE
0.172500	46.60	10.3	64.8	18.2	QP	N	GND
0.208500	43.40	10.4	63.3	19.9	QP	N	GND
0.604500	42.00	10.3	56.0	14.0	QP	N	GND
2.031000	31.90	10.3	56.0	24.1	QP	N	GND
2.229000	32.50	10.3	56.0	23.5	QP	N	GND
5.613000	28.60	10.3	60.0	31.4	QP	N	GND


MEASUREMENT RESULT:

Frequency MHz	Level dBμV	Transd dB	Limit dBμV	Margin dB	Detector	Line	PE
0.168000	28.00	10.3	55.1	27.1	AV	N	GND
0.199500	27.10	10.4	53.6	26.5	AV	N	GND
0.577500	28.60	10.3	46.0	17.4	AV	N	GND
2.130000	21.50	10.3	46.0	24.5	AV	N	GND
2.989500	21.90	10.3	46.0	24.1	AV	N	GND
5.455500	18.20	10.3	50.0	31.8	AV	N	GND


4.2. Radiated Emission

TEST CONFIGURATION


Frequency range 9KHz – 30MHz

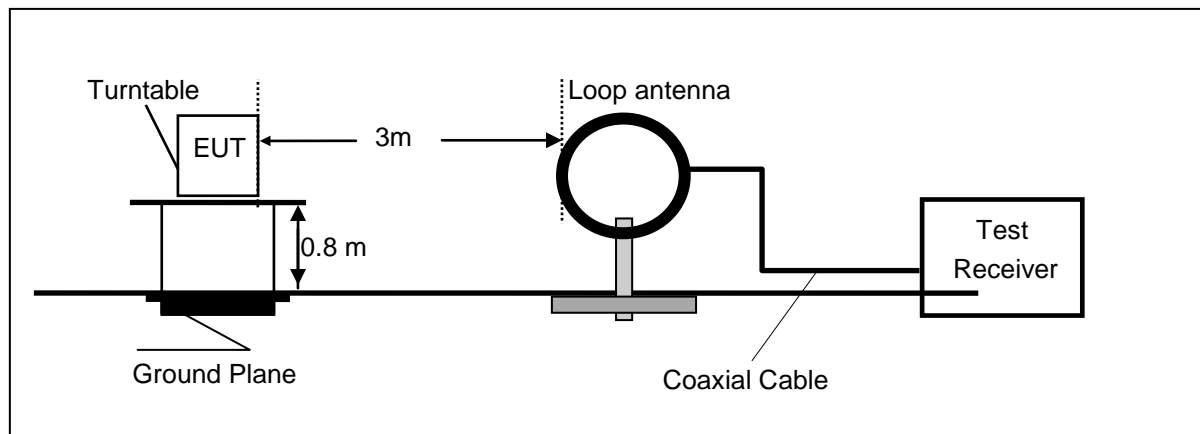

Frequency range 30MHz – 1000MHz

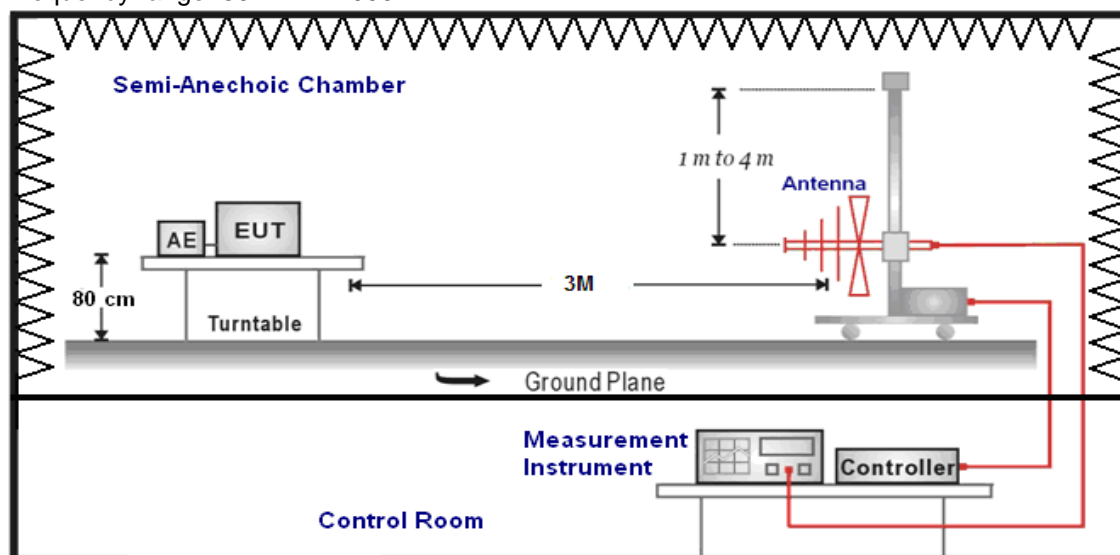

Frequency range above 1GHz-25GHz

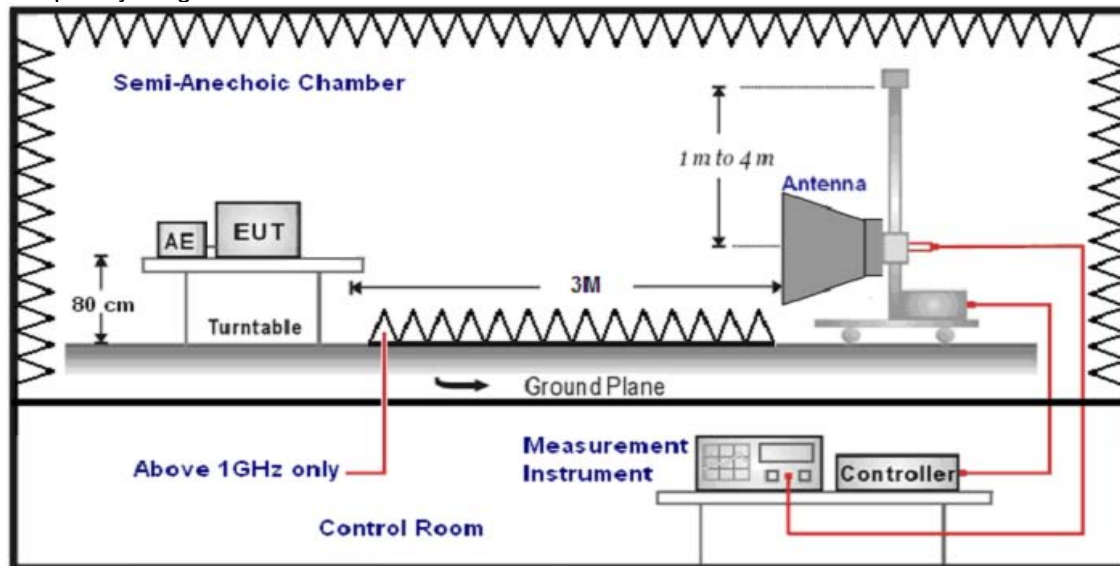

TEST PROCEDURE

1. The EUT was placed on a turn table which is 0.8m above ground plane.
2. Maximum procedure was performed by raising the receiving antenna from 1m to 4m and rotating the turn table from 0° to 360° to acquire the highest emissions from EUT.
3. And also, each emission was to be maximized by changing the polarization of receiving antenna both horizontal and vertical.
4. Repeat above procedures until all frequency measurements have been completed.
5. The EUT minimum operation frequency was 32.768KHz and maximum operation frequency was 2462MHz.so radiated emission test frequency band from 9KHz to 25GHz.

Field Strength Calculation

The field strength is calculated by adding the Antenna Factor and Cable Factor and subtracting the Amplifier Gain and Duty Cycle Correction Factor(if any) from the measured reading. The basic equation with a sample calculation is as follows:

$$FS = RA + AF + CL - AG$$

Where FS = Field Strength	CL = Cable Attenuation Factor (Cable Loss)
RA = Reading Amplitude	AG = Amplifier Gain
AF = Antenna Factor	

RADIATION LIMIT

For intentional device, according to § 15.209(a), the general requirement of field strength of radiated emission from intentional radiators at a distance of 3 meters shall not exceed the following table. According to § 15.247(d), in any 100kHz bandwidth outside the frequency band in which the EUT is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20dB below that in the 100kHz bandwidth within the band that contains the highest level of desired power.

The frequency spectrum above 1 GHz for Transmitter was investigated. All emission not reported are much lower than the prescribed limits. Set the RBW=1MHz,VBW=3MHz for Peak Detector while the RBW=1MHz,VBW=10Hz for Average Detector,Readings are both peak and average values.

Frequency (MHz)	Distance (Meters)	Radiated (dBμV/m)	Radiated (μV/m)
0.009-0.49	300	$20\log(2400/F(KHz))+80$	$2400/F(KHz)$
0.49-1.705	30	$20\log(24000/F(KHz))+40$	$24000/F(KHz)$
1.705-30	30	$20\log(30)+40$	30
30-88	3	40.0	100
88-216	3	43.5	150
216-960	3	46.0	200
Above 960	3	54.0	500

TEST RESULTS

Remark:

1. The radiated measurement are performed the each test mode (b/g/n) and channel (low/mid/high), the datum recorded below (802.11b mode, the middle channel) is the worst case for all the test mode and channel.
2. ULTRA-BROADBAND ANTENNA for the radiation emission test below 1G.
3. HORN ANTENNA for the radiation emission test above 1G.
4. We tested both battery powered and powered by adapter charging mode at three orientate ons, recorded worst case at powered by adapter charging mode.
5. "----" means not recorded as emission levels lower than limit.

For 9KHz to 30MHz

Frequency (MHz)	Corrected Reading (dBμV/m)@3m	FCC Limit (dBμV/m) @3m	Margin (dB)	Detector	Result
12.00	44.12	69.54	25.42	QP	PASS
24.00	46.87	69.54	22.67	QP	PASS

For 30MHz to 1000MHz

Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Margin Limit (dB)	Polarization
34.86	48.82	15.82	0.61	32.06	33.19	40.00	6.81	Vertical
113.35	47.28	14.15	1.31	31.83	30.91	43.50	12.59	Vertical
234.17	43.48	14.88	2.04	32.16	28.24	46.00	17.76	Vertical
742.26	38.21	22.34	4.24	31.25	33.54	46.00	12.46	Vertical
34.26	47.64	15.80	0.60	32.06	31.98	40.00	8.02	Horizontal
96.44	46.87	16.02	1.16	31.75	32.30	43.50	11.20	Horizontal
147.36	52.03	11.27	1.55	31.97	32.88	43.50	10.62	Horizontal
239.13	40.97	15.06	2.06	32.16	25.93	46.00	20.07	Horizontal

For 1GHz to 25GHz
802.11b Mode(above 1GHz)

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M (802.11b--2412MHz)												
No.	Frequency (MHz)	Emission Level (dBuV/m)		Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Antenna Factor (dB/m)	Cable Factor (dB)	Preamplifier	Correction Factor (dB/m)
1	4824.00	57.02	PK	74.00	16.98	1.00	202	54.92	31.60	7.00	36.5	2.10
1	4824.00	43.56	AV	54.00	10.44	1.00	202	41.46	31.60	7.00	36.5	2.10
2	7236.00	58.94	PK	74.00	15.06	1.00	288	48.01	37.33	8.90	35.3	10.93
2	7236.00	42.71	AV	54.00	11.29	1.00	288	31.78	37.33	8.90	35.3	10.93

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M (802.11b--2412MHz)												
No.	Frequency (MHz)	Emission Level (dBuV/m)		Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Antenna Factor (dB/m)	Cable Factor (dB)	Preamplifier	Correction Factor (dB/m)
1	4824.00	54.52	PK	74.00	19.48	1.00	35	52.42	31.60	7.00	36.5	2.10
1	4824.00	40.41	AV	54.00	13.59	1.00	35	38.31	31.60	7.00	36.5	2.10
2	7236.00	57.16	PK	74.00	16.84	1.00	177	46.23	37.33	8.90	35.3	10.93
2	7236.00	39.77	AV	54.00	14.23	1.00	177	28.84	37.33	8.90	35.3	10.93

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M (802.11b--2437MHz)												
No.	Frequency (MHz)	Emission Level (dBuV/m)		Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Antenna Factor (dB/m)	Cable Factor (dB)	Preamplifier	Correction Factor (dB/m)
1	4824.00	58.2	PK	74.00	15.8	1.00	199	56.08	31.60	7.00	36.5	2.12
1	4824.00	43.53	AV	54.00	10.47	1.00	199	41.41	31.60	7.00	36.5	2.12
2	7236.00	59.34	PK	74.00	14.66	1.00	27	48.26	37.33	8.90	35.3	11.08
2	7236.00	42.48	AV	54.00	11.52	1.00	27	31.4	37.33	8.90	35.3	11.08

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M (802.11b--2437MHz)												
No.	Frequency (MHz)	Emission Level (dBuV/m)		Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Antenna Factor (dB/m)	Cable Factor (dB)	Preamplifier	Correction Factor (dB/m)
1	4874.00	55.60	PK	74.00	18.40	1.00	108	53.48	31.02	7.60	36.5	2.12
1	4874.00	42.00	AV	54.00	12.00	1.00	108	39.88	31.02	7.60	36.5	2.12
2	7311.00	57.38	PK	74.00	16.62	1.00	124	46.30	37.28	8.60	34.8	11.08
2	7311.00	40.70	AV	54.00	13.30	1.00	124	29.62	37.28	8.60	34.8	11.08

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M (802.11b--2462MHz)												
No.	Frequency (MHz)	Emssion Level (dBuV/m)		Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Antenna Factor (dB/m)	Cable Factor (dB)	Pre-amplifier	Correction Factor (dB/m)
1	4924.00	57.35	PK	74.00	16.65	1.00	319	54.97	31.58	7.00	36.2	2.38
1	4924.00	42.30	AV	54.00	11.70	1.00	319	39.92	31.58	7.00	36.2	2.38
2	7386.00	58.22	PK	74.00	15.78	1.00	177	46.51	38.51	8.50	35.3	11.71
2	7386.00	42.17	AV	54.00	11.83	1.00	177	30.46	38.51	8.50	35.3	11.71

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M (802.11b--2462MHz)												
No.	Frequency (MHz)	Emssion Level (dBuV/m)		Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Antenna Factor (dB/m)	Cable Factor (dB)	Pre-amplifier	Correction Factor (dB/m)
1	4924.00	54.6	PK	74.00	19.40	1.00	128	52.22	31.58	7.00	36.2	2.38
1	4924.00	41.44	AV	54.00	12.56	1.00	128	39.06	31.58	7.00	36.2	2.38
2	7386.00	56.32	PK	74.00	17.68	1.00	125	44.61	38.51	8.50	35.3	11.71
2	7386.00	39.76	AV	54.00	14.24	1.00	125	28.05	38.51	8.50	35.3	11.71

- REMARKS:**
1. Emission level (dBuV/m)=Raw Value(dBuV)+Correction Factor(dB/m)
 2. Correction Factor (dB/m) = Antenna Factor (dB/m)+Cable Factor (dB)-Pre-amplifier Factor
 3. The other emission levels were very low against the limit.
 4. Margin value = Limit value- Emission level.
 5. For Wireless 802.11b mode at 1Mbps.

802.11g Mode(above 1GHz)

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M (802.11g--2412MHz)												
No.	Frequency (MHz)	Emssion Level (dBuV/m)		Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Antenna Factor (dB/m)	Cable Factor (dB)	Pre-amplifier	Correction Factor (dB/m)
1	4824.00	57.39	PK	74.00	16.61	1.00	79	55.29	31.60	7.00	36.5	2.10
1	4824.00	42.97	AV	54.00	11.03	1.00	79	40.87	31.60	7.00	36.5	2.10
2	7236.00	58.21	PK	74.00	15.79	1.00	166	47.28	37.33	8.90	35.3	10.93
2	7236.00	41.58	AV	54.00	12.42	1.00	166	30.65	37.33	8.90	35.3	10.93

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M (802.11g--2412MHz)												
No.	Frequency (MHz)	Emssion Level (dBuV/m)		Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Antenna Factor (dB/m)	Cable Factor (dB)	Pre-amplifier	Correction Factor (dB/m)
1	4824.00	53.87	PK	74.00	20.13	1.00	110	51.77	31.6	7.00	36.5	2.10
1	4824.00	39.59	AV	54.00	14.41	1.00	110	37.49	31.6	7.00	36.5	2.10
2	7236.00	56.50	PK	74.00	17.50	1.00	236	45.57	37.33	8.90	35.3	10.93
2	7236.00	39.64	AV	54.00	14.36	1.00	236	28.71	37.33	8.90	35.3	10.93

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M (802.11g--2437MHz)												
No.	Frequency (MHz)	Emssion Level (dBuV/m)		Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Antenna Factor (dB/m)	Cable Factor (dB)	Pre-amplifier	Correction Factor (dB/m)
1	4874.00	57.46	PK	74.00	16.54	1.00	330	55.34	31.02	7.60	36.5	2.12
1	4874.00	43.36	AV	54.00	10.64	1.00	330	41.24	31.02	7.60	36.5	2.12
2	7311.00	58.21	PK	74.00	15.79	1.00	279	47.13	37.28	8.60	34.8	11.08
2	7311.00	42.03	AV	54.00	11.97	1.00	279	30.95	37.28	8.60	34.8	11.08

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M (802.11g--2437MHz)

No.	Frequency (MHz)	Emssion Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Antenna Factor (dB/m)	Cable Factor (dB)	Pre-amplifier	Correction Factor (dB/m)
1	4874.00	54.93 PK	74.00	19.07	1.00	164	52.81	31.02	7.60	36.5	2.12
1	4874.00	41.59 AV	54.00	12.41	1.00	164	39.47	31.02	7.60	36.5	2.12
2	7311.00	56.79 PK	74.00	17.21	1.00	108	45.71	37.28	8.60	34.8	11.08
2	7311.00	40.98 AV	54.00	13.02	1.00	108	29.90	37.28	8.60	34.8	11.08

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M (802.11g--2462MHz)

No.	Frequency (MHz)	Emssion Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Antenna Factor (dB/m)	Cable Factor (dB)	Pre-amplifier	Correction Factor (dB/m)
1	4924.00	56.82 PK	74.00	17.18	1.00	274	54.44	31.58	7.00	36.2	2.38
1	4924.00	41.89 AV	54.00	12.11	1.00	274	39.51	31.58	7.00	36.2	2.38
2	7386.00	57.51 PK	74.00	16.49	1.00	225	45.80	38.51	8.50	35.3	11.71
2	7386.00	41.98 AV	54.00	12.02	1.00	225	30.27	38.51	8.50	35.3	11.71

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M (802.11g--2462MHz)

No.	Frequency (MHz)	Emssion Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Antenna Factor (dB/m)	Cable Factor (dB)	Pre-amplifier	Correction Factor (dB/m)
1	4924.00	53.78 PK	74.00	20.22	1.00	13	51.40	31.58	7.00	36.2	2.38
1	4924.00	41.07 AV	54.00	12.93	1.00	13	38.69	31.58	7.00	36.2	2.38
2	7311.00	55.46 PK	74.00	18.54	1.00	189	43.75	38.51	8.50	35.3	11.71
2	7311.00	39.70 AV	54.00	14.30	1.00	189	27.99	38.51	8.50	35.3	11.71

- REMARKS:**
1. Emission level (dBuV/m) =Raw Value (dBuV)+Correction Factor (dB/m)
 2. Correction Factor (dB/m) = Antenna Factor (dB/m)+Cable Factor (dB)-Pre-amplifier Factor
 3. The other emission levels were very low against the limit.
 4. Margin value = Limit value- Emission level.
 5. For Wireless 802.11g mode at 6Mbps.

802.11n HT20 Mode(above 1GHz)
ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M (802.11n HT20--2412MHz)

No.	Frequency (MHz)	Emssion Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Antenna Factor (dB/m)	Cable Factor (dB)	Pre-amplifier	Correction Factor (dB/m)
1	4824.00	55.47 PK	74.00	18.53	1.00	345	53.37	31.60	7.00	36.5	2.10
1	4824.00	41.89 AV	54.00	12.11	1.00	345	39.79	31.60	7.00	36.5	2.10
2	7236.00	57.34 PK	74.00	16.66	1.00	199	46.41	37.33	8.90	35.3	10.93
2	7236.00	41.30 AV	54.00	12.70	1.00	199	30.37	37.33	8.90	35.3	10.93

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M (802.11n HT20--2412MHz)

No.	Frequency (MHz)	Emssion Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Antenna Factor (dB/m)	Cable Factor (dB)	Pre-amplifier	Correction Factor (dB/m)
1	4824.00	53.35 PK	74.00	20.65	1.00	124	51.25	31.6	7.00	36.5	2.10
1	4824.00	39.30 AV	54.00	14.70	1.00	124	37.20	31.6	7.00	36.5	2.10
2	7236.00	55.73 PK	74.00	18.27	1.00	166	44.80	37.33	8.90	35.3	10.93
2	7236.00	39.38 AV	54.00	14.62	1.00	166	28.45	37.33	8.90	35.3	10.93

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M (802.11n HT20--2437MHz)

No.	Frequency (MHz)	Emssion Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Antenna Factor (dB/m)	Cable Factor (dB)	Pre-amplifier	Correction Factor (dB/m)
1	4874.00	56.91 PK	74.00	17.09	1.00	26	54.79	31.02	7.60	36.5	2.12
1	4874.00	42.67 AV	54.00	11.33	1.00	26	40.55	31.02	7.60	36.5	2.12
2	7311.00	57.74 PK	74.00	16.26	1.00	301	46.66	37.28	8.60	34.8	11.08
2	7311.00	41.46 AV	54.00	12.54	1.00	301	30.38	37.28	8.60	34.8	11.08

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M (802.11n HT20--2437MHz)

No.	Frequency (MHz)	Emssion Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Antenna Factor (dB/m)	Cable Factor (dB)	Pre-amplifier	Correction Factor (dB/m)
1	4874.00	54.10 PK	74.00	19.90	1.00	347	51.98	31.02	7.60	36.5	2.12
1	4874.00	41.33 AV	54.00	12.67	1.00	347	39.21	31.02	7.60	36.5	2.12
2	7311.00	56.40 PK	74.00	17.60	1.00	114	45.32	37.28	8.60	34.8	11.08
2	7311.00	40.59 AV	54.00	13.41	1.00	114	29.51	37.28	8.60	34.8	11.08

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M (802.11n HT20--2462MHz)

No.	Frequency (MHz)	Emssion Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Antenna Factor (dB/m)	Cable Factor (dB)	Pre-amplifier	Correction Factor (dB/m)
1	4924.00	56.20 PK	74.00	17.80	1.00	128	53.82	31.58	7.00	36.2	2.38
1	4924.00	41.48 AV	54.00	12.52	1.00	128	39.10	31.58	7.00	36.2	2.38
2	7311.00	58.40 PK	74.00	15.60	1.00	33	46.69	38.51	8.50	35.3	11.71
2	7311.00	42.13 AV	54.00	11.87	1.00	33	30.42	38.51	8.50	35.3	11.71

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M (802.11n HT20--2462MHz)

No.	Frequency (MHz)	Emssion Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Antenna Factor (dB/m)	Cable Factor (dB)	Pre-amplifier	Correction Factor (dB/m)
1	4924.00	53.38 PK	74	20.62	1.00	200	51.00	31.58	7.00	36.2	2.38
1	4924.00	40.47 AV	54	13.53	1.00	200	38.09	31.58	7.00	36.2	2.38
2	7386.00	56.21 PK	74	17.79	1.00	145	44.50	38.51	8.50	35.3	11.71
2	7386.00	40.00 AV	54	14.00	1.00	145	28.29	38.51	8.50	35.3	11.71

- REMARKS:**
1. Emission level (dBuV/m) =Raw Value (dBuV) + Correction Factor (dB/m)
 2. Correction Factor (dB/m) = Antenna Factor (dB/m)+CableFactor (dB)-Pre-amplifier Factor
 3. The other emission levels were very low against the limit.
 4. Margin value = Limit value- Emission level.
 5. For Wireless 802.11n HT20 mode at 6.5Mbps.

802.11n HT40MHz Mode(above 1GHz)
ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M (802.11n HT40--2422MHz)

No.	Frequency (MHz)	Emssion Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Antenna Factor (dB/m)	Cable Factor (dB)	Pre-amplifier	Correction Factor (dB/m)
1	4844.00	55.78 PK	74.00	18.22	1.00	122	53.67	31.01	7.30	36.2	2.11
1	4844.00	42.06 AV	54.00	11.94	1.00	122	39.95	31.01	7.30	36.2	2.11
2	7266.00	57.87 PK	74.00	16.13	1.00	246	47.07	36.70	8.90	34.8	10.80
2	7266.00	41.33 AV	54.00	12.67	1.00	246	30.53	36.70	8.90	34.8	10.80

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M (802.11n HT40--2422MHz)

No.	Frequency (MHz)	Emssion Level (dBUV/m)	Limit (dBUV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBUV)	Antenna Factor (dB/m)	Cable Factor (dB)	Pre-amplifier	Correction Factor (dB/m)
1	4844.00	53.86 PK	74.00	20.14	1.00	108	51.75	31.01	7.30	36.2	2.11
1	4844.00	39.56 AV	54.00	14.44	1.00	108	37.45	31.01	7.30	36.2	2.11
2	7266.00	56.42 PK	74.00	17.58	1.00	212	45.62	36.70	8.90	34.8	10.80
2	7266.00	39.50 AV	54.00	14.50	1.00	212	28.70	36.70	8.90	34.8	10.80

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M (802.11n HT40--2437MHz)

No.	Frequency (MHz)	Emssion Level (dBUV/m)	Limit (dBUV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBUV)	Antenna Factor (dB/m)	Cable Factor (dB)	Pre-amplifier	Correction Factor (dB/m)
1	4874.00	57.42 PK	74.00	16.58	1.00	138	55.30	31.02	7.60	36.5	2.12
1	4874.00	42.79 AV	54.00	11.21	1.00	138	40.67	31.02	7.60	36.5	2.12
2	7311.00	58.21 PK	74.00	15.79	1.00	312	47.13	37.28	8.60	34.8	11.08
2	7311.00	41.56 AV	54.00	12.44	1.00	312	30.48	37.28	8.60	34.8	11.08

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M (802.11n HT40--2437MHz)

No.	Frequency (MHz)	Emssion Level (dBUV/m)	Limit (dBUV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBUV)	Antenna Factor (dB/m)	Cable Factor (dB)	Pre-amplifier	Correction Factor (dB/m)
1	4874.00	53.76 PK	74.00	20.24	1.00	68	51.64	31.02	7.60	36.5	2.12
1	4874.00	41.07 AV	54.00	12.93	1.00	68	38.95	31.02	7.60	36.5	2.12
2	7311.00	56.02 PK	74.00	17.98	1.00	91	44.94	37.28	8.60	34.8	11.08
2	7311.00	40.50 AV	54.00	13.50	1.00	91	29.42	37.28	8.60	34.8	11.08

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M (802.11n HT40--2452MHz)

No.	Frequency (MHz)	Emssion Level (dBUV/m)	Limit (dBUV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBUV)	Antenna Factor (dB/m)	Cable Factor (dB)	Pre-amplifier	Correction Factor (dB/m)
1	4904.00	55.47 PK	74.00	18.53	1.00	108	53.20	31.47	7.00	36.2	2.27
1	4904.00	41.09 AV	54.00	12.91	1.00	108	38.82	31.47	7.00	36.2	2.27
2	7356.00	57.73 PK	74.00	16.27	1.00	124	46.08	38.45	8.50	35.3	11.65
2	7356.00	41.64 AV	54.00	12.36	1.00	124	29.99	38.45	8.50	35.3	11.65


ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M (802.11n HT40--2452MHz)

No.	Frequency (MHz)	Emssion Level (dBUV/m)	Limit (dBUV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBUV)	Antenna Factor (dB/m)	Cable Factor (dB)	Pre-amplifier	Correction Factor (dB/m)
1	4904.00	53.01 PK	74.00	20.99	1.00	128	50.74	31.47	7.00	36.2	2.27
1	4904.00	40.28 AV	54.00	13.72	1.00	128	38.01	31.47	7.00	36.2	2.27
2	7356.00	55.49 PK	74.00	18.51	1.00	124	43.84	38.45	8.50	35.3	11.65
2	7356.00	39.75 AV	54.00	14.25	1.00	124	28.10	38.45	8.50	35.3	11.65

- REMARKS:**
1. Emission level (dBUV/m) = Raw Value (dBUV) + Correction Factor (dB/m)
 2. Correction Factor (dB/m) = Antenna Factor (dB/m) + Cable Factor (dB) - Pre-amplifier Factor
 3. The other emission levels were very low against the limit.
 4. Margin value = Limit value - Emission level.
 5. For Wireless 802.11n HT40MHz mode at 13.5Mbps.

4.3. Maximum Peak Output Power

TEST CONFIGURATION



TEST PROCEDURE

According to KDB558074 D01 DTS Meas Guidance v03:

PKPM1 Peak power meter method: The maximum peak conducted output power may be measured using a broadband peak RF power meter. The power meter shall have a video bandwidth that is greater than or equal to the DTS bandwidth and shall utilize a fast-responding diode detector.

Maximum conducted (average) output power: As an alternative to spectrum analyzer or EMI receiver measurements, measurements may be performed using a wideband RF power meter with a thermocouple detector or equivalent if all of the conditions listed below are satisfied.

1. The EUT is configured to transmit continuously, or to transmit with a constant duty factor.
2. At all times when the EUT is transmitting, it shall be transmitting at its maximum power control level.
3. The integration period of the power meter exceeds the repetition period of the transmitted signal by at least a factor of five.

If the transmitter does not transmit continuously, measure the duty cycle (x) of the transmitter output signal as described in Section 6.0.

Measure the average power of the transmitter. This measurement is an average over both the on and off periods of the transmitter.

Adjust the measurement in dBm by adding $10\log(1/x)$, where x is the duty cycle to the measurement result.

LIMIT

The Maximum Peak Output Power Measurement is 30dBm.

TEST RESULTS

Remark: We measured output power at difference data rate for each mode and recorded worst case for each mode.

4.3.1 802.11b Test Mode

A. Test Verdict

Channel	Frequency (MHz)	Measured Output Peak Power (dBm)	Limits (dBm)	Verdict
1	2412	16.21	30	PASS
6	2437	16.29	30	PASS
11	2462	16.30	30	PASS

- Note: 1. For 802.11b mode at final test to get the worst-case emission at 1Mbps.
2. The test results including the cable loss.

4.3.2 802.11g Test Mode

A. Test Verdict

Channel	Frequency (MHz)	Measured Output Peak Power (dBm)	Limits (dBm)	Verdict
1	2412	14.25	30	PASS
6	2437	14.33	30	PASS
11	2462	14.34	30	PASS

- Note: 1. For 802.11g mode at final test to get the worst-case emission at 6Mbps.
2. The test results including the cable loss.

4.3.3 802.11n HT20 Test Mode

A. Test Verdict

Channel	Frequency (MHz)	Measured Output Peak Power (dBm)	Limits (dBm)	Verdict
1	2412	14.41	30	PASS
6	2437	14.43	30	PASS
11	2462	14.61	30	PASS

Note: 1. For 802.11n HT20 mode at final test to get the worst-case emission at 6.5Mbps.
2. The test results including the cable loss.

4.3.4 802.11n HT40 Test Mode


A. Test Verdict

Channel	Frequency (MHz)	Measured Output Peak Power (dBm)	Limits (dBm)	Verdict
3	2422	13.55	30	PASS
6	2437	13.50	30	PASS
9	2452	13.39	30	PASS

Note: 1. For 802.11n HT40 mode at final test to get the worst-case emission at 13.5Mbps.
2. The test results including the cable loss.

4.4. Power Spectral Density

TEST CONFIGURATION



TEST PROCEDURE

According to KDB 558074 D01 V03 Method PKPSD (peak PSD) this procedure shall be used if maximum peak conducted output power was used to demonstrate compliance, and is optional if the maximum conducted (average) output power was used to demonstrate compliance.

1. Set analyzer center frequency to DTS channel center frequency.
2. Set the span to 1.5 times the DTS bandwidth.
3. Set the RBW to: $3 \text{ kHz} \leq \text{RBW} \leq 100 \text{ kHz}$.
4. Set the VBW $\geq 3 \text{ RBW}$.
5. Detector = peak.
6. Sweep time = auto couple.
7. Trace mode = max hold.
8. Allow trace to fully stabilize.
9. Use the peak marker function to determine the maximum amplitude level within the RBW.
10. If measured value exceeds limit, reduce RBW (no less than 3 kHz) and repeat.

LIMIT

For digitally modulated systems, the power spectral density conducted from the intentional radiator to the antenna shall not be greater than 8 dBm in any 3 kHz band during any time interval of continuous transmission.

TEST RESULTS

4.4.1 802.11b Test Mode

A. Test Verdict

Channel	Frequency (MHz)	Report PSD (dBm/30kHz)	Refer to Plot	Limits (dBm/3KHz)	Verdict
1	2412	4.455	Plot 4.4.1 A	8	PASS
6	2437	2.199	Plot 4.4.1 B	8	PASS
11	2462	1.564	Plot 4.4.1 C	8	PASS

- Note:
1. For 802.11b mode at final test to get the worst-case emission at 1Mbps.
 2. The test results including the cable loss.

B. Test Plots



(Plot 4.4.1 A: Channel 1: 2412MHz @ 802.11b)



(Plot 4.4.1 B: Channel 6: 2437MHz @ 802.11b)



(Plot 4.4.1 C: Channel 11: 2462MHz @ 802.11b)


4.4.2 802.11g Test Mode

A. Test Verdict


Channel	Frequency (MHz)	Report PSD (dBm/30kHz)	Refer to Plot	Limits (dBm/3KHz)	Verdict
1	2412	-4.602	Plot 4.4.2 A	8	PASS
6	2437	-3.288	Plot 4.4.2 B	8	PASS
11	2462	-3.646	Plot 4.4.2 C	8	PASS

Note: 1. For 802.11g mode at final test to get the worst-case emission at 6Mbps.
2. The test results including the cable lose.


B. Test Plots

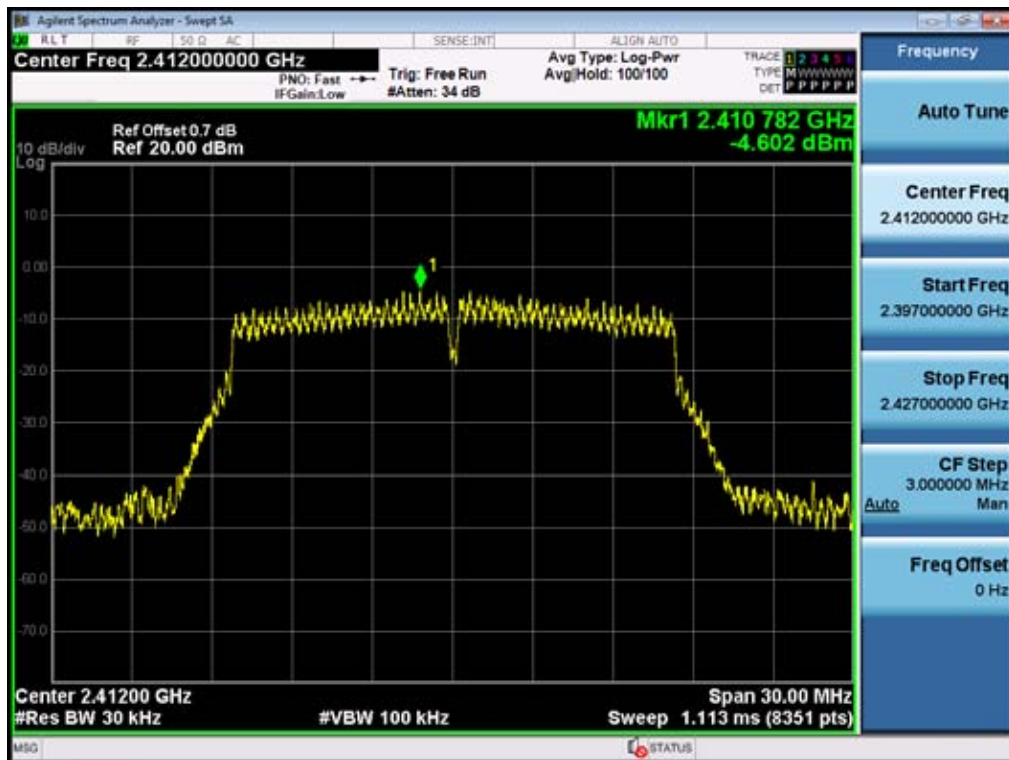

(Plot 4.4.2 A: Channel 1: 2412MHz @ 802.11g)

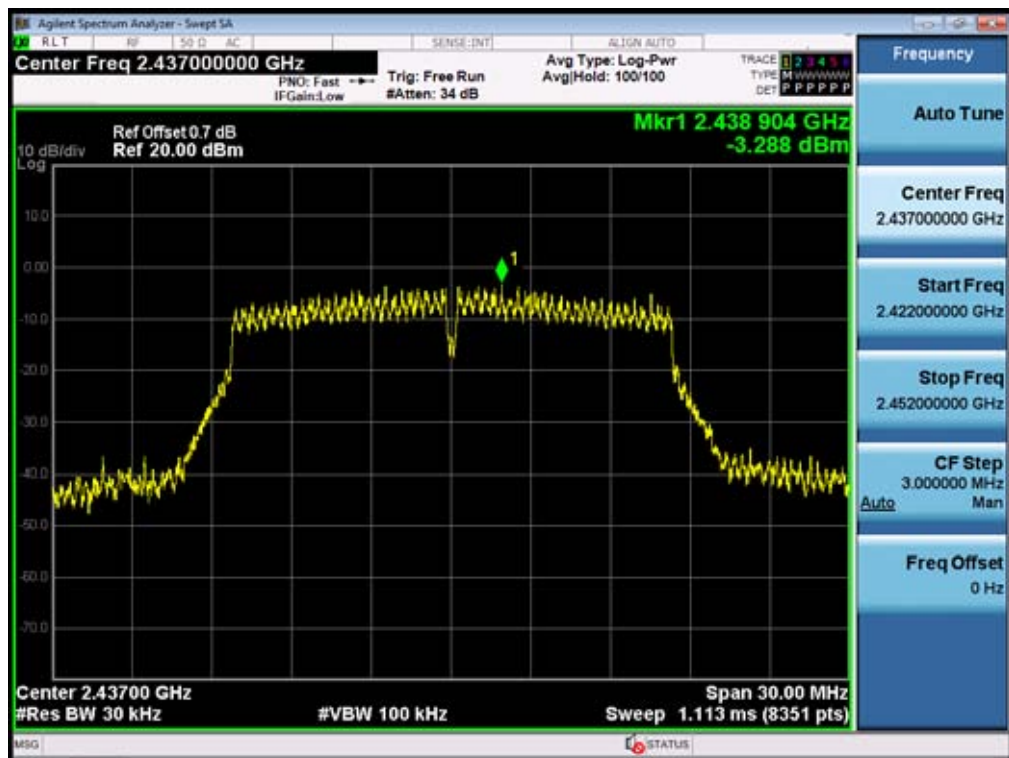

(Plot 4.4.2 B: Channel 6: 2437MHz @ 802.11g)

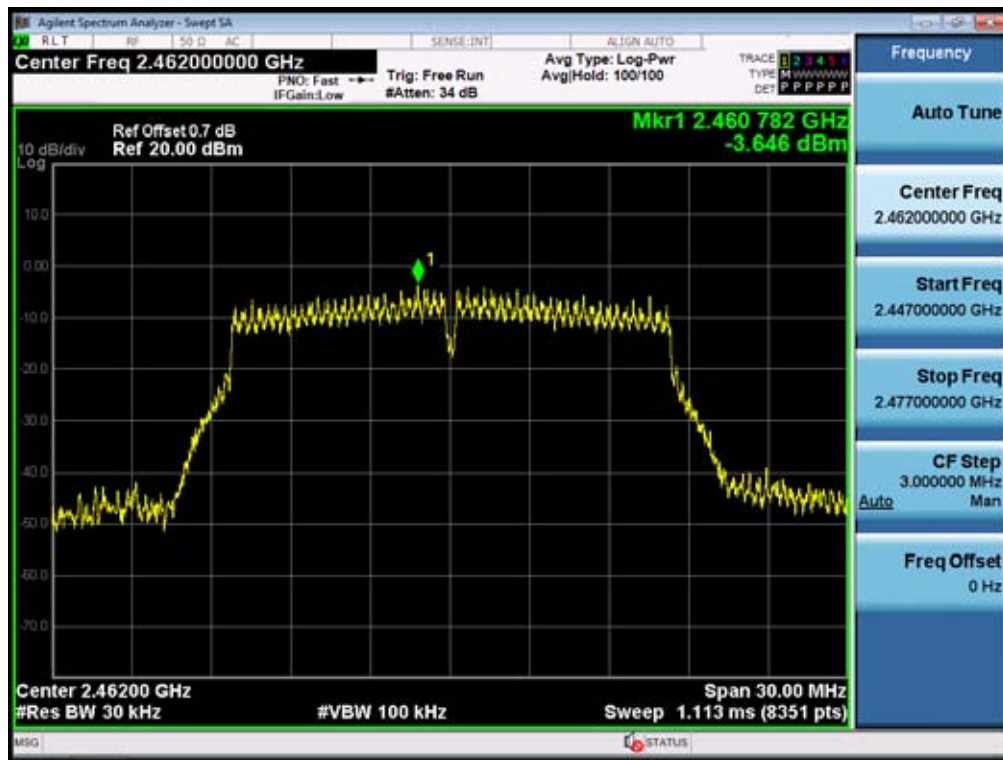

(Plot 4.4.2 C: Channel 11: 2462MHz @ 802.11g)


4.4.3 802.11n HT20 Test Mode

A. Test Verdict


Channel	Frequency (MHz)	Report PSD (dBm/30kHz)	Refer to Plot	Limits (dBm/3KHz)	Verdict
1	2412	-3.012	Plot 4.4.3 A	8	PASS
6	2437	-2.288	Plot 4.4.3 B	8	PASS
11	2462	-3.518	Plot 4.4.3 C	8	PASS

Note: 1. For 802.11n HT20 mode at final test to get the worst-case emission at 6.5Mbps.
2. The test results including the cable loss.


B. Test Plots

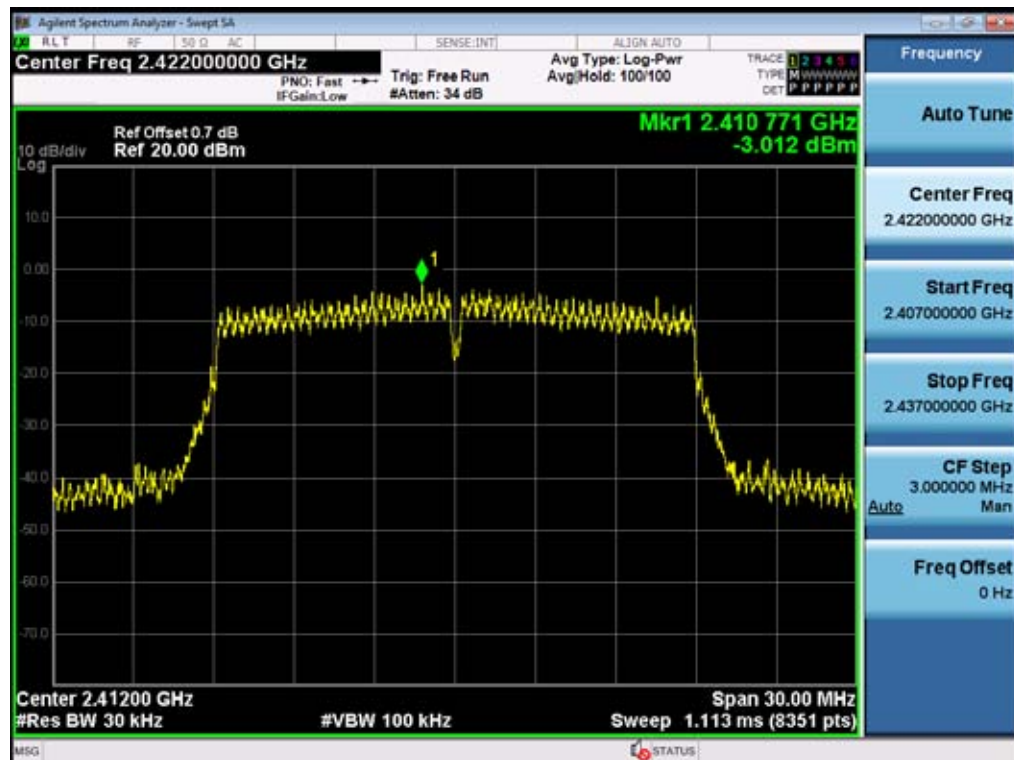

(Plot 4.4.3 A: Channel 1: 2412MHz @ 802.11n HT20)

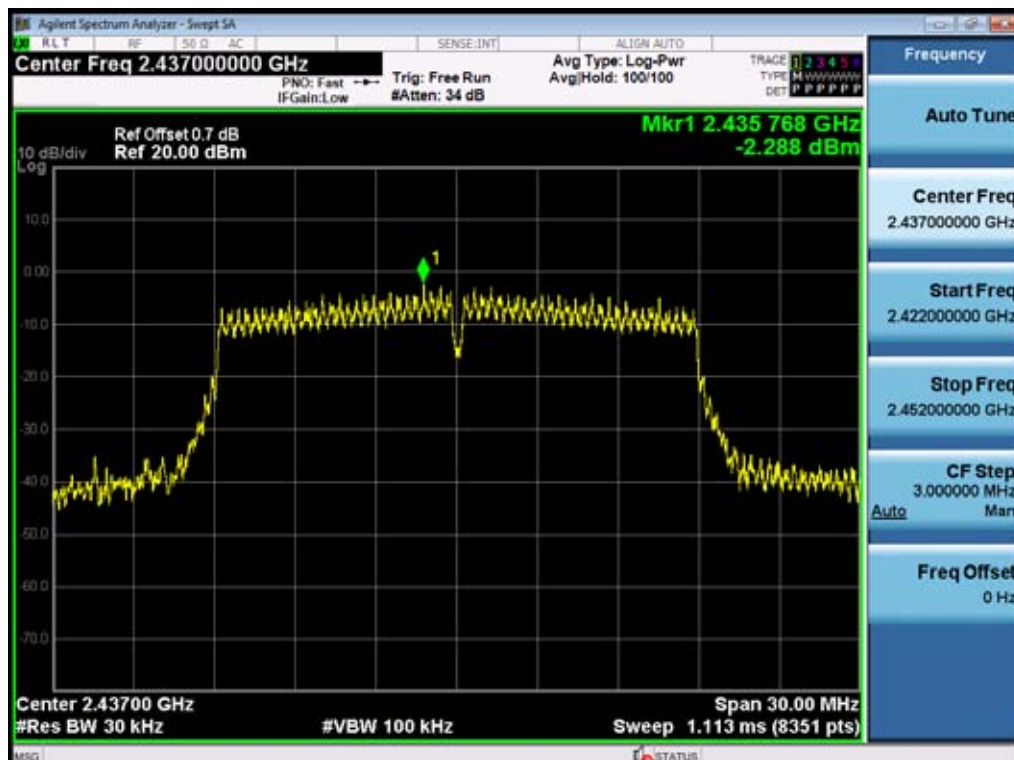

(Plot 4.4.3 B: Channel 6: 2437MHz @ 802.11n HT20)

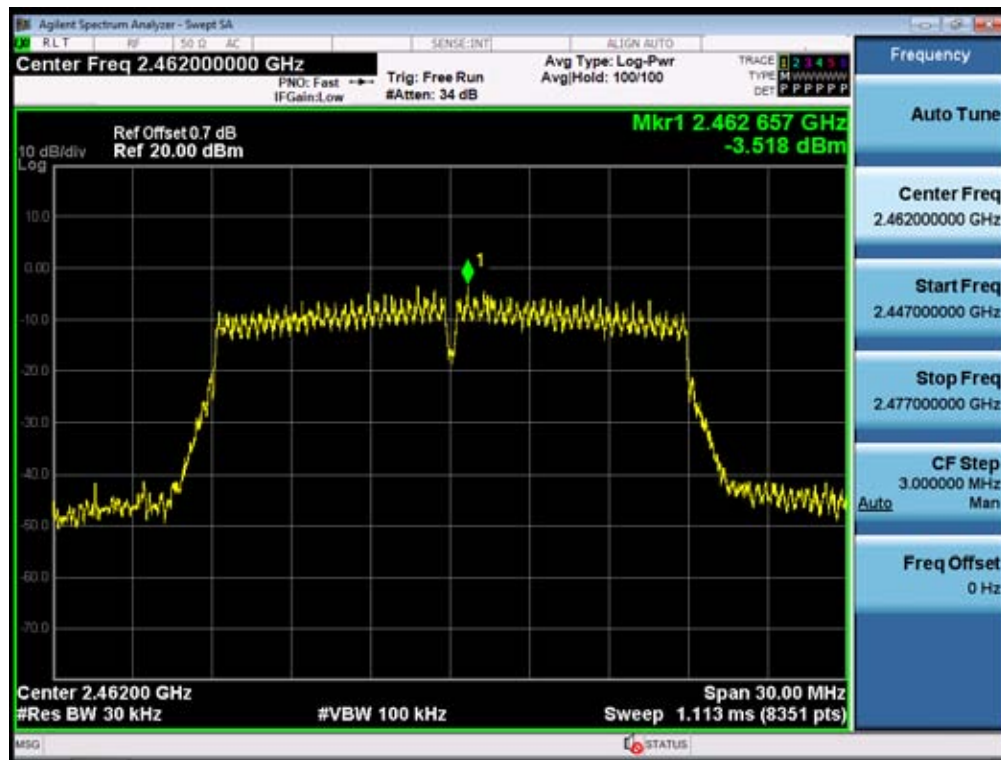

(Plot 4.4.3 C: Channel 11: 2462MHz @ 802.11n HT20)


4.4.4 802.11n HT40 Test Mode

A. Test Verdict


Channel	Frequency (MHz)	Report PSD (dBm/30kHz)	Refer to Plot	Limits (dBm/3KHz)	Verdict
3	2422	-9.990	Plot 4.4.4 A	8	PASS
6	2437	-7.696	Plot 4.4.4 B	8	PASS
9	2452	-10.262	Plot 4.4.4 C	8	PASS

Note: 1. For 802.11n HT40 mode at final test to get the worst-case emission at 13.5Mbps.
2. The test results including the cable loss.


B. Test Plots

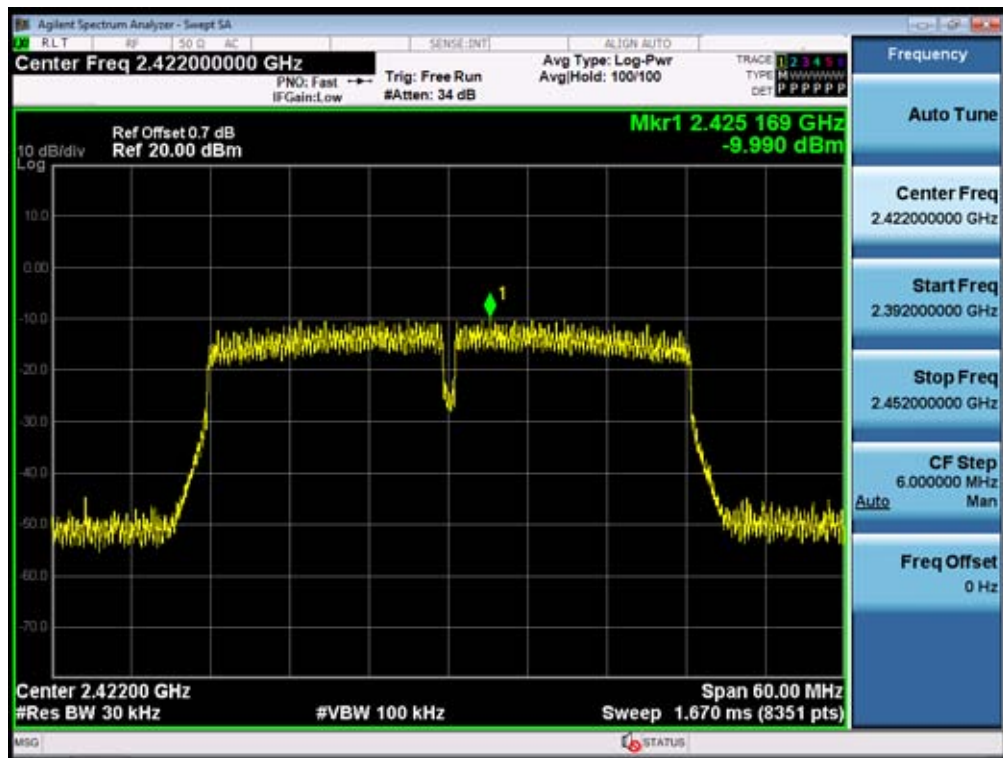

(Plot 4.4.4 A: Channel 3: 2422MHz @ 802.11n HT40))

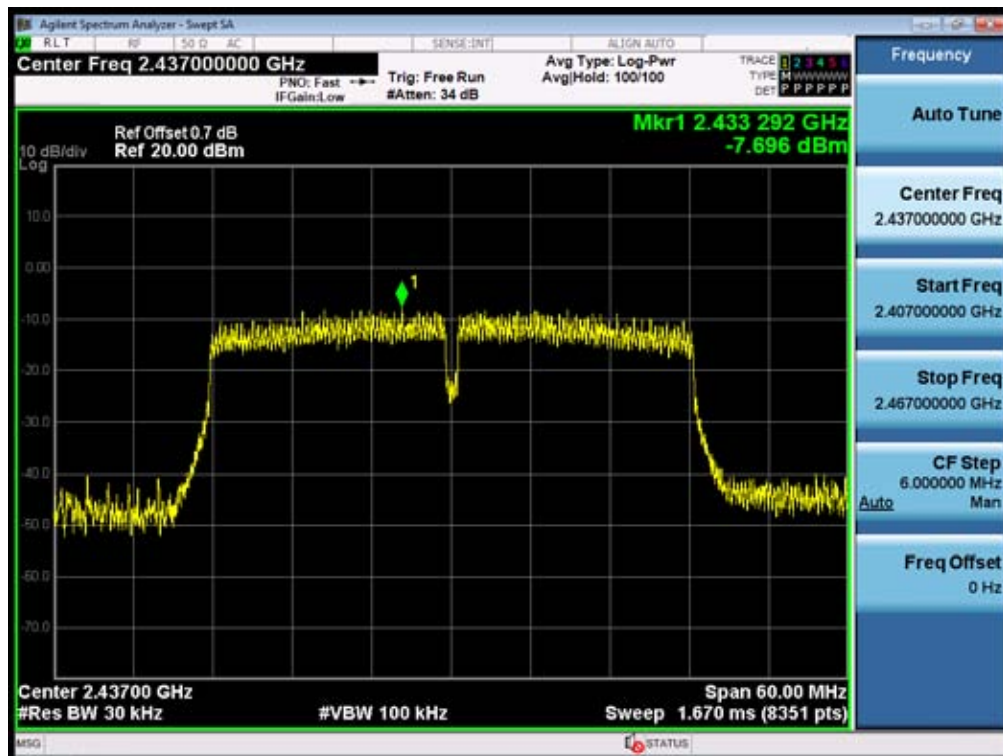

(Plot 4.4.4 B: Channel 6: 2437MHz @ 802.11n HT40)

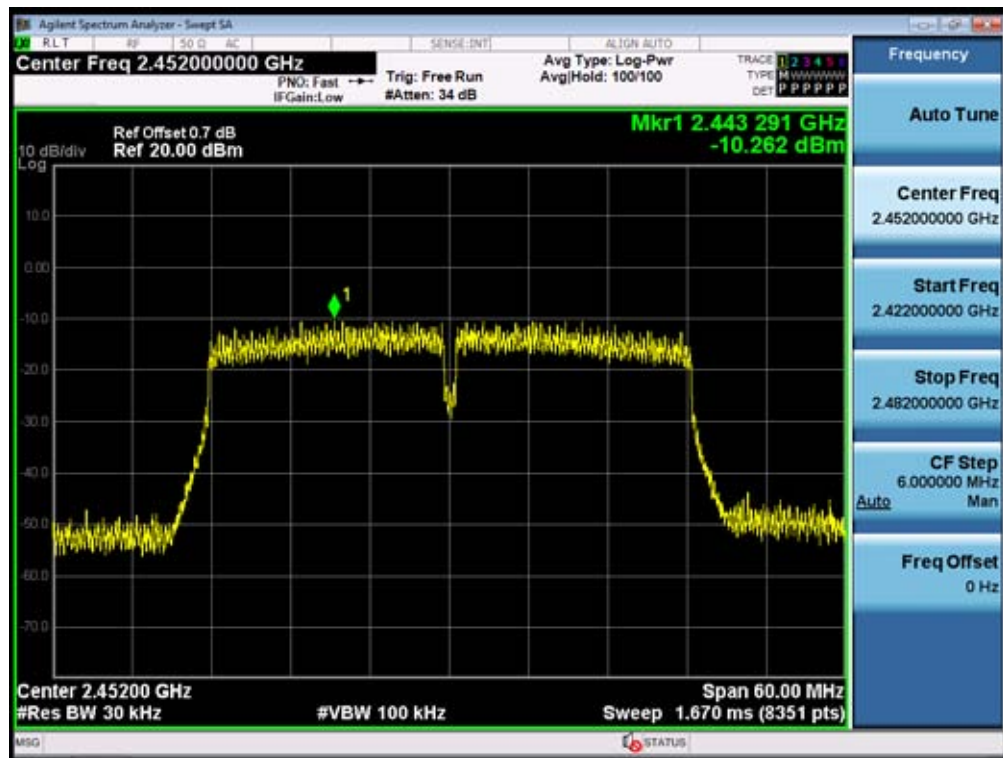

(Plot 4.4.4 C: Channel 6: 2452MHz @ 802.11n HT40)

4.5. Band Edge Compliance of RF Emission

TEST REQUIREMENT

In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided the transmitter demonstrates compliance with the peak conducted power limits. If the transmitter complies with the conducted power limits based on the use of RMS averaging over a time interval, as permitted under paragraph (b)(3) of this section, the attenuation required under this paragraph shall be 30 dB instead of 20 dB. Attenuation below the general limits specified in §15.209(a) is not required. In addition, radiated emissions which fall in the restricted bands, as defined in §15.205(a), must also comply with the radiated emission limits specified in §15.209(a) (see §15.205(c)).

TEST PROCEDURE

According to KDB 558074 D01 V03 for Antenna-port conducted measurement. Antenna-port conducted measurements may also be used as an alternative to radiated measurements for demonstrating compliance in the restricted frequency bands. If conducted measurements are performed, then proper impedance matching must be ensured and an additional radiated test for cabinet/case spurious emissions is required.

1. Check the calibration of the measuring instrument using either an internal calibrator or a known signal from an external generator.
2. Remove the antenna from the EUT and then connect to a low loss RF cable from the antenna port to a EMI test receiver, then turn on the EUT and make it operate in transmitting mode. Then set it to Low Channel and High Channel within its operating range, and make sure the instrument is operated in its linear range.
3. Set both RBW and VBW of spectrum analyzer to 100 kHz with a convenient frequency span including 100kHz bandwidth from band edge, for Radiated emissions restricted band RBW=1MHz, VBW=3MHz for peak detector and RBW=1MHz, VBW=10Hz for average detector.
4. Measure the highest amplitude appearing on spectral display and set it as a reference level. Plot the graph with marking the highest point and edge frequency.
5. Repeat above procedures until all measured frequencies were complete.
6. Measure the conducted output power (in dBm) using the detector specified by the appropriate regulatory agency (see 12.2.2, 12.2.3, and 12.2.4 for guidance regarding measurement procedures for determining quasi-peak, peak, and average conducted output power, respectively).
7. Add the maximum transmit antenna gain (in dBi) to the measured output power level to determine the EIRP level (see 12.2.5 for guidance on determining the applicable antenna gain)
8. Add the appropriate maximum ground reflection factor to the EIRP level (6 dB for frequencies ≤ 30 MHz, 4.7 dB for frequencies between 30 MHz and 1000 MHz, inclusive and 0 dB for frequencies > 1000 MHz).
9. For devices with multiple antenna-ports, measure the power of each individual chain and sum the EIRP of all chains in linear terms (e.g., Watts, mW).
10. Convert the resultant EIRP level to an equivalent electric field strength using the following relationship:
$$E = \text{EIRP} - 20\log D + 104.8$$

where:

E = electric field strength in dB μ V/m,

EIRP = equivalent isotropic radiated power in dBm

D = specified measurement distance in meters.

11. Since the out-of-band characteristics of the EUT transmit antenna will often be unknown, the use of a conservative antenna gain value is necessary. Thus, when determining the EIRP based on the measured conducted power, the upper bound on antenna gain for a device with a single RF output shall be selected as the maximum in-band gain of the antenna across all operating bands, or 2 dBi, whichever is greater. However, for devices that operate in multiple frequency bands while using the same transmit antenna, the highest gain of the antenna within the operating band nearest in frequency to the restricted band emission being measured may be used in lieu of the overall highest gain when the emission is at a frequency that is within 20 percent of the nearest band edge frequency, but in no case shall a value less than 2 dBi be used.
12. Compare the resultant electric field strength level to the applicable regulatory limit.
13. Perform radiated spurious emission test dures until all measured frequencies were complete.

LIMIT

Below -20dB of the highest emission level in operating band.

Radiated emissions which fall in the restricted bands, as defined in § 15.205(a), must also comply

with the radiated emission limits specified in § 15.209(a)

TEST RESULTS


4.5.1 For Radiated Bandedge Measurement

Remark: The Bandedge was measured at difference data rate for each mode and recorded worst case for each mode.


11B:

Low Channel


HORIZONTAL:

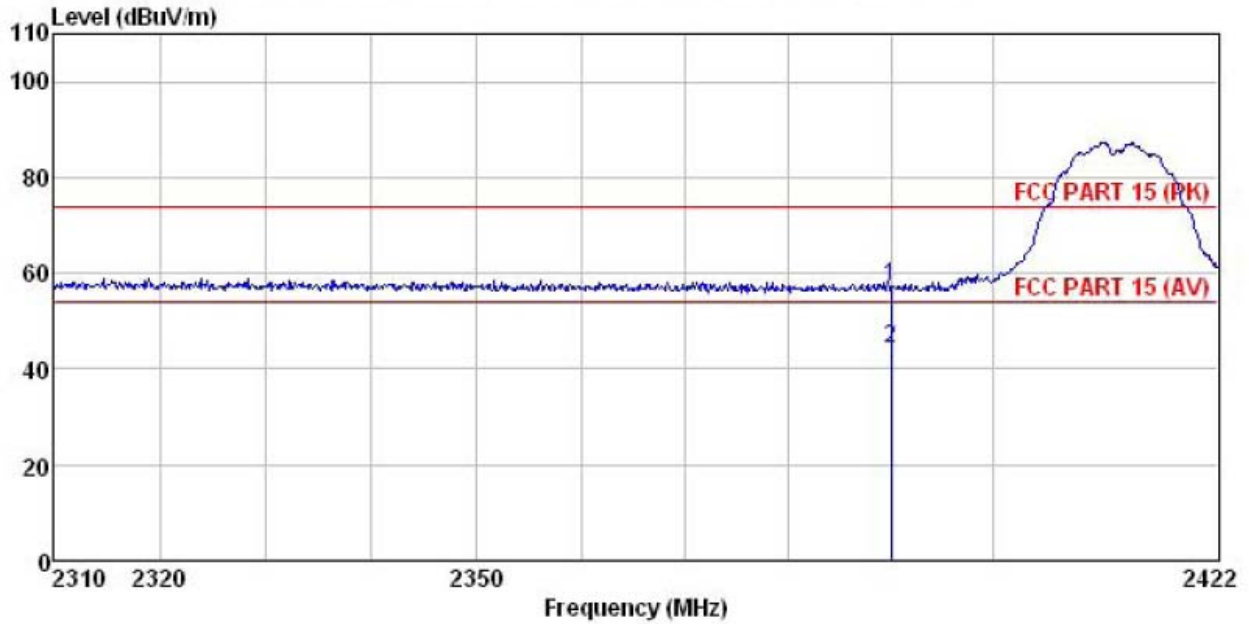

	Freq	ReadAntenna	Cable	Preamp		Limit	Over	
		Level	Factor	Loss	Factor	Level	Line	Limit
	MHz	dBuV	dB/m	dB	dB	dBuV/m	dBuV/m	dB
1	2390.000	23.83	27.58	5.67	0.00	57.08	74.00	-16.92 Peak
2	2390.000	11.03	27.58	5.67	0.00	44.28	54.00	-9.72 Average

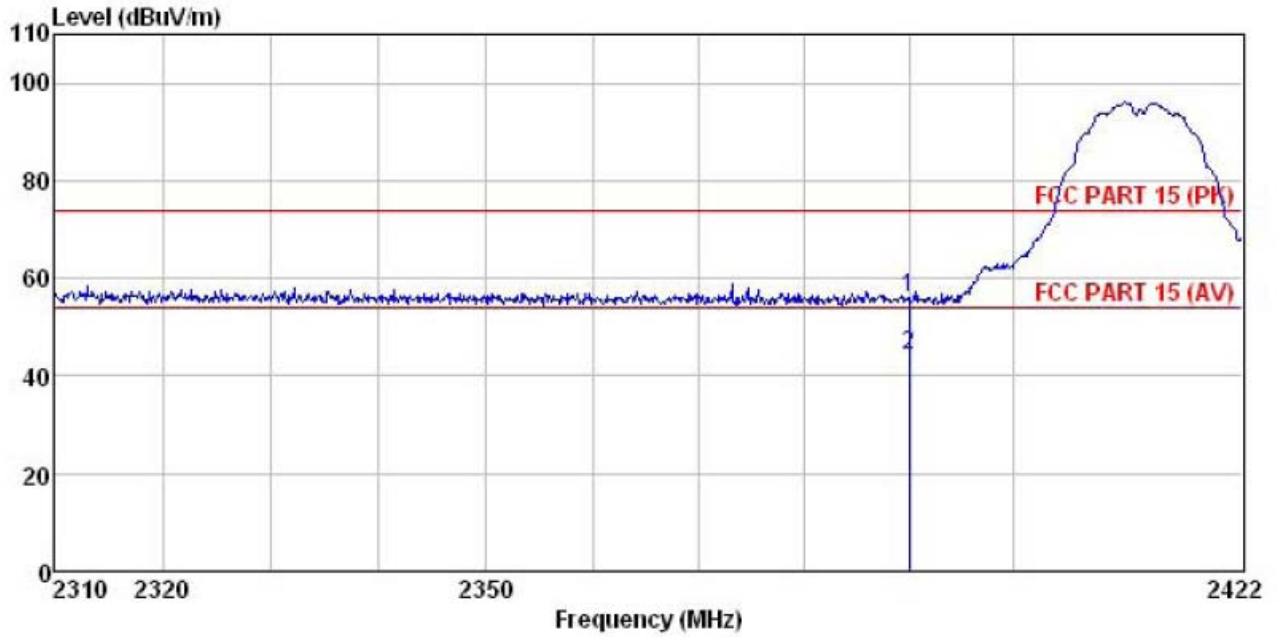
VERTICAL:


	Freq	ReadAntenna Level	Antenna Factor	Cable Loss	Preamp Factor	Level	Limit	Over	Remark
	MHz	dBuV	dB/m	dB	dB	dBuV/m	dBuV/m	dB	
1	2390.000	22.91	27.58	5.67	0.00	56.16	74.00	-17.84	Peak
2	2390.000	11.18	27.58	5.67	0.00	44.43	54.00	-9.57	Average

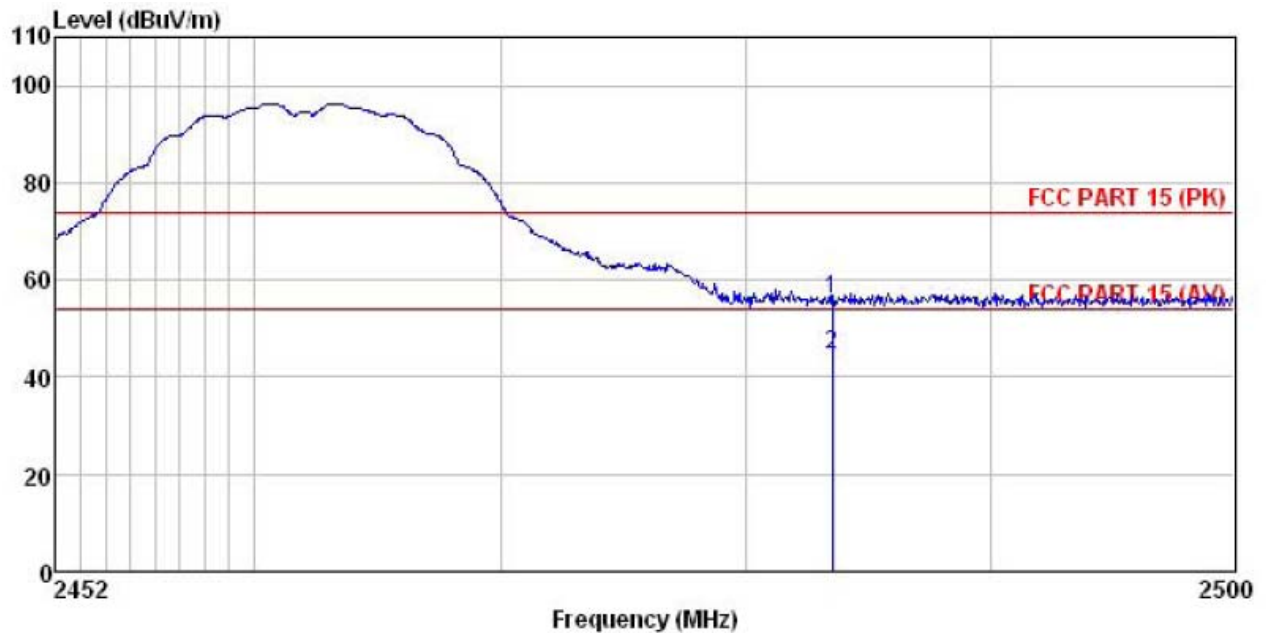High Channel
HORIZONTAL:


	Freq	ReadAntenna Level	Antenna Factor	Cable Loss	Preamp Factor	Level	Limit	Over	Remark
	MHz	dBuV	dB/m	dB	dB	dBuV/m	dBuV/m	dB	
1	2483.500	22.90	27.52	5.70	0.00	56.12	74.00	-17.88	Peak
2	2483.500	11.23	27.52	5.70	0.00	44.45	54.00	-9.55	Average

VERTICAL

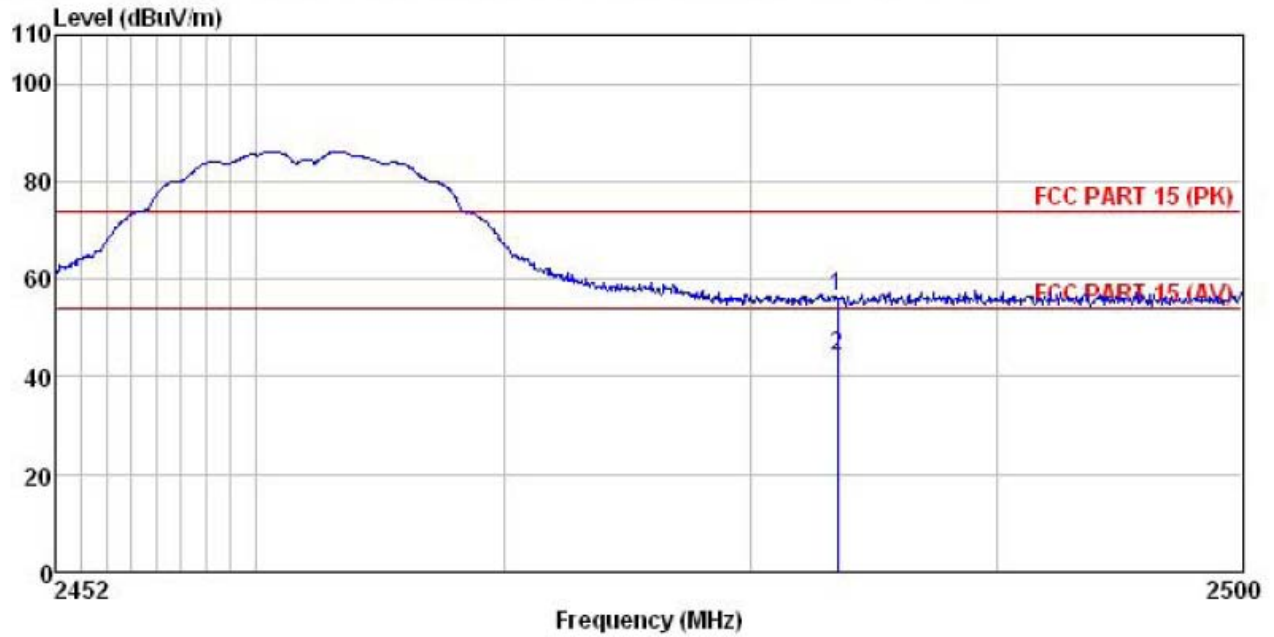


	ReadAntenna	Cable Preamp	Limit	Over	
Freq	Level	Factor	Loss	Factor	Level
MHz	dBuV	dB/m	dB	dB	dBuV/m
1	2483.500	23.08	27.52	5.70	0.00
2	2483.500	10.86	27.52	5.70	0.00

11G:


Low Channel

HORIZONTAL:

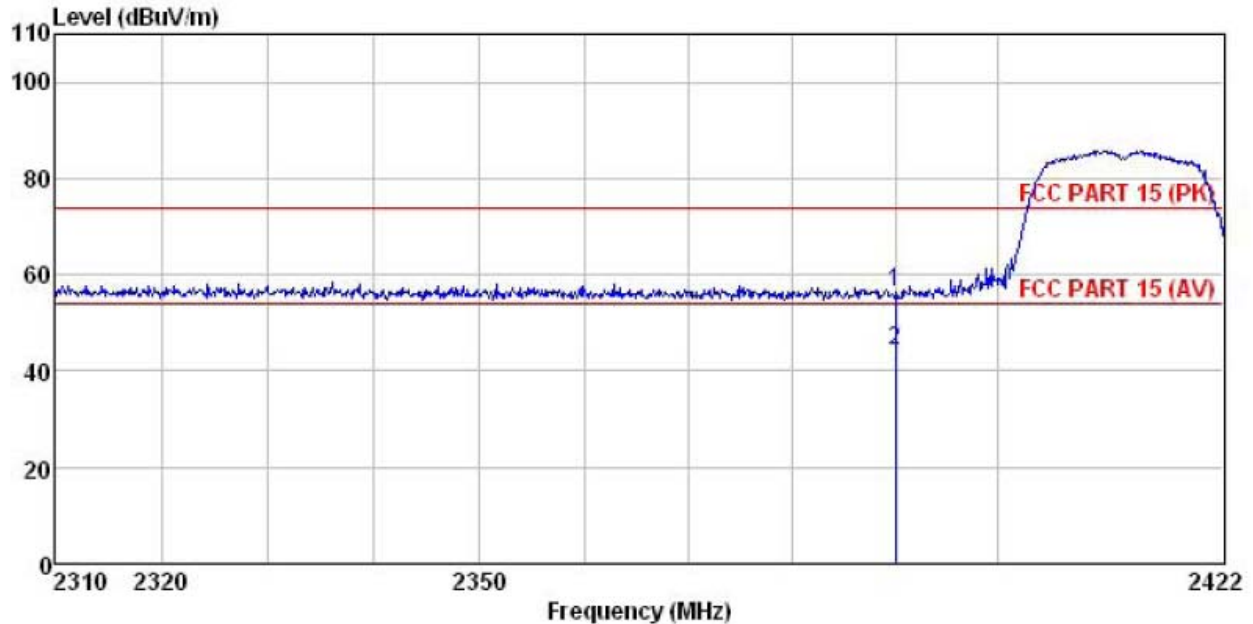

	ReadAntenna	Cable Preamp	Limit	Over	
Freq	Level	Factor	Loss	Factor	Level
MHz	dBuV	dB/m	dB	dB	dBuV/m
1	2390.000	22.97	27.58	5.67	0.00
2	2390.000	11.11	27.58	5.67	0.00


VERTICAL:

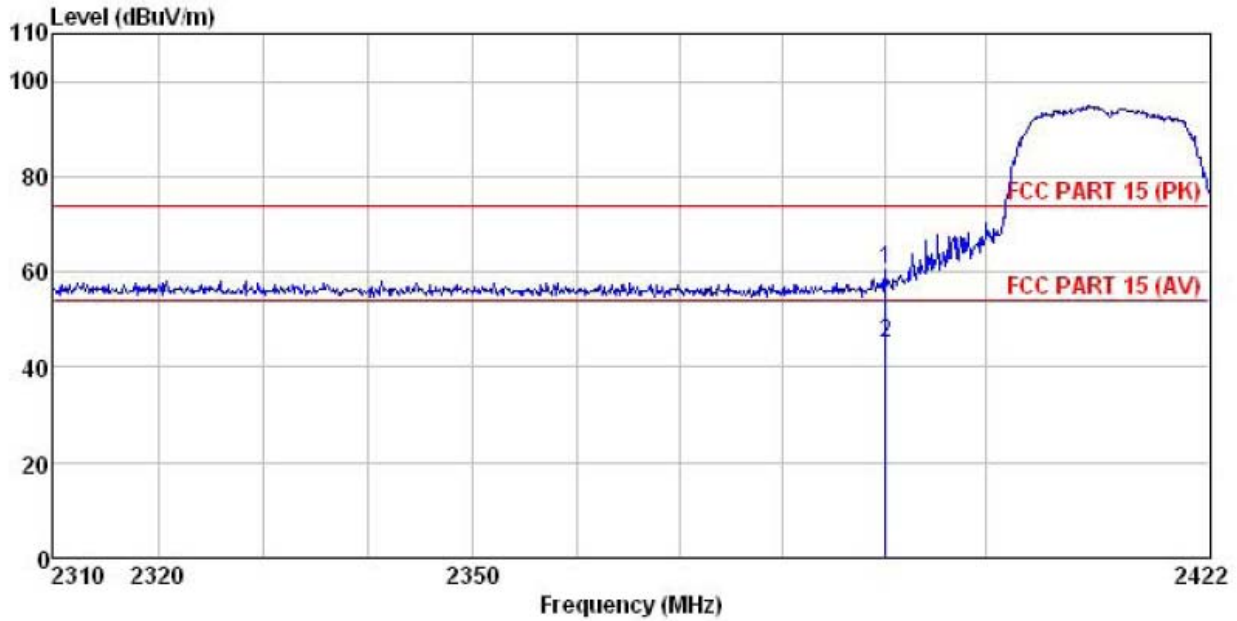

	Freq	ReadAntenna Level	Antenna Factor	Cable Loss	Preamp Factor	Level	Limit Line	Over Limit	Remark
	MHz	dBuV	dB/m	dB	dB	dBuV/m	dBuV/m	dB	
1	2390.104	27.11	27.58	5.67	0.00	60.36	74.00	-13.64	Peak
2	2390.104	11.72	27.58	5.67	0.00	44.97	54.00	-9.03	Average


High Channel

HORIZONTAL:

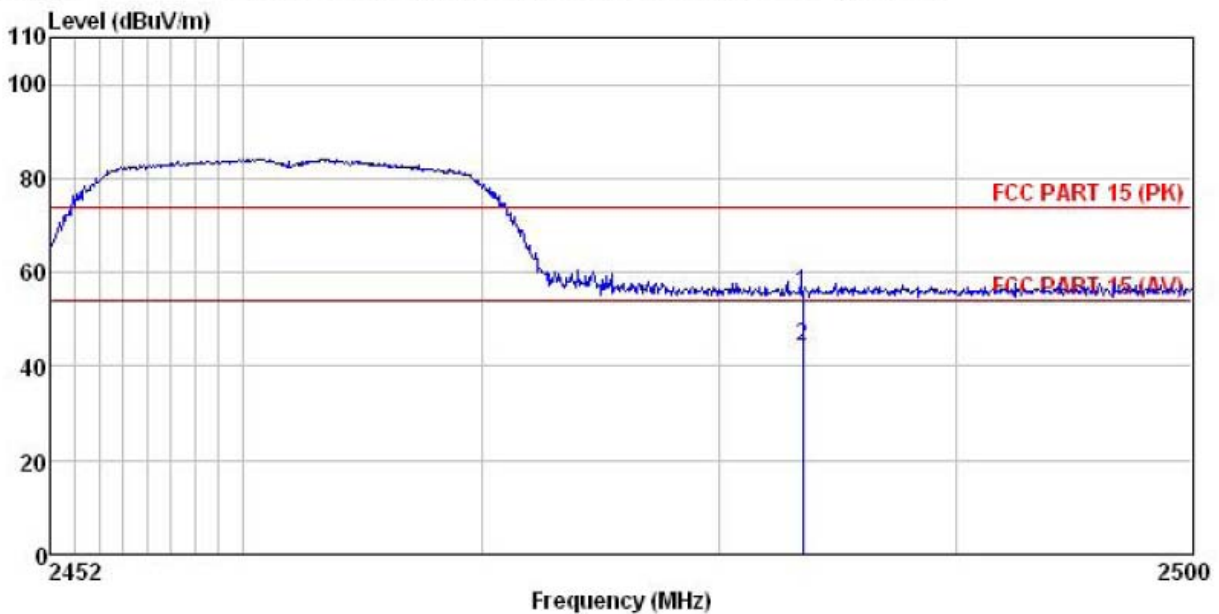

	Freq	ReadAntenna Level	Antenna Factor	Cable Loss	Preamp Factor	Level	Limit Line	Over Limit	Remark
	MHz	dBuV	dB/m	dB	dB	dBuV/m	dBuV/m	dB	
1	2483.500	22.37	27.52	5.70	0.00	55.59	74.00	-18.41	Peak
2	2483.500	10.84	27.52	5.70	0.00	44.06	54.00	-9.94	Average

VERTICAL:

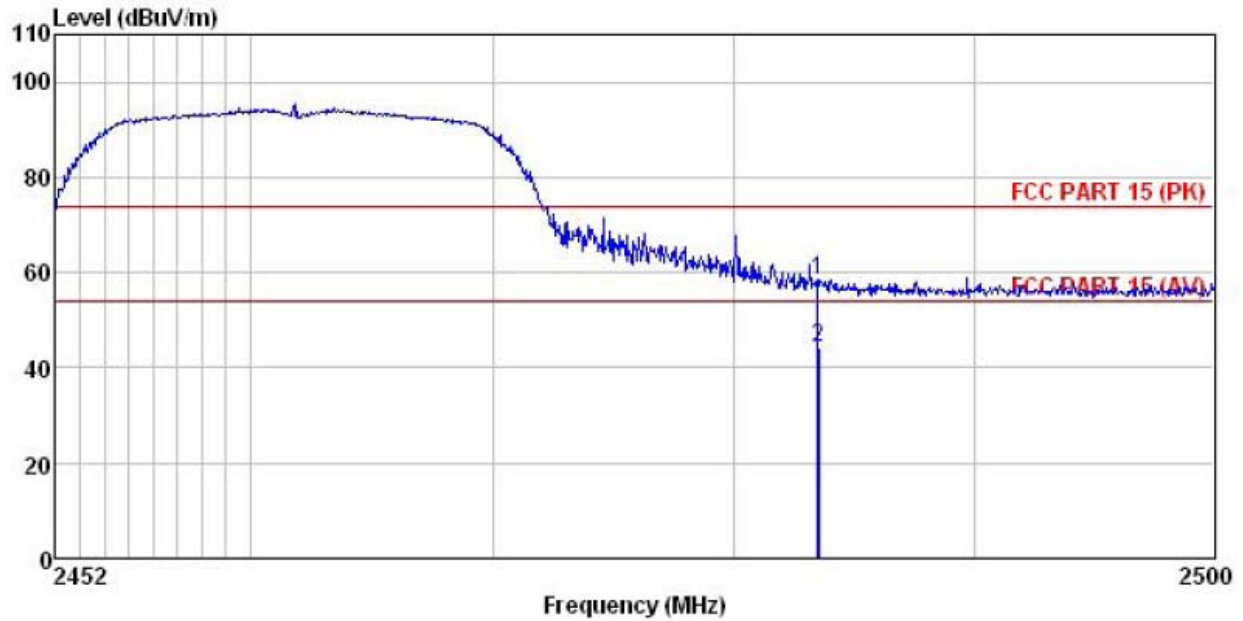


	Freq	ReadAntenna Level	Antenna Factor	Cable Loss	Preamp Factor	Level	Limit	Over	Remark
	MHz	dBuV	dB/m	dB	dB	dBuV/m	dBuV/m	dB	
1	2483.479	25.11	27.52	5.70	0.00	58.33	74.00	-15.67	
2	2483.500	11.22	27.52	5.70	0.00	44.44	54.00	-9.56	Average


11N(20M):

Low Channel


HORIZONTAL:

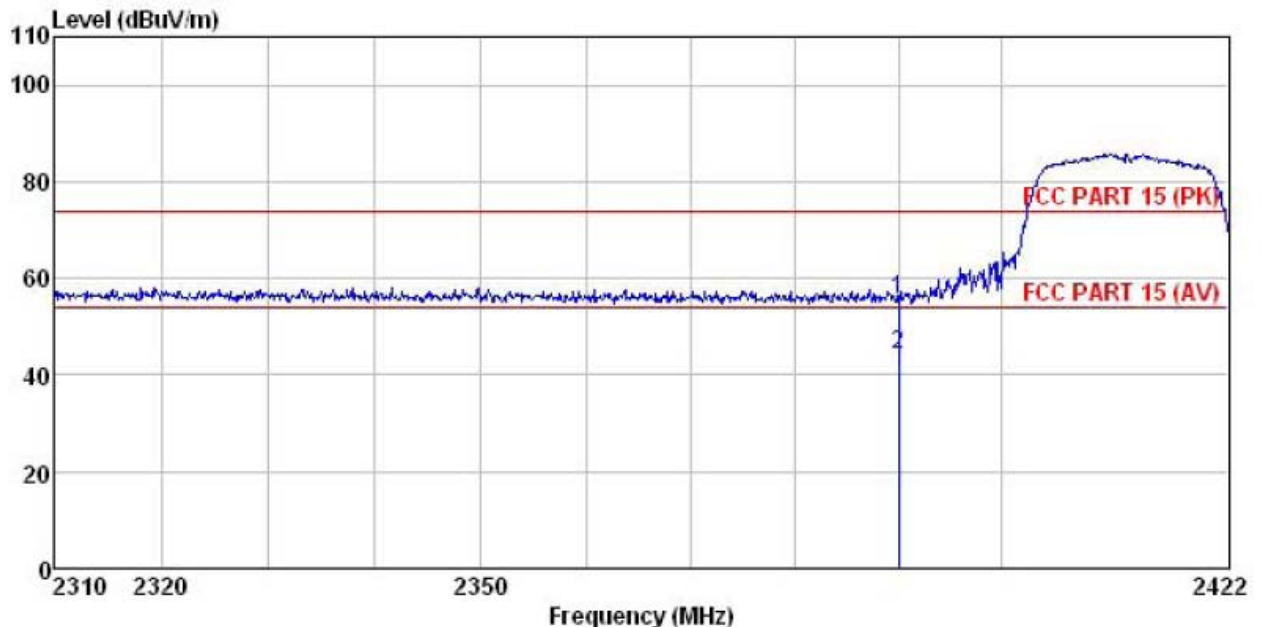


	Freq	ReadAntenna Level	Antenna Factor	Cable Loss	Preamp Factor	Level	Limit	Over	Remark
	MHz	dBuV	dB/m	dB	dB	dBuV/m	dBuV/m	dB	
1	2390.000	22.50	27.58	5.67	0.00	55.75	74.00	-18.25	Peak
2	2390.000	11.16	27.58	5.67	0.00	44.41	54.00	-9.59	Average

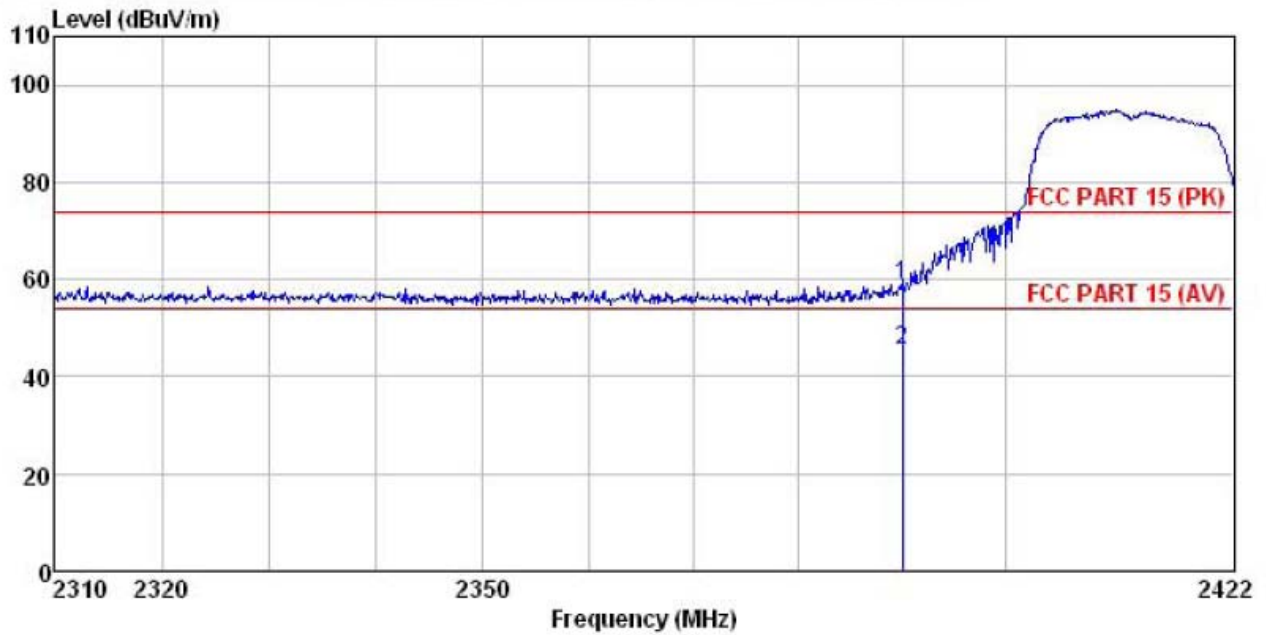VERTICAL:


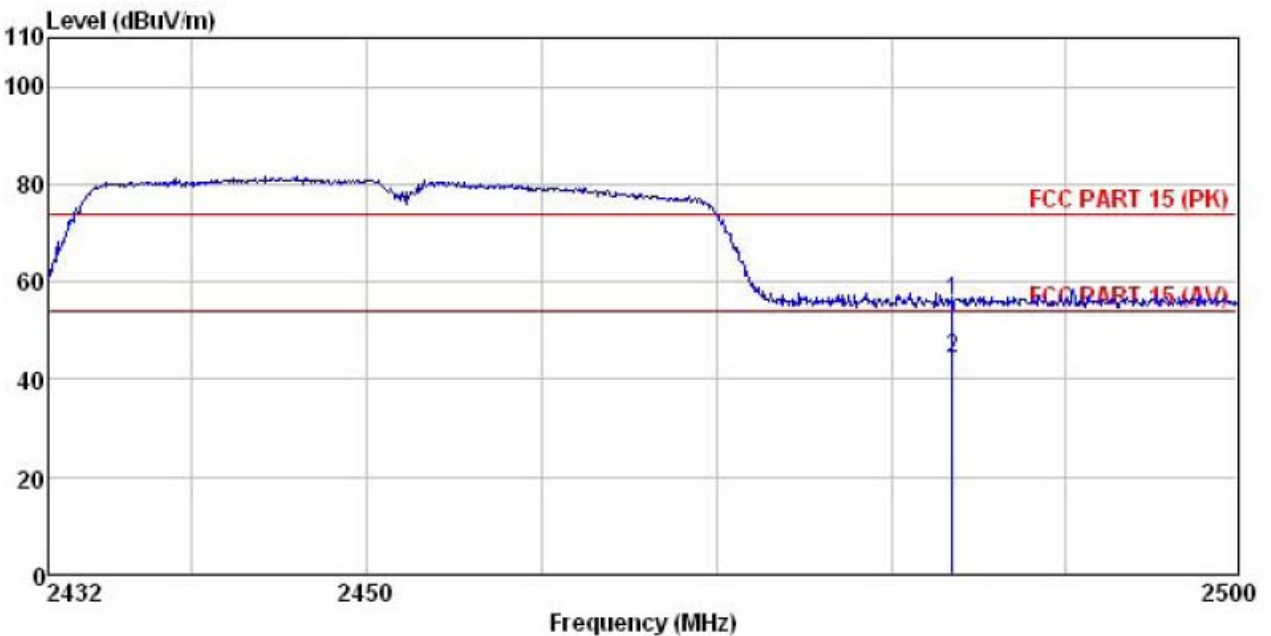
	Freq	ReadAntenna Level	Antenna Factor	Cable Loss	Preamp Factor	Level	Limit	Over	Remark
	MHz	dBuV	dB/m	dB	dB	dBuV/m	dBuV/m	dB	
1	2390.000	25.70	27.58	5.67	0.00	58.95	74.00	-15.05	Peak
2	2390.000	12.41	27.58	5.67	0.00	45.66	54.00	-8.34	Average

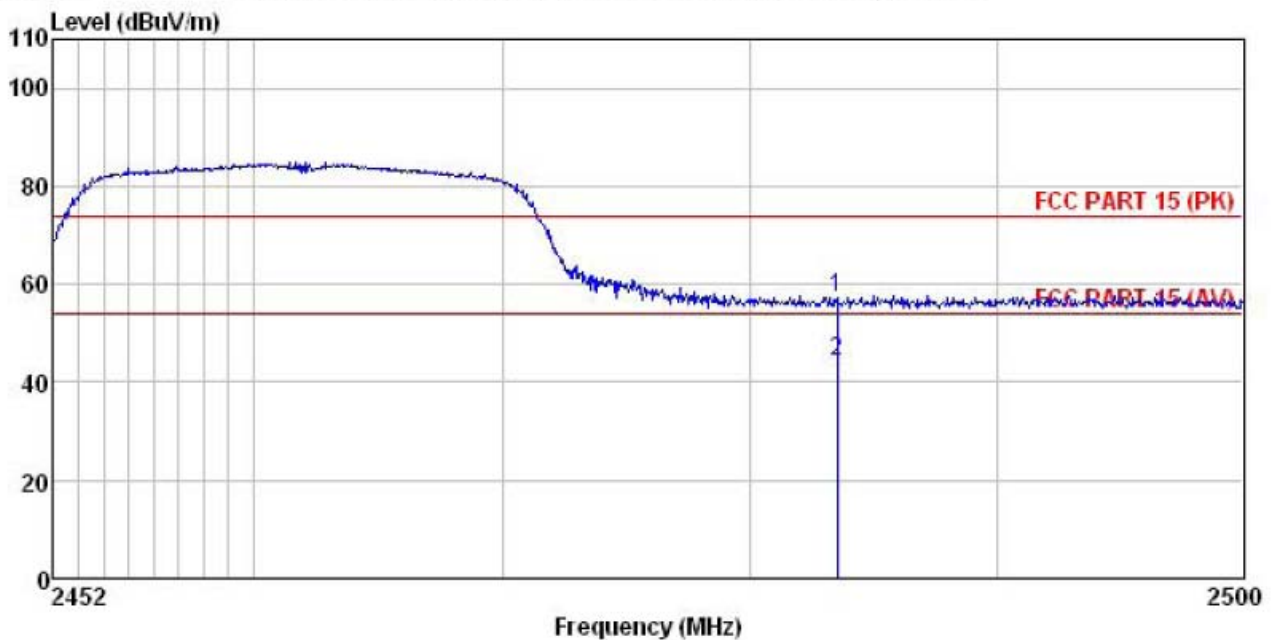High Channel
HORIZONTAL:


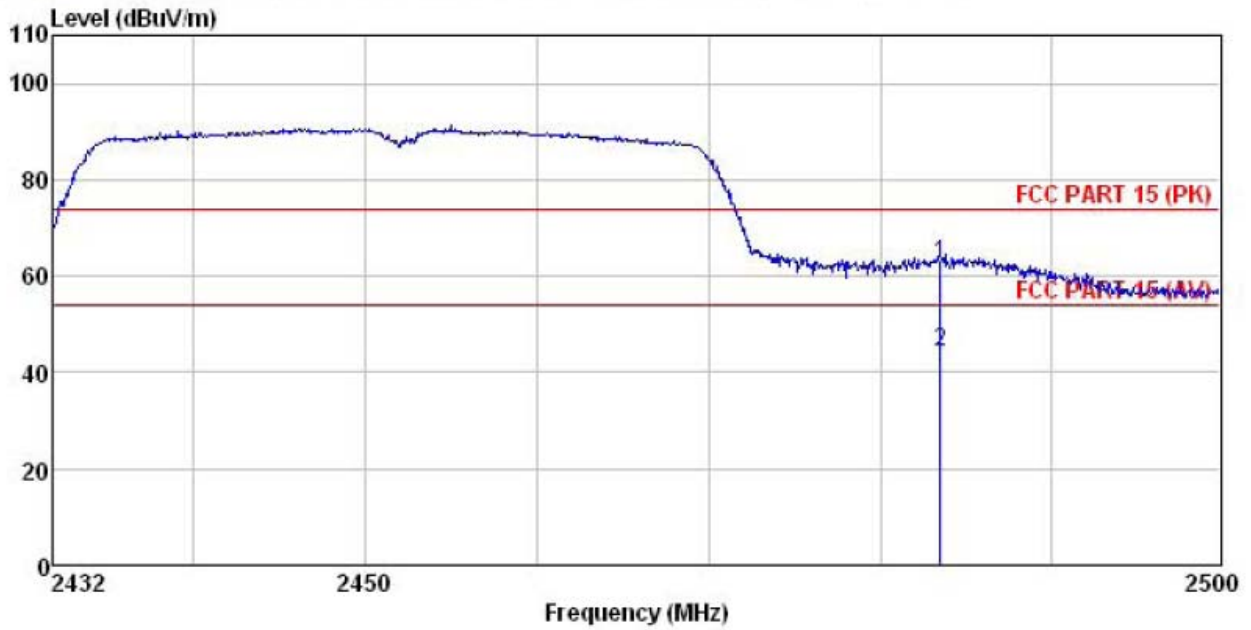
	Freq	ReadAntenna Level	Antenna Factor	Cable Loss	Preamp Factor	Level	Limit	Over	Remark
	MHz	dBuV	dB/m	dB	dB	dBuV/m	dBuV/m	dB	
1	2483.500	23.99	27.52	5.70	0.00	57.21	74.00	-16.79	Peak
2	2483.500	11.03	27.52	5.70	0.00	44.25	54.00	-9.75	Average

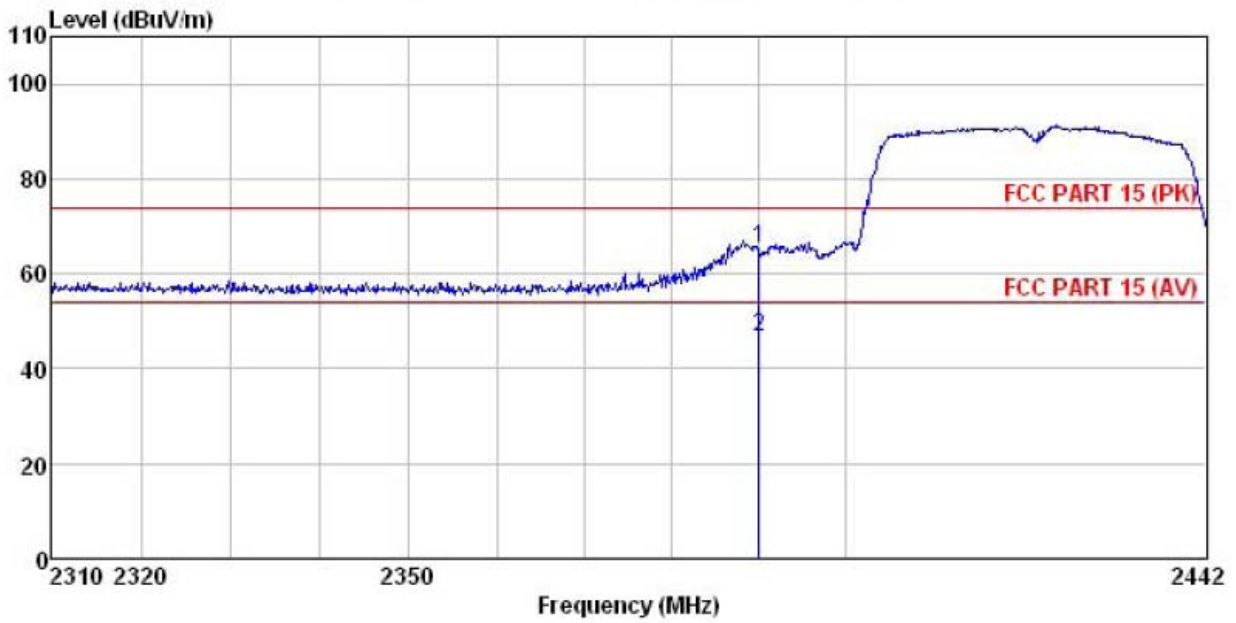VERTICAL:


	Freq	ReadAntenna	Cable Preamp		Limit	Over	
		Level	Factor	Loss Factor	Level	Line	Limit Remark
	MHz	dBuV	dB/m	dB	dB	dBuV/m	dBuV/m dB
1	2390.000	32.03	27.58	5.67	0.00	65.28	74.00 -8.72 Peak
2	2390.000	13.32	27.58	5.67	0.00	46.57	54.00 -7.43 Average

High Channel:
HORIZONTAL:


	Freq	ReadAntenna	Cable Preamp		Limit	Over	
		Level	Factor	Loss Factor	Level	Line	Limit Remark
	MHz	dBuV	dB/m	dB	dB	dBuV/m	dBuV/m dB
1	2483.500	22.70	27.52	5.70	0.00	55.92	74.00 -18.08 Peak
2	2483.500	10.97	27.52	5.70	0.00	44.19	54.00 -9.81 Average

VERTICAL:


Frequency (MHz)								
	Freq	ReadAntenna	Cable Preamp	Limit	Over			
		Level	Factor	Loss	Factor	Level	Line	Limit
	MHz	dBuV	dB/m	dB	dB	dBuV/m	dBuV/m	dB
1	2483.500	29.32	27.52	5.70	0.00	62.54	74.00	-11.46 Peak
2	2483.500	11.21	27.52	5.70	0.00	44.43	54.00	-9.57 Average

4.5.2 For Conducted Bandedge Measurement

11B:

A. Test Plots




(Plot 4.5.2.1 A: Channel 01: 2412MHz)




(Plot 4.5.2.1 B: Channel 11: 2462MHz)

11G:

B. Test Plots

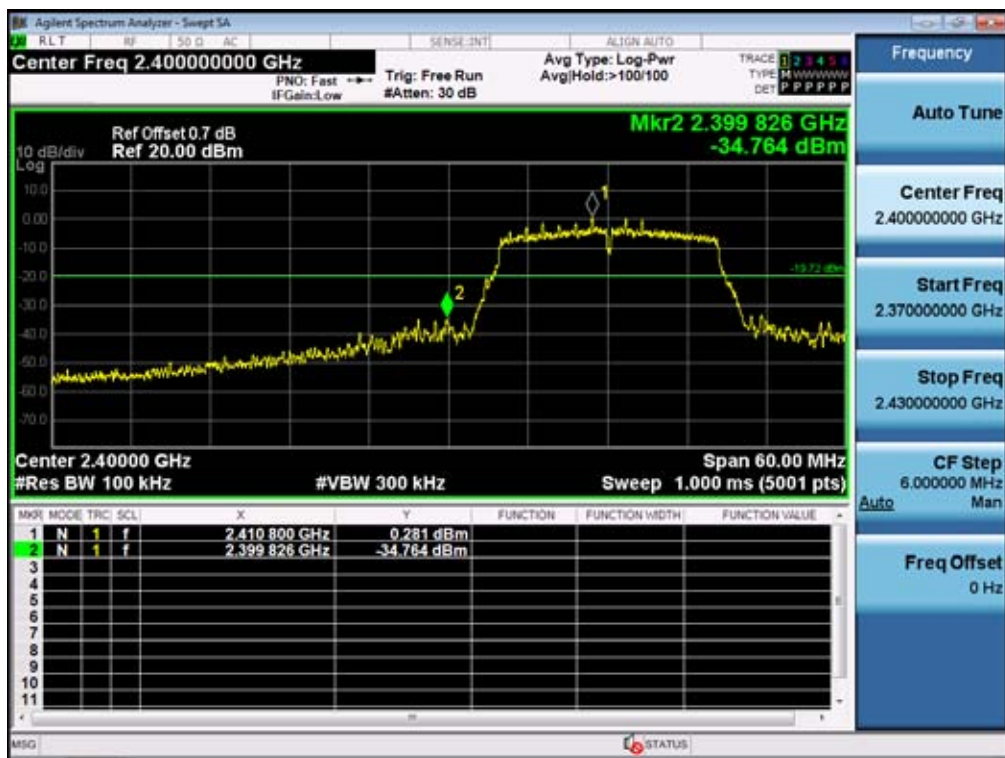


(Plot 4.5.2.2 A: Channel 01: 2412MHz)

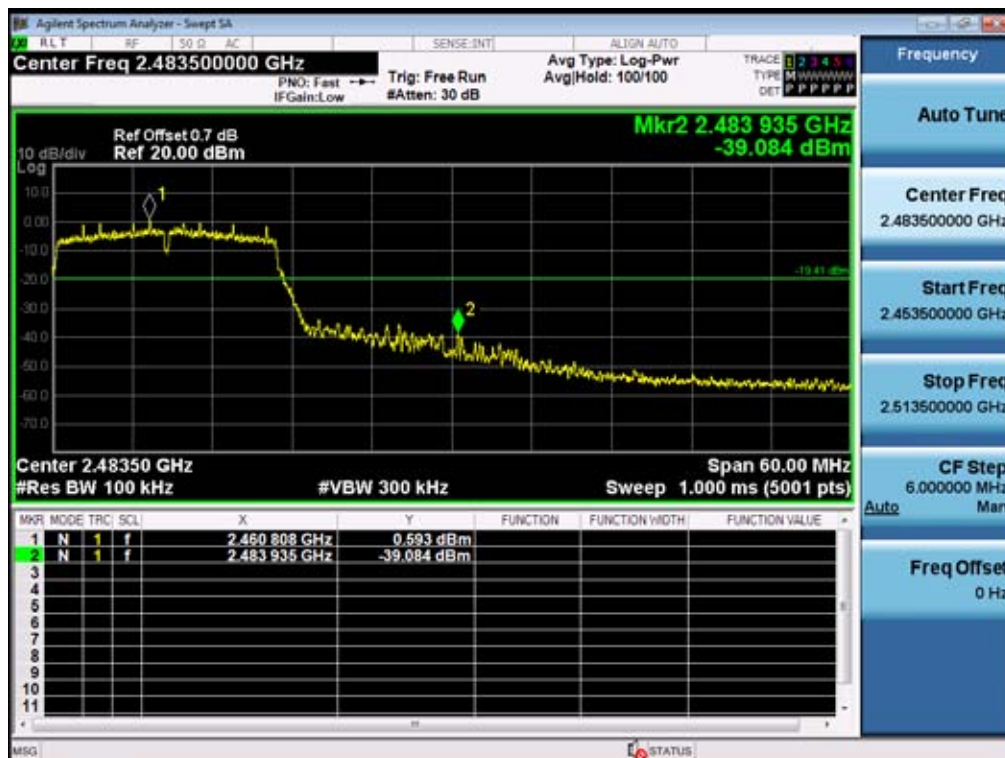


(Plot 4.5.2.2 B: Channel 11: 2462MHz)

11N(20M):

C. Test Plots

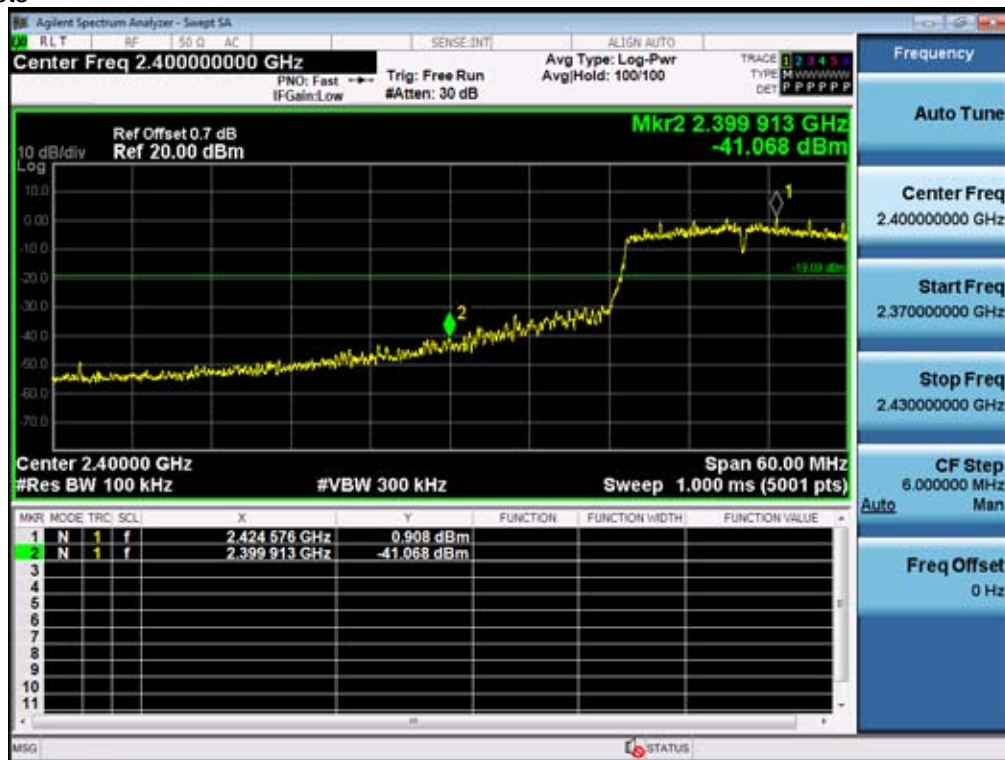


(Plot 4.5.2.3 A: Channel 01: 2412MHz)

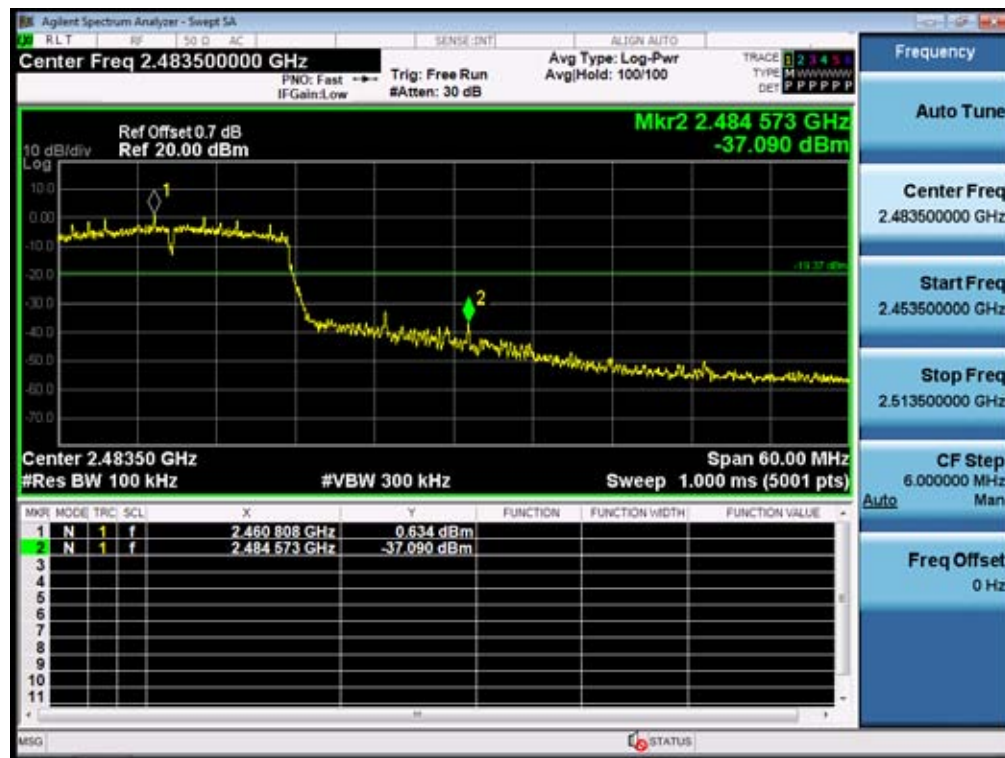


(Plot 4.5.2.3 B: Channel 11: 2412MHz)

11N(40M):

D. Test Plots

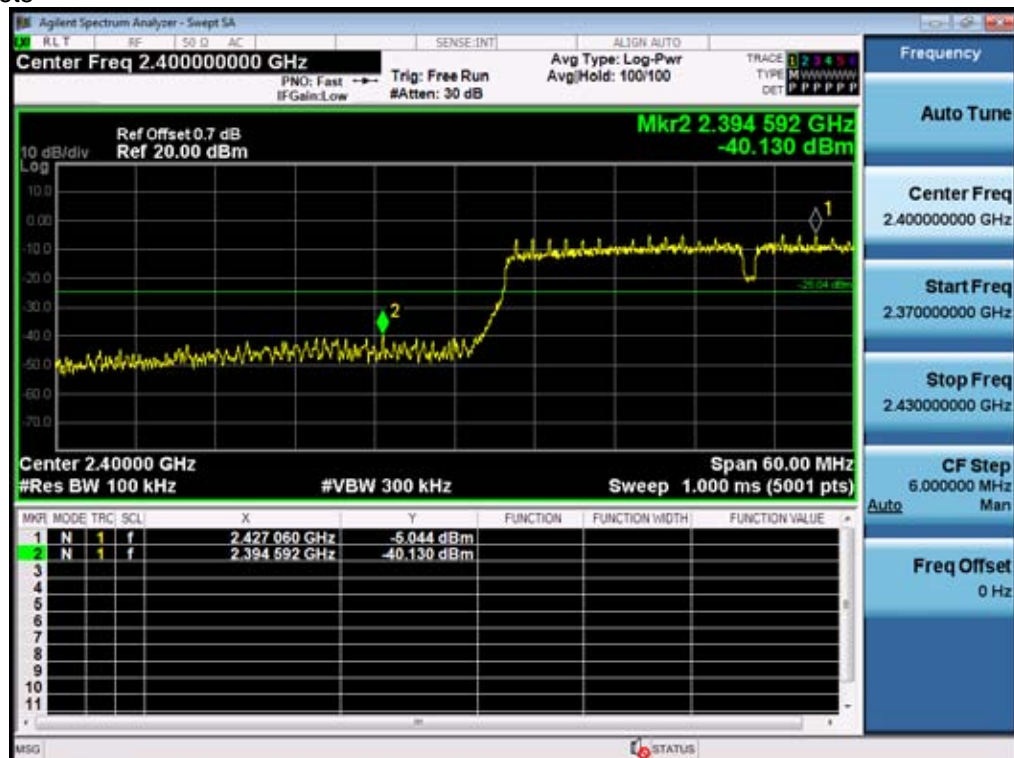


(Plot 4.5.2.4 A: Channel 03: 2422MHz)

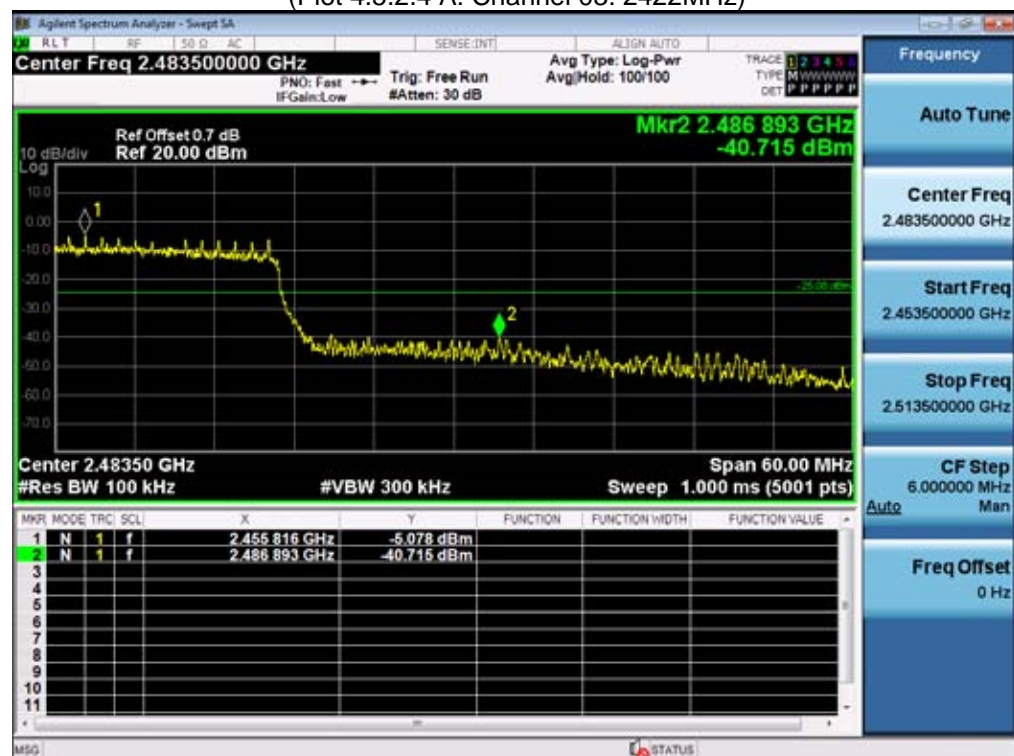

(Plot 4.5.2.4 B: Channel 09: 2452MHz)

4.6. Spurious RF Conducted Emission

TEST CONFIGURATION



TEST PROCEDURE

The Spurious RF conducted emissions compliance of RF radiated emission should be measured by following the guidance in ANSI C63.10-2009 with respect to maximizing the emission by rotating the EUT, measuring the emission while the EUT is situated in three orthogonal planes (if appropriate), adjusting the measurement antenna height and polarization etc. Set RBW=100 kHz and VBW= 300 KHz to measure the peak field strength, and measure frequency range from 9 KHz to 26.5GHz.

LIMIT

1. Below -20dB of the highest emission level in operating band.
2. Fall in the restricted bands listed in section 15.205. The maximum permitted average field strength is listed in section 15.209.

TEST RESULTS


Remark: The measurement frequency range is from 9 KHz to the 10th harmonic of the fundamental frequency. The lowest, middle and highest channels are tested to verify the spurious emissions and bandedge measurement data.

4.6.1 802.11b Test Mode


A. Test Verdict

Channel	Frequency (MHz)	Frequency Range	Refer to Plot	Limit (dBc)	Verdict
1	2412	2.412 GHz	Plot 4.6.1 A1	---	PASS
		30MHz -26GHz	Plot 4.6.1 A2	-20	PASS
6	2437	2.437 GHz	Plot 4.6.1 B1	---	PASS
		30MHz -26GHz	Plot 4.6.1 B2	-20	PASS
11	2462	2.462 GHz	Plot 4.6.1 C1	---	PASS
		30MHz -26GHz	Plot 4.6.1 C2	-20	PASS

- Note:
1. For 802.11b mode at final test to get the worst-case emission at 1Mbps.
 2. The test results including the cable lose.

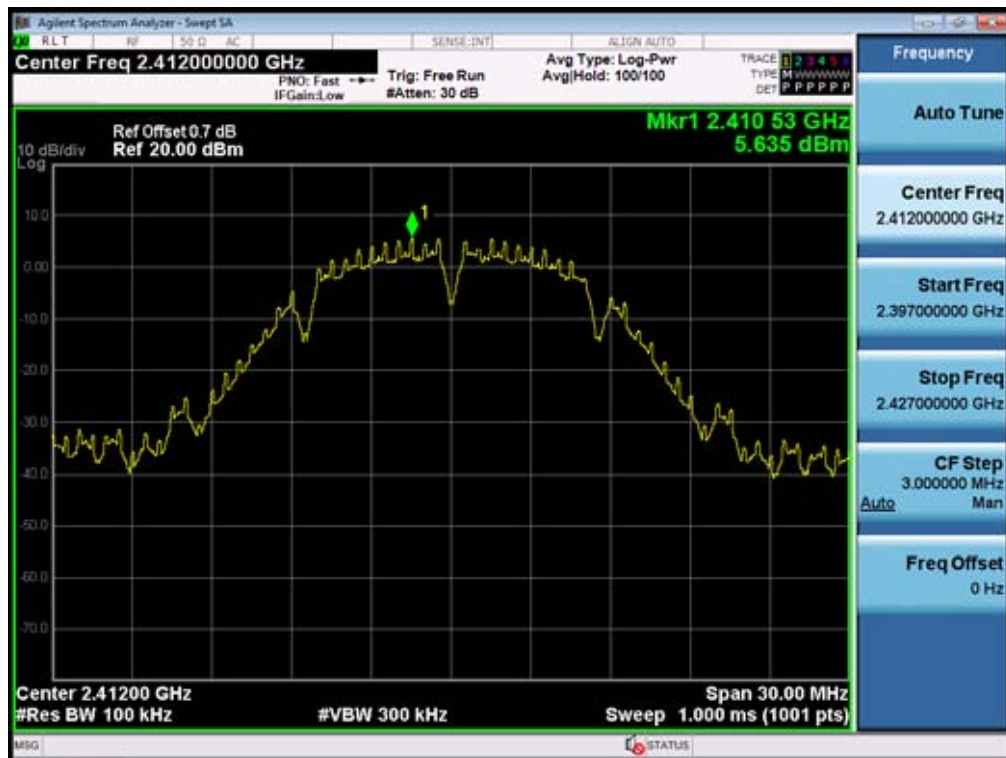


(Plot 4.6.1 A1: Channel 1: 2412MHz @ 802.11b)

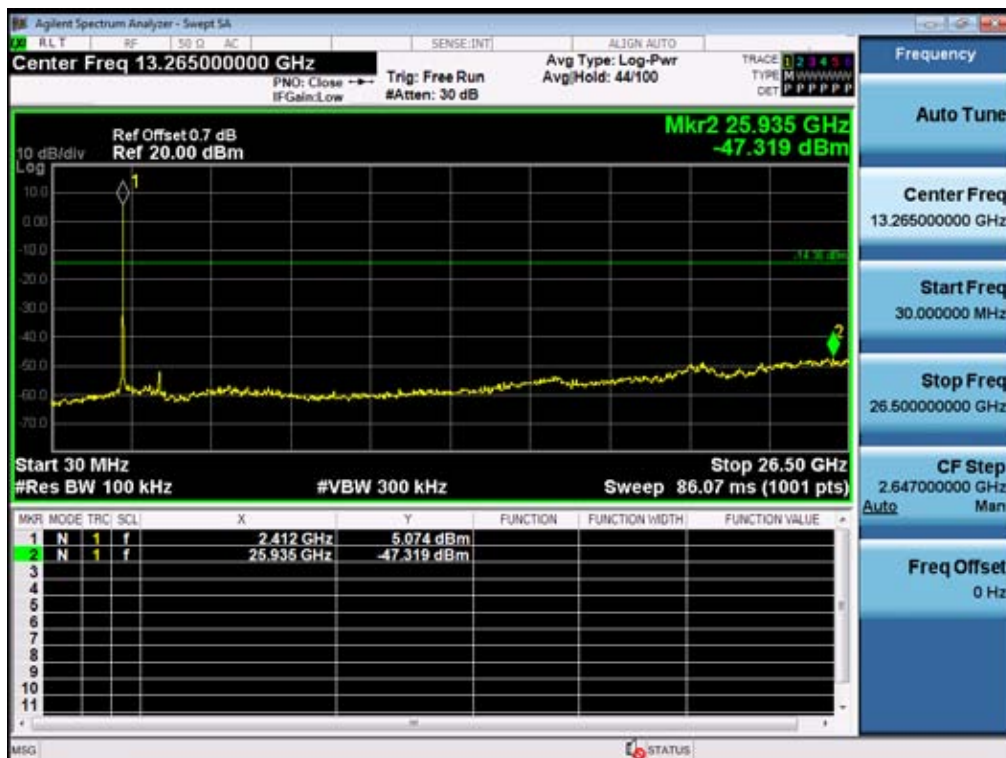


(Plot 4.6.1 A2: Channel 1: 2412MHz @ 802.11b)




(Plot 4.6.1 B1: Channel 6: 2437MHz @ 802.11b)

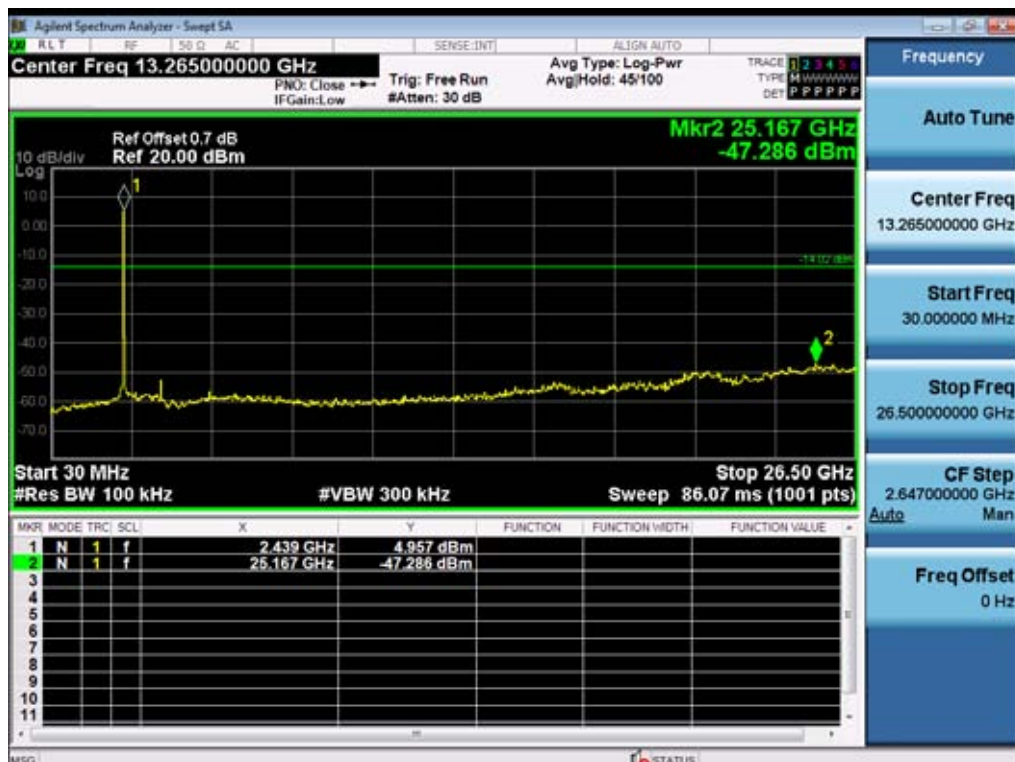

(Plot 4.6.1 B2: Channel 6: 2437MHz @ 802.11b)

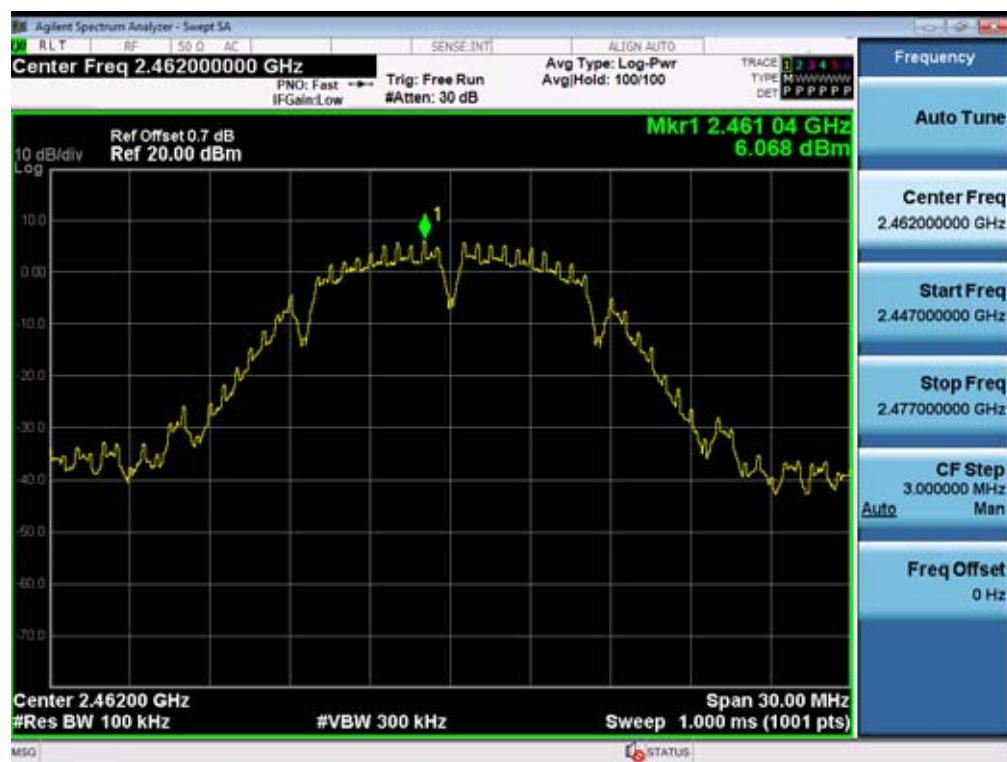

(Plot 4.6.1 C1: Channel 11: 2462MHz @ 802.11b)

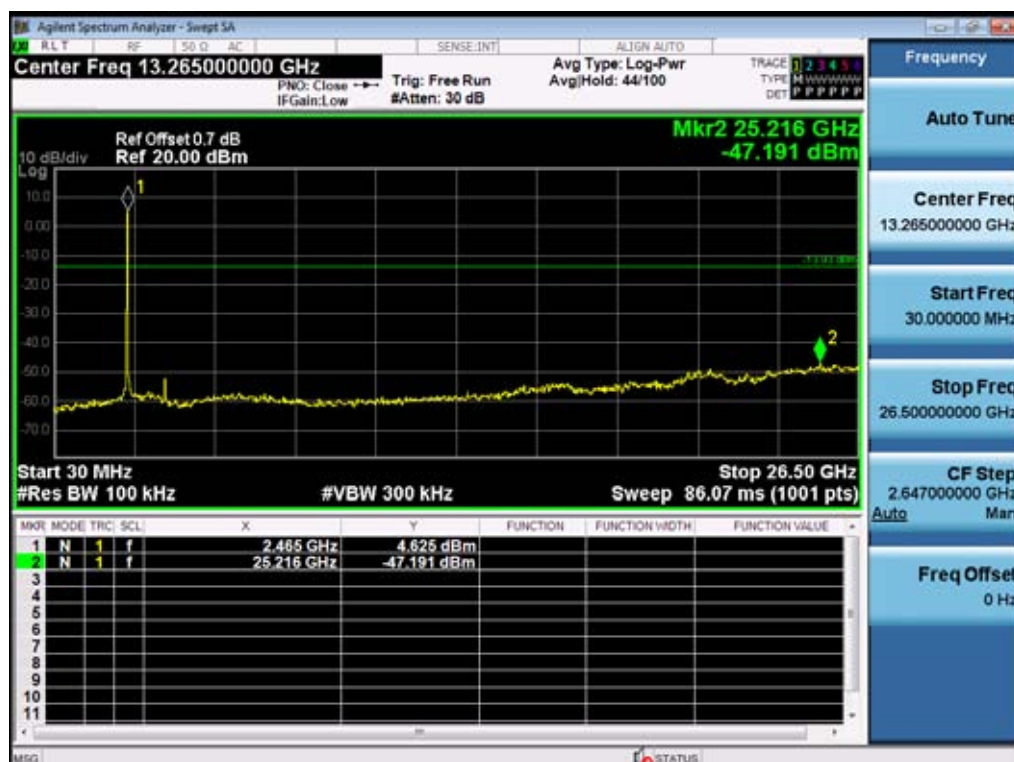

(Plot 4.6.1 C2: Channel 11: 2462MHz @ 802.11b)

4.6.2 802.11g Test Mode

A. Test Verdict


Channel	Frequency (MHz)	Frequency Range	Refer to Plot	Limit (dBc)	Verdict
1	2412	2.412 GHz	Plot 4.6.2 A1	---	PASS
		30MHz-26GHz	Plot 4.6.2 A2	-20	PASS
6	2437	2.437 GHz	Plot 4.6.2 B1	---	PASS
		30MHz-26GHz	Plot 4.6.2 B2	-20	PASS
11	2462	2.462 GHz	Plot 4.6.2 C1	---	PASS
		30MHz-26GHz	Plot 4.6.2 C2	-20	PASS

Note: 1. For 802.11g mode at final test to get the worst-case emission at 6Mbps.
2. The test results including the cable lose.

B. Test Plots




(Plot 4.6.2 A1: Channel 1: 2412MHz @ 802.11g)

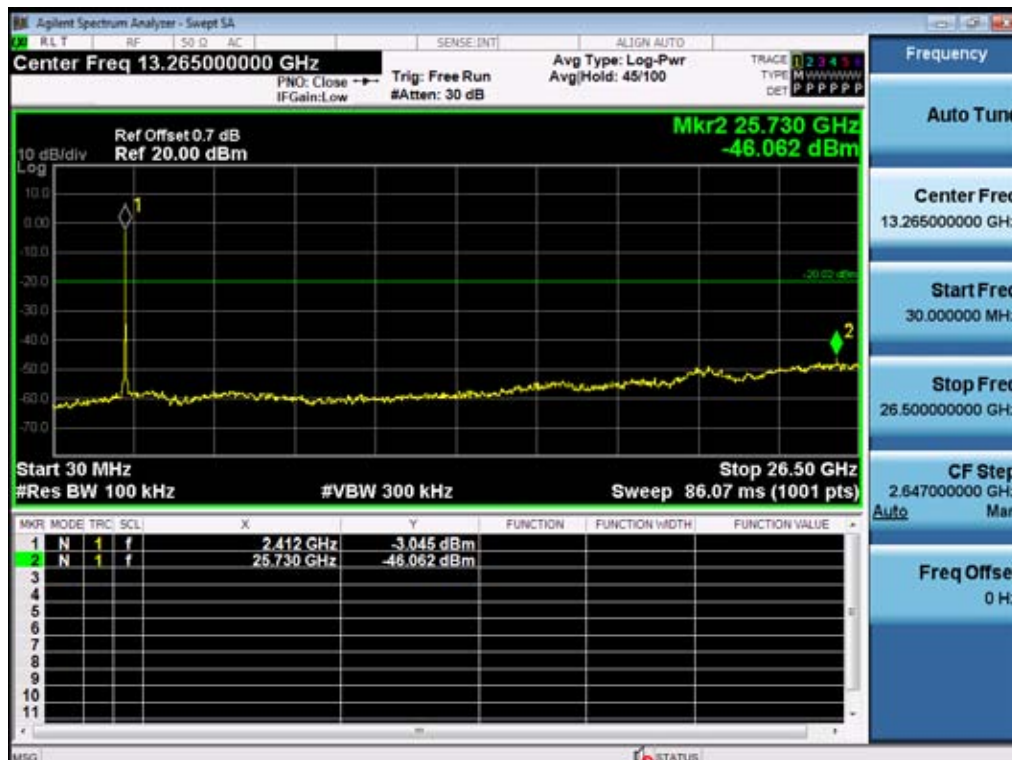

(Plot 4.6.2 A2: Channel 1: 2412MHz @ 802.11g)




(Plot 4.6.2 B1: Channel 6: 2437MHz @ 802.11g)

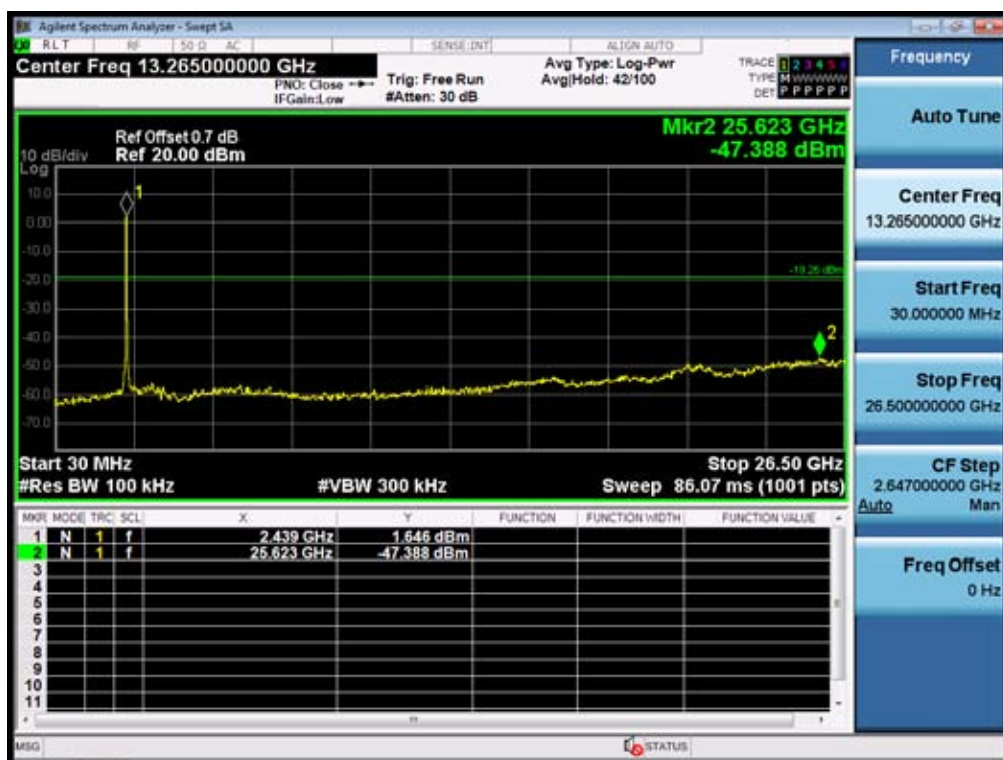

(Plot 4.6.2 B2: Channel 6: 2437MHz @ 802.11g)



(Plot 4.6.2 C1: Channel 11: 2462MHz @ 802.11g)

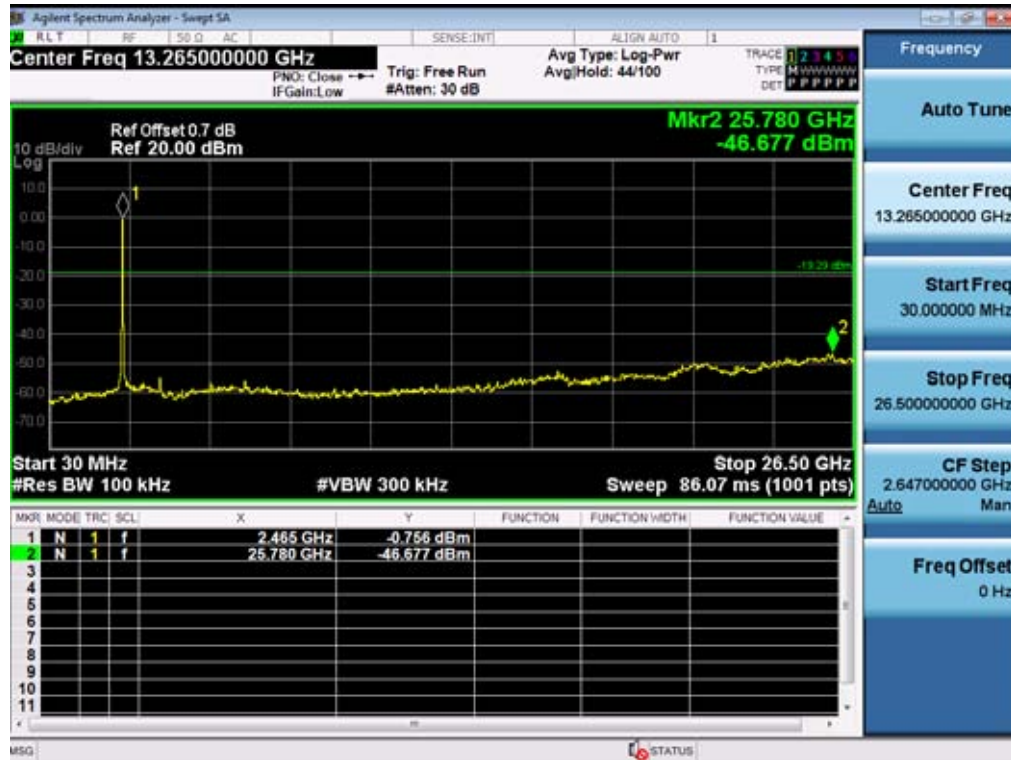

(Plot 4.6.2 C2: Channel 11: 2462MHz @ 802.11g)

4.6.3 802.11n HT20MHz Test Mode

A. Test Verdict


Channel	Frequency (MHz)	Frequency Range	Refer to Plot	Limit (dBc)	Verdict
1	2412	2.412 GHz	Plot 4.6.3 A1	---	PASS
		30MHz-26GHz	Plot 4.6.3 A2	-20	PASS
6	2437	2.437 GHz	Plot 4.6.3 B1	---	PASS
		30MHz-26GHz	Plot 4.6.3 B2	-20	PASS
11	2462	2.462 GHz	Plot 4.6.3 C1	---	PASS
		30MHz-26GHz	Plot 4.6.3 C2	-20	PASS

Note: 1. For 802.11n HT20MHz mode at final test to get the worst-case emission at 6.5Mbps.
2. The test results including the cable lose.

B. Test Plots




(Plot 4.6.3 A1: Channel 1: 2412MHz @ 802.11n HT20)

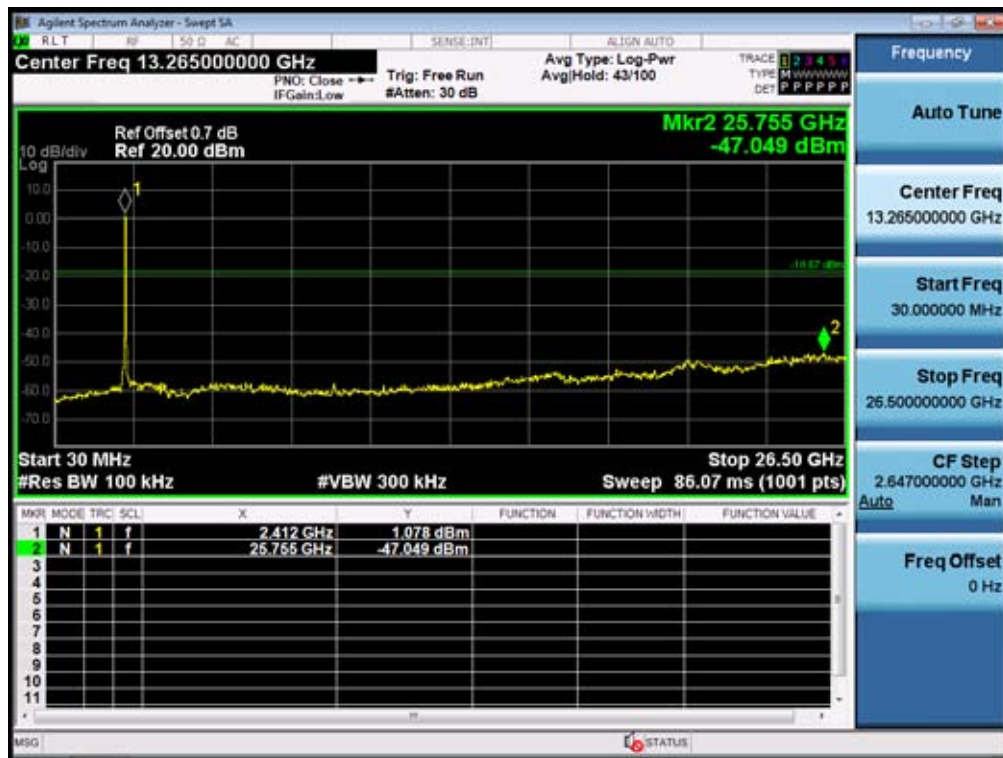

(Plot 4.6.3 A2: Channel 1: 2412MHz @ 802.11n HT20)




(Plot 4.6.3 B1: Channel 6: 2437MHz @ 802.11n HT20)

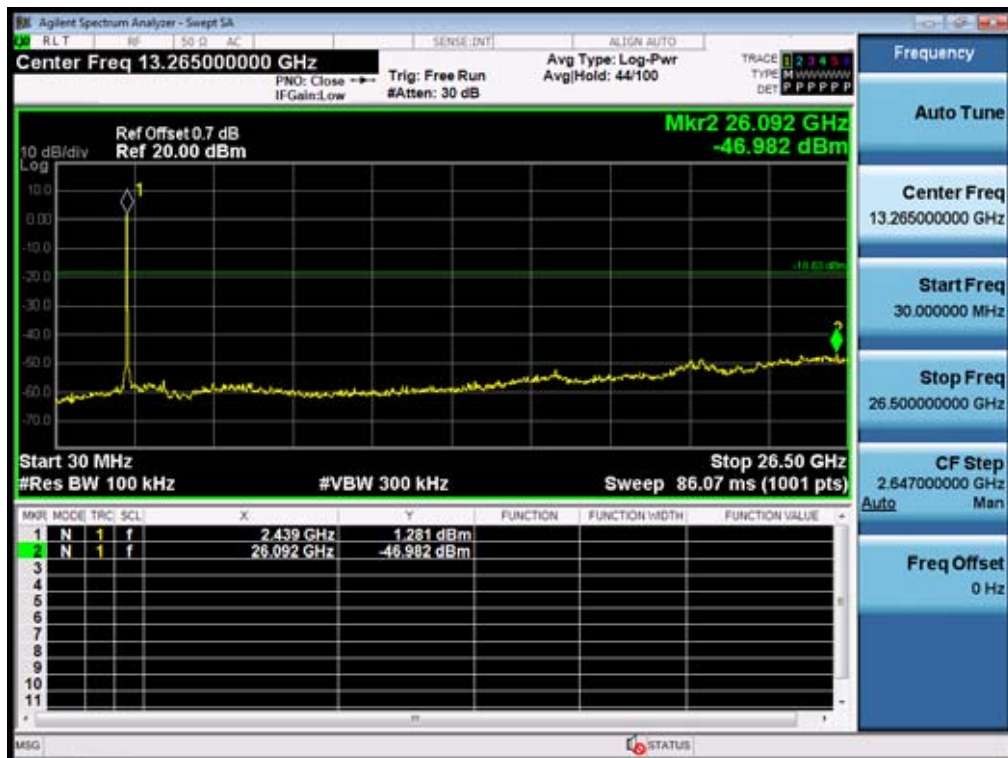

(Plot 4.6.3 B2: Channel 6: 2437MHz @ 802.11n HT20)



(Plot 4.6.3 C1: Channel 11: 2462MHz @ 802.11n HT20)

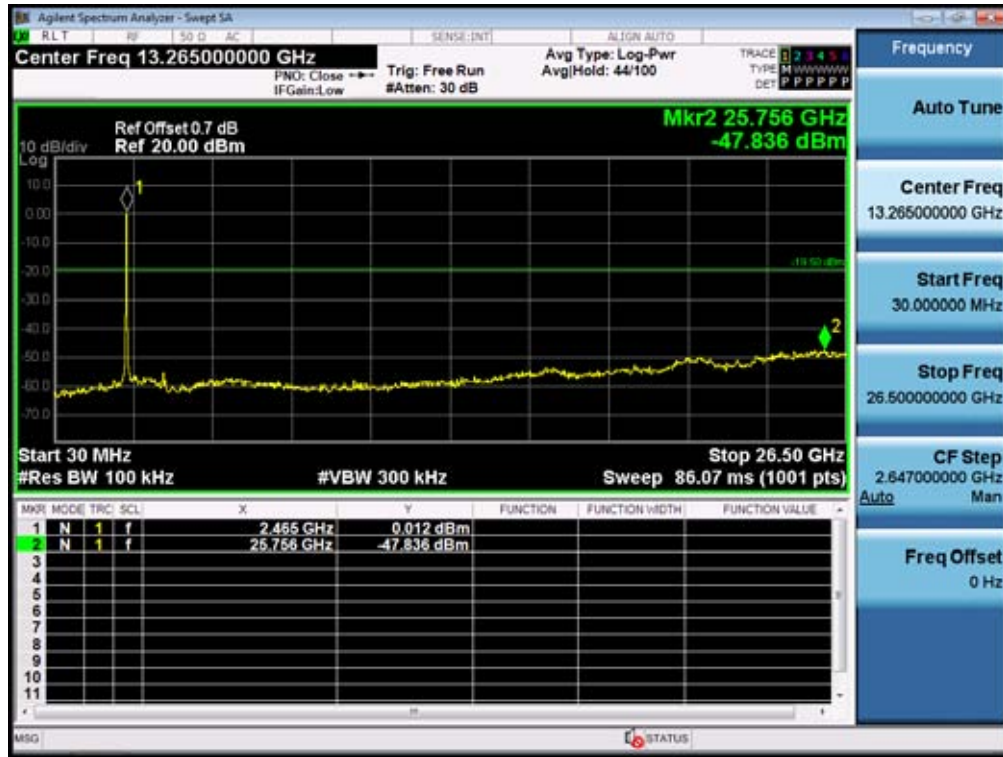

(Plot 4.6.3 C2: Channel 11: 2462MHz @ 802.11n HT20)

4.6.4 802.11n HT40MHz Test Mode

A. Test Verdict


Channel	Frequency (MHz)	Frequency Range	Refer to Plot	Limit (dBc)	Verdict
3	2422	2.422 GHz	Plot 4.6.4 A1	---	PASS
		30MHz-26GHz	Plot 4.6.4 A2	-20	PASS
6	2437	2.437 GHz	Plot 4.6.4 B1	---	PASS
		30MHz-26GHz	Plot 4.6.4 B2	-20	PASS
9	2452	2.452 GHz	Plot 4.6.4 C1	---	PASS
		30MHz-26GHz	Plot 4.6.3 C2	-20	PASS

Note: 1. For 802.11n HT40MHz mode at final test to get the worst-case emission at 13.5Mbps.
 2. The test results including the cable loss.


B. Test Plots




(Plot 4.6.4 A1: Channel 3: 2422MHz @ 802.11n HT40)

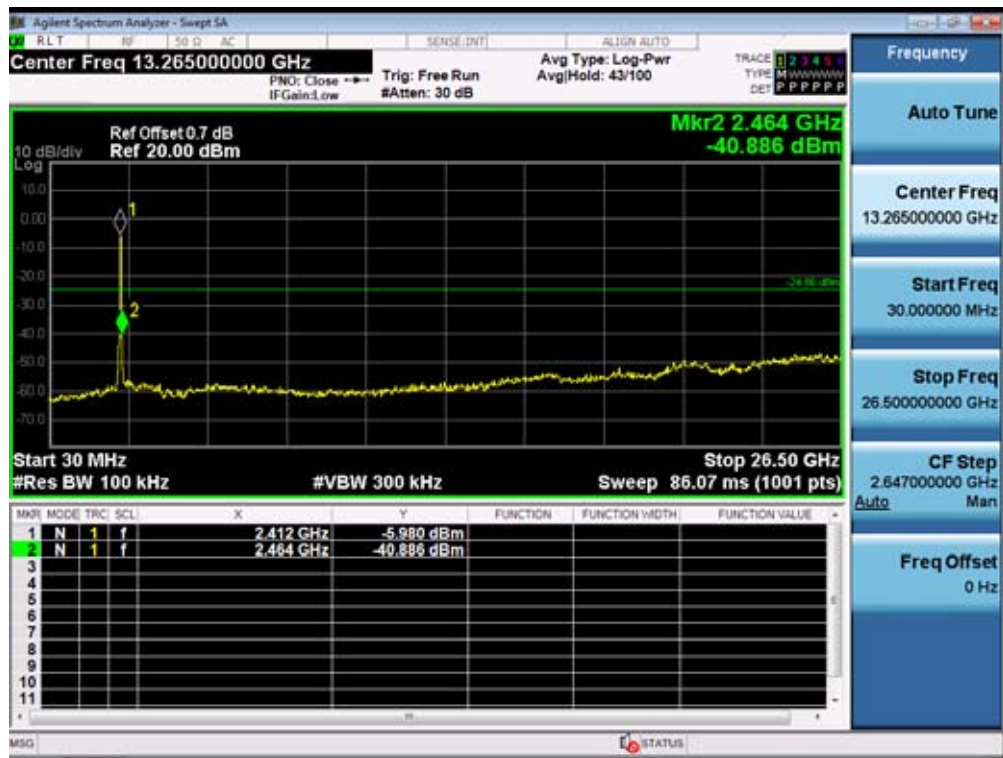

(Plot 4.6.4 A2: Channel 3: 2422MHz @ 802.11n HT40)

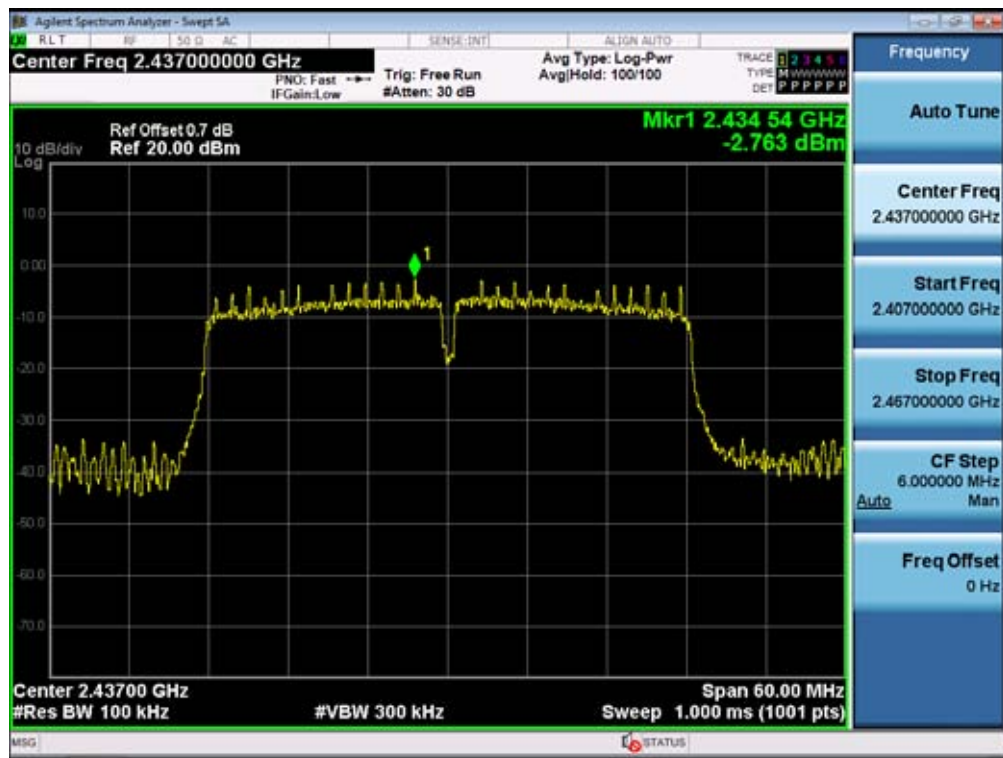


(Plot 4.6.4 B1: Channel 6: 2437MHz @ 802.11n HT40)

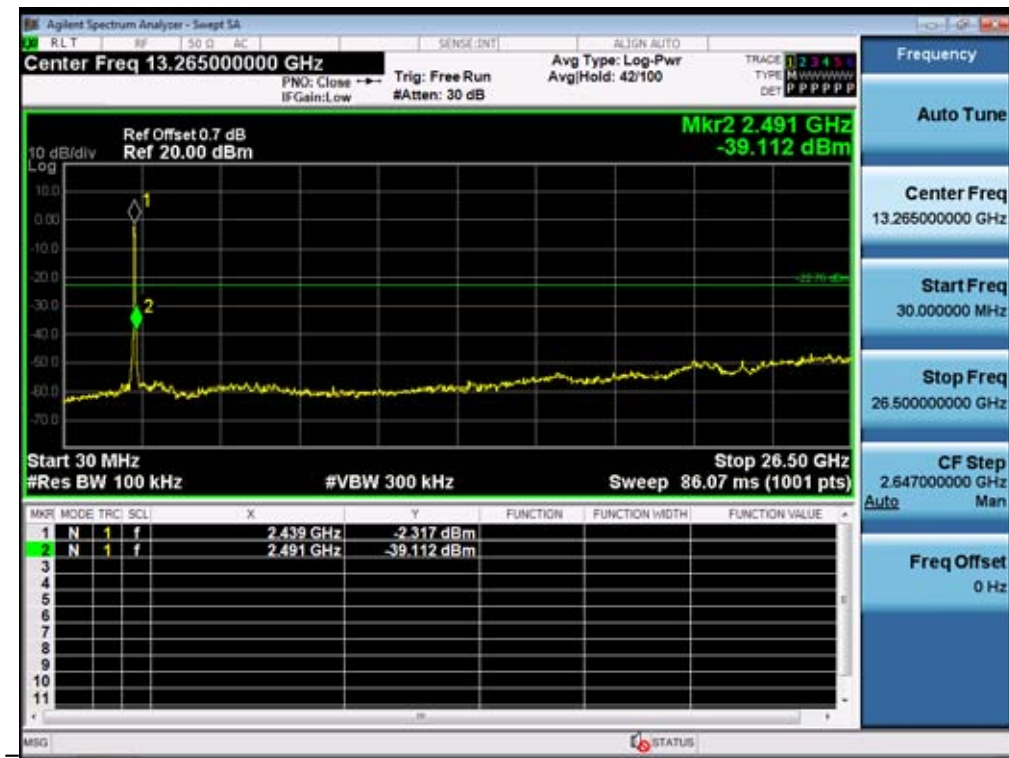

(Plot 4.6.4 B2: Channel 6: 2437MHz @ 802.11n HT40)




(Plot 4.6.4 C1: Channel 9 : 2452MHz @ 802.11n HT40)

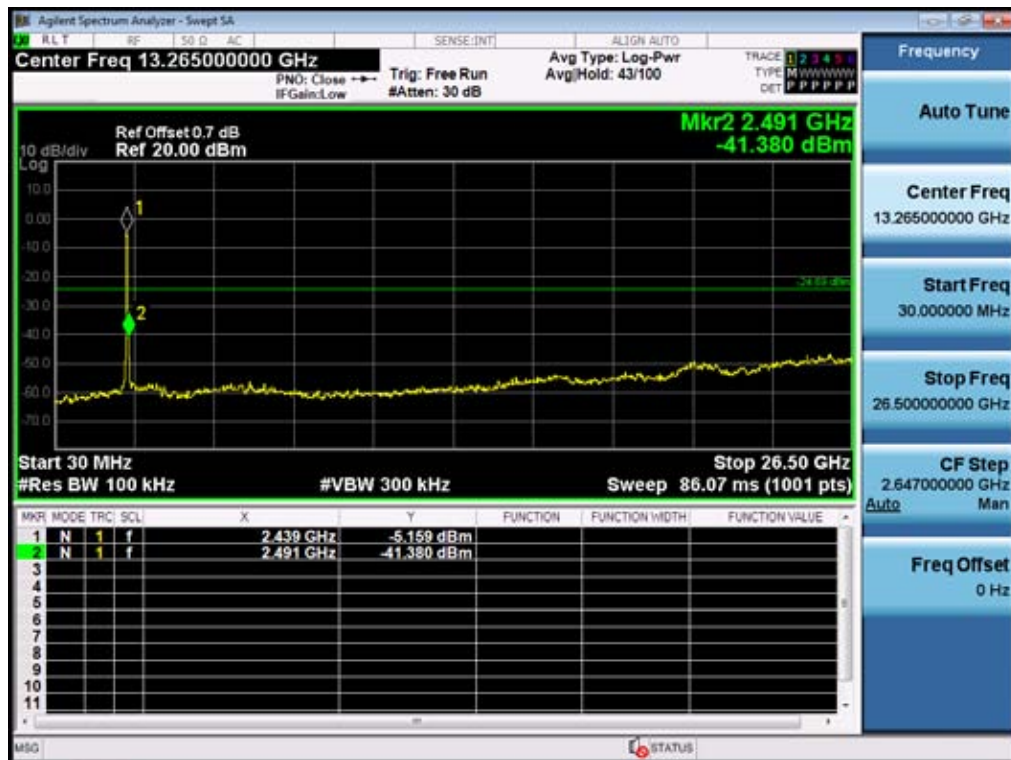

(Plot 4.6.4 C2: Channel 9: 2452MHz @ 802.11n HT40)

4.7. 6dB Bandwidth

TEST CONFIGURATION



TEST PROCEDURE

The transmitter output was connected to the spectrum analyzer through an attenuator. The bandwidth of the fundamental frequency was measured by spectrum analyzer with RBW=100 KHz and VBW=300KHz. The 6dB bandwidth is defined as the total spectrum the power of which is higher than peak power minus 6dB. According to KDB558074 D01 V03 for one of the following procedures may be used to determine the modulated DTS device signal bandwidth.

1. Set RBW = 100 kHz.
2. Set the video bandwidth (VBW) ≥ 3 RBW.
3. Detector = Peak.
4. Trace mode = max hold.
5. Sweep = auto couple.
6. Allow the trace to stabilize.
7. Measure the maximum width of the emission that is constrained by the frequencies associated with the two outermost amplitude points (upper and lower frequencies) that are attenuated by 6 dB relative to the maximum level measured in the fundamental emission.

LIMIT

For digital modulation systems, the minimum 6 dB bandwidth shall be at least 500 kHz.

TEST RESULTS


4.7.1 801.11b Test Mode

A. Test Verdict


Channel	Frequency (MHz)	6 dB Bandwidth (MHz)	Refer to Plot	Limits (kHz)	Verdict
1	2412	10.06	Plot 4.7.1 A	≥ 500	PASS
6	2437	10.08	Plot 4.7.1 B	≥ 500	PASS
11	2462	9.563	Plot 4.7.1 C	≥ 500	PASS

Note: 1. For 802.11b mode at final test to get the worst-case emission at 1Mbps.
2. The test results including the cable loss.


B. Test Plots

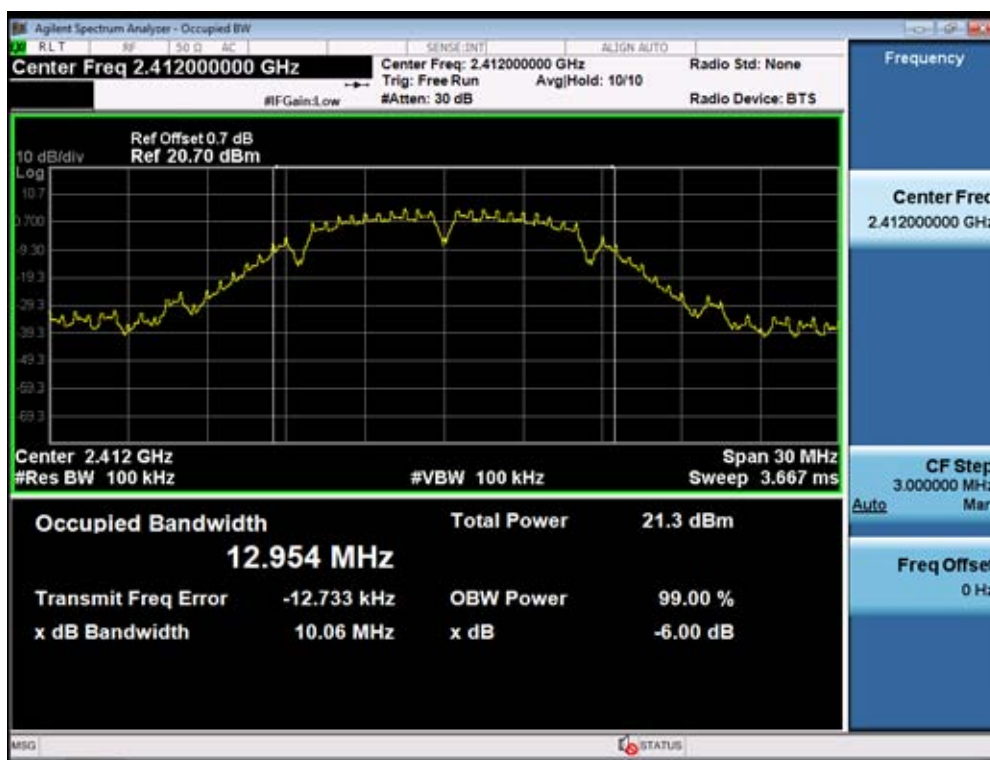

(Plot 4.7.1 A: Channel 1: 2412MHz @ 802.11b)

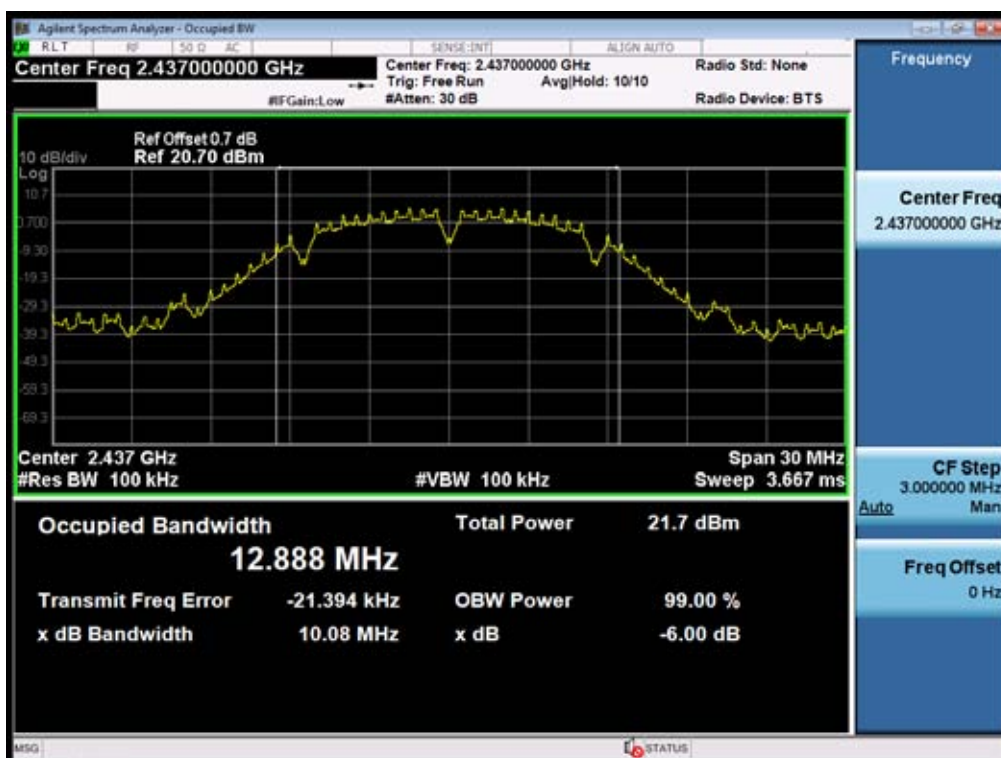

(Plot 4.7.1 B: Channel 6: 2437MHz @ 802.11b)

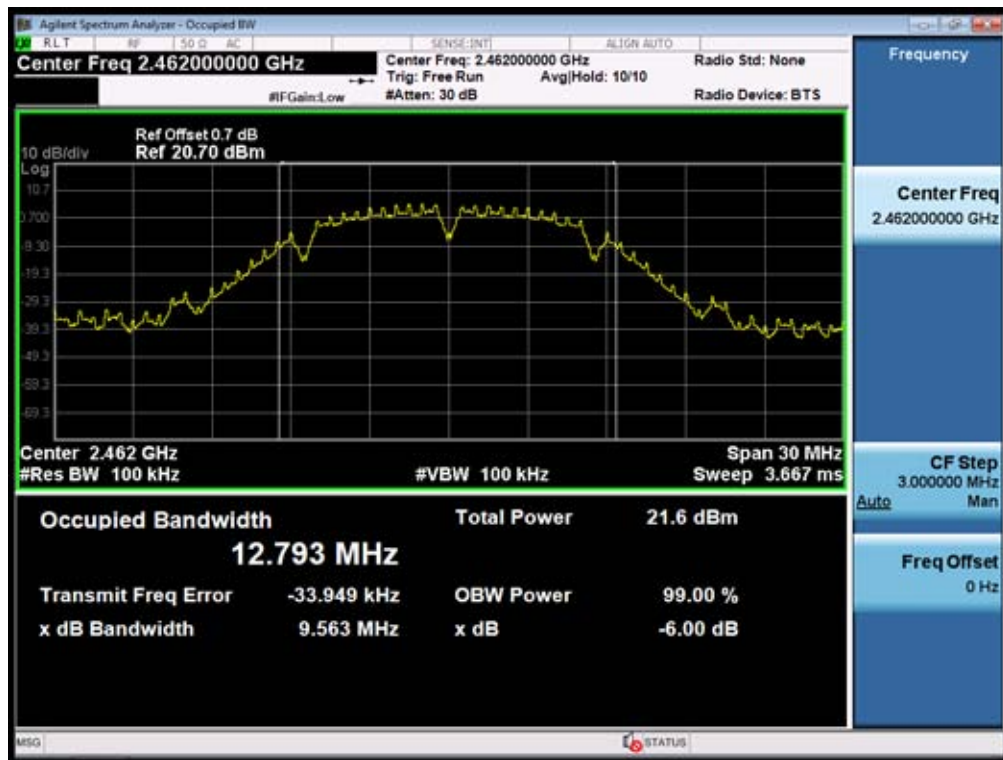

(Plot 4.7.1 C: Channel 11: 2462MHz @ 802.11b)


4.7.2 801.11g Test Mode

A. Test Verdict


Channel	Frequency (MHz)	6 dB Bandwidth (MHz)	Refer to Plot	Limits (kHz)	Verdict
1	2412	15.46	Plot 4.7.2 A	≥ 500	PASS
6	2437	15.79	Plot 4.7.2 B	≥ 500	PASS
11	2462	15.35	Plot 4.7.2 C	≥ 500	PASS

Note: 1. For 802.11g mode at final test to get the worst-case emission at 6Mbps.
2. The test results including the cable loss.

B. Test Plots

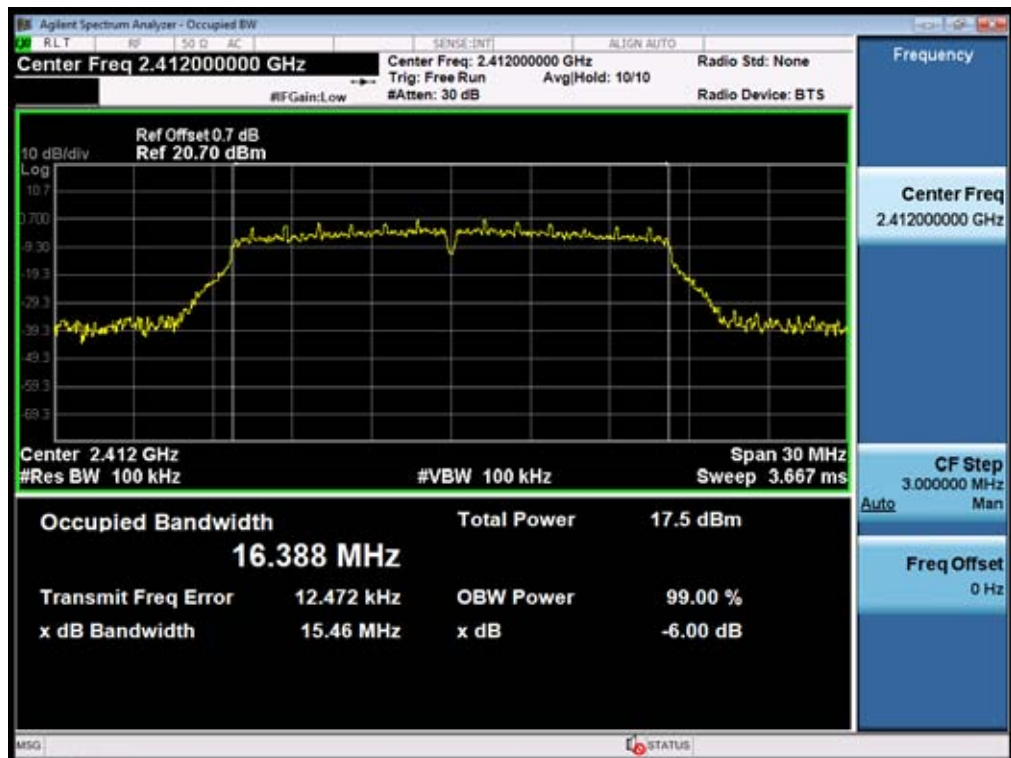

(Plot 4.7.2 A: Channel 1: 2412MHz @ 802.11g)

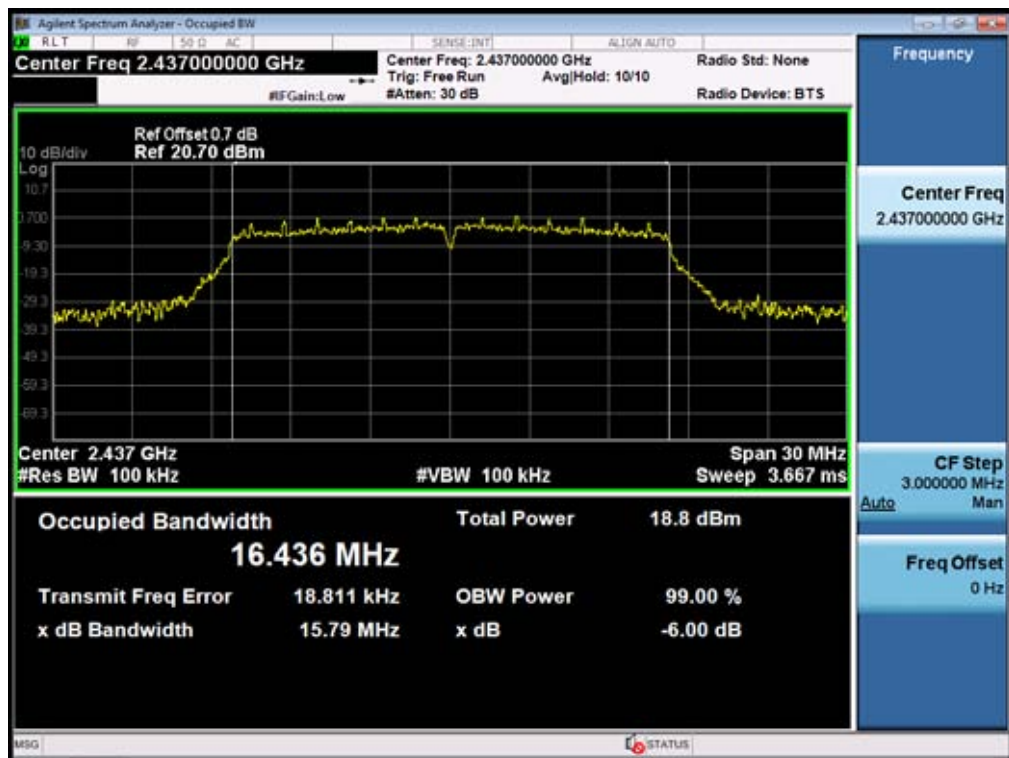

(Plot 4.7.2 B: Channel 6: 2437MHz @ 802.11g)



(Plot 4.7.2 C: Channel 11: 2462MHz @ 802.11g)


4.7.3 801.11n HT20MHz Test Mode

A. Test Verdict


Channel	Frequency (MHz)	6 dB Bandwidth (MHz)	Refer to Plot	Limits (kHz)	Verdict
1	2412	15.97	Plot 4.7.3 A	≥500	PASS
6	2437	15.03	Plot 4.7.3 B	≥500	PASS
11	2462	16.13	Plot 4.7.3 C	≥500	PASS

Note: 1. For 802.11n HT20MHz mode at final test to get the worst-case emission at 6.5Mbps.
2.The test results including the cable loss.


B. Test Plots

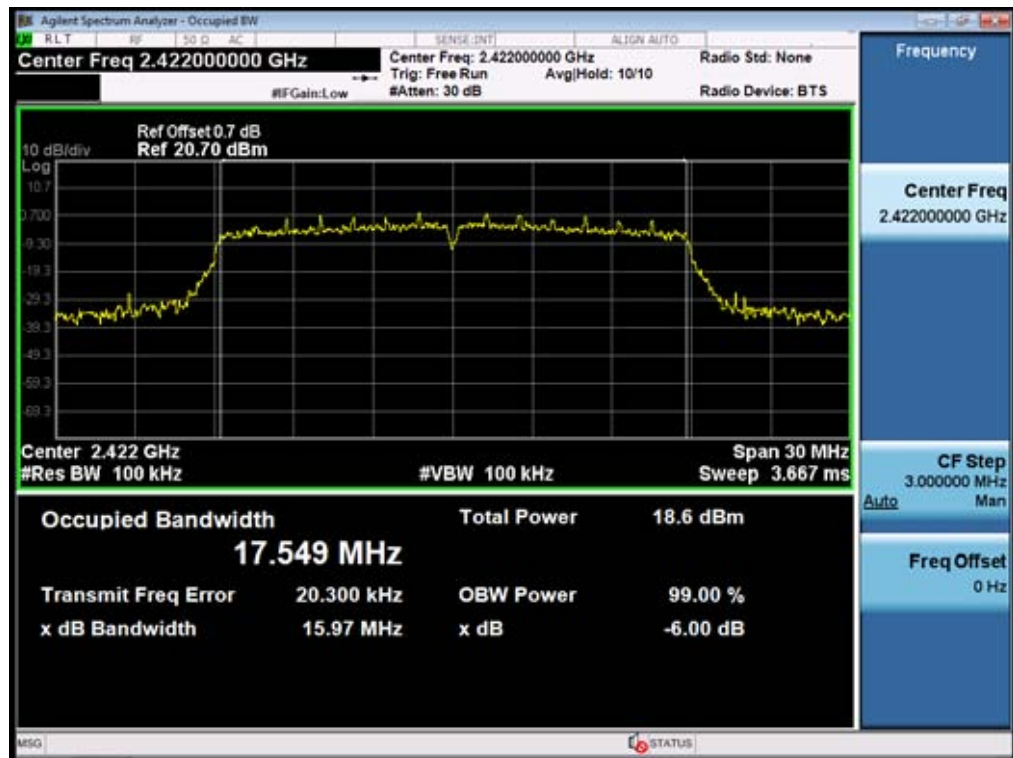

(Plot 4.7.3 A: Channel 1: 2412MHz @ 802.11n HT20)

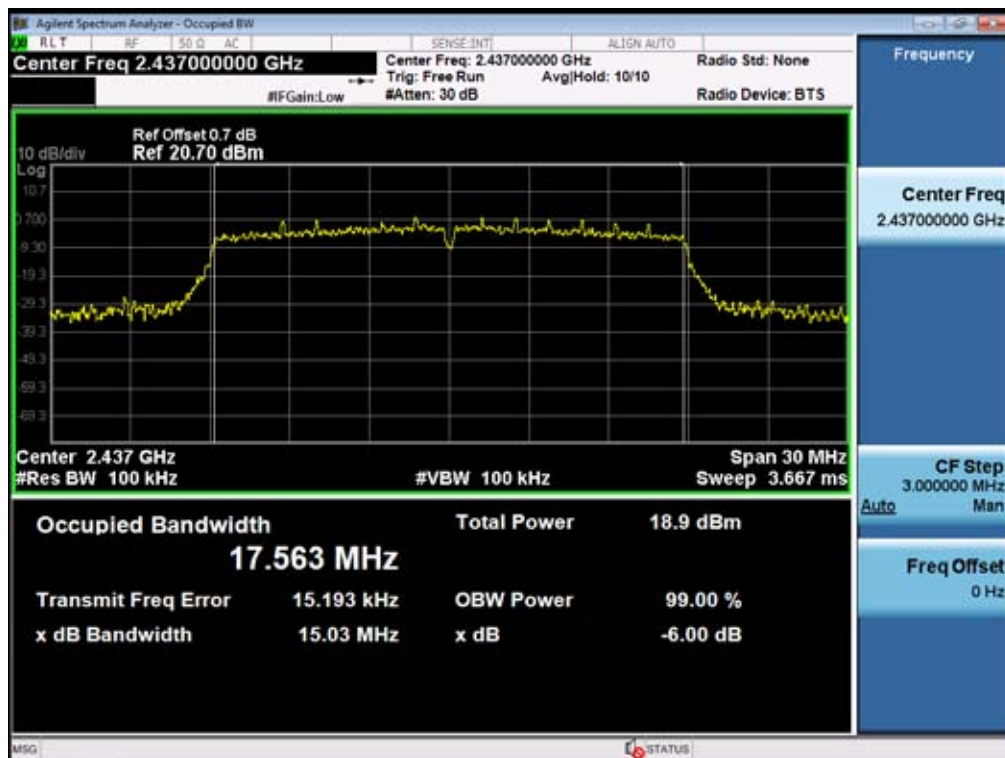

(Plot 4.7.3 B: Channel 6: 2437MHz @ 802.11n HT20)

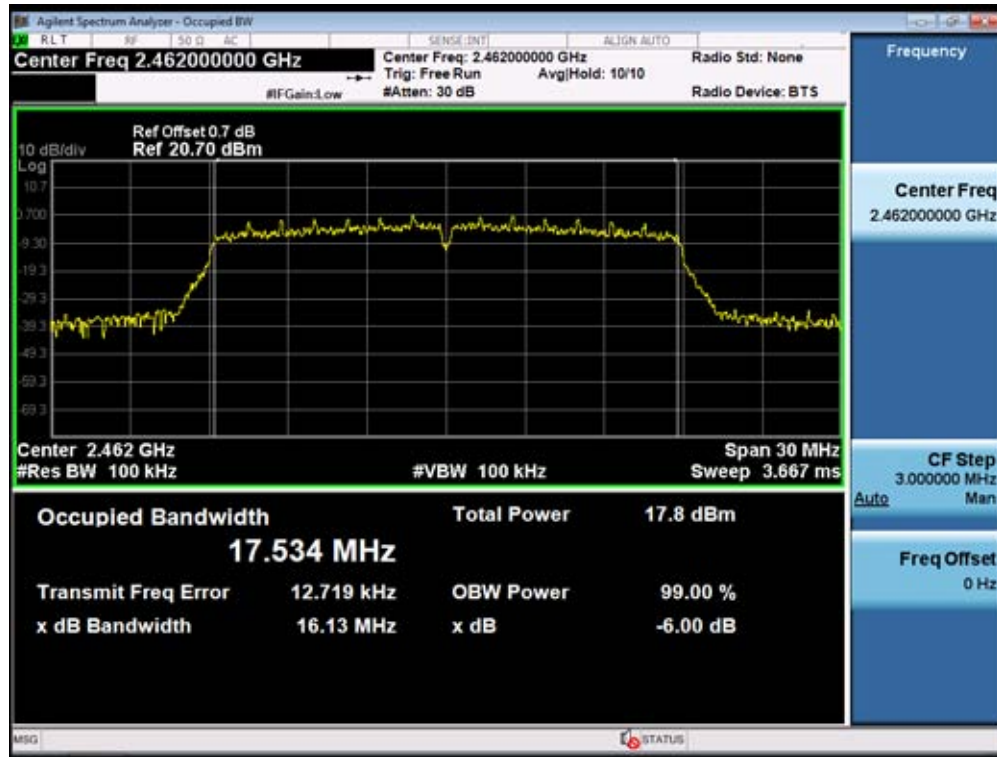

(Plot 4.7.3 C: Channel 11: 2462MHz @ 802.11n HT20MHz)


4.7.4 801.11n HT40MHz Test Mode

A. Test Verdict


Channel	Frequency (MHz)	6 dB Bandwidth (MHz)	Refer to Plot	Limits (kHz)	Verdict
3	2422	35.15	Plot 4.7.4 A	≥500	PASS
6	2437	35.22	Plot 4.7.4 B	≥500	PASS
9	2452	35.18	Plot 4.7.4 C	≥500	PASS

Note: 1. For 802.11n HT40MHz mode at final test to get the worst-case emission at 13.5Mbps.
2. The test results including the cable lose.


B. Test Plots

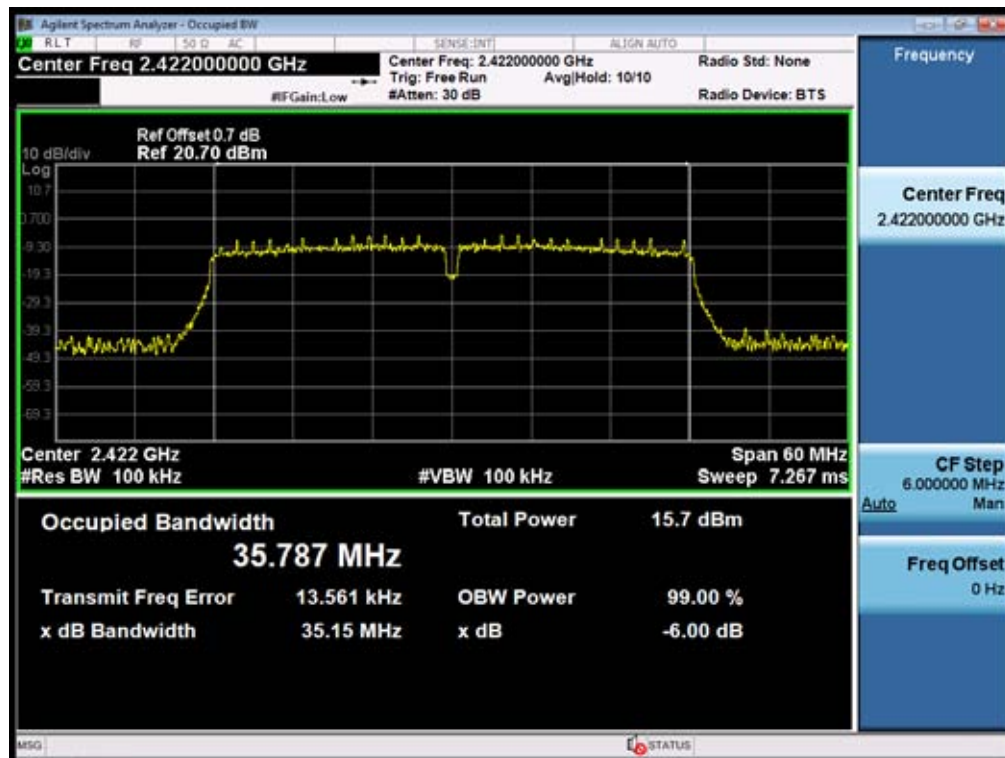

(Plot 4.7.4 A: Channel 3: 2422MHz @ 802.11n HT40MHz)

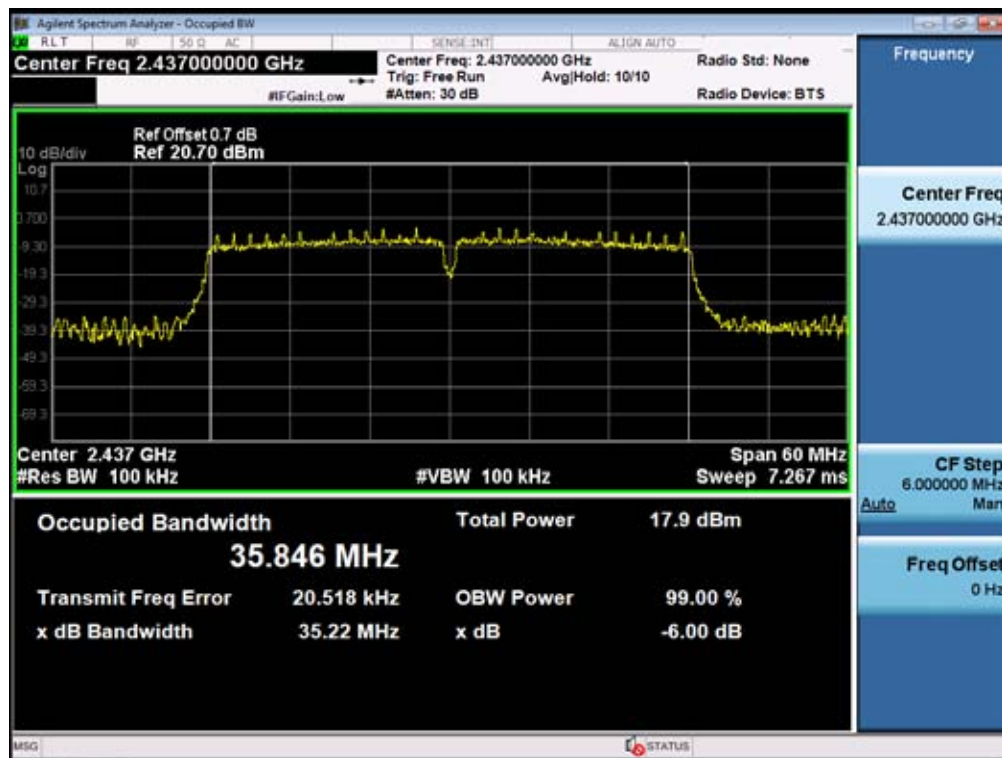

(Plot 4.7.3 B: Channel 6: 2437MHz @ 802.11n HT40MHz)

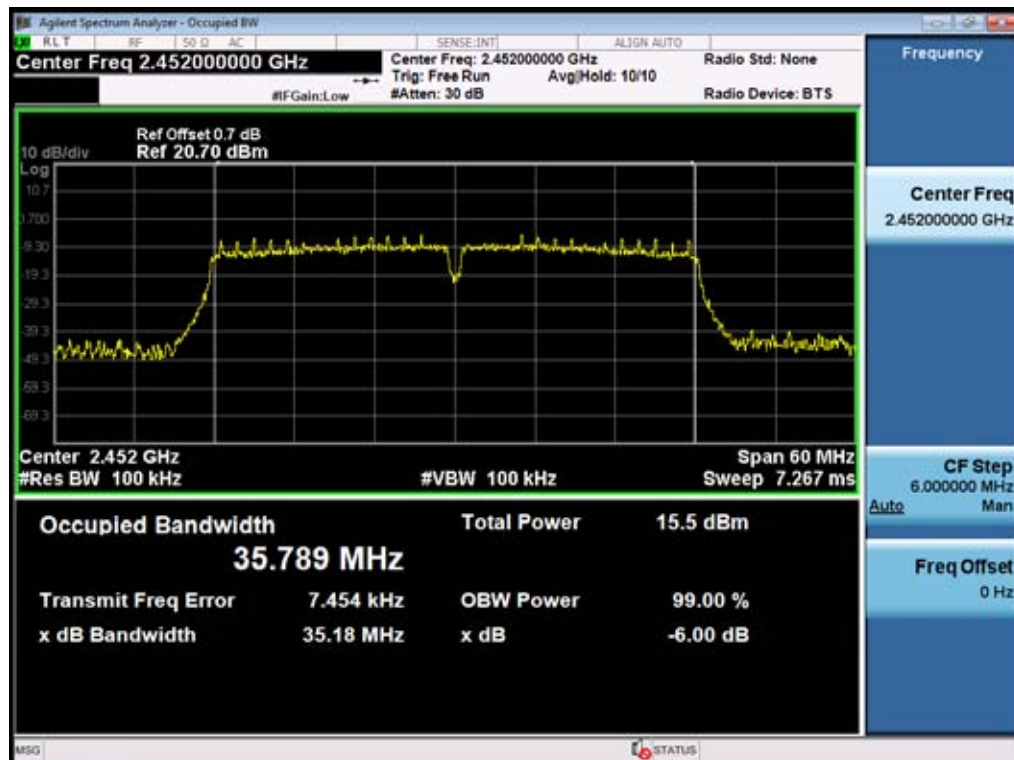

(Plot 4.7.4 C: Channel 9: 2452MHz @ 802.11n HT40MHz)

4.8. Antenna Requirement

Standard Applicable

For intentional device, according to FCC 47 CFR Section 15.203, an intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device.

And according to FCC 47 CFR Section 15.247 (c), if transmitting antennas of directional gain greater than 6dBi are used, the power shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6dBi.

Refer to statement below for compliance

The manufacturer may design the unit so that the user can replace a broken antenna, but the use of a standard antenna jack or electrical connector is prohibited. Further, this requirement does not apply to intentional radiators that must be professionally installed.

Antenna Connected Construction

The WLAN and Bluetooth sharing same antenna and the maximum antenna gain of WLAN used was 0.00 dBi

5. Test Setup Photos of the EUT



.....End of Report.....