

# M&S Accessory Network

# TEST REPORT

## SCOPE OF WORK

FCC TESTING—CC-MAK-CKT, CC-MAK-TRK, CC-MAK

## REPORT NUMBER

240826005SZN-001

## ISSUE DATE

27 September 2024

## [REVISED DATE]

[-----]

## PAGES

46

## DOCUMENT CONTROL NUMBER

FCC ID 247\_b

© 2017 INTERTEK



**M&S Accessory Network**

Application  
For  
Certification

**FCC ID: 2AFXG-MAK****Truck Speaker****Model: CC-MAK-CKT, CC-MAK-TRK, CC-MAK****2.4GHz Transceiver**

Report No.: 240826005SZN-001

We hereby certify that the sample of the above item is considered to comply with the  
requirements of FCC Part 15, Subpart C for Intentional Radiator,  
mention 47 CFR [10-1-23]

**Prepared and Checked by:****Approved by:**

**Karot Huang**  
**Assistant Engineer**

---

**Johnny Wang**  
**Project Engineer**  
**Date: 27 September 2024**

This report is for the exclusive use of Intertek's Client and is provided pursuant to the agreement between Intertek and its Client. Intertek's responsibility and liability are limited to the terms and conditions of the agreement. Intertek assumes no liability to any party, other than to the Client in accordance with the agreement, for any loss, expense or damage occasioned by the use of this report. Only the Client is authorized to permit copying or distribution of this report and then only in its entirety. Any use of the Intertek name or one of its marks for the sale or advertisement of the tested material, product or service must first be approved in writing by Intertek. The observations and test results in this report are relevant only to the sample tested. This report by itself does not imply that the material, product, or service is or has ever been under an Intertek certification program.

**Intertek Testing Service Shenzhen Ltd. Longhua Branch**

101, 201, Building B, No. 308 Wuhe Avenue, Zhangkengjing Community, GuanHu Subdistrict, LongHua District, Shenzhen.

Tel: (86 755) 8601 6288 Fax: (86 755) 8601 6751

## MEASUREMENT/TECHNICAL REPORT

This report concerns (check one:)      Original Grant ☒      Class II Change ☐

Equipment Type: DSS - Part 15 Spread Spectrum Transmitter

Deferred grant requested per 47 CFR 0.457(d)(1)(ii)?      Yes ☐      No ☒

If yes, defer until: \_\_\_\_\_  
date

Company Name agrees to notify the Commission by: \_\_\_\_\_  
date

of the intended date of announcement of the product so that the grant can be issued on that date.

Transition Rules Request per 15.37?      Yes ☐      No ☒

If no, assumed Part 15, Subpart C for intentional radiator – the new 47 CFR [10-1-23 Edition] provision.

Report prepared by:

Karot Huang  
Intertek Testing Services Shenzhen Ltd. Longhua Branch  
101, 201, Building B, No. 308 Wuhe Avenue, Zhangkengjing  
Community, GuanHu Subdistrict, LongHua District, Shenzhen.  
Tel: (86 755) 8601 6288 Fax: (86 755) 8601 6661

## Table of Contents

<b>1.0</b>	<b><u>Summary of Test Results</u></b>	<b>4</b>
<b>2.0</b>	<b><u>General Description</u></b>	<b>5</b>
2.1	Product Description	5
2.2	Related Submittal(s) Grants	5
2.3	Test Methodology	5
2.4	Test Facility	5
<b>3.0</b>	<b><u>System Test Configuration</u></b>	<b>6</b>
3.1	Justification	6
3.2	EUT Exercising Software	6
3.3	Special Accessories	6
3.4	Equipment Modification	6
3.5	Measurement Uncertainty	7
3.6	Support Equipment List and Description	7
<b>4.0</b>	<b><u>Test Results</u></b>	<b>8</b>
4.1	Radiated Test Result	8
4.1.1	Field Strength Calculation	8
4.1.2	Radiated Emission Configuration Photograph	9
4.1.3	Radiated Emission	9
4.1.4	Transmitter Spurious Emissions (Radiated)	12
4.2	Conducted Emission at Mains Terminal	16
4.2.1	Conducted Emission Configuration Photograph	16
4.2.2	Conducted Emissions	16
4.3	Peak Power	19
4.4	20dB Bandwidth	22
4.5	Channel Number (Number of Hopping Frequencies)	24
4.6	Channel Separation (Carrier Frequency Separation)	27
4.7	Dwell Time (Time of Occupancy)	29
4.8	Band Edge	35
4.9	Transmitter Spurious Emission (Conducted)	38
<b>5.0</b>	<b><u>Equipment Photographs</u></b>	<b>42</b>
<b>6.0</b>	<b><u>Product Labelling</u></b>	<b>42</b>
<b>7.0</b>	<b><u>Technical Specifications</u></b>	<b>42</b>
<b>8.0</b>	<b><u>Instruction Manual</u></b>	<b>42</b>
<b>9.0</b>	<b><u>Miscellaneous Information</u></b>	<b>43</b>
9.1	Discussion of Pulse Desensitization	43
9.2	Calculation of Average Factor	43
9.3	Emissions Test Procedures	44
<b>10.0</b>	<b><u>Test Equipment List</u></b>	<b>46</b>

## 1.0 Summary of Test Results

Applicant: M&S Accessory Network

Address: 10 West 33rd Street Suite 300 New York NY 10001 United States

Manufacturer: M&S Accessory Network

Address: 10 West 33rd Street Suite 300 New York NY 10001 United States

**Model: CC-MAK-CKT**

**FCC ID: 2AFXGG-MAK**

TEST	REFERENCE	RESULTS
Max. Output power / Max. e.i.r.p.	FCC 15.247(b)(1)	Pass
20dB Bandwidth	FCC 15.247(a)(1)	Pass
Channel Separation	FCC 15.247(a)(1)	Pass
Channel Number	FCC 15.247(a)(1) (iii)	Pass
Dwell Time	FCC 15.247(a)(1)(iii)	Pass
Out of Band Antenna Conducted Emission	FCC 15.247(d)	Pass
Radiated Emission in Restricted Bands	FCC 15.247(d), FCC 15.209, FCC 15.205	Pass
Band Edge	FCC 15.247(d), FCC 15.209, FCC 15.205	Pass
AC Conducted Emission	FCC 15.209	Pass

Notes: The EUT uses an Integral Antenna which in accordance to Section 15.203 is considered sufficient to comply with the provisions of this section.

## 2.0 General Description

### 2.1 Product Description

The equipment under test (EUT) is a Truck Speaker with Bluetooth FHSS technology operating in 2402-2480MHz. The EUT is powered by DC 5V 1A from adapter or DC 4.2V from rechargeable battery. For more detail information pls. refer to the user manual.

Bluetooth Version: 5.3

Antenna Type: Integral antenna

Antenna Gain: 1.68 dBi max (This information is provided by applicant, and the applicant is responsible for the authenticity of the provided information.)

Modulation Type: GFSK,  $\pi/4$ -DQPSK and 8-DPSK

The Model: CC-MAK-TRK, CC-MAK are the same as the Model: CC-MAK-CKT in hardware and electrical aspect. The difference in model number serves as packaging and marketing purpose only.

For electronic filing, the brief circuit description is saved with filename: descri.pdf.

### 2.2 Related Submittal(s) Grants

This is an application for certification of transceiver for the Truck Speaker which has Bluetooth function. Other digital functions were reported in the verification report: 240826005SZN-002.

### 2.3 Test Methodology

Both AC mains line-conducted and radiated emission measurements were performed according to the procedures in ANSI C63.10 (2013). Radiated emission measurement was performed in semi-anechoic chamber and conducted emission measurement was performed in shield room. For radiated emission measurement, preliminary scans were performed in the semi-anechoic chamber only to determine the worst case modes. All radiated tests were performed at an antenna to EUT distance of 3 meters, unless stated otherwise in the "**Justification Section**" of this Application.

### 2.4 Test Facility

The Semi-anechoic chamber and shielding room used to collect the radiated data and conducted data are **Intertek Testing Services Shenzhen Ltd. Longhua Branch** and located at 101, 201, Building B, No. 308 Wuhe Avenue, Zhangkengjing Community, GuanHu Subdistrict, LongHua District, Shenzhen. This test facility and site measurement data have been fully placed on file with File Number: CN1188.

### 3.0 System Test Configuration

#### 3.1 Justification

The system was configured for testing in a typical fashion (as a customer would normally use it), and in the confines as outlined in ANSI C63.10 (2013).

The EUT was powered by DC 5V 1A from adapter during the test.

All packets DH1, DH3 & DH5 mode in modulation type GFSK,  $\pi/4$ -DQPSK and 8-DPSK were tested and only the worst data was reported in this report.

For maximizing emissions below 30 MHz, the EUT was rotated through 360°, the bottom of the loop antenna was placed 1 meter above the ground, and the antenna polarization was changed. For maximizing emissions, the EUT was rotated through 360°, the antenna height was varied from 1 meter to 4 meters above the ground plane, and the antenna polarization was changed. This step by step procedure for maximizing emissions led to the data reported in Section 4.

The EUT and transmitting antenna was centered on the turntable.

The equipment under test (EUT) was configured for testing in a typical fashion (as a customer would normally use it). The EUT was placed on a turn table, which enabled the engineer to maximize emissions through its placement in the three orthogonal axes.

#### 3.2 EUT Exercising Software

The EUT exercise program (provided by client) used during radiated and conducted testing was designed to exercise the various system components in a manner similar to a typical use. The worst-case configuration is used in all specified testing.

The parameters of test software setting:

During the test, Channel and power controlling software provided by the applicant was used to control the operating channel as well as the output power level. The RF output power selection is for the setting of RF output power expected by the application and is going to be fixed on the firmware of the end product.

Test Software: FCC\_assist1.0.4.exe

#### 3.3 Special Accessories

No special accessory attached.

#### 3.4 Equipment Modification

Any modifications installed previous to testing by M&S Accessory Network will be incorporated in each production model sold / leased in the United States.

No modifications were installed by Intertek Testing Services Shenzhen Ltd. Longhua Branch.

### 3.5 Measurement Uncertainty

When determining the test conclusion, the Measurement Uncertainty of test has been considered.

### 3.6 Support Equipment List and Description

Description	Manufacturer	Model No.
Laptop (Provided by Intertek)	DELL	Latitude 3480
Smartphone (Provided by Intertek)	Honor	FRD-AL10
Smartphone (Provided by Intertek)	Samsung	SM-G9300
Adapter (Provided by Intertek)	Xiaomi	Input: 100-240V~ 50/60Hz Output: 5Vdc 1A
USB Cable (Provided by Client)	N/A	Unshielded, Length 0.5m
USB Memory (Provided by Intertek)	SanDisk	SDCZ36-002G-P36
TF Card (Provided by Intertek)	SanDisk	TC58-6D2H-HA61



## 4.0 Test Results

Data is included worst-case configuration (the configuration which resulted in the highest emission levels).

### 4.1 Radiated Test Results

A sample calculation, configuration photographs and data tables of the emissions are included.

#### 4.1.1 Field Strength Calculation

The field strength is calculated by adding the reading on the Spectrum Analyzer to the factors associated with preamplifiers (if any), antennas, cables, pulse desensitization and average factors (when specified limit is in average and measurements are made with peak detectors). A sample calculation is included below.

$$FS = RA + AF + CF - AG + PD + AV$$

Where

- FS = Field Strength in dB $\mu$ V/m
- RA = Receiver Amplitude (including preamplifier) in dB $\mu$ V
- CF = Cable Attenuation Factor in dB
- AF = Antenna Factor in dB/m
- AG = Amplifier Gain in dB
- PD = Pulse Desensitization in dB
- AV = Average Factor in -dB

In the radiated emission table which follows, the reading shown on the data table may reflect the preamplifier gain. An example of the calculations, where the reading does not reflect the preamplifier gain, follows:

$$FS = RA + AF + CF - AG + PD + AV$$

Assume a receiver reading of 62.0 dB $\mu$ V is obtained. The antenna factor of 7.4 dB/m and cable factor of 1.6 dB is added. The amplifier gain of 29 dB is subtracted. The pulse desensitization factor of the spectrum analyzer was 0 dB, and the resultant average factor was -10 dB. The net field strength for comparison to the appropriate emission limit is 32 dB $\mu$ V/m. This value in dB $\mu$ V/m was converted to its corresponding level in  $\mu$ V/m.

RA = 62.0 dB $\mu$ V  
 AF = 7.4 dB/m  
 CF = 1.6 dB  
 AG = 29.0 dB  
 PD = 0 dB  
 AV = -10 dB

$FS = 62 + 7.4 + 1.6 - 29 + 0 + (-10) = 32 \text{ dB}\mu\text{V/m}$   
 Level in  $\mu\text{V/m}$  = Common Antilogarithm  $[(32 \text{ dB}\mu\text{V/m})/20] = 39.8 \mu\text{V/m}$

#### 4.1.2 Radiated Emission Configuration Photograph

For electronic filing, the worst case radiated emission configuration photograph is saved with filename: radiated photos. pdf.

#### 4.1.3 Radiated Emissions- FCC section 15.209

The data on the following page lists the significant emission frequencies, the limit and the margin of compliance. Numbers with a minus sign are below the limit.

Worst Case Radiated Emission

at 275.992000 MHz

Judgement: Passed by 7.7 dB

#### **TEST PERSONNEL:**

*Sign on file*

Karot Huang, Assistant Engineer  
*Typed/Printed Name*

September 12, 2024  
*Date*

Applicant: M&S Accessory Network

Date of Test: September 12, 2024


Model:CC-MAK-CKT

Sample: 1/1

Worst-case operating Mode: BT link

Modulation type: GFSK

ANT Polarity: Horizontal

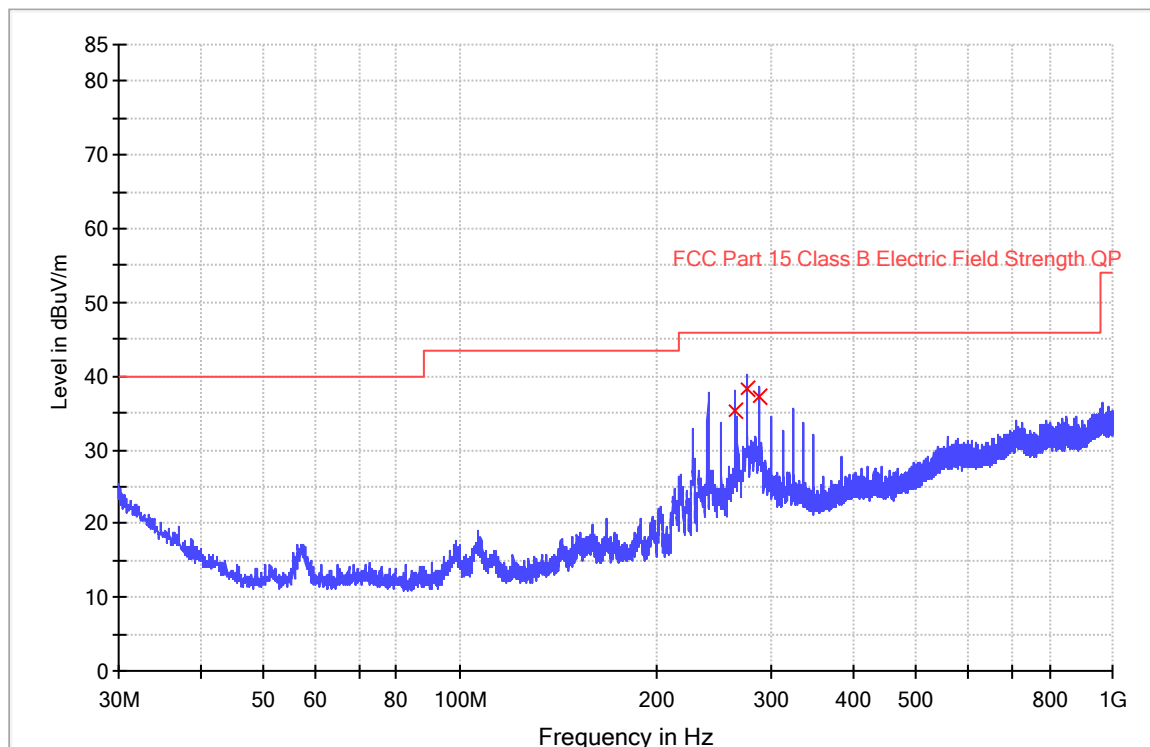

Frequency (MHz)	Quasi Peak (dBμV/m)	Meas. Time (ms)	Bandwidth (kHz)	Polarization	Corr. (dB/m)	Margin - QPK (dB)	Limit - QPK (dBμV/m)
263.996333	35.2	1000.0	120.000	H	19.7	10.8	46.0
275.992000	38.3	1000.0	120.000	H	19.9	7.7	46.0
287.987667	37.3	1000.0	120.000	H	20.0	8.7	46.0

Remark:

1. Corr. (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB)
2. Quasi Peak (dBμV/m) = Corr. (dB/m) + Read Level (dBμV)
3. Margin (dB) = Limit Line (dBμV/m) – Level (dBμV/m)

Applicant: M&S Accessory Network

Date of Test: September 12, 2024


Model: CC-MAK-CKT

Sample: 1/1

Worst-case operating Mode: BT link

Modulation type: GFSK

ANT Polarity: Vertical

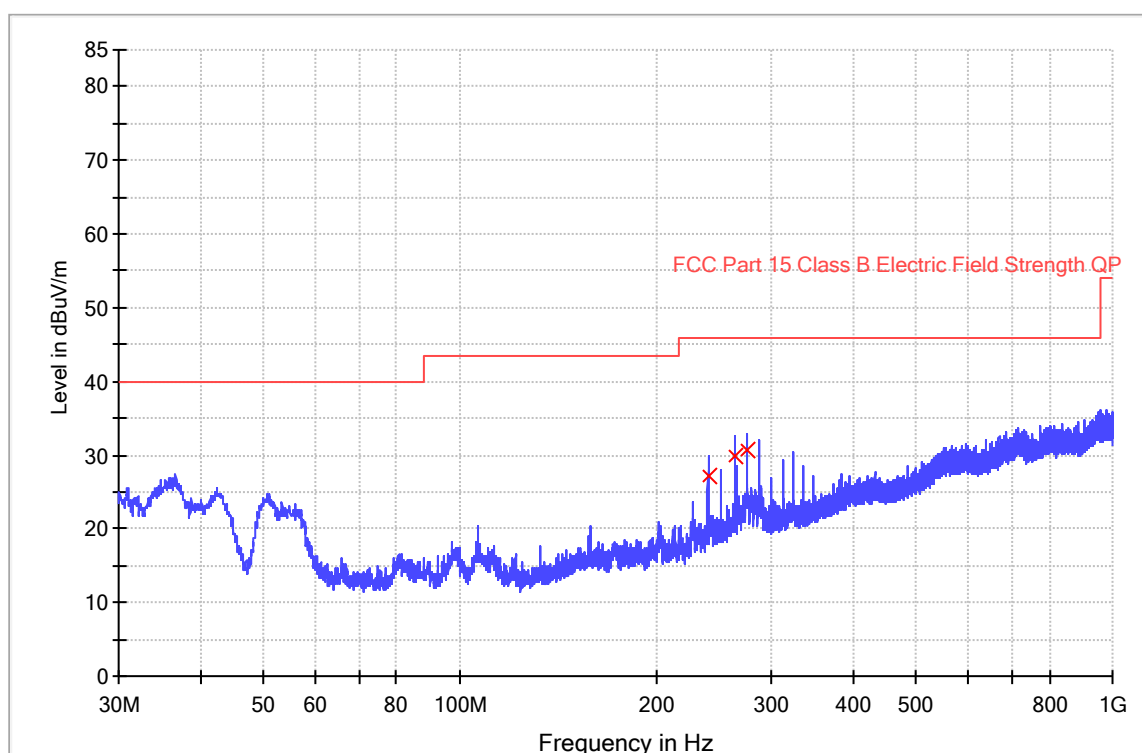

Frequency (MHz)	Quasi Peak (dBμV/m)	Meas. Time (ms)	Bandwidth (kHz)	Polarization	Corr. (dB/m)	Margin - QPK (dB)	Limit - QPK (dBμV/m)
239.972667	27.2	1000.0	120.000	V	18.7	18.8	46.0
263.996333	29.9	1000.0	120.000	V	19.7	16.1	46.0
275.992000	30.8	1000.0	120.000	V	19.9	15.2	46.0

Remark:

1. Corr. (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB)
2. Quasi Peak (dBμV/m) = Corr. (dB/m) + Read Level (dBμV)
3. Margin (dB) = Limit Line (dBμV/m) – Level (dBμV/m)

#### 4.1.4 Transmitter Spurious Emissions (Radiated) - FCC section 15.209

The data on the following page lists the significant emission frequencies, the limit and the margin of compliance. Numbers with a minus sign are below the limit.

Worst Case Radiated Emission

at 7440.000 MHz

Judgement: Passed by 24.1 dB

**TEST PERSONNEL:**

*Sign on file*

Karot Huang, Assistant Engineer  
*Typed/Printed Name*

September 12, 2024  
*Date*

Applicant: M&S Accessory Network  
Date of Test: September 12, 2024  
Model: CC-MAK-CKT  
Sample: 1/1  
Worst-case operating Mode: Transmit (2402MHz)  
Modulation type: GFSK

Table 1

**Radiated Emissions**

(2402MHz)

Polarization	Frequency (MHz)	Reading (dBμV)	Pre-Amp Gain (dB)	Antenna Factor (dB/m)	Net at 3m (dBμV/m)	Peak Limit at 3m (dBμV/m)	Margin (dB)
Horizontal	**2402.000	93.8	33.1	27.4	88.1	--	--
Horizontal	*4804.000	41.4	30.6	32.7	43.5	74.0	-30.5

Polarization	Frequency (MHz)	Reading (dBμV)	Pre-Amp Gain (dB)	Antenna Factor (dB/m)	Average Factor (-dB)	Net at 3m (dBμV/m)	Average Limit at 3m (dBμV/m)	Margin (dB)
Horizontal	**2402.000	93.8	33.1	27.4	22.5	65.6	--	--
Horizontal	*4804.000	41.4	30.6	32.7	22.5	21.0	54.0	-33.0

- NOTES:
1. Peak detector is used for the emission measurement.
  2. All measurements were made at 3 meters. Radiated emissions not detected at the 3-meter distance were measured at 0.3-meter and an inverse proportional extrapolation was performed to compare the signal level to the 3-meter limit. No other radiated emissions than those reported were detected at a test distance of 0.3-meter.
  3. Negative value in the margin column shows emission below limit.
  4. Horn antenna used for the emission over 1000MHz.
- \* Emission within the restricted band meets the requirement of section 15.205. The corresponding limit as per 15.209 is based on Quasi peak limit for frequencies below 1000 MHz and average limit for frequencies over 1000 MHz. The radio frequency emissions above 1GHz also meet corresponding 20dB permitted peak limit with a peak detector function.
- \*\* Fundamental emission was measured for determining band-edge compliance of using delta measurement technique.

Applicant: M&S Accessory Network  
Date of Test: September 12, 2024  
Model: CC-MAK-CKT  
Sample: 1/1  
Worst-case operating Mode: Transmit (2441MHz)  
Modulation type: GFSK

Table 2

**Radiated Emissions**

(2441MHz)

Polarization	Frequency (MHz)	Reading (dBμV)	Pre-Amp Gain (dB)	Antenna Factor (dB/m)	Net at 3m (dBμV/m)	Peak Limit at 3m (dBμV/m)	Margin (dB)
Horizontal	*4882.000	38.1	30.5	32.9	40.5	74.0	-33.5
Horizontal	*7323.000	42.4	30.9	37.3	48.8	74.0	-25.2

Polarization	Frequency (MHz)	Reading (dBμV)	Pre-Amp Gain (dB)	Antenna Factor (dB/m)	Average Factor (-dB)	Net at 3m (dBμV/m)	Average Limit at 3m (dBμV/m)	Margin (dB)
Horizontal	*4882.000	38.1	30.5	32.9	22.5	18.0	54.0	-36.0
Horizontal	*7323.000	42.4	30.9	37.3	22.5	26.3	54.0	-27.7

- NOTES:
1. Peak detector is used for the emission measurement.
  2. All measurements were made at 3 meters. Radiated emissions not detected at the 3-meter distance were measured at 0.3-meter and an inverse proportional extrapolation was performed to compare the signal level to the 3-meter limit. No other radiated emissions than those reported were detected at a test distance of 0.3-meter.
  3. Negative value in the margin column shows emission below limit.
  4. Horn antenna used for the emission over 1000MHz.
- \* Emission within the restricted band meets the requirement of section 15.205. The corresponding limit as per 15.209 is based on Quasi peak limit for frequencies below 1000 MHz and average limit for frequencies over 1000 MHz. The radio frequency emissions above 1GHz also meet corresponding 20dB permitted peak limit with a peak detector function.

Applicant: M&S Accessory Network  
Date of Test: September 12, 2024  
Model: CC-MAK-CKT  
Sample: 1/1  
Worst-case operating Mode: Transmit (2480MHz)  
Modulation type: GFSK

Table 3

**Radiated Emissions**

(2480MHz)

Polarization	Frequency (MHz)	Reading (dBμV)	Pre-Amp Gain (dB)	Antenna Factor (dB/m)	Net at 3m (dBμV/m)	Peak Limit at 3m (dBμV/m)	Margin (dB)
Horizontal	**2480.000	95.4	33.1	27.8	90.1	--	--
Horizontal	*4960.000	42.2	30.5	32.9	44.6	74.0	-29.4
Horizontal	*7440.000	43.5	30.9	37.3	49.9	74.0	-24.1

Polarization	Frequency (MHz)	Reading (dBμV)	Pre-Amp Gain (dB)	Antenna Factor (dB/m)	Average Factor (-dB)	Net at 3m (dBμV/m)	Average Limit at 3m (dBμV/m)	Margin (dB)
Horizontal	**2480.000	95.4	33.1	27.8	22.5	67.6	--	--
Horizontal	*4960.000	42.2	30.5	32.9	22.5	22.1	54.0	-31.9
Horizontal	*7440.000	43.5	30.9	37.3	22.5	27.4	54.0	-26.6

- NOTES:
1. Peak detector is used for the emission measurement.
  2. All measurements were made at 3 meters. Radiated emissions not detected at the 3-meter distance were measured at 0.3-meter and an inverse proportional extrapolation was performed to compare the signal level to the 3-meter limit. No other radiated emissions than those reported were detected at a test distance of 0.3-meter.
  3. Negative value in the margin column shows emission below limit.
  4. Horn antenna used for the emission over 1000MHz.
- \* Emission within the restricted band meets the requirement of section 15.205. The corresponding limit as per 15.209 is based on Quasi peak limit for frequencies below 1000 MHz and average limit for frequencies over 1000 MHz. The radio frequency emissions above 1GHz also meet corresponding 20dB permitted peak limit with a peak detector function.
- \*\* Fundamental emission was measured for determining band-edge compliance of using delta measurement technique.



## 4.2 Conducted Emission at Mains Terminal

### 4.2.1 Conducted Emissions Configuration Photograph

For electronic filing, the worst case conducted emission configuration photograph is saved with filename: conducted photos.pdf.

### 4.2.2 Conducted Emissions

Worst Case Conducted Configuration

at 0.550000 MHz

Judgement: Passed by 21.2 dB margin

#### **TEST PERSONNEL:**

*Sign on file*

Karot Huang, Assistant Engineer  
*Typed/Printed Name*

September 12, 2024  
*Date*

Applicant: M&S Accessory Network

Date of Test: September 12, 2024

Model: CC-MAK-CKT


Sample: 1/1

Worst-case operating Mode: BT Link

Modulation type: GFSK

Phase: Live

## Conducted Emission Test - FCC

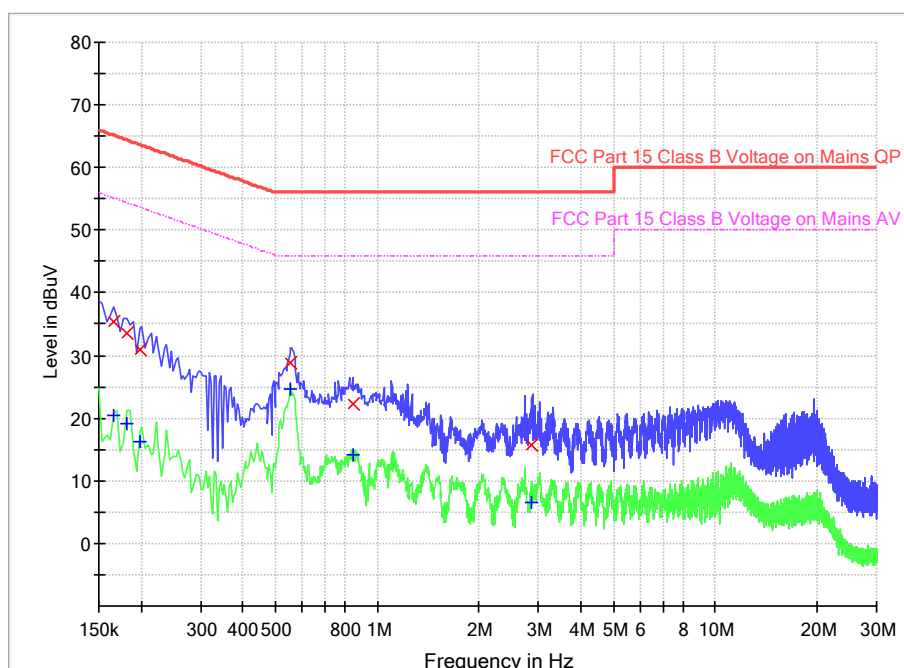

## Result Table QP

Frequency (MHz)	Quasi Peak (dBμV)	Bandwidth (kHz)	Line	Corr. (dB)	Margin (dB)	Limit (dBμV)
0.166000	35.5	9.000	L1	9.6	29.7	65.2
0.182000	33.5	9.000	L1	9.6	30.9	64.4
0.198000	30.9	9.000	L1	9.6	32.8	63.7
0.550000	28.8	9.000	L1	9.6	27.2	56.0
0.846000	22.3	9.000	L1	9.6	33.7	56.0
2.850000	15.7	9.000	L1	9.7	40.3	56.0

## Result Table AV

Frequency (MHz)	Average (dBμV)	Bandwidth (kHz)	Line	Corr. (dB)	Margin (dB)	Limit (dBμV)
0.166000	20.4	9.000	L1	9.6	34.8	55.2
0.182000	19.1	9.000	L1	9.6	35.3	54.4
0.198000	16.4	9.000	L1	9.6	37.3	53.7
0.550000	24.8	9.000	L1	9.6	21.2	46.0
0.846000	14.1	9.000	L1	9.6	31.9	46.0
2.850000	6.6	9.000	L1	9.7	39.4	46.0

Applicant: M&S Accessory Network

Date of Test: September 12, 2024

Model: CC-MAK-CKT


Sample: 1/1

Worst-case operating Mode: BT Link

Modulation type: GFSK

Phase: Neutral

## Conducted Emission Test - FCC

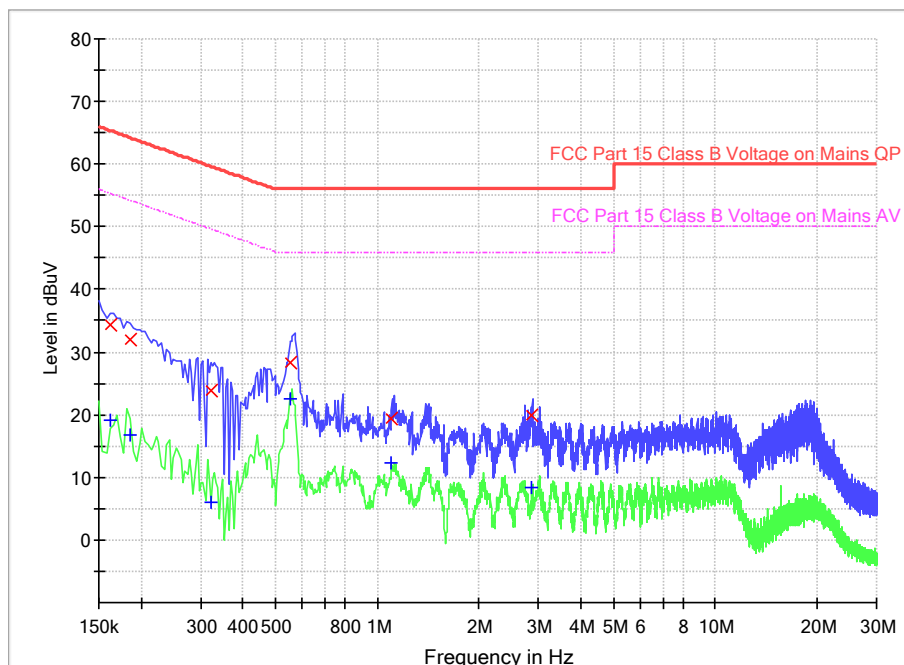

## Result Table QP

Frequency (MHz)	Quasi Peak (dBμV)	Bandwidth (kHz)	Line	Corr. (dB)	Margin (dB)	Limit (dBμV)
0.162000	34.4	9.000	N	9.6	31.0	65.4
0.186000	32.1	9.000	N	9.6	32.1	64.2
0.322000	23.7	9.000	N	9.6	36.0	59.7
0.554000	28.3	9.000	N	9.6	27.7	56.0
1.102000	19.5	9.000	N	9.6	36.5	56.0
2.862000	19.9	9.000	N	9.7	36.1	56.0

## Result Table AV

Frequency (MHz)	Average (dBμV)	Bandwidth (kHz)	Line	Corr. (dB)	Margin (dB)	Limit (dBμV)
0.162000	19.2	9.000	N	9.6	36.2	55.4
0.186000	16.9	9.000	N	9.6	37.3	54.2
0.322000	6.0	9.000	N	9.6	43.7	49.7
0.554000	22.7	9.000	N	9.6	23.3	46.0
1.102000	12.3	9.000	N	9.6	33.7	46.0
2.862000	8.4	9.000	N	9.7	37.6	46.0

Applicant: M&S Accessory Network

Date of Test: August 29, 2024

Model: CC-MAK-CKT

#### 4.3 Peak Power

Maximum Conducted Output Power at Antenna Terminals, FCC Rules 15.247(b)(1).

The antenna port of the EUT was connected to the input of a spectrum analyzer. The analyzer was set for RBW > 20dB bandwidth and power was read directly in dBm.

For antenna with gains of 6dBi or less, and frequency hopping systems operating in the 2400–2483.5 MHz band may have hopping channel carrier frequencies that are separated by 25 kHz or two-thirds of the 20 dB bandwidth of the hopping channel, whichever is greater, the systems operate with an output power no greater than 125 mW.

Antenna Gain = 1.68dBi max			
Modulation Type	Frequency (MHz)	Output Power (Peak Reading) (dBm)	Output Power (mW)
GFSK	2402	0.30	1.072
	2441	-0.65	0.861
	2480	-1.46	0.714


Cable loss: 0.5 dB    External Attenuation: 0 dB

Cable loss, external attenuation has been included in OFFSET function.


For RF Exposure, the information is saved with filename: RF exposure.pdf.

Modulation Type: GFSK


CH00

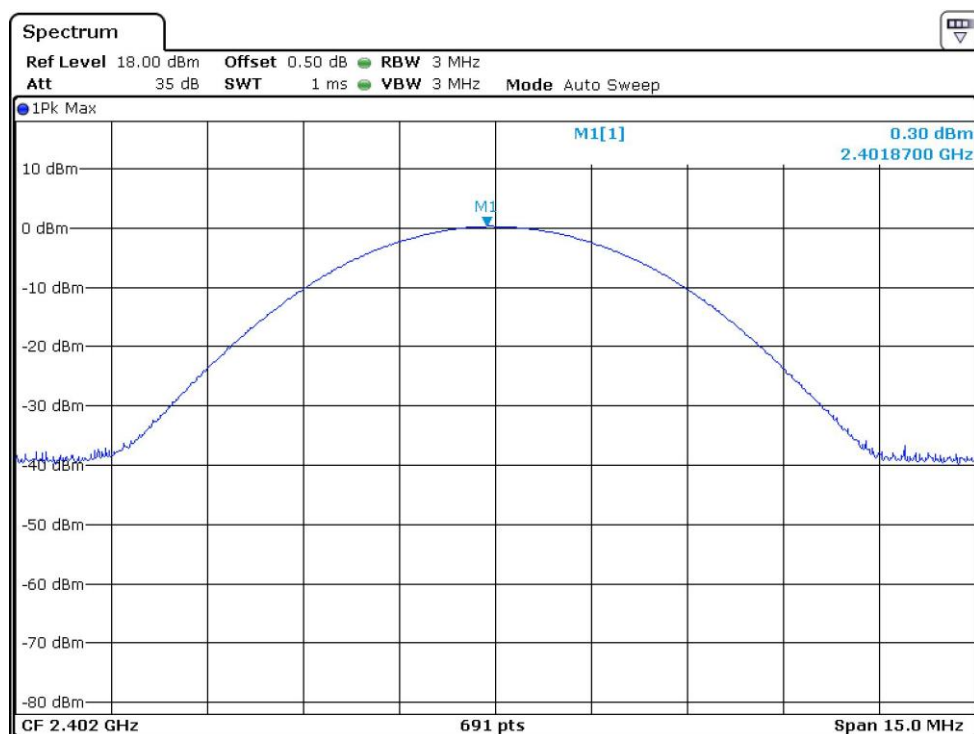

CH39

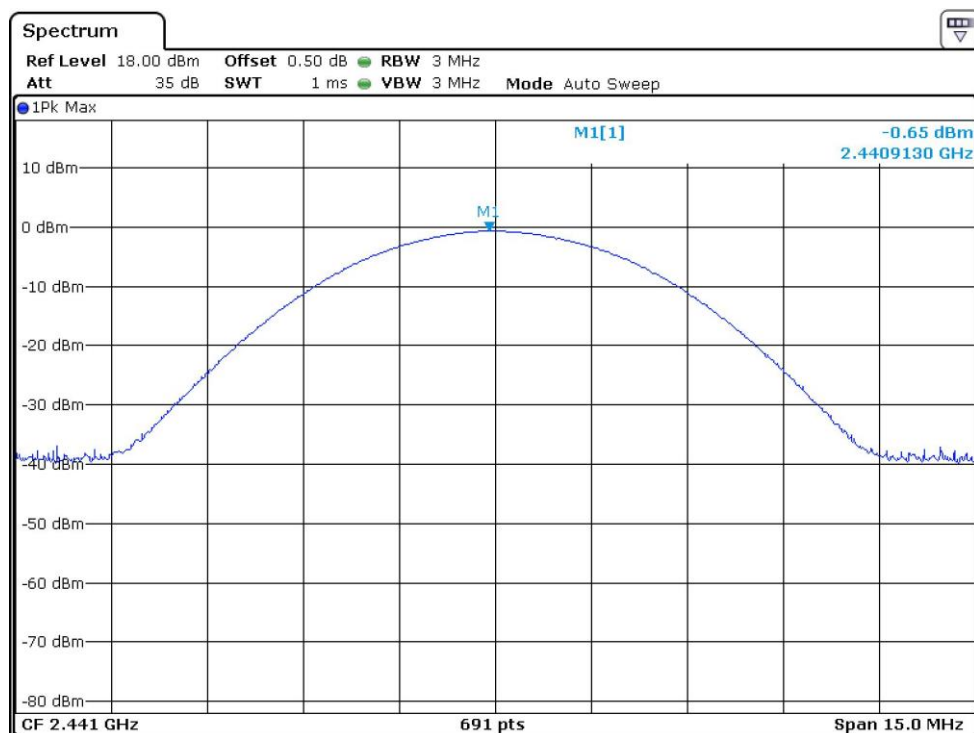

CH78

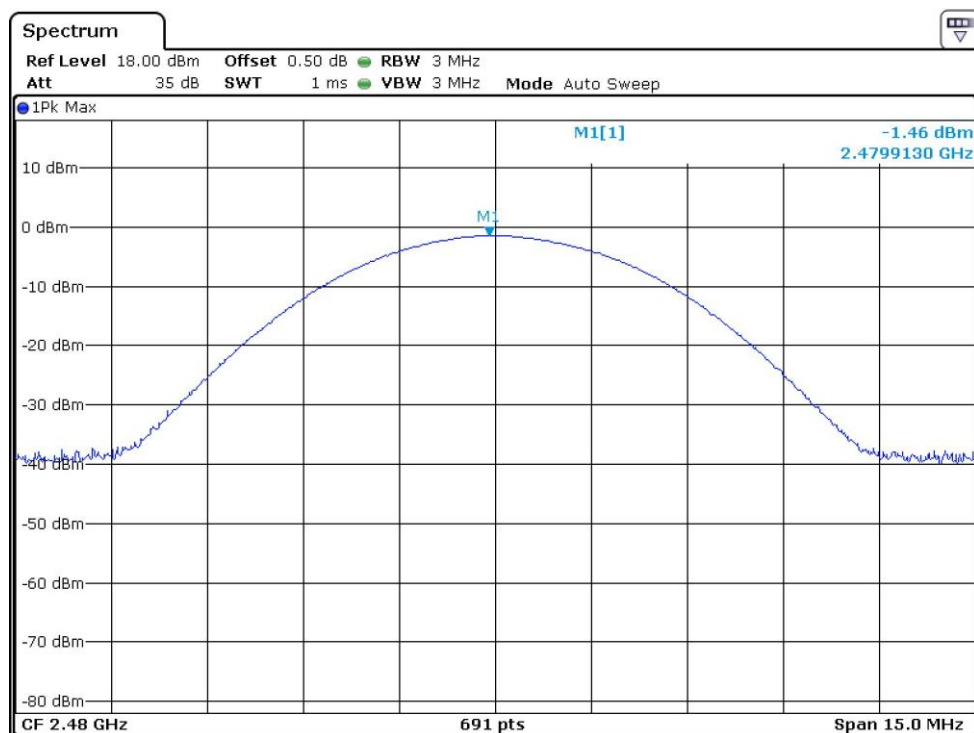

Applicant: M&S Accessory Network

Date of Test: August 29, 2024

Model: CC-MAK-CKT

## 4.4 20dB Bandwidth


Maximum 20dB RF Bandwidth, FCC Rule 15.247(a) (1):

The antenna port of the EUT was connected to the input of a spectrum analyzer. Analyzer RBW was chosen so that the display was a result of the hopping channel modulation. For each RF output channel investigated, the spectrum analyzer center frequency was set to the channel carrier. Use the spectrum 20dB down delta function to measure the bandwidth.


Frequency (MHz)	20 dB Bandwidth (MHz)
2402	1.303
2441	1.298
2480	1.289

Modulation Type: 8DPSK


CH00

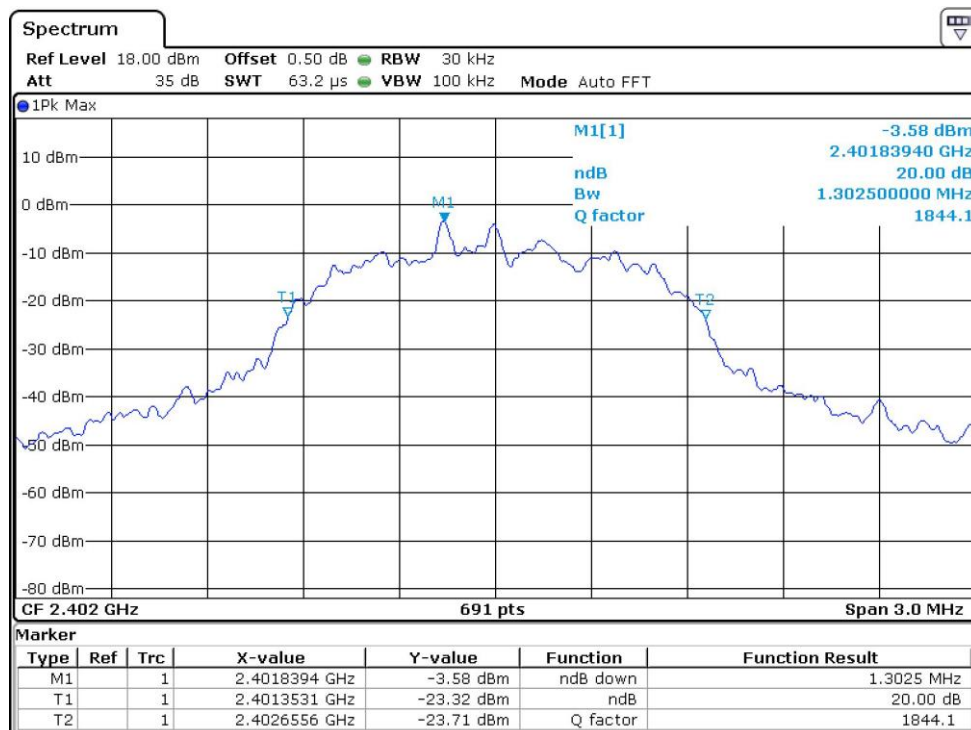

CH39

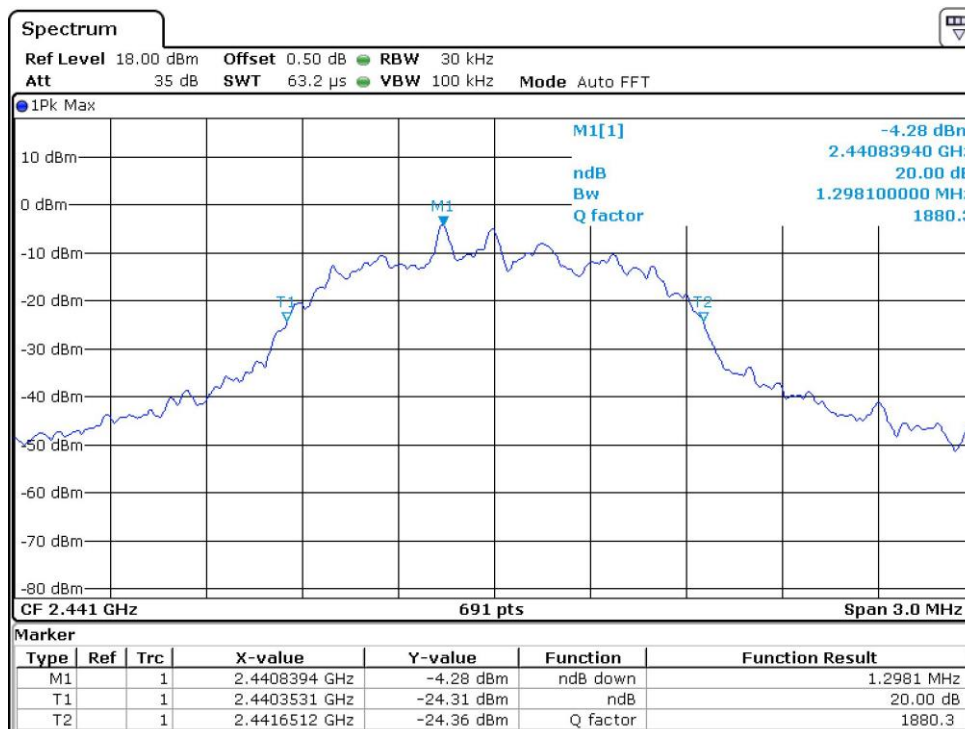

CH78

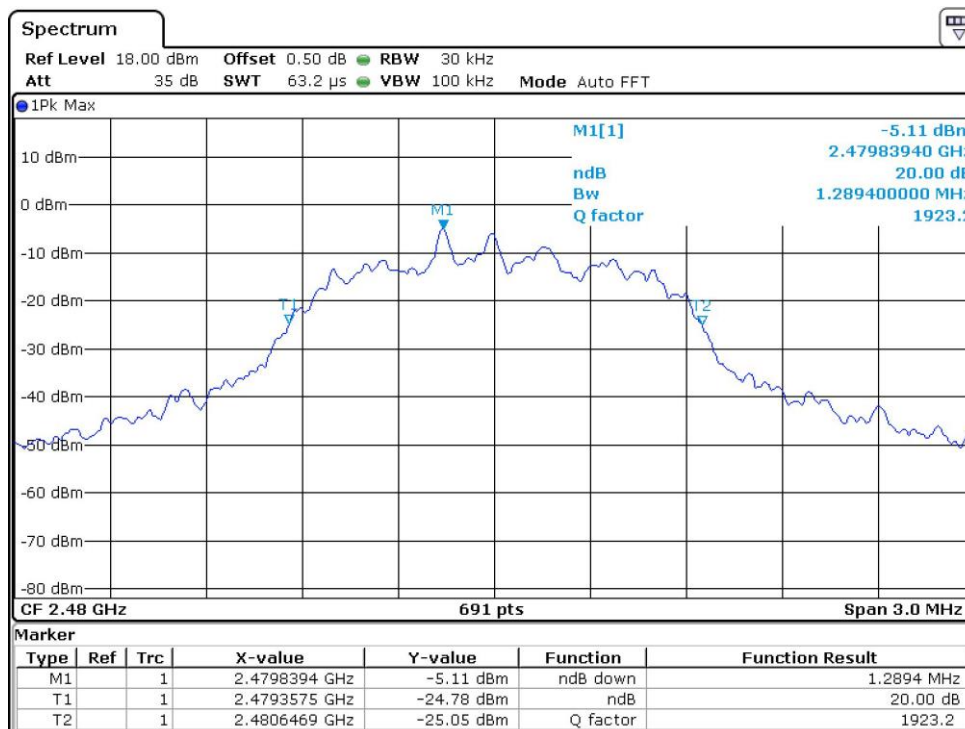



Applicant: M&S Accessory Network

Date of Test: August 29, 2024

Model: CC-MAK-CKT

## 4.5 Channel Number (Number of Hopping Frequencies)

Minimum Number of Hopping Frequencies, FCC Rule 15.247(a) (1) (iii):

The RF passband of the EUT was divided into 3 approximately equal bands. With the analyzer set to MAX HOLD readings were taken for 2-3 minutes. The channel peaks so recorded were added together, and the total number compared to the minimum number of channels required in the regulation.


Number of hopping channels =

79


Note: In AFH mode, this device operates using 20 channels and it's satisfied the requirement of limit of minimum of 15 hopping channels.

Modulation Type: GFSK


CH00-CH78

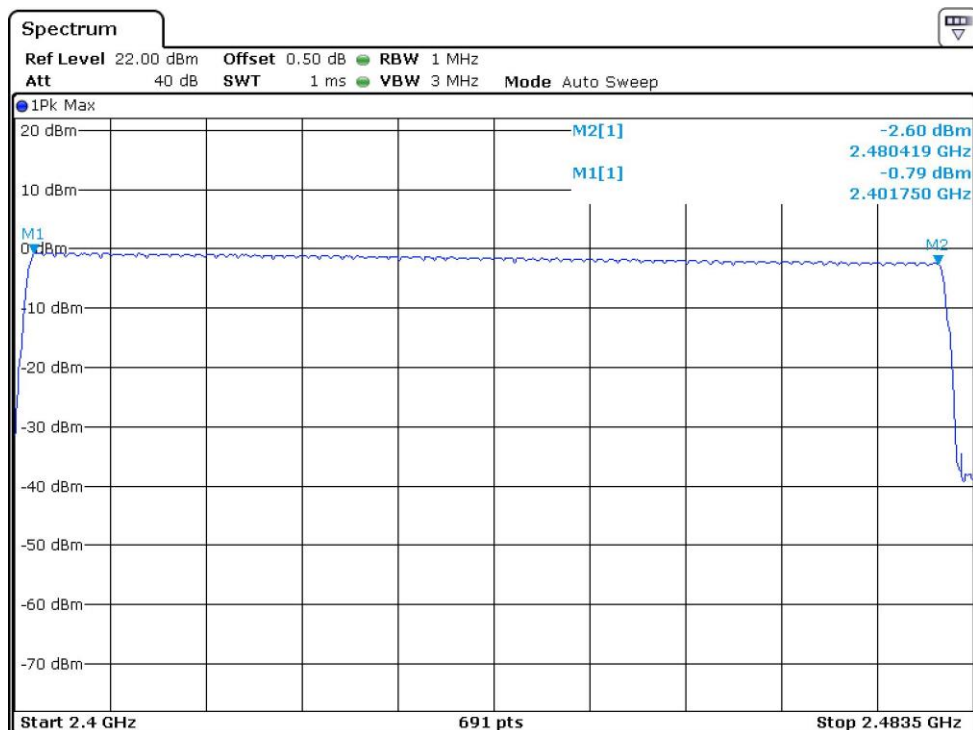


## CH00-CH24

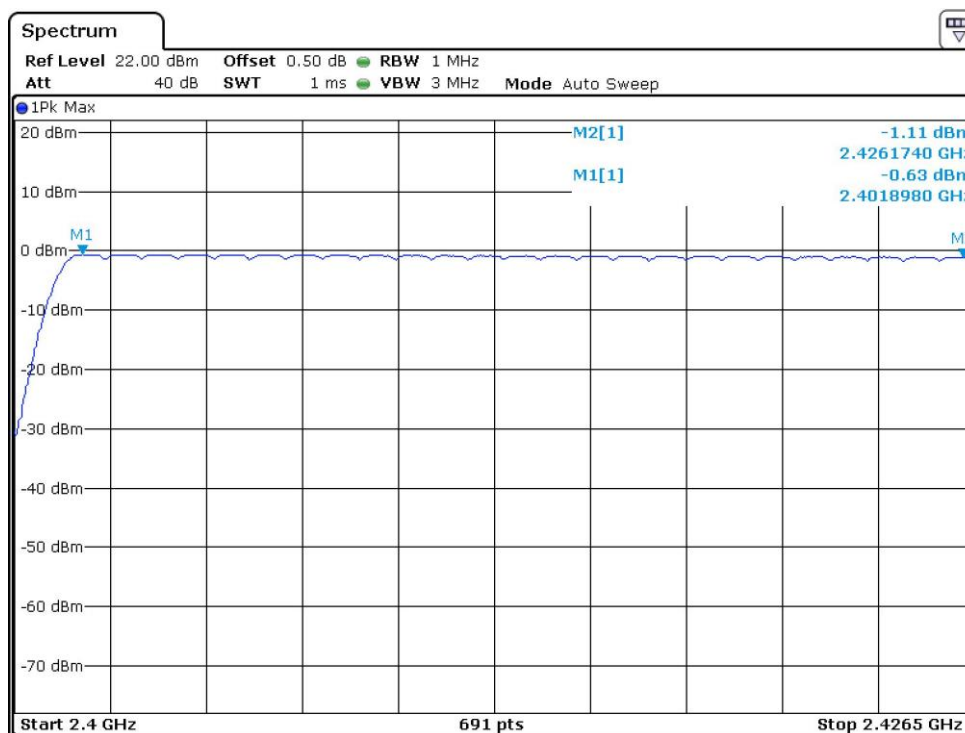

## CH25-CH52

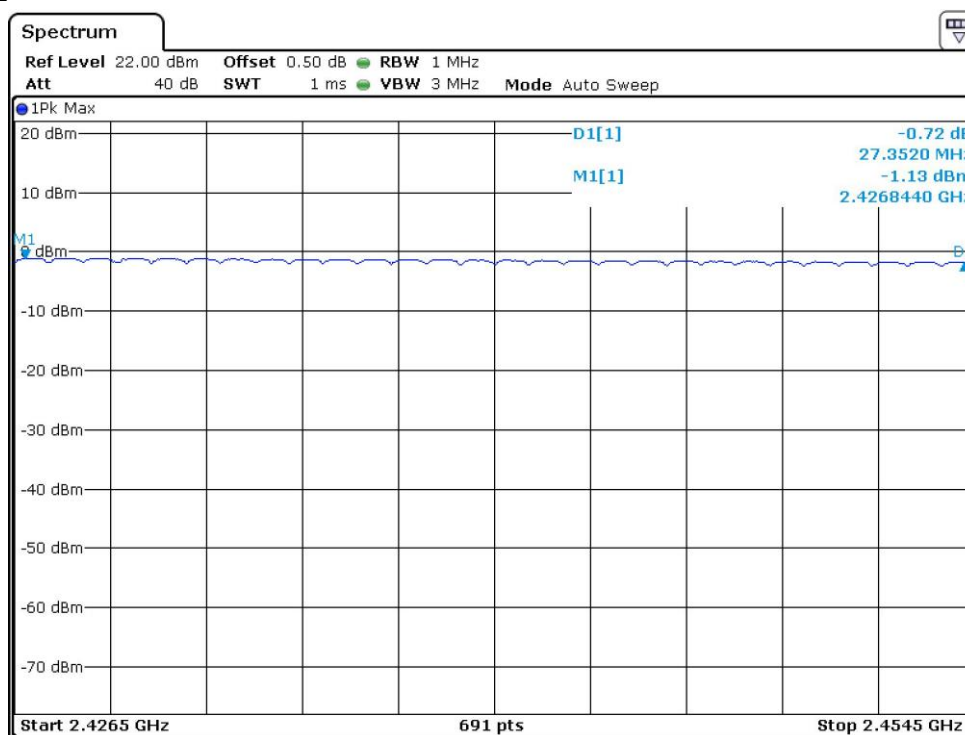

CH53-CH78

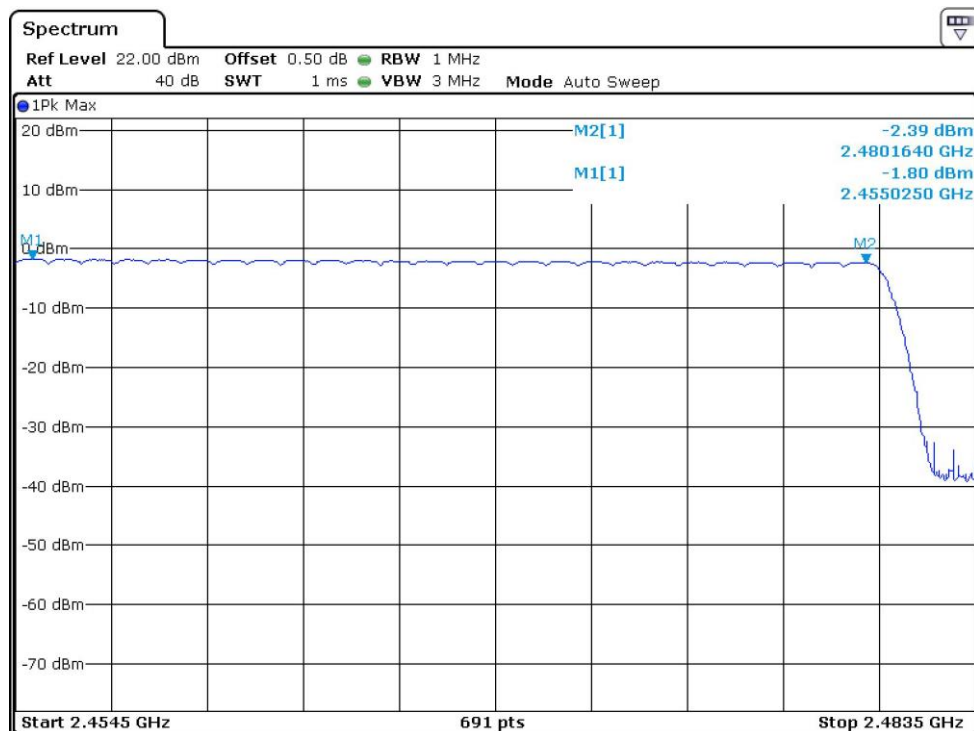

Applicant: M&S Accessory Network

Date of Test: August 29, 2024

Model: CC-MAK-CKT

#### 4.6 Channel Separation (Carrier Frequency Separation)

Minimum Hopping Channel Carrier Frequency Separation, FCC Ref: 15.247(a)(1):


Using the DELTA MARKER function of the analyzer, the frequency separation between two adjacent channels was measured and compared against the limit:

Not less than 2/3 of 20dB bandwidth of hopping channel:  $1.303 \times \frac{2}{3} = 0.87\text{MHz}$


Minimum Channel Separation	0.999 MHz
----------------------------	-----------

Modulation Type: 8DPSK


Low Channel

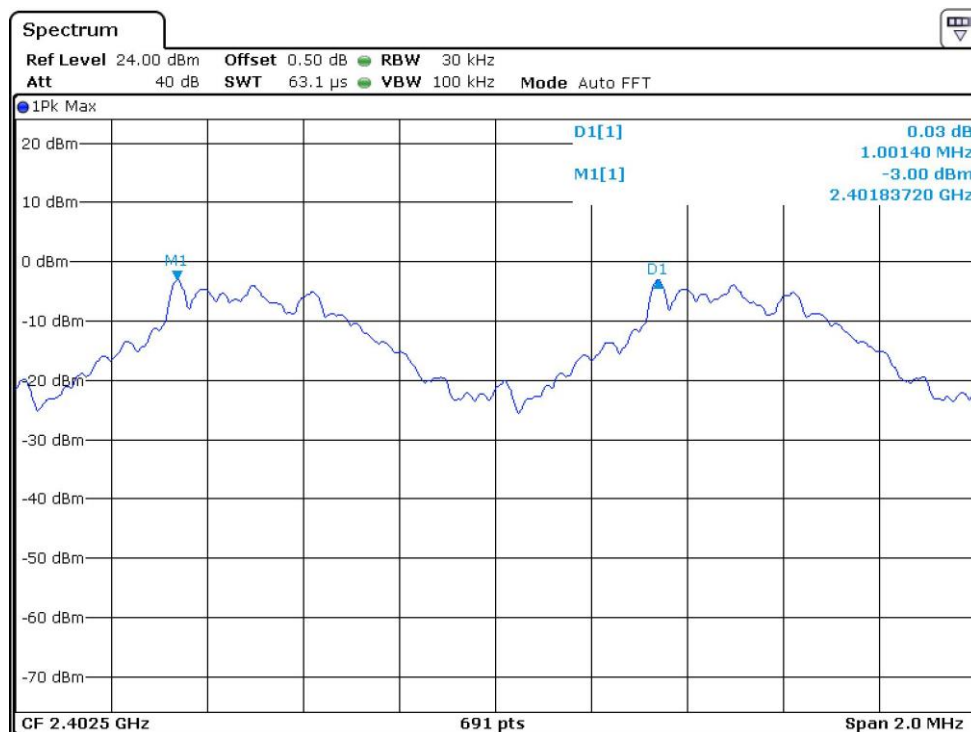

## Middle Channel

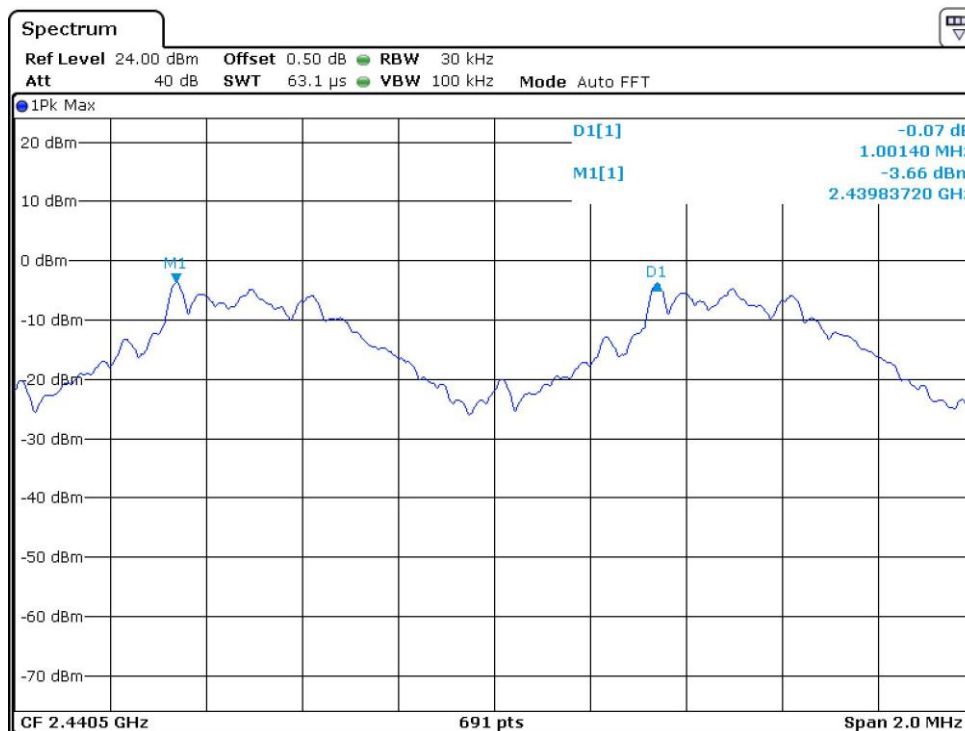

## High Channel

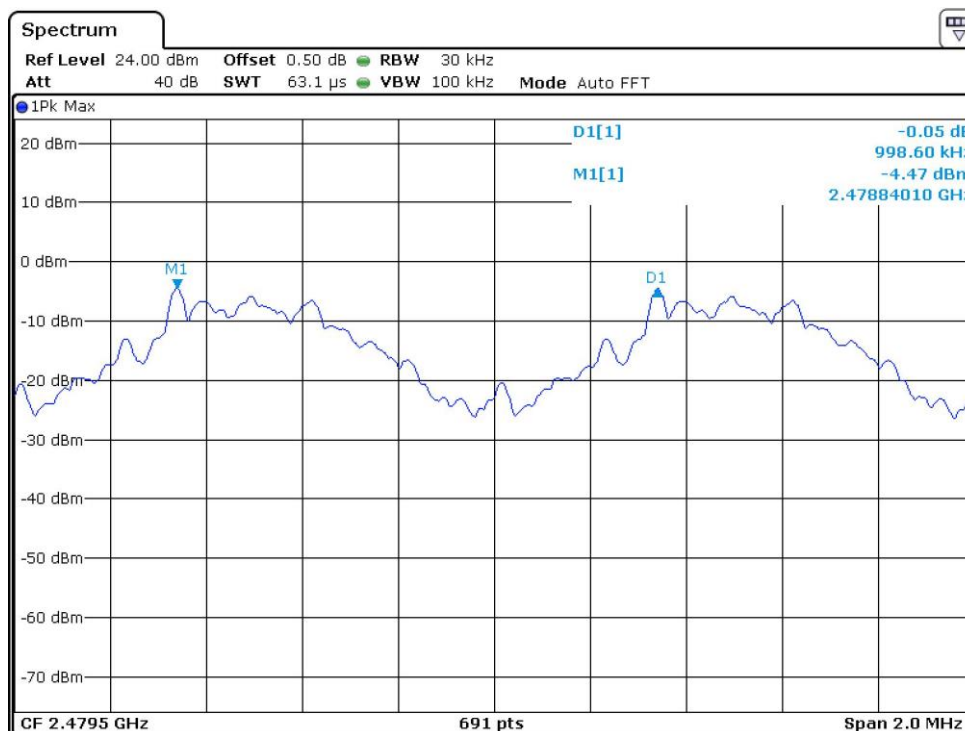

Applicant: M&S Accessory Network

Date of Test: August 29, 2024

Model: CC-MAK-CKT

#### 4.7 Dwell Time (Time of Occupancy)

Average Channel Occupancy Time, FCC Ref: 15.247(a) (1)(iii):

The spectrum analyzer center frequency was set to one of the known hopping channels with a longer sweep time to show two successive hops on a channel; the SPAN was set to ZERO SPAN, and the TRIGGER was set to VIDEO. RBW shall be  $\leq$  channel spacing and where possible RBW should be set  $\gg 1/T$ , where T is the expected dwell time per channel. The time duration of the transmissions so captured was measured with the MARKER DELTA function.

Repeat the measurement using a longer sweep time to determine the number of hops over the period specified in the requirements. The sweep time shall be equal to, or less than, the period specified in the requirements. Different modes of operation were performed and only the worst case data was reported.

Worst Test Result:

Normal hopping mode


Modulation Type	Packet	Max Dwell Time	Limit (s)	Result
8DPSK	DH1	$0.390\text{ms} * 160 = 62.400\text{ms}$	0.4	Pass
	DH3	$1.643\text{ms} * 121 = 198.803\text{ms}$	0.4	Pass
	DH5	$2.900\text{ms} * 96 = 278.400\text{ms}$	0.4	Pass

AFH mode:


Modulation Type	Packet	Max Dwell Time	Limit (s)	Result
8DPSK	DH1	$0.390\text{ms} * 80 = 31.20\text{ms}$	0.4	Pass
	DH3	$1.643\text{ms} * 42 = 69.01\text{ms}$	0.4	Pass
	DH5	$2.900\text{ms} * 27 = 78.30\text{ms}$	0.4	Pass

Modulation Type: 8DPSK


Packet: DH1

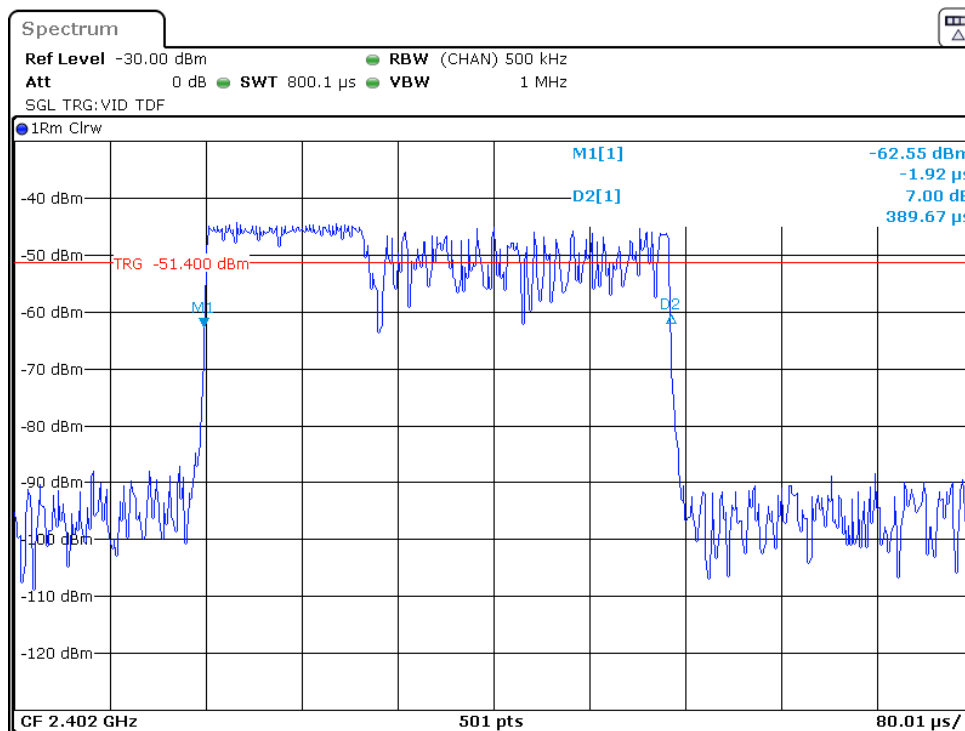


Number of hops (Normal hopping mode)

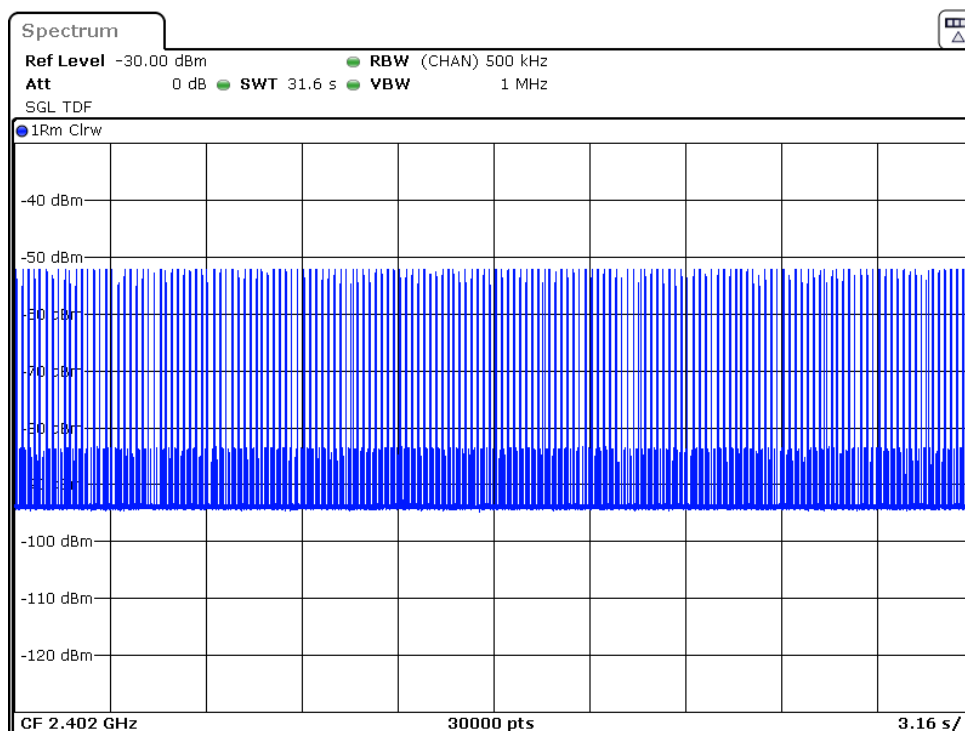

## Number of hops (AFH mode)

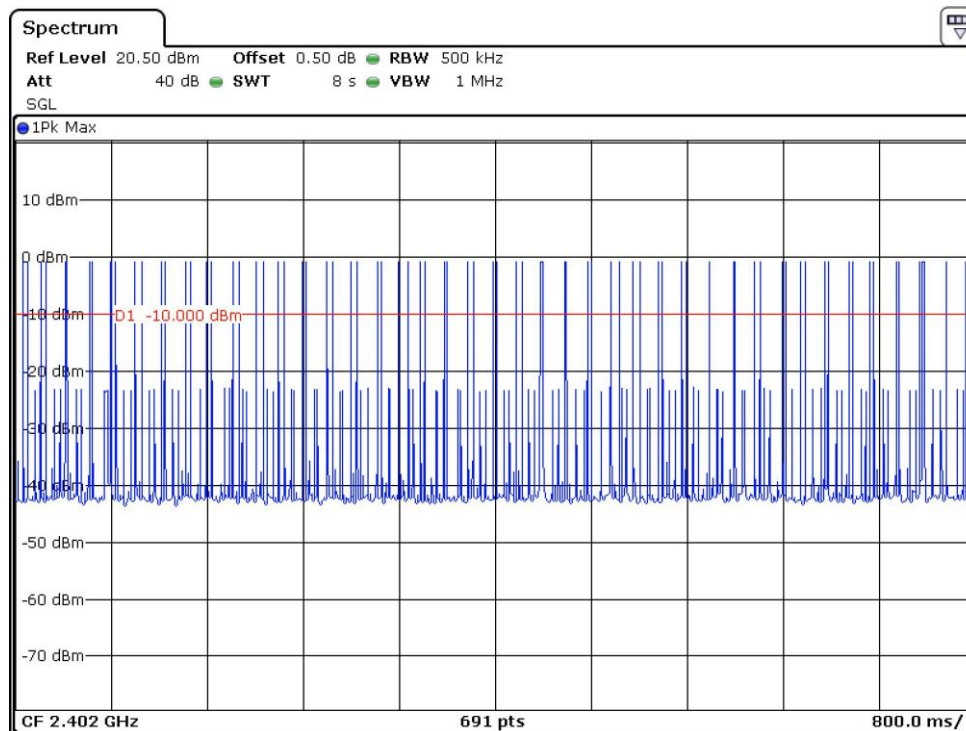


## Packet: DH3

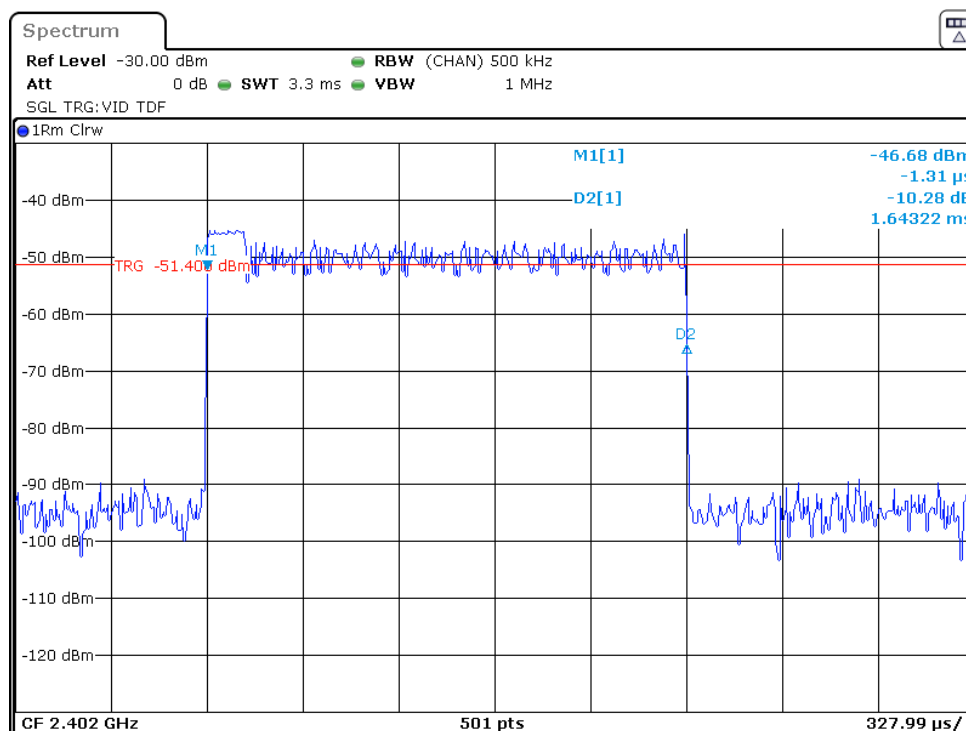





## Number of hops (Normal hopping mode)

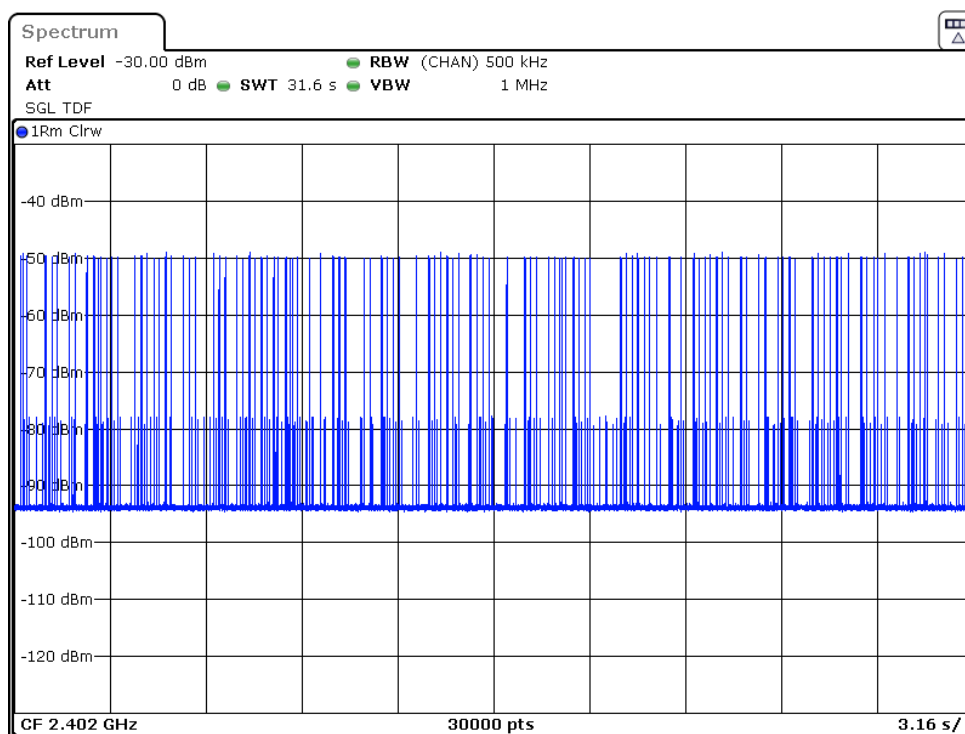


## Number of hops (AFH mode)

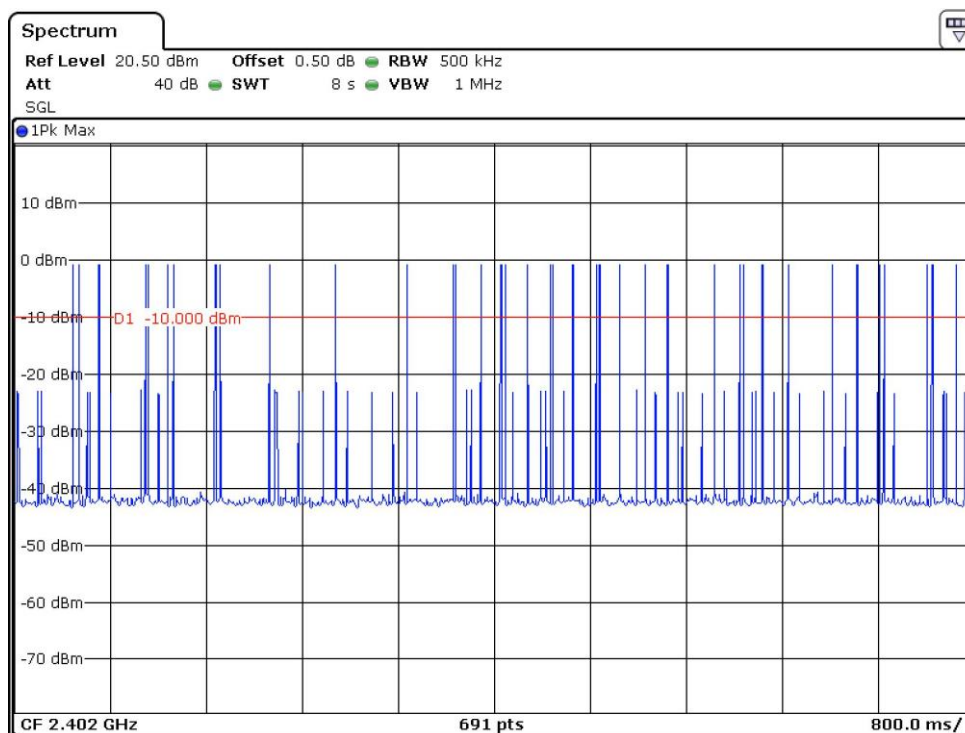


Packet: DH5

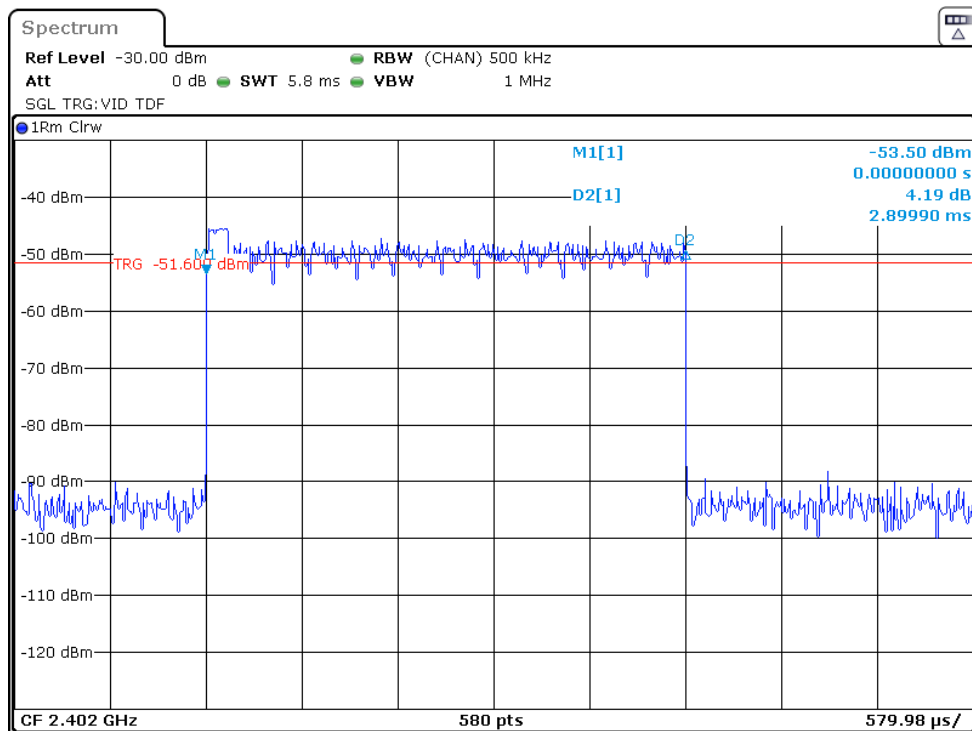

Number of hops (Normal hopping mode)

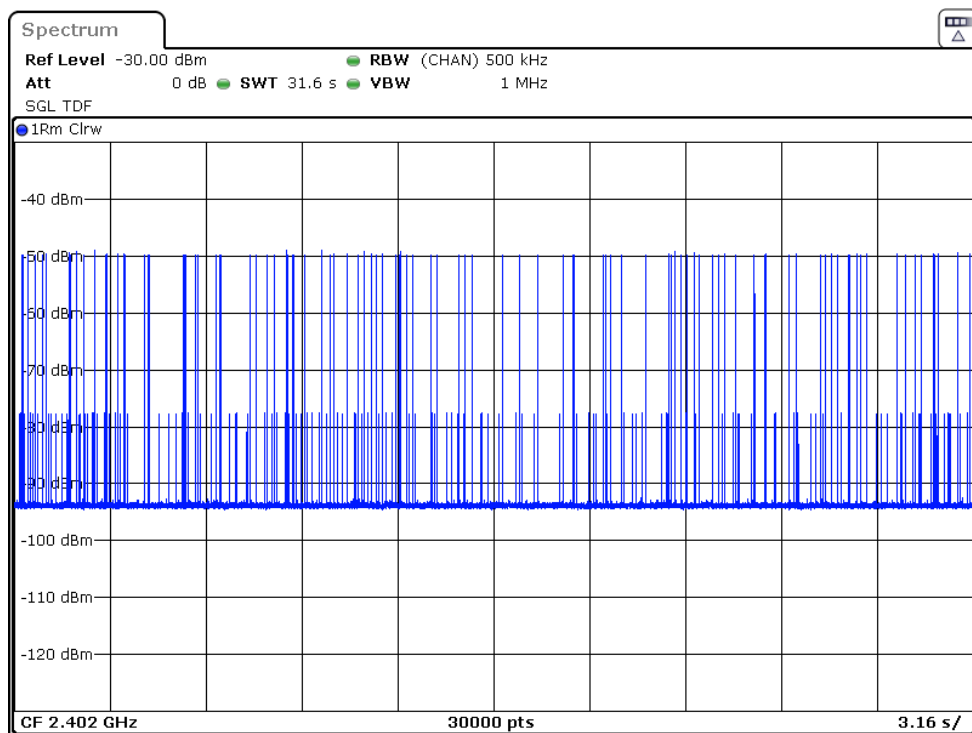

## Number of hops (AFH mode)

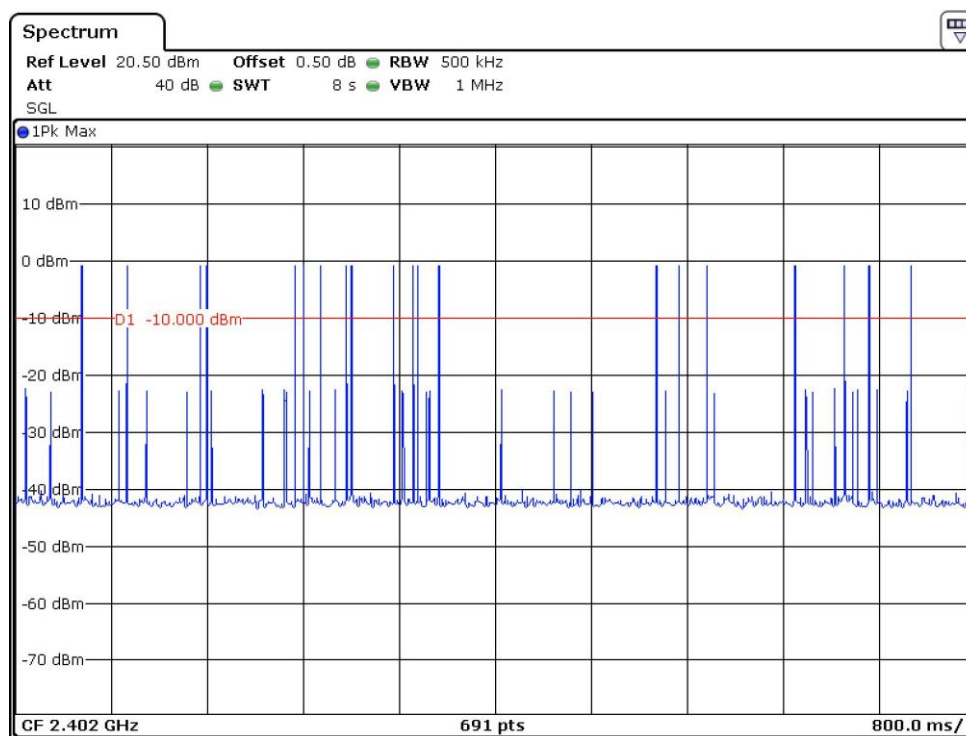

Applicant: M&S Accessory Network

Date of Test: August 29, 2024

Model: CC-MAK-CKT

#### 4.8 Band Edge

Out of Band Conducted Emissions, FCC Rule 15.247(d):

In any 100 KHz bandwidth outside the EUT passband, the RF power produced by the modulation products of the spreading sequence, the information sequence, and the carrier frequency shall be at least 20 dB below that of the maximum in-band 100 kHz emission, or else shall meet the general limits for radiated emissions at frequencies outside the passband, whichever results in lower attenuation.

Furthermore, delta measurement technique for measuring bandage emissions was shown as below:

##### (i) Lower channel 2402MHz:

Peak Resultant field strength = Fundamental emissions (peak value) – delta from the bandedge plot  
 $= 88.1\text{dB}\mu\text{v/m} - 46.3\text{dB}$   
 $= 41.8\text{dB}\mu\text{v/m}$

Average Resultant field strength = Fundamental emissions (Average value) – delta from the bandedge plot  
 $= 65.6\text{dB}\mu\text{v/m} - 46.3\text{dB}$   
 $= 19.3\text{dB}\mu\text{v/m}$

##### (ii) Upper channel 2480MHz:



Peak Resultant field strength = Fundamental emissions (peak value) – delta from the bandedge plot  
 $= 90.1\text{dB}\mu\text{v/m} - 43.8\text{dB}$   
 $= 46.3\text{dB}\mu\text{v/m}$

Average Resultant field strength = Fundamental emissions (Average value) – delta from the bandedge plot  
 $= 67.6\text{dB}\mu\text{v/m} - 43.8\text{dB}$   
 $= 23.8\text{dB}\mu\text{v/m}$



The resultant field strength meets the general radiated emission limit in section 15.209, which does not exceed 74dBμv/m (Peak Limit) and 54dBμv/m (Average Limit).

Modulation Type: 8DPSK

Hopping function off

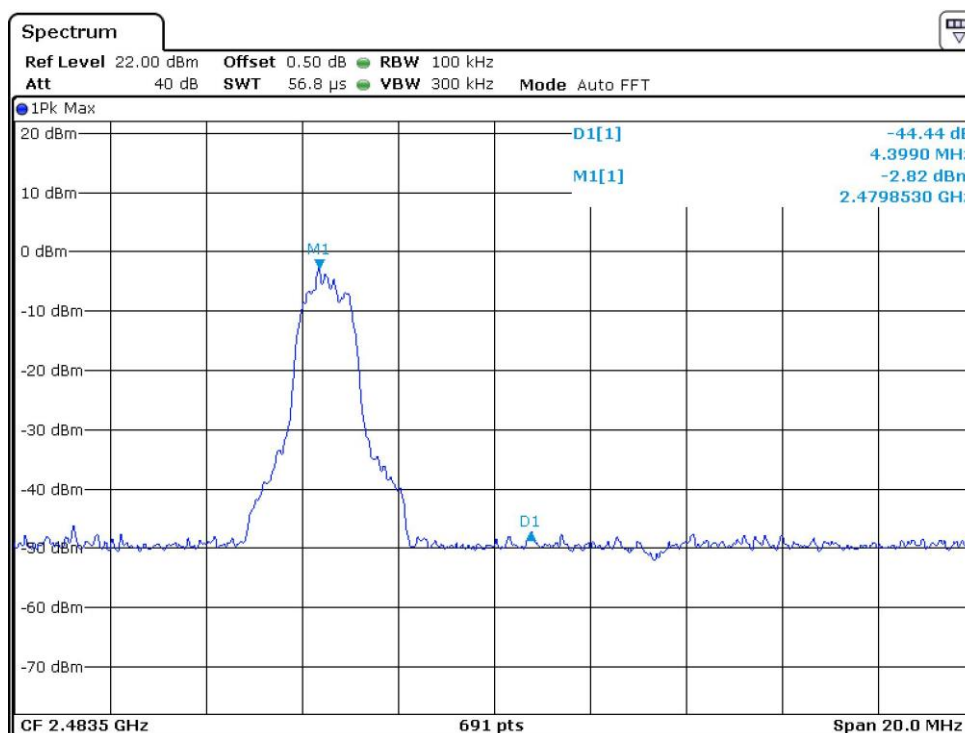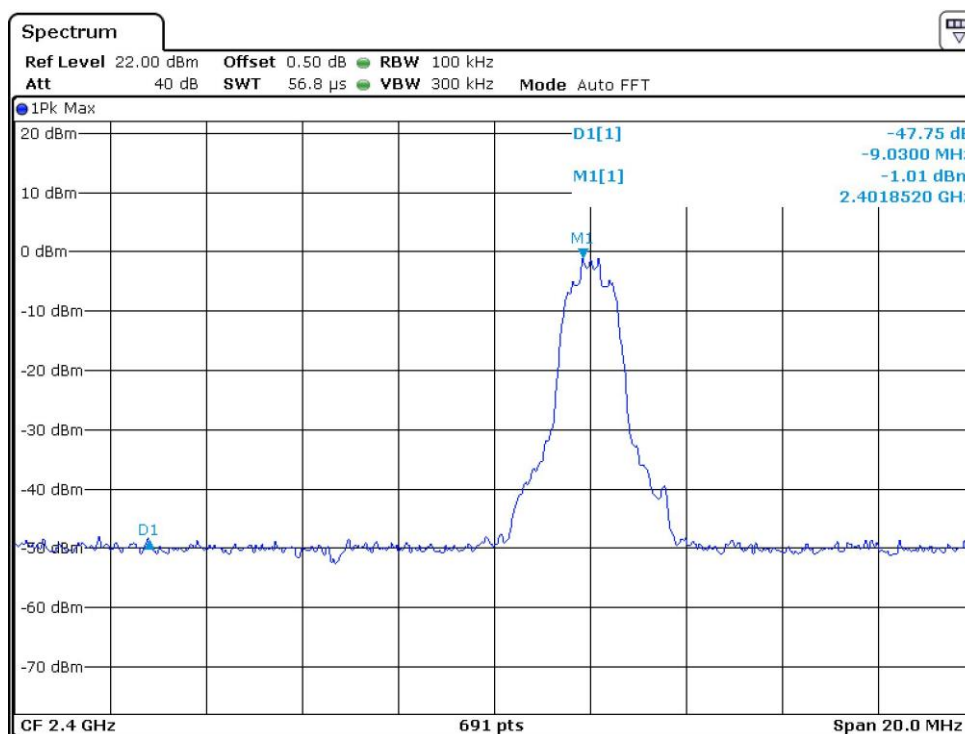

Hopping function off

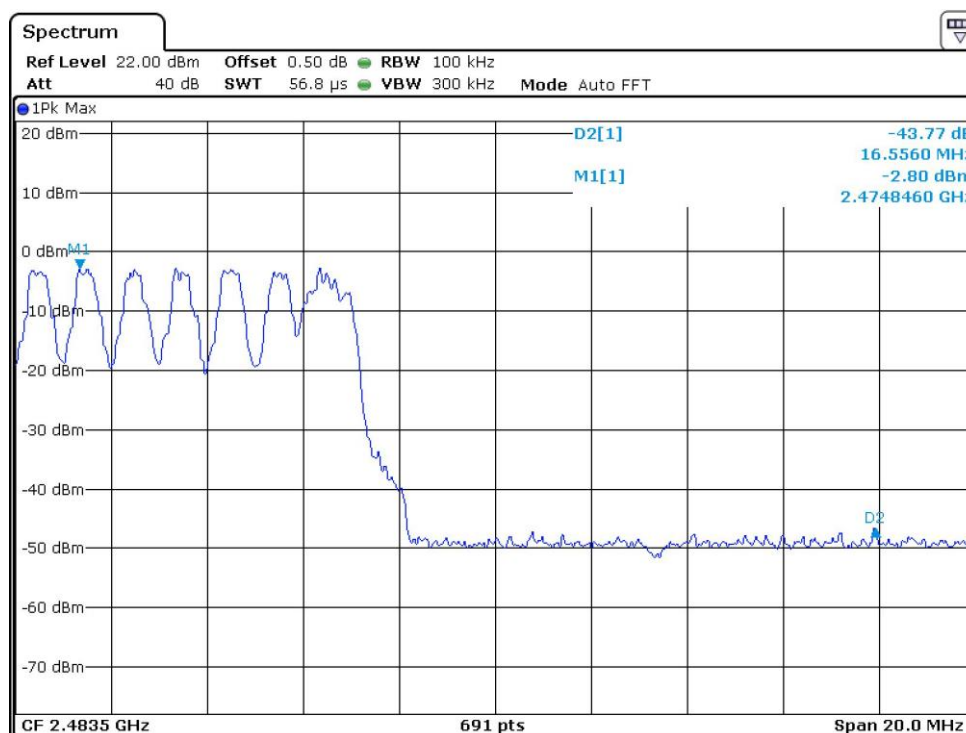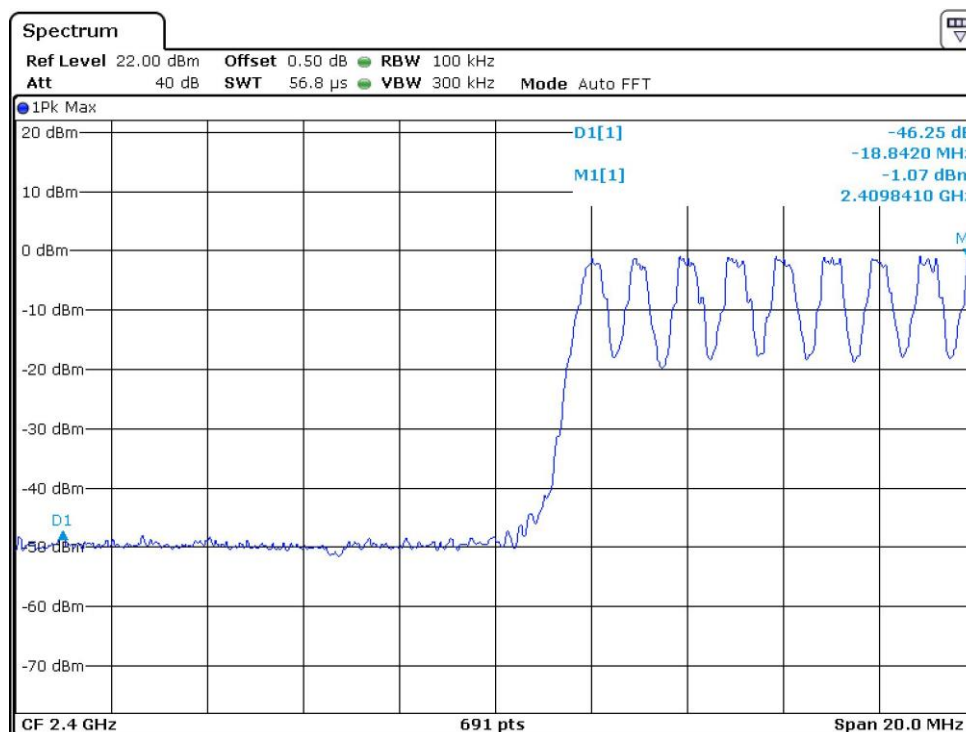

**TEST REPORT**

Intertek Report No.: 240826005SZN-001

Applicant: M&S Accessory Network

Date of Test: August 29, 2024

Model: CC-MAK-CKT



**4.9 Transmitter Spurious Emissions (Conducted)**

Out of Band Conducted Spurious Emissions, FCC Rule 15.247(d):

All spurious emission and up to the tenth harmonic was measured and they were found to be at least 20 dB below the highest level of the desired power in the passband.



Modulation Type: GFSK

CH00

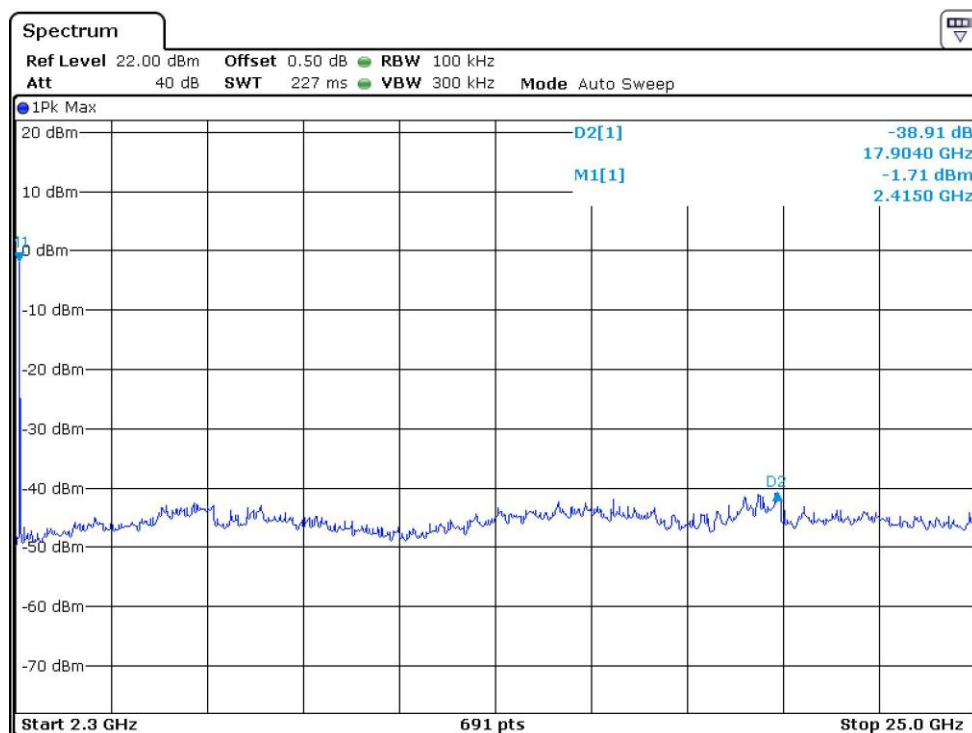
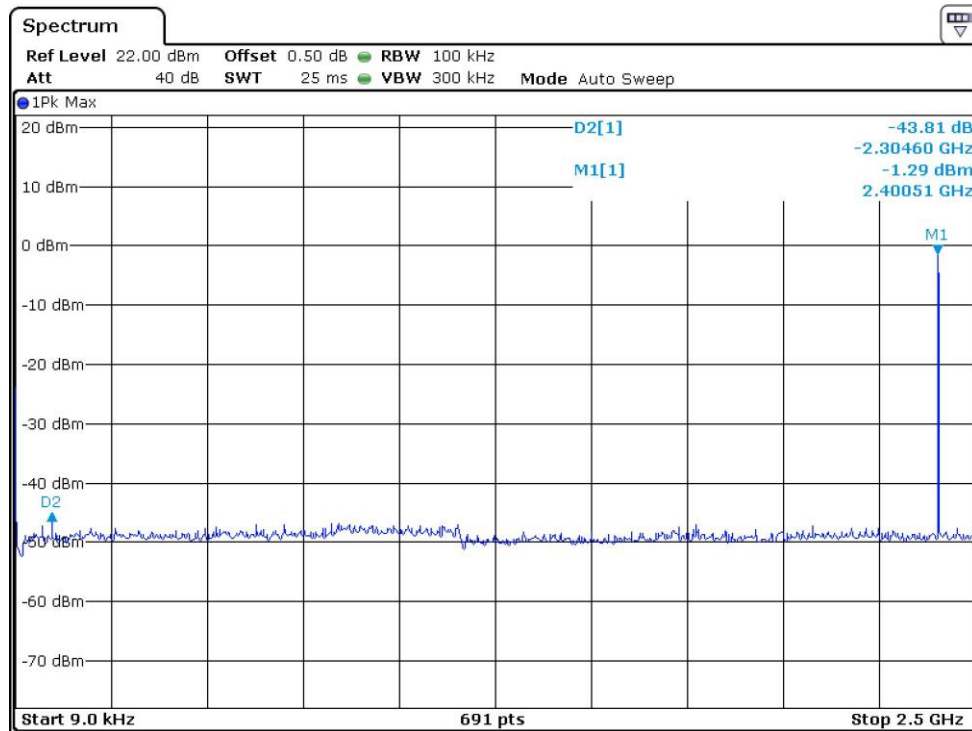




CH39

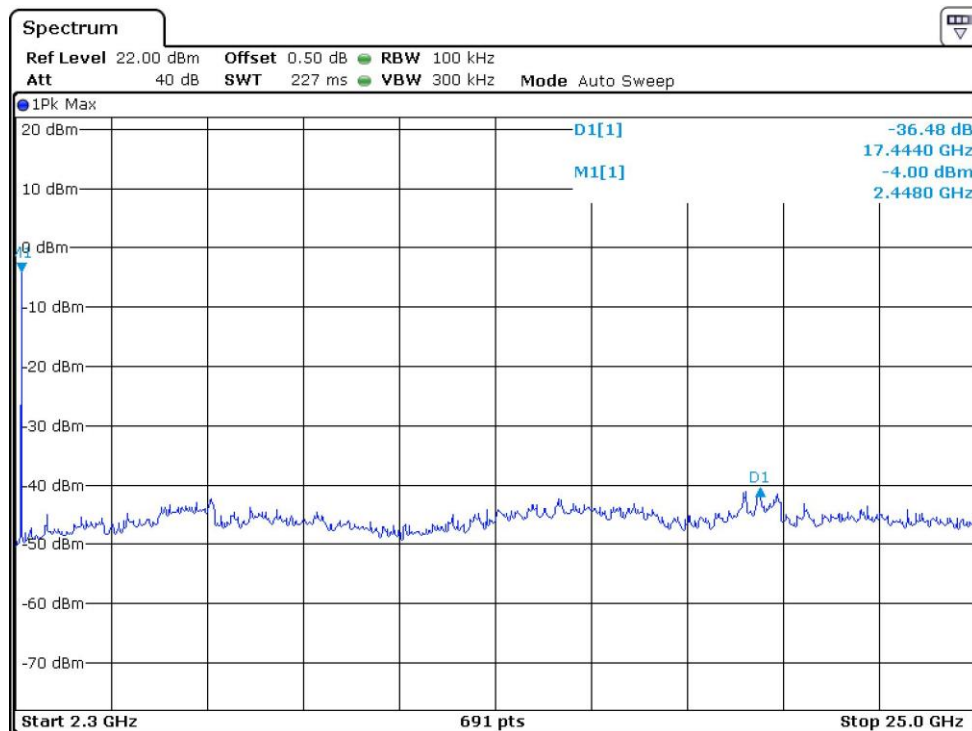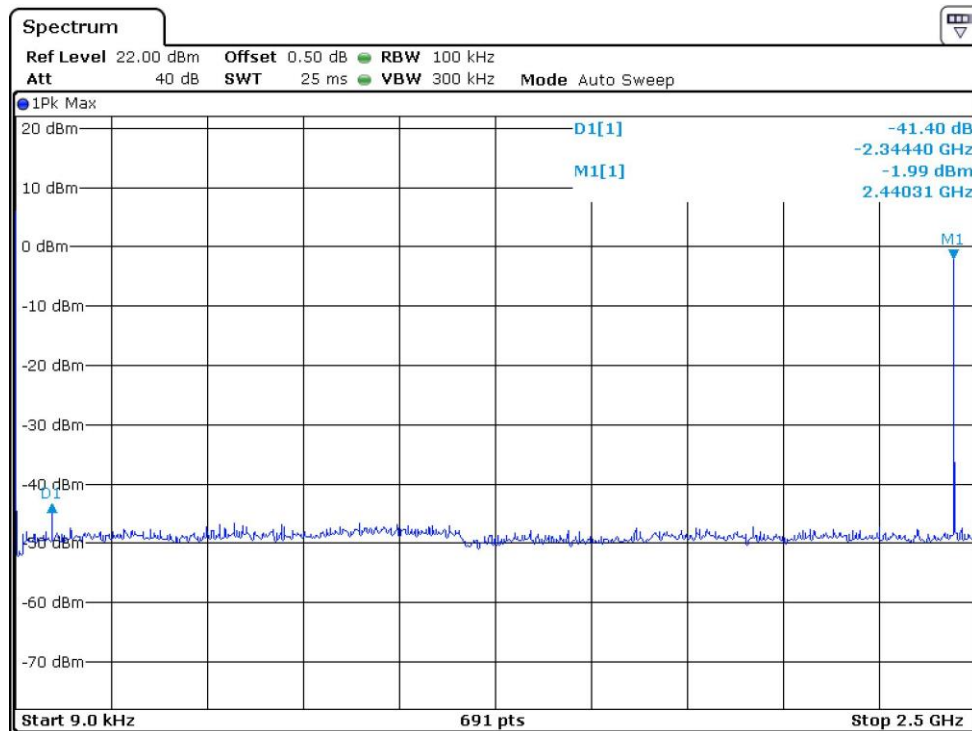

CH78

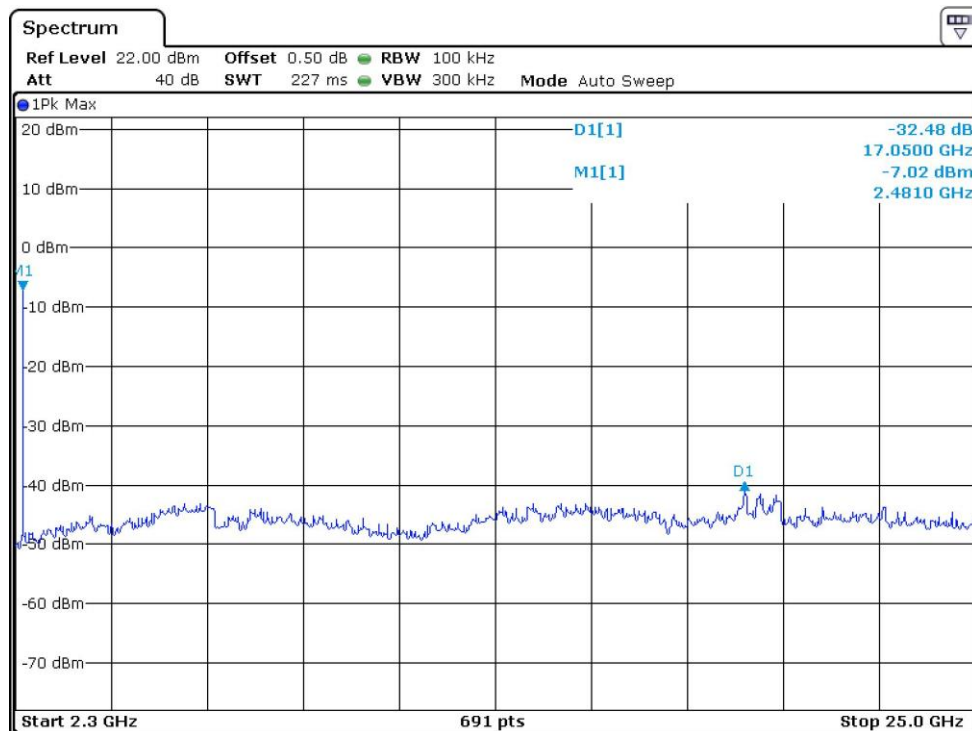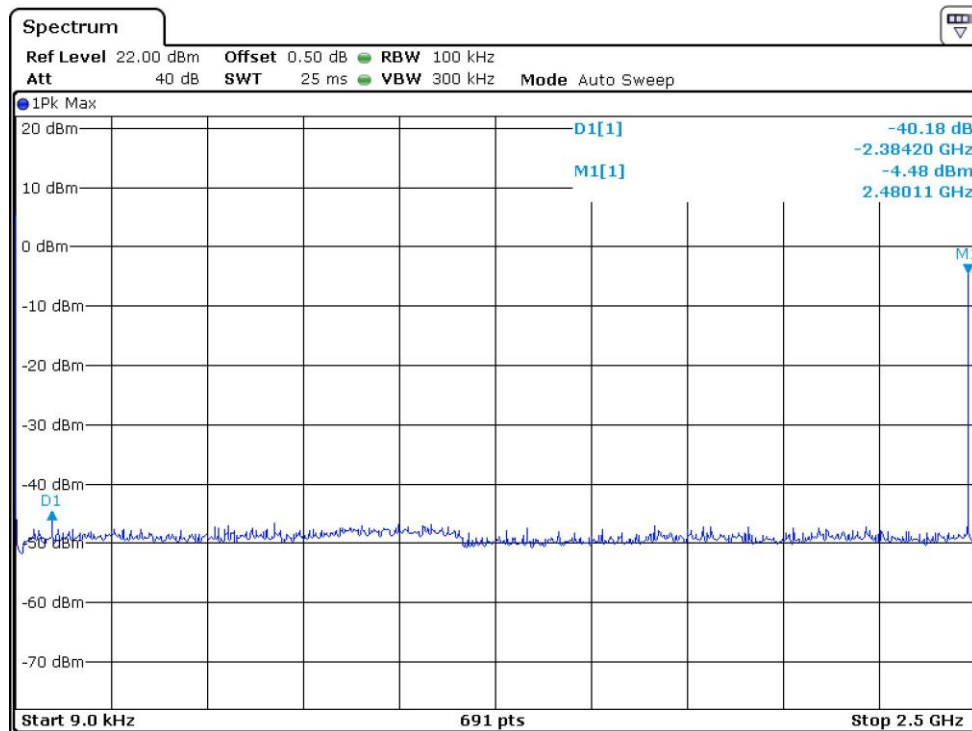

## 5.0 Equipment Photographs

For electronic filing, the photographs of the tested EUT are saved with filename: external photos.pdf & internal photos.pdf.

## 6.0 Product Labelling

For electronic filing, the FCC ID label artwork and the label location are saved with filename: label.pdf.

## 7.0 Technical Specifications

For electronic filing, the block diagram and schematics of the tested EUT are saved with filename: block.pdf and circuit.pdf respectively.

## 8.0 Instruction Manual

For electronic filing, a preliminary copy of the Instruction Manual is saved with filename: manual.pdf.

This manual will be provided to the end-user with each unit sold/leased in the United States.

## 9.0 Miscellaneous Information

This miscellaneous information includes details of the measured bandedge, the test procedure and calculation of factor such as pulse desensitization.

### 9.1 Discussion of Pulse Desensitization

Pulse desensitivity is not applicable for this device. The effective period ( $T_{eff}$ ) is approximately 625 $\mu$ s for Bluetooth. With a resolution bandwidth (3dB) of 1MHz, so the pulse desensitivity factor is 0dB.

### 9.2 Calculation of Average Factor

Based on the Bluetooth Specification Version 5.0 (EDR mode) and worst case AFH mode, transmitter ON time is independent of packet type (DH1, DH3 and DH5) and packet length, the AFH mode Duty cycle connection factor as below:

Channel hop rate = 800 hops/second (AFH Mode)

Adjusted channel hop rate for DH5 mode = 133.33 hops/second

Time per channel hop =  $1 / 133.33 \text{ hops/second} = 7.5 \text{ ms}$

Time to cycle through all channels =  $7.5 \times 20 \text{ channels} = 150 \text{ ms}$

Number of times transmitter hits on one channel =  $100 \text{ ms} / 150 \text{ ms} = 1 \text{ time(s)}$

Worst case dwell time = 7.5 ms

Duty cycle connection factor =  $20\log_{10} (7.5\text{ms} / 100\text{ms}) = -22.5 \text{ dB}$

### 9.3 Emissions Test Procedures

The following is a description of the test procedure used by Intertek Testing Services in the measurements of transmitters operating under Part 15, Subpart C rules.

The test set-up and procedures described below are designed to meet the requirements of ANSI C63.10: 2013.

The transmitting equipment under test (EUT) is placed on a styrene turntable which is four feet in diameter, up to 1GHz 0.8m and above 1GHz 1.5m in height above the ground plane. During the radiated emissions test, the turntable is rotated and any cables leaving the EUT are manipulated to find the configuration resulting in maximum emissions. The EUT is adjust through all three orthogonal axes to obtain maximum emission levels. The antenna height and polarization are varied during the testing to search for maximum signal levels.

Detector function for radiated emissions is in peak mode. Average readings, when required, are taken by measuring the duty cycle of the equipment under test and subtracting the corresponding amount in dB from the measured peak readings. A detailed description for the calculation of the average factor can be found in section 9.2.

The frequency range scanned is from the lowest radio frequency signal generated in the device which is greater than 9 kHz to the tenth harmonic of the highest fundamental frequency or 40 GHz, whichever is lower. For line conducted emissions, the range scanned is 150 kHz to 30 MHz with RBW 9KHz used.

### 9.3 Emissions Test Procedures (cont'd)

The EUT is warmed up for 15 minutes prior to the test.

AC power to the unit is varied from 85% to 115% nominal and variation in the fundamental emission field strength is recorded. If battery powered, a new, fully charged battery is used.

Conducted measurements are made as described in ANSI C63.10: 2013.

The IF bandwidth used for measurement of radiated signal strength was 10 kHz for emission below 30 MHz and 120 kHz for emission from 30 MHz to 1000 MHz. Where pulsed transmissions of short enough pulse duration warrant, a greater bandwidth is selected according to the recommendations of Hewlett Packard Application Note 150-2. Above 1000 MHz, a resolution bandwidth of 1 MHz is used (RBW 3MHz used for fundamental emission).

Transmitter measurements are normally conducted at a measurement distance of three meters. However, to assure low enough noise floor in the restricted bands and above 1 GHz, signals are acquired at a distance of one meter or less. All measurements are extrapolated to three meters using inverse scaling, but those measurements taken at a closer distance are so marked.

## 10 Test Equipment List

Equipment No.	Equipment	Manufacturer	Model No.	Serial No.	Cal. Date	Due Date
SZ182-02	RF Power Meter	Anritsu	ML2496A	1302005	2024-04-22	2025-04-22
SZ182-02-01	Power Sensor	Anritsu	MA2411B	1207429	2024-04-22	2025-04-22
SZ056-06	Signal Analyzer	R&S	FSV 40	101101	2023-12-13	2024-12-13
SZ062-10	RF Cable	Bedeia	RG 58	--	2023-11-15	2024-11-15
SZ056-08	Signal Analyzer	R&S	FSV 40	101430	2023-12-13	2024-12-13
SZ185-03	EMI Receiver	R&S	ESR7	101975	2024-04-23	2025-04-23
SZ061-06	Active Loop Antenna	Electro-Metrics	EM-6876	217	2024-05-05	2027-05-05
SZ061-13	BiConiLog Antenna	ETS	3142E	00217919	2022-07-13	2025-07-13
SZ061-09	Double-Ridged Waveguide Horn Antenna	ETS	3115	00092347	2022-10-14	2025-10-14
SZ181-08	Microwave System Amplifier	Agilent	83017A	MY57280108	2024-07-29	2025-07-29
SZ188-05	Anechoic Chamber	ETS	FACT 3-2.0	CT001880-Q1391	2021-05-25	2026-05-25
SZ062-35	RF Cable	RADIAL	A50-3.5M 3.5M-8M	-	2023-11-14	2024-11-14
SZ062-30	RF Cable	RADIAL	A50-3.5M 3.5M-4.5M	-	2023-11-14	2024-11-14
SZ062-31	RF Cable	RADIAL	A50-3.5M 3.5M-1M	-	2023-11-14	2024-11-14
SZ067-04	Notch Filter	Micro-Tronics	BRM50702-02	015	2024-04-23	2025-04-23
SZ185-02	EMI Test Receiver	R&S	ESCI	100692	2024-07-09	2025-07-09
SZ187-01	Two-Line V-Network	R&S	ENV216	100072	2023-10-18	2024-10-18
SZ188-03	Shielding Room	ETS	RFD-100	4100	2022-12-20	2025-12-20

\*\*\*\*\* End of Report\*\*\*\*\*