

2.4GWIFI

DUT:


Communication System:802.11b; Frequency: 2437 MHz;Duty Cycle: 1:1
Medium: H2450 Medium parameters used: $f = 2437\text{ MHz}$; $\sigma = 1.77\text{ S/m}$; $\epsilon_r = 40.09$; $\rho = 1000\text{ kg/m}^3$
Ambient Temperature : $21.8\text{ }^{\circ}\text{C}$; Liquid Temperature : $21.6\text{ }^{\circ}\text{C}$

DASY5 Configuration:
- Probe: EX3DV4 - SN3970; Calibrated: 2024/6/25;
- Electronics: DAE4 Sn1418; Calibrated: 2024/5/17
- Phantom: ELI v5.0; Type: QDOVA002AA; Serial: TP:1231
- Measurement SW: DASY52, Version 52.8 (7); SEMCAD X Version 14.6.10 (7164)

Front/Area Scan (8x11x1): Measurement grid: $dx=15\text{mm}$, $dy=15\text{mm}$

Maximum value of SAR (measured) = 1.07 W/kg

Front/Zoom Scan (7x7x7)/Cube 0: Measurement grid: $dx=5\text{mm}$, $dy=5\text{mm}$, $dz=5\text{mm}$
Reference Value = 22.271 V/m ; Power Drift = -0.15 dB
Peak SAR (extrapolated) = 1.48 W/kg
SAR(1 g) = 0.722 W/kg ; SAR(10 g) = 0.410 W/kg
Maximum value of SAR (measured) = 1.16 W/kg

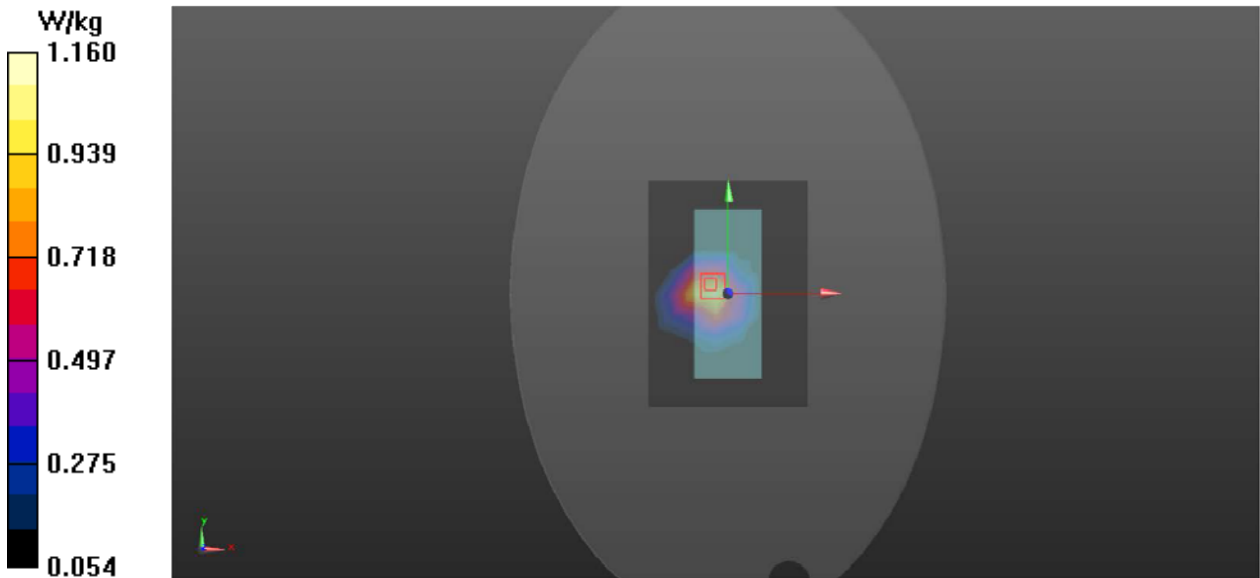

5.2GWIFI

DUT:

Communication System: 802.11a; Frequency: 5200 MHz;Duty Cycle: 1:1
Medium: HSL 5GHz Medium parameters used: $f = 5200\text{ MHz}$; $\sigma = 4.72\text{ S/m}$; $\epsilon_r = 36.88$; $\rho = 1000\text{ kg/m}^3$
Ambient Temperature : $21.9\text{ }^{\circ}\text{C}$; Liquid Temperature : $21.7\text{ }^{\circ}\text{C}$

DASY5 Configuration:
- Probe: EX3DV4 - SN3970; Calibrated: 2024/6/25;
- Electronics: DAE4 Sn1418; Calibrated: 2024/5/17
- Phantom: ELI v5.0; Type: QDOVA002AA; Serial: TP:1231
- Measurement SW: DASY52, Version 52.8 (7); SEMCAD X Version 14.6.10 (7164)

Front/Area Scan (8x11x1): Measurement grid: $dx=15\text{mm}$, $dy=15\text{mm}$

Maximum value of SAR (measured) = 3.92 W/kg

Front/Zoom Scan (7x7x7)/Cube 0: Measurement grid: $dx=4\text{mm}$, $dy=4\text{mm}$, $dz=2\text{mm}$
Reference Value = 27.211 V/m ; Power Drift = 0.04 dB
Peak SAR (extrapolated) = 5.38 W/kg
SAR(1 g) = 0.740 W/kg ; SAR(10 g) = 0.422 W/kg
Maximum value of SAR (measured) = 4.44 W/kg

