

# **FCC Test Report**

Report No.: AGC01284240602FR01

FCC ID : 2BADE-GMRS15

**APPLICATION PURPOSE**: Original Equipment

**PRODUCT DESIGNATION**: Mobile Radio

**BRAND NAME** : SOUNE EXTREME

**MODEL NAME** : SEI-GMRS15

**APPLICANT**: Sound Extreme Inc.

**DATE OF ISSUE** : Jul. 16, 2024

**STANDARD(S)** : FCC Part 95 Subpart E

**REPORT VERSION**: V1.0

Attestation of Global Compliance (Shenzhen) Co., Ltd



Page 2 of 50


# **Report Revise Record**

Report Version	Revise Time	Issued Date	Valid Version	Notes
V1.0	/	Jul. 16, 2024	Valid	Initial Release



## **Table of Contents**

1. General Information	5
2. Product Information	6
2.1 Product Technical Description	6
2.2 Test Frequency List	7
2.3 Related Submittal(S) / Grant (S)	8
2.4 Test Methodology	8
2.5 Calculation of Emission Indicators	8
2.6 Special Accessories	8
2.7 Equipment Modifications	8
2.8 Antenna Requirement	g
3. Test Environment	10
3.1 Address of The Test Laboratory	10
3.2 Test Facility	10
3.3 Environmental Conditions	11
3.4 Measurement Uncertainty	11
3.5 List of Equipment Used	12
4. System Test Configuration	14
4.1 EUT Configuration	14
4.2 EUT Exercise	14
4.3 Configuration of Tested System	14
4.4 Equipment Used in Tested System	14
4.5 Summary of Test Results	15
5. Description of Test Modes	
6. Frequency Stability	17
6.1 Provisions Applicable	17
6.2 Measurement Procedure	17
6.3 Measurement Setup	17
6.4 Measurement Result	
7. 26dB Emission Bandwidth and 99% Occupied Bandwidth	19
7.1 Provisions Applicable	19
7.2 Measurement Procedure	19
7.3 Measurement Setup	19
7.4 Measurement Result	
8. Spurious Radiated Emission	22
8.1 Provisions Applicable	
8.2 Measurement Procedure	
8.3 Measurement Setup	23
8.4 Measurement Result	
8.5 Emission Mask Measurement Part	32
9. Modulation Characteristics	34





9.1 Provisions Applicable	34
9.2 Measurement Procedure	34
9.3 Measurement Setup	34
9.4 Measurement Result	
10. Maximum Transmitter Power	39
10.1 Provisions Applicable	39
10.2 Measurement Procedure	39
10.3 Measurement Setup	40
10.4 Measurement Result	42
11. Spurious Emission on Antenna Port	44
11.1 Provisions Applicable	44
11.2 Measurement Procedure	
11.3 Measurement Setup	
11.4 Measurement Result	
12. Audio Low Pass Filter Response	47
12.1 Provisions Applicable	
12.2 Measurement Procedure	
12.3 Measurement Setup	47
12.4 Measurement Result	
Appendix I: Photographs of Test Setup	50
Appendix II: Photographs of Test EUT	



Report No.: AGC01284240602FR01 Page 5 of 50

## 1. General Information

Applicant	Sound Extreme Inc.
Address	9212 Fry Road, Suite 105-351, Cypress, TX 77433, USA
Manufacturer	Sound Extreme Inc.
Address	9212 Fry Road, Suite 105-351, Cypress, TX 77433, USA
Factory	Sound Extreme Inc.
Address	9212 Fry Road, Suite 105-351, Cypress, TX 77433, USA
Product Designation	Mobile Radio
Brand Name	SOUNE EXTREME
Test Model	SEI-GMRS15
Date of receipt of test item	Jun. 05, 2024
Date of Test	Jun. 05, 2024~Jul. 16, 2024
Deviation from Standard	No any deviation from the test method
Condition of Test Sample	Normal
Test Result	Pass
Test Report Form No	AGCER-FCC-GMRS-V1

Note: The test results of this report relate only to the tested sample identified in this report.

Prepared By	Bibo zhang	
	Bibo Zhang (Project Engineer)	Jul. 16, 2024
Reviewed By	Calin Lin	
	Calvin Liu (Reviewer)	Jul. 16, 2024
Approved By	Max Zhang	
	Max Zhang Authorized Officer	Jul. 16, 2024



Page 6 of 50

## 2. Product Information

## 2.1 Product Technical Description

Communication Type	Voice / Tone only	
	462.5500MHz-462.7250MHz (GMRS 462 MHz main channels)	
Operation Frequency Range	462.5625MHz-462.7125MHz (GMRS 462 MHz interstitial channels)	
	467.5500MHz-467.7250MHz (GMRS 467 MHz main channels)	
Hardware Version	V1.0	
Software Version	V1.0	
Modulation Type	FM	
Channel Separation	12.5kHz/25kHz	
Emission Bandwidth	GMRS: 10.54 kHz (5W-12.5kHz), GMRS:10.54kHz (15W-12.5kHz)	
Emission bandwidin	GMRS: 15.64 kHz (5W-25kHz), GMRS:15.64 kHz (15W-25kHz)	
Emission Designator	11K0F3E/16K0F3E	
Number of Channels:	23 Channels	
Rated Output Power	5W (It was fixed by the manufacturer, any individual can't arbitrarily change it.)	
Maximum Transmitter Power	GMRS: 36.55dBm (5W-12.5kHz) GMRS:41.57dBm (15W-12.5kHz)	
Maximum Transmitter Power	GMRS: 36.71dBm (5W-25kHz) GMRS:41.58dBm (15W-25kHz)	
Antenna Designation	Detachable Antenna	
Antenna Gain	0dBi	
Frequency Tolerance	1.100ppm	
Power Supply	DC 13.8V	



Page 7 of 50

## 2.2 Test Frequency List

According to ANSI C63.26 section 5.1.2.1:

Measurements of transmitters shall be performed and, if required, reported for each frequency band in which the EUT can be operated with the device transmitting at the number of frequencies in each band specified in Table 2.

Frequency range Over which EUT operates	Number of Frequencies	Location in frequency range of operation
1 MHz or less	1	Middle
1 MHz to 10 MHz	2	1 near top and 1 near bottom
More than 10 MHz	3	1 near top, 1 near middle, and 1 near bottom

Channel. No	CH. Freq	Rated Power	CH. No	CH. Freq	Rated Power
1	462.5625		15	462.5500	
2	462.5875		16	462.5750	
3	462.6125		17	462.6000	
4	462.6375	5W	18	462.6250	15W
5	462.6625		19	462.6500	1944
6	462.6875		20	462.6750	
7	462.7125		21	462.7000	
8			22	462.7250	
9			23	467.5500	
10			24	467.5750	
11			25	467.6000	
12			26	467.6250	15W
13			27	467.6500	1500
14			28	467.6750	
			29	467.7000	
<del></del>		30	467.7250		



Page 8 of 50

## 2.3 Related Submittal(S) / Grant (S)

This submittal(s) (test report) is intended for FCC ID: **2BADE-GMRS15**, filing to comply with Part 2, Part 95 of the Federal Communication Commission rules.

#### 2.4 Test Methodology

The tests were performed according to following standards:

No.	Identity	Document Title
1	FCC 47 CFR Part 95	Personal Radio Services
2	FCC 47 CFR Part 2	Frequency allocations and radio treaty matters; general rules and regulations
3	ANSI C63.26-2015	American National Standard for Compliance Testing of Transmitters Used in Licensed Radio Services
4	ANSI/TIA-603-E-2016	Land Mobile FM or PM Communications Equipment Measurement and Performance Standards
5	KDB 888861 D01	888861 D01 Part 95 GMRS FRS v01

#### 2.5 Calculation of Emission Indicators

FCC Rules and Regulations Part 2.202: Necessary Bandwidth and Emission Bandwidth

## For FM Mode (Channel Spacing: 12.5kHz)

Emission Designator 11K0F3E

In this case, the maximum modulating frequency is 3.0 kHz with a 2.5 kHz deviation.

BW = 2(M+D) = 2\*(3.0 kHz + 2.5 kHz) = 11 kHz = 11KO

F3E portion of the designator represents an FM voice transmission.

Therefore, the entire designator for 12.5 kHz channel spacing FM mode is 11K0F3E.

## For FM Mode (Channel Spacing: 25kHz)

Emission Designator 16K0F3E

In this case, the maximum modulating frequency is 3.0 kHz with a 5.0 kHz deviation.

BW = 2(M+D) = 2\*(3.0 kHz + 5.0 kHz) = 16 kHz = 16K0

F3E portion of the designator represents an FM voice transmission.

Therefore, the entire designator for 25 kHz channel spacing FM mode is 16K0F3E.

#### 2.6 Special Accessories

Not available for this EUT intended for grant.

## 2.7 Equipment Modifications

Not available for this EUT intended for grant.



Page 9 of 50

#### 2.8 Antenna Requirement

#### Excerpt from §95.1787 of the FCC Rules/Regulations:

The antenna of each GMRS Transmitter type must meet the following requirements.

- (1) The antenna must be a non-removable integral part of the GMRS unit.
- (2) Digital data transmissions may contain location information, or requesting location information from one or more other GMRS or FRS units, or containing a brief text message to another specific GMRS or FRS unit. Digital data transmissions may be initiated by a manual action of the operator or on an automatic or periodic basis, and a GMRS unit receiving an interrogation request may automatically respond with its location.
- (3) GMRS units must not be capable of transmitting digital data on the 467 MHz main channels.
- (4) Digital data transmissions must not exceed one second in duration.

User	Applicable Conditions	
	This GMRS device does not support digital transmission	
	The antenna of this device is permanently attached.	
$\boxtimes$	Configuration with external detachable antenna	
$\boxtimes$	This GMRS device has a fixed antenna port	
Conclusion: The unit complies with the requirement of §95.1787.		



Page 10 of 50

#### 3. Test Environment

#### 3.1 Address of The Test Laboratory

Laboratory: Attestation of Global Compliance (Shenzhen) Co., Ltd.

Address: 1-2/F, Building 19, Junfeng Industrial Park, Chongqing Road, Heping Community, Fuhai Street, Bao'an District, Shenzhen, Guangdong, China

## 3.2 Test Facility

The test facility is recognized, certified, or accredited by the following organizations:

## CNAS-Lab Code: L5488

Attestation of Global Compliance (Shenzhen) Co., Ltd. has been assessed and proved to follow CNAS-CL01 Accreditation Criteria for Testing and Calibration Laboratories (identical to ISO/IEC17025: 2017 General Requirements for the Competence of Testing and Calibration Laboratories.)

#### A2LA-Lab Cert. No.: 5054.02

Attestation of Global Compliance (Shenzhen) Co., Ltd. EMC Laboratory has been accredited by A2LA for technical competence in the field of electrical testing, and proved to follow ISO/IEC 17025: 2017 General Requirements for the Competence of Testing and Calibration Laboratories and any additional program requirements in the identified field of testing.

## FCC-Registration No.: 975832

Attestation of Global Compliance (Shenzhen) Co., Ltd. EMC Laboratory has been registered and fully described in a report filed with the FCC (Federal Communications Commission). The acceptance letter from the FCC is maintained in our files with Registration 975832.

#### IC-Registration No.: 24842(CAB identifier: CN0063)

Attestation of Global Compliance (Shenzhen) Co., Ltd. EMC Laboratory has been registered and fully described in a report filed with the Certification and Engineering Bureau of Industry Canada. The acceptance letter from the IC is maintained in our files with Registration 24842.



Page 11 of 50

#### 3.3 Environmental Conditions

Normal Conditions	Extreme Conditions
15 - 35	-30 - 50
20 % - 75 %	20 % - 75 %
86 - 106	86 - 106
DC 13.8V	LV DC 11.73V/ HV DC 15.87V
	15 - 35 20 % - 75 % 86 - 106

Note: The Extreme Temperature and Extreme Voltages declared by the manufacturer.

## 3.4 Measurement Uncertainty

The reported uncertainty of measurement y ±U, where expended uncertainty U is based on a standard uncertainty multiplied by a coverage factor of k=2, providing a level of confidence of approximately 95%.

Test Items	Measurement Uncertainty
Frequency stability	±0.5%
Transmitter power conducted	±0.8dB
Transmitter power Radiated	±1.3dB
Conducted spurious emission 9kHz-40 GHz	±2.7dB
Conducted Emission	±3.2 dB
Radiated Emission below 1GHz	±3.9 dB
Radiated Emission above 1GHz	±4.8 dB
Occupied Channel Bandwidth	±2 %
FM deviation	±2 %
Audio level	±0.98dB
Low Pass Filter Response	±0.65dB
Modulation Limiting	0.42 %
Transient Frequency Behavior	6.8 %



Report No.: AGC01284240602FR01 Page 12 of 50

## 3.5 List of Equipment Used

• R	RF Conducted Test System						
Used	Equipment No.	Test Equipment	Manufacturer	Model No.	Serial No.	Last Cal. Date (YY-MM-DD)	Next Cal. Date (YY-MM-DD)
$\boxtimes$	AGC-ER-E086	Spectrum Analyzer	KEYSIGHT	N9020A	MY53300860	2023-06-01	2024-05-31
$\boxtimes$	AGC-EM-E002 Wireless Connectivity Tester		HP	8920B	US35010161	2024-05-24	2025-05-23
	AGC-ER-E059	Signal Generator	Agilent	N5182B	MY53050647	2024-02-01	2025-01-31
$\boxtimes$	AGC-ER-E037	Signal Generator	Agilent	N5182A	MY50140530	2024-05-23	2025-05-22
$\boxtimes$	AGC-ER-E075	Small Environmental Tester	SH-242	ESPEC	93008290	2022-08-03	2024-08-02
$\boxtimes$	AGC-EM-A007	30dB Attenuator	Weinachel	58-30-33	ML030	2022-08-03	2024-08-02
$\boxtimes$	AGC-EM-E040	Directional coupler	Werlatone	C5571-10	99463	2024-02-01	2026-01-31
$\boxtimes$		RF Connection Cable	N/A	1#	N/A	Each time	N/A
$\boxtimes$		RF Connection Cable	N/A	2#	N/A	Each time	N/A

• F	Radiated Spurious Emission							
Used	Equipment No.	Test Equipment	Manufacturer	Model No.	Serial No.	Last Cal. Date (YY-MM-DD)	Next Cal. Date (YY-MM-DD)	
$\boxtimes$	AGC-EM-E046	EMI Test Receiver	R&S	ESCI	10096	2024-02-01	2025-01-31	
$\boxtimes$	AGC-EM-E061	Spectrum Analyzer	Agilent	N9010A	MY53470504	2024-05-28	2025-05-27	
$\boxtimes$	AGC-ER-E032	Universal Radio Communication Tester	R&S	CMW500	120909	2023-07-05	2024-07-04	
$\boxtimes$	AGC-EM-E086	Loop Antenna	ZHINAN	ZN30900C	18051	2024-03-05	2026-03-04	
$\boxtimes$	AGC-EM-E001	Wideband Antenna	SCHWARZBECK	VULB9168	D69250	2023-05-11	2025-05-10	
$\boxtimes$	AGC-EM-E005	Wideband Antenna	SCHWARZBECK	VULB9168	VULB9168-494	2023-01-05	2025-01-04	
$\boxtimes$	AGC-EM-E029	Broadband Ridged Horn Antenna	ETS	3117	00034609	2023-03-23	2025-03-22	
	AGC-EM-E102	Broadband Ridged Horn Antenna	ETS	3117	00154520	2023-06-03	2025-06-02	
	AGC-EM-E082	Horn Antenna	SCHWARZBECK	BBHA 9170	#768	2023-11-13	2024-11-12	
$\boxtimes$	AGC-EM-E146	Pre-amplifier	ETS	3117-PA	00246148	2022-08-04	2024-08-03	
	AGC-EM-E021	Pre-amplifier	MITEQ	AM-4A-000115	1465421	2024-05-28	2026-05-27	
$\boxtimes$	AGC-ER-E037	Signal Generator	Agilent	N5182A	MY50140530	2024-05-23	2025-05-22	
	AGC-EM-A139	6dB Attenuator	Eeatsheep	LM-XX-6-5W	N/A	2023-06-09	2025-06-08	
$\boxtimes$	AGC-EM-A088	UHF Filter	Microwave	N26460M1	498705	2024-05-23	2025-05-22	
	AGC-EM-A089	VHF Filter	Microwave	N25155M2	498703	2024-05-23	2025-05-22	



Page 13 of 50

Test Software						
Used	Equipment No.	Test Equipment	Manufacturer	Model No.	Version Information	
$\boxtimes$	AGC-EM-S004	RE Test System	Tonscend	TS <sup>+</sup> Ver2.1(JS32-RE)	4.0.0.0	



Page 14 of 50

# 4. System Test Configuration

## 4.1 EUT Configuration

The EUT configuration for testing is installed on RF field strength measurement to meet the Commission's requirement and operating in a manner which intends to maximize its emission characteristics in a continuous normal application.

#### 4.2 EUT Exercise

The Transmitter was operated in the normal operating mode. The TX frequency was fixed which was for the purpose of the measurements.

## 4.3 Configuration of Tested System

Fig. 2-1 Configuration of Tested System



Table 2-1 Equipment Used in Tested System

## 4.4 Equipment Used in Tested System

Th The following peripheral devices and interface cables were connected during the measurement:

☐ Test Accessories Come From The Laboratory

No.	Equipment	Model No.	Manufacturer	Specification Information	Cable
1	Load Antenna	HG-E10	Amphenol	Terminator DC -3G 50W	

# 

No.	Equipment	Model No.	Manufacturer	Specification Information	Cable
1	Hand microphone	N/A	N/A	N/A	0.8m unshielded
2	Power Line	N/A	N/A	N/A	1.5m unshielded



Page 15 of 50

## 4.5 Summary of Test Results

Item	FCC Rules	Description of Test	Result
1	FCC 47 CFR PART 95	Antenna Equipment	Pass
2	§ 95.1767& 2.1046(a)	Maximum Transmitter Power	Pass
3	§95.1775& 2.1047(a) (b)	Modulation Limit	Pass
4	§95.1775& 2.1047(a)	Audio Frequency Response	Pass
4	§95.1775(e)	Audio Low Pass Filter Response	Pass
5	§95.1773& 2.1049	26dB Emission Bandwidth and 99% Occupied Bandwidth	Pass
6	§95.1779& 2.1049	Emission Mask	Pass
7	§95.1765& 2.1055(a) (1)	Frequency Stability	Pass
9	§95.1779& 2.1051	Spurious Emission on Antenna Port	Pass
10	§95.1779& 2.1053	Spurious Radiated Emission	Pass



Page 16 of 50

## 5. Description of Test Modes

The EUT (**Mobile Radio**) has been tested under normal operating condition. (GMRS TX) are chosen for testing at each channel separation.

No.	Test Mode Description	Channel Separation
1	GMRS TX Channel 4	12.5 kHz/25 kHz
2	GMRS TX Channel 19	12.5 kHz/25 kHz
3	GMRS TX Channel 27	12.5 kHz/25 kHz

#### Note:

- 1. Only the result of the worst case was recorded in the report, if no other cases.
- 2. For Radiated Emission, 3axis were chosen for testing for each applicable mode.
- 3. Manufacturers use computer PC programming software to switch and operate frequency points, refer to the instructions for details



Report No.: AGC01284240602FR01 Page 17 of 50

6. Frequency Stability

#### 6.1 Provisions Applicable

Standard Applicable [Part 95.1765] The carrier frequency stability is the ability of the transmitter to maintain an assigned carrier frequency.

- The carrier frequency of each GMRS transmitter transmitting an emission with an occupied bandwidth of 12.5 kHz or less must remain within 2.5 ppm
- The carrier frequency of each GMRS transmitter transmitting an emission with an occupied bandwidth greater than 12.5 kHz must remain within 5 ppm

## **6.2 Measurement Procedure**


#### 6.2.1 Frequency stability versus environmental temperature

- 1. Setup the configuration per figure 1 for frequencies measurement inside an environment chamber, Install new battery in the EUT.
- 2. Turn on EUT and set SA center frequency to the EUT radiated frequency. Set SA Resolution Bandwidth to 1kHz and Video Resolution Bandwidth to 1kHz and Frequency Span to 50kHz.Record this frequency as reference frequency.
- 3. Set the temperature of chamber to 50°C. Allow sufficient time (approximately 30 min) for the temperature of the chamber to stabilize. While maintaining a constant temperature inside the chamber, turn the EUT on and measure the EUT operating frequency.
- 4. Repeat step 2 with a 10℃ decreased per stage until the lowest temperature -30℃ is measured, record all measured frequencies on each temperature step.

#### 6.2.2 Frequency stability versus input voltage

- Setup the configuration per figure 1 for frequencies measured at temperature if it is within 15℃ to 25℃.
   Otherwise, an environment chamber set for a temperature of 20℃ shall be used. The EUT shall be powered by DC 7.4V.
- Set SA center frequency to the EUT radiated frequency. Set SA Resolution Bandwidth to 1 kHz and Video Resolution Bandwidth to 1kHz. Record this frequency as reference frequency.
- 3. Supply the EUT primary voltage at the operating end point which is specified by manufacturer and record the frequency.

#### 6.3 Measurement Setup

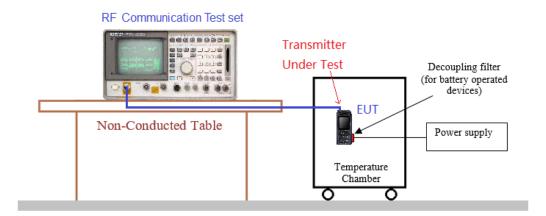



Report No.: AGC01284240602FR01 Page 18 of 50

#### 6.4 Measurement Result

12.5 kHz Channel Separation, FM modulation, Assigned Frequency For GMRS						
Test conditions			Frequency error (p	pm)		
Voltage	Temp		Test Frequency (M	Hz)	Limit (ppm)	Result
(V)	(℃)	462.6375	462.6500	467.6500	(ррііі)	
	-30	0.840	0.812	0.564		
	-20	0.885	0.730	0.887		
	-10	0.956	0.625	0.554		
	0	0.651	0.983	0.585		
13.8	10	0.683	0.837	0.795		
	20	0.520	0.815	0.945	2.5	Pass
	30	0.690	0.712	0.808		
	40	0.779	0.986	0.854		
	50	0.537	0.594	0.534		
15.87	20	0.555	0.596	0.714		
11.73	20	0.744	0.700	0.863		

	25 kHz Channel Separation, FM modulation, Assigned Frequency For GMRS					
Test conditions			Frequency error (p	pm)	Limete	
Voltage	Temp		Test Frequency (M	Hz)	Limit (ppm)	Result
(V)	(℃)	462.6375	462.6500	467.6500	(PPIII)	
	-30	1.085	1.014	0.547		
	-20	1.100	0.884	0.781		
	-10	0.798	0.731	0.995	5	Pass
	0	0.623	1.032	0.852		
13.8	10	0.856	0.629	0.975		
	20	1.093	0.906	0.526		
	30	0.702	0.508	1.075		
	40	0.535	1.007	0.770		
	50	0.962	0.922	0.584		
15.87	20	1.069	0.789	0.790		
11.73	20	0.886	0.708	0.903		



Report No.: AGC01284240602FR01 Page 19 of 50

## 7. 26dB Emission Bandwidth and 99% Occupied Bandwidth

## 7.1 Provisions Applicable

FCC Part 95.1773: GMRS Main channels: the authorized bandwidth is 20 kHz for GMRS transmitters operating on any of the 462 MHz main channels, or any of the 467 MHz main channels.


## Interstitial channels:

The authorized bandwidth is 20 kHz for GMRS transmitters operating on any of the 462 MHz interstitial channels, and is 12.5 kHz for GMRS transmitters operating on any of the 467 MHz interstitial channels. Occupied Bandwidth: The EUT was connected to the audio signal generator and the spectrum analyzer via the main RF connector, and through an appropriate attenuator. The EUT was controlled to transmit its maximum power. Then the bandwidth of 99% power can be measured by the spectrum analyzer.

#### 7.2 Measurement Procedure

- The EUT was modulated by 2.5kHz sine wave audio signal; the level of the audio signal employed is 16dB greater than that necessary to produce 50% of rated system deviation.
- 2. For rated system deviation is 2.5 kHz for 12.5kHz channel spacing.
- 3. For rated system deviation is 3.0 kHz for 25kHz channel spacing.
- 4. Spectrum set as follow:
- 5. Centre frequency = Fundamental Frequency
- 6. Span=50kHz for 12.5kHz Channel Spacing, RBW=300Hz, VBW=1kHz, Sweep = Auto.
- 7. Span=50kHz for 25kHz Channel Spacing, RBW=300Hz, VBW=1kHz, Sweep = Auto.
- 8. Detector Function = Peak, Trace = Max Hold
- 9. Set 99% Occupied Bandwidth and 26dB Emission Bandwidth.
- 10. Measure and record the results in the test report.

#### 7.3 Measurement Setup

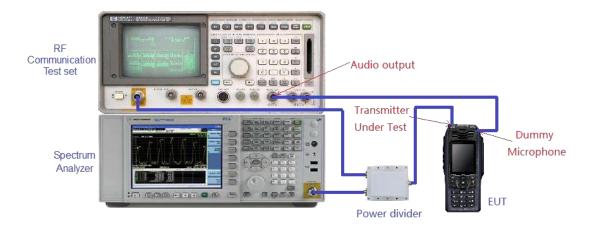




Page 20 of 50


## 7.4 Measurement Result

Emission Bandwidth Measurement Result-GMRS						
Operating Frequency		12.5 kHz Channel Sepai	ration			
(MHz)	Occupied Bandwidth (kHz)	Emission Bandwidth (kHz)	Limits (kHz)	Result		
462.6375	10.034	10.54	20.0	Pass		
462.6500	10.031	10.54	20.0	Pass		
467.6500	10.032	10.54	20.0	Pass		
Operating Frequency	25 kHz Channel Separation					
(MHz)	Occupied Bandwidth (kHz)	Emission Bandwidth (kHz)	Limits (kHz)	Result		
462.6375	15.073	15.64	20.0	Pass		
462.6500	15.073	15.64	20.0	Pass		
467.6500	15.072	15.64	20.0	Pass		





# Test plot as follows:

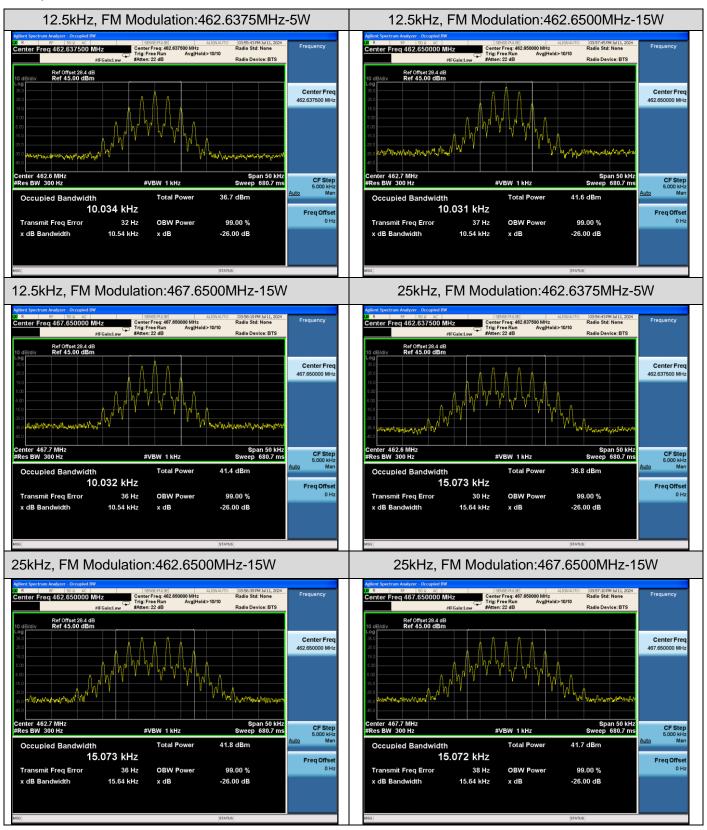

Any report having not been signed by authorized approver, or having been altered without authorization, or having not been stamped by the "Dedicated Testing/Inspection Stamp" is deemed to be invalid. Copying or excerpting portion of, or altering the content of the report is not permitted without the written authorization of AGC. The test results presented in the report apply only to the tested sample. Any objections to report issued by AGC should be submitted to AGC within 15days after the issuance of the test report. Further enquiry of validity or verification of the test report should be addressed to AGC by agc01@agccert.com.



Report No.: AGC01284240602FR01 Page 22 of 50

## 8. Spurious Radiated Emission

#### 8.1 Provisions Applicable

Standard Applicable [FCC Part 95.1779] According to FCC section 95.1779, the unwanted emission should be attenuated below TP by at least 43+10 log (Transmit Power) dB

#### 8.2 Measurement Procedure

Each GMRS transmitter type must be designed to comply with the applicable unwanted emissions limits in this section

a) Emission masks. Emission masks applicable to transmitting equipment in the GMRS are defined by the requirements in the following table. The numbers in the attenuation requirements column refer to rule paragraph numbers under paragraph (b) of this section.

Emission types filter	Attenuation requirements
A1D, A3E, F1D, G1D, F2D, F3E, G3E with audio filter	(1), (2), (7)
A1D, A3E, F1D, G1D, F3E, G3E without audio filter	(3), (4), (7)
H1D, J1D, R1D, H3E, J3E, R2E	(5), (6), (7)

- 1) Filtering noted for GMRS transmitters refers to the requirement in §95.1775(e).
- 2) Unwanted emission power may be measured as either mean power or peak envelope power, provided that the transmitter output power is measured the same way.
- b) Attenuation requirements. The power of unwanted emissions must be attenuated below the transmitter output power in Watts (P) by at least:
- 1) 25 dB (decibels) on any frequency removed from the center of the authorized bandwidth by more than 50% up to and including 100% of the authorized bandwidth.
- 2) 35 dB on any frequency removed from the center of the authorized bandwidth by more than 100% up to and including 250% of the authorized bandwidth.
- 3) 83 log (fd ÷ 5) dB on any frequency removed from the center of the authorized bandwidth by a displacement frequency (fd in kHz) of more than 5 kHz up to and including 10 kHz.
- 4) 116 log (fd ÷ 6.1) dB or 50 + 10 log (P) dB, whichever is the lesser attenuation, on any frequency removed from the center of the authorized bandwidth by a displacement frequency (fd in kHz), of more than 10 kHz up to and including 250% of the authorized bandwidth.
- 5) 25 dB on any frequency removed from the center of the authorized bandwidth by more than 50% up to and including 150% of the authorized bandwidth.
- 6) 35 dB on any frequency removed from the center of the authorized bandwidth by more than 150% up to and including 250% of the authorized bandwidth.
- 7) 43 + 10 log (P) dB on any frequency removed from the center of the authorized bandwidth by more than 250%.



Page 23 of 50

#### **Detailed Overview of the Test Method is as Follows:**


- 1) EUT was placed on a 0.8 or 1.5meter high non-conductive stand at a 3 meter test distance from the receive antenna. A receiving antenna was placed on the antenna mast 3 meters from the EUT for emission measurements. The disturbance of the transmitter was maximized on the test receiver display by raising and lowering from 1m to 4m the receive antenna and by rotating through 360° the turntable. After the fundamental emission was maximized, a field strength measurement was made. The radiated emission measurements of all transmit frequencies in all channels were measured with peak detector.
- 2) A log-periodic antenna or double-ridged waveguide horn antenna shall be substituted in place of the EUT. The log-periodic antenna will be driven by a signal generator and the level will be adjusted till the same power value on the spectrum analyzer or receiver. The level of the spurious emissions can be calculated through the level of the signal generator, cable loss, the gain of the substitution antenna and the reading of the spectrum analyzer or receiver.
- The EUT is then put into continuously transmitting mode at its maximum power level during the test. Set 3) Test Receiver or Spectrum RBW=1MHz, VBW=3MHz for above 1GHz and RBW=100kHz, VBW=300kHz for 30MHz to 1GHz, And the maximum value of the receiver should be recorded as (Pr).
- The EUT shall be replaced by a substitution antenna. In the chamber, an substitution antenna for the frequency band of interest is placed at the reference point of the chamber. An RF Signal source for the frequency band of interest is connected to the substitution antenna with a cable that has been constructed to not interfere with the radiation pattern of the antenna. A power (PMea) is applied to the input of the substitution antenna, and adjust the level of the signal generator output until the value of the receiver reach the previously recorded (Pr). The power of signal source (PMea) is recorded. The test should be performed by rotating the test item and adjusting the receiving antenna polarization.
- 5) A amplifier should be connected to the Signal Source output port. And the cable should be connect between the Amplifier and the Substitution Antenna. The cable loss (PcI), the Substitution Antenna Gain (Ga) and the Amplifier Gain (PAg) should be recorded after test
- The measurement results are obtained as described below: Power(EIRP)=PMea- PAg Pcl Ga The 6) measurement results are amend as described below:Power(EIRP)=PMea- Pcl - Ga
- 7) This value is EIRP since the measurement is calibrated using an antenna of known gain (2.15 dBi) and known input power.
- ERP can be calculated from EIRP by subtracting the gain of the dipole, ERP = EIRP-2.15dBi. 8)
- Test the EUT in the lowest channel, the middle channel the Highest channel


#### 8.3 Measurement Setup







## Radiated Emissions 30MHz to 1GHz Test setup

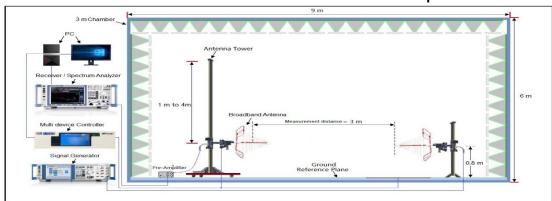

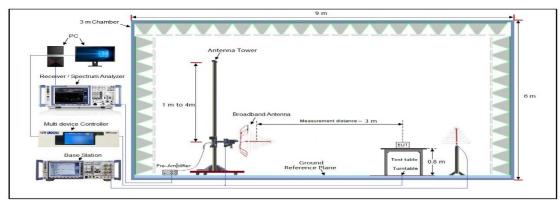

# **Radiated Emissions Above 1GHz Test setup**

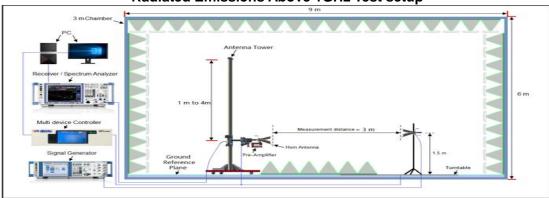

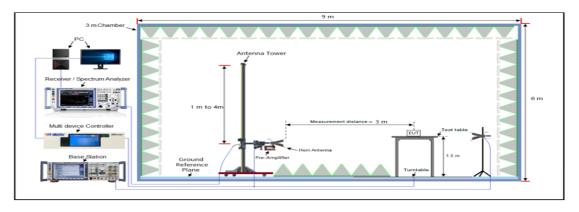



Page 25 of 50


#### 8.4 Measurement Result

Preliminary calculation	Final Result		
At least 43+10 log (P) =43+10log (5) =49.99 (dB)	Limit=P- Preliminary calculation=36.99-49.99=-13 dBm		
At least 43+10 log (P) =43+10log (15) =54.76 (dB)	Limit=P- Preliminary calculation=41.76-54.74=-13 dBm		


- 1. Factor=Antenna Factor + Cable loss. (Below 1GHz)
- 2. Factor=Antenna Factor+ Cable loss -Pre-amplifier. (Above 1 GHz)
- 3. Margin=Limit- Level






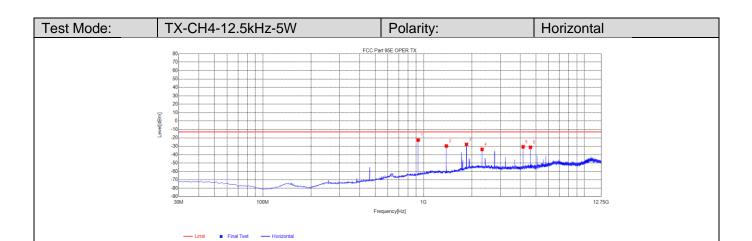


NO.	Freq. [MHz]	Reading [dBm]	Level [dBm]	Limit [dBm]	Margin [dB]	Factor [dB]	Angle [°]	Polarity
1	926.28	-60.77	-22.72	-13.00	9.72	38.05	194	Horizontal
2	1387.7888	-25.63	-29.74	-13.00	16.74	-4.11	168	Horizontal
3	1850.7851	-28.07	-27.89	-13.00	14.89	0.18	290	Horizontal
4	2313.7814	-36.07	-33.73	-13.00	20.73	2.34	290	Horizontal
5	4163.4163	-33.88	-30.75	-13.00	17.75	3.13	308	Horizontal
6	4626.4126	-35.83	-31.26	-13.00	18.26	4.57	316	Horizontal

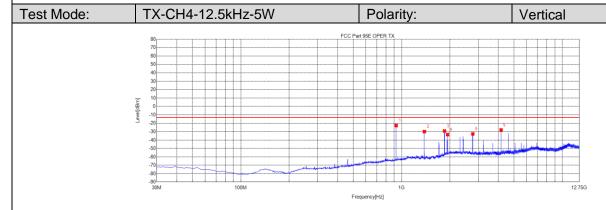


NO.	Freq. [MHz]	Reading [dBm]	Level [dBm]	Limit [dBm]	Margin [dB]	Factor [dB]	Angle [°]	Polarity
1	926.28	-60.74	-22.69	-13.00	9.69	38.05	114	Vertical
2	1387.7888	-25.78	-29.89	-13.00	16.89	-4.11	278	Vertical
3	1850.7851	-29.33	-29.15	-13.00	16.15	0.18	262	Vertical
4	1933.0433	-34.64	-33.44	-13.00	20.44	1.20	236	Vertical
5	2775.6026	-34.59	-32.62	-13.00	19.62	1.97	314	Vertical
6	4163.4163	-31.06	-27.93	-13.00	14.93	3.13	349	Vertical





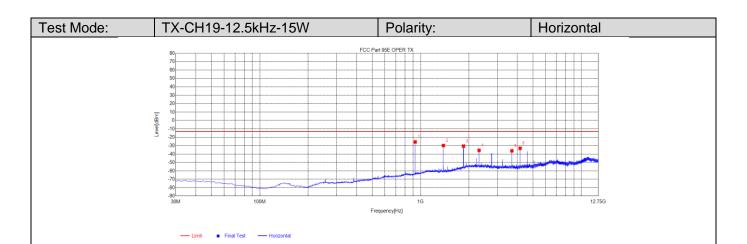


NO.	Freq. [MHz]	Reading [dBm]	Level [dBm]	Limit [dBm]	Margin [dB]	Factor [dB]	Angle [°]	Polarity
1	926.28	-63.56	-25.51	-13.00	12.51	38.05	200	Horizontal
2	1387.7888	-25.66	-29.77	-13.00	16.77	-4.11	182	Horizontal
3	1850.7851	-30.66	-30.48	-13.00	17.48	0.18	330	Horizontal
4	2313.7814	-37.89	-35.55	-13.00	22.55	2.34	360	Horizontal
5	3701.5952	-38.49	-36.12	-13.00	23.12	2.37	312	Horizontal
6	4163.4163	-36.23	-33.10	-13.00	20.10	3.13	338	Horizontal

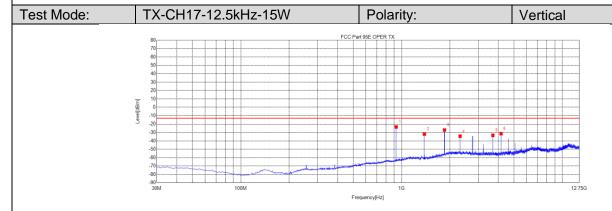


NO.	Freq. [MHz]	Reading [dBm]	Level [dBm]	Limit [dBm]	Margin [dB]	Factor [dB]	Angle [°]	Polarity
1	926.28	-61.44	-23.39	-13.00	10.39	38.05	126	Vertical
2	1387.7888	-27.78	-31.89	-13.00	18.89	-4.11	22	Vertical
3	1850.7851	-27.22	-27.04	-13.00	14.04	0.18	228	Vertical
4	2313.7814	-36.72	-34.38	-13.00	21.38	2.34	274	Vertical
5	3701.5952	-35.72	-33.35	-13.00	20.35	2.37	274	Vertical
6	4163.4163	-34.52	-31.39	-13.00	18.39	3.13	30	Vertical






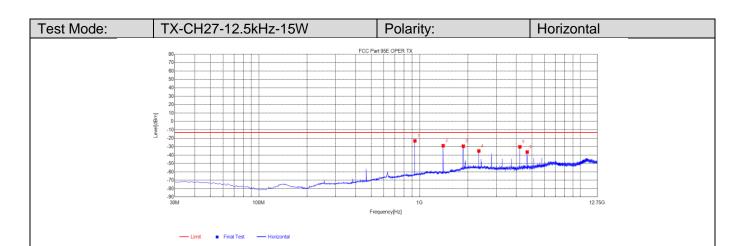


NO.	Freq. [MHz]	Reading [dBm]	Level [dBm]	Limit [dBm]	Margin [dB]	Factor [dB]	Angle [°]	Polarity
1	935.98	-61.30	-23.06	-13.00	10.06	38.24	200	Horizontal
2	1403.0653	-24.78	-28.89	-13.00	15.89	-4.11	182	Horizontal
3	1870.7621	-29.80	-29.37	-13.00	16.37	0.43	288	Horizontal
4	2338.4588	-37.48	-35.11	-13.00	22.11	2.37	298	Horizontal
5	4209.2459	-33.50	-30.19	-13.00	17.19	3.31	324	Horizontal
6	4676.9427	-40.95	-36.33	-13.00	23.33	4.62	324	Horizontal

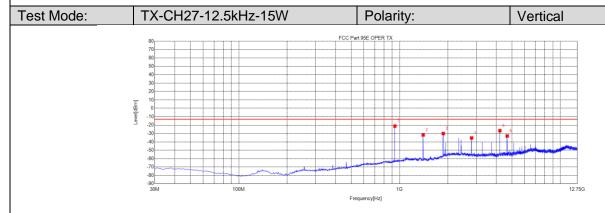


NO.	Freq. [MHz]	Reading [dBm]	Level [dBm]	Limit [dBm]	Margin [dB]	Factor [dB]	Angle [°]	Polarity
1	935.98	-59.45	-21.21	-13.00	8.21	38.24	122	Vertical
2	1403.0653	-27.71	-31.82	-13.00	18.82	-4.11	104	Vertical
3	1870.7621	-30.50	-30.07	-13.00	17.07	0.43	76	Vertical
4	2806.1556	-37.29	-35.38	-13.00	22.38	1.91	94	Vertical
5	4209.2459	-30.00	-26.69	-13.00	13.69	3.31	60	Vertical
6	4676.9427	-37.60	-32.98	-13.00	19.98	4.62	192	Vertical





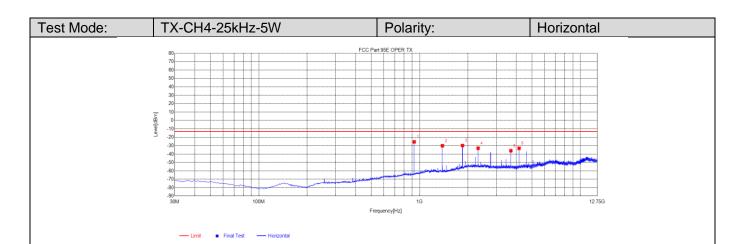


NO.	Freq. [MHz]	Reading [dBm]	Level [dBm]	Limit [dBm]	Margin [dB]	Factor [dB]	Angle [°]	Polarity
1	926.28	-63.47	-25.42	-13.00	12.42	38.05	200	Horizontal
2	1387.7888	-25.94	-30.05	-13.00	17.05	-4.11	182	Horizontal
3	1850.7851	-29.99	-29.81	-13.00	16.81	0.18	338	Horizontal
4	2313.7814	-35.32	-32.98	-13.00	19.98	2.34	1	Horizontal
5	3701.5952	-38.38	-36.01	-13.00	23.01	2.37	304	Horizontal
6	4163.4163	-36.18	-33.05	-13.00	20.05	3.13	338	Horizontal

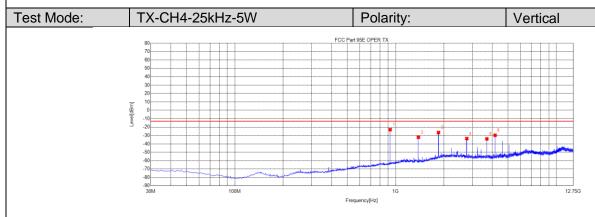


NO.	Freq. [MHz]	Reading [dBm]	Level [dBm]	Limit [dBm]	Margin [dB]	Factor [dB]	Angle [°]	Polarity
1	926.28	-61.11	-23.06	-13.00	10.06	38.05	118	Vertical
2	1387.7888	-27.99	-32.10	-13.00	19.10	-4.11	24	Vertical
3	1850.7851	-26.71	-26.53	-13.00	13.53	0.18	230	Vertical
4	2775.6026	-35.67	-33.70	-13.00	20.70	1.97	266	Vertical
5	3701.5952	-36.41	-34.04	-13.00	21.04	2.37	266	Vertical
6	4163.4163	-32.90	-29.77	-13.00	16.77	3.13	42	Vertical





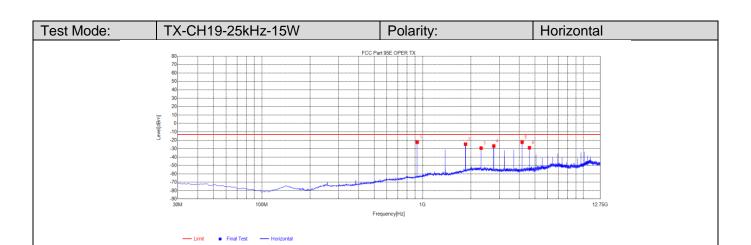


NO.	Freq. [MHz]	Reading [dBm]	Level [dBm]	Limit [dBm]	Margin [dB]	Factor [dB]	Angle [°]	Polarity
1	926.28	-60.29	-22.24	-13.00	9.24	38.05	198	Horizontal
2	1850.7851	-24.78	-24.60	-13.00	11.60	0.18	334	Horizontal
3	2313.7814	-31.61	-29.27	-13.00	16.27	2.34	334	Horizontal
4	2775.6026	-28.70	-26.73	-13.00	13.73	1.97	86	Horizontal
5	4164.5915	-25.35	-22.21	-13.00	9.21	3.14	326	Horizontal
6	4626.4126	-33.42	-28.85	-13.00	15.85	4.57	326	Horizontal

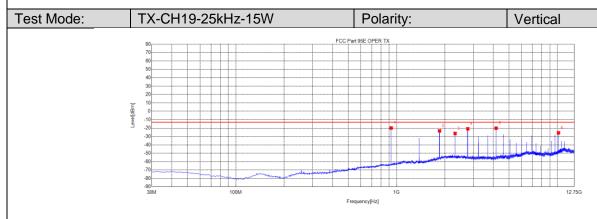


NO.	Freq. [MHz]	Reading [dBm]	Level [dBm]	Limit [dBm]	Margin [dB]	Factor [dB]	Angle [°]	Polarity
1	926.28	-57.93	-19.88	-13.00	6.88	38.05	126	Vertical
2	1850.7851	-23.50	-23.32	-13.00	10.32	0.18	230	Vertical
3	2313.7814	-28.74	-26.40	-13.00	13.40	2.34	274	Vertical
4	2775.6026	-22.81	-20.84	-13.00	7.84	1.97	284	Vertical
5	4164.5915	-23.23	-20.09	-13.00	7.09	3.14	34	Vertical
6	10178.8429	-37.06	-25.64	-13.00	12.64	11.42	359	Vertical





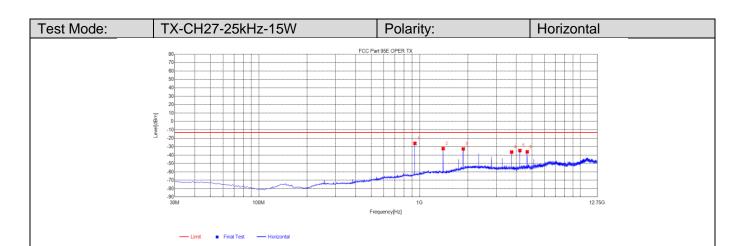

NO.	Freq. [MHz]	Reading [dBm]	Level [dBm]	Limit [dBm]	Margin [dB]	Factor [dB]	Angle [°]	Polarity
1	935.98	-64.26	-26.02	-13.00	13.02	38.24	204	Horizontal
2	1403.0653	-28.16	-32.27	-13.00	19.27	-4.11	186	Horizontal
3	1870.7621	-33.07	-32.64	-13.00	19.64	0.43	308	Horizontal
4	3741.5492	-38.74	-36.35	-13.00	23.35	2.39	308	Horizontal
5	4209.2459	-37.93	-34.62	-13.00	21.62	3.31	316	Horizontal
6	4676.9427	-40.76	-36.14	-13.00	23.14	4.62	324	Horizontal

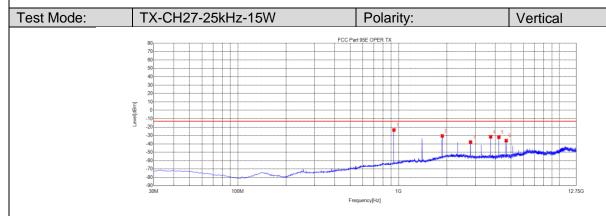

NO.	Freq. [MHz]	Reading [dBm]	Level [dBm]	Limit [dBm]	Margin [dB]	Factor [dB]	Angle [°]	Polarity
1	935.98	-61.75	-23.51	-13.00	10.51	38.24	132	Vertical
2	1870.7621	-31.00	-30.57	-13.00	17.57	0.43	238	Vertical
3	2806.1556	-39.79	-37.88	-13.00	24.88	1.91	288	Vertical
4	3741.5492	-34.00	-31.61	-13.00	18.61	2.39	0	Vertical
5	4209.2459	-35.37	-32.06	-13.00	19.06	3.31	28	Vertical
6	4676.9427	-40.88	-36.26	-13.00	23.26	4.62	186	Vertical

Web: http://www.agccert.com/





Report No.: AGC01284240602FR01 Page 32 of 50

#### 8.5 Emission Mask Measurement Part

The detailed procedure employed for Emission Mask measurements are specified as following:


- -Connect the equipment as illustrated.
- -Spectrum set as follow:
- Centre frequency = fundamental frequency, Span=150kHz for 12.5kHz and 25kHz channel spacing, RBW=300Hz, VBW=1000Hz for 12.5kHz, RBW=300Hz, VBW=1000Hz for 25kHz, Sweep = auto, Detector function = peak, Trace = max hold
- 2. Key the transmitter, and set the level of the unmodulated carrier to a full scale reference line. This is the 0dB reference for the measurement.
- 3. Modulate the transmitter with a 2500 Hz sine wave at an input level 16 dB greater than that necessary to produce 50% of rated system deviation (Rated system deviation is 2.5 kHz for 12.5kHz channel spacing).
  The input level shall be established at the frequency of maximum response of the audio modulating circuit.
- 4. Transmitters employing digital modulation techniques that bypass the limiter and the audio low-pass filter shall be modulated as specified by the manufacturer.
- 5. Measure and record the results in the test report.

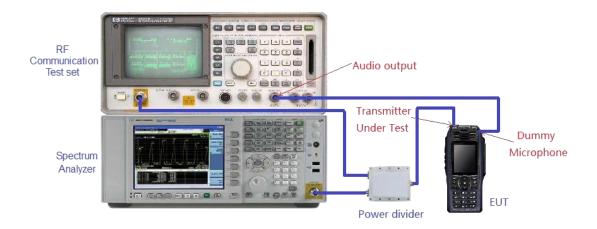





## Test plot as follows:

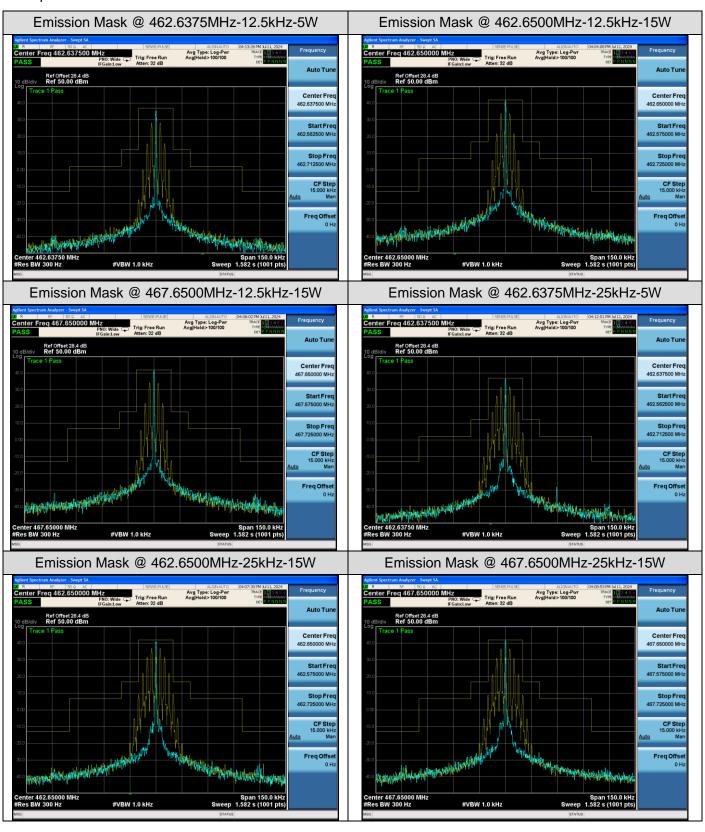



Report No.: AGC01284240602FR01 Page 34 of 50

#### 9. Modulation Characteristics

#### 9.1 Provisions Applicable

According to FCC§2.1047 and §95.1775, for Voice Modulation Communication Equipment, the frequency response of the audio modulation circuit over a range of 100 to 5000Hz shall be measured.

Each GMRS transmitter type must be designed to satisfy the modulation requirements in this section. Operation of GMRS stations must also be in compliance with these requirements.

- (a) Main channels. The peak frequency deviation for emissions to be transmitted on the main channels must not exceed  $\pm$  5 kHz.
- (b) 462 MHz interstitial channels. The peak frequency deviation for emissions to be transmitted on the 462 MHz interstitial channels must not exceed  $\pm$  5 kHz.
- (c) 467 MHz interstitial channels. The peak frequency deviation for emissions to be transmitted on the 467 MHz interstitial channels must not exceed  $\pm$  2.5 kHz, and the highest audio frequency contributing substantially to modulation must not exceed 3.125 kHz.

#### 9.2 Measurement Procedure


#### Modulation Limit


- 1. Test layout and build equipment as shown below.
- 2. adjust the audio input for 60% of rated system deviation at 1kHz using this level as a reference (0dB).
- 3. Vary the input level from -20 to +20dB.
- 4. Record the frequency deviation obtained as a function of the input level.
- 5. Repeat step 2 with input frequency changing to 300, 1000, 1500 and 3000Hz in sequence.

#### Audio Frequency Response

- 1. Test layout and build equipment as shown below.
- 2. Adjust the audio input for 20% of rated system deviation at 1 kHz using this level as a reference (0 dB).
- 3. Vary the Audio frequency from 100 Hz to 10 kHz and record the frequency deviation.
- 4. Audio Frequency Response = 20log10 (Deviation of test frequency/Deviation of 1 kHz reference).

## 9.3 Measurement Setup

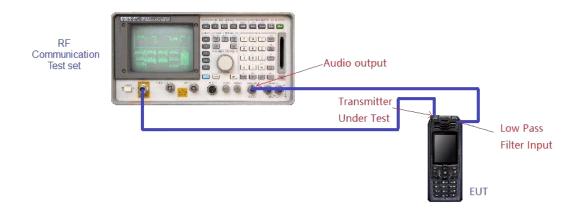







#### 9.4 Measurement Result

#### A. Modulation Limit:

12.5kHz, FM modulation, Assigned Frequency:462.6500MHz-15W						
Modulation Level (dB)	Peak Freq. Deviation At 300 Hz (kHz)	Peak Freq. Deviation At 1000 Hz (kHz)	Peak Freq. Deviation At 1500 Hz (kHz)	Peak Freq. Deviation At 3000 Hz (kHz)		
-20	0.46	0.82	1.15	1.35		
-15	0.74	1.03	1.38	1.63		
-10	0.96	1.21	1.49	1.78		
-5	1.05	1.32	1.53	1.84		
0	1.23	1.50	1.66	1.88		
+5	1.34	1.66	1.78	1.91		
+10	1.51	1.68	1.85	1.96		
+15	1.53	1.74	1.94	2.05		
+20	1.49	1.63	1.89	2.01		

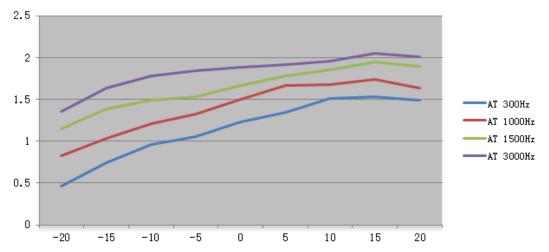


Note: All the modes had been tested, but only the worst data recorded in the report





25kHz, FM modulation, Assigned Frequency:462.6500MHz-15W						
Modulation Level (dB)	Peak Freq. Deviation At 300 Hz (kHz)	Peak Freq. Deviation At 1000 Hz (kHz)	Peak Freq. Deviation At 1500 Hz (kHz)	Peak Freq. Deviation At 3000 Hz (kHz)		
-20	0.52	0.89	1.36	1.74		
-15	0.74	1.21	1.78	2.14		
-10	0.91	1.35	1.63	2.35		
-5	1.02	1.42	2.09	2.52		
0	1.23	1.78	2.16	2.61		
+5	1.26	1.96	2.38	3.05		
+10	1.34	2.13	2.47	3.11		
+15	1.42	2.24	2.85	3.25		
+20	1.39	2.21	2.78	3.21		

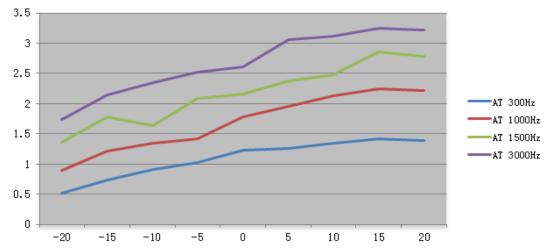


Note: All the modes had been tested, but only the worst data recorded in the report




# B. Audio Frequency Response:

12.5kHz, Analog modulation, Assigned Frequency:462.6500MHz-15W			
Frequency (Hz)	Deviation (kHz)	Audio Frequency Response(dB)	
100			
200			
300	0.16	-13.76	
400	0.24	-10.24	
500	0.35	-6.96	
600	0.39	-6.02	
700	0.45	-4.78	
800	0.58	-2.57	
900	0.61	-2.14	
1000	0.78	0.00	
1200	0.89	1.15	
1400	0.96	1.80	
1600	1.08	2.83	
1800	1.16	3.45	
2000	1.36	4.83	
2400	1.45	5.39	
2500	1.74	6.97	
2800	1.89	7.69	
3000	2.06	8.44	

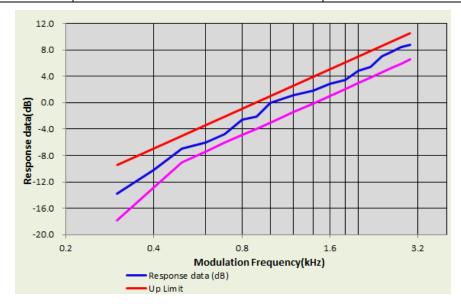


Note: All the modes had been tested, but only the worst data recorded in the report.





25kHz, Analog modulation, Assigned Frequency:462.6500MHz-15W				
Frequency (Hz)	Deviation (kHz)	Audio Frequency Response(dB)		
100				
200				
300	0.21	-12.14		
400	0.3	-9.05		
500	0.42	-6.12		
600	0.45	-5.52		
700	0.51	-4.44		
800	0.63	-2.60		
900	0.71	-1.56		
1000	0.85	0.00		
1200	0.91	0.59		
1400	1.05	1.84		
1600	1.15	2.63		
1800	1.38	4.21		
2000	1.52	5.05		
2400	1.66	5.81		
2500	1.84	6.71		
2800	1.96	7.26		
3000	2.05	7.65		

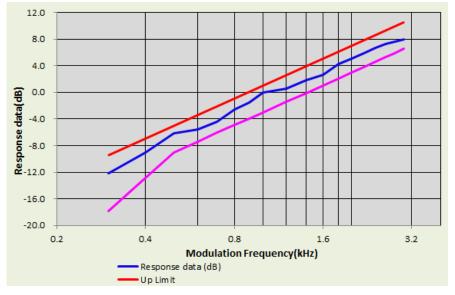

Note: All the modes had been tested, but only the worst data recorded in the report.



Page 39 of 50

#### 10. Maximum Transmitter Power

### 10.1 Provisions Applicable

FCC Part 95.1767 For GMRS, the maximum permissible transmitter output power effective radiated power (E.R.P.) as follows.

This section contains transmitting power limits for GMRS stations. The maximum transmitting power depends on which channels are being used and the type of station.

462/467 MHz main channels. The limits in this paragraph apply to stations transmitting on any of the 462 MHz main channels or any of the 467 MHz main channels. Each GMRS transmitter type must be capable of operating within the allowable power range. GMRS licensees are responsible for ensuring that their GMRS stations operate in compliance with these limits.

The transmitter output power of mobile, repeater and base stations must not exceed 50 Watts.


The transmitter output power of fixed stations must not exceed 15 Watts.

462 MHz interstitial channels. The effective radiated power (ERP) of mobile, hand-held portable and base stations transmitting on the 462 MHz interstitial channels must not exceed 5 Watts.

(467 MHz interstitial channels. The effective radiated power (ERP) of hand-held portable units transmitting on the 467 MHz interstitial channels must not exceed 0.5 Watt. Each GMRS transmitter type capable of transmitting on these channels must be designed such that the ERP does not exceed 0.5 Watt.

#### **10.2 Measurement Procedure**

- 1. EUT was placed on a 0.8 or 1.5meter high non-conductive stand at a 3 meter test distance from the receive antenna. A receiving antenna was placed on the antenna mast 3 meters from the EUT for emission measurements. The disturbance of the transmitter was maximized on the test receiver display by raising and lowering from 1m to 4m the receive antenna and by rotating through 360° the turntable. After the fundamental emission was maximized, a field strength measurement was made. The radiated emission measurements of all transmit frequencies in all channels were measured with peak detector.
- 2. A log-periodic antenna or double-ridged waveguide horn antenna shall be substituted in place of the EUT. The log-periodic antenna will be driven by a signal generator and the level will be adjusted till the same power value on the spectrum analyzer or receiver. The level of the spurious emissions can be calculated through the level of the signal generator, cable loss, the gain of the substitution antenna and the reading of the spectrum analyzer or receiver.
- 3. The EUT is then put into continuously transmitting mode at its maximum power level during the test. Set Test Receiver or Spectrum RBW=1MHz, VBW=3MHz for above 1GHz and RBW=100kHz, VBW=300kHz for 30MHz to 1GHz, And the maximum value of the receiver should be recorded as (Pr).
- 4. The EUT shall be replaced by a substitution antenna. In the chamber, an substitution antenna for the frequency band of interest is placed at the reference point of the chamber. An RF Signal source for the frequency band of interest is connected to the substitution antenna with a cable that has been constructed to not interfere with the radiation pattern of the antenna. A power (PMea) is applied to the input of the






substitution antenna, and adjust the level of the signal generator output until the value of the receiver reach the previously recorded ( $P_r$ ). The power of signal source ( $P_{Mea}$ ) is recorded. The test should be performed by rotating the test item and adjusting the receiving antenna polarization.

- 5. A amplifier should be connected to the Signal Source output port. And the cable should be connect between the Amplifier and the Substitution Antenna. The cable loss (PcI), the Substitution Antenna Gain (Ga) and the Amplifier Gain (PAg) should be recorded after test
- 6. The measurement results are obtained as described below: Power(EIRP)= $P_{Mea}$   $P_{Ag}$   $P_{cl}$   $P_{ag}$   $P_{ag}$   $P_{cl}$   $P_{ag}$   $P_{cl}$   $P_{ag}$   $P_{$
- 7. This value is EIRP since the measurement is calibrated using an antenna of known gain (2.15 dBi) and known input power.
- 8. ERP can be calculated from EIRP by subtracting the gain of the dipole, ERP = EIRP-2.15dBi.
- 9. Test the EUT in the lowest channel, the middle channel the Highest channel

### 10.3 Measurement Setup

⊠Conducted Output Power:

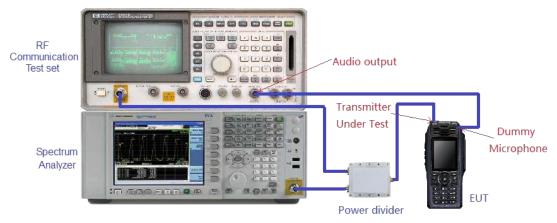



⊠Effective Radiated Power:







## **Radiated Below 1GHz**

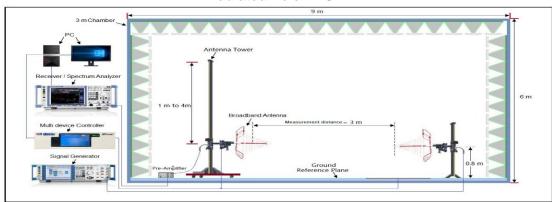

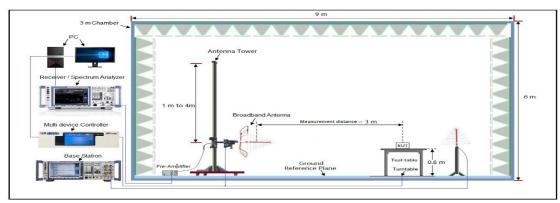

# **Radiated Above 1 GHz**

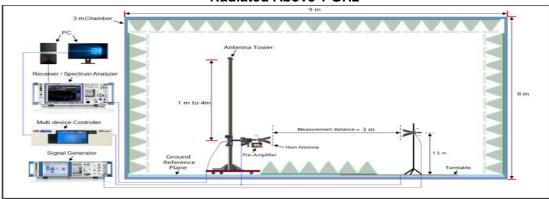

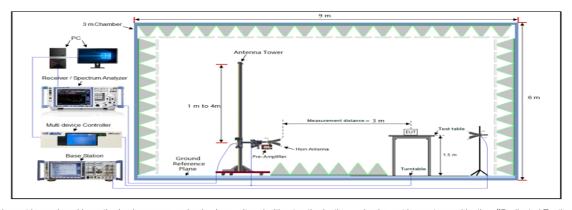



Page 42 of 50

### 10.4 Measurement Result

### ERP Result:

Frequency	Reading Level	Antenna	S.G.	Cable Loss	Ant.G ain	ERP Level	ERP Level	Limit	Margin
(MHz)	(dBµV/m)	Polarization	(dBm)	(dB)	(dBi)	(dBm)	(W)	(W)	(W)
			ChannelSe	eparation	1:12.5kHz	2			
462.6375	125.48	V	30.28	0.38	6.6	36.50	4.47	5	0.53
462.6375	125.37	Н	30.17	0.38	6.6	36.39	4.36	5	0.64
462.6500	130.47	V	35.27	0.38	6.6	41.49	14.09	50	35.91
462.6500	130.37	Н	35.17	0.38	6.6	41.39	13.77	50	36.23
467.6500	130.44	V	35.24	0.38	6.6	41.46	14.00	50	36.00
467.6500	130.26	Н	35.06	0.38	6.6	41.28	13.43	50	36.57
	ChannelSeparation:25kHz								
462.6375	105.61	V	30.41	0.38	6.6	36.63	4.60	5	0.40
462.6375	105.36	Н	30.16	0.38	6.6	36.38	4.35	5	0.65
462.6500	110.47	V	35.27	0.38	6.6	41.49	14.09	50	35.91
462.6500	109.96	Н	34.76	0.38	6.6	40.98	12.53	50	37.47
467.6500	110.36	V	35.16	0.38	6.6	41.38	13.74	50	36.26
467.6500	110.07	Н	34.87	0.38	6.6	41.09	12.85	50	37.15

### Note:

- 1. Calculation Formula: Emission Level(dBm) = S.G. (dBm)- Cable Loss(dB)+ Ant.Gain(dBi)
- 2. The Ant. Gain including the correct factor 2.15
- 3. Margin (dB) = Limit(dBm)- Emission Level(dBm)



Page 43 of 50

### Conducted Power Result:

The maximum Power (CP) for GMRS is

Analog: 5W/15W for 12.5 kHz/25kHz Channel Separation

Calculation Formula: CP = R + A + L

\* Note:

CP: The final Conducted Power

R: The reading value from spectrum analyzer A: The attenuation value of the used attenuator

L: The loss of all connection cables

Conducted Power Measurement Results				
Mode	Channel Separation	Test Channel	Measurement Result (dBm)	
		462.6375 MHz	36.55	
GMRS TX	12.5 kHz	462.6500 MHz	41.57	
		467.6500 MHz	41.54	
	25.0 kHz	462.6375 MHz	36.71	
		462.6500 MHz	41.55	
		467.6500 MHz	41.58	



Page 44 of 50

# 11. Spurious Emission on Antenna Port

### 11.1 Provisions Applicable

Please refer to FCC 47 CFR 2.1051, 2.1057, 22.359 & 90.210 for specification details. Emissions shall be attenuated below the mean output power of the transmitter as follows:

FCC Rules	Attenuation Limit (dBc)
§ 95.1779	At least 43 + 10 log (P) dB

43 + 10 log (P<sub>watts</sub>)

Calculation: Limit (dBm) =EL-43-10log10 (TP)

Notes: EL is the emission level of the Output Power expressed in dBm,


In this application, the EL is P(dBm).


Limit (dBm) = P( dBm)-43-10 log ( $P_{watts}$ ) = -13 dBm

#### 11.2 Measurement Procedure

- 1. The RF output of the EUT was connected to a spectrum analyzer through appropriate attenuation.
- 2. The resolution bandwidth of the spectrum analyzer was set to 100 kHz. Sufficient scans were taken to
- 3. Show any out of band emission up to 10th. Harmonic for the lower and the highest frequency range.
- 4. Set RBW 100 kHz, VBW 300 kHz in the frequency band 30MHz to 1GHz, while set
- 5. RBW=1MHz.VBW=3MHz from the 1GHz to 10th Harmonic.
- 6. The audio input was set the unmodulated carrier, the resulting picture is print out for each channel separation.


## 11.3 Measurement Setup

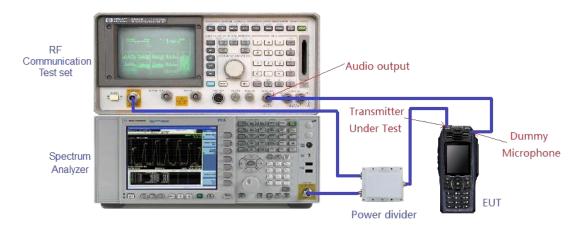







#### 11.4 Measurement Result

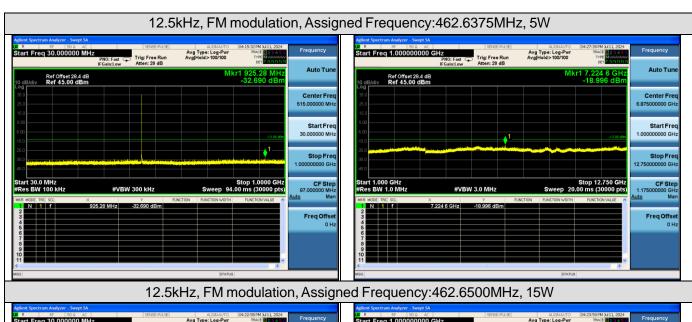



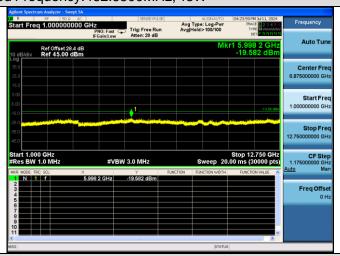


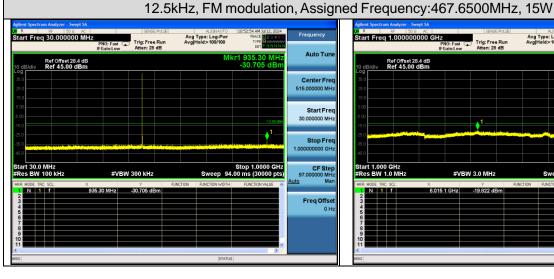







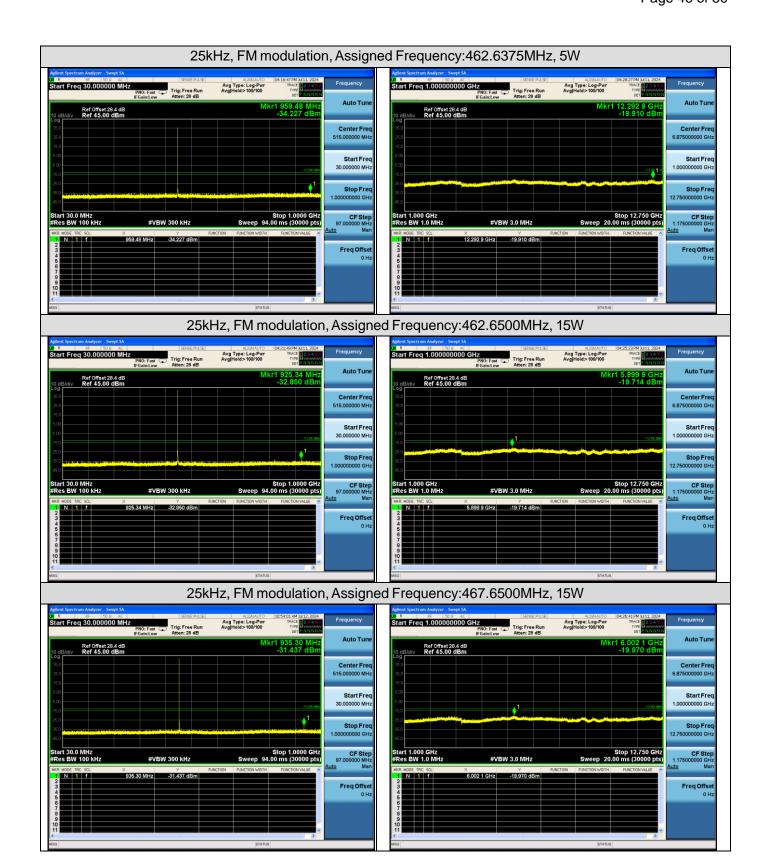



Page 47 of 50

## 12. Audio Low Pass Filter Response

### 12.1 Provisions Applicable

§95.1775 GMRS modulation requirements

Audio filter. Each GMRS transmitter type must include audio frequency low pass filtering, unless it complies with the applicable paragraphs of §95.1779 (without filtering).


The filter must be between the modulation limiter and the modulated stage of the transmitter.

At any frequency (f in kHz) between 3 and 20 kHz, the filter must have an attenuation of at least 60 log (f/3) dB more than the attenuation at 1 kHz. Above 20 kHz, it must have an attenuation of at least 50 dB more than the attenuation at 1 kHz

#### 12.2 Measurement Procedure

- 1. The DUT transmitter output port was connected to Modulation Analyzer.
- 2. Path loss for the measurement included.
- 3. Press 23.1SPCL on modulation analyzer to enable the external LO from Sigen.
- 4. Set the Sigen frequency to Fc + 1.5MHz, RF output level to 0dBm without modulation.
- 5. Transmit the radio and set the audio analyzer to 1 kHz audio frequency and 60% of the maximum deviation.
- 6. Up the amplitude by 20dB.
- 7. On DSA, get the reference point to 0dB.
- 8. Vary the frequency on audio analyzer from 3 kHz to 30 kHz, record the audio tone from DSA.


#### 12.3 Measurement Setup

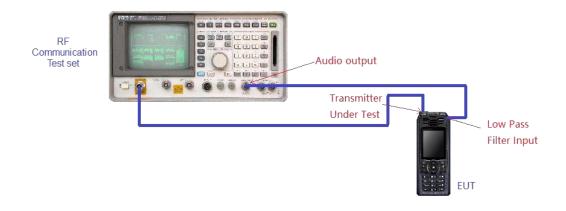



#### 12.4 Measurement Result


12.5kHz, FM modulation, Assigned Frequency:462.6500MHz-15W				
Audio Frequency (kHz)	Response Attenuation (dB)	Limit (dB)		
1	0	/		
3	-1.39	0.00		
4	-8.52	-5.00		
5	-14.12	-8.87		
6	-17.40	-12.04		
7	-21.84	-14.72		
8	-25.09	-17.04		
9	-27.64	-19.08		
10	-29.98	-20.92		
15	-36.74	-28.00		
20	-33.23	-28.00		
30	-31.12	-28.00		
50	-30.36	-28.00		
70	-29.96	-28.00		

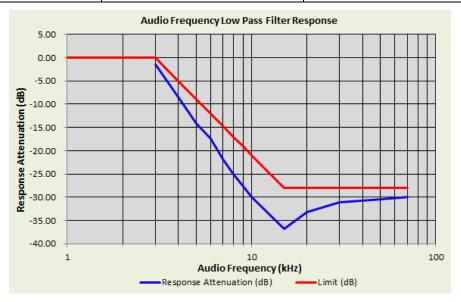

Note: All the test frequencies was tested, but only the worst data be recorded in this part.



25kHz, FM modulation, Assigned Frequency:462.6500MHz-15W			
Audio Frequency (kHz)	Response Attenuation (dB)	Limit (dB)	
1	0	/	
3	-1.39	0.00	
4	-2.03	0.00	
5	-9.77	-5.00	
6	-15.23	-8.87	
7	-19.56	-12.04	
8	-22.68	-14.72	
9	-27.55	-17.04	
10	-31.44	-19.08	
15	-34.03	-20.92	
20	-35.36	-28.00	
30	-34.36	-28.00	
50	-32.12	-28.00	
70	-30.36	-28.00	

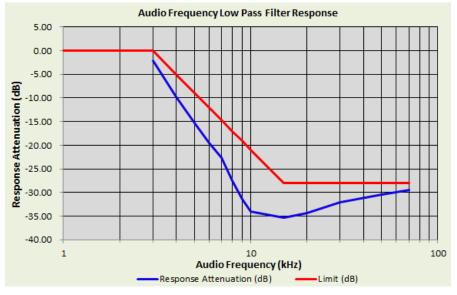

Note: All the test frequencies was tested, but only the worst data be recorded in this part.



Page 50 of 50

**Appendix I: Photographs of Test Setup** 

Refer to the Report No.: AGC01284240602AP01

**Appendix II: Photographs of Test EUT** 

Refer to the Report No.: AGC01284240602AP02

----End of Report----



# Conditions of Issuance of Test Reports

- 1. All samples and goods are accepted by the Attestation of Global Compliance (Shenzhen) Co., Ltd (the "Company") solely for testing and reporting in accordance with the following terms and conditions. The company provides its services on the basis that such terms and conditions constitute express agreement between the company and any person, firm or company requesting its services (the "Clients").
- 2. Any report issued by Company as a result of this application for testing services (the "Report") shall be issued in confidence to the Clients and the Report will be strictly treated as such by the Company. It may not be reproduced either in its entirety or in part and it may not be used for advertising or other unauthorized purposes without the written consent of the Company. The Clients to whom the Report is issued may, however, show or send it, or a certified copy thereof prepared by the Company to its customer, supplier or other persons directly concerned. The Company will not, without the consent of the Clients, enter into any discussion or correspondence with any third party concerning the contents of the Report, unless required by the relevant governmental authorities, laws or court orders.
- 3. The Company shall not be called or be liable to be called to give evidence or testimony on the Report in a court of law without its prior written consent, unless required by the relevant governmental authorities, laws or court orders.
- 4. In the event of the improper use of the report as determined by the Company, the Company reserves the right to withdraw it, and to adopt any other additional remedies which may be appropriate.
- 5. Samples submitted for testing are accepted on the understanding that the Report issued cannot form the basis of, or be the instrument for, any legal action against the Company.
- 6. The Company will not be liable for or accept responsibility for any loss or damage however arising from the use of information contained in any of its Reports or in any communication whatsoever about its said tests or investigations.
- 7.Clients wishing to use the Report in court proceedings or arbitration shall inform the Company to that effect prior to submitting the sample for testing.
- 8. The Company is not responsible for recalling the electronic version of the original report when any revision is made to them. The Client assumes the responsibility to providing the revised version to any interested party who uses them.
- 9. Subject to the variable length of retention time for test data and report stored hereinto as otherwise specifically required by individual accreditation authorities, the Company will only keep the supporting test data and information of the test report for a period of six years. The data and information will be disposed of after the aforementioned retention period has elapsed. Under no circumstances shall we provide any data and information which has been disposed of after retention period. Under no circumstances shall we be liable for damage of any kind, including (but not limited to) compensatory damages, lost profits, lost data, or any form of special, incidental, indirect, consequential or punitive damages of any kind, whether based on breach of contract of warranty, tort (including negligence), product liability or otherwise, even if we are informed in advance of the possibility of such damages.