



## EMI TEST REPORT

JQA APPLICATION No. : 50-40354

Model/Type No. : R-308K

Type of Equipment : Household Microwave Oven

Regulation applied : FCC Rules and Regulations Part 18

FCC ID : APYDMR0148

Applicant : Sharp Corporation, Reliability Control Group

Address : 22-22 Nagaike-Cho, Abeno-Ku,  
Osaka 545-8522, Japan

Manufacturer : Sharp Appliances (Thailand) Ltd.

Address : 64 Moo 5, Tambol Bangsamuk, Amphur Bangpakong,  
Chachoengsao, Province, Thailand

Received date of EUT : November 24, 2004

**Final Judgment : Passed**

**TEST RESULT IN THIS REPORT** are obtained in used of equipments that is traceable to National Institute of Advanced Industrial Science and Technology (AIST) of Japan and National Institute of Information and Communications Technology (NICT) of Japan.

**THE TEST RESULTS** only responds to the test sample.

**THIS REPORT** should not be reproduced, except in full, without the approval of the JQA Chubu Testing Center.

**This report must not used by the client to claim product endorsement by NVLAP or any agency of the U.S. Government.**



## TABLE OF CONTENTS

	<b>Page</b>
<b>1. Documentation</b>	
1.1 General Information	<u>3</u>
1.2 Test Regulation	<u>3</u>
1.3 Test Conditions	<u>4 - 9</u>
1.4 EUT Modifications / Deviation of Method	<u>10</u>
1.5 Test Results / Uncertainty	<u>11 - 12</u>
1.6 Summary	<u>13</u>
1.7 Configuration of EUT / Operation of EUT	<u>14 - 15</u>
1.8 Preliminary Test and Test Set-up(Drawings & Photographs)	<u>16 - 21</u>
<b>2. Test Data</b>	
2.1 RF Power Output	<u>22</u>
2.2 ISM Frequency	<u>23</u>
2.3 AC Power Line Conducted Emission      150kHz -    30MHz	<u>24</u>
2.4 Radiated Emission (Magnetic Field)      9 KHz -    30 MHz	<u>25</u>
2.5 Radiated Emission (Electric Field)      30 MHz - 1000 MHz	<u>26</u>
2.6 Radiated Emission (Electric Field)      1 GHz - 24.5 GHz	<u>27</u>

## **1.1 GENERAL INFORMATION**

### **1.1.1 Test Facility :**

- 1) Test Facility located at Chubu Testing Center SHIKATSU Branch :  
An anechoic Chamber (3 m and 10 m, on common plane) and a shielded Room  
**Date of Listing : September 11, 2002**  
**FCC filing No.:31040/SIT 1300F2**
- 2) Chubu Testing Center SHIKATSU Branch is recognized under the National Voluntary Laboratory Accreditation Program for satisfactory compliance established in Title 15, Part 285 Code of Federal Regulations.  
**NVLAP Lab Code : 200190-0**

### **1.1.2 Description of the Equipment Under Test :**

- |                           |                                                    |
|---------------------------|----------------------------------------------------|
| 1) Type of Equipment      | : Household Microwave Oven                         |
| 2) Model/Type No.         | : R-308K                                           |
| 3) Type of Magnetron      | : 2M226                                            |
| 4) Category               | : ISM Frequency Device                             |
| 5) EUT Authorization      | : Certification                                    |
| 6) FCC ID                 | : APYDMR0148                                       |
| 7) Product Type           | : Prototype                                        |
| 8) Serial No.             | : N/A                                              |
| 9) Date of manufacturer   | : November, 2004                                   |
| 10) Trade Name            | : SHARP                                            |
| 11) Fundamental Frequency | : 2.0, 2450.0 MHz                                  |
| Generated in the EUT      |                                                    |
| 12) Highest Frequency     | : 2450.0 MHz                                       |
| Used in the EUT           |                                                    |
| 13) Power Rating          | : 120VAC 60Hz 1-Phase                              |
| 14) Rated Power Output    | : 1100 W                                           |
| 15) EUT Grounding         | : Grounded at the plug end of the power line cord. |

### **1.1.3 Definitions for symbols used in this test report :**

- Black box indicates that the listed condition, Regulation or equipment is applicable for this report.
- Blank box indicates that the listed condition, Regulation or equipment is not applicable for this report.

## **1.2 TEST REGULATION**

FCC Rules and Regulations Part 18 Subpart A, B and C(October 1, 2002).

### **Test Procedure :**

The test was performed according to the procedures in FCC/OET MP-5(1986).

### 1.3 TEST CONDITIONS

#### 1.3.1 The measurement of the RF Power Output was performed in the following test site.

##### Test Location :

KITA KANSAI Testing Center  
7-7, Ishimaru, 1-Chome, Mino-Shi, Osaka, 562-0027, JAPAN

##### Used Test Instruments :

Type	Model No.	Manufacturer	Serial No.	Last Cal.	Interval
- Digital Power Meter	3181-01	HIOKI	08011085	May, 2004	1 Year
- Stop Watch	S111-5000	SEIKO	Q47097350	February, 2004	1 Year
- Digital Thermometer	2455	YOKOGAWA	Q47097361	March, 2004	1 Year

##### Environmental Conditions :

Temperature: 22.0 Humidity: 66.0 %

### 1.3.2 The measurement of the ISM Frequency

was performed for line voltage variation 80% to 125% of normal rated voltage, in the following test site.

#### Test Location :

Chubu Testing Center SHIKATSU Branch  
53-1, Yamaura, Yakushiji, Shikatsu-cho, Nishikasugai-gun, Aichi 481-0005, JAPAN

- Anechoic Chamber

#### Used Test Instruments :

Type	Model No.	Manufacturer	Serial No.	Last Cal.	Interval
- Spectrum Analyzer	8566B	Hewlett Packard	2937A06026	July, 2004	1 Year
- Horn Antenna	3160-03	EMCO	9911-1065	May, 2004	1 Year
- RF Cable	-	Hewlett Packard	A-2	May, 2004	1 Year

#### Environmental Conditions :

Temperature: 24.0 Humidity: 54.0 %

**1.3.3 The measurement of the AC Power Line Conducted Emission**  
was performed in the following test site.**Test Location :**

Chubu Testing Center SHIKATSU Branch  
53-1, Yamaura, Yakushiji, Shikatsu-cho, Nishikasugai-gun, Aichi 481-0005, JAPAN

- Anechoic Chamber
- Shielded Room

**Used Test Instruments :**

Type	Model No.	Manufacturer	Serial No.	Last Cal.	Interval
- Field Strength Meter	ESH 2	Rohde & Schwarz	864125/007	May, 2004	1 Year
- LISN(for EUT)	KNW-407	Kyoritsu Electrical	8-901-20	Jun, 2004	1 Year
- RF Cable	3D-2W	Fujikura	S-A	May, 2004	1 Year
- RF Cable	3D-2W	Fujikura	S-B	May, 2004	1 Year
- 50ohm Termination	CT01	TME	No.1	May, 2004	1 Year

**Environmental Conditions :**

Temperature: 24.0 Humidity: 38.0 %

**1.3.4 The measurement of the Radiated Emission(Magnetic Field)**

was performed in the frequency range of 9 kHz - 30 MHz, in the following test site.

**Test Location :**

Chubu Testing Center SHIKATSU Branch  
53-1, Yamaura, Yakushiji, Shikatsu-cho, Nishikasugai-gun, Aichi 481-0005, JAPAN

- Anechoic Chamber

**Used Test Instruments :**

Type	Model No.	Manufacturer	Serial No.	Last Cal.	Interval
- Field Strength Meter	ESH 2	Rohde & Schwarz	864125/007	May, 2004	1 Year
- Loop Antenna	6502	EMCO	8811-2249	April, 2004	1 Year
- RF Cable	3D-2W	Fujikura	S-A	May, 2004	1 Year

**Environmental Conditions :**

Temperature: 20.0 Humidity: 38.0 %

**1.3.5 The measurement of the Radiated Emission(Electric Field)**

was performed horizontal and vertical polarization, in frequency range  
30MHz - 1000MHz, in the following test site.

**Test Location :**

Chubu Testing Center SHIKATSU Branch  
53-1, Yamaura, Yakushiji, Shikatsu-cho, Nishikasugai-gun, Aichi 481-0005, JAPAN

- Anechoic Chamber ( 3 meters)
- Anechoic Chamber (10 meters)

**Validation of Site Attenuation :**

- 1) Last Confirmed Date : May 04, 2004
- 2) Interval : 1 Year

**Used Test Instruments :**

Type	Model No.	Manufacturer	Serial No.	Last Cal.	Interval
- Field Strength Meter	ESVP	Rohde & Schwarz	860687/029	February, 2004	1 Year
- Dipole Antenna	KBA-511A	Kyoritsu Electrical	0-284-5	April, 2004	1 Year
- Dipole Antenna	KBA-611	Kyoritsu Electrical	0-269-5	April, 2004	1 Year
- RF Cable	5D-2W	Fujikura	A-3	May, 2004	1 Year
- RF Cable	106-02	SUHNER	A-10-2	May, 2004	1 Year

**Environmental Conditions :**

Temperature: 20.0 Humidity: 38.0 %

**1.3.6 The measurement of the Radiated Emission(Electric Field)**

was performed horizontal and vertical polarization, in frequency range  
1GHz - 26GHz, in the following test site.

**Test Location :**

Chubu Testing Center SHIKATSU Branch  
53-1, Yamaura, Yakushiji, Shikatsu-cho, Nishikasugai-gun, Aichi 481-0005, JAPAN

- Anechoic Chamber

**Used Test Instruments :**

Type	Model No.	Manufacturer	Serial No.	Last Cal.	Interval
- Spectrum Analyzer	8566B	Hewlett Packard	2937A06026	July, 2004	1 Year
- Horn Antenna	3160-01	EMCO	9908-1032	May, 2004	1 Year
- Horn Antenna	3160-02	EMCO	9901-1047	May, 2004	1 Year
- Horn Antenna	3160-03	EMCO	9911-1065	May, 2004	1 Year
- Horn Antenna	3160-04	EMCO	9911-1059	May, 2004	1 Year
- Horn Antenna	3160-05	EMCO	9911-1073	May, 2004	1 Year
- Horn Antenna	3160-06	EMCO	9910-1051	May, 2004	1 Year
- Horn Antenna	3160-07	EMCO	9911-1123	May, 2004	1 Year
- Horn Antenna	3160-08	EMCO	9912-1036	May, 2004	1 Year
- Attenuator	8493C	Hewlett Packard	2708A07046	December, 2004	1 Year
- PR AMP	DWT-12013	DBS Microwave	003	September, 2004	1 Year
- PR AMP	DWT-18037	DBS Microwave	006	September, 2004	1 Year
- Signal Generator	83732B	Hewlett Packard	US34490143	September, 2004	1 Year
- Mixer	MZ5010C	WJ	028025	December, 2003	1 Year
- RF Cable	SUCOFLEX102	HUBER+SUHNER	14247/2	December, 2003	1 Year
- RF Cable	-	Hewlett Packard	A-0.5	May, 2004	1 Year
- RF Cable	-	Hewlett Packard	A-2	May, 2004	1 Year

**Environmental Conditions :**

Temperature: 24.0 Humidity: 54.0 %

#### 1.4 EUT Modification / Deviation of Test Method

##### EUT Modification :

- No modifications were conducted by JQA to achieve compliance to Limits.
- To achieve compliance to Limits, the following change(s) were made by JQA during the compliance test.

The modification will be implemented in all production models of this equipment.

Applicant : N/A

Date :

Type Name :

Position :

#### RESPONSIBLE PARTY

##### Responsible Party of Test Item(Product)

Responsible party : N/A

Contact Person :

\_\_\_\_\_  
Signatory

##### Deviation of Test Method :

- No deviations from the test method.
- It was employed the with following deviations from the test method.

\_\_\_\_\_  
\_\_\_\_\_

## 1.5 TEST RESULTS

### RF Power Output

Measurement Results (Calorimetric method) 742.7 W

Applied Limits of Radiated Emission	<u>30.5</u>	uV/m	at	<u>300</u>	m
	<u>10.0</u>	uV/m	at	<u>1600</u>	m

Remarks : \_\_\_\_\_  
 \_\_\_\_\_

### ISM Frequency 2.4 GHz - 2.5 GHz

The requirements are - PASSED - NOT PASSED

Worst(lowest/highest)range 2400.1 MHz - 2497.6 MHz  
 Against 2450 MHz  $\pm$  50 MHz

Remarks : \_\_\_\_\_  
 \_\_\_\_\_

### AC Power Line Conducted Emissions 150 kHz - 30 MHz

The requirements are - PASSED - NOT PASSED

Minimum limit margin	11.7	dB	at	0.15	MHz
Maximum limit exceeding		dB	at		MHz
Uncertainty of measurement results	+2.3	dB(2 )		-2.3	dB(2 )

Remarks : \_\_\_\_\_  
 \_\_\_\_\_

**Radiated Emissions (Magnetic Field) 9 KHz - 30 MHz**

The requirements are	- PASSED	- NOT PASSED
Minimum limit margin	- dB at	- MHz
Maximum limit exceeding	dB at	MHz
Uncertainty of measurement results	+2.9 dB(2 )	-2.9 dB(2 )

**Remarks :** The spectrum was scanned from 9 KHz to 30 MHz and all emissions were  
found to be less than the maximum sensitivity of used test instrument.

**Radiated Emissions (Electric Field) 30 MHz - 1000 MHz**

The requirements are	- PASSED	- NOT PASSED
Minimum limit margin	42.5 dB at	182.4 MHz
Antenna height Position	1.0 m	
EUT Position (CCW)	180 degree	
Maximum limit exceeding	dB at	MHz
Uncertainty of measurement results	+3.3 dB(2 )	-3.3 dB(2 )

**Remarks :** \_\_\_\_\_  
\_\_\_\_\_

**Radiated Emissions (Electric Field) 1 GHz - 24.5 GHz**

The requirements are	- PASSED	- NOT PASSED
Minimum limit margin	3.8 dB at	4872.1 MHz
EUT Position (CCW)	0 degree	
Maximum limit exceeding	dB at	MHz
Uncertainty of measurement results	+2.6 dB(2 )	-2.6 dB(2 )

**Remarks :** \_\_\_\_\_

**1.6 SUMMARY****GENERAL REMARKS :**

The EUT was tested according to the requirements of FCC Rules and Regulations Part 18 Subpart A, B and C (October 1, 2002) under the test configuration, as shown in page 14 and 15.

The conclusion for the test items of which are required by the applied regulation is indicated under the final judgment.

**FINAL JUDGMENT :**

The "as received" sample;

- - fulfill the test requirements of the regulation mentioned on page 3.
- - fulfill the test requirements of the regulation mentioned on page 3, but with certain qualifications.
- - doesn't fulfill the test regulation mentioned on page 3.

Begin of testing : December 02, 2004


End of testing : December 11, 2004


- JAPAN QUALITY ASSURANCE ORGANIZATION -

Approved Signatory :

Approved by:

Issued by:

  
Yatsuhiko Onomatsu  
Manager  
EMC Div. SHIKATSU Branch  
JQA Chubu Testing Center

  
Shinichi Yokoi  
Assistant Manager  
EMC Div. SHIKATSU Branch  
JQA Chubu Testing Center

**1.7 CONFIGURATION OF EUT / OPERATION OF EUT****1.7.1 Test Configuration****The Equipment Under Test (EUT) consists of :**

Description	Manufacturer	Model No.	FCC ID	Serial No.
Household Microwave Oven	Sharp Appliances (Thailand) Ltd.	R-308K	APYDMR0148	N/A

**The measurement was carried out with the following equipment connected :**

None

**1.7.2 Port description of the interconnecting cable of the EUT**

None

**1.7.3 Operation of the EUT :****Power Supply Voltage** : 120VAC 60Hz 1-Phase**Operating mode** :


The EUT was operated during the measurement under following load condition according to Sec. 4.1 in FCC/OET MP-5(1986).

- 1) RF Power Output Measurement  
1000 ml of water, with the beaker located in the center of the removable turntable.
- 2) ISM Frequency Measurement  
1000 ml of water, with the beaker located in the center of the removable turntable.
- 3) Conducted Emissions Measurement  
1000 ml of water, with the beaker located in the center of the removable turntable.
- 4) Radiated Emission Measurement(radiation on second and third harmonics)  
Two loads, one of 1050 ml and the other of 450 ml, of water are used.  
Each load is tested both with the beaker located in the center of the removable turntable and with it in the right front center.
- 5) Radiated Emission Measurement(all other radiation)  
1050 ml of water, with the beaker located in the center of the removable turntable.

**Type of Magnetron** : Cat No.2M226 by LG Electronics**1.7.4 The generated and operating frequency in the EUT :**

2.0, 2450.0 MHz

**1.7.5 EUT arrangement :**

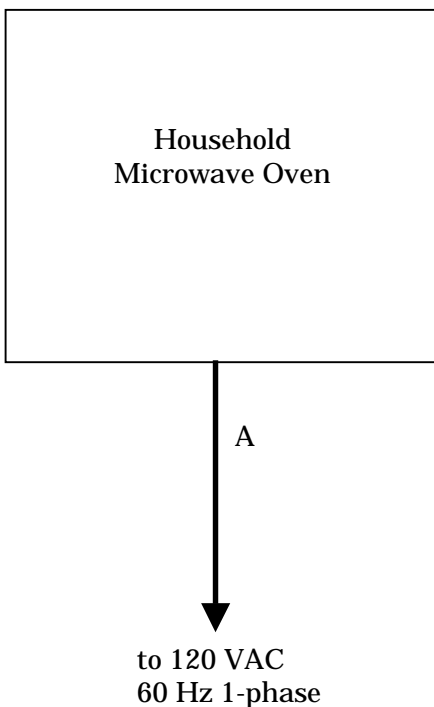

**1.7.6 Type of Interference Cable(s) and the AC Power Cord used with the EUT:**

Cable No.	Description	Shielded	Ferrite core	Length	Connector
A	AC power cable	No	No	1.1 m	Non-metallic

## 1.8 PRELIMINARY TEST and TEST SET-UP (Drawing and Photograph)


### AC Power Line Conducted Emissions 150 kHz - 30 MHz :

According to description of CISPR11, The AC Power Line preliminary conducted emissions measurement were carried out.

The preliminary conducted measurements were performed using the spectrum analyzer to observe the emission characteristics of the EUT.

The EUT configuration, cable configuration and mode of operation were determined for producing the maximum level of emissions. These configurations were used for final AC power line conducted emissions measurements.

#### **Shielded Enclosure**

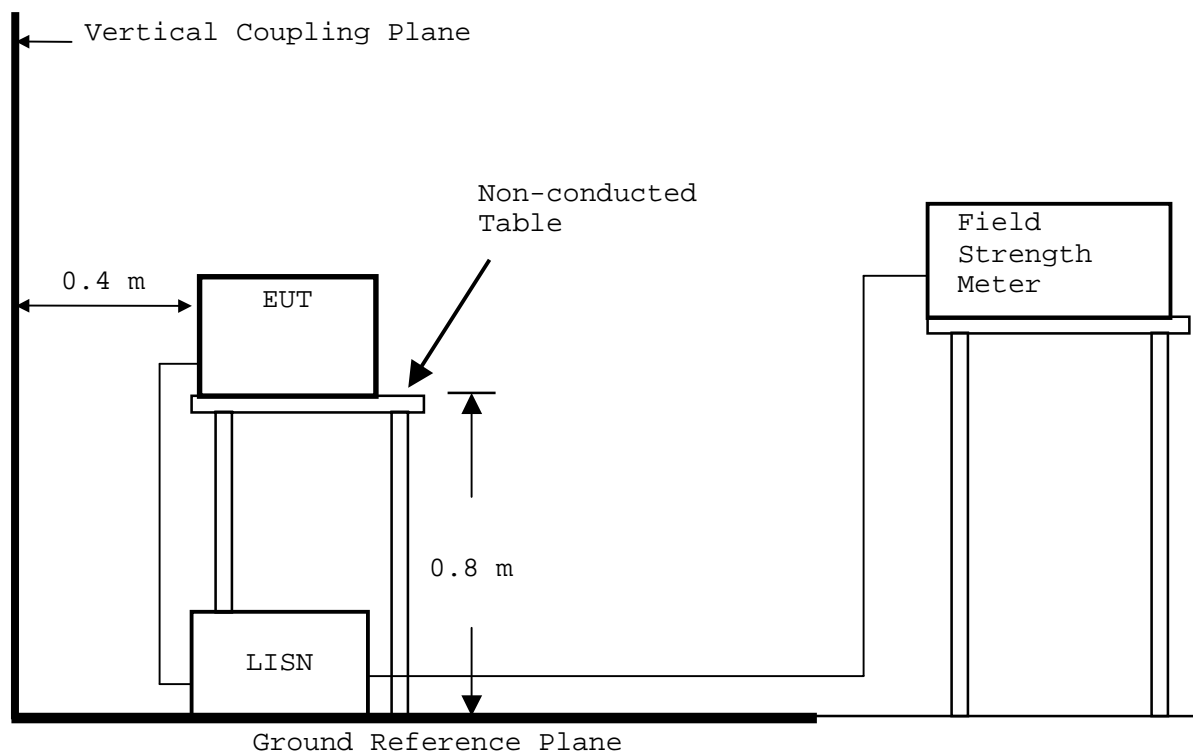

### Magnetic Field Radiation Emissions 9 kHz - 30 MHz :

The preliminary test was performed according to the description of FCC/OET MP-5(1986) Sec.5.1(Preliminary Radiated Emissions Test) and Sec.5.2(Equipment Configurations). The preliminary test was carried out to investigate the frequency of the emission that has the highest amplitude relative to the limits within normal operating modes, cable positions, and a typical system configuration.

In order to find out to the maximum emission, the preliminary test and a final test were performed in accordance with the following steps.

Step 1:One operation mode of the test system was setting.

Step 2:In order to investigate the frequencies of maximum emissions, the loop antenna position was approached to the EUT and the significant frequency of the emission's circumstance from the test system were investigated.


These data were recorded in the specified frequency band(9 kHz - 30 MHz).

Step 3:Using a test receiver and a loop antenna, the emissions' circumstance from the test system was measured in according with FCC/OET MP-5(1986) Sec.5.6 (Final Radiated Emissions Test) at each frequency which was found the higher emission referred to level vs. frequency on the list and which was measured by the loop antenna.

Step 4:Return to step 1, if the other operation mode was possible to be setting.

Step 5:The worst result was reported arranging data of which was obtained and performed by one or plural operation modes as the final test. At the worst point that the highest amplitude relative to the limit the repeatability of the level was reconfirmed. The photographs of the test system setup worst point were taken and recorded.

### **Anechoic Chamber**

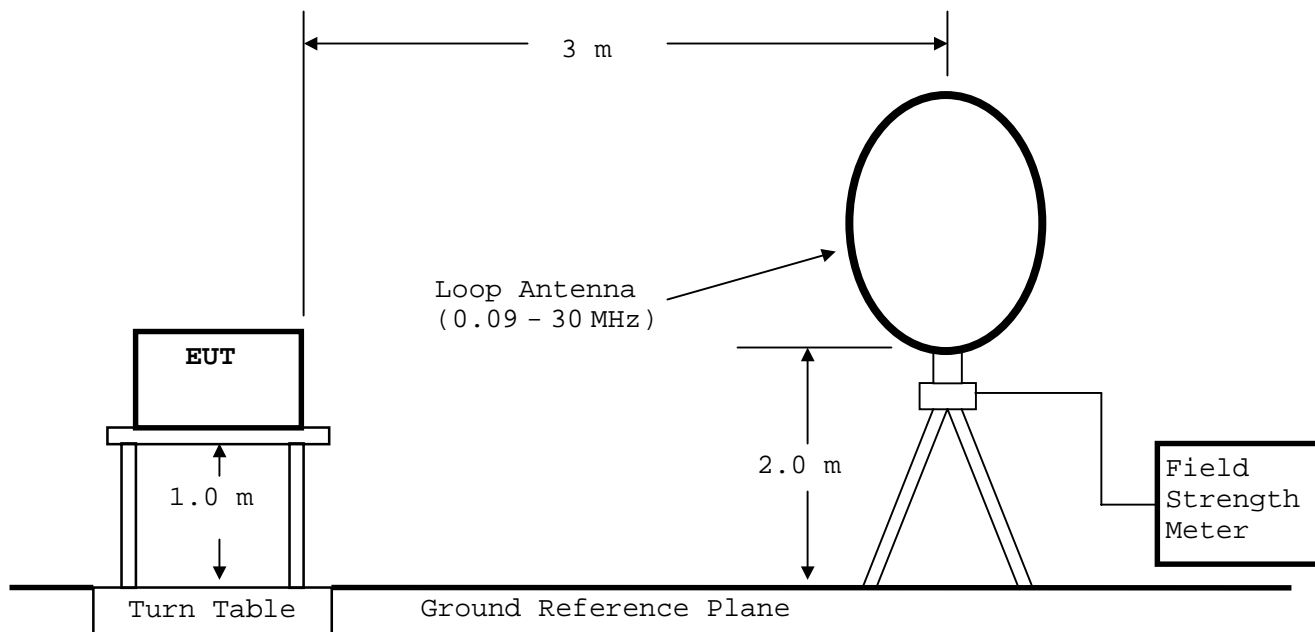

### Radiated Emissions 30 MHz - 1000 MHz :

The preliminary test was performed according to the description of FCC/OET MP-5(1986) Sec.5.1(Preliminary Radiated Emissions Test) and Sec.5.2(Equipment Configurations). The preliminary test was carried out to investigate the frequency of the emission that has the highest amplitude relative to the limits within normal operating modes, cable positions, and a typical system configuration.

In order to find out to the maximum emission, the preliminary test and a final test were performed in accordance with the following steps.

Step 1:One operation mode of the test system was setting.


Step 2:Using a test receiver and a test antenna probe, the significant frequency of the emission's circumstance from the test system were investigated. These data were recorded every one to 22 divided bands in the specified frequency band(30 MHz - 1000 MHz).

Step 3:Using a test receiver and a resonant tuned dipole antenna, the emission's Circumstance from the test system was measured in according with FCC/OET MP-5(1986) Sec.5.6 (Final Radiated Emissions Tests) at each frequency which was found the higher emission referred to level vs. frequency on the list and which was measured by the resonant tuned dipole antenna.

Step 4:Return to step 1, if the other operation mode was possible to be setting.

Step 5:The worst result was reported arranging data of which was obtained and performed by one or plural operation modes as the final test.

### **Anechoic Chamber**

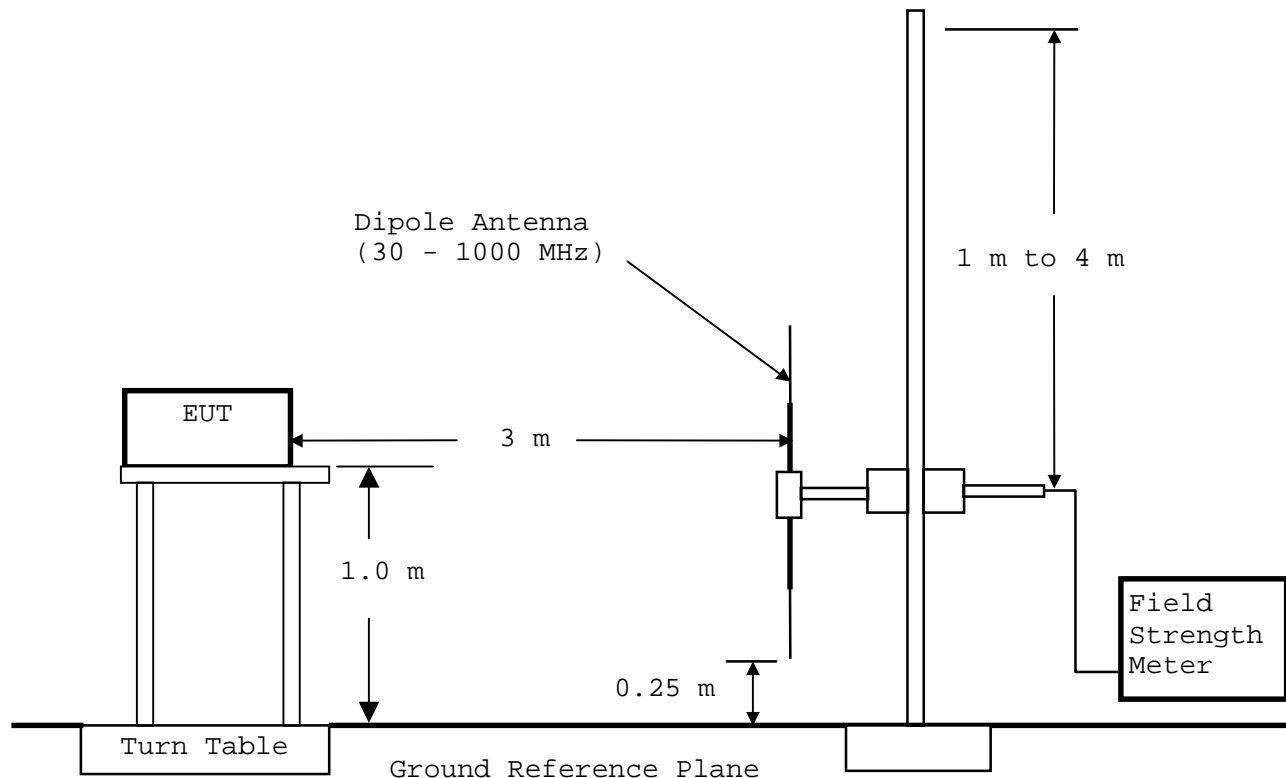

### Radiated Emissions 1.0 GHz - 24.5 GHz :

The preliminary test was performed according to the description of FCC/OET MP-5(1986) Sec.5.1(Preliminary Radiated Emissions Test) and Sec.5.2(Equipment Configurations). The preliminary test was carried out to investigate the frequency of the emission that has the highest amplitude relative to the limits within normal operating modes, cable positions, and a typical system configuration.

In order to find out to the maximum emission, the preliminary test and a final test were performed in accordance with the following steps.

Step 1:One operation mode of the test system was setting.

Step 2:In order to investigate the frequencies of maximum emissions, the horn antenna position was approached to the EUT and the significant frequency of the emission's circumstance from the test system were investigated.


These data were recorded in the specified frequency band(1 GHz - 24.5 GHz).

Step 3:The emissions' circumstance from the test system was measured in according with FCC/OET MP-5(1986) Sec.5.6 (Final Radiated Emissions Test) at each frequency which was found the higher emission referred to level vs. frequency on the list and which was measured in the specified distance using the horn antenna.

Step 4:Return to step 1, if the other operation mode was possible to be setting.

Step 5:The worst result was reported arranging data of which was obtained and performed by one or plural operation modes as the final test. At the worst point that the highest amplitude relative to the limit the repeatability of the level was reconfirmed. The photographs of the test system setup worst point were taken and recorded.

### **Anechoic Chamber**

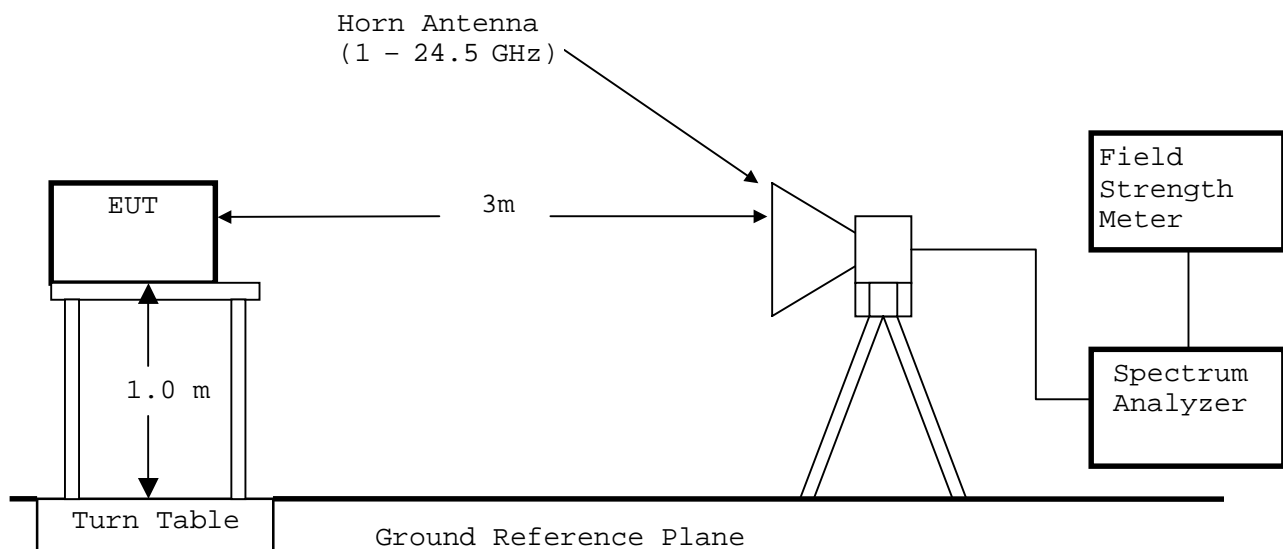

**TEST SET-UP (Photograph)**

**Conducted Emissions**

**- Front View -**



**- Side View -**



**Radiated Emissions**

- Front View -



- Rear View -



## 2. TEST DATA

### 2.1 RF Power Output Measurement

Date : November 17, 2004  
Temp. : 22.0 °C Humi. : 66.0 %

The power output was measured by the calorimetric method, computing the power output from the observed temperature rise of the load over a period of time.

Load(water) : 1000 ml  
Measurement time : 38.0 sec. (calculated by the rated RF power output)

No.	Water temperature[°C]		RF Power Output *) [W]
	t <sub>1</sub> (before test)	t <sub>2</sub> (after test)	
1	10.6	17.5	762.6
2	10.0	16.7	740.5
3	10.4	17.1	740.5
4	10.7	17.4	740.5
5	10.7	17.3	729.5
Average			742.7

$$*) \text{RF Power Output [W]} = 4.2 \times 1000 \times (t_2 - t_1) / 38.0$$

Results of RF power output : 742.7 W

The limit of the radiated emission at 300m :  $25 \times \sqrt{742.7/500} = 30.5 \text{ (uV/m)}$ 

The AC power input to the oven is measured to determine if the oven is operating in accordance with the manufacturer's specifications.

Rated AC power input : AC 120 V × 13.0 A = 1560.0 VA

Measured AC power input : AC 120 V × 13.6 A = 1632.0 VA

Tested by :

  
Yatsuhiko Onomatsu

**2.2 ISM Frequency Measurement**Date : December 11, 2004  
Temp. : 24.0 °C Humi. : 54.0 %

The maximum frequency deviation was measured at -26dB with respect to the Maximum level.

Maximum Frequency Deviation [MHz]		Voltage Variation
Lower Frequency	Upper Frequency	
2400.1	2484.2	96.0 V ( 80%)
2401.2	2495.6	120.0 V (100%)
2405.0	2497.6	150.0 V (125%)

## Remarks: Setup of Spectrum Analyzer

Detector Function : Peak  
Resolution Bandwidth : 10 KHz  
Video Bandwidth : 10 KHz  
Sweet Time : 20 ms  
Span : 100 MHz

Tested by :

  
Yatsuhiko Onomatsu

## 2.3 AC Power Line Conducted Emissions 150 kHz - 30 MHz

Date : December 06, 2004

Temp. : 24.0 °C Humi. : 38.0 %

Date : December 6, 2004

Temp : 24°C Humi : 38%

Frequency MHz	Correction Factor dB	Meter Reading				Limits		Results		Margins	
		VA-QP	VA-AV	VB-QP	VB-AV	QP	AV	QP	AV	QP	AV
						dB(μV)		dB(μV)		dB	
0.15	0.3	54.0	-	50.0	-	66.0	56.0	54.3	-	11.7	-
0.20	0.2	46.0	-	44.0	-	63.6	53.6	46.2	-	17.4	-
0.30	0.1	34.0	-	30.0	-	60.2	50.2	34.1	-	26.1	-
0.50	0.1	24.0	-	22.0	-	56.0	46.0	24.1	-	31.9	-
0.70	0.1	18.0	-	14.0	-	56.0	46.0	18.1	-	37.9	-
1.00	0.0	<0.0	-	18.0	-	56.0	46.0	18.0	-	38.0	-
1.50	0.0	<0.0	-	12.0	-	56.0	46.0	12.0	-	44.0	-
2.00	0.0	<0.0	-	<0.0	-	56.0	46.0	<0.0	-	-	-
2.70	0.0	10.0	-	16.0	-	56.0	46.0	16.0	-	40.0	-
5.00	0.1	<0.0	-	<0.0	-	56.0	46.0	<0.1	-	-	-
7.00	0.1	<0.0	-	<0.0	-	60.0	50.0	<0.1	-	-	-
10.00	0.2	<0.0	-	<0.0	-	60.0	50.0	<0.2	-	-	-
13.00	0.3	<0.0	-	<0.0	-	60.0	50.0	<0.3	-	-	-
15.00	0.3	<0.0	-	<0.0	-	60.0	50.0	<0.3	-	-	-
18.53	0.4	17.5	-	16.5	-	60.0	50.0	17.9	-	42.1	-
20.59	0.4	11.0	-	11.0	-	60.0	50.0	11.4	-	48.6	-
22.64	0.4	11.5	-	11.0	-	60.0	50.0	11.9	-	48.1	-
25.00	0.5	<0.0	-	<0.0	-	60.0	50.0	<0.5	-	-	-
27.00	0.5	<0.0	-	<0.0	-	60.0	50.0	<0.5	-	-	-
30.00	0.6	<0.0	-	<0.0	-	60.0	50.0	<0.6	-	-	-

### Notes:

- 1) Test Location : Shielded Room
- 2) The spectrum was checked from 0.15MHz to 30MHz
- 3) The symbol of "<" means "or less".
- 4) The symbol of "-" means "Not applicable".
- 5) The correction factor contains the LISN factor and the cable(2.0m length) loss.
- 6) A sample calculation was made at 0.15 MHz
 

Correction Factor + Meter Reading  
 0.3 + 54.0 = 54.3 dB(μV)
- 7) Setting of the measuring instrument :
  - a) Detector Function : CISPR Quasi-Peak  
IF Bandwidth : 9kHz
  - b) Detector Function : Average  
IF Bandwidth : 10kHz

Tested by :

*Y. Onomatsu*  
Yatsuhiko Onomatsu

**2.4 Magnetic Field Radiated Emissions Measurement 9 kHz - 30 MHz**

Date : December 02, 2004

Temp. : 20.0 °C Humi. : 38.0 %

Frequency (MHz)	Correction Factor (dB)	Meter Reading at 3m (dB/V/m)	Limits		Result		Margin (dB)
			300m (uV/m)	1600m	300m (uV/m)	1600m	
0.01	19.7	<40.0	30.5	10.0	<0.10	<0.0034	-
0.10	10.8	<40.0	30.5	10.0	<0.03	<0.0012	-
0.15	10.7	<40.0	30.5	10.0	<0.03	<0.0012	-
1.00	10.4	<40.0	30.5	10.0	<0.03	<0.0012	-
5.00	10.8	<40.0	30.5	10.0	<0.03	<0.0012	-
10.00	10.3	<40.0	30.5	10.0	<0.03	<0.0012	-
20.00	9.8	<40.0	30.5	10.0	<0.03	<0.0012	-
30.00	8.1	<40.0	30.5	10.0	<0.03	<0.0012	-

- Notes : 1) Test Location : Anechoic Chamber  
2) Distance measurement : 3m  
3) The spectrum was checked from 9 KHz to 30 MHz.  
4) The symbol of "<" means "or less".  
5) The correction factor contains the antenna factor and the cable (2.0m) loss.  
6) A sample calculation was mad at 0.01 MHz.

Correction Factor = 19.7 (dB)

Conversion Factor = -80.0 (dB) [40dB/decade]

Meter Reading = 40.0 (dB/uV)

**Result = -20.3 (dB/uV/m) = 0.1 (uV/m)**

- 7) Setting of measurement instrument

Detector Function : Average

IF Bandwidth : 10 KHz - 150 KHz : 200 Hz

150 KHz - 30 MHz : 10 kHz

Tested by :

  
Yatsuhiko Onomatsu

**2.5 Electromagnetic Field Radiated Emissions Measurement 30 MHz - 1000 MHz**Date : December 02, 2004Temp. : 20.0 °C Humi. : 38.0 %

Frequency (MHz)	Correction Factor (dB)	Meter Reading at 3m (dB/V/m)		Limits		Result (Highest)		Margin (dB)
		Hori.	Vert.	300m (uV/m)	1600m	300m (uV/m)	1600m	
30.0	0.0	<-6.0	<-6.0	30.5	10.0	<0.005	<0.001	-
61.8	7.0	3.3	-4.0	30.5	10.0	0.033	0.006	59.4
70.0	7.3	5.0	-3.2	30.5	10.0	0.041	0.008	57.4
98.8	9.5	2.8	<-6.0	30.5	10.0	0.041	0.008	57.4
162.0	14.2	2.9	<-6.0	30.5	10.0	0.072	0.013	52.6
182.4	15.7	11.5	<-6.0	30.5	10.0	0.229	0.043	42.5
210.9	17.7	7.1	<-6.0	30.5	10.0	0.174	0.033	44.9
534.2	28.2	-5.6	<-6.0	30.5	10.0	0.135	0.025	47.1
1000.0	35.2	<-6.0	<-6.0	30.5	10.0	<0.288	<0.054	-

- Notes : 1) Test Location : Anechoic Chamber  
2) Distance measurement : 3m  
3) The spectrum was checked from 30 to 1000 MHz.  
4) The symbol of "<" means "or less".  
5) The correction factor contains the antenna factor and the cable (22.0 m) loss.  
6) A sample calculation was mad at **182.4** MHz.

Correction Factor = 15.7 (dB)

Conversion Factor = -40.0 (dB) [20dB/decade]

Meter Reading = 11.5 (dB/uV)

**Result = -12.8 (dB/uV/m) = 0.229 (uV/m)**

- 7) Setting of measurement instrument  
Detector Function : Average  
IF Bandwidth : 120 KHz

Tested by :

  
Yatsuhiko Onomatsu

## 2.6 Electromagnetic Field Radiated Emissions Measurement 1 GHz - 24.5 GHz

Date : December 11, 2004  
 Temp. : 24.0 °C Humi.: 54.0 %

Frequency (MHz)	Correction Factor (dB)	Meter Reading at 3m (dB/V/m)		Limits		Result(Highest)		Margin (dB)
		Hori.	Vert.	300m (uV/m)	1600m	300m (uV/m)	1600m	
2400.0	22.5	32.0	32.5	30.5	10.0	5.62	1.05	14.7
2500.0	22.5	<40.0	<40.0	30.5	10.0	<13.34	<2.50	-
4872.1	-16.1	82.0	80.0	30.5	10.0	19.72	3.70	3.8
7305.4	-12.6	64.0	59.0	30.5	10.0	3.72	0.70	18.3
9918.9	-7.4	64.0	65.5	30.5	10.0	8.04	1.51	11.6
12250.0	-5.8	<40.0	<40.0	30.5	10.0	<0.51	<0.10	-
12311.0	-6.8	53.0	<40.0	30.5	10.0	2.04	0.38	23.5
14700.0	-2.0	<40.0	<40.0	30.5	10.0	<0.79	<0.15	-
17363.9	-2.1	48.0	46.0	30.5	10.0	1.97	0.37	23.8
19600.0	7.6	<40.0	<40.0	30.5	10.0	<2.40	<0.15	-
22050.0	6.9	<40.0	<40.0	30.5	10.0	<2.21	<0.15	-
24500.0	6.3	<40.0	<40.0	30.5	10.0	<2.07	<0.15	-

- Notes : 1) Test Location : Anechoic Chamber  
 2) Distance measurement : 3m  
 3) The spectrum was checked from 1 to 24.5 GHz.  
 4) The symbol of "<" means "or less".  
 5) The correction factor contains the antenna factor , cable(2.5 m) loss, and AMP gain.  
 6) A sample calculation was mad at **4872.1** MHz.  
     Correction Factor = -16.1 (dB)  
     Conversion Factor = -40.0 (dB) [20dB/decade]  
     Meter Reading = 82.0 (dB/uV)  
     **Result = 25.9 (dB/uV/m) = 19.72 (uV/m)**

### 7) Setting of measurement instrument


#### Spectrum Analyzer

Detector Function	: Peak	Average
Resolution Bandwidth	: 1 MHz	3 MHz
Video Bandwidth	: 1 MHz	3 MHz
Span	: 0 Hz	0 Hz

#### Field Strength Meter \*)

SCALE	: LINER
Detector Function	: Average
IF Bandwidth	: 1 MHz

\*) For the average measurement method, it is made measurement using a test receiver and spectrum analyzer.

Tested by :   
 Yatsuhiko Onomatsu