



承 认 书

APPROVAL SHEET

客户名称 Customer				
客户料号 Customer P/N				
项目名称 Project Name	WiFi Dual-band SMA Male(Black)			
供应商名称 Supplier	上海圣丹纳无线科技有限公司 Shanghai Saintenna Wireless Technology Co.,LTD.			
圣丹纳物料型号 Saintenna P/N	SAA31578A			
是否符合 RoHS IF ROHS	yes			
送样日期 Providing Date	2020.07.10			
供应商 Supplier	制定 Prepared by	设计 Designer	品质 QA	批准 Approver
	马玉学	钱锐	李光辉	余剑平
地址: 上海市宝山区宝祁路611号8号楼 Address: Building 8, No.611 Bao Qi Road, Bao Shan District, Shanghai, China				
电话/Tel: 086-021-36307272; 传真/Fax: 086-021-36307757				
客户 Customer	编制 Prepared by	审核 Checked by	批准 Approver	

注: 必须手工签字确认 (Note: Signature must be confirmed by hand)

CONFIDENTIAL

The information contained in this product is of a proprietary nature. It may not be reproduced without expressed written permission of Shanghai Saintenna Wireless Technology Co.,LTD.

目录/Content

一 封面/Cover.....☑

二 目录/Content.....☑

三 规格/Specification.....☑

四 图纸/Drawing.....☑

五 电性能报告/Electric Report.....☑

规格/Specification



1. 机械规格/Mechanical Specification

- 连接方式/Connect Type..... SMA-J
- 工作温度/Work Temperature..... $-40\sim 85^{\circ}\text{C}$
- 存储温度/Storage Temperature..... $-40\sim 85^{\circ}\text{C}$

2. 电性能参数/Electrical Specification


- 频段/Frequency Range..... $2.4\sim 2.5\&5.15\sim 5.85\text{GHz}$
- 驻波比/VSWR..... <3
- 增益/Peak Gain..... 0dBi
- 极化/Polarization..... Vertical
- 特性阻抗/Input Impedance..... $50\ \Omega$
- 最大承载功率/Max Input Power..... 5W

标记	签名	修改内容	日期

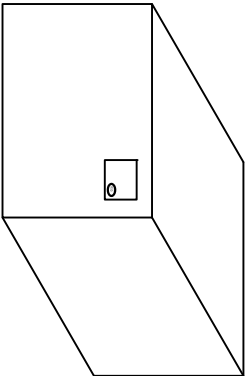

- 1.外箱需贴1PCS/ROHS
标签于外箱标签上
- 2.外箱需贴1PCS/外箱标
签于外箱侧麦右上角

ROHS

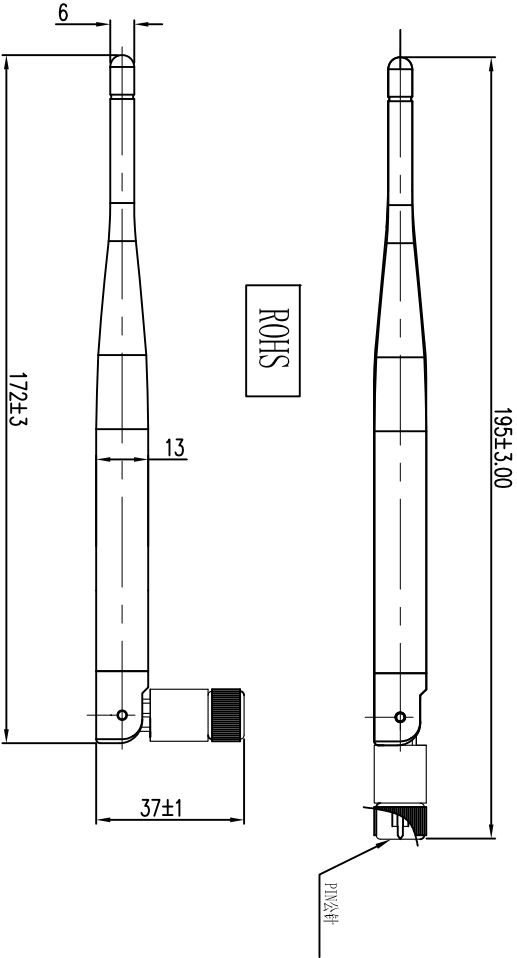

上海圣丹纳无线科技有限公司

第三视角				项目名称	WIFI Dual-band -Antenna	日期	2020.07.10			
0~3	±0.05	Φ	0.05	产品名称	WIFI-组件	设计	MD	mayuxue		
3~30	±0.10	○	0.03	产品料号	SAA31578A	批准	RF	qiannui		
30~50	±0.15	○	0.02							
50~80	±0.20	⊥	0.02							
角度	±1°	∠	0.05							

第 1 页, 共 1 页



移远0dBi双频WiFi天线调试报告

Quectel 0dBi Dual band WiFi Antenna Commissioning Report

上海圣丹纳无线科技有限公司


Shanghai Saintenna Wireless Technology Co.,LTD.

Project Information


客户名称 Customer Name	移远 Quectel
项目名称 Project Name	0dBi双频WiFi天线 0dBi dual band WiFi antenna
工作频段 Working Band	2.4G/5.8GHZ
规格 Description	SMA-Male
版本 Version	V1.0
日期 Date	2020-7-10

Debug Instrument


Network Analyzer	Agilent E5071C
Frequency Range	100KHz ~ 8.5GHz
Test Item	Return Loss/VSWR/Smith Chart /Isolation

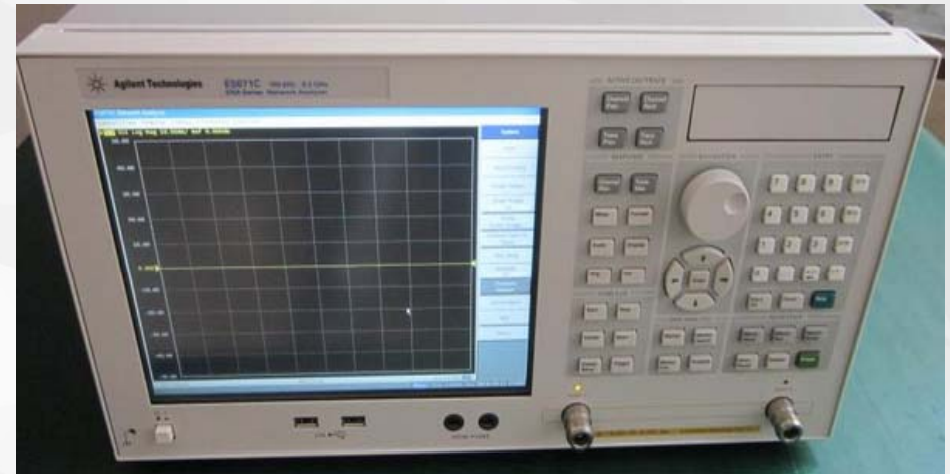

Typical Setup for Test System

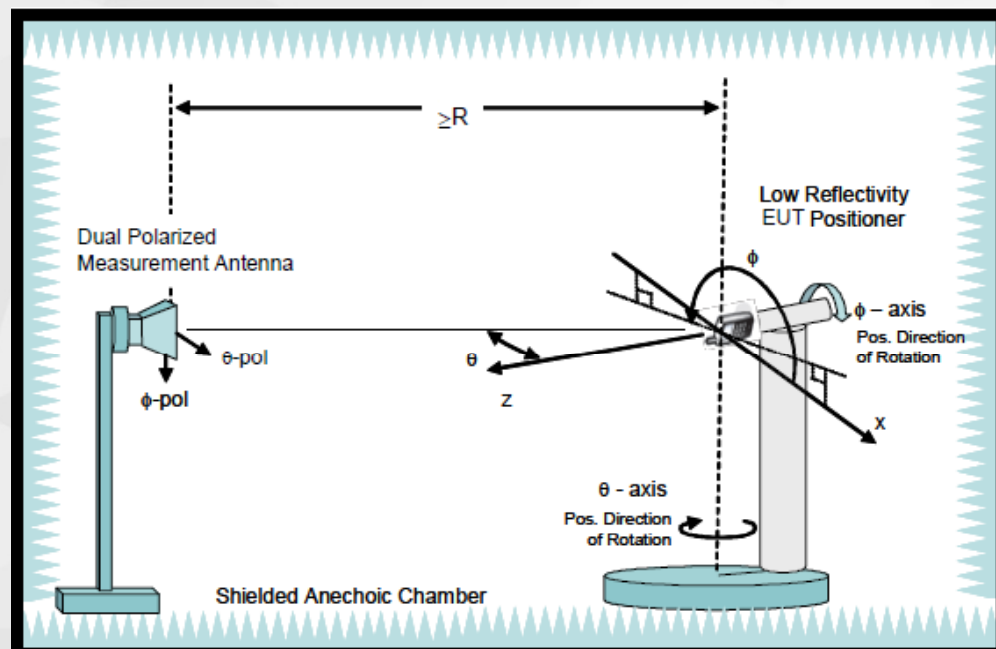


Combined-Axes System

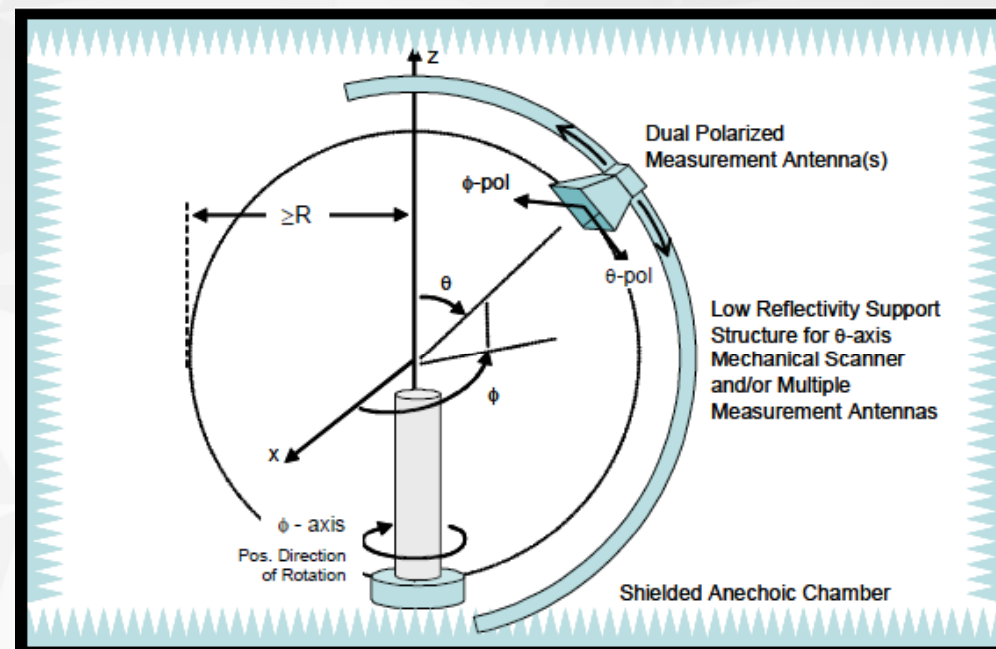

Distributed-Axes System

Anechoic Chamber

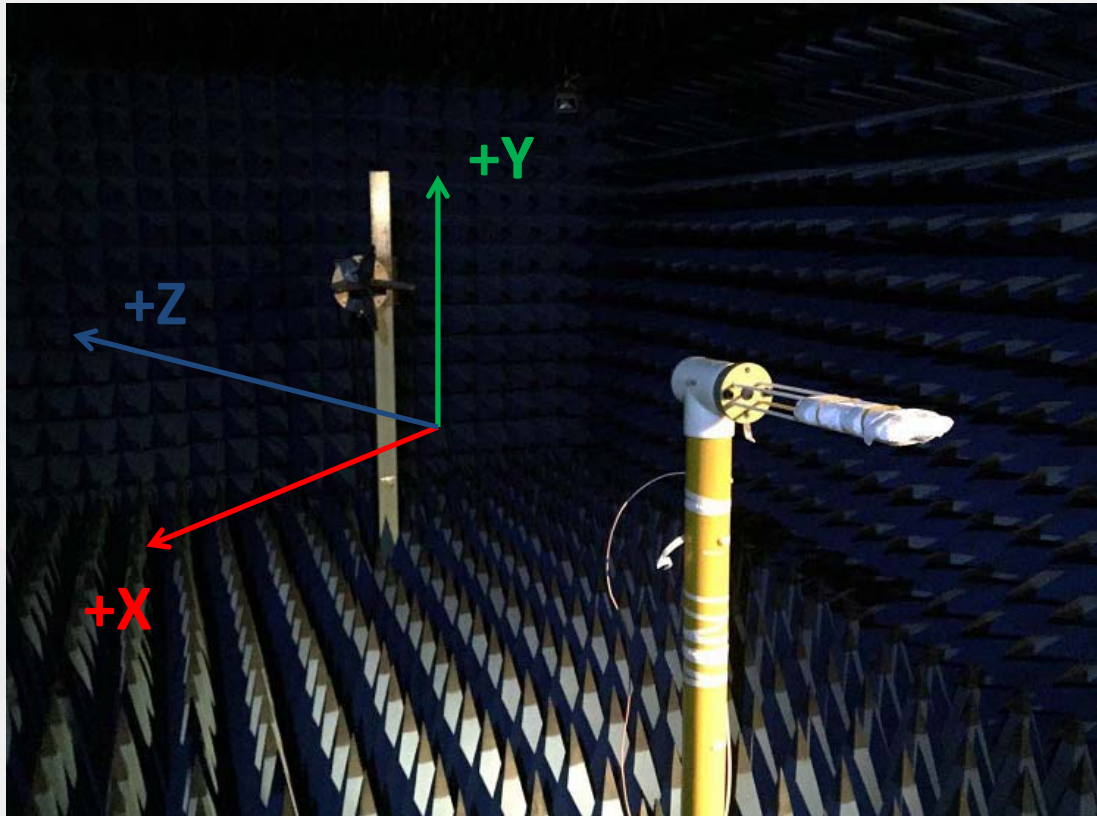


Combined-Axes System

Test Instrument

Generator	Agilent E4438C
Test Item	GPS

Radio Communication Tester	R&S CMW500
Test Item	Active Test

Network Analyzer	Agilent E5071C
Test Item	Passive Test

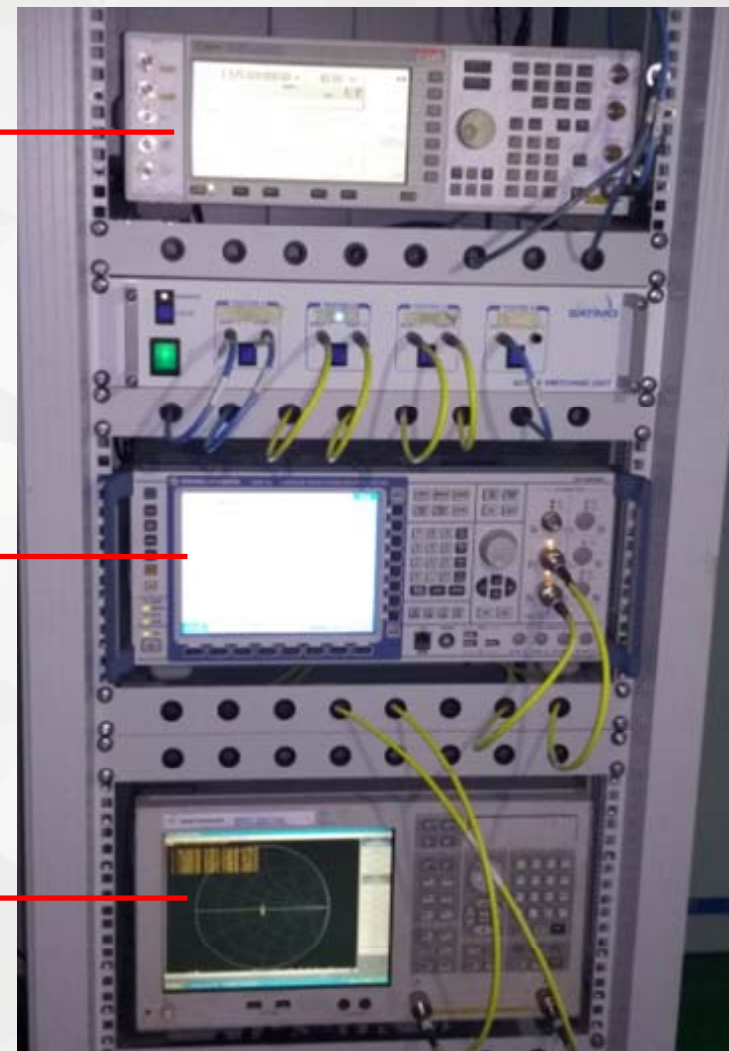


Test Fixture



S11 Return Loss



S11 VSWR

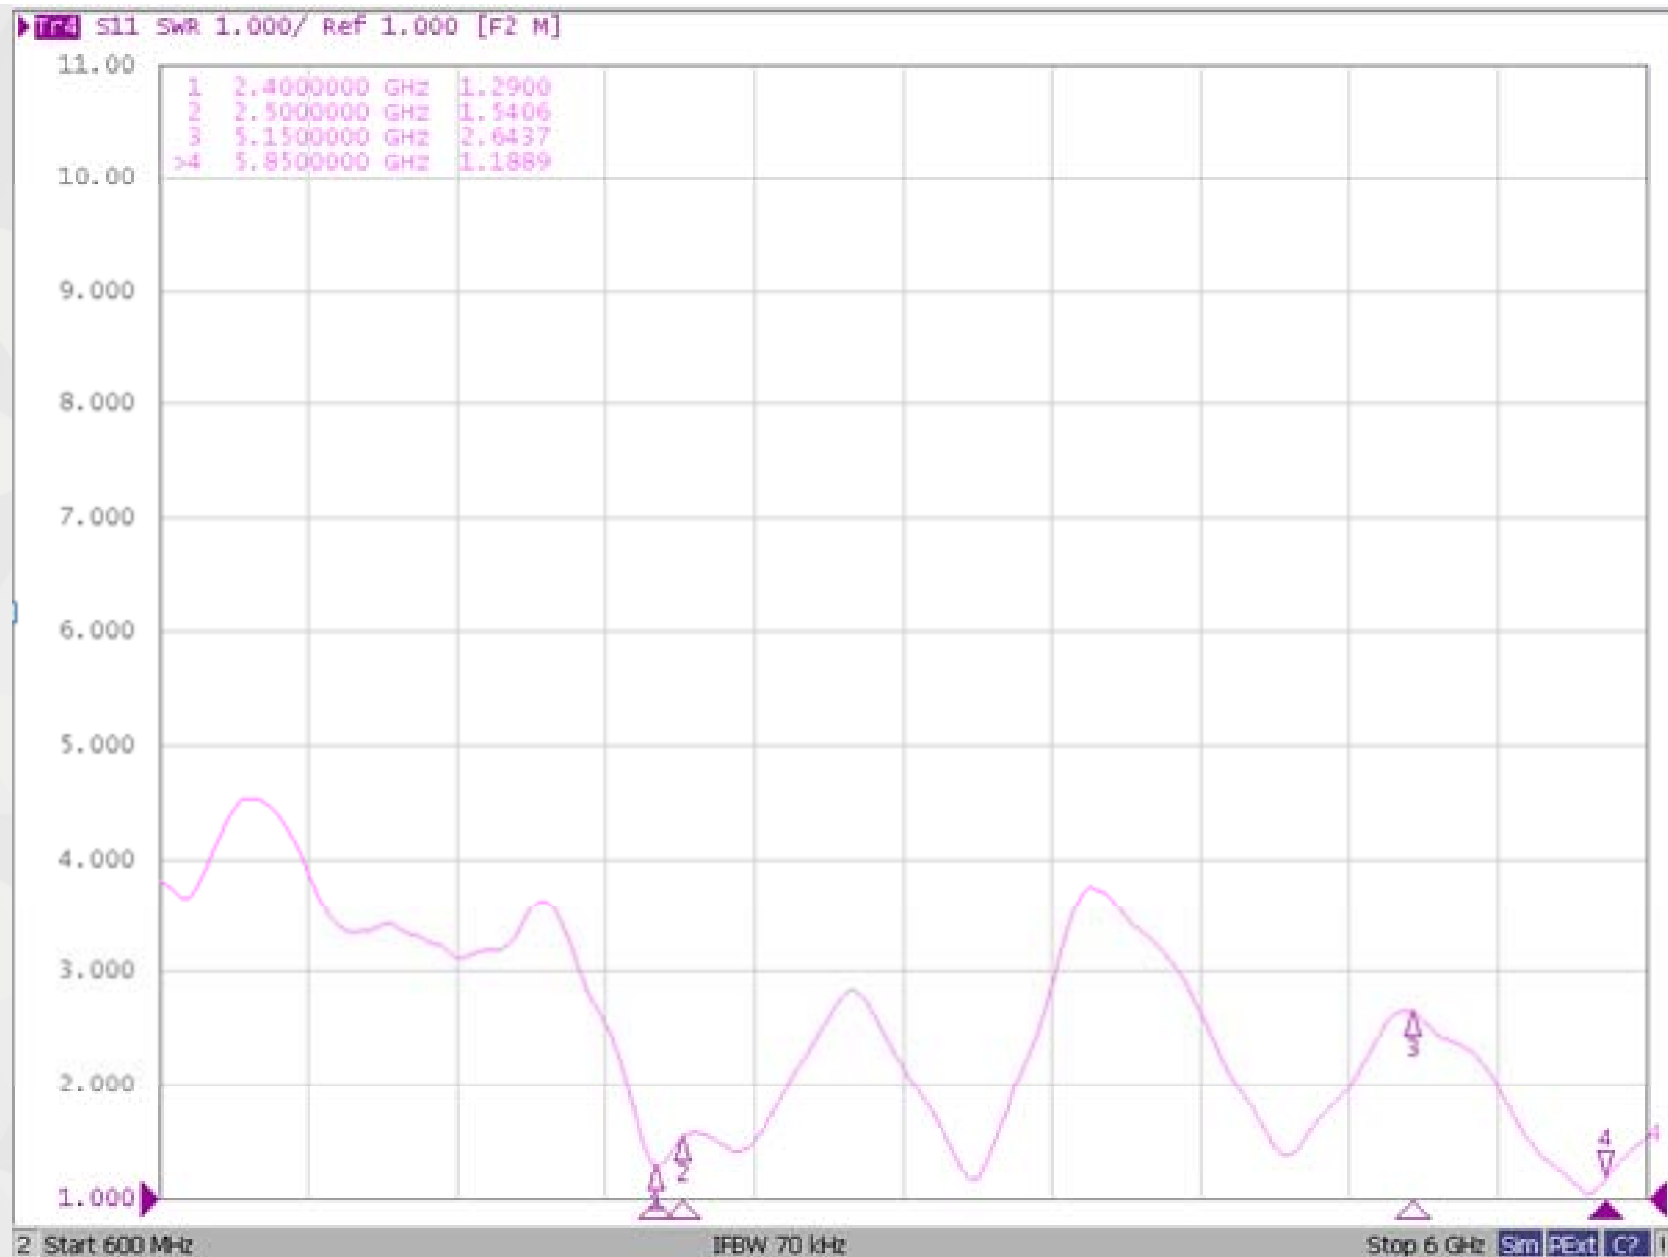


Gain/Efficiency


Freq.(MHz)	Gain(dBi)	Efficiency	Freq.(MHz)	Gain(dBi)	Efficiency
2400	0.25	51.60%	5150	-0.91	30.80%
2410	0.47	51.80%	5200	-0.69	40.60%
2420	-0.02	49.00%	5250	-0.67	41.30%
2430	-0.12	46.60%	5300	-0.19	44.20%
2440	-0.04	46.50%	5350	-0.92	36.70%
2450	-0.55	45.60%	5400	-0.02	43.40%
2460	-0.34	45.00%	5450	0.49	43.50%
2470	-0.11	44.70%	5500	0.65	41.00%
2480	-0.02	43.80%	5550	0.39	35.80%
2490	-0.11	43.40%	5600	1.09	42.70%
2500	-0.24	43.50%	5650	1.28	45.70%
			5700	0.48	37.10%
			5750	0.16	32.10%
			5800	1	36.40%
			5850	1.1	38.80%

Test Result


Frequency(GHz)	2.4	2.45	2.5
VSWR	1.29	1.4	1.54
Gain(dBi)	0.25	-0.55	-0.24

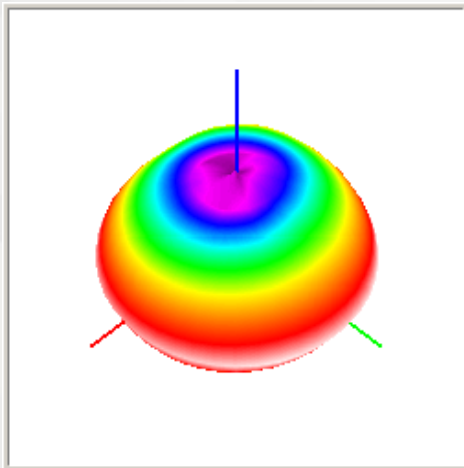

2.4GHz

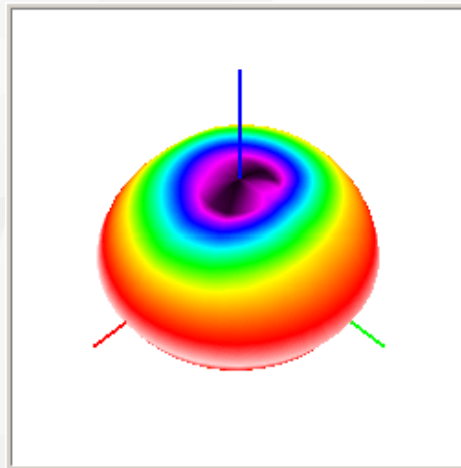


2.45GHz

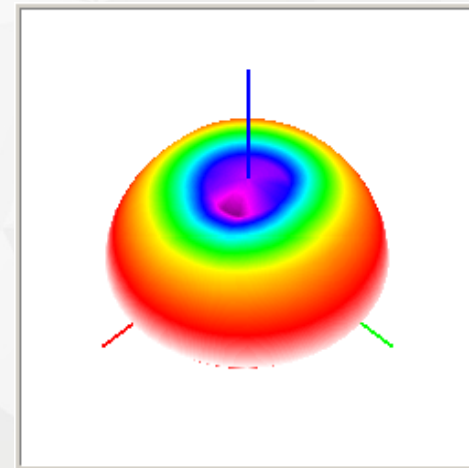


2.5GHz

Test Result


Frequency(GHz)	5.15	5.5	5.85
VSWR	2.64	1.8	1.18
Gain(dBi)	-0.91	0.65	1.1

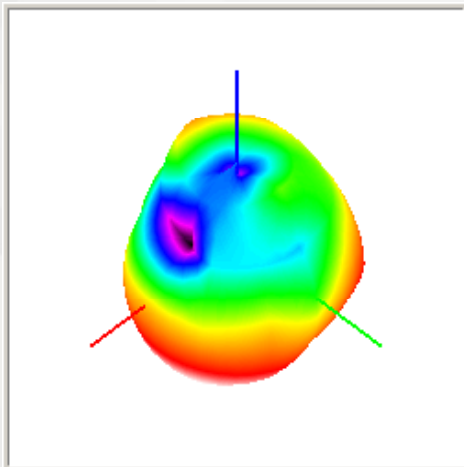

5.15GHz

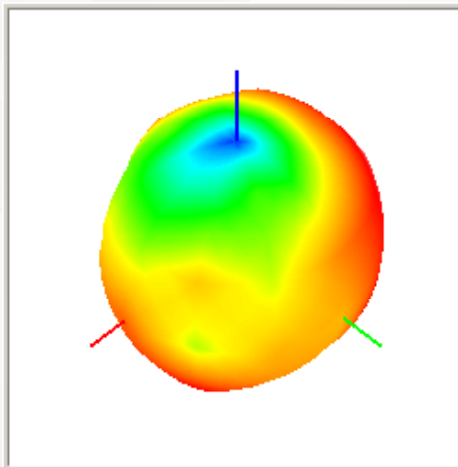

5.5GHz

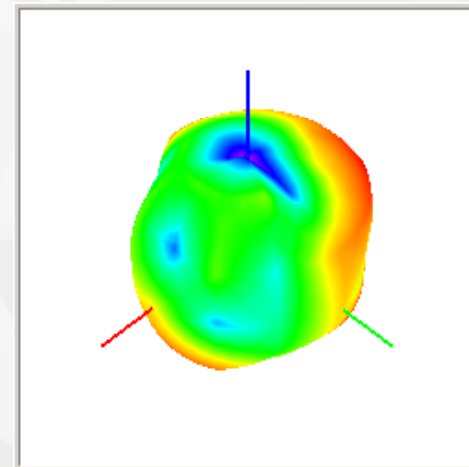

5.85GHz