



Product Service

---

**Choose certainty.  
Add value.**

## Report On

FCC Testing of the Sharp Hep-band LTE (B1 / B3 / B5 / B13 / B17 / B26 / B38), Dual-band WCDMA (FDD I / V), Quad-band GSM (850 / 900 / 1800 / 1900) & WiMAX2+ (TDD41) multi mode Smart phone with Bluetooth, WLAN, SRD(NFC, FeliCa) and GPS in accordance with FCC 47 CFR Part 22 and FCC 47 CFR Part 2 (GSM 850)

COMMERCIAL-IN-CONFIDENCE

FCC ID: APYHRO00234

Document 75933606 Report 16 Issue 1

May 2016



Product Service

TÜV SÜD Product Service, Octagon House, Concorde Way, Segensworth North,  
Fareham, Hampshire, United Kingdom, PO15 5RL  
Tel: +44 (0) 1489 558100. Website: [www.tuv-sud.co.uk](http://www.tuv-sud.co.uk)

COMMERCIAL-IN-CONFIDENCE

**REPORT ON**

FCC Testing of the Sharp Hep-band LTE (B1 / B3 / B5 / B13 / B17 / B26 / B38), Dual-band WCDMA (FDD I / V), Quad-band GSM (850 / 900 / 1800 / 1900) & WiMAX2+ (TDD41) multi mode Smart phone with Bluetooth, WLAN, SRD(NFC, FeliCa) and GPS in accordance with FCC 47 CFR Part 22 and FCC 47 CFR Part 2 (GSM 850)

Document 75933606 Report 16 Issue 1

May 2016

**PREPARED FOR**

Sharp Telecommunications of Europe Ltd  
Inspired  
Easthampstead Road  
Bracknell  
Berkshire  
RG12 1NS

**PREPARED BY**

**Natalie Bennett**  
Senior Administrator, Project Support

**APPROVED BY**

**Simon Bennett**  
Authorised Signatory

**DATED**

05 May 2016

**ENGINEERING STATEMENT**

The measurements shown in this report were made in accordance with the procedures described on test pages. All reported testing was carried out on a sample equipment to demonstrate limited compliance with FCC 47 CFR Part 22 and FCC 47 CFR Part 2. The sample tested was found to comply with the requirements defined in the applied rules.

Test Engineer(s);

M Toubella

M Russell



T Guy



## CONTENTS

Section	Page No
<b>1</b>	<b>REPORT SUMMARY ..... 3</b>
1.1	Introduction ..... 4
1.2	Brief Summary of Results ..... 5
1.3	Product Technical Description ..... 6
1.4	Product Information ..... 6
1.5	Test Conditions ..... 6
1.6	Deviations from the Standard ..... 6
1.7	Modification Record ..... 6
<b>2</b>	<b>TEST DETAILS ..... 7</b>
2.1	Frequency Tolerance ..... 8
2.2	Spurious Emissions at Band Edge ..... 10
2.3	Maximum Conducted Output Power ..... 13
2.4	Emission Limitations for Cellular Equipment ..... 15
2.5	Spurious Emissions at Antenna Terminals ..... 22
2.6	26 dB Bandwidth ..... 29
2.7	Modulation Characteristics ..... 32
<b>3</b>	<b>TEST EQUIPMENT USED ..... 35</b>
3.1	Test Equipment Used ..... 36
3.2	Measurement Uncertainty ..... 38
<b>4</b>	<b>ACCREDITATION, DISCLAIMERS AND COPYRIGHT ..... 39</b>
4.1	Accreditation, Disclaimers and Copyright ..... 40



Product Service

## **SECTION 1**

### **REPORT SUMMARY**

FCC Testing of the  
Sharp Hep-band LTE (B1 / B3 / B5 / B13 / B17 / B26 / B38), Dual-band WCDMA (FDD I / V),  
Quad-band GSM (850 / 900 / 1800 / 1900) & WiMAX2+ (TDD41) multi mode Smart phone with  
Bluetooth, WLAN, SRD(NFC, FeliCa) and GPS  
In accordance with FCC 47 CFR Part 22 and FCC 47 CFR Part 2 (GSM 850)



Product Service

## 1.1 INTRODUCTION

The information contained in this report is intended to show the verification of FCC Testing of the Sharp Hep-band LTE (B1 / B3 / B5 / B13 / B17 / B26 / B38), Dual-band WCDMA (FDD I / V), Quad-band GSM (850 / 900 / 1800 / 1900) & WiMAX2+ (TDD41) multi mode Smart phone with Bluetooth, WLAN, SRD(NFC, FeliCa) and GPS to the requirements of FCC 47 CFR Part 22 and FCC 47 CFR Part 2.

Objective	To perform FCC Testing to determine the Equipment Under Test's (EUT's) compliance with the Test Specification, for the series of tests carried out.
Manufacturer	Sharp Corporation
Serial Number(s)	IMEI 004401115723286 IMEI 004401115723823
Number of Samples Tested	2
Test Specification/Issue/Date	FCC 47 CFR Part 22 (2015) FCC 47 CFR Part 2 (2015)
Disposal	Held Pending Disposal
Reference Number	Not Applicable
Date	Not Applicable
Order Number	10749
Date	15 February 2016
Start of Test	23 March 2016
Finish of Test	8 April 2016
Name of Engineer(s)	M Toubella M Russell T Guy
Related Document(s)	ANSI C63.4 (2014) ANSI TIA-603-D (2010)



## 1.2 BRIEF SUMMARY OF RESULTS

A brief summary of the tests carried out in accordance with FCC 47 CFR Part 22 and FCC 47 CFR Part 2 (GSM 850) is shown below.

Section	Specification Clause		Test Description	Result	Comments/Base Standard
GSM 850					
2.1	22.355	2.1055	Frequency Tolerance	Pass	
2.2	22.905	2.1051	Spurious Emissions at Band Edge	Pass	
2.3	22.913 (a)	2.1046	Maximum Conducted Output Power	Pass	
2.4	22.917	-	Emission Limitations for Cellular Equipment	Pass	
2.5	22.917 (a)	2.1051	Spurious Emissions at Antenna Terminals	Pass	
2.6	22.917 (b)	2.1049 (h)	26 dB Bandwidth	Pass	
2.7	-	2.1047 (d)	Modulation Characteristics	-	Customer Declaration



Product Service

### **1.3 PRODUCT TECHNICAL DESCRIPTION**

Refer to Model Description APYHRO00234 Rev 4.0 document.

### **1.4 PRODUCT INFORMATION**

#### **1.4.1 Technical Description**

The Equipment Under Test (EUT) was a Sharp Hep-band LTE (B1 / B3 / B5 / B13 / B17 / B26 / B38), Dual-band WCDMA (FDD I / V), Quad-band GSM (850 / 900 / 1800 / 1900) & WiMAX2+ (TDD41) multi mode Smart phone with Bluetooth, WLAN, SRD(NFC, FeliCa) and GPS. A full technical description can be found in the manufacturer's documentation.

### **1.5 TEST CONDITIONS**

For all tests the EUT was set up in accordance with the relevant test standard and to represent typical operating conditions. Tests were applied with the EUT situated in a shielded enclosure.

The EUT was powered from a 4.0 V DC supply.

FCC Measurement Facility Registration Number  
90987 Octagon House, Fareham Test Laboratory

### **1.6 DEVIATIONS FROM THE STANDARD**

No deviations from the applicable test standard were made during testing

### **1.7 MODIFICATION RECORD**

Modification 0 - No modifications were made to the test sample during testing.



Product Service

## **SECTION 2**

### **TEST DETAILS**

FCC Testing of the  
Sharp Hep-band LTE (B1 / B3 / B5 / B13 / B17 / B26 / B38), Dual-band WCDMA (FDD I / V),  
Quad-band GSM (850 / 900 / 1800 / 1900) & WiMAX2+ (TDD41) multi mode Smart phone with  
Bluetooth, WLAN, SRD(NFC, FeliCa) and GPS  
In accordance with FCC 47 CFR Part 22 and FCC 47 CFR Part 2 (GSM 850)





Product Service

## **2.1 FREQUENCY TOLERANCE**

### **2.1.1 Specification Reference**

FCC 47 CFR Part 22, Clause 22.355  
FCC 47 CFR Part 2, Clause 2.1055

### **2.1.2 Equipment Under Test and Modification State**

S/N: IMEI 004401115723286 - Modification State 0

### **2.1.3 Date of Test**

8 April 2016

### **2.1.4 Test Equipment Used**

The major items of test equipment used for the above tests are identified in Section 3.1.

### **2.1.5 Test Procedure**

This test was performed in accordance with FCC 47 CFR Part 2, clause 2.1055.

#### Remarks

A radio communications test set frequency measurement function was used to measure the frequency error. The radio communications test set was configured for an uplink frequency of 836.4 MHz and the frequency reference was set to an external 10 MHz rubidium frequency standard.

### **2.1.6 Environmental Conditions**

Ambient Temperature	24.7 - 25.6°C
Relative Humidity	30.0 - 30.3%



### 2.1.7 Test Results

#### 4.0 V DC Supply

#### GSM 850, 836.40 MHz, Circuit-Switched (Voice), GMSK, Frequency Tolerance Under Temperature Variations Results

Temperature	Fundamental Frequency Deviation (ppm)
-30 °C	0.024
-20 °C	0.029
-10 °C	0.036
0 °C	0.026
+10 °C	0.037
+20 °C	0.032
+30 °C	0.046
+40 °C	0.026
+50 °C	0.017

#### GSM 850, 836.40 MHz, Circuit-Switched (Voice), GMSK, Frequency Tolerance Under Voltage Variations Results

Voltage	Fundamental Frequency Deviation (ppm)
4.0 V DC	0.035
3.7 V DC	0.050

#### FCC 47 CFR Part 22, Limit Clause 22.355

Frequency Range (MHz)	Base, Fixed (ppm)	Mobile ≤ 3 watts (ppm)	Mobile ≤ 3 watts (ppm)
25 to 50	20	20	50
50 to 450	5	5	50
450 to 512	2.5	5	5
821 to 896	1.5	2.5	2.5
928 to 929	5.0	-	-
929 to 960	1.5	-	-
2110 to 2220	10	-	-



Product Service

## **2.2 SPURIOUS EMISSIONS AT BAND EDGE**

### **2.2.1 Specification Reference**

FCC 47 CFR Part, Clause 22.905  
FCC 47 CFR Part 2, Clause 2.1051

### **2.2.2 Equipment Under Test and Modification State**

S/N: IMEI 004401115723286 - Modification State 0

### **2.2.3 Date of Test**

31 March 2016

### **2.2.4 Test Equipment Used**

The major items of test equipment used for the above tests are identified in Section 3.1.

### **2.2.5 Test Procedure**

The test was performed in accordance with KDB 971168 D01 v02r02, Clause 6.

### **2.2.6 Environmental Conditions**

Ambient Temperature	21.0°C
Relative Humidity	33.6%




## 2.2.7 Test Results

4.0 V DC Supply

GSM 850, Circuit-Switched (Voice), GMSK, Spurious Emissions at Band Edge Results


Block Edge	Frequency Block (MHz)	
	A :824.0 MHz – 835.0 MHz	B :846.5 MHz – 849.0 MHz
Lower	Channel: 128 824.2 MHz	-
Upper	-	Channel: 251 848.8 MHz

GSM 850, Circuit-Switched (Voice), GMSK, Frequency Block A, Spurious Emissions at Band Edge Plot

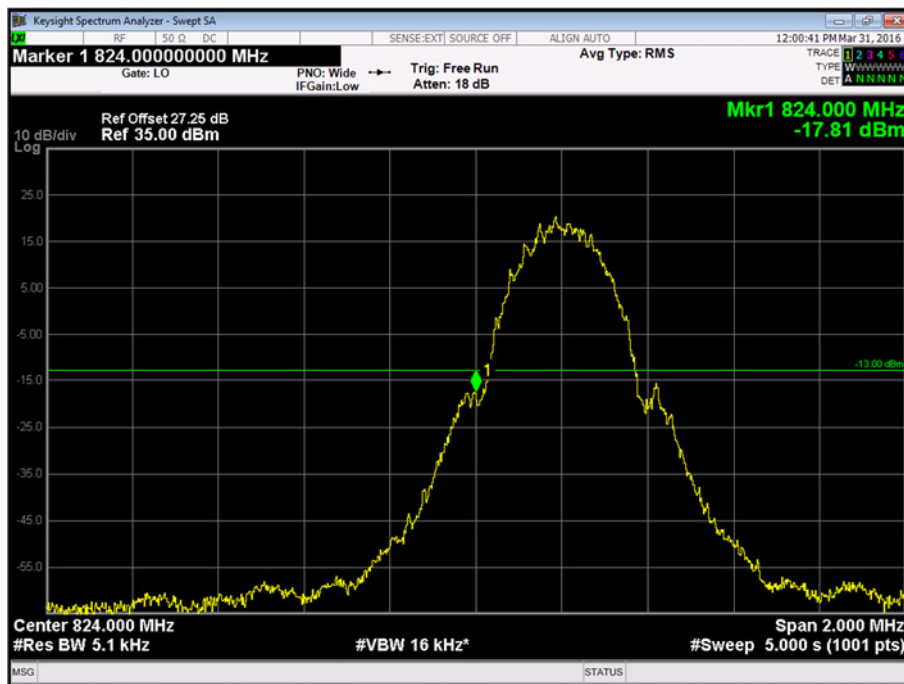



Product Service

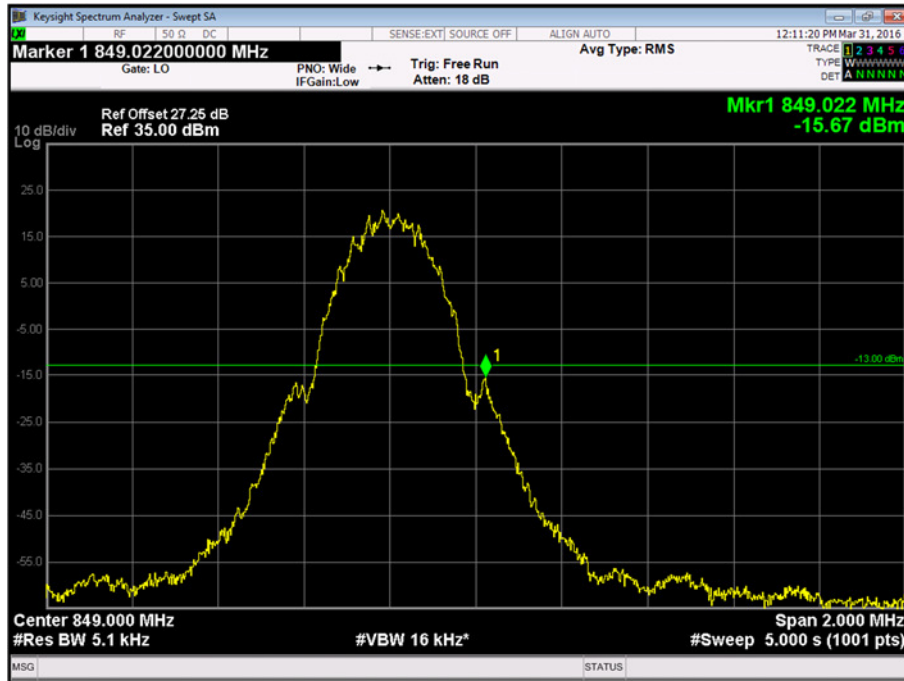GSM 850, Circuit-Switched (Voice), GMSK, Frequency Block B, Spurious Emissions at Band Edge PlotFCC 47 CFR Part 22, Limit Clause 22.905 and 22.917

-13 dBm at block edge.



Product Service

## **2.3 MAXIMUM CONDUCTED OUTPUT POWER**

### **2.3.1 Specification Reference**

FCC 47 CFR Part 22, Clause 22.913 (a)  
FCC 47 CFR Part 2, Clause 2.1046

### **2.3.2 Equipment Under Test and Modification State**

S/N: IMEI 004401115723286 - Modification State 0

### **2.3.3 Date of Test**

23 March 2016

### **2.3.4 Test Equipment Used**

The major items of test equipment used for the above tests are identified in Section 3.1.

### **2.3.5 Test Procedure**

The test was performed in accordance with KDB 971168 D01 v02r02, clause 5.1.2.

#### Remarks

The antenna gain was declared by the manufacturer as 2.0 dBi. As per KDB 412172 D01 v01r01 results are recorded in ERP therefore reported results are calculated as per the following calculation:

$ERP = P_{out} \text{ (dBm)} + ANT \text{ Gain (dBi)} - 2.15 \text{ (dB)}.$

### **2.3.6 Environmental Conditions**

Ambient Temperature	23.3°C
Relative Humidity	25.6%



Product Service

**2.3.7 Test Results**

4.0 V DC Supply

GSM 850, Circuit-Switched (Voice), Maximum Conducted Output Power Results

Frequency	Conducted Power (dBm)	Antenna Gain	ERP (dBm)	EIRP (W)
824.20 MHz	32.70	2.0 dBi	32.55	1.80
836.40 MHz	32.62	2.0 dBi	32.47	1.77
848.80 MHz	32.69	2.0 dBi	32.54	1.79

FCC 47 CFR Part 22, Limit Clause 22.913 (a)(2)

Mobile Transmitters: 7 W or 38.45 dBm



Product Service

## **2.4 EMISSION LIMITATIONS FOR CELLULAR EQUIPMENT**

### **2.4.1 Specification Reference**

FCC 47 CFR Part 22, Clause 22.917

### **2.4.2 Equipment Under Test and Modification State**

S/N: IMEI 004401115723823 - Modification State 0

### **2.4.3 Date of Test**

2 April 2016

### **2.4.4 Test Equipment Used**

The major items of test equipment used for the above tests are identified in Section 3.1.

### **2.4.5 Test Procedure**

The test was performed in accordance with KDB 971168 D01 v02r02, Clause 5.8 and 7 and ANSI TIA-603-D, Clause 2.2.12. The EUT was configured as defined in ANSI C63.4.

### **2.4.6 Environmental Conditions**

Ambient Temperature	19.2°C
Relative Humidity	33.0%





Product Service


2.4.7 Test Results

GSM 850, 824.20 MHz, Emission Limitations for Cellular Equipment Results

Frequency (MHz)	Emission Results (dBm)
*	

\*No emissions were detected within 10 dB of the limit.

GSM 850, 824.20 MHz, 30 MHz to 1 GHz, Emission Limitations for Cellular Equipment Plot

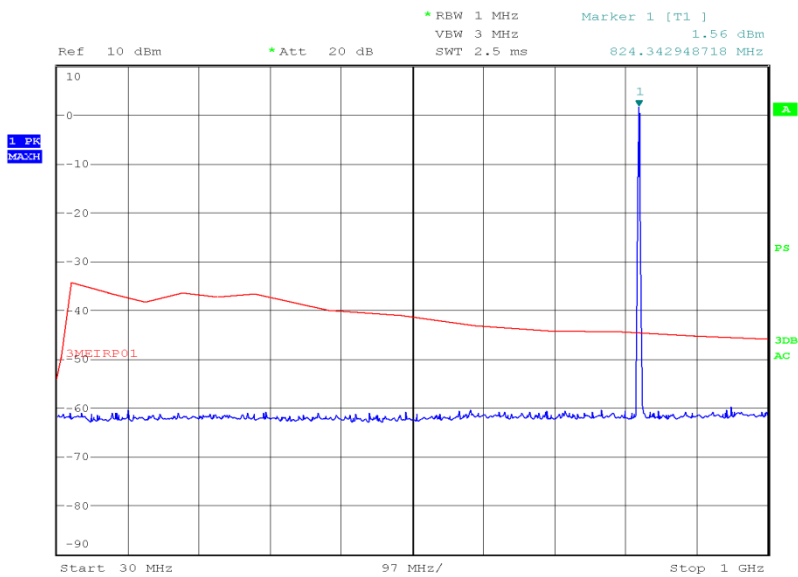


Date: 1.APR.2016 20:03:01




Product Service

### GSM 850, 824.20 MHz, 1 GHz to 8 GHz, Emission Limitations for Cellular Equipment Plot

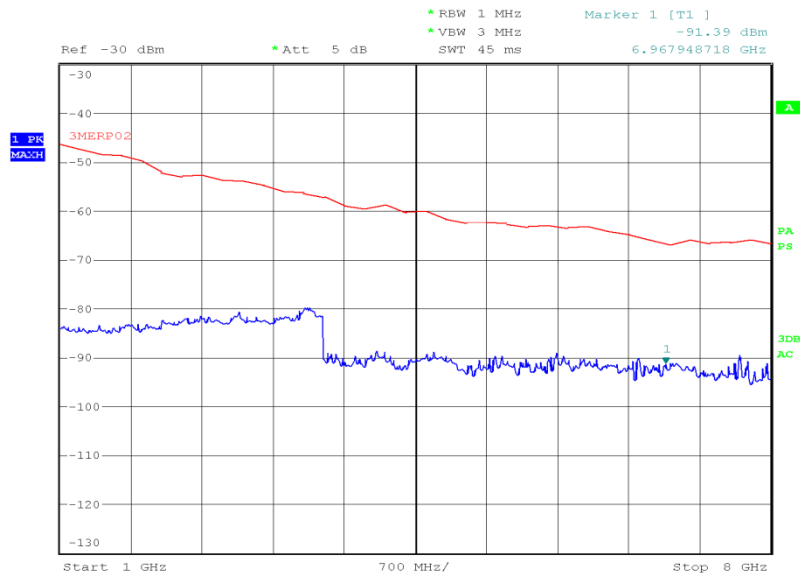

Date: 2.APR.2016 22:42:10

### GSM 850, 824.20 MHz, 8 GHz to 9 GHz, Emission Limitations for Cellular Equipment Plot

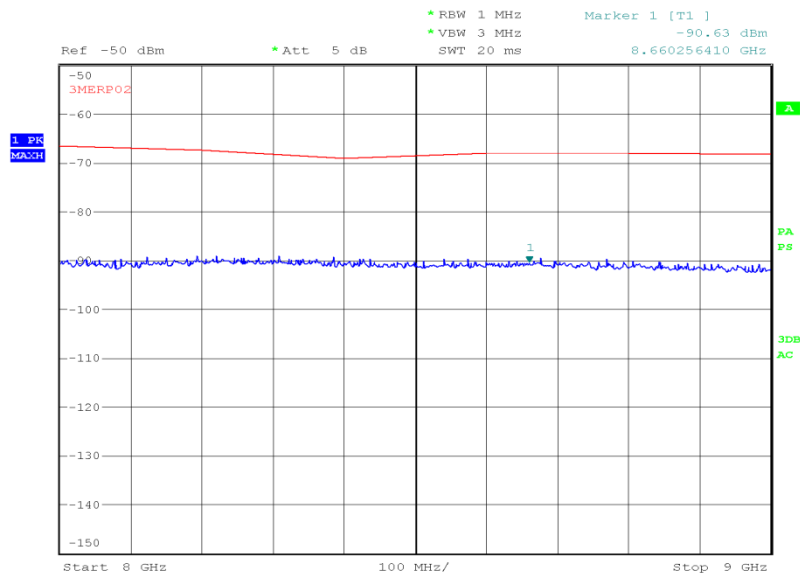

Date: 2.APR.2016 22:24:39




Product Service

GSM 850, 836.40 MHz, Emission Limitations for Cellular Equipment Results


Frequency (MHz)	Emission Results (dBm)
*	

\*No emissions were detected within 10 dB of the limit.


GSM 850, 836.40 MHz, 30 MHz to 1 GHz, Emission Limitations for Cellular Equipment Plot

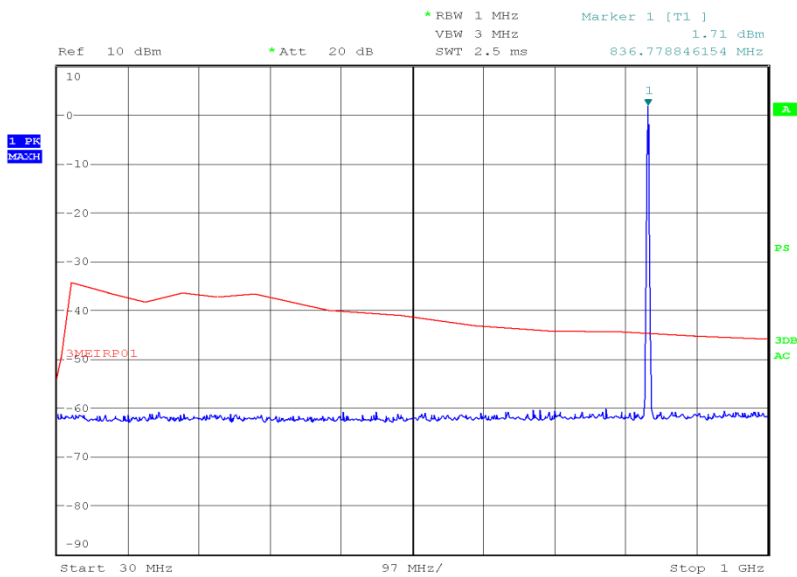

Date: 1.APR.2016 20:00:52

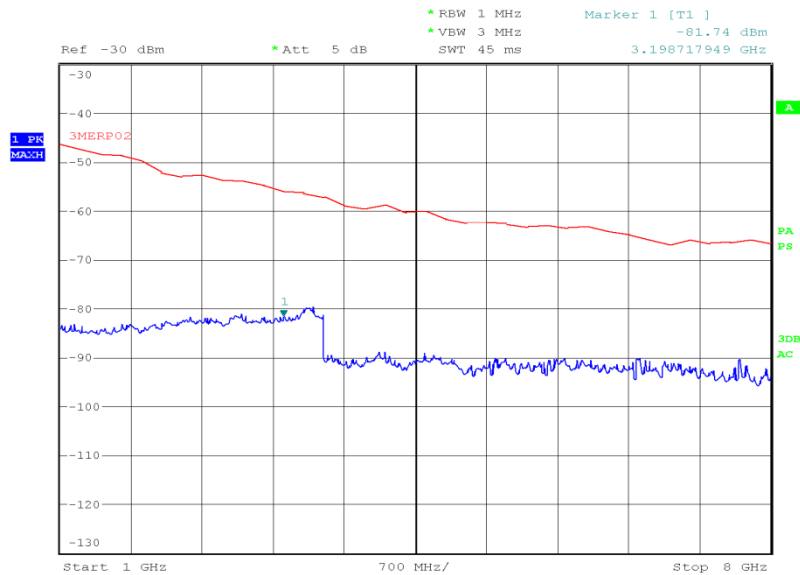GSM 850, 836.40 MHz, 1 GHz to 8 GHz, Emission Limitations for Cellular Equipment Plot

Date: 2.APR.2016 22:37:29

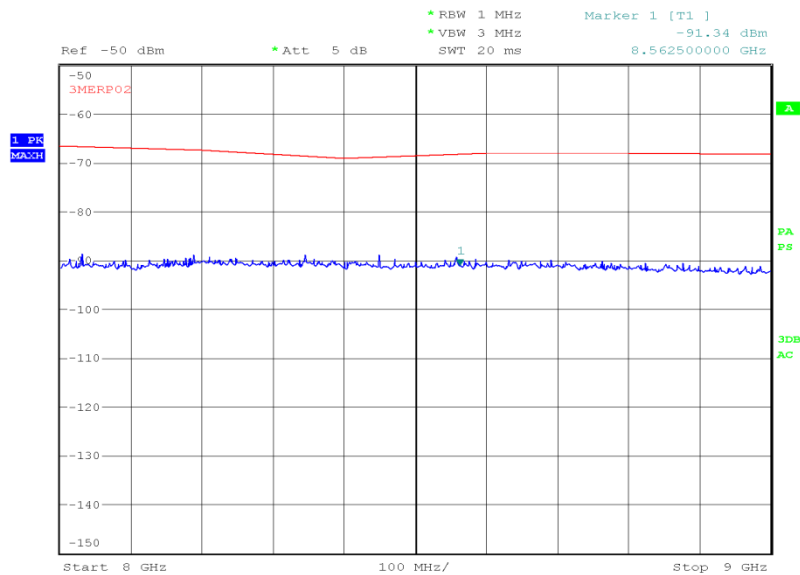GSM 850, 836.40 MHz, 8 GHz to 9 GHz, Emission Limitations for Cellular Equipment Plot

Date: 2.APR.2016 22:26:48




Product Service

GSM 850, 848.80 MHz, Emission Limitations for Cellular Equipment Results

Frequency (MHz)	Emission Results (dBm)
*	

\*No emissions were detected within 10 dB of the limit.


GSM 850, 848.80 MHz, 30 MHz to 1 GHz, Emission Limitations for Cellular Equipment Plot

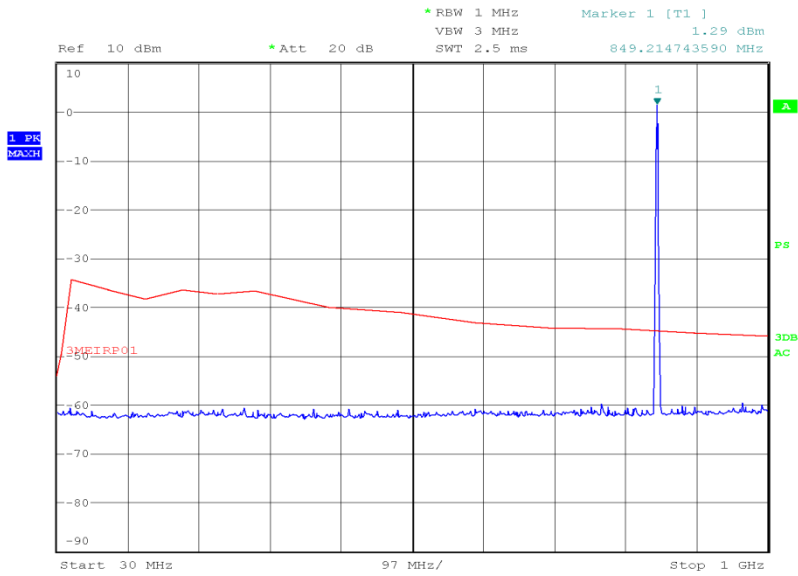

Date: 1.APR.2016 20:05:16




### GSM 850, 848.80 MHz, 1 GHz to 8 GHz, Emission Limitations for Cellular Equipment Plot

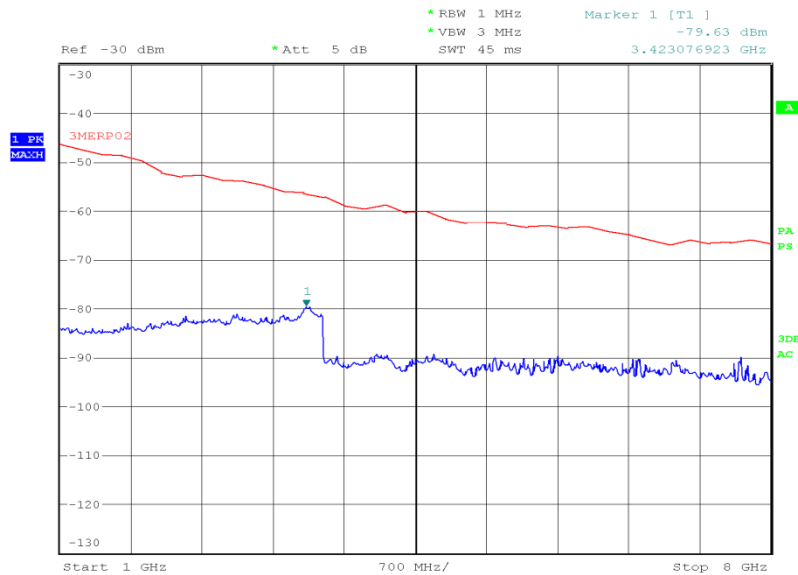

Date: 2.APR.2016 22:34:04

### GSM 850, 848.80 MHz, 8 GHz to 9 GHz, Emission Limitations for Cellular Equipment Plot

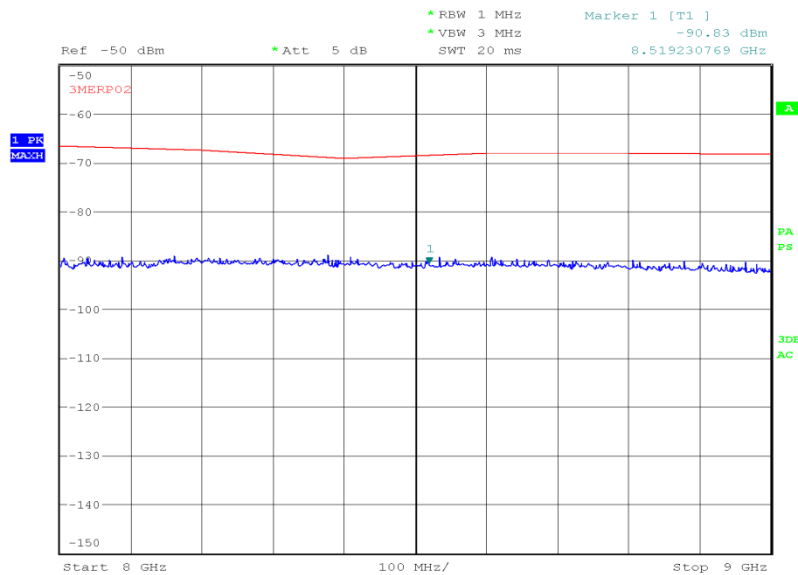

Date: 2.APR.2016 22:30:29

### FCC 47 CFR Part 22, Limit Clause 22.917 (a)

$$43 + 10 \log(P) \text{ or } -13 \text{ dBm}$$



Product Service

## **2.5 SPURIOUS EMISSIONS AT ANTENNA TERMINALS**

### **2.5.1 Specification Reference**

FCC 47 CFR Part 22, Clause 22.917 (a)  
FCC 47 CFR Part 2, Clause 2.1051

### **2.5.2 Equipment Under Test and Modification State**

S/N: IMEI 004401115723286 - Modification State 0

### **2.5.3 Date of Test**

31 March 2016

### **2.5.4 Test Equipment Used**

The major items of test equipment used for the above tests are identified in Section 3.1.

### **2.5.5 Test Procedure**

The test was performed in accordance with KDB 971168 D01 v02r02, Clause 6.

### **2.5.6 Environmental Conditions**

Ambient Temperature	21.0°C
Relative Humidity	33.6%



Product Service

2.5.7 Test Results


4.0 V DC Supply

GSM 850, 824.20 MHz, Spurious Emissions at Antenna Terminals Results

Frequency (MHz)	Emission Results (dBm)
*	

\*No emissions were detected within 10 dB of the limit.

GSM 850, 824.20 MHz, 9 kHz to 1 GHz, Spurious Emissions at Antenna Terminals Plot

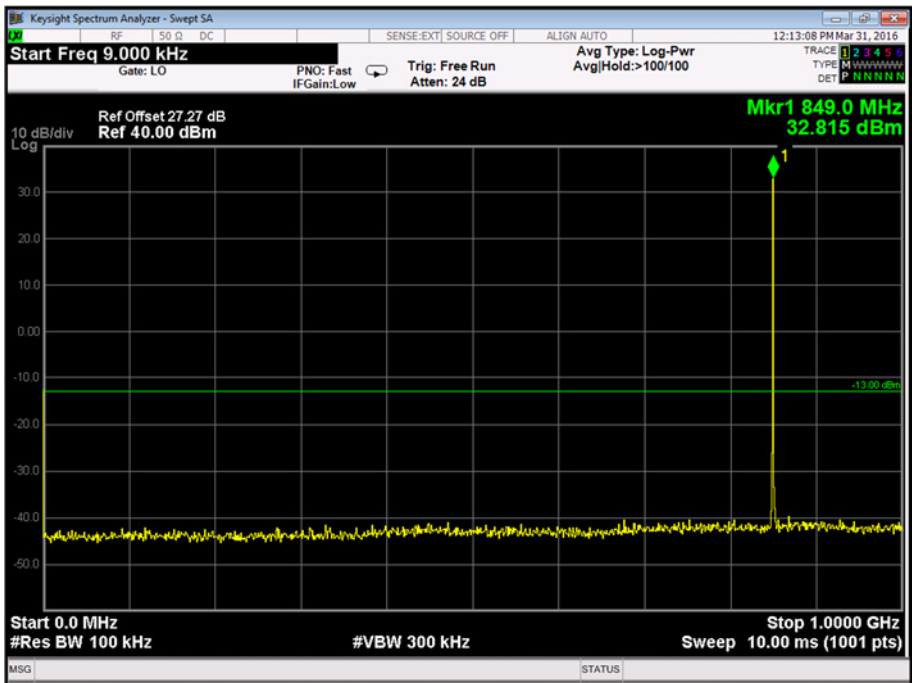







Product Service

GSM 850, 824.20 MHz, 1 GHz to 1.5 GHz, Spurious Emissions at Antenna Terminals Plot

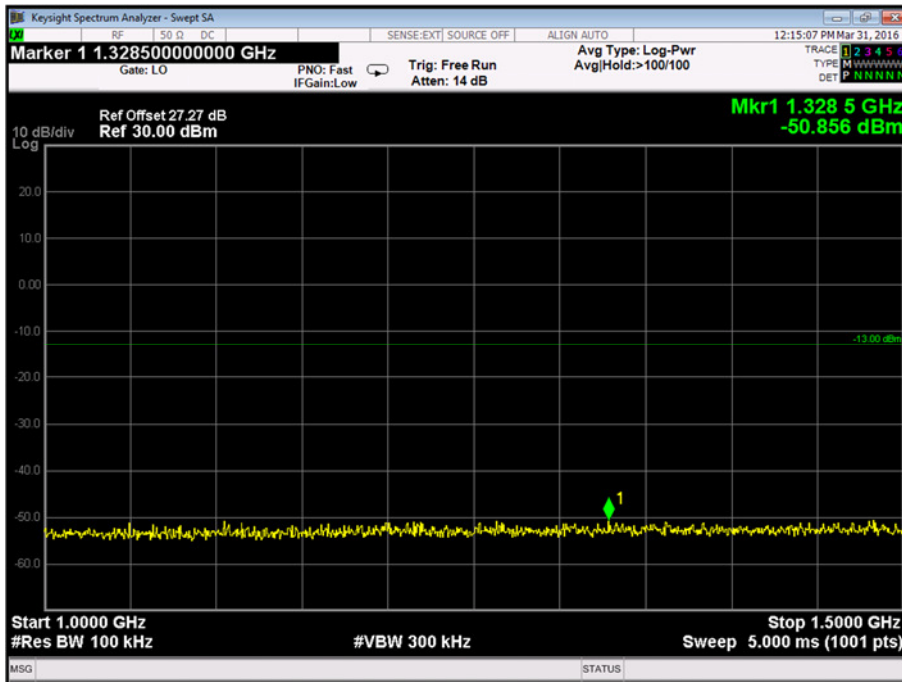

GSM 850, 824.20 MHz, 1.5 GHz to 9 GHz, Spurious Emissions at Antenna Terminals Plot

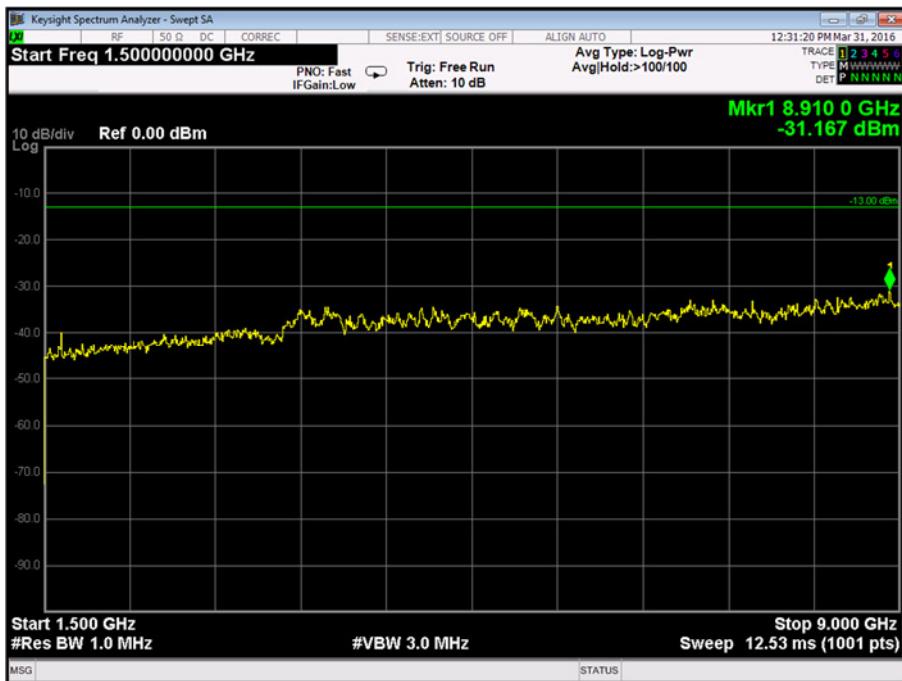




Product Service

GSM 850, 836.40 MHz, Spurious Emissions at Antenna Terminals Results

Frequency (MHz)	Emission Results (dBm)
*	



\*No emissions were detected within 10 dB of the limit.

GSM 850, 836.40 MHz, 9 kHz to 1 GHz, Spurious Emissions at Antenna Terminals Plot

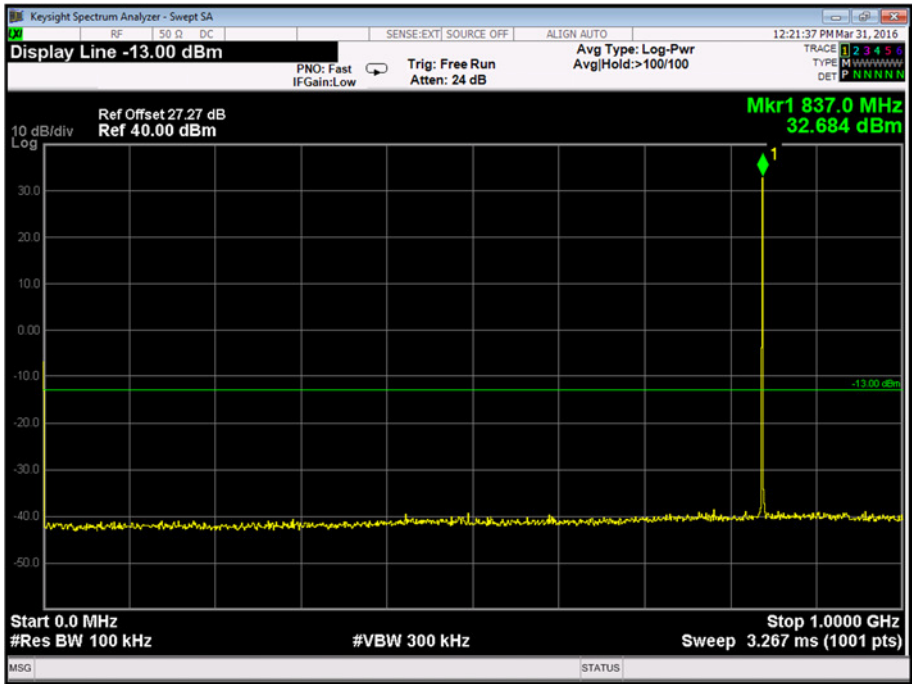



Product Service

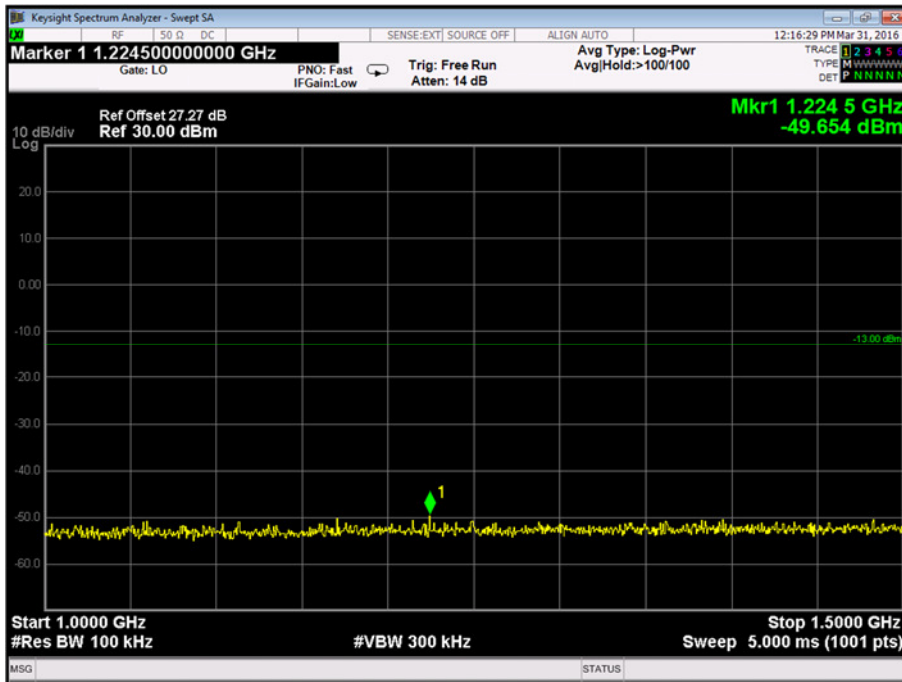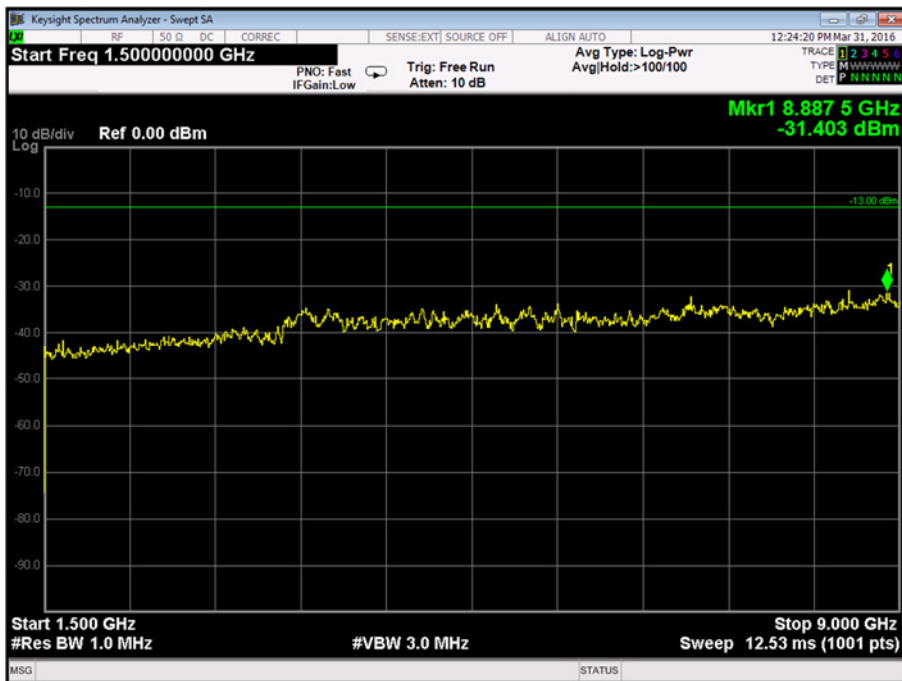GSM 850, 836.40 MHz, 1 GHz to 1.5 GHz, Spurious Emissions at Antenna Terminals PlotGSM 850, 836.40 MHz, 1.5 GHz to 9 GHz, Spurious Emissions at Antenna Terminals Plot




Product Service

GSM 850, 848.80 MHz, Spurious Emissions at Antenna Terminals Results

Frequency (MHz)	Emission Results (dBm)
*	

\*No emissions were detected within 10 dB of the limit.


GSM 850, 848.80 MHz, 9 kHz to 1 GHz, Spurious Emissions at Antenna Terminals Plot

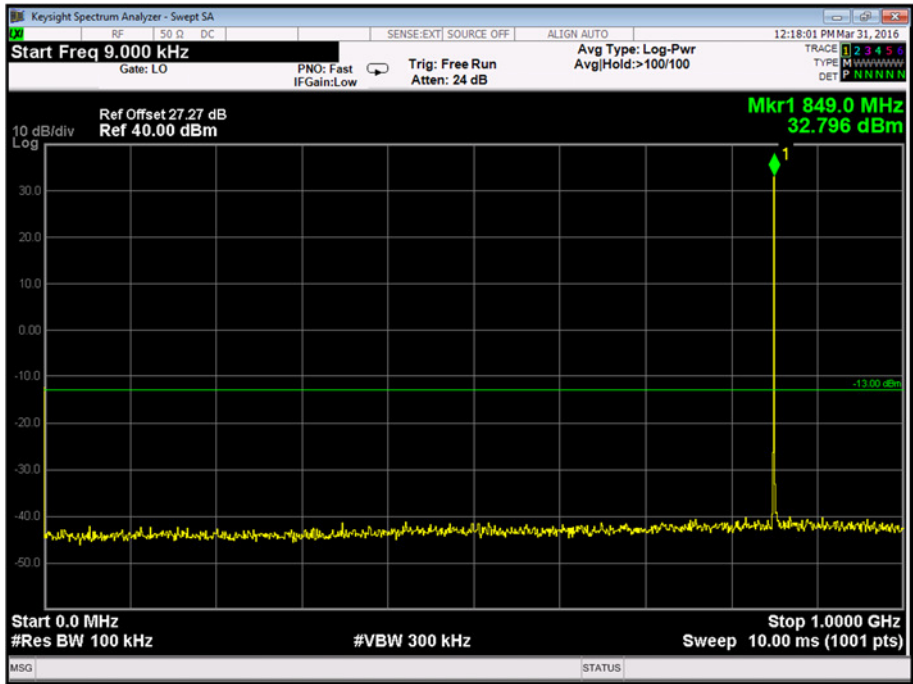




Product Service

### GSM 850, 848.80 MHz, 1 GHz to 1.5 GHz, Spurious Emissions at Antenna Terminals Plot

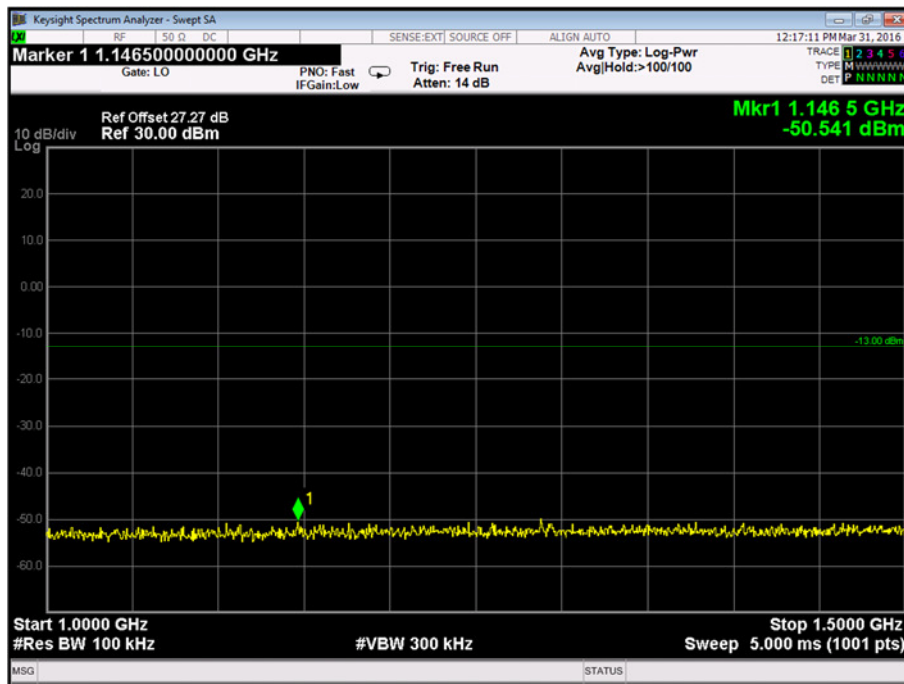

### GSM 850, 848.80 MHz, 1.5 GHz to 9 GHz, Spurious Emissions at Antenna Terminals Plot

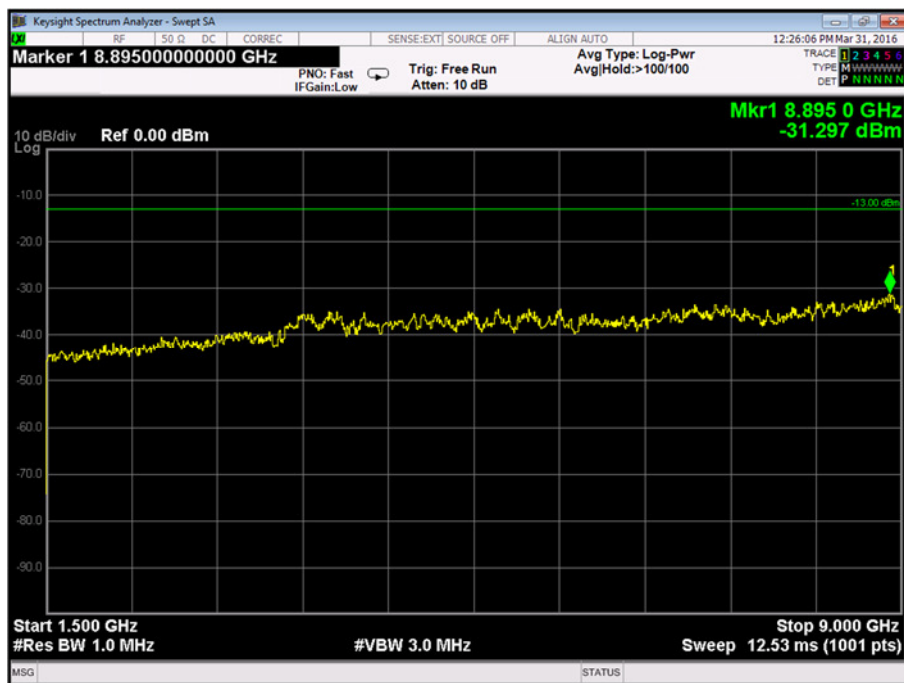

### FCC 47 CFR Part 22, Limit Clause 22.917 (a)

$43 + 10\log(P)$  or -13 dBm



Product Service

**2.6 26 dB BANDWIDTH****2.6.1 Specification Reference**

FCC 47 CFR Part 22, Clause 22.917 (b)  
FCC 47 CFR Part 2, Clause 2.1049 (h)

**2.6.2 Equipment Under Test and Modification State**

S/N: IMEI 004401115723286 - Modification State 0

**2.6.3 Date of Test**

30 March 2016

**2.6.4 Test Equipment Used**

The major items of test equipment used for the above tests are identified in Section 3.1.

**2.6.5 Test Procedure**

The test was performed in accordance with KDB 971168 D01 v02r02, Clause 4.1.

**2.6.6 Environmental Conditions**

Ambient Temperature	21.0°C
Relative Humidity	33.6%



Product Service


## 2.6.7 Test Results

4.0 V DC Supply

### GSM 850, GMSK, 26 dB Bandwidth Results

824.20 MHz	836.40 MHz	848.80 MHz
kHz	kHz	kHz
315.2	313.7	316.6


### GSM 850, 824.20 MHz, GMSK, 26 dB Bandwidth Plot

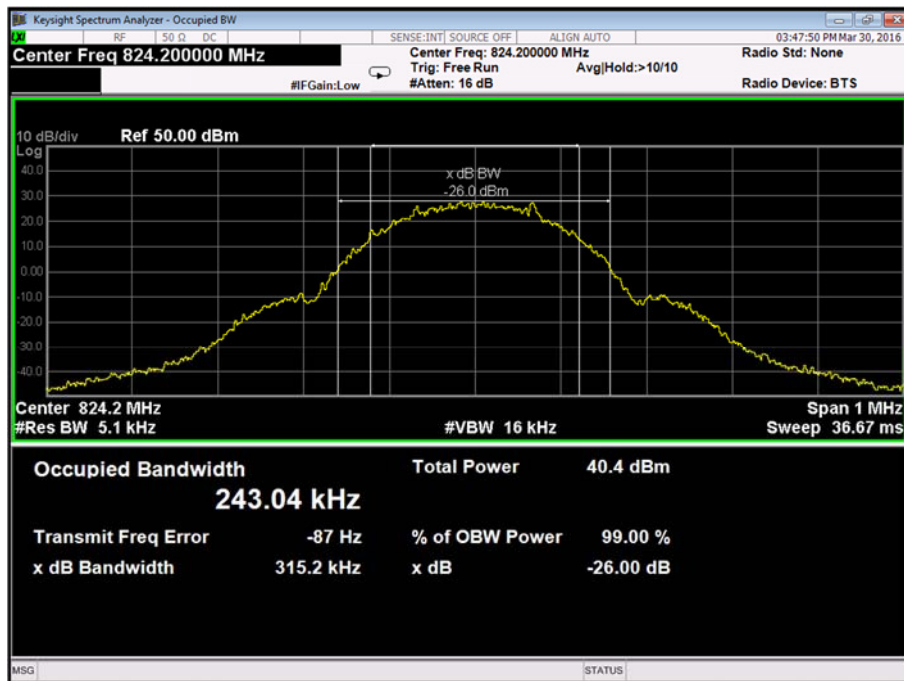




Product Service

GSM 850, 836.40 MHz,GMSK, 26 dB Bandwidth Plot

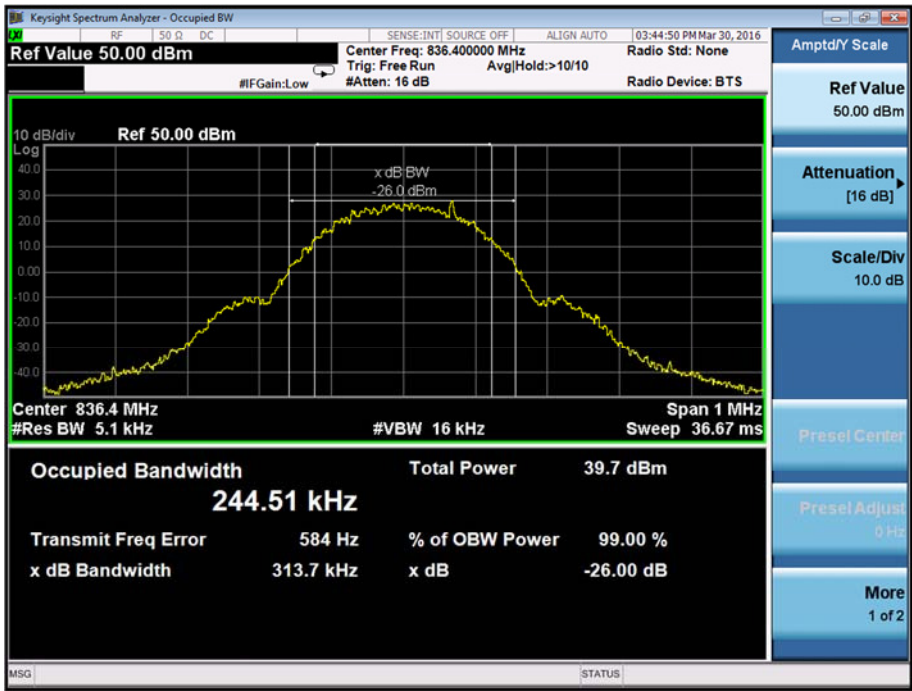

GSM 850, 848.80 MHz, GMSK, 26 dB Bandwidth Plot

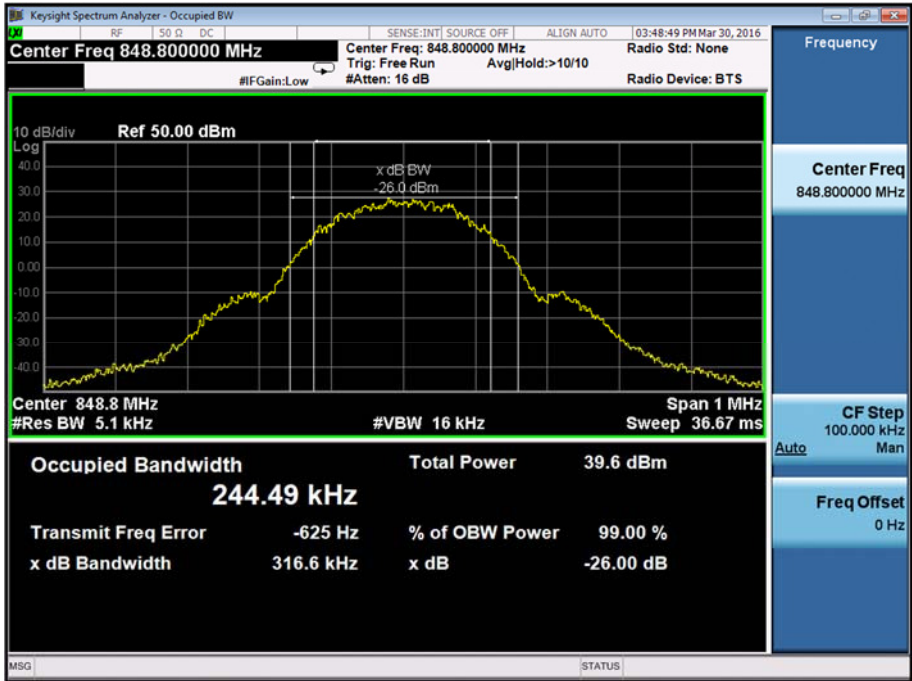

FCC 47 CFR Part 22, Limit Clause

None specified.





## 2.7 MODULATION CHARACTERISTICS

### 2.7.1 Specification Reference

FCC 47 CFR Part 2, Clause 2.1047 (d)

### 2.7.2 Test Results

#### GSM 850, Modulation Characteristics, Customer Description

The modulation scheme used in GSM is called Gaussian Minimum Shift Keying (GMSK). GMSK facilitates the use of narrow bandwidth and allows for both coherent and non coherent detection capabilities. It is a scheme in which the transitions from One to Zero or Zero to One do not occur quickly, but over a period of time. If pulses are transmitted quickly harmonics are transmitted. The power spectrum for a square wave is rich in harmonics, and the power within the side lobes is wasted, and can be a cause of potential interference.

A method to reduce the harmonics is to round off the edges of the pulses thus lowering the spectral components of the signal. In GSM this is done by using a Gaussian pre-filter which typically has a bandwidth of 81.25kHz. The output from the Gaussian filter then phase modulates the carrier. As there are no dramatic phase transitions of the carrier this gives a constant envelope and low spectral component output from the transmitter.

The spectral efficiency is calculated by

$\text{bit rate} / \text{Channel bandwidth} = 270.83333 \text{ kbit/s} / 200 \text{ kHz} = 1.354 \text{ bit/s/Hz}.$

The bandwidth product  $BT = \text{Bandwidth} \times \text{bit duration} = 81.25 \text{ kHz} \times 3.6923 \text{ micros} = 0.3$


#### **GMSK OVERVIEW**

The modulation scheme used for the EUT is GMSK.

A brief overview of how GMSK works is shown below.

#### **GMSK (Gaussian Minimum Shift Keying)**

The fundamental principal behind GMSK is Phase shift keying. This splits a data stream into a series of 2-digit phase shifts, using the following phase shifts to represent data pairs.

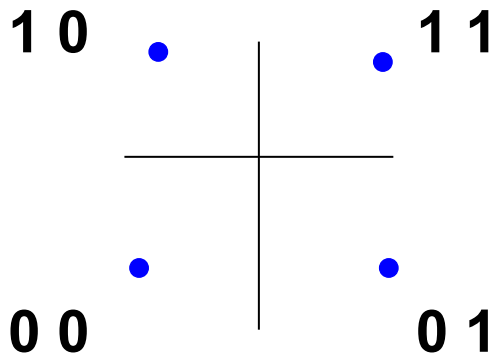

Therefore for the BIT sequence 0 0 1 1 1 0 0 1 The corresponding phase shift will be used

BIT SEQUENCE	0 0	1 1	1 0	0 1
PHASE	225°	45°	135°	315°

This is called QPSK (Quadratic Phase Shift Keying)

#### However

There is a problem with QPSK: transition from e.g. 00 to 11 gives phase shift of  $180^\circ$  ( $\pi$  radians). This has the effect of inverting the carrier waveform and this can lead to detection errors at the receiver.

Solution: restrict phase changes to  $\pm 90^\circ$

1. Split bitstream into 2 streams e.g.

	0 0		1 1		0 1		1 0	
I Stream	0		1		0		1	
Q stream		0		1		1		0

2. Modulate each stream with PSK (1 =  $90^\circ$  or  $\pi/2$ , 0 =  $-90^\circ$  or  $-\pi/2$  phase shift)


I Stream	0		1		0		1	
	$-\pi/2$		$-\pi/2$		$-\pi/2$		$\pi/2$	
Q stream		0		1		1		0
		$-\pi/2$		$\pi/2$		$\pi/2$		$-\pi/2$



3. Combine (add) the two PSK signals:


Combined Phase	$-\pi/2$	$-\pi$	$-\pi/2$	0	$-\pi/2$	0	$\pi/2$	0
----------------	----------	--------	----------	---	----------	---	---------	---

Result: offset - QPSK, phase change is restricted to  $\pm \pi/2$  radians:

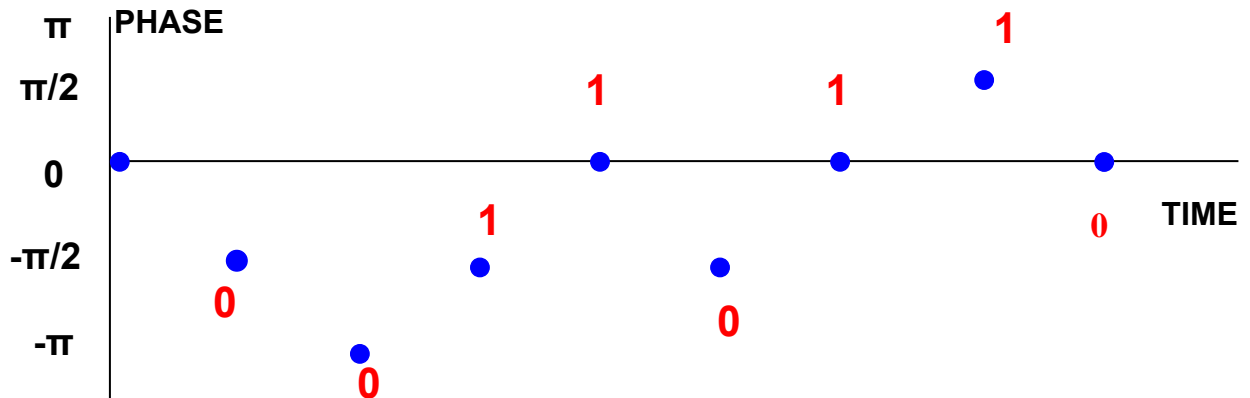

It would be preferable to have "gradual" changes in phase between each pair of bits (Continuous-phase modulation). Replacing each "rectangular" shaped pulse (for 1 or 0) with a sinusoidal pulse can do this:

Result: Minimum Shift Keying (MSK):

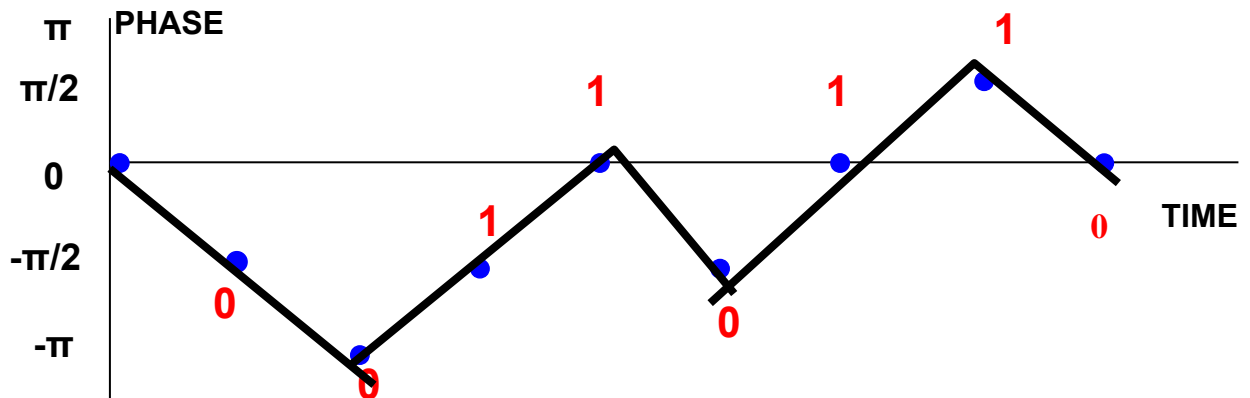

#### Gaussian Minimum Shift Keying

MSK has high sidebands relative to the main lobes in the frequency domain - this can lead to interference with adjacent signals.

If the rectangular pulses corresponding to the bitstream are filtered using a Gaussian-shaped impulse response filter, we get Gaussian MSK (GMSK) - this has low sidelobes compared to MSK.

#### FCC 47 CFR Part 2, Limit Clause 2.1047 (d)

A curve or equivalent data which shows that the equipment will meet the modulation requirements of the rules under which the equipment is to be licensed.



Product Service

### **SECTION 3**

#### **TEST EQUIPMENT USED**



### 3.1 TEST EQUIPMENT USED

List of absolute measuring and other principal items of test equipment.

Instrument	Manufacturer	Type No.	TE No.	Calibration Period (months)	Calibration Due
<b>Section 2.1 - Frequency Tolerance</b>					
Climatic Chamber	Votsch	VT4002	161	-	O/P Mon
Attenuator 10dB/25W	Weinschel	46-10-43	400	12	18-Jun-2016
Power Supply Unit	Hewlett Packard	6253A	441	-	O/P Mon
Multimeter	Fluke	75 Mk3	455	12	10-Sep-2016
Hygrometer	Rotronic	I-1000	2882	12	4-Nov-2016
Thermocouple Thermometer	Fluke	51	3174	12	9-Dec-2016
Network Analyser	Rohde & Schwarz	ZVA 40	3548	12	2-Sep-2016
Wideband Radio Communication Tester	Rohde & Schwarz	CMW 500	4143	12	2-Sep-2016
Calibration Unit	Rohde & Schwarz	ZV-Z54	4368	12	7-Sep-2016
1 metre SMA Cable	Florida Labs	SMS-235SP-39.4-SMS	4513	12	16-Feb-2017
<b>Section 2.2 - Spurious Emissions at Band Edge</b>					
Radio Communications Test Set	Rohde & Schwarz	CMU 200	39	12	10-Dec-2016
Multimeter	Fluke	75 Mk3	455	12	10-Sep-2016
Attenuator (20dB/ 2W)	Pasternack	PE7004-20	489	12	30-Oct-2016
Rubidium Standard	Rohde & Schwarz	XSRM	1316	6	3-Sep-2016
Power Supply	Iso-tech	IPS 2010	2439	-	O/P Mon
Filter	Daden Anthony Ass	MH-1500-7SS	2778	12	5-Feb-2017
Hygrometer	Rotronic	I-1000	3220	12	19-Aug-2016
Network Analyser	Rohde & Schwarz	ZVA 40	3548	12	2-Sep-2016
Combiner/Splitter	Weinschel	1506A	3878	12	2-Jun-2016
Calibration Unit	Rohde & Schwarz	ZV-Z54	4368	12	7-Sep-2016
Frequency Standard	Spectracom	Secure Sync 1200-0408-0601	4393	6	3-Sep-2016
1 metre N-Type Cable	Florida Labs	NMS-235SP-39.4-NMS	4511	12	2-Mar-2017
1 metre SMA Cable	Florida Labs	SMS-235SP-39.4-SMS	4512	12	29-Jan-2017
PXA Signal Analyser	Keysight Technologies	N9030A	4654	12	8-Oct-2016
<b>Section 2.3 - Maximum Conducted Output Power</b>					
Radio Communications Test Set	Rohde & Schwarz	CMU 200	442	12	18-Jan-2017
Multimeter	Fluke	75 Mk3	455	12	10-Sep-2016
Attenuator (20dB/ 2W)	Pasternack	PE7004-20	489	12	30-Oct-2016
Power Supply	Iso-tech	IPS 2010	2439	-	O/P Mon
Hygrometer	Rotronic	I-1000	3220	12	19-Aug-2016
Network Analyser	Rohde & Schwarz	ZVA 40	3548	12	2-Sep-2016
Combiner/Splitter	Weinschel	1506A	3878	12	2-Jun-2016
P-Series Power Meter	Agilent Technologies	N1911A	3981	12	25-Sep-2016
50 MHz-18 GHz Wideband Power Sensor	Agilent Technologies	N1921A	3983	12	25-Sep-2016
Calibration Unit	Rohde & Schwarz	ZV-Z54	4368	12	7-Sep-2016
1 metre N-Type Cable	Florida Labs	NMS-235SP-39.4-NMS	4511	12	2-Mar-2017
1 metre SMA Cable	Florida Labs	SMS-235SP-39.4-SMS	4512	12	29-Jan-2017



Instrument	Manufacturer	Type No.	TE No.	Calibration Period (months)	Calibration Due
<b>Section 2.4 - Emission Limitations for Cellular Equipment</b>					
Turntable Controller	Inn-Co GmbH	CO 1000	1606	-	TU
Antenna (Bilog)	Chase	CBL6143	2904	24	11-Jun-2017
Radio Communications Test Set	Rohde & Schwarz	CMU 200	3035	12	16-Nov-2016
Signal Generator (10MHz to 40GHz)	Rohde & Schwarz	SMR40	3171	12	28-Sep-2016
High Pass Filter (3GHz)	RLC Electronics	F-100-3000-5-R	3349	12	28-May-2016
EMI Test Receiver	Rohde & Schwarz	ESU40	3506	12	2-Nov-2016
Tilt Antenna Mast	matur GmbH	TAM 4.0-P	3916	-	TU
Mast Controller	matur GmbH	NCD	3917	-	TU
Double Ridged Waveguide Horn Antenna	ETS-Lindgren	3117	4722	12	29-Dec-2016
<b>Section 2.5 - Spurious Emissions at Antenna Terminals</b>					
Radio Communications Test Set	Rohde & Schwarz	CMU 200	39	12	10-Dec-2016
Multimeter	Fluke	75 Mk3	455	12	10-Sep-2016
Attenuator (20dB/ 2W)	Pasternack	PE7004-20	489	12	30-Oct-2016
Rubidium Standard	Rohde & Schwarz	XSRM	1316	6	3-Sep-2016
Power Supply	Iso-tech	IPS 2010	2439	-	O/P Mon
Filter	Daden Anthony Ass	MH-1500-7SS	2778	12	5-Feb-2017
Signal Generator (10MHz to 40GHz)	Rohde & Schwarz	SMR40	3171	12	28-Sep-2016
Hygrometer	Rotronic	I-1000	3220	12	19-Aug-2016
Network Analyser	Rohde & Schwarz	ZVA 40	3548	12	2-Sep-2016
Combiner/Splitter	Weinschel	1506A	3878	12	2-Jun-2016
Calibration Unit	Rohde & Schwarz	ZV-Z54	4368	12	7-Sep-2016
Frequency Standard	Spectracom	Secure Sync 1200-0408-0601	4393	6	3-Sep-2016
Suspended Substrate Highpass Filter	Advance Power Components	11SH10-3000/X18000-O/O	4411	12	23-Mar-2017
PXA Signal Analyser	Keysight Technologies	N9030A	4654	12	8-Oct-2016
<b>Section 2.6 - 26 dB Bandwidth</b>					
Radio Communications Test Set	Rohde & Schwarz	CMU 200	39	12	10-Dec-2016
Multimeter	Fluke	75 Mk3	455	12	10-Sep-2016
Attenuator (20dB/ 2W)	Pasternack	PE7004-20	489	12	30-Oct-2016
Rubidium Standard	Rohde & Schwarz	XSRM	1316	6	3-Sep-2016
Power Supply	Iso-tech	IPS 2010	2439	-	O/P Mon
Hygrometer	Rotronic	I-1000	3220	12	19-Aug-2016
Network Analyser	Rohde & Schwarz	ZVA 40	3548	12	2-Sep-2016
Combiner/Splitter	Weinschel	1506A	3878	12	2-Jun-2016
Calibration Unit	Rohde & Schwarz	ZV-Z54	4368	12	7-Sep-2016
Frequency Standard	Spectracom	Secure Sync 1200-0408-0601	4393	6	3-Sep-2016
1 metre N-Type Cable	Florida Labs	NMS-235SP-39.4-NMS	4511	12	2-Mar-2017
1 metre SMA Cable	Florida Labs	SMS-235SP-39.4-SMS	4512	12	29-Jan-2017
PXA Signal Analyser	Keysight Technologies	N9030A	4654	12	8-Oct-2016
1 metre SMA Cable	IW Microwave	3PS-1806LC-394-3PS	4662	12	6-Nov-2016

TU – Traceability Unscheduled

O/P MON – Output Monitored with Calibrated Equipment



### 3.2 MEASUREMENT UNCERTAINTY

For a 95% confidence level, the measurement uncertainties for defined systems are:-

Test Discipline	MU
Frequency Tolerance	$\pm 46.70$ Hz
Modulation Characteristics	-
Maximum Conducted Output Power	$\pm 0.70$ dB
Spurious Emissions at Antenna Terminals	$\pm 3.454$ dB
Emission Limitations for Cellular Equipment	30 MHz to 1 GHz: $\pm 5.1$ dB 1 GHz to 40 GHz: $\pm 6.3$ dB
26 dB Bandwidth	$\pm 16.74$ kHz
Spurious Emissions at Band Edge	30 MHz to 1 GHz: $\pm 5.1$ dB 1 GHz to 40 GHz: $\pm 6.3$ dB



Product Service

## **SECTION 4**

### **ACCREDITATION, DISCLAIMERS AND COPYRIGHT**





Product Service

#### 4.1 ACCREDITATION, DISCLAIMERS AND COPYRIGHT



This report relates only to the actual item/items tested.

Our UKAS Accreditation does not cover opinions and interpretations and any expressed are outside the scope of our UKAS Accreditation.

Results of tests not covered by our UKAS Accreditation Schedule are marked NUA  
(Not UKAS Accredited).

This report must not be reproduced, except in its entirety, without the written permission of  
TÜV SÜD Product Service

© 2016 TÜV SÜD Product Service