



FCC TEST REPORT

FCC ID:2BN9J-XGACW

Applicant: Shenzhenshi Xinxingou Technology Co.,Limited
Address: A1002, Furui Pavilion, No. 33, Xinzhou 9th Street, Xinhua Community, Shatou Street, Futian District, Shenzhen

Manufacturer: Shenzhenshi Xinxingou Technology Co.,Limited
Address: A1002, Furui Pavilion, No. 33, Xinzhou 9th Street, Xinhua Community, Shatou Street, Futian District, Shenzhen

EUT: COMPUTER CASE

Trade Mark: N/A

Model Number: XG682
XG683, XG687, XG688, XG689, XG690, XG691, XG692, XG693, XG694, XG695, XG696, XG697, XG698

Date of Receipt: Mar. 27, 2025

Test Date: Mar. 27, 2025 to Apr. 03, 2025

Date of Report: Apr. 03, 2025

Prepared By: Shenzhen DL Testing Technology Co., Ltd.
Address: 101-201, Comprehensive Building, Tongzhou Electronics Longgang Factory Area, No.1 Baolong Fifth Road, Baolong Community, Baolong Street, Longgang District, Shenzhen, China

Applicable Standards: FCC CFR Title 47 Part 15 Subpart E Section 15.407
ANSI C63.10:2013
KDB 789033 D02 v02r01

Test Result: Pass

Report Number: DLE-250412003R

Prepared (Test Engineer): Dimon Tan
Reviewer (Supervisor): Jack Bu
Approved (Manager): Jade Yang



This test report is based on a single evaluation of one sample of above mentioned products. It is not permitted to be duplicated in extracts without written approval of Shenzhen DL Testing Technology Co., Ltd.



Table of Contents	Page
1. VERSION	5
2. SUMMARY OF TEST RESULTS	6
2.1 TEST FACILITY	7
2.2 MEASUREMENT UNCERTAINTY	7
3. GENERAL INFORMATION	8
3.1 GENERAL DESCRIPTION OF EUT	8
3.3 BLOCK DIGRAM SHOWING THE CONFIGURATION OF SYSTEM TESTED	10
3.4 DESCRIPTION OF SUPPORT UNITS(CONDUCTED MODE)	10
3.5 EQUIPMENTS LIST FOR ALL TEST ITEMS	11
4. EMC EMISSION TEST	13
4.1 CONDUCTED EMISSION MEASUREMENT	13
4.1.1 POWER LINE CONDUCTED EMISSION LIMITS	13
4.1.2 TEST PROCEDURE	13
4.1.3 DEVIATION FROM TEST STANDARD	13
4.1.4 TEST SETUP	14
4.1.5 EUT OPERATING CONDITIONS	14
4.1.6 TEST RESULT	15
4.2 RADIATED EMISSION MEASUREMENT	17
4.2.1 APPLICABLE STANDARD	17
4.2.2 CONFORMANCE LIMIT	17
4.2.3 MEASURING INSTRUMENTS	17
4.2.4 TEST CONFIGURATION	18
4.2.5 TEST PROCEDURE	19
4.2.6 TEST RESULT	20
5. POWER SPECTRAL DENSITY TEST	27
5.1 APPLIED PROCEDURES / LIMIT	27
5.2 TEST PROCEDURE	27
5.3 DEVIATION FROM STANDARD	27
5.4 TEST SETUP	28
5.5 EUT OPERATION CONDITIONS	28
5.6 TEST RESULTS	29
6. 26DB EMISSION BANDWIDTH & 6DB OCCUPIED BANDWIDTH	32
6.1 APPLIED PROCEDURES / LIMIT	32
6.2 TEST PROCEDURE	32



Table of Contents	Page
6.3 EUT OPERATION CONDITIONS	32
6.4 TEST RESULTS	33
7. MAXIMUM CONDUCTED OUTPUT POWER	37
7.1 PPLIED PROCEDURES / LIMIT	37
7.2 TEST PROCEDURE	37
7.3 DEVIATION FROM STANDARD	38
7.4 TEST SETUP	38
7.5 EUT OPERATION CONDITIONS	38
7.6 TEST RESULTS	39
8. OUT OF BAND EMISSIONS	40
8.1 APPLICABLE STANDARD	40
8.2 TEST PROCEDURE	40
8.3 DEVIATION FROM STANDARD	40
8.4 TEST SETUP	40
8.5 EUT OPERATION CONDITIONS	41
8.6 TEST RESULTS	41
9. SPURIOUS RF CONDUCTED EMISSIONS	43
9.1 CONFORMANCE LIMIT	43
9.2 MEASURING INSTRUMENTS	43
9.3 TEST SETUP	43
9.4 TEST PROCEDURE	43
9.5 TEST RESULTS	43
10. FREQUENCY STABILITY MEASUREMENT	46
10.1 LIMIT	46
10.2 TEST PROCEDURES	46
10.3 TEST SETUP LAYOUT	46
10.4 EUT OPERATION DURING TEST	46
10.5 TEST RESULTS	47
11. DUTY CYCLE	49
11.1 APPLIED PROCEDURES / LIMIT	49
11.2 DEVIATION FROM STANDARD	49
11.3 TEST SETUP	49
11.4 EUT OPERATION CONDITIONS	49



Table of Contents	Page
11.5 TEST RESULTS	50
12. ANTENNA REQUIREMENT	52
13. TEST SETUP PHOTO	53
14. EUT CONSTRUCTIONAL DETAILS	53



1. VERSION

Report No.	Version	Description	Approved
DLE-250412003R	Rev.01	Initial issue of report	Apr. 03, 2025



2. SUMMARY OF TEST RESULTS

Test procedures according to the technical standards:

FCC Part15 (15.407) , Subpart E			
Standard Section	Test Item	Judgment	Remark
15.207 (a)	AC Power Line Conducted Emission	PASS	
789033 D02 General U-NII	Duty Cycle	PASS	
15.205 (a) 15.209 (a) 15.407 (b)(4)	Radiated Emissions & Band Edge	PASS	
15.407 (e)	26dB Emission Bandwidth & 6dB Occupied Bandwidth	PASS	
15.407 (a)(3) i	Maximum Conducted Output Power	PASS	
2.1051 15.407 (b)(4) 15.407 (b)(8)	Conducted Band Edge	PASS	
15.407 (a)(3) i	Power Spectral Density	PASS	
2.1051, 15.407 (b)(4)	Conducted Emissions at Antenna Terminals	PASS	
15.203	Antenna Requirement	PASS	

NOTE:

(1)" N/A" denotes test is not applicable in this Test Report



2.1 TEST FACILITY

Shenzhen DL Testing Technology Co., Ltd.

Add. : 101-201, Building C, Shuanghuan, No.8, Baoqing Roa Baolong Industrial Zone, Baolong Street, Longgang Shenzhen, Guangdong, China

FCC Test Firm Registration Number: 854456

Designation Number: CN1307

IC Registered No.: 27485

CAB identifier: CN0118

2.2 MEASUREMENT UNCERTAINTY


The reported uncertainty of measurement $y \pm U$, where expanded uncertainty U is based on a standard uncertainty multiplied by a coverage factor of $k=2$, providing a level of confidence of approximately 95 %.

No.	Item	Uncertainty
1	3m camber Radiated spurious emission(9KHz-30MHz)	U=4.5dB
2	3m camber Radiated spurious emission(30MHz-1GHz)	U=4.8dB
3	3m chamber Radiated spurious emission(1GHz-6GHz)	U=4.9dB
4	3m chamber Radiated spurious emission(6GHz-40GHz)	U=5.0dB
5	Conducted disturbance	U=3.2dB
6	RF Band Edge	U=1.68dB
7	RF power conducted	U=1.86dB
8	RF conducted Spurious Emission	U=2.2dB
9	RF Occupied Bandwidth	U=1.8MHz
10	RF Power Spectral Density	U=1.75dB
11	humidity uncertainty	U=5.3%
12	Temperature uncertainty	U=0.59°C



3. GENERAL INFORMATION

3.1 GENERAL DESCRIPTION OF EUT

Product Name:	COMPUTER CASE	
Model No.:	XG682	
Serial Model:	XG683, XG687, XG688, XG689, XG690, XG691, XG692, XG693, XG694, XG695, XG696, XG697, XG698	
Model Different.:	All the model are the same circuit and RF module, only the model name is different.	
Sample ID	E-1	
Sample(s) Status:	Engineer sample	
Product Description:	IEEE 802.11 WLAN Mode Supported	<input checked="" type="checkbox"/> 802.11a/n
	Data Rate	802.11a: 6/9/12/24/18/36/48/54Mbit/s; 802.11n: MCS0-MCS7;
	Modulation	802.11a/n: Orthogonal Frequency Division Multiplexing(OFDM)
	Operating Frequency Range	<input checked="" type="checkbox"/> 5745-5825 MHz for 802.11a/n (20M) <input checked="" type="checkbox"/> 5755-5795 MHz for 802.11n (40M)
	Number of Channels	<input checked="" type="checkbox"/> 5 channels for 802.11a/n (20M) in the 5745-5825MHz band; <input checked="" type="checkbox"/> 2 channels for 802.11n (40M) in the 5755-5795 MHz band;
Channel List:	Please refer to the Note 2.	
Antenna Type:	PCB Antenna	
Antenna gain:	-1.05dBi	
Power Supply:	Input: 5V  1A	

Note:

For a more detailed features description, please refer to the manufacturer's specifications or the User's Manual.

802.11a/n (20MHz) Frequency Channel							
Channel	Frequency (MHz)	Channel	Frequency (MHz)	Channel	Frequency (MHz)	Channel	Frequency (MHz)
149	5745	153	5765	157	5785	161	5805
165	5825	-	-	-	-	-	-

802.11n (40MHz) Frequency Channel							
Channel	Frequency (MHz)	Channel	Frequency (MHz)	Channel	Frequency (MHz)	Channel	Frequency (MHz)
151	5755	159	5795	-	-	-	-



3.2 DESCRIPTION OF TEST MODES

Pretest Mode	Description
Mode 1	802.11a/n (20M) CH149 / CH157 / CH 165
Mode 2	802.11n (40M) CH 151 / CH 159

Final Test Mode	For Conducted Emission
	Description
Mode 1	802.11a/n (20M) CH149 / CH157 / CH 165
Mode 2	802.11n (40M) CH 151 / CH 159

Final Test Mode	For Radiated Emission
	Description
Mode 1	802.11a/n (20M) CH149 / CH157 / CH 165
Mode 2	802.11n (40M) CH 151 / CH 159

Transmitting mode	Keep the EUT in continuously transmitting mode
Remark: During the test, the test voltage was tuned from 85% to 115% of the nominal rated supply voltage, and found that the worst case was under the nominal rated supply condition. So the report just shows that condition's data.	


We have verified the construction and function in typical operation. All the test modes were carried out with the EUT in transmitting operation, which was shown in this test report and defined as follows:			
Pre-scan all kind of data rate in lowest channel, and found the follow list which it was worst case.			
Mode	802.11a	802.11n20	802.11n40
Data rate	6Mbps	MCS0(HT0)	MCS0(HT0)

Test Software	REALTEK 11n 8723FU
Power level setup	Default




3.3 BLOCK DIGRAM SHOWING THE CONFIGURATION OF SYSTEM TESTED


Conducted Emission



Radiated Emission



Conducted Spurious



3.4 DESCRIPTION OF SUPPORT UNITS(CONDUCTED MODE)

The EUT has been tested as an independent unit together with other necessary accessories or support units. The following support units or accessories were used to form a representative test configuration during the tests.

Item	Equipment	Mfr/Brand	Model/Type No.	Series No.	Note
E-1	COMPUTER CASE	N/A	XG682	N/A	EUT
E-2	Laptop	Lenovo	G455A	N/A	Auxiliary
E-3	AC/DC Adapter	N/A	GT1455	N/A	Auxiliary

Item	Shielded Type	Ferrite Core	Length	Note

Note:

- (1) The support equipment was authorized by Declaration of Confirmation.
- (2) For detachable type I/O cable should be specified the length in cm in 『Length』 column.



3.5 EQUIPMENTS LIST FOR ALL TEST ITEMS

Conduction Emissions Test

Item	Kind of Equipment	Manufacturer	Type No.	Serial No.	Firmware Version	Last calibration	Calibrated until
1	LISN	R&S	ENV216	101471	N/A	Sep. 30, 2024	Sep. 29, 2025
2	LISN	CYBERTEK	EM5040A	E1850400149	N/A	Sep. 30, 2024	Sep. 29, 2025
3	Test Cable	N/A	C-01	N/A	N/A	Sep. 30, 2024	Sep. 29, 2025
4	EMI Test Receiver	R&S	ESCI3	101393	4.42 SP3	Sep. 29, 2024	Sep. 28, 2025
5	EMC Software	Frad	EZ-EMC	Ver.EMC-CON 3A1.1	N/A	\	\

Radiation Emissions & Radiation Spurious Emissions Test

Item	Equipment	Manufacturer	Type No.	Serial No.	Firmware Version	Last calibration	Calibrated until
1	Spectrum Analyzer (9kHz-26.5GHz)	KEYSIGHT	N9020A	MY55370835	A.17.05	Sep. 29, 2024	Sep. 28, 2025
2	Spectrum Analyzer (10kHz-39.9GHz)	R&S	FSV40-N	100363	1.71 SP2	Sep. 30, 2024	Sep. 29, 2025
3	EMI Test Receiver (9kHz-7GHz)	R&S	ESCI7	100969	4.32	Sep. 29, 2024	Sep. 28, 2025
4	Bilog Antenna (30MHz-1500MHz)	Schwarzbeck	VULB9168	00877	N/A	Sep. 30, 2024	Sep. 29, 2025
5	Horn Antenna (1GHz-18GHz)	Agilent	AH-118	071145	N/A	Sep. 30, 2024	Sep. 29, 2025
6	Horn Antenna (15GHz-40GHz)	A.H.System	SAS-574	588	N/A	Sep. 30, 2024	Sep. 29, 2025
7	Loop Antenna	TESEQ	HLA6121	58357	N/A	Oct. 11, 2024	Oct. 10, 2025
8	Amplifier (30-1000MHz)	EM Electronics	EM330 Amplifier	60747	N/A	Sep. 29, 2024	Sep. 28, 2025
9	Amplifier (1GHz-26.5GHz)	HuiPu	8449B	3008A00315	N/A	Sep. 29, 2024	Sep. 28, 2025
10	Amplifier (500MHz-40GHz)	QuanJuDa	DLE-161	097	N/A	Sep. 30, 2024	Sep. 29, 2025
11	Test Cable	N/A	R-01	N/A	N/A	Sep. 30, 2024	Sep. 29, 2025
12	Test Cable	N/A	R-02	N/A	N/A	Sep. 30, 2024	Sep. 29, 2025
13	Test Cable	N/A	R-03	N/A	N/A	Sep. 30, 2024	Sep. 29, 2025
14	D.C. Power Supply	LongWei	TPR-6405D	GQ7516	N/A	Sep. 29, 2024	Sep. 28, 2025
15	EMC Software	Frad	EZ-EMC	Ver.EMC-CO N 3A1.1	N/A	\	\
16	Turntable	MF	MF-7802BS	N/A	N/A	\	\
17	Antenna tower	MF	MF-7802BS	N/A	N/A	\	\



RF Conducted Test

Item	Equipment	Manufacturer	Type No.	Serial No.	Firmware Version	Last calibration	Calibrated until
1	Spectrum Analyzer (9kHz-26.5GHz)	KEYSIGHT	N9020A	MY55370835	A.17.05	Sep. 29, 2024	Sep. 28, 2025
2	Spectrum Analyzer (10kHz-39.9GHz)	R&S	FSV40-N	100363	1.71 SP2	Sep. 30, 2024	Sep. 29, 2025
3	Test Cable	N/A	RF-01	N/A	N/A	Sep. 30, 2024	Sep. 29, 2025
4	Test Cable	N/A	RF-02	N/A	N/A	Sep. 30, 2024	Sep. 29, 2025
5	Test Cable	N/A	RF-03	N/A	N/A	Sep. 30, 2024	Sep. 29, 2025
6	ESG Signal Generator	Agilent	E4421B	GB40051203	B.03.84	Sep. 29, 2024	Sep. 28, 2025
7	Signal Generator	Agilent	N5182A	MY47420215	A.01.87	Sep. 29, 2024	Sep. 28, 2025
8	Magnetic Field Probe Tester	Narda	ELT-400	0-0344	N/A	Sep. 29, 2024	Sep. 28, 2025
9	Van der Hoofden measuring head	Schwarzbeck Mess-elektronik	VDHH 9502	9502-039	N/A	Sep. 30, 2024	Sep. 29, 2025
10	Wideband Radio Communication Test	R&S	CMW500	106504	V 3.7.22	Sep. 30, 2024	Sep. 29, 2025
11	MWRF Power Meter Test system	MW	MW100-RF CB	10371	N/A	Sep. 29, 2024	Sep. 28, 2025
12	Power Meter	KEYSIGHT	N1912AP	926431	A.05.00	Sep. 29, 2024	Sep. 28, 2025
13	D.C. Power Supply	LongWei	TPR-6405D	GQ7516	N/A	Sep. 29, 2024	Sep. 28, 2025
14	RF Software	MW	MTS8310	V2.0.0.0	N/A	\	\



4. EMC EMISSION TEST

4.1 CONDUCTED EMISSION MEASUREMENT

Test Requirement:	FCC Part15 C Section 15.207
Test Method:	ANSI C63.10:2013
Test Frequency Range:	150KHz to 30MHz
Receiver setup:	RBW=9KHz, VBW=30KHz, Sweep time=auto

4.1.1 POWER LINE CONDUCTED EMISSION LIMITS

FREQUENCY (MHz)	Limit (dBuV)		Standard
	Quasi-peak	Average	
0.15 -0.5	66 - 56 *	56 - 46 *	FCC
0.50 -5.0	56.00	46.00	FCC
5.0 -30.0	60.00	50.00	FCC

Note:

(1) *Decreases with the logarithm of the frequency.

4.1.2 TEST PROCEDURE


- The EUT was placed 0.8 meters from the horizontal ground plane with EUT being connected to the power mains through a line impedance stabilization network (LISN). All other support equipments
- a. powered from additional LISN(s). The LISN provide 50 Ohm/ 50uH of coupling impedance for the measuring instrument.
 - b. Interconnecting cables that hang closer than 40 cm to the ground plane shall be folded back and forth in the center forming a bundle 30 to 40 cm long.
I/O cables that are not connected to a peripheral shall be bundled in the center. The end of the
 - c. cable may be terminated, if required, using the correct terminating impedance. The overall length shall not exceed 1 m.
 - d. LISN at least 80 cm from nearest part of EUT chassis.
 - e. For the actual test configuration, please refer to the related Item –EUT Test Photos.

4.1.3 DEVIATION FROM TEST STANDARD

No deviation



4.1.4 TEST SETUP

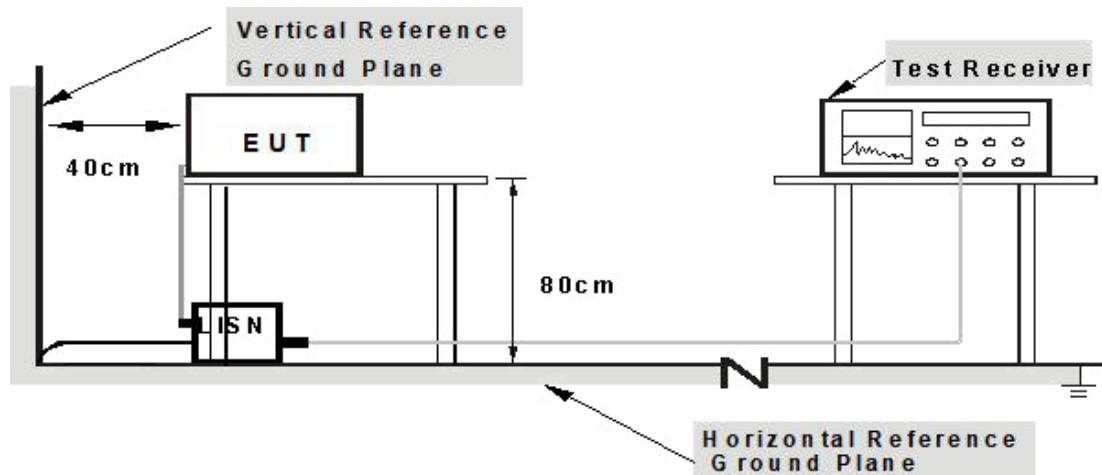

Note: 1.Support units were connected to second LISN.

2.Both of LISNs (AMN) are 80 cm from EUT and at least 80 cm from other units and other metal planes


4.1.5 EUT OPERATING CONDITIONS

The EUT was configured for testing in a typical fashion (as a customer would normally use it). The EUT has been programmed to continuously transmit during test. This operating condition was tested and used to collect the included data.



4.1.6 TEST RESULT

Temperature:	26°C	Relative Humidity:	54%
Pressure:	101 kPa	Polarization:	L
Test Voltage:	AC 120V/60Hz	Test Mode:	802.11n20 - 5745MHz

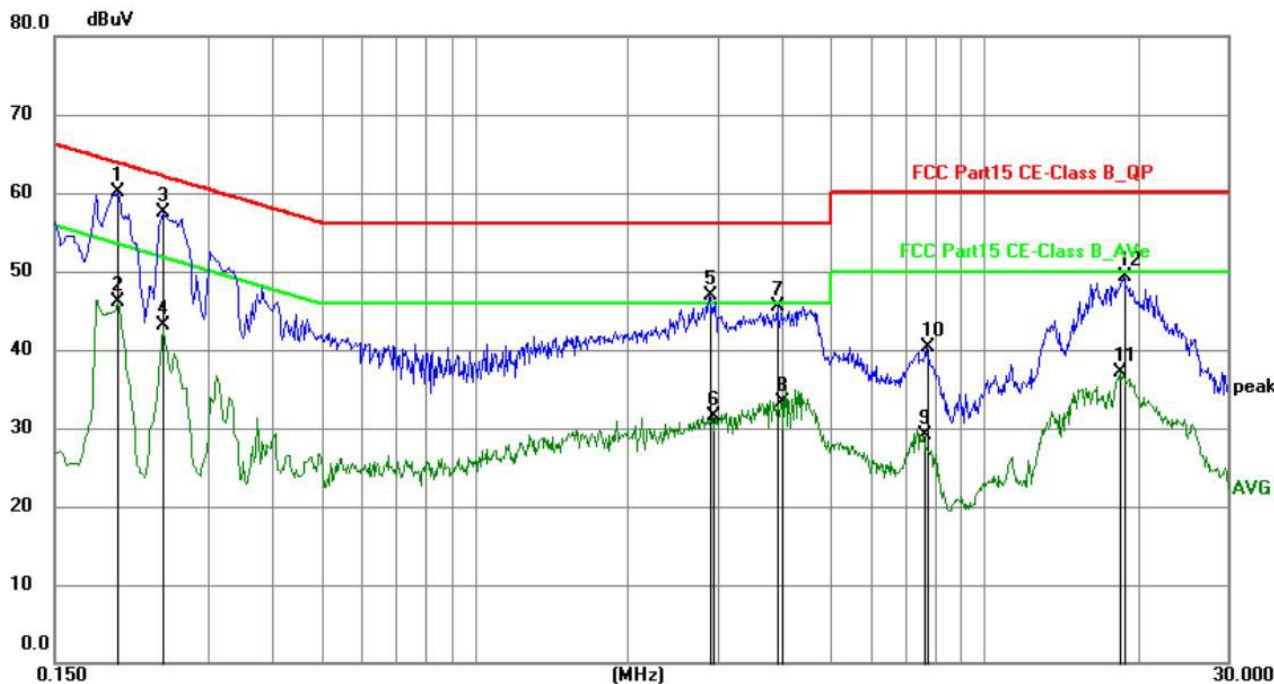


No.	Frequency (MHz)	Reading (dBuV)	Factor (dB)	Level (dBuV)	Limit (dBuV)	Margin (dB)	Detector	P/F	Remark
1	0.1995	39.68	20.38	60.06	63.63	-3.57	QP	P	
2	0.1995	25.67	20.38	46.05	53.63	-7.58	AVG	P	
3	0.2444	37.07	20.37	57.44	61.95	-4.51	QP	P	
4	0.2444	22.67	20.37	43.04	51.95	-8.91	AVG	P	
5	2.8950	26.65	20.33	46.98	56.00	-9.02	QP	P	
6	2.9400	11.11	20.33	31.44	46.00	-14.56	AVG	P	
7	3.9344	25.26	20.34	45.60	56.00	-10.40	QP	P	
8	3.9975	12.97	20.34	33.31	46.00	-12.69	AVG	P	
9	7.6200	8.61	20.41	29.02	50.00	-20.98	AVG	P	
10	7.7008	19.80	20.41	40.21	60.00	-19.79	QP	P	
11	18.4649	16.61	20.50	37.11	50.00	-12.89	AVG	P	
12	18.7213	28.90	20.50	49.40	60.00	-10.60	QP	P	

Notes:

1. An initial pre-scan was performed on the line and neutral lines with peak detector.
2. Quasi - Peak and Average measurement were performed at the frequencies with maximized peak emission.
3. Final Level = Reading level + Correct Factor.
4. Correct Factor = Lism factor+ Cable loss factor + limiter factor.
5. Margin = Measurement Level-Limit.
6. The test data shows only the worst case TX 802.11n20 - 5745MHz.



Temperature:	26°C	Relative Humidity:	54%
Pressure:	101 kPa	Polarization:	N
Test Voltage:	AC 120V/60Hz	Test Mode:	802.11n20 - 5745MHz

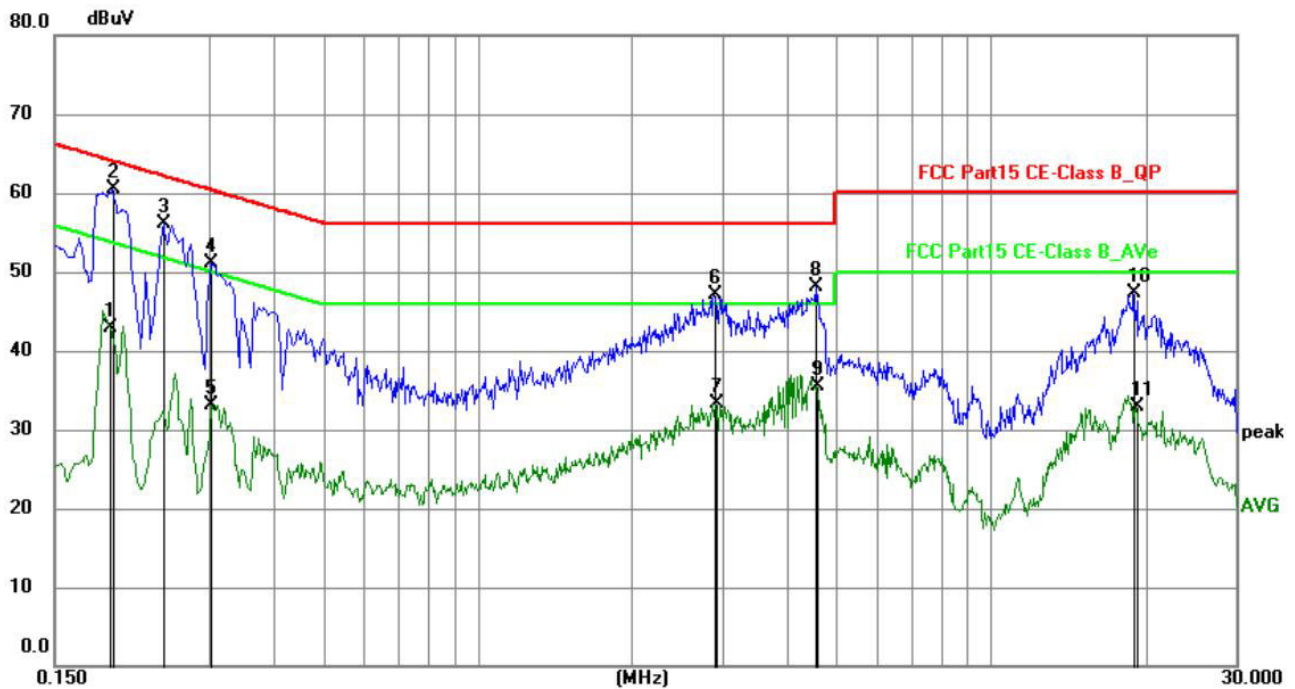

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB)	Level (dBuV)	Limit (dBuV)	Margin (dB)	Detector	P/F	Remark
1	0.1923	22.52	20.34	42.86	53.94	-11.08	AVG	P	
2	0.1949	40.07	20.35	60.42	63.83	-3.41	QP	P	
3	0.2444	35.73	20.36	56.09	61.95	-5.86	QP	P	
4	0.3029	30.80	20.35	51.15	60.16	-9.01	QP	P	
5	0.3029	12.77	20.35	33.12	50.16	-17.04	AVG	P	
6	2.8950	26.78	20.33	47.11	56.00	-8.89	QP	P	
7	2.9085	13.03	20.33	33.36	46.00	-12.64	AVG	P	
8	4.5644	27.83	20.34	48.17	56.00	-7.83	QP	P	
9	4.5780	15.15	20.34	35.49	46.00	-10.51	AVG	P	
10	18.9555	26.74	20.53	47.27	60.00	-12.73	QP	P	
11	19.1535	12.35	20.53	32.88	50.00	-17.12	AVG	P	

Notes:

1. An initial pre-scan was performed on the line and neutral lines with peak detector.
2. Quasi - Peak and Average measurement were performed at the frequencies with maximized peak emission.
3. Final Level = Reading level + Correct Factor.
4. Correct Factor = Lisen factor+ Cable loss factor + limiter factor.
5. Margin = Measurement Level-Limit.
6. The test data shows only the worst case TX 802.11n20 - 5745MHz.



4.2 RADIATED EMISSION MEASUREMENT

4.2.1 APPLICABLE STANDARD

According to FCC Part 15.407(d) and 15.209

4.2.2 CONFORMANCE LIMIT

According to FCC Part 15.407(b)(7): radiated emissions which fall in the restricted bands, as defined in §15.205(a), must also comply with the radiated emission limits specified in §15.209(a) (see §15.205(c)).
According to FCC Part 15.205, Restricted bands

(MHz)	(MHz)	(MHz)	(GHz)
0.090-0.110	16.42-16.423	399.9-410	4.5-5.15
10.495-0.505	16.69475-16.69525	608-614	5.35-5.46
2.1735-2.1905	16.80425-16.80475	960-1240	7.25-7.75
4.125-4.128	25.5-25.67	1300-1427	8.025-8.5
4.17725-4.17775	37.5-38.25	1435-1626.5	9.0-9.2
4.20725-4.20775	73-74.6	1645.5-1646.5	9.3-9.5
6.215-6.218	74.8-75.2	1660-1710	10.6-12.7
6.26775-6.26825	123-138	2200-2300	14.47-14.5
8.291-8.294	149.9-150.05	2310-2390	15.35-16.2
8.362-8.366	156.52475-156.52525	2483.5-2500	17.7-21.4
8.37625-8.38675	156.7-156.9	2690-2900	22.01-23.12
8.41425-8.41475	162.0125-167.17	3260-3267	23.6-24.0
12.29-12.293	167.72-173.2	3332-3339	31.2-31.8
12.51975-12.52025	240-285	3345.8-3358	36.43-36.5
12.57675-12.57725	322-335.4	3600-4400	(2)
13.36-13.41			

Restricted Frequency (MHz)	Field Strength (μV/m)	Field Strength (dBμV/m)	Measurement Distance
0.009~0.490	2400/F(KHz)	20 log (uV/m)	300
0.490~1.705	2400/F(KHz)	20 log (uV/m)	30
1.705~30.0	30	29.5	30
30-88	100	40	3
88-216	150	43.5	3
216-960	200	46	3
Above 960	500	54	3

Limits of Radiated Emission Measurement(Above 1000MHz)

Frequency(MHz)	Class B (dBuV/m) (at 3M)	
	PEAK	AVERAGE
Above 1000	74	54

Remark :1. Emission level in dBuV/m=20 log (uV/m)

2. Measurement was performed at an antenna to the closed point of EUT distance of meters.

3. Distance extrapolation factor =40log(Specific distance/ test distance)(dB);


Limit line=Specific limits(dBuV) + distance extrapolation factor.

4.2.3 MEASURING INSTRUMENTS


The Measuring equipment is listed in the section 3.5 of this test report.

4.2.4 TEST CONFIGURATION


1. For radiated emissions below 30MHz

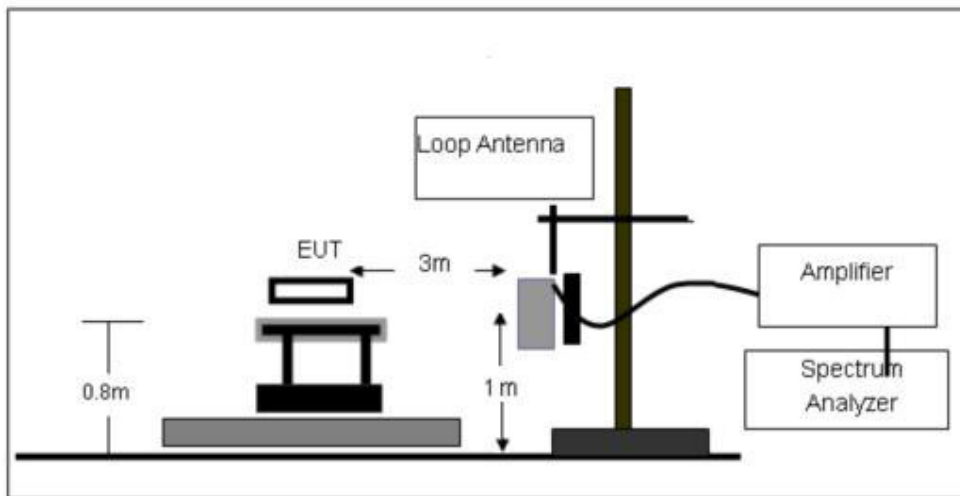

2. For radiated emissions from 30MHz to 1000MHz

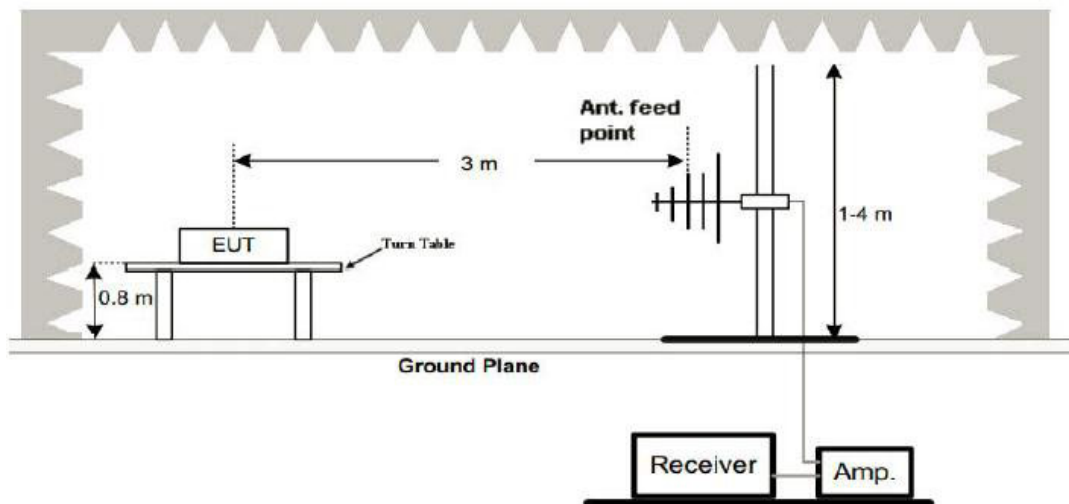

3. Radiated Emission Test-Up Frequency Above 1GHz

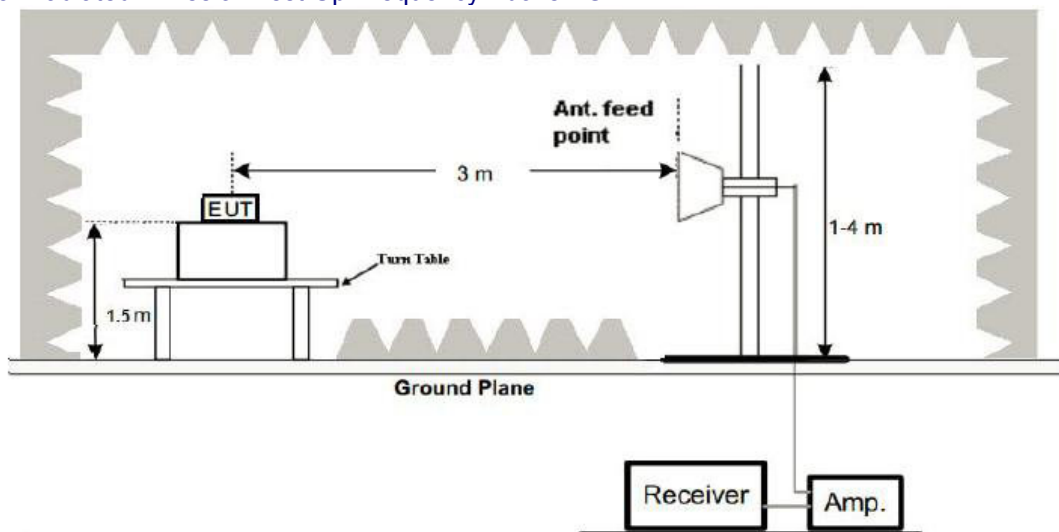



4.2.5 TEST PROCEDURE

The test site semi-anechoic chamber has met the requirement of NSA tolerance 4 dB according to the standards: ANSI C63.10-2013. The test distance is 3m. The setup is according to the requirements in Section 13.1.4.1 of ANSI C63.10-2013 and CAN/CSA-CEI/IEC CISPR 22.

This test is required for any spurious emission that falls in a Restricted Band, as defined in Section 15.205. It must be performed with the highest gain of each type of antenna proposed for use with the EUT.

Use the following spectrum analyzer settings:

Spectrum Parameter	Setting
Attenuation	Auto
Start Frequency	1000 MHz
Stop Frequency	10th carrier harmonic
RB / VB (emission in restricted band)	1 MHz / 1 MHz for Peak, 1 MHz / 10Hz for Average

Receiver Parameter	Setting
Attenuation	Auto
Start ~ Stop Frequency	9kHz~150kHz / RB 200Hz for QP
Start ~ Stop Frequency	150kHz~30MHz / RB 9kHz for QP
Start ~ Stop Frequency	30MHz~1000MHz / RB 120kHz for QP

- The measuring distance of at 3 m shall be used for measurements at frequency up to 1GHz. For frequencies above 1GHz, any suitable measuring distance may be used.
- The EUT was placed on the top of a rotating table 0.8 m for below 1GHz and 1.5m for above 1GHz the ground at a 3 meter. The table was rotated 360 degrees to determine the position of the highest radiation.
- The height of the equipment or of the substitution antenna shall be 0.8 m for below 1GHz and 1.5m for above 1GHz; the height of the test antenna shall vary between 1 m to 4 m. Both horizontal and vertical polarizations of the antenna are set to make the measurement.
- The initial step in collecting conducted emission data is a spectrum analyzer peak detector mode pre-scanning the measurement frequency range. Significant peaks are then marked and then Quasi Peak detector mode re-measured.
- If the Peak Mode measured value compliance with and lower than Quasi Peak Mode Limit, the EUT shall be deemed to meet QP Limits and then no additional QP Mode measurement performed.
- For the actual test configuration, please refer to the related Item – EUT Test Photos.

Note:

Both horizontal and vertical antenna polarities were tested and performed pretest to three orthogonal axis. The worst case emissions were reported

During the radiated emission test, the Spectrum Analyzer was set with the following configurations:

Frequency Band (MHz)	Function	Resolution bandwidth	Video Bandwidth
30 to 1000	QP	120 kHz	300 kHz
Above 1000	Peak	1 MHz	1 MHz
	Average	1 MHz	10 Hz

Note: for the frequency ranges below 30 MHz, a narrower RBW is used for these ranges but the measured value should add a RBW correction factor (RBWCF) where $RBWCF [dB] = 10 \cdot \lg(100 [kHz] / \text{narrower RBW [kHz]})$. , the narrower RBW is 1 kHz and RBWCF is 20 dB for the frequency 9 kHz to 150 kHz, and the narrower RBW is 10 kHz and RBWCF is 10 dB for the frequency 150 kHz to 30 MHz.




4.2.6 TEST RESULT

Between 9KHz – 30MHz

The emission from 9 kHz to 30MHz was pre-tested and found the result was 20dB lower than the limit, and according to 15.31(o) & RSS-Gen 6.13, the test result no need to reported.

Between 30MHz – 1GHz:

Temperature:	26°C	Relative Humidity:	54%
Pressure:	101 kPa	Polarization:	Horizontal
Test Voltage:	DC 5V	Test Mode :	TX 802.11n20 - 5745MHz

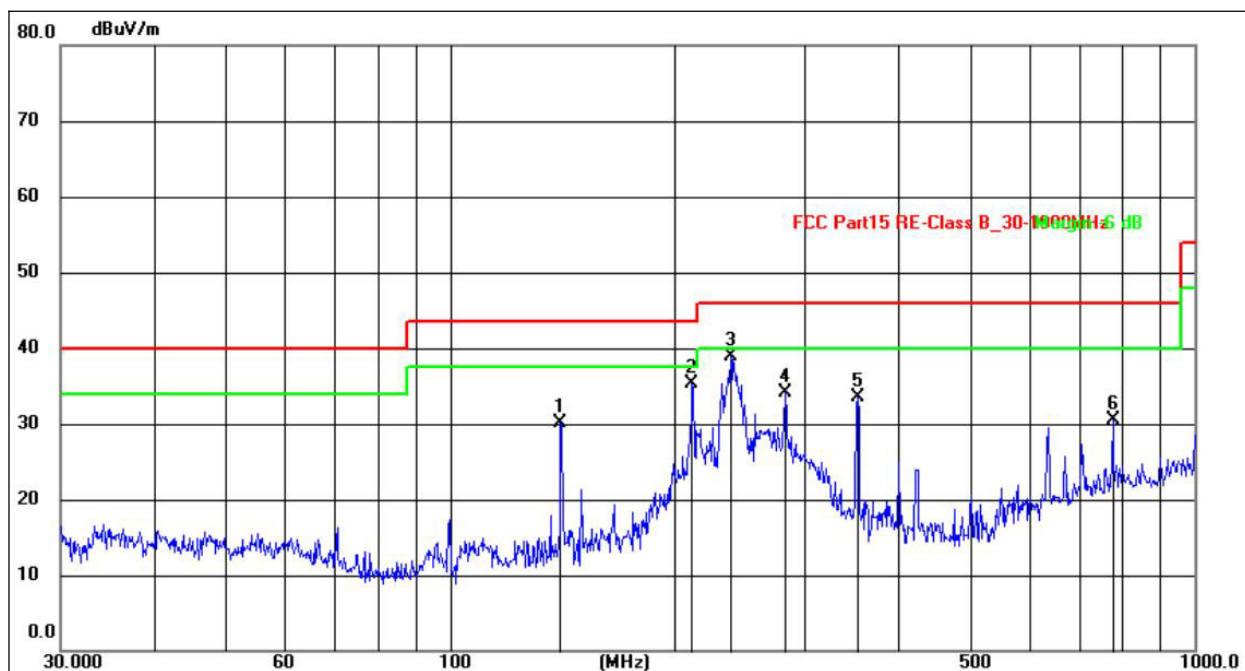


No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector
1	140.8350	46.78	-16.71	30.07	43.50	-13.43	QP
2	211.5261	53.14	-17.91	35.23	43.50	-8.27	QP
3	238.3101	54.88	-16.05	38.83	46.00	-7.17	QP
4	281.9945	48.29	-14.20	34.09	46.00	-11.91	QP
5	352.9433	49.85	-16.29	33.56	46.00	-12.44	QP
6	776.8777	37.06	-6.61	30.45	46.00	-15.55	QP

Notes:

1. An initial pre-scan was performed on the peak detector.
2. Quasi - Peak measurement were performed at the frequencies with maximized peak emission.
3. The emission levels of other frequencies are very lower than the limit and not show in test report.
4. Final Level = Reading level + Correct Factor.
5. Correct Factor = Antenna factor+ Cable loss factor - Amplifier factor.
6. Margin = Measurement Level-Limit.
7. The test data shows only the worst case TX 802.11n20 - 5745MHz.



Temperature:	26°C	Relative Humidity:	54%
Pressure:	101kPa	Polarization:	Vertical
Test Voltage:	DC 5V	Test Mode :	TX 802.11n20 - 5745MHz

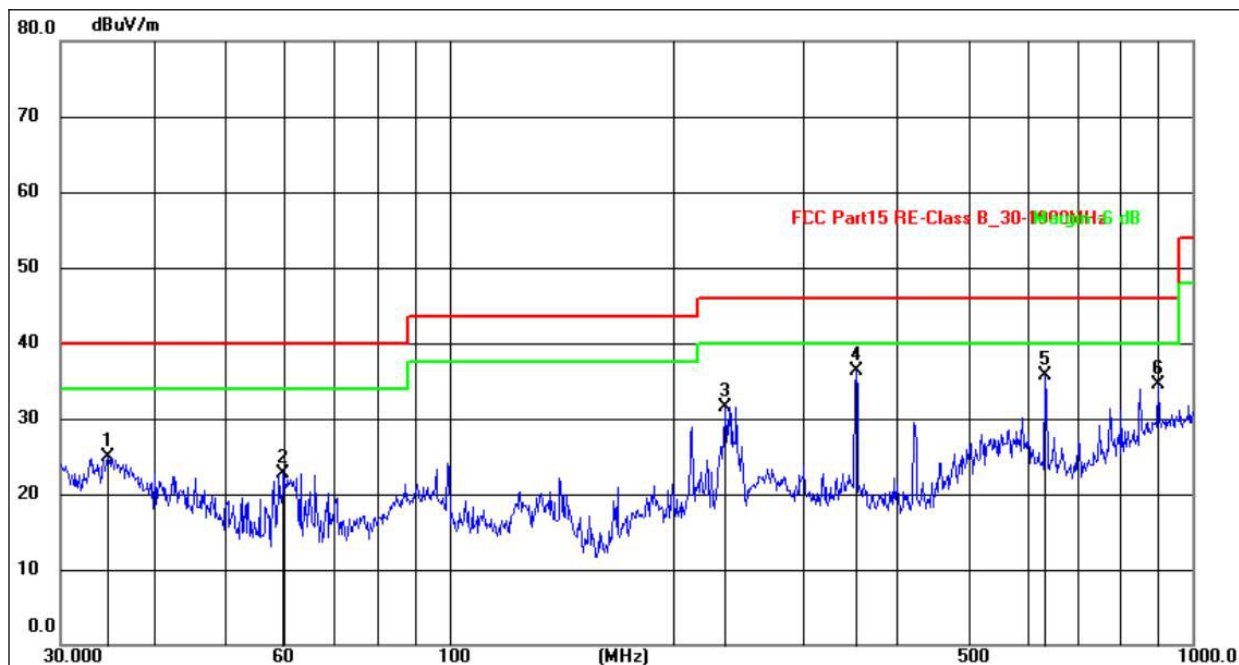

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector
1	34.7601	42.55	-17.55	25.00	40.00	-15.00	QP
2	59.8588	40.99	-18.19	22.80	40.00	-17.20	QP
3	234.9909	51.54	-19.95	31.59	46.00	-14.41	QP
4	352.9433	52.46	-16.11	36.35	46.00	-9.65	QP
5	633.9071	42.98	-7.35	35.63	46.00	-10.37	QP
6	900.1471	35.01	-0.44	34.57	46.00	-11.43	QP

Notes:

1. An initial pre-scan was performed on the peak detector.
2. Quasi - Peak measurement were performed at the frequencies with maximized peak emission.
3. The emission levels of other frequencies are very lower than the limit and not show in test report.
4. Final Level = Reading level + Correct Factor.
5. Correct Factor = Antenna factor+ Cable loss factor - Amplifier factor.
6. Margin = Measurement Level-Limit.
7. The test data shows only the worst case TX 802.11n20 - 5745MHz.



Between 1GHz – 40GHz:

Temperature :	26°C	Relative Humidity :	54%
Pressure :	1010 hPa	Test Voltage :	DC 5V
Test Mode :	802.11a/ n20/ n40		

802.11a

Polar (H/V)	Frequency (MHz)	Meter Reading (dBUV)	Pre-amplifier (dB)	Cable Loss (dB)	Antenna Factor (dB)	Emission Level (dBUV/m)	Limits (dBUV/m)	Margin (dB)	Detect or Type
Low Channel:5745MHz									
V	11490.00	50.28	30.55	5.77	24.66	50.16	74.00	-23.84	PK
V	11490.00	42.42	30.55	5.77	24.66	42.30	54.00	-11.70	AV
V	17235.00	52.31	30.33	6.32	24.55	52.85	68.20	-15.35	PK
V	17235.00	41.92	30.33	6.32	24.55	42.46	54.00	-11.54	AV
V	22980.00	48.95	30.85	7.45	24.69	50.24	74.00	-23.76	PK
V	22980.00	43.16	30.85	7.45	24.69	44.45	54.00	-9.55	AV
V	28725.00	53.54	31.02	8.99	25.57	57.08	68.20	-11.12	PK
V	28725.00	42.22	31.02	8.99	25.57	45.76	54.00	-8.24	AV
H	11490.00	52.29	30.55	5.77	24.66	52.17	74.00	-21.83	PK
H	11490.00	43.56	30.55	5.77	24.66	43.44	54.00	-10.56	AV
H	17235.00	53.46	30.33	6.32	24.55	54.00	68.20	-14.20	PK
H	17235.00	42.60	30.33	6.32	24.55	43.14	54.00	-10.86	AV
H	22980.00	50.89	30.85	7.45	24.69	52.18	74.00	-21.82	PK
H	22980.00	42.54	30.85	7.45	24.69	43.83	54.00	-10.17	AV
H	28725.00	52.68	31.02	8.99	25.57	56.22	68.20	-11.98	PK
H	28725.00	43.36	31.02	8.99	25.57	46.90	54.00	-7.10	AV

Polar (H/V)	Frequency (MHz)	Meter Reading (dBUV)	Pre-amplifier (dB)	Cable Loss (dB)	Antenna Factor (dB)	Emission Level (dBUV/m)	Limits (dBUV/m)	Margin (dB)	Detect or Type
Middle Channel:5785MHz									
V	11570.00	49.48	30.55	5.77	24.66	49.36	74.00	-24.64	PK
V	11570.00	41.88	30.55	5.77	24.66	41.76	54.00	-12.24	AV
V	17355.00	48.22	30.33	6.32	24.55	48.76	68.20	-19.44	PK
V	17355.00	41.52	30.33	6.32	24.55	42.06	54.00	-11.94	AV
V	23140.00	50.61	30.85	7.45	24.69	51.90	68.20	-16.30	PK
V	23140.00	41.15	30.85	7.45	24.69	42.44	54.00	-11.56	AV
V	28925.00	48.57	31.02	8.99	25.57	52.11	68.20	-16.09	PK
V	28925.00	41.29	31.02	8.99	25.57	44.83	54.00	-9.17	AV
H	11570.00	48.68	30.55	5.77	24.66	48.56	74.00	-25.44	PK
H	11570.00	41.62	30.55	5.77	24.66	41.50	54.00	-12.50	AV
H	17355.00	52.65	30.33	6.32	24.55	53.19	68.20	-15.01	PK
H	17355.00	41.23	30.33	6.32	24.55	41.77	54.00	-12.23	AV
H	23140.00	50.46	30.85	7.45	24.69	51.75	68.20	-16.45	PK
H	23140.00	41.59	30.85	7.45	24.69	42.88	54.00	-11.12	AV
H	28925.00	48.44	31.02	8.99	25.57	51.98	68.20	-16.22	PK
H	28925.00	42.15	31.02	8.99	25.57	45.69	54.00	-8.31	AV



Polar (H/V)	Frequency	Meter Reading	Pre-ampli fier	Cable Loss	Antenna Factor	Emission Level	Limits	Margin	Detect or Type
	(MHz)	(dBuV)	(dB)	(dB)	(dB)	(dBuV/m)	(dBuV/m)	(dB)	
High Channel:5825MHz									
V	11650.00	49.85	30.55	5.77	24.66	49.73	74.00	-24.27	PK
V	11650.00	41.80	30.55	5.77	24.66	41.68	54.00	-12.32	AV
V	17475.00	48.24	30.33	6.32	24.55	48.78	68.20	-19.42	PK
V	17475.00	41.38	30.33	6.32	24.55	41.92	54.00	-12.08	AV
V	23300.00	49.54	30.85	7.45	24.69	50.83	68.20	-17.37	PK
V	23300.00	41.47	30.85	7.45	24.69	42.76	54.00	-11.24	AV
V	29125.00	52.11	31.02	8.99	25.57	55.65	68.20	-12.55	PK
V	29125.00	40.96	31.02	8.99	25.57	44.50	54.00	-9.50	AV
H	11650.00	50.96	30.55	5.77	24.66	50.84	74.00	-23.16	PK
H	11650.00	40.86	30.55	5.77	24.66	40.74	54.00	-13.26	AV
H	17475.00	51.56	30.33	6.32	24.55	52.10	68.20	-16.10	PK
H	17475.00	41.35	30.33	6.32	24.55	41.89	54.00	-12.11	AV
H	23300.00	51.89	30.85	7.45	24.69	53.18	68.20	-15.02	PK
H	23300.00	41.30	30.85	7.45	24.69	42.59	54.00	-11.41	AV
H	29125.00	48.19	31.02	8.99	25.57	51.73	68.20	-16.47	PK
H	29125.00	41.95	31.02	8.99	25.57	45.49	54.00	-8.51	AV

Remark:

1. Emission Level = Meter Reading + Antenna Factor + Cable Loss – Pre-amplifier,
Margin= Emission Level - Limit
2. If peak below the average limit, the average emission was no test.
3. The amplitude of spurious emissions which are attenuated by more than 20dB below the permissible value has no need to be reported.



802.11n20

Polar (H/V)	Frequency	Meter Reading	Pre-ampl ifier	Cable Loss	Antenna Factor	Emission Level	Limits	Margin	Detect or Type
	(MHz)	(dBuV)	(dB)	(dB)	(dB)	(dBuV/m)	(dBuV/m)	(dB)	
Low Channel:5745MHz									
V	11490.00	50.41	30.55	5.77	24.66	50.29	74.00	-23.71	PK
V	11490.00	43.45	30.55	5.77	24.66	43.33	54.00	-10.67	AV
V	17235.00	51.51	30.33	6.32	24.55	52.05	68.20	-16.15	PK
V	17235.00	42.16	30.33	6.32	24.55	42.70	54.00	-11.30	AV
V	22980.00	50.01	30.85	7.45	24.69	51.30	74.00	-22.70	PK
V	22980.00	42.57	30.85	7.45	24.69	43.86	54.00	-10.14	AV
V	28725.00	51.97	31.02	8.99	25.57	55.51	68.20	-12.69	PK
V	28725.00	42.82	31.02	8.99	25.57	46.36	54.00	-7.64	AV
H	11490.00	52.10	30.55	5.77	24.66	51.98	74.00	-22.02	PK
H	11490.00	42.21	30.55	5.77	24.66	42.09	54.00	-11.91	AV
H	17235.00	53.15	30.33	6.32	24.55	53.69	68.20	-14.51	PK
H	17235.00	42.93	30.33	6.32	24.55	43.47	54.00	-10.53	AV
H	22980.00	51.01	30.85	7.45	24.69	52.30	74.00	-21.70	PK
H	22980.00	42.38	30.85	7.45	24.69	43.67	54.00	-10.33	AV
H	28725.00	52.88	31.02	8.99	25.57	56.42	68.20	-11.78	PK
H	28725.00	42.70	31.02	8.99	25.57	46.24	54.00	-7.76	AV

Polar (H/V)	Frequency	Meter Reading	Pre-ampl ifier	Cable Loss	Antenna Factor	Emission Level	Limits	Margin	Detect or Type
	(MHz)	(dBuV)	(dB)	(dB)	(dB)	(dBuV/m)	(dBuV/m)	(dB)	
Middle Channel:5785MHz									
V	11570.00	49.32	30.55	5.77	24.66	49.20	74.00	-24.80	PK
V	11570.00	41.65	30.55	5.77	24.66	41.53	54.00	-12.47	AV
V	17355.00	48.74	30.33	6.32	24.55	49.28	68.20	-18.92	PK
V	17355.00	41.59	30.33	6.32	24.55	42.13	54.00	-11.87	AV
V	23140.00	50.59	30.85	7.45	24.69	51.88	68.20	-16.32	PK
V	23140.00	41.44	30.85	7.45	24.69	42.73	54.00	-11.27	AV
V	28925.00	48.41	31.02	8.99	25.57	51.95	68.20	-16.25	PK
V	28925.00	41.50	31.02	8.99	25.57	45.04	54.00	-8.96	AV
H	11570.00	48.55	30.55	5.77	24.66	48.43	74.00	-25.57	PK
H	11570.00	42.03	30.55	5.77	24.66	41.91	54.00	-12.09	AV
H	17355.00	52.92	30.33	6.32	24.55	53.46	68.20	-14.74	PK
H	17355.00	41.23	30.33	6.32	24.55	41.77	54.00	-12.23	AV
H	23140.00	50.22	30.85	7.45	24.69	51.51	68.20	-16.69	PK
H	23140.00	41.49	30.85	7.45	24.69	42.78	54.00	-11.22	AV
H	28925.00	48.27	31.02	8.99	25.57	51.81	68.20	-16.39	PK
H	28925.00	42.18	31.02	8.99	25.57	45.72	54.00	-8.28	AV



Polar (H/V)	Frequency	Meter Reading	Pre-ampli fier	Cable Loss	Antenna Factor	Emission Level	Limits	Margin	Detect or Type
	(MHz)	(dBuV)	(dB)	(dB)	(dB)	(dBuV/m)	(dBuV/m)	(dB)	
High Channel:5825MHz									
V	11650.00	50.09	30.55	5.77	24.66	49.97	74.00	-24.03	PK
V	11650.00	41.17	30.55	5.77	24.66	41.05	54.00	-12.95	AV
V	17475.00	48.14	30.33	6.32	24.55	48.68	68.20	-19.52	PK
V	17475.00	40.97	30.33	6.32	24.55	41.51	54.00	-12.49	AV
V	23300.00	49.64	30.85	7.45	24.69	50.93	68.20	-17.27	PK
V	23300.00	41.53	30.85	7.45	24.69	42.82	54.00	-11.18	AV
V	29125.00	51.69	31.02	8.99	25.57	55.23	68.20	-12.97	PK
V	29125.00	41.50	31.02	8.99	25.57	45.04	54.00	-8.96	AV
H	11650.00	50.90	30.55	5.77	24.66	50.78	74.00	-23.22	PK
H	11650.00	40.71	30.55	5.77	24.66	40.59	54.00	-13.41	AV
H	17475.00	51.49	30.33	6.32	24.55	52.03	68.20	-16.17	PK
H	17475.00	41.25	30.33	6.32	24.55	41.79	54.00	-12.21	AV
H	23300.00	51.86	30.85	7.45	24.69	53.15	68.20	-15.05	PK
H	23300.00	40.98	30.85	7.45	24.69	42.27	54.00	-11.73	AV
H	29125.00	48.12	31.02	8.99	25.57	51.66	68.20	-16.54	PK
H	29125.00	41.75	31.02	8.99	25.57	45.29	54.00	-8.71	AV

Remark:

1. Emission Level = Meter Reading + Antenna Factor + Cable Loss – Pre-amplifier,
Margin= Emission Level - Limit
2. If peak below the average limit, the average emission was no test.
3. The amplitude of spurious emissions which are attenuated by more than 20dB below the permissible value has no need to be reported.



802.11n40

Polar (H/V)	Frequency	Meter Reading	Pre-ampl ifier	Cable Loss	Antenna Factor	Emission Level	Limits	Margin	Detect or Type
	(MHz)	(dBuV)	(dB)	(dB)	(dB)	(dBuV/m)	(dBuV/m)	(dB)	
Low Channel:5755MHz									
V	11510.00	50.71	30.55	5.77	24.66	50.59	74.00	-23.41	PK
V	11510.00	42.28	30.55	5.77	24.66	42.16	54.00	-11.84	AV
V	17265.00	51.27	30.33	6.32	24.55	51.81	68.20	-16.39	PK
V	17265.00	43.17	30.33	6.32	24.55	43.71	54.00	-10.29	AV
V	23020.00	48.73	30.85	7.45	24.69	50.02	74.00	-23.98	PK
V	23020.00	43.07	30.85	7.45	24.69	44.36	54.00	-9.64	AV
V	28775.00	53.01	31.02	8.99	25.57	56.55	68.20	-11.65	PK
V	28775.00	42.86	31.02	8.99	25.57	46.40	54.00	-7.60	AV
H	11510.00	51.03	30.55	5.77	24.66	50.91	74.00	-23.09	PK
H	11510.00	42.49	30.55	5.77	24.66	42.37	54.00	-11.63	AV
H	17265.00	54.02	30.33	6.32	24.55	54.56	68.20	-13.64	PK
H	17265.00	43.11	30.33	6.32	24.55	43.65	54.00	-10.35	AV
H	23020.00	51.74	30.85	7.45	24.69	53.03	74.00	-20.97	PK
H	23020.00	43.06	30.85	7.45	24.69	44.35	54.00	-9.65	AV
H	28775.00	51.50	31.02	8.99	25.57	55.04	68.20	-13.16	PK
H	28775.00	42.54	31.02	8.99	25.57	46.08	54.00	-7.92	AV

Polar (H/V)	Frequency	Meter Reading	Pre-ampl ifier	Cable Loss	Antenna Factor	Emission Level	Limits	Margin	Detect or Type
	(MHz)	(dBuV)	(dB)	(dB)	(dB)	(dBuV/m)	(dBuV/m)	(dB)	
Middle Channel:5795MHz									
V	11590.00	50.60	30.55	5.77	24.66	50.48	74.00	-23.52	PK
V	11590.00	43.46	30.55	5.77	24.66	43.34	54.00	-10.66	AV
V	17385.00	51.26	30.33	6.32	24.55	51.80	68.20	-16.40	PK
V	17385.00	41.91	30.33	6.32	24.55	42.45	54.00	-11.55	AV
V	23180.00	49.43	30.85	7.45	24.69	50.72	74.00	-23.28	PK
V	23180.00	42.93	30.85	7.45	24.69	44.22	54.00	-9.78	AV
V	28975.00	52.03	31.02	8.99	25.57	55.57	68.20	-12.63	PK
V	28975.00	41.83	31.02	8.99	25.57	45.37	54.00	-8.63	AV
H	11590.00	50.79	30.55	5.77	24.66	50.67	74.00	-23.33	PK
H	11590.00	42.63	30.55	5.77	24.66	42.51	54.00	-11.49	AV
H	17385.00	52.66	30.33	6.32	24.55	53.20	68.20	-15.00	PK
H	17385.00	43.01	30.33	6.32	24.55	43.55	54.00	-10.45	AV
H	23180.00	50.96	30.85	7.45	24.69	52.25	74.00	-21.75	PK
H	23180.00	42.89	30.85	7.45	24.69	44.18	54.00	-9.82	AV
H	28975.00	52.34	31.02	8.99	25.57	55.88	68.20	-12.32	PK
H	28975.00	43.33	31.02	8.99	25.57	46.87	54.00	-7.13	AV

Remark:

1. Emission Level = Meter Reading + Antenna Factor + Cable Loss – Pre-amplifier,
Margin= Emission Level - Limit
2. If peak below the average limit, the average emission was no test.
3. The amplitude of spurious emissions which are attenuated by more than 20dB below the permissible value has no need to be reported.



5. POWER SPECTRAL DENSITY TEST

5.1 APPLIED PROCEDURES / LIMIT

According to FCC §15.407(a) (3) (i)

(1) Power limits:

For the band 5.725-5.85 GHz, the maximum conducted output power over the frequency band of operation shall not exceed 1 W. In addition, the maximum power spectral density shall not exceed 30 dBm in any 500-kHz band. If transmitting antennas of directional gain greater than 6 dBi are used, both the maximum conducted output power and the maximum power spectral density shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi. However, fixed point-to-point U-NII devices operating in this band may employ transmitting antennas with directional gain greater than 6 dBi without any corresponding reduction in transmitter conducted power. Fixed, point-to-point operations exclude the use of point-to-multipoint systems, omnidirectional applications, and multiple collocated transmitters transmitting the same information. The operator of the U-NII device, or if the equipment is professionally installed, the installer, is responsible for ensuring that systems employing high gain directional antennas are used exclusively for fixed, point-to-point operations.

5.2 TEST PROCEDURE

For devices operating in the band 5.725-5.85 GHz, the rules specify a measurement bandwidth of 500 kHz. Many spectrum analyzers do not have 500 kHz RBW, thus a narrower RBW may need to be used. The rules permit the use of a RBWs less than 1 MHz, or 500 kHz, "provided that the measured power is integrated over the full reference bandwidth" to show the total power over the specified measurement bandwidth (i.e., 1 MHz, or 500 kHz). If measurements are performed using a reduced resolution bandwidth (< 1 MHz, or < 500 kHz) and integrated over 1 MHz, or 500 KHz bandwidth, the following adjustments to the procedures apply:

- a) Set $RBW \geq 1/T$, where T is defined in section II.B.I.a).
- b) Set $VBW \geq 3$ RBW.
- c) If measurement bandwidth of Maximum PSD is specified in 500 kHz, add $10\log(500\text{kHz}/RBW)$ to the measured result, whereas RBW (< 500 KHz) is the reduced resolution bandwidth of the spectrum analyzer set during measurement.
- d) If measurement bandwidth of Maximum PSD is specified in 1 MHz, add $10\log(1\text{MHz}/RBW)$ to the measured result, whereas RBW (< 1 MHz) is the reduced resolution bandwidth of spectrum analyzer set during measurement.
- e) Care must be taken to ensure that the measurements are performed during a period of continuous transmission or are corrected upward for duty cycle.


Note: As a practical matter, it is recommended to use reduced RBW of 100 KHz for the sections 5.c) and 5.d) above, since RBW=100 KHZ is available on nearly all spectrum analyzers.

5.3 DEVIATION FROM STANDARD

No deviation.



5.4 TEST SETUP

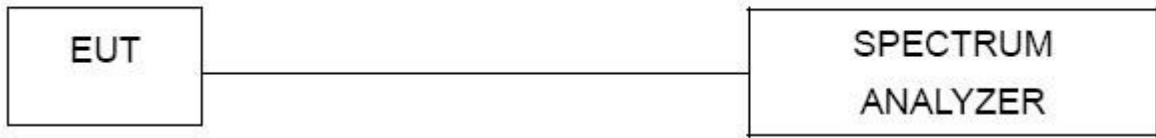

5.5 EUT OPERATION CONDITIONS

The EUT tested system was configured as the statements of chapter 3, Unless otherwise a special operating condition is specified in the follows during the testing.



5.6 TEST RESULTS


Temperature :	26 °C	Relative Humidity :	54%
Pressure :	1015 hPa	Test Voltage :	DC 5V
Test Band :	5.8G		

Test mode	Test Channel (MHz)	PSD (dBm/500kHz)	Duty Cycle Factor (dB)	Total PSD (dBm)	Limit (dBm/500kHz)	Result
802.11a	5745	-7.403	0	-7.403	30	Pass
	5785	-7.832	0	-7.832	30	Pass
	5825	-6.839	0	-6.839	30	Pass
802.11n20	5745	-8.209	0	-8.209	30	Pass
	5785	-8.190	0	-8.190	30	Pass
	5825	-7.637	0	-7.637	30	Pass
802.11n40	5755	-10.473	0	-10.473	30	Pass
	5795	-11.161	0	-11.161	30	Pass


Note: Total PSD = PSD + Duty Cycle Factor.




802.11a
CH149

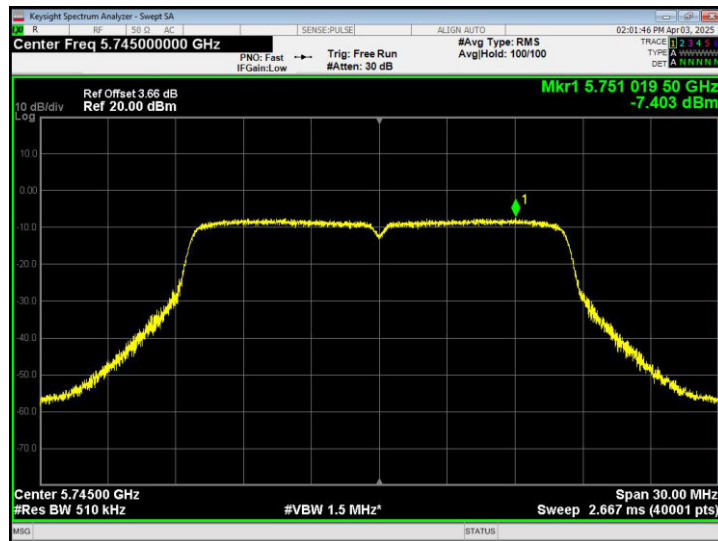

CH157

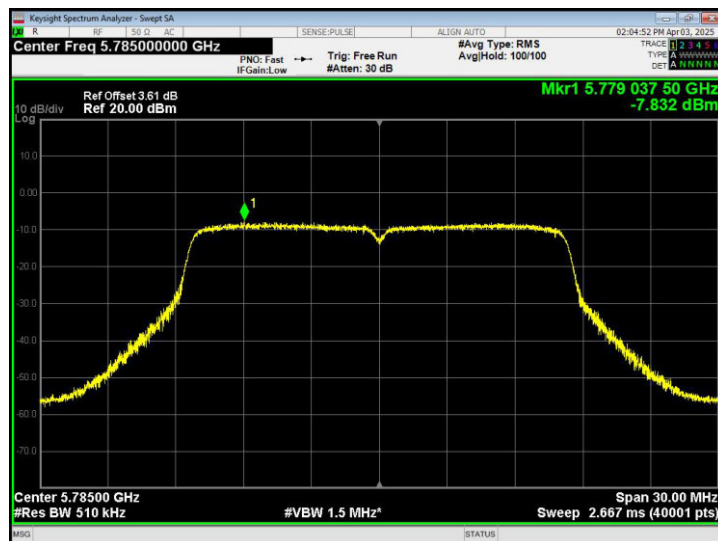


CH165

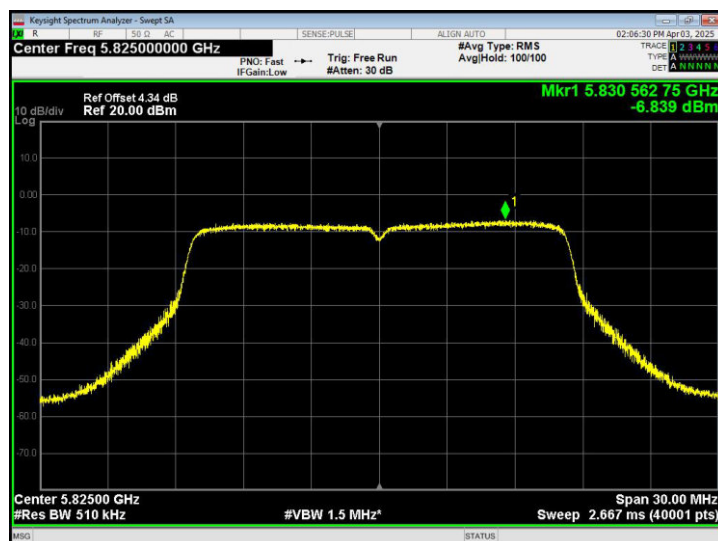





802.11n20
CH149

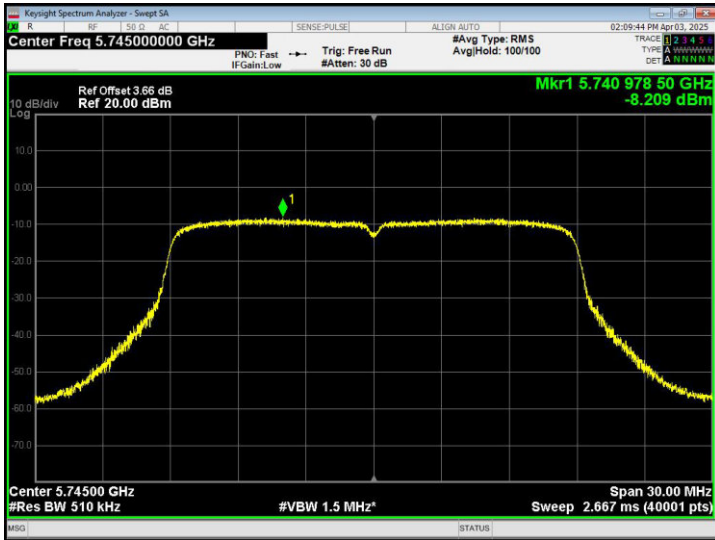


CH157

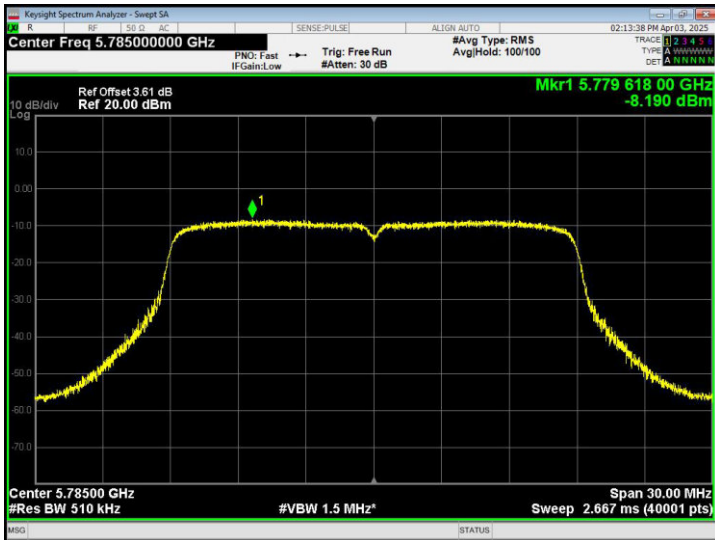


CH165

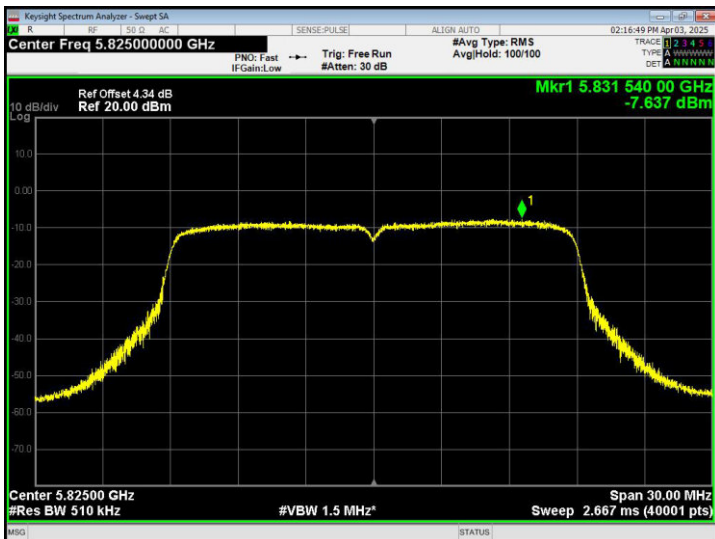

802.11n40
CH151

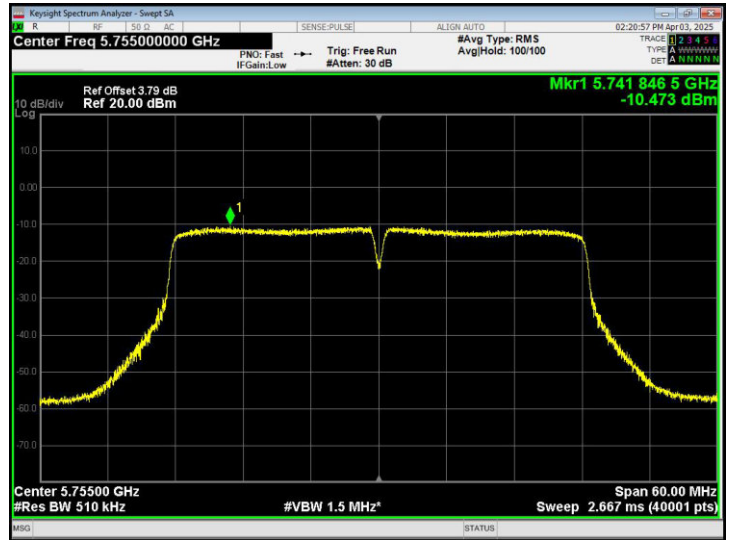

CH159

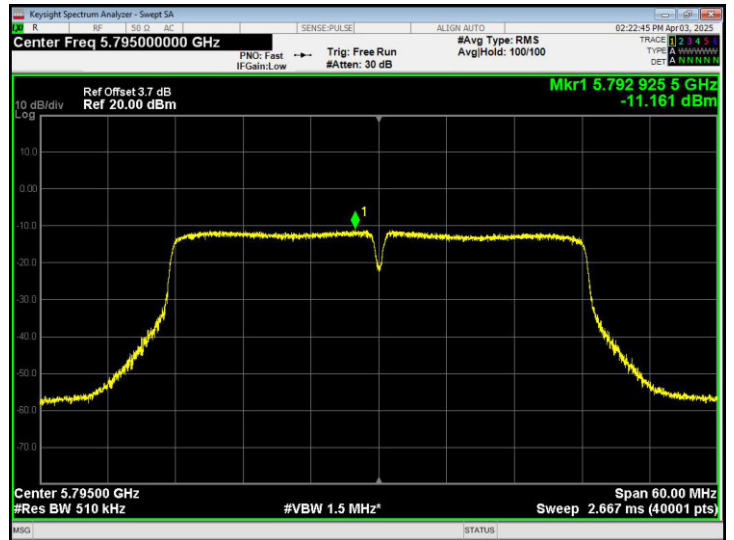



6. 26DB EMISSION BANDWIDTH & 6DB OCCUPIED BANDWIDTH

6.1 APPLIED PROCEDURES / LIMIT

The maximum power spectral density is measured as a conducted emission by direct connection of a calibrated test instrument to the equipment under test. If the device cannot be connected directly, alternative techniques acceptable to the Commission may be used. Measurements in the 5.725-5.85 GHz band, the minimum bandwidth 6 dB bandwidth of U-NII devices shall be at least 500KHz. Measurements in the 5.15-5.25 GHz, 5.25-5.35 GHz, and the 5.47-5.725 GHz bands are made over a bandwidth of 1 MHz or the 26 dB emission bandwidth of the device, whichever is less. A narrower resolution bandwidth can be used, provided that the measured power is integrated over the full reference bandwidth.

6.2 TEST PROCEDURE

The following procedure shall be used for measuring 6dB Occupied Bandwidth:

The procedure for this method is as follows:

- Set RBW = 100KHz.
- Set the VBW > RBW.
- Detector = Peak.
- Trace mode = max hold.
- Measure the maximum width of the emission that is constrained by the frequencies associated with the two outermost amplitude points (upper and lower frequencies) that are attenuated by 6 dB relative to the maximum level measured in the fundamental emission.

The following procedure shall be used for measuring 26dB Emission bandwidth:

The procedure for this method is as follows:

- Set RBW = approximately 1% of the emission bandwidth.
- Set the VBW > RBW.
- Detector = peak.
- Trace mode = max hold.
- Measure the maximum width of the emission that is 26 dB down from the peak of the emission. Compare this with the RBW setting of the instrument. Readjust RBW and repeat measurement as needed until the RBW/EBW ratio is approximately 1%.



6.3 EUT OPERATION CONDITIONS

The EUT tested system was configured as the statements of chapter 3, Unless otherwise a special operating condition is specified in the follows during the testing.



6.4 TEST RESULTS


Temperature :	26 °C	Relative Humidity :	54%
Pressure :	101kPa	Test Voltage :	DC 5V
Test Band :	5.8G		

Test Mode	Test Channel (MHz)	6dB Bandwidth (MHz)	26dB Bandwidth (MHz)	6dB Limit (kHz)	Result
802.11a	5745	16.52	19.48	>500	Pass
	5785	16.46	19.71		
	5825	16.48	19.47		
802.11n20	5745	17.59	20.59	>500	Pass
	5785	17.58	20.53		
	5825	17.64	20.40		
802.11n40	5755	36.41	41.77	>500	Pass
	5795	36.44	42.84		




802.11a

6dB Bandwidth plot on channel 149

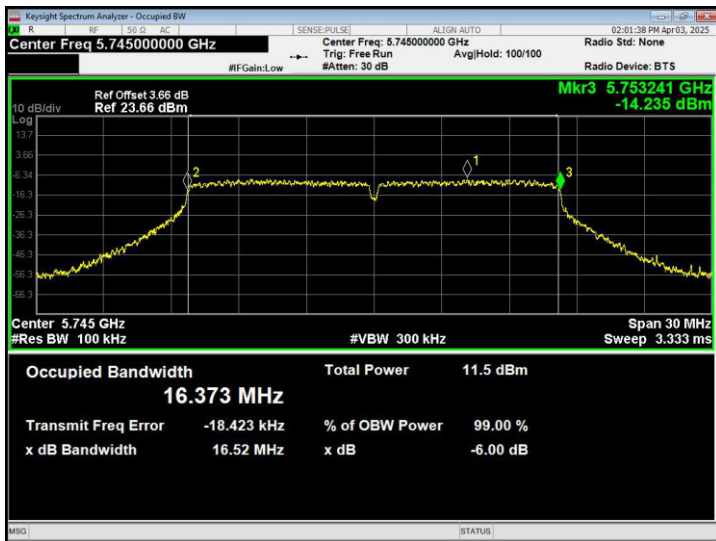


802.11a


26dB Bandwidth plot on channel 149

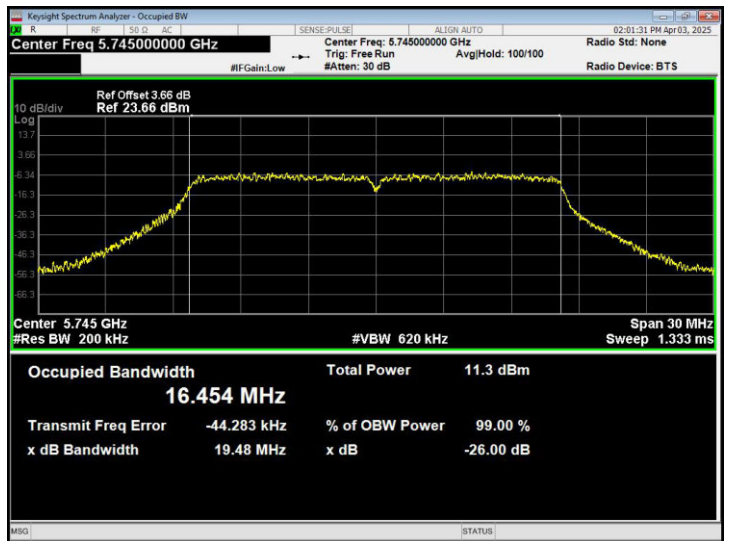


6dB Bandwidth plot on channel 157

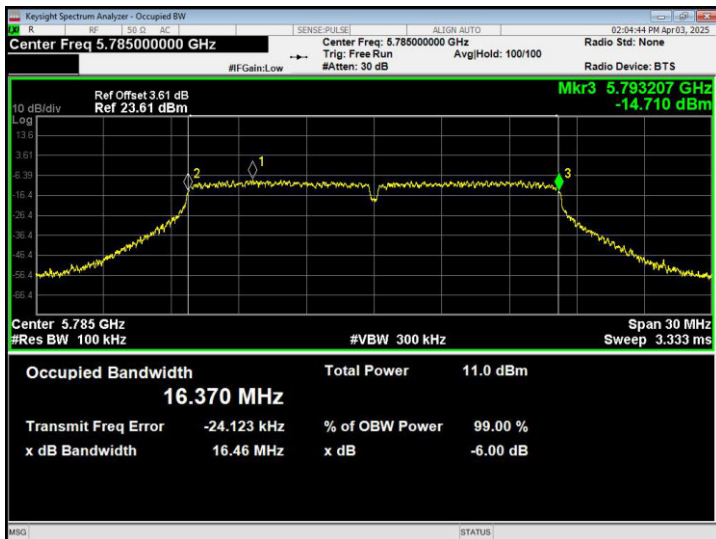


26dB Bandwidth plot on channel 157

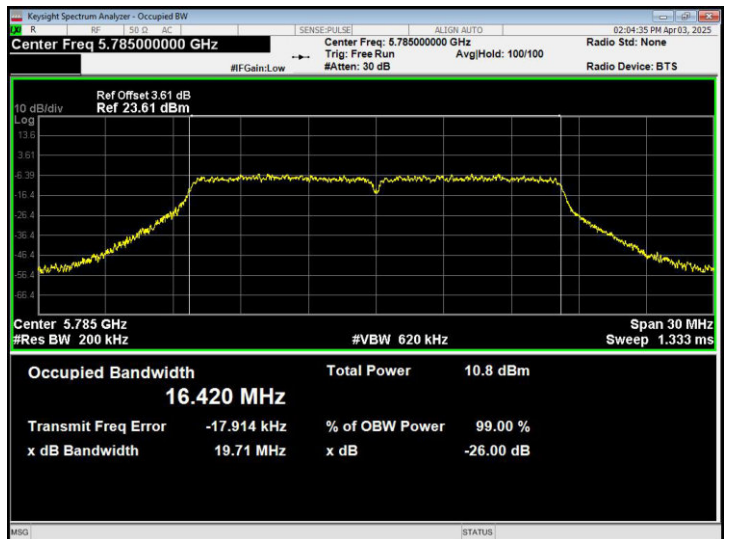

6dB Bandwidth plot on channel 165

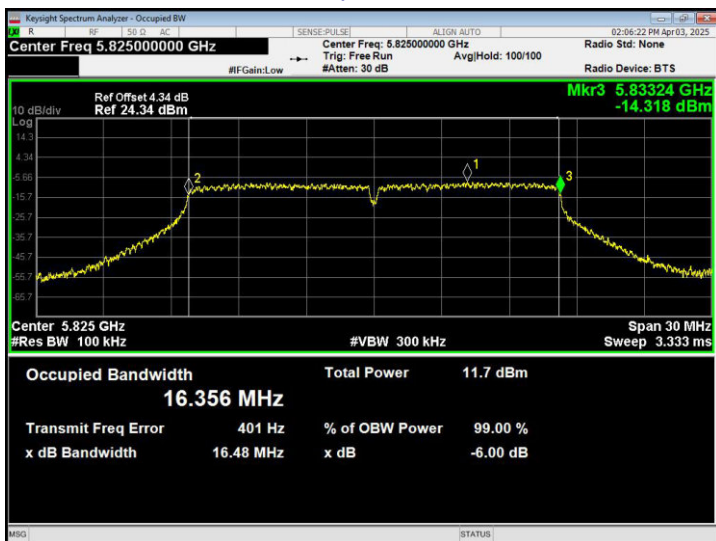


26dB Bandwidth plot on channel 165

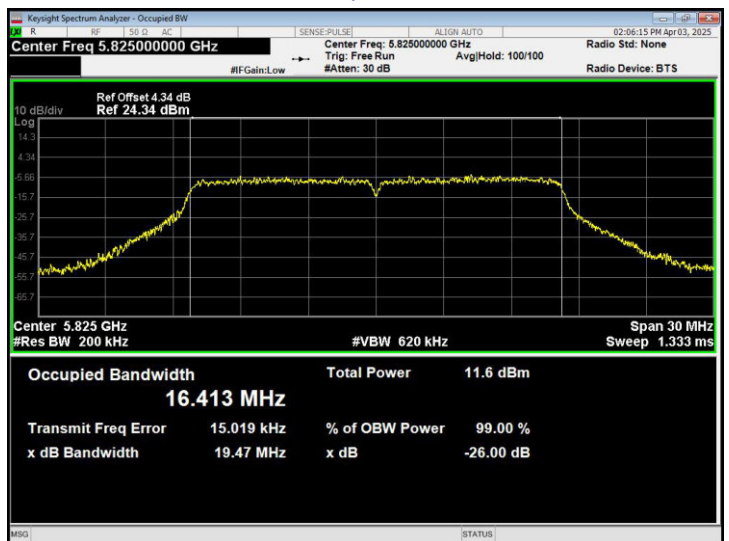




802.11n20

6dB Bandwidth plot on channel 149

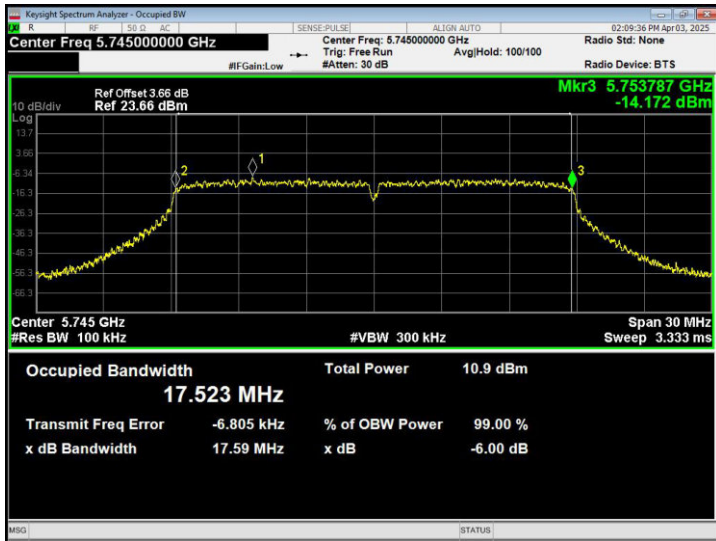


802.11n20


26dB Bandwidth plot on channel 149

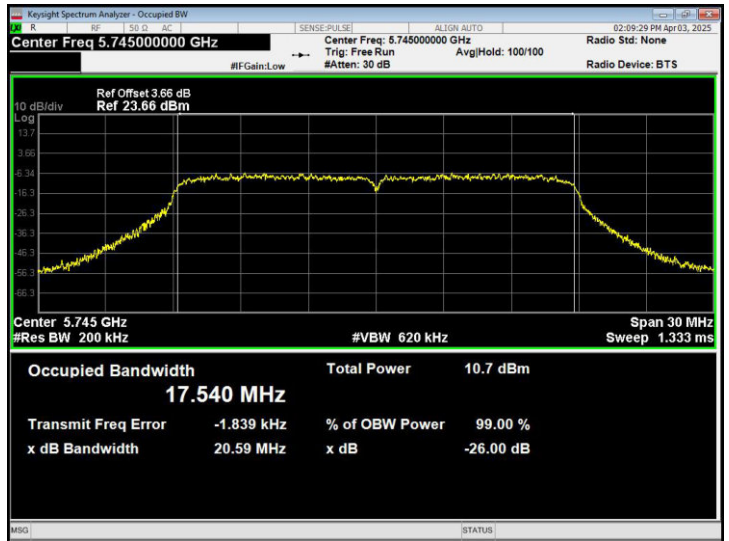


6dB Bandwidth plot on channel 157

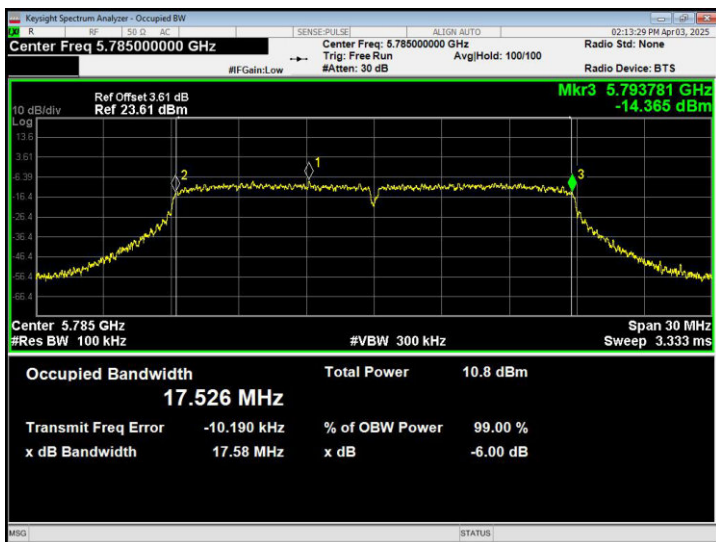


26dB Bandwidth plot on channel 157

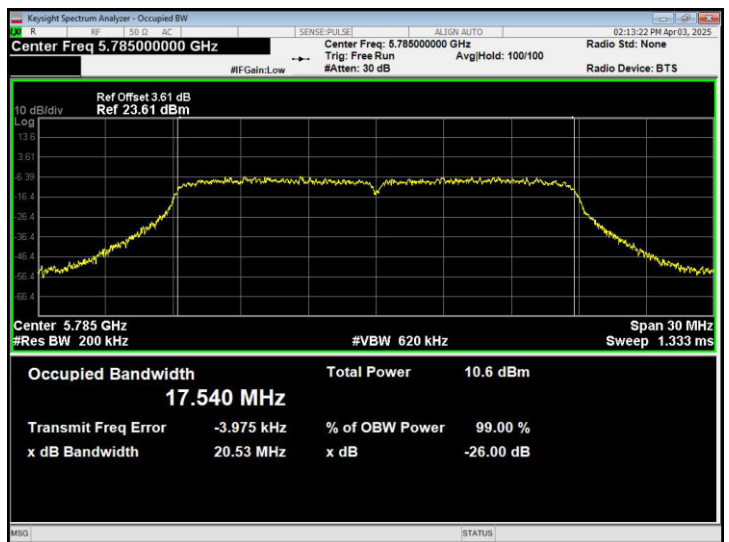

6dB Bandwidth plot on channel 165

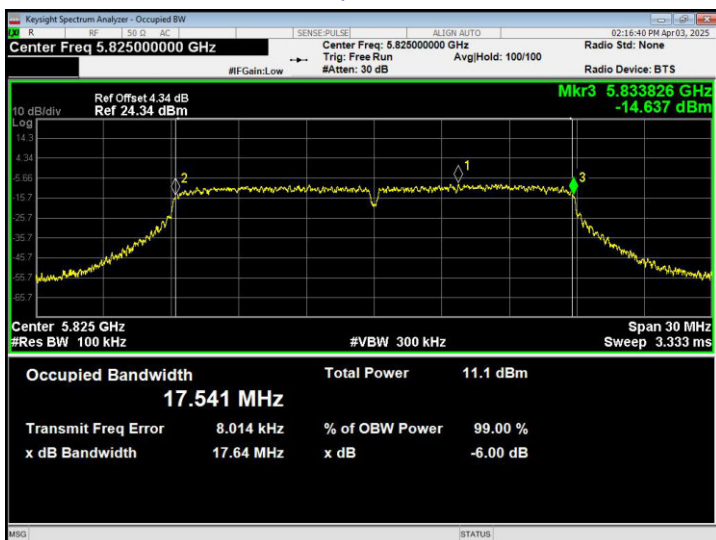


26dB Bandwidth plot on channel 165

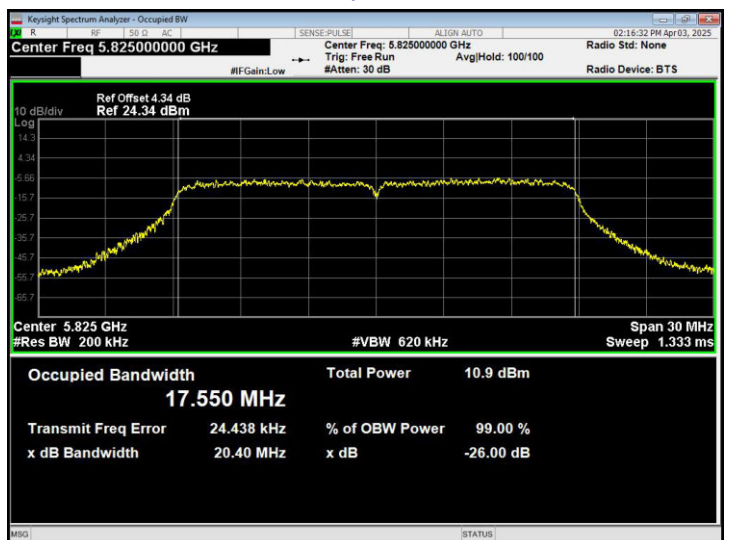




802.11n40

6dB Bandwidth plot on channel 151

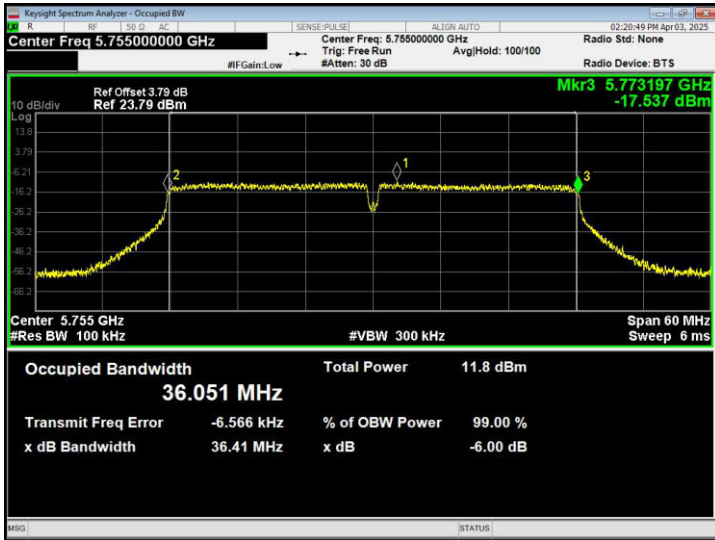


802.11n40


26dB Bandwidth plot on channel 151

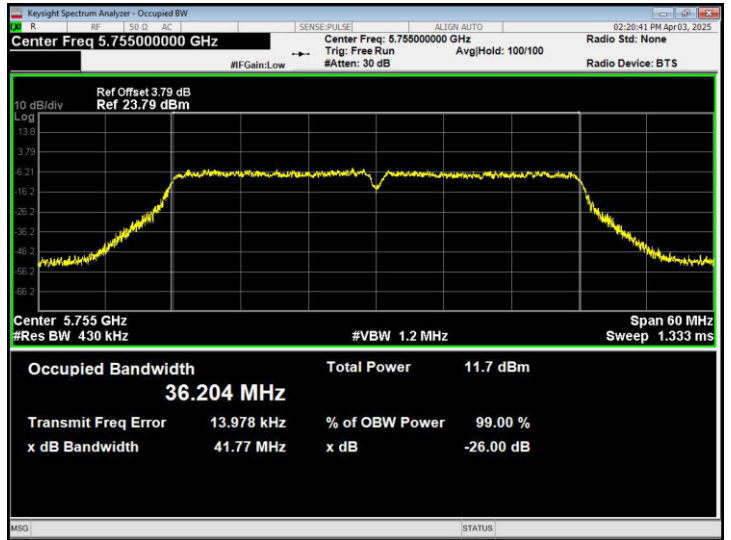

6dB Bandwidth plot on channel 159

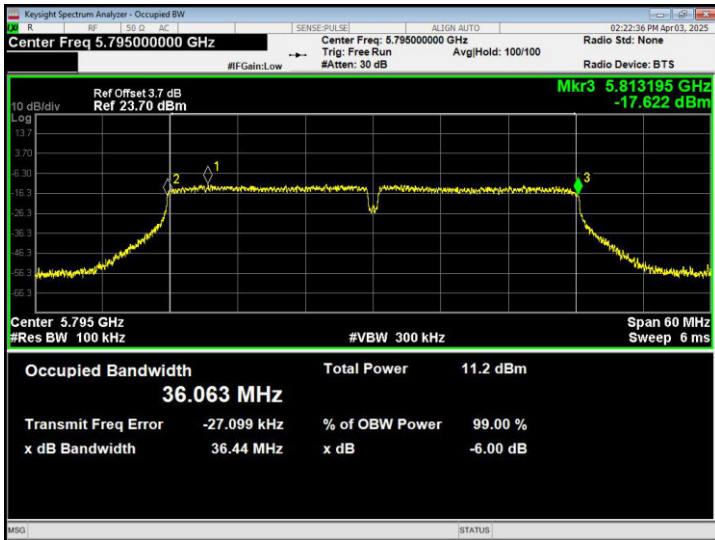

26dB Bandwidth plot on channel 159

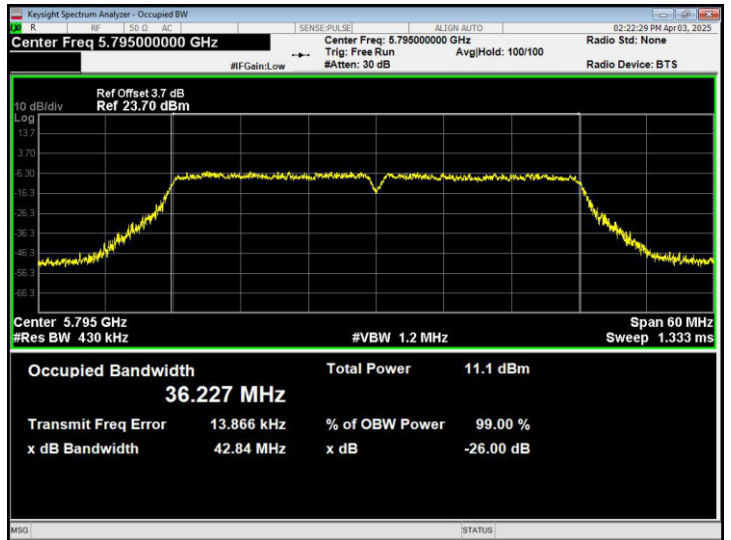



7. MAXIMUM CONDUCTED OUTPUT POWER

7.1 PPLIED PROCEDURES / LIMIT

According to FCC §15.407 (a)(3)(i)

The maximum conducted output power should not exceed:

Frequency Band(MHz)	Limit
5725~5850	1W

7.2 TEST PROCEDURE

The EUT was directly connected to the Power meter

1. Device Configuration

If possible, configure or modify the operation of the EUT so that it transmits continuously at its maximum power control level (see section II.B.).

a) The intent is to test at 100 percent duty cycle; however a small reduction in duty cycle (to no lower than 98 percent) is permitted if required by the EUT for amplitude control purposes. Manufacturers are expected to provide software to the test lab to permit such continuous operation.

b) If continuous transmission (or at least 98 percent duty cycle) cannot be achieved due to hardware limitations (e.g., overheating), the EUT shall be operated at its maximum power control level with the transmit duration as long as possible and the duty cycle as high as possible.

2. Measurement using a Spectrum Analyzer or EMI Receiver (SA)

Measurement of maximum conducted output power using a spectrum analyzer requires integrating the spectrum across a frequency span that encompasses, at a minimum, either the EBW or the 99-percent occupied bandwidth of the signal.¹ However, the EBW must be used to determine bandwidth dependent limits on maximum conducted output power in accordance with § 15.407(a).

a) The test method shall be selected as follows: (i) Method SA-1 or SA-1 Alternative (averaging with the EUT transmitting at full power throughout each sweep) shall be applied if either of the following conditions can be satisfied:

- The EUT transmits continuously (or with a duty cycle ≥ 98 percent).
- Sweep triggering or gating can be implemented in a way that the device transmits at the maximum power control level throughout the duration of each of the instrument sweeps to be averaged. This condition can generally be achieved by triggering the instrument's sweep if the duration of the sweep (with the analyzer configured as in Method SA-1, below) is equal to or shorter than the duration T of each transmission from the EUT and if those transmissions exhibit full power throughout their durations.

(ii) Method SA-2 or SA-2 Alternative (averaging across on and off times of the EUT transmissions, followed by duty cycle correction) shall be applied if the conditions of (i) cannot be achieved and the transmissions exhibit a constant duty cycle during the measurement duration. Duty cycle will be considered to be constant if variations are less than ± 2 percent.

(iii) Method SA-3 (RMS detection with max hold) or SA-3 Alternative (reduced VBW with max hold) shall be applied if the conditions of (i) and (ii) cannot be achieved.

b) Method SA-1 (trace averaging with the EUT transmitting at full power throughout each sweep): (i) Set span to encompass the entire emission bandwidth (EBW) (or, alternatively, the entire 99% occupied bandwidth) of the signal.

(ii) Set RBW = 1 MHz.

(iii) Set VBW ≥ 3 MHz.

(iv) Number of points in sweep ≥ 2 Span / RBW. (This ensures that bin-to-bin spacing is \leq RBW/2, so that narrowband signals are not lost between frequency bins.)

(v) Sweep time = auto.

(vi) Detector = RMS (i.e., power averaging), if available. Otherwise, use sample detector mode.

(vii) If transmit duty cycle < 98 percent, use a video trigger with the trigger level set to enable triggering only on full power pulses. Transmitter must operate at maximum power control level for the entire duration of every sweep. If the EUT transmits continuously (i.e., with no off intervals) or at duty cycle ≥ 98 percent, and if each transmission is entirely at the maximum power control level, then the trigger shall be set to "free run".

(viii) Trace average at least 100 traces in power averaging (i.e., RMS) mode.



(ix) Compute power by integrating the spectrum across the EBW (or, alternatively, the entire 99% occupied bandwidth) of the signal using the instrument's band power measurement function with band limits set equal to the EBW (or occupied bandwidth) band edges. If the instrument does not have a band power function, sum the spectrum

7.3 DEVIATION FROM STANDARD

No deviation.

7.4 TEST SETUP



7.5 EUT OPERATION CONDITIONS

The EUT tested system was configured as the statements of chapter 3, Unless otherwise a special operating condition is specified in the follows during the testing.



7.6 TEST RESULTS

Temperature :	26 °C	Relative Humidity :	54%
Pressure :	1012 hPa	Test Voltage :	DC 5V
Test Band :	5.8G		

Test Mode	Frequency (MHz)	Output Power (dBm)	Duty Cycle Factor (dB)	Total Power (dBm)	Limit (dBm)	Result
802.11 a	5745	5.777	0	5.977	30	Pass
	5785	5.613	0	5.713	30	Pass
	5825	5.994	0	6.294	30	Pass
802.11 n20	5745	5.273	0	5.473	30	Pass
	5785	5.055	0	5.355	30	Pass
	5825	5.476	0	5.676	30	Pass
802.11 n40	5755	5.658	0	5.958	30	Pass
	5795	5.367	0	5.167	30	Pass

Note: Total Power = Output Power + Duty Cycle Factor.



8. OUT OF BAND EMISSIONS

8.1 APPLICABLE STANDARD

According to FCC §15.407 (b) (4)

Undesirable emission limits. Except as shown in paragraph (b)(10) of this section, the maximum emissions outside of the frequency bands of operation shall be attenuated in accordance with the following limits:

For transmitters operating solely in the 5.725-5.850 GHz band:

(i) All emissions shall be limited to a level of -27 dBm/MHz at 75 MHz or more above or below the band edge increasing linearly to 10 dBm/MHz at 25 MHz above or below the band edge, and from 25 MHz above or below the band edge increasing linearly to a level of 15.6 dBm/MHz at 5 MHz above or below the band edge, and from 5 MHz above or below the band edge increasing linearly to a level of 27 dBm/MHz at the band edge.

(ii) Devices certified before March 2, 2017 with antenna gain greater than 10 dBi may demonstrate compliance with the emission limits in § 15.247(d), but manufacturing, marketing and importing of devices certified under this alternative must cease by March 2, 2018. Devices certified before March 2, 2018 with antenna gain of 10 dBi or less may demonstrate compliance with the emission limits in § 15.247(d), but manufacturing, marketing and importing of devices certified under this alternative must cease before March 2, 2020.

8.2 TEST PROCEDURE

1. Check the calibration of the measuring instrument using either an internal calibrator or a known signal from an external generator.
2. Position the EUT without connection to measurement instrument. Turn on the EUT and connect its antenna terminal to measurement instrument via a low loss cable. Then set it to any one measured frequency within its operating range, and make sure the instrument is operated in its linear range.
3. Set RBW of spectrum analyzer to 1 MHz with a convenient frequency span.
4. Measure the highest amplitude appearing on spectral display and set it as a reference level. Plot the graph with marking the highest point and edge frequency.
5. Repeat above procedures until all measured frequencies were complete.

8.3 DEVIATION FROM STANDARD

No deviation.

8.4 TEST SETUP





8.5 EUT OPERATION CONDITIONS


The EUT tested system was configured as the statements of chapter 3, Unless otherwise a special operating condition is specified in the follows during the testing.

8.6 TEST RESULTS


Temperature :	26 °C	Relative Humidity :	54%
Pressure :	1012 hPa	Test Voltage :	DC 5V
Test band :	5.8G	Antenna gain :	-1.05dBi

5.745~5.825 GHz


(802.11a) Band Edge, Left Side

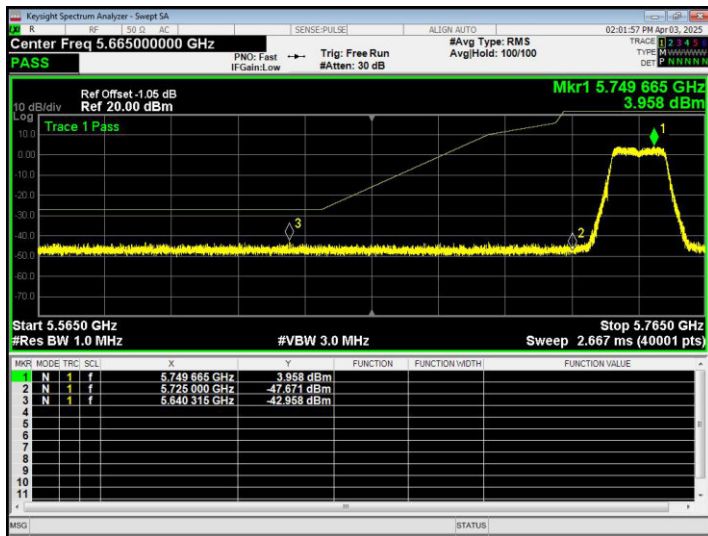


(802.11a) Band Edge, Right Side

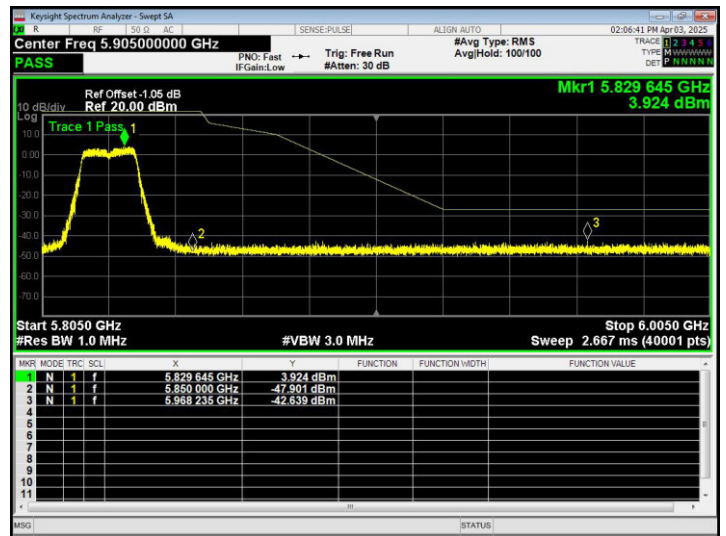

(802.11n20) Band Edge, Left Side

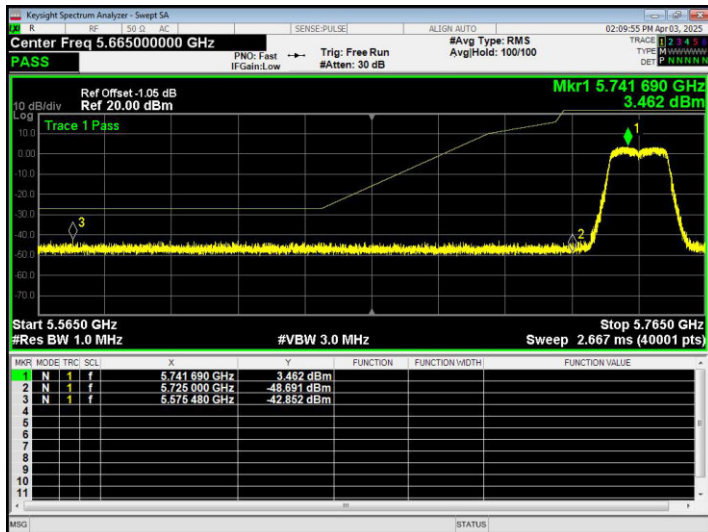


(802.11n20) Band Edge, Right Side

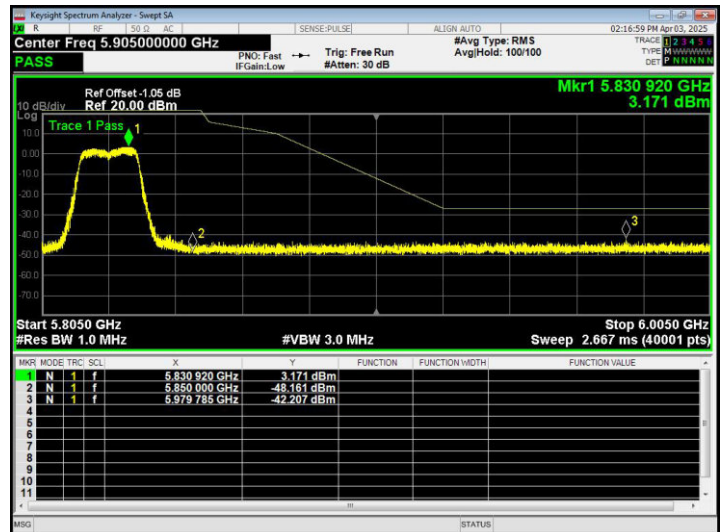




(802.11n40) Band Edge, Left Side

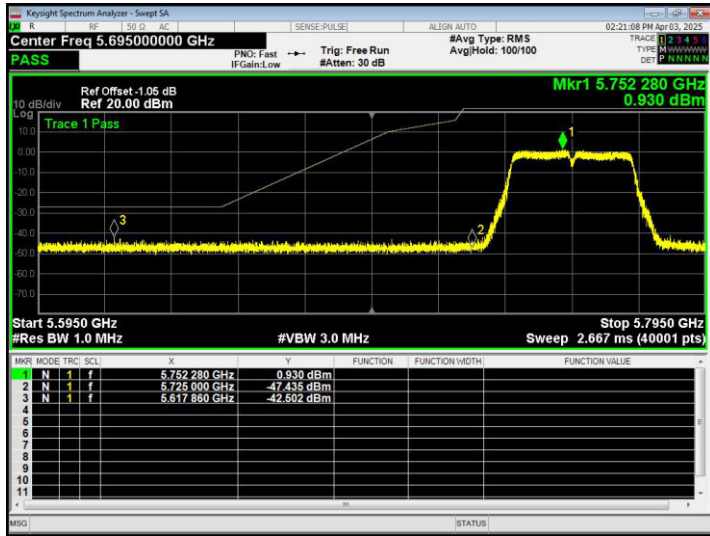

(802.11n40) Band Edge, Right Side

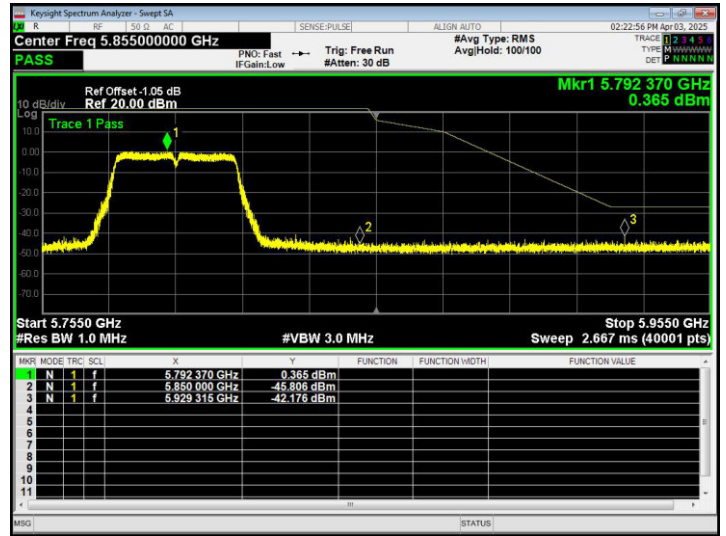



9. SPURIOUS RF CONDUCTED EMISSIONS


9.1 CONFORMANCE LIMIT

Frequency Band (MHz)	Limit
5150 - 5250	Outside of the 5.15-5.35 GHz band: e.i.r.p. -27 dBm
5250 - 5350	Outside of the 5.15-5.35 GHz band: e.i.r.p. -27 dBm
5470 - 5725	Outside of the 5.47-5.725 GHz band: e.i.r.p. -27 dBm
5725 - 5850	All emissions shall be limited to a level of -27 dBm/MHz at 75 MHz or more above or below the band edge increasing linearly to 10 dBm/MHz at 25 MHz above or below the band edge, and from 25 MHz above or below the band edge increasing linearly to a level of 15.6 dBm/MHz at 5 MHz above or below the band edge, and from 5 MHz above or below the band edge increasing linearly to a level of 27 dBm/MHz at the band edge.

9.2 MEASURING INSTRUMENTS

The Measuring equipment is listed in the section 3.5 of this test report.

9.3 TEST SETUP

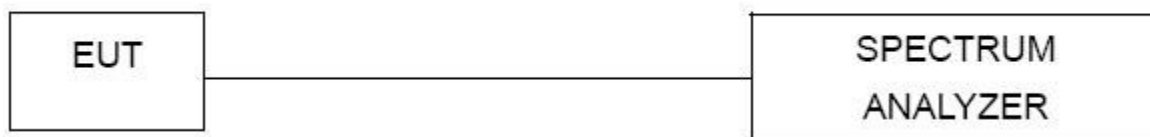

9.4 TEST PROCEDURE

The Spurious RF conducted emissions compliance of RF radiated emission should be measured by following the guidance in ANSI C63.10-2013 with respect to maximizing the emission by rotating the EUT, measuring the emission while the EUT is situated in three orthogonal planes (if appropriate), adjusting the measurement antenna height and polarization etc. Set RBW=1MHz and VBW= 3MHz to measure the peak field strength, and measure frequency range from 30MHz to 26.5GHz.


9.5 TEST RESULTS

Temperature :	26 °C	Relative Humidity :	54%
Pressure :	1012 hPa	Test Voltage :	DC 5V
Test band :	5.8G		
Remark: The measurement frequency range is from 30MHz to the 10th harmonic of the fundamental frequency. And above 26.5GHz of spurious emissions which are attenuated by more than 20dB below the permissible value has no need to be reported. The lowest, middle and highest channels are tested to verify the spurious emissions and band edge measurement data.			




5.8G - 802.11a


CH149

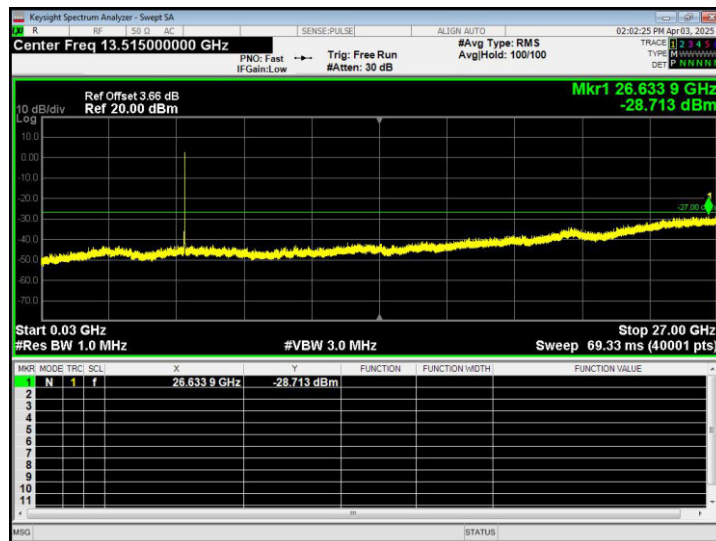

CH157

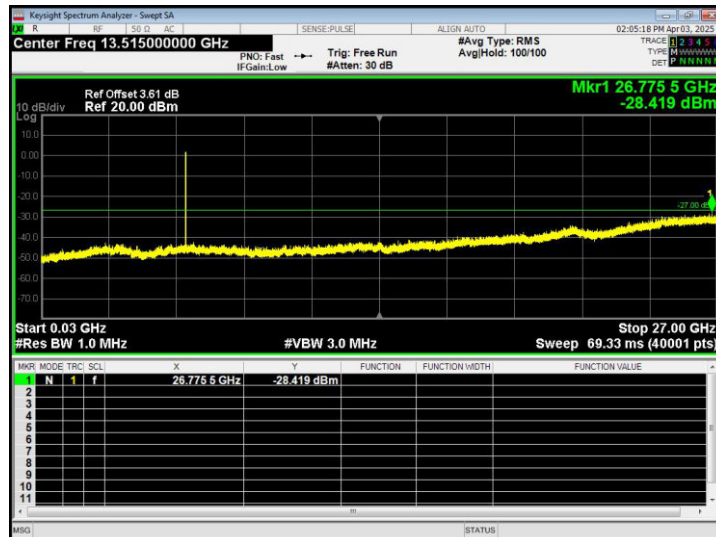


CH165

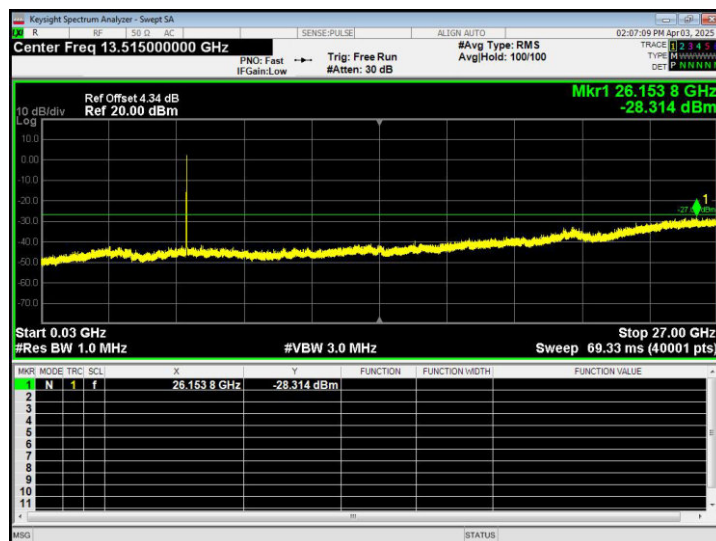





5.8G - 802.11n20
CH149

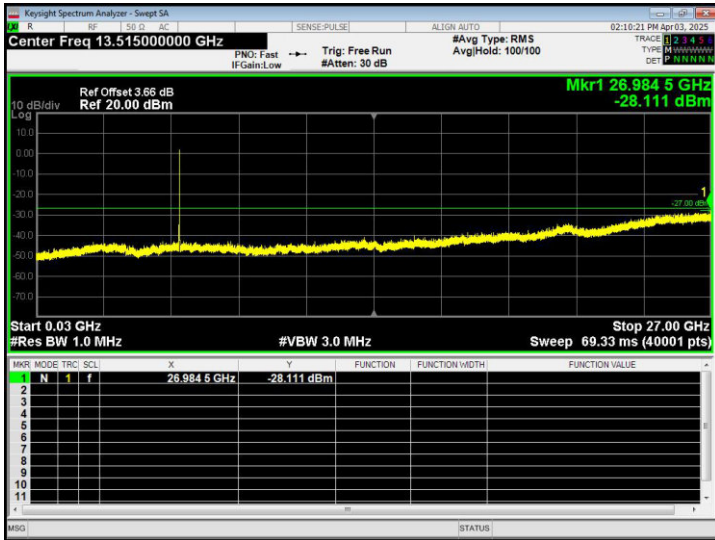


5.8G - 802.11n40
CH151

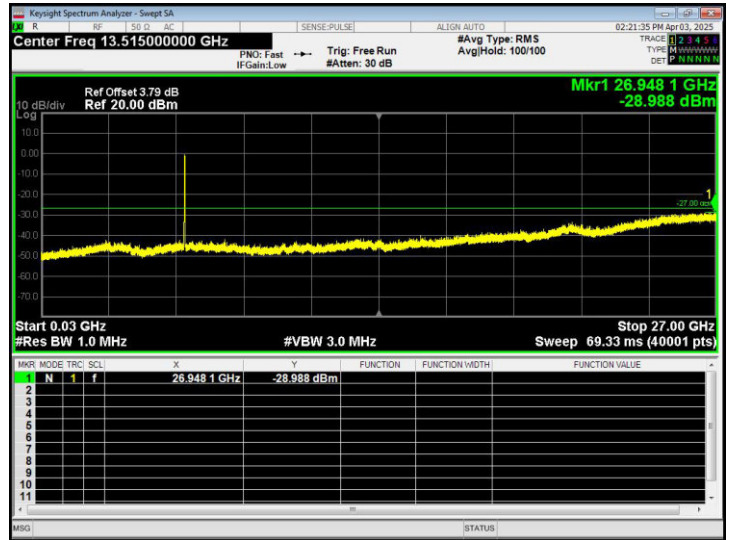


CH157

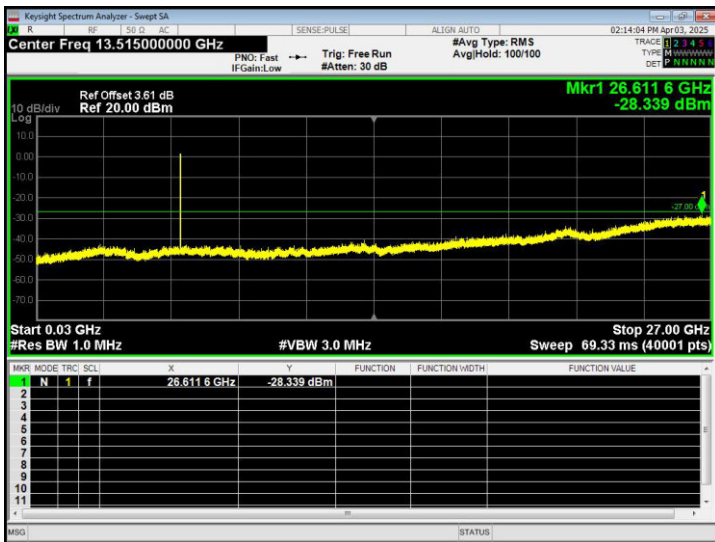

CH159

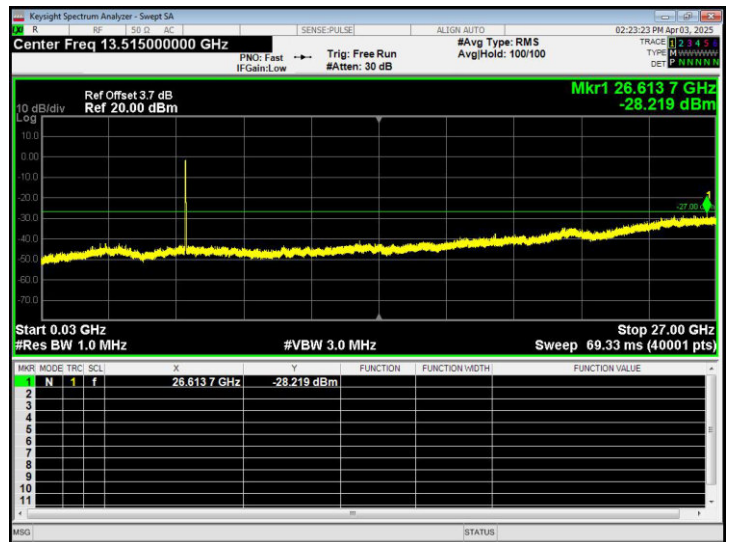

CH165

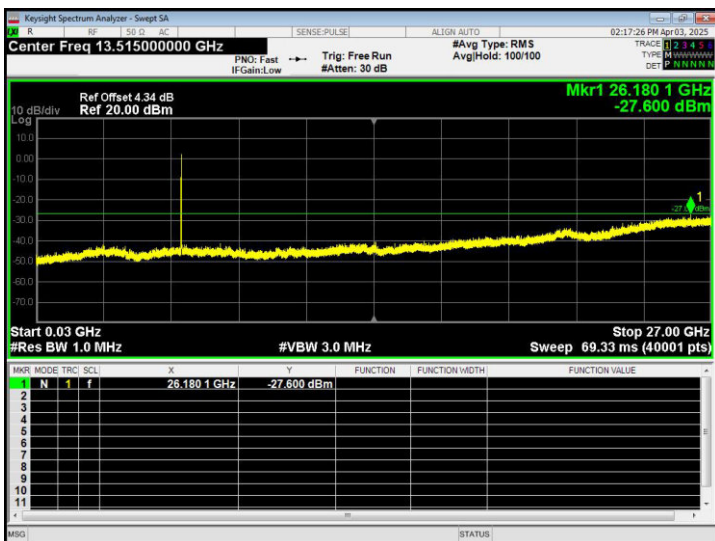



10. FREQUENCY STABILITY MEASUREMENT

10.1 LIMIT

Manufactures of U-NII devices are responsible for ensuring frequency stability such that an emission is maintained within the band of operation under all conditions of normal operation as specified in the user's manual.

The transmitter center frequency tolerance shall be ± 20 ppm maximum for the 5 GHz band (IEEE 802.11n specification).

10.2 TEST PROCEDURES

1. The transmitter output (antenna port) was connected to the spectrum analyzer.
2. EUT have transmitted absence of modulation signal and fixed channelize.
3. Set the spectrum analyzer span to view the entire absence of modulation emissions bandwidth.
4. Set RBW = 10 kHz, VBW = 10 kHz with peak detector and maxhold settings.
5. f_c is declaring of channel frequency. Then the frequency error formula is $(f_c - f)/f_c \times 10^6$ ppm and the limit is less than ± 20 ppm (IEEE 802.11n specification).
6. The test extreme voltage is to change the primary supply voltage from 85 to 115 percent of the nominal value
7. Extreme temperature is $-20^\circ\text{C} \sim 70^\circ\text{C}$.

10.3 TEST SETUP LAYOUT



10.4 EUT OPERATION DURING TEST

The EUT tested system was configured as the statements of chapter 3, Unless otherwise a special operating condition is specified in the follows during the testing.



10.5 TEST RESULTS

Temperature :	26 °C	Relative Humidity :	54%
Pressure :	1012 hPa	Test Voltage :	DC 5V
Note: Note: All channels have been tested, and only the worst test data is recorded in this report.			

Reference Frequency: 802.11a - 5745MHz			
Environment Temperature (°C)	Power Supplied (VDC)	Frequency Measure with Time Elapsed	
		Measured Frequency (MHz)	Deviation (ppm)
70	5	5744.962	-6.553
60	5	5744.970	-5.184
50	5	5744.961	-6.751
40	5	5744.978	-3.759
30	5	5744.965	-6.130
25	5	5744.979	-3.581
10	5	5744.970	-5.256
0	5	5744.980	-3.539
-10	5	5744.964	-6.225
-20	5	5744.967	-5.683

Reference Frequency: 802.11n20 - 5745MHz			
Environment Temperature (°C)	Power Supplied (VDC)	Frequency Measure with Time Elapsed	
		Measured Frequency (MHz)	Deviation (ppm)
70	5	5744.969	-5.469
60	5	5744.969	-5.480
50	5	5744.978	-3.746
40	5	5744.955	-7.768
30	5	5744.972	-4.903
25	5	5744.971	-5.078
10	5	5744.973	-4.749
0	5	5744.978	-3.849
-10	5	5744.962	-6.674
-20	5	5744.972	-4.959



Reference Frequency: 802.11n40 - 5755MHz			
Environment Temperature (°C)	Power Supplied (VDC)	Frequency Measure with Time Elapsed	
		Measured Frequency (MHz)	Deviation (ppm)
70	5	5744.960	-6.888
60	5	5744.969	-5.418
50	5	5754.978	-3.880
40	5	5754.953	-8.091
30	5	5754.973	-4.698
25	5	5754.960	-6.892
10	5	5754.968	-5.480
0	5	5754.950	-8.658
-10	5	5754.977	-4.049
-20	5	5754.968	-5.482



11. DUTY CYCLE

11.1 APPLIED PROCEDURES / LIMIT


Measurements of duty cycle and transmission duration shall be performed using one of the following techniques:

- a) A diode detector and an oscilloscope that together have a sufficiently short response time to permit accurate measurements of the ON and OFF times of the transmitted signal.
- b) The zero-span mode on a spectrum analyzer or EMI receiver if the response time and spacing between bins on the sweep are sufficient to permit accurate measurements of the ON and OFF times of the transmitted signal:
 - 1) Set the center frequency of the instrument to the center frequency of the transmission.
 - 2) Set $RBW \geq OBW$ if possible; otherwise, set RBW to the largest available value.
 - 3) Set $VBW \geq RBW$. Set detector = peak or average.
 - 4) The zero-span measurement method shall not be used unless both RBW and VBW are $> 50/T$ and the number of sweep points across duration T exceeds 100. (For example, if VBW and/or RBW are limited to 3 MHz, then the zero-span method of measuring the duty cycle shall not be used if $T \leq 16.7 \mu s$.)

11.2 DEVIATION FROM STANDARD

No deviation.

11.3 TEST SETUP

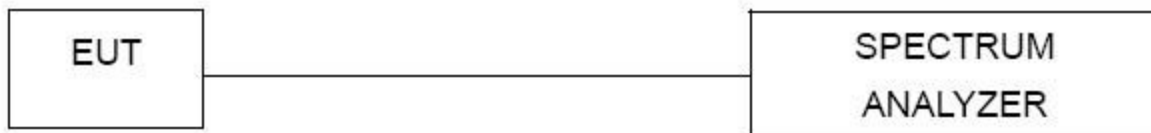

11.4 EUT OPERATION CONDITIONS

The EUT tested system was configured as the statements of chapter 3, Unless otherwise a special operating condition is specified in the follows during the testing.




11.5 TEST RESULTS

Temperature :	26 °C	Relative Humidity :	54%
Pressure :	1012 hPa	Test Voltage :	DC 5V
Note: All channels have been tested, and only the worst test data is recorded in this report.			


Test Mode	Frequency (MHz)	Duty Cycle (%)	Factor (dB)	Result
802.11a	5745	100	0	Pass
802.11n20	5745	100	0	Pass
802.11n40	5755	100	0	Pass
Note: Duty Cycle= Ton /Total*100% Duty Cycle Correction Factor = 10log (1/Duty Cycle)				




802.11a - 5745MHz

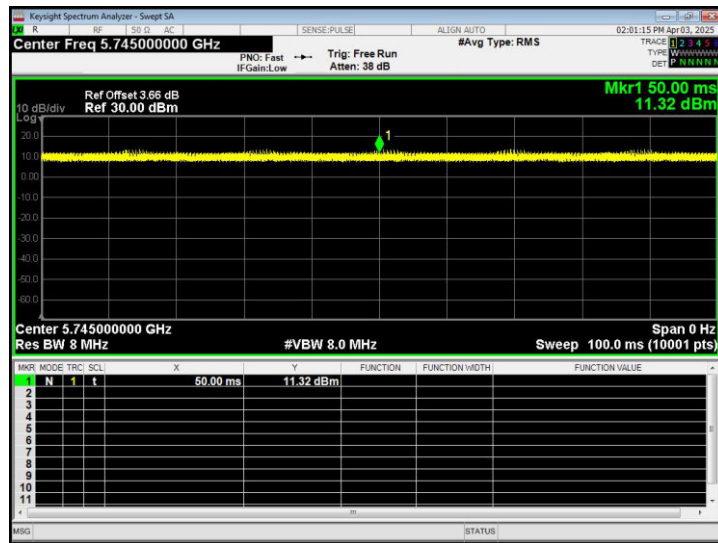

802.11n20 - 5745MHz

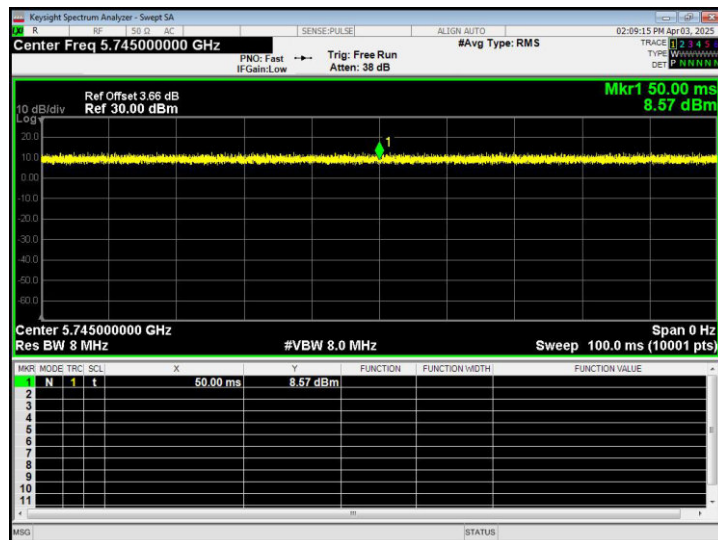

802.11n40 - 5755MHz

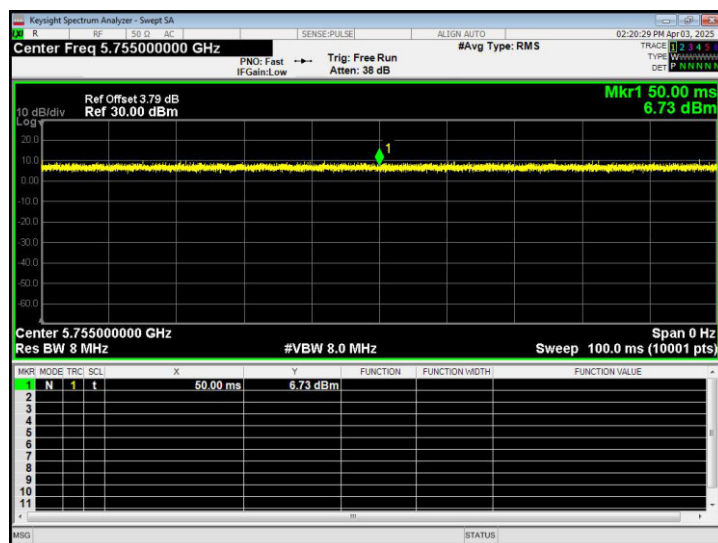

Note: All channel have been tested, and the report only reflects the worst case data.



12. ANTENNA REQUIREMENT

Standard requirement:	FCC Part15 C Section 15.203
15.203 requirement: An intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator, the manufacturer may design the unit so that a broken antenna can be replaced by the user, but the use of a standard antenna jack or electrical connector is prohibited.	
EUT Antenna:	
The antenna is PCB Antenna, the best case gain of the antenna is -1.05dBi, reference to the appendix II for details	



13. TEST SETUP PHOTO

Reference to the appendix I for details.

14. EUT CONSTRUCTIONAL DETAILS

Reference to the appendix II for details.

******* END OF REPORT *******