



## TEST REPORT nr. R15131101

### Federal Communication Commission (FCC)

#### Test item

Description.....: WITTY GATE  
Trademark.....: MICROGATE  
Model/Type .....: WIT002  
FCC ID.....: 2ADEOWIT002

#### Test Specification

Standard .....: FCC Rules & Regulations, Title 47:2014  
Part 15 paragraph(s): 203, 204, 207, 209 and 231

**Client's name** .....: MICROGATE S.r.l.

Address .....: Via Stradivari, 4 – 39100 Bolzano (BZ) – ITALY

**Manufacturer's name** : Same as client

Address .....: --

#### Report

Tested by .....: A. Bertezolo – Technician

Approved by .....: R. Beghetto – Laboratory Manager

Date of issue .....: 16.02.16

Contents.....: 44 pages

This test report shall not be reproduced except in full without the written approval of CMC.  
The test results presented in this report relate only to the item tested.



## Index

|                                                        |           |
|--------------------------------------------------------|-----------|
| <b>1. SUMMARY</b>                                      | <b>3</b>  |
| <b>2. DESCRIPTION OF EQUIPMENT UNDER TEST (EUT)</b>    | <b>4</b>  |
| 2.1 TEST SITE                                          | 4         |
| <b>3. TESTING AND SAMPLING</b>                         | <b>4</b>  |
| <b>4. OPERATIVE CONDITIONS</b>                         | <b>4</b>  |
| <b>5. PHOTOGRAPH(S) OF EUT</b>                         | <b>5</b>  |
| 5.1 PHOTOGRAPH(S) OF EUT                               | 5         |
| <b>6. EQUIPMENT LIST</b>                               | <b>6</b>  |
| <b>7. MEASUREMENT UNCERTAINTY</b>                      | <b>7</b>  |
| <b>8. REFERENCE DOCUMENTS</b>                          | <b>8</b>  |
| <b>9. DEVIATION FROM TEST SPECIFICATION</b>            | <b>9</b>  |
| <b>10. TEST CASE VERDICTS</b>                          | <b>9</b>  |
| <b>11. RESULTS</b>                                     | <b>10</b> |
| 11.1 ANTENNA REQUIREMENTS                              | 11        |
| 11.2 RADIATED EMISSIONS                                | 12        |
| 11.3 FUNDAMENTAL AND SPURIOUS EMISSION ( $\leq 1$ GHz) | 29        |
| 11.4 SPURIOUS EMISSION ( $> 1$ GHz)                    | 33        |
| 11.5 OCCUPIED CHANNEL BANDWIDTH                        | 37        |
| 11.6 PERIODIC OPERATION CHARACTERISTICS                | 41        |



## 1. Summary

Standard:

FCC Rules & Regulations, Title 47:2014  
Part 15 paragraph(s): 203, 204, 207, 209 and 231

| Test specifications       | Environmental Phenomena                            | Tests sequence | Result   |
|---------------------------|----------------------------------------------------|----------------|----------|
| Part 15.203               | Antenna requirements                               | 1              | Complies |
| Part 15.207               | Conducted emissions                                | --             | N.A. (+) |
| Part 15.209               | Radiated emissions                                 | 2              | Complies |
| Part 15.209 and 15.231(a) | Fundamental and spurious emissions ( $\leq 1$ GHz) | 3              | Complies |
| Part 15.209 and 15.231    | Spurious emissions ( $> 1$ GHz)                    | 4              | Complies |
| Part 15.231(c)            | Occupied channel bandwidth                         | 5              | Complies |
| Part 15.231(a)            | Periodic operation characteristics                 | 6              | Complies |

(+) Devices which only employ battery power. See FCC Part 15.207 (c)

The Test Report was given to the Client representatives for necessary documentation of ratification of the tested equipment and it is valid for the FCC certification



**LAB N° 0168**

Power supply ..... : 3,7 Vdc from battery

Serial Number..... : --

Type of equipment ..... : ☒ Transmitter Unit  
                                      ☒ Receiver Unit

Type of station ..... : ☐ Fixed station  
                                      ☒ Portable station  
                                      ☐ Mobile station

Nominal frequency..... : 434,01 MHz

Company..... : CMC Centro Misure Compatibilità S.r.l.  
Address ..... : Via dell'Elettronica, 12/C  
36016 Thiene (VI) – ITALY  
Test site facility's FCC registration number ..... : 271947

Date of receipt of test item ..... : 12.05.15

Testing start date ..... : 27.08.15

Testing end date ..... : 22.10.15

Samples tested nr..... : 1

Sampling procedure. .... : Equipment used for testing was picked up by the manufacturer, at the end of the production process with random criterion

Internal identification ..... : adhesive label with the product number P150533

EUT exercising ..... : EUT in continuous transmission at maximum power



## 5. Photograph(s) of EUT

### 5.1 Photograph(s) of EUT





## 6. Equipment list

| <i>Id. number</i> | <i>Manufacturer</i> | <i>Model</i> | <i>Description</i>        | <i>Serial number</i> | <i>Last calibration</i> | <i>Due date calibration</i> |
|-------------------|---------------------|--------------|---------------------------|----------------------|-------------------------|-----------------------------|
| CMC S010          | Rohde & Schwarz     | ESH3-Z2      | Impulses Limiting Device  | ---                  | January '15             | January '16                 |
| CMC S108          | EMCO                | 3115         | Horn Antenna              | 9811-5622            | May '13                 | May '16                     |
| CMC S127          | Schaffner           | HLA6120      | Loop Antenna              | 1191                 | January '13             | January '16                 |
| CMC S129          | Rohde & Schwarz     | ESPI7        | Receiver                  | 836.914/004          | January '15             | January '16                 |
| CMC S136          | Schwarzbeck         | VULB 9163    | Broadband Antenna         | 9136-205             | May '13                 | May '16                     |
| CMC S164          | Rohde & Schwarz     | ESU26        | EMC interference receiver | 100052               | January '15             | January '16                 |
| CMC S200          | Schwarzbeck         | NSLK 8128    | V-LISN                    | 8128-273             | January '15             | January '16                 |
| CMC S227          | Rohde & Schwarz     | ESR7         | EMI Test Receiver 7GHz    | 101121               | January '15             | January '16                 |



## 7. Measurement uncertainty

| Test                                                                | Expanded Uncertainty | note |
|---------------------------------------------------------------------|----------------------|------|
| <b>Conducted Emission</b>                                           |                      |      |
| (50Ω/50μH AMN) - (9 kHz – 150 kHz)                                  | ±3.6 dB              | 1    |
| (50Ω/50μH AMN) - (150 kHz – 30 MHz)                                 | ±3.0 dB              | 1    |
| (Voltage probe) - (150 kHz – 30 MHz)                                | ±2.8 dB              | 1    |
| (50Ω/5μH AMN) - (150 kHz – 108 MHz)                                 | ±2.6 dB              | 1    |
| <b>Discontinuous Conducted Emission</b>                             |                      |      |
| Conducted Emission (50Ω/50μH AMN) - (150 kHz – 30 MHz)              | ±3.0 dB              | 1    |
| <b>Disturbance Power (30 MHz – 300 MHz)</b>                         |                      |      |
|                                                                     | ±3.7 dB              | 1    |
| <b>Radiated Emission</b>                                            |                      |      |
| (0,150 MHz – 30 MHz)                                                | ±4.0 dB              | 1    |
| (30 MHz – 1000 MHz)                                                 | ±4.3 dB              | 1    |
| (1 GHz – 6 GHz)                                                     | ±4.5 dB              | 1    |
| <b>Electromagnetic field EMF</b>                                    |                      |      |
|                                                                     | ±10.5 %              | 1    |
| <b>Harmonic current emissions test</b>                              |                      |      |
|                                                                     | ±1.8 %               | 1    |
| <b>Voltage fluctuation and flicker test</b>                         |                      |      |
|                                                                     | ±2.6 %               | 1    |
| <b>Insertion loss test</b>                                          |                      |      |
|                                                                     | ±2.0 dB              | 1    |
| <b>Radiated electromagnetic disturbance test (loop antenna)</b>     |                      |      |
|                                                                     | ±2.1 dB              | 1    |
| <b>Radiated electromagnetic field immunity test</b>                 |                      |      |
|                                                                     | 0.81 V/m at 3V/m     | 1    |
| <b>Pulse modulated radiated electromagnetic field immunity test</b> |                      |      |
|                                                                     | 0.81 V/m at 3V/m     | 1    |
| <b>Injected currents immunity test</b>                              |                      |      |
|                                                                     | 0.45 V at 3V         | 1    |
| <b>Bulk current</b>                                                 |                      |      |
|                                                                     | 3.7 mA at 60 mA      | 1    |
| <b>Power frequency magnetic field immunity test</b>                 |                      |      |
|                                                                     | 0.1 A/m at 10 A/m    | 1    |
| <b>Effective radiated power (F &lt; 1GHz)</b>                       |                      |      |
|                                                                     | ±4.3 dB              | 1    |
| <b>Effective radiated power (F &gt; 1GHz)</b>                       |                      |      |
|                                                                     | ±3.7 dB              | 1    |
| <b>Frequency error</b>                                              |                      |      |
|                                                                     | < 1x10 <sup>-7</sup> | 1    |
| <b>Modulation bandwidth</b>                                         |                      |      |
|                                                                     | < 1x10 <sup>-7</sup> | 1    |
| <b>Conducted RF power and spurious emission</b>                     |                      |      |
|                                                                     | ±0.7 dB              | 1    |
| <b>Adjacent channel power</b>                                       |                      |      |
|                                                                     | ±1.2 dB              | 1    |
| <b>Blocking</b>                                                     |                      |      |
|                                                                     | ±1.2 dB              | 1    |
| <b>Electrostatic discharge immunity test</b>                        |                      |      |
|                                                                     |                      | 2    |
| <b>Electrical fast transients / burst immunity test</b>             |                      |      |
|                                                                     |                      | 2    |
| <b>Surge immunity test</b>                                          |                      |      |
|                                                                     |                      | 2    |
| <b>Pulse magnetic field immunity test</b>                           |                      |      |
|                                                                     |                      | 2    |
| <b>Damped oscillatory magnetic field immunity test</b>              |                      |      |
|                                                                     |                      | 2    |
| <b>Short interruption immunity test</b>                             |                      |      |
|                                                                     |                      | 2    |
| <b>Voltage transient emission test</b>                              |                      |      |
|                                                                     | ±2.2 %               | 1    |
| <b>Transient immunity test</b>                                      |                      |      |
|                                                                     |                      | 2    |

### Notes

#### Note 1:

The expanded uncertainty reported according to EN55016-4-2:2011 is based on a standard uncertainty multiplied by a coverage factor of k=2, providing a level of confidence of p = 95%

#### Note 2:

It has been demonstrated that the used test equipment meets the specified requirements in the standard with at least a 95% confidence, covering factor k = 2.



## 8. Reference documents

| Reference no.                                      | Description                                                                                                                                                      |
|----------------------------------------------------|------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| FCC Rules and Regulation Title 47 part 15:2014     | --                                                                                                                                                               |
| ANSI C63.4:2009                                    | American National Standard for Methods of Measuring of Radio-Noise Emissions from Low-Voltage Electrical and Electronic Equipment in the Range of 9 kHz – 40 GHz |
| ANSI C63.10:2013                                   | American National Standard of Procedures for Compliance Testing of Unlicensed Wireless Devices                                                                   |
| Internal Procedure PM001 rev. 2.0 (Quality Manual) | Measure Procedure                                                                                                                                                |
| Internal procedure INC_M rev. 8.2 (Quality Manual) | Measurement uncertainty calculation                                                                                                                              |



## 9. Deviation from test specification

In agreement with the client, emission tests were performed with peak detector.

At the frequencies where the measures exceed the limit or within 6 dB from it, the test was repeated with quasi-peak detector and/or average detector.

## 10. Test case verdicts

Test case does not apply to the test object..... : N.A.

Test item does meet the requirement..... : Complies

Test item does not meet the requirement..... : Does not comply

Test not performed ..... : N.E.







## 11. Results

In this clause tests results are reported.

Measurement uncertainty is in accordance with document CMC INC\_M rev. 8.2.

*Judgement of compliance:*

| Case 1                                                                                                            | Case 2                                                                                                                                                   | Case 3                                                                                                                                               | Case 4                                                                                                             |
|-------------------------------------------------------------------------------------------------------------------|----------------------------------------------------------------------------------------------------------------------------------------------------------|------------------------------------------------------------------------------------------------------------------------------------------------------|--------------------------------------------------------------------------------------------------------------------|
|                                  |                                                                         |                                                                    |                                 |
| The sample complies with the requirement.                                                                         | The sample complies with the requirement.                                                                                                                | The sample does not comply with the requirement.                                                                                                     | The sample does not comply with the requirement.                                                                   |
| The measurement results is within the specification limit when the measurement uncertainty is taken into account. | It is not possible to state compliance using a 95% coverage probability for the expanded uncertainty although the measurement result is below the limit. | It is not possible to state compliance using a 95% coverage probability for the expanded uncertainty also the measurement result is upper the limit. | The measurement results is outside the specification limit when the measurement uncertainty is taken into account. |

In agreement with ILAC-G8: 03/2009 Guidelines on the Reporting of Compliance with Specification.



## 11.1 Antenna requirements

### Test set-up and execution

- FCC Rules and Regulation; Titles 47 Part 15.203 and 15.204
- Internal procedure PM001
- See clause 4 of this test report

### Test configuration and test method

Test site:  
Laboratory

Auxiliary equipment:  
See clause 4 of this test report

### EUT exercising

See clause 4 of this test report

### Test equipment used

--  
Measurement uncertainty: See clause 7 of this test report

### Test specification

An intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device.  
The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the provisions of this section. The manufacturer may design the unit so that a broken antenna can be replaced by the user, but the use of a standard antenna jack or electrical connector is prohibited. This requirement does not apply to carrier current devices or to devices operated under the provisions of § 15.211, § 15.213, § 15.217, § 15.219, or § 15.221. Further, this requirement does not apply to intentional radiators that must be professionally installed, such as perimeter protection systems and some field disturbance sensors, or to other intentional radiators which, in accordance with § 15.31(d), must be measured at the installation site. However, the installer shall be responsible for ensuring that the proper antenna is employed so that the limits in this part are not exceeded

### Environmental conditions

| Temperature<br>(°C) | Atmospheric pressure<br>(kPa) | Relative humidity<br>(%) |
|---------------------|-------------------------------|--------------------------|
| 22                  | 101                           | 45                       |

### Result

| Antenna Type     | External R.F. power<br>amplifier | Remarks | Results  |
|------------------|----------------------------------|---------|----------|
| Integral antenna | Not Present                      | --      | Complies |

**Result:** The requirements are met



## 11.2 Radiated emissions

### Test set-up and execution

- FCC Rules and Regulation; Titles 47 Part. 15.209
- Internal procedure PM001
- See clause 4 of this test report

### Test configuration and test method

Test site:  
Semi-anechoic chamber

Auxiliary equipment:  
See clause 4 of this test report

### EUT exercising

See clause 4 of this test report

### Test equipment used

CMC S108, CMC S127, CMC S136, CMC S164  
Measurement uncertainty: See clause 7 of this test report

### Test specification

Port: Enclosure  
Frequency range: 0,009 MHz – 1000 MHz  
Antenna polarization: Horizontal (H) – Vertical (V)  
EUT – Antenna distance: 3 m

### Environmental conditions


| Temperature<br>(°C) | Atmospheric pressure<br>(kPa) | Relative humidity<br>(%) |
|---------------------|-------------------------------|--------------------------|
| 22                  | 100                           | 45                       |

### Acceptance limits

| Frequency range<br>(MHz) | Limits<br>[dB(μV/m)] |
|--------------------------|----------------------|
| 0,009 to 0,490           | 128,51 to 93,80      |
| 0,490 to 1,705           | 73,80 to 62,97       |
| 1,705 to 30              | 69,54                |
| 30 to 88                 | 40                   |
| 88 to 216                | 43,52                |
| 216 to 960               | 46,02                |
| Above 960                | 53,98                |

**Remarks:** The emission limits shown in the above table are based on measurements employing a CISPR quasi-peak detector except for the frequency bands 9–90 kHz, 110–490 kHz and above 1000 MHz. Radiated emission limits in these three bands are based on measurements employing an average detector.

## Setup

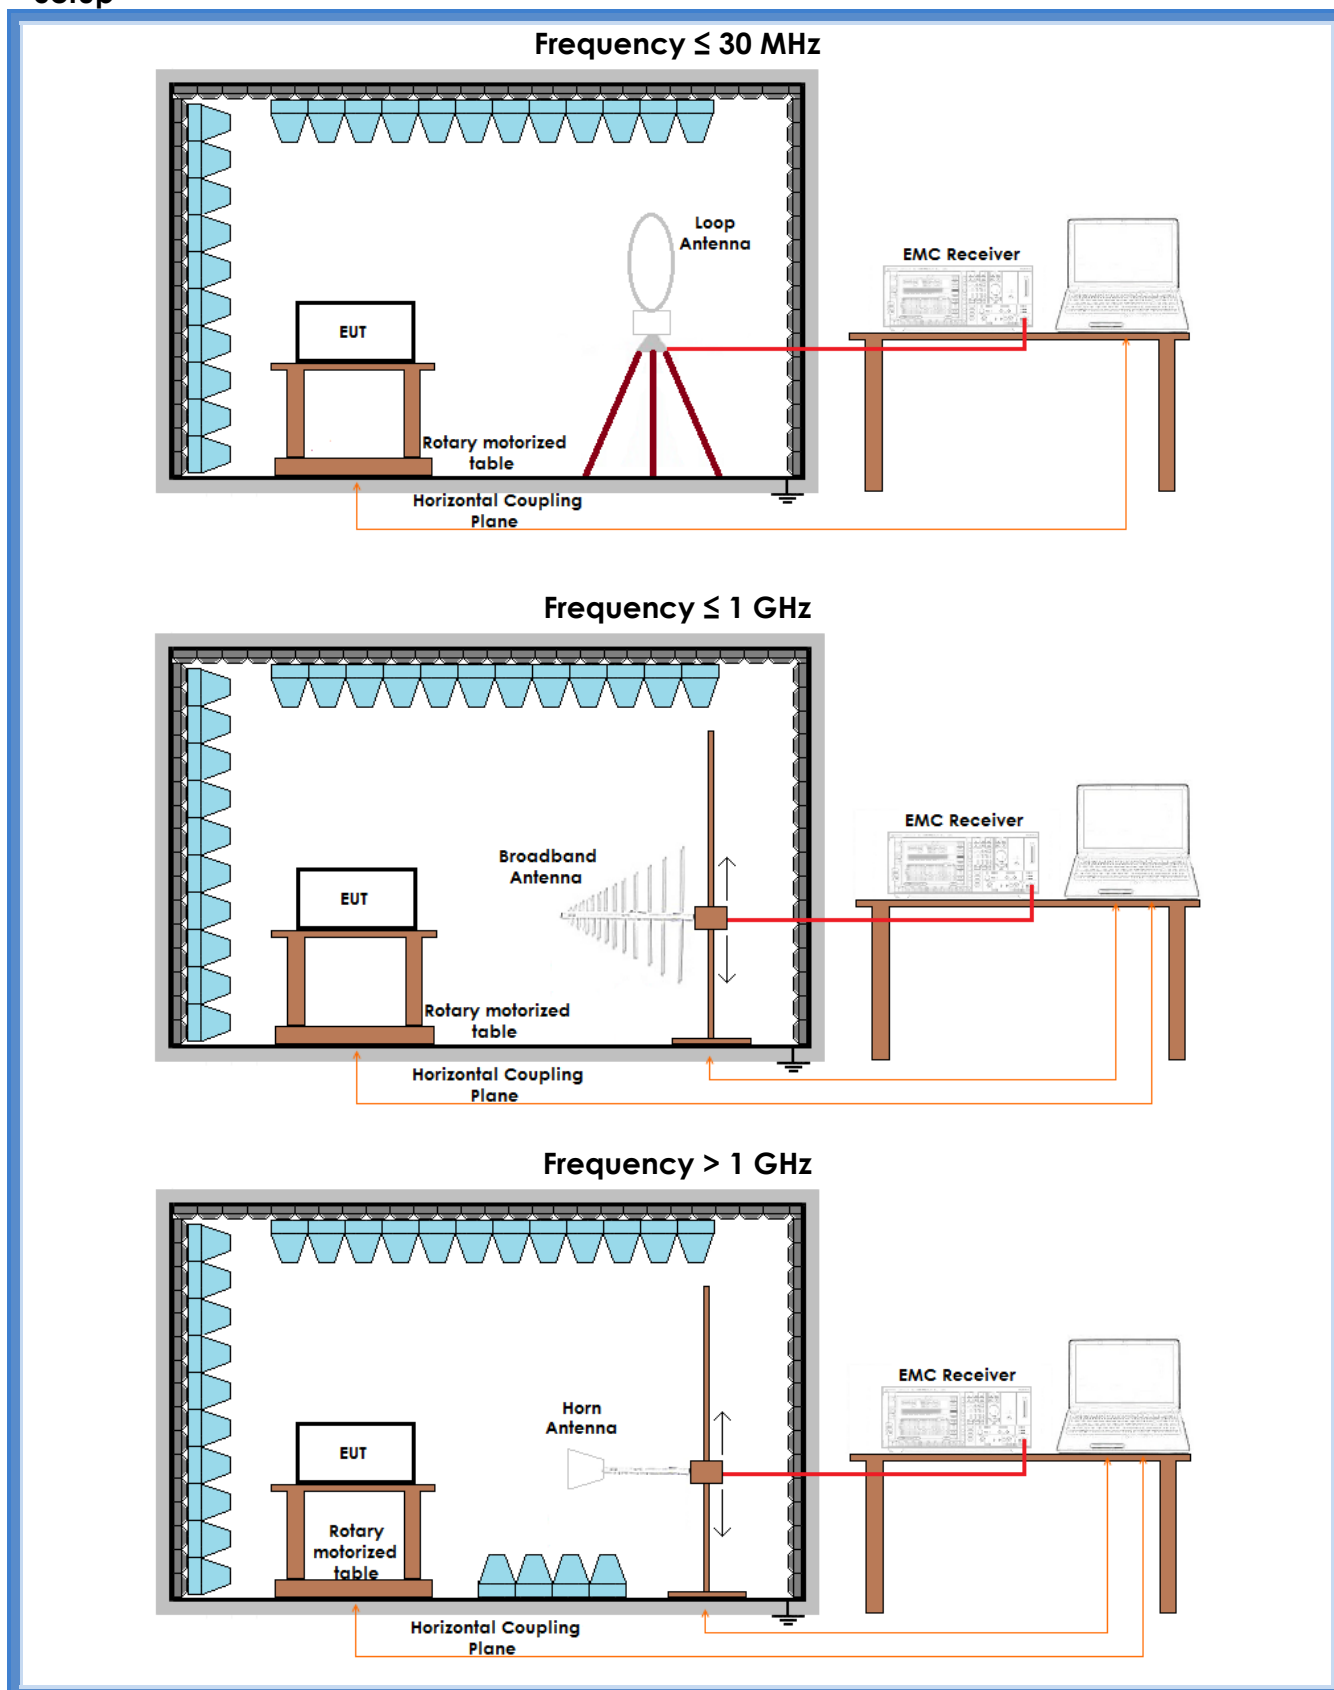



## Result

| Polarization | Frequency Range (MHz) | Graphs    | Remarks                | Result   |
|--------------|-----------------------|-----------|------------------------|----------|
| Loop         | 0,009 – 30            | G15131111 | CH 1 (lowest channel)  | Complies |
| H            | 30 – 1000             | G15131104 | CH 1 (lowest channel)  | Complies |
| V            | 30 – 1000             | G15131105 | CH 1 (lowest channel)  | Complies |
| H            | 1000 – 6000           | G15131112 | CH 1 (lowest channel)  | Complies |
| V            | 1000 – 6000           | G15131113 | CH 1 (lowest channel)  | Complies |
| Loop         | 0,009 – 30            | G15131110 | CH 8 (highest channel) | Complies |
| H            | 30 – 1000             | G15131108 | CH 8 (highest channel) | Complies |
| V            | 30 – 1000             | G15131109 | CH 8 (highest channel) | Complies |
| H            | 1000 – 6000           | G15131114 | CH 8 (highest channel) | Complies |
| V            | 1000 – 6000           | G15131115 | CH 8 (highest channel) | Complies |
| Remarks: --  |                       |           |                        |          |

### Graphs Legend


PK: Peak; QP [1s] (quasi-peak at 1 second) values are marked with a +  
AV: Average; AV [1s] (average at 1 second) values are marked with a x



## Graphs

G15131104

Meas Type Emission  
Equipment under Test  
Manufacturer  
OP Condition  
Operator Bertezolo 15131104  
Test Spec

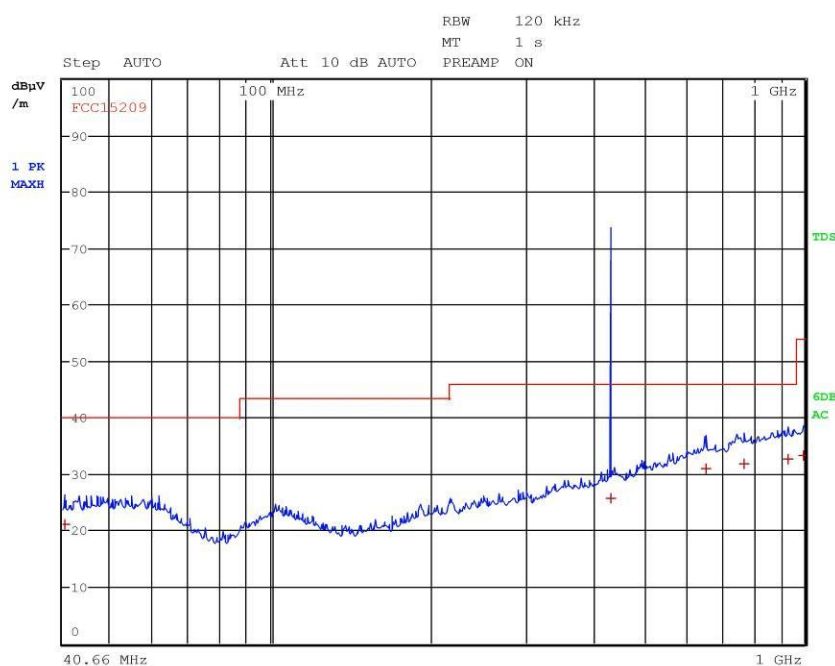

## Final Measurement


Meas Time: 1 s  
Margin: 20 dB  
Peaks: 6

| Trace | Frequency         | Level (dB $\mu$ V/m) | Detector   | Delta Limit/dB |
|-------|-------------------|----------------------|------------|----------------|
| 1     | 40.980000000 MHz  | 21.20                | Quasi Peak | -18.80         |
| 1     | 434.000000000 MHz | 25.65                | Quasi Peak | -20.37         |
| 1     | 653.500000000 MHz | 30.96                | Quasi Peak | -15.06         |
| 1     | 768.140000000 MHz | 31.80                | Quasi Peak | -14.22         |
| 1     | 930.540000000 MHz | 32.75                | Quasi Peak | -13.27         |
| 1     | 993.780000000 MHz | 33.37                | Quasi Peak | -20.61         |



G15131105

Meas Type Emission  
Equipment under Test  
Manufacturer  
OP Condition  
Operator Bertezolo 15131105  
Test Spec

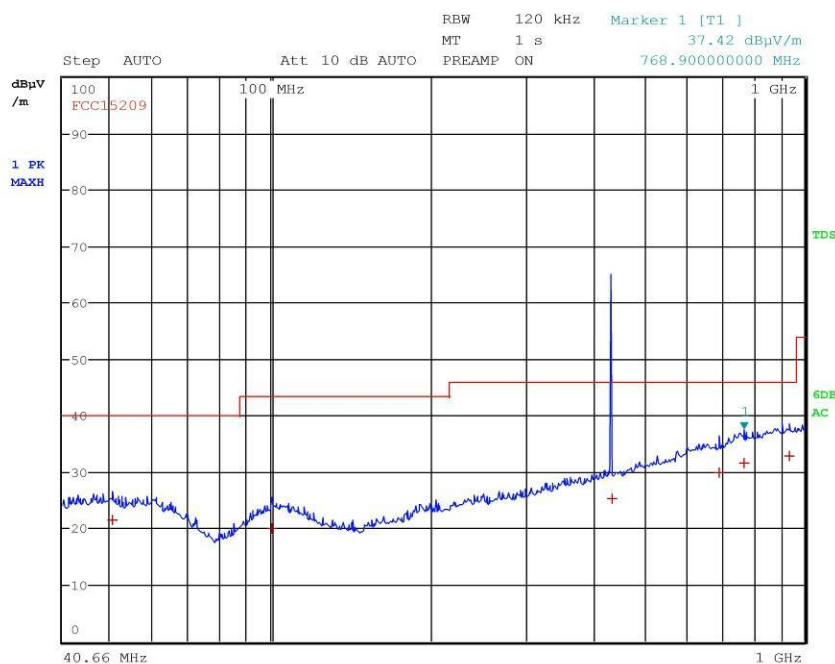

### Final Measurement


Meas Time: 1 s  
Margin: 30 dB  
Peaks: 6

| Trace | Frequency         | Level (dBμV/m) | Detector   | Delta Limit/dB |
|-------|-------------------|----------------|------------|----------------|
| 1     | 50.380000000 MHz  | 21.45          | Quasi Peak | -18.55         |
| 1     | 100.540000000 MHz | 20.00          | Quasi Peak | -23.52         |
| 1     | 434.000000000 MHz | 25.26          | Quasi Peak | -20.76         |
| 1     | 689.580000000 MHz | 29.85          | Quasi Peak | -16.17         |
| 1     | 768.900000000 MHz | 31.69          | Quasi Peak | -14.33         |
| 1     | 934.820000000 MHz | 32.78          | Quasi Peak | -13.24         |



G15131108

Meas Type Emission  
Equipment under Test  
Manufacturer  
OP Condition  
Operator Bertezolo 15131108  
Test Spec

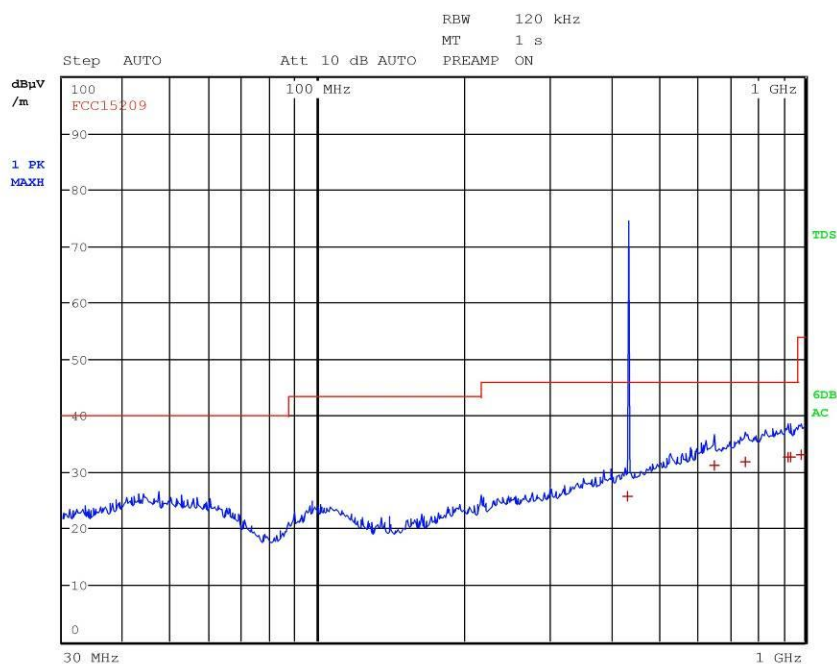

### Final Measurement


Meas Time: 1 s  
Margin: 30 dB  
Peaks: 6

| Trace | Frequency         | Level (dB $\mu$ V/m) | Detector   | Delta Limit/dB |
|-------|-------------------|----------------------|------------|----------------|
| 1     | 433.000000000 MHz | 25.71                | Quasi Peak | -20.31         |
| 1     | 652.760000000 MHz | 31.25                | Quasi Peak | -14.77         |
| 1     | 753.320000000 MHz | 31.91                | Quasi Peak | -14.11         |
| 1     | 924.200000000 MHz | 32.75                | Quasi Peak | -13.27         |
| 1     | 935.320000000 MHz | 32.72                | Quasi Peak | -13.30         |
| 1     | 981.040000000 MHz | 33.13                | Quasi Peak | -20.85         |



G15131109

Meas Type Emission  
Equipment under Test  
Manufacturer  
OP Condition  
Operator Bertezolo 15131109  
Test Spec

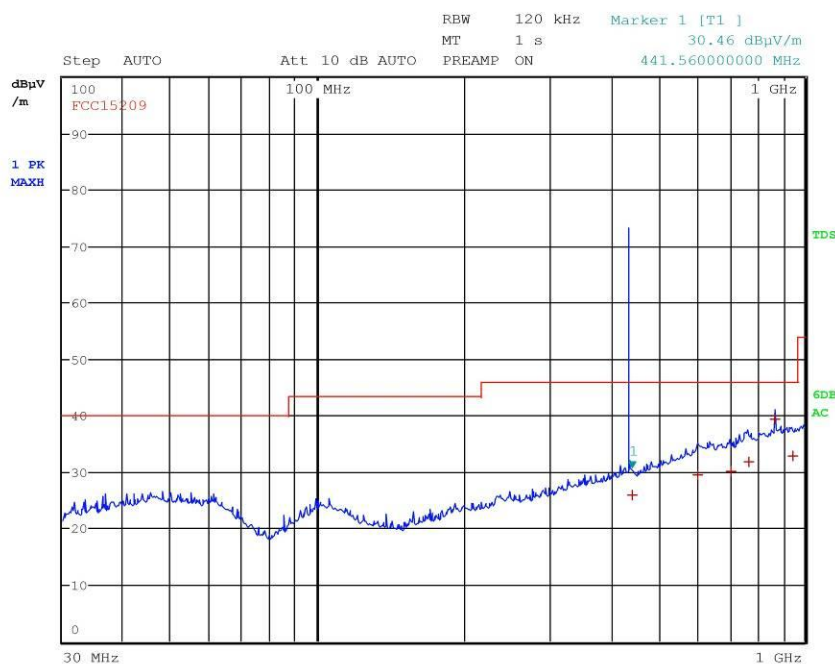

### Final Measurement


Meas Time: 1 s  
Margin: 40 dB  
Peaks: 6

| Trace | Frequency        | Level (dBµV/m) | Detector   | Delta Limit/dB |
|-------|------------------|----------------|------------|----------------|
| 1     | 441.56000000 MHz | 25.96          | Quasi Peak | -20.06         |
| 1     | 603.20000000 MHz | 29.53          | Quasi Peak | -16.49         |
| 1     | 707.68000000 MHz | 30.19          | Quasi Peak | -15.83         |
| 1     | 767.56000000 MHz | 31.79          | Quasi Peak | -14.23         |
| 1     | 869.44000000 MHz | 39.42          | Quasi Peak | -6.60          |
| 1     | 943.60000000 MHz | 32.81          | Quasi Peak | -13.21         |



G15131110


Meas Type Emission  
Equipment under Test  
Manufacturer  
OP Condition  
Operator Bertezolo 15131110  
Test Spec

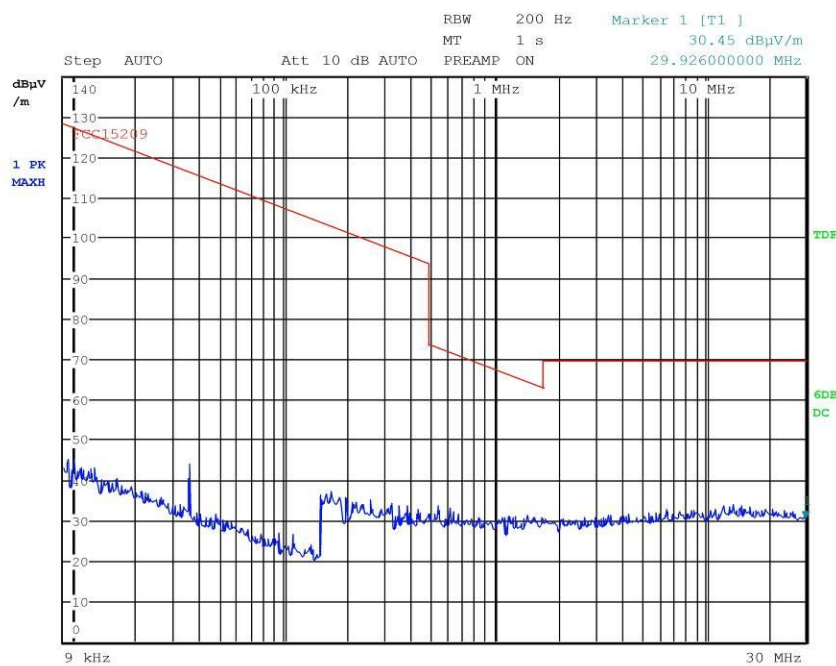



G15131111


Meas Type Emission  
Equipment under Test  
Manufacturer  
OP Condition  
Operator Bertezolo 15131111  
Test Spec

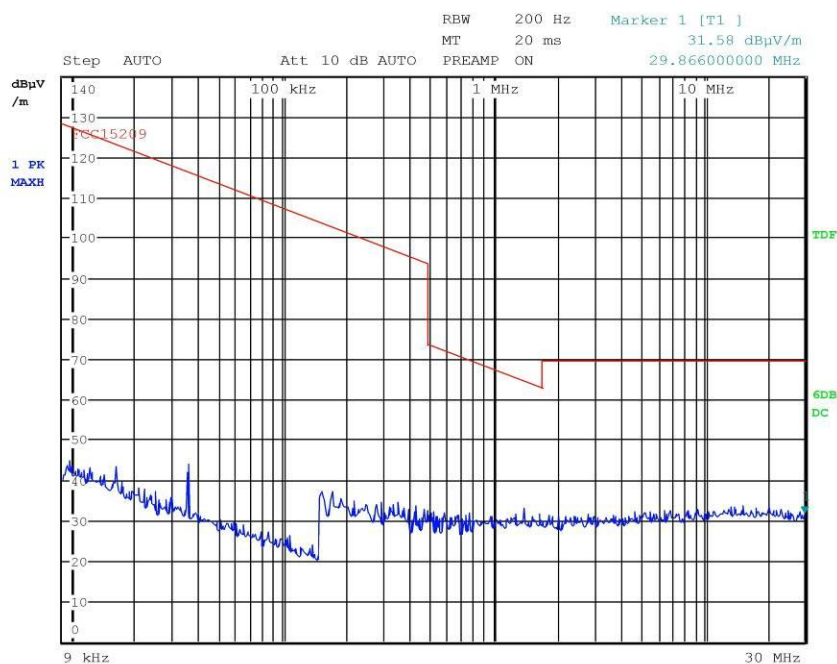



G15131112

Meas Type Emission  
Equipment under Test  
Manufacturer  
OP Condition  
Operator Bertezzo 15131112  
Test Spec

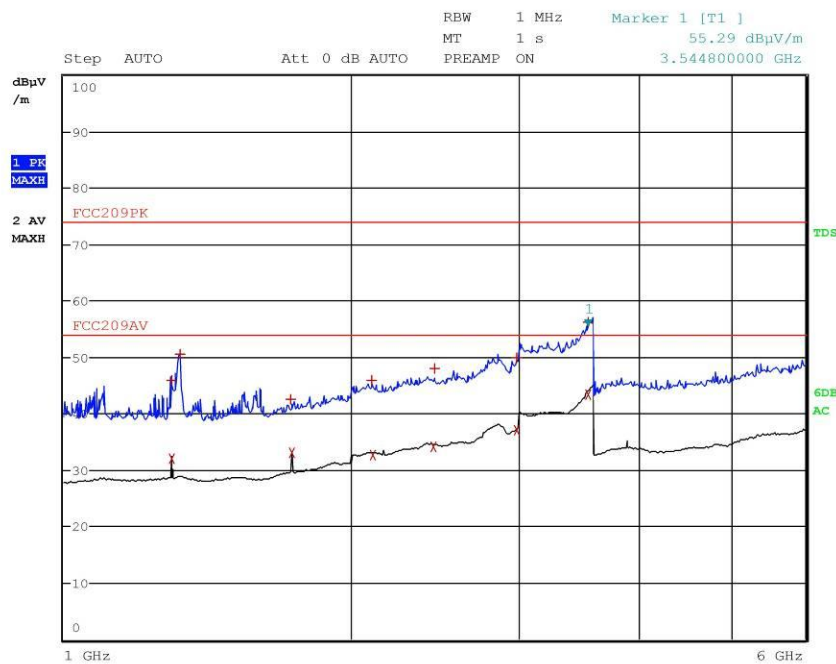



Meas Type Emission  
Equipment under Test  
Manufacturer  
OP Condition  
Operator Bertezolo 15131112  
Test Spec

### Final Measurement


Meas Time: 1 s  
Margin: 6 dB  
Peaks: 13

| Trace | Frequency       | Level (dBµV/m) | Detector | Delta Limit/dB |
|-------|-----------------|----------------|----------|----------------|
| 1     | 1.296400000 GHz | 45.97          | Max Peak | -28.03         |
| 2     | 1.300000000 GHz | 32.01          | Average  | -21.99         |
| 1     | 1.326400000 GHz | 50.59          | Max Peak | -23.41         |
| 1     | 1.728800000 GHz | 42.60          | Max Peak | -31.40         |
| 2     | 1.733200000 GHz | 33.17          | Average  | -20.83         |
| 1     | 2.105200000 GHz | 45.89          | Max Peak | -28.11         |
| 2     | 2.109200000 GHz | 32.57          | Average  | -21.43         |
| 2     | 2.439600000 GHz | 34.04          | Average  | -19.96         |
| 1     | 2.447600000 GHz | 47.94          | Max Peak | -26.06         |
| 2     | 2.984800000 GHz | 37.01          | Average  | -16.99         |
| 1     | 2.988800000 GHz | 49.84          | Max Peak | -24.16         |
| 1     | 3.544800000 GHz | 56.10          | Max Peak | -17.90         |
| 2     | 3.550800000 GHz | 43.47          | Average  | -10.53         |



G15131113

Meas Type Emission  
Equipment under Test  
Manufacturer  
OP Condition  
Operator Bertezolo 15131113  
Test Spec

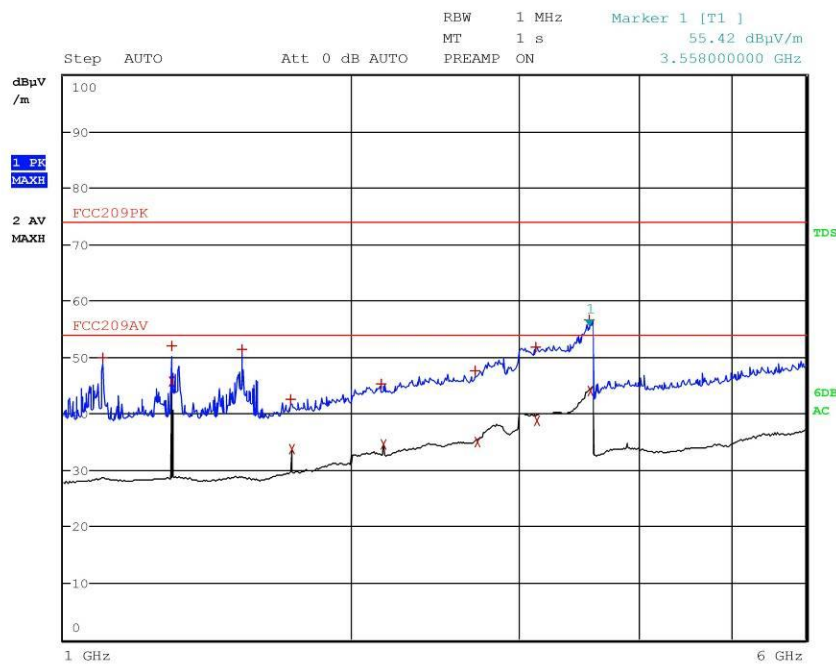



Meas Type Emission  
Equipment under Test  
Manufacturer  
OP Condition  
Operator Bertezolo 15131113  
Test Spec

### Final Measurement


Meas Time: 1 s  
Margin: 6 dB  
Peaks: 14

| Trace | Frequency       | Level (dB $\mu$ V/m) | Detector | Delta Limit/dB |
|-------|-----------------|----------------------|----------|----------------|
| 1     | 1.100400000 GHz | 49.94                | Max Peak | -24.06         |
| 1     | 1.300000000 GHz | 51.97                | Max Peak | -22.03         |
| 2     | 1.300000000 GHz | 45.60                | Average  | -8.40          |
| 1     | 1.537600000 GHz | 51.44                | Max Peak | -22.56         |
| 1     | 1.728000000 GHz | 42.63                | Max Peak | -31.37         |
| 2     | 1.733200000 GHz | 33.75                | Average  | -20.25         |
| 1     | 2.153600000 GHz | 45.30                | Max Peak | -28.70         |
| 2     | 2.166400000 GHz | 34.52                | Average  | -19.48         |
| 1     | 2.699200000 GHz | 47.57                | Max Peak | -26.43         |
| 2     | 2.718000000 GHz | 35.06                | Average  | -18.94         |
| 1     | 3.124400000 GHz | 51.88                | Max Peak | -22.12         |
| 2     | 3.137600000 GHz | 38.79                | Average  | -15.21         |
| 1     | 3.558000000 GHz | 56.69                | Max Peak | -17.31         |
| 2     | 3.571600000 GHz | 44.10                | Average  | -9.90          |



G15131114

Meas Type Emission  
Equipment under Test  
Manufacturer  
OP Condition  
Operator Bertezolo 15131114  
Test Spec

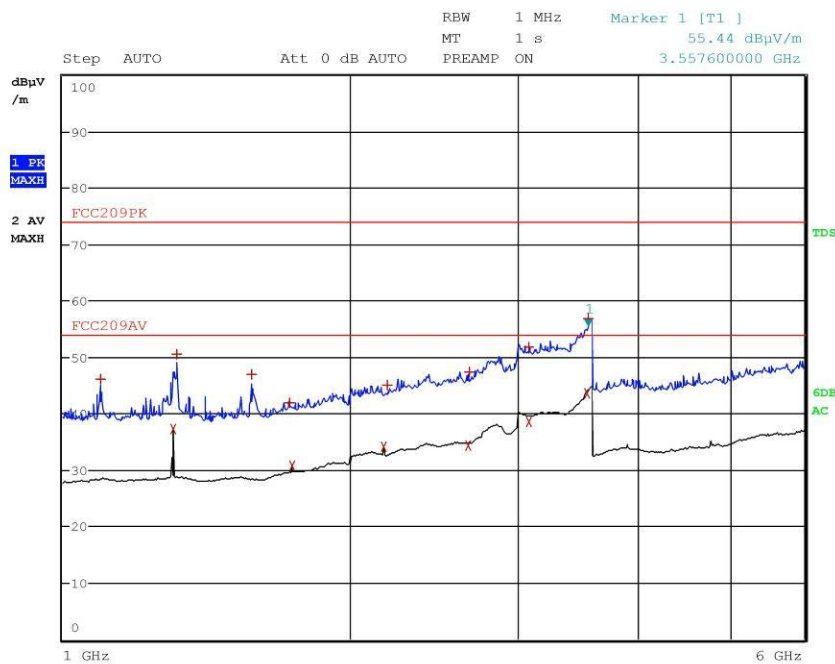



Meas Type Emission  
Equipment under Test  
Manufacturer  
OP Condition  
Operator Bertezolo 15131114  
Test Spec

### Final Measurement

Meas Time: 1 s  
Margin: 6 dB  
Peaks: 14

| Trace | Frequency       | Level (dB $\mu$ V/m) | Detector | Delta Limit/dB |
|-------|-----------------|----------------------|----------|----------------|
| 1     | 1.095600000 GHz | 46.04                | Max Peak | -27.96         |
| 2     | 1.304000000 GHz | 37.20                | Average  | -16.80         |
| 1     | 1.317600000 GHz | 50.47                | Max Peak | -23.53         |
| 1     | 1.580000000 GHz | 46.99                | Max Peak | -27.01         |
| 1     | 1.730800000 GHz | 41.89                | Max Peak | -32.11         |
| 2     | 1.738800000 GHz | 30.72                | Average  | -23.28         |
| 2     | 2.173600000 GHz | 34.15                | Average  | -19.85         |
| 1     | 2.187600000 GHz | 45.10                | Max Peak | -28.90         |
| 2     | 2.658000000 GHz | 34.33                | Average  | -19.67         |
| 1     | 2.672000000 GHz | 47.33                | Max Peak | -26.67         |
| 1     | 3.082400000 GHz | 51.78                | Max Peak | -22.22         |
| 2     | 3.084800000 GHz | 38.51                | Average  | -15.49         |
| 2     | 3.551600000 GHz | 43.50                | Average  | -10.50         |
| 1     | 3.557600000 GHz | 56.82                | Max Peak | -17.18         |




CMC  
Centro Misure Compatibilità S.r.l.  
Via dell'Elettronica, 12/C  
36016 Thiene (VI)



LAB N° 0168

G15131115

**Meas Type** Emission  
**Equipment under Test**  
**Manufacturer**  
**OP Condition**  
**Operator** Bertezolo 15131115  
**Test Spec**

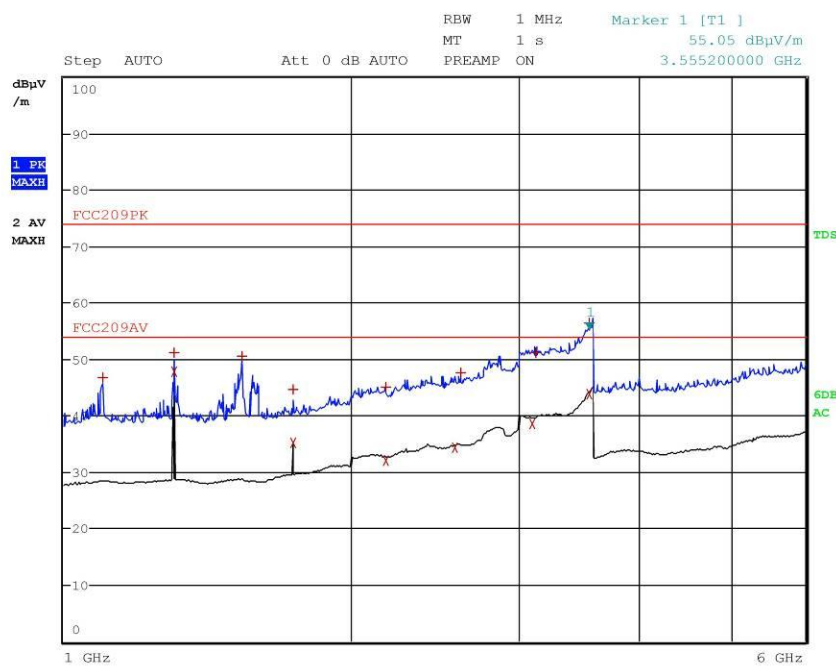



Meas Type Emission  
Equipment under Test  
Manufacturer  
OP Condition  
Operator Bertezolo 15131115  
Test Spec

### Final Measurement

Meas Time: 1 s  
Margin: 6 dB  
Peaks: 14

| Trace | Frequency       | Level (dBµV/m) | Detector | Delta Limit/dB |
|-------|-----------------|----------------|----------|----------------|
| 1     | 1.098000000 GHz | 46.75          | Max Peak | -27.25         |
| 1     | 1.304000000 GHz | 51.22          | Max Peak | -22.78         |
| 2     | 1.304000000 GHz | 47.71          | Average  | -6.29          |
| 1     | 1.537600000 GHz | 50.55          | Max Peak | -23.45         |
| 1     | 1.738800000 GHz | 44.54          | Max Peak | -29.46         |
| 2     | 1.738800000 GHz | 35.17          | Average  | -18.83         |
| 1     | 2.176800000 GHz | 45.03          | Max Peak | -28.97         |
| 2     | 2.178000000 GHz | 32.11          | Average  | -21.89         |
| 2     | 2.571200000 GHz | 34.39          | Average  | -19.61         |
| 1     | 2.612400000 GHz | 47.56          | Max Peak | -26.44         |
| 2     | 3.103600000 GHz | 38.54          | Average  | -15.46         |
| 1     | 3.129200000 GHz | 51.12          | Max Peak | -22.88         |
| 1     | 3.555200000 GHz | 56.41          | Max Peak | -17.59         |
| 2     | 3.558400000 GHz | 43.70          | Average  | -10.30         |

**Result:** The requirements are met



### 11.3 Fundamental and Spurious Emission ( $\leq 1$ GHz)

#### Test set-up and execution

- FCC Rules and Regulation; Titles 47 Part 15.209 and Part 15.231 (a)
- Internal procedure PM001
- See clause 4 of this test report

#### Test configuration and test method

Test site:  
Semi-anechoic chamber

Auxiliary equipment:  
See clause 4 of this test report

#### EUT exercising

See clause 4 of this test report

#### Test equipment used

CMC S136, CMC S164  
Measurement uncertainty: See clause 7 of this test report

#### Test specification

Port: Enclosure  
Antenna polarization: Horizontal (H) – Vertical (V)  
EUT – Antenna distance: 3 m  
Detector CISPR quasi-peak

#### Environmental conditions

| Temperature<br>(°C) | Atmospheric pressure<br>(kPa) | Relative humidity<br>(%) |
|---------------------|-------------------------------|--------------------------|
| 20                  | 100                           | 45                       |

#### Acceptance limits


| FCC Part 15.231 (b)            |                                                   |                                                          |
|--------------------------------|---------------------------------------------------|----------------------------------------------------------|
| Fundamental frequency<br>(MHz) | Field strength of fundamental<br>[dB( $\mu$ V/m)] | Field strength of spurious<br>emissions [dB( $\mu$ V/m)] |
| 40,66 to 40,70                 | 67,04                                             | 47,04                                                    |
| 70 to 130                      | 61,94                                             | 41,94                                                    |
| 130 to 174                     | 61,94 to 71,48                                    | 41,94 to 51,48                                           |
| 174 to 260                     | 71,48                                             | 51,48                                                    |
| 260 to 470                     | 71,48 to 81,94                                    | 51,48 to 61,94                                           |
| Above 470                      | 81,94                                             | 61,94                                                    |



### FCC Part 15.231 (e)

| Fundamental frequency (MHz) | Field strength of fundamental [dB( $\mu$ V/m)] | Field strength of spurious emissions [dB( $\mu$ V/m)] |
|-----------------------------|------------------------------------------------|-------------------------------------------------------|
| 40,66 to 40,70              | 60                                             | 40                                                    |
| 70 to 130                   | 53,98                                          | 33,98                                                 |
| 130 to 174                  | 53,98 to 63,52                                 | 33,98 to 43,52                                        |
| 174 to 260                  | 63,52                                          | 43,52                                                 |
| 260 to 470                  | 63,52 to 73,98                                 | 43,52 to 53,98                                        |
| Above 470                   | 73,98                                          | 53,98                                                 |

### Setup

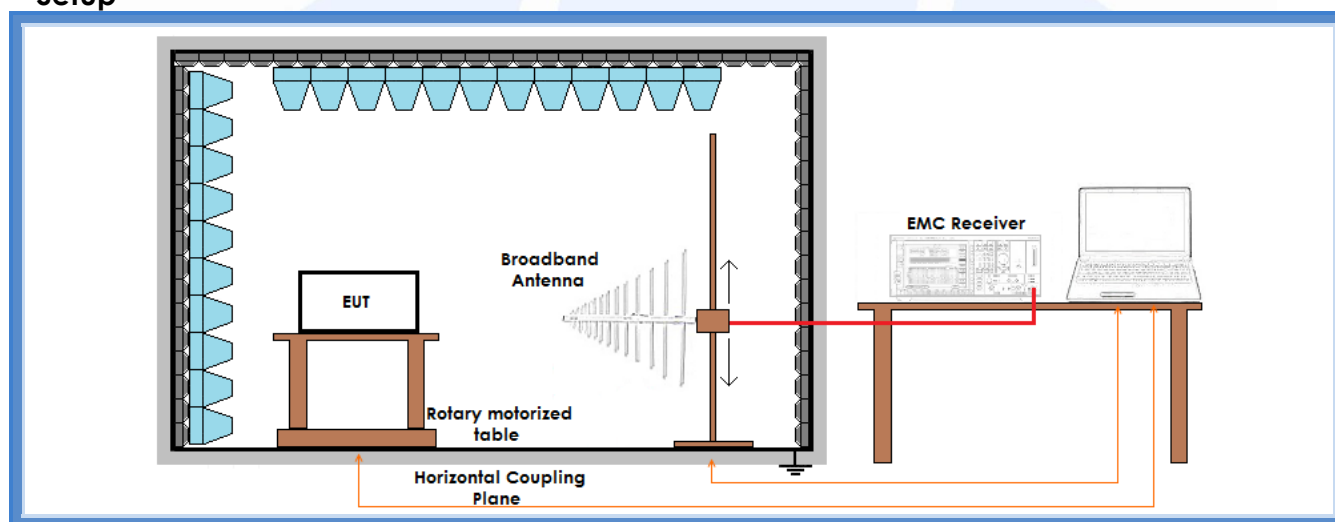

### Graphs:

G15131101 and G15131106

### Result – Field strength of fundamental

| Channel | f (MHz) | Limits (dB $\mu$ V/m) | Level (dB $\mu$ V/m) | Results  |
|---------|---------|-----------------------|----------------------|----------|
| CH 1    | 433,31  | 80,79                 | 74,40                | Complies |
| CH 8    | 434,71  | 80,84                 | 74,66                | Complies |

**Remarks:** EUT was tested in 3 orthogonal planes. The results in this table show the highest value.

### Result – Field strength of spurious emissions

| Channel | f (MHz) | Limits (dB $\mu$ V/m) | Level (dB $\mu$ V/m) | Results  |
|---------|---------|-----------------------|----------------------|----------|
| CH 1    | 866,62  | 60,79                 | 41,40                | Complies |
| CH 8    | 869,42  | 60,84                 | 42,80                | Complies |


**Remarks:** EUT was tested in 3 orthogonal planes. The results in this table show the highest value.



## Graphs

G15131101


Meas Type Emission  
Equipment under Test  
Manufacturer  
OP Condition  
Operator Bertezolo 15131101  
Test Spec

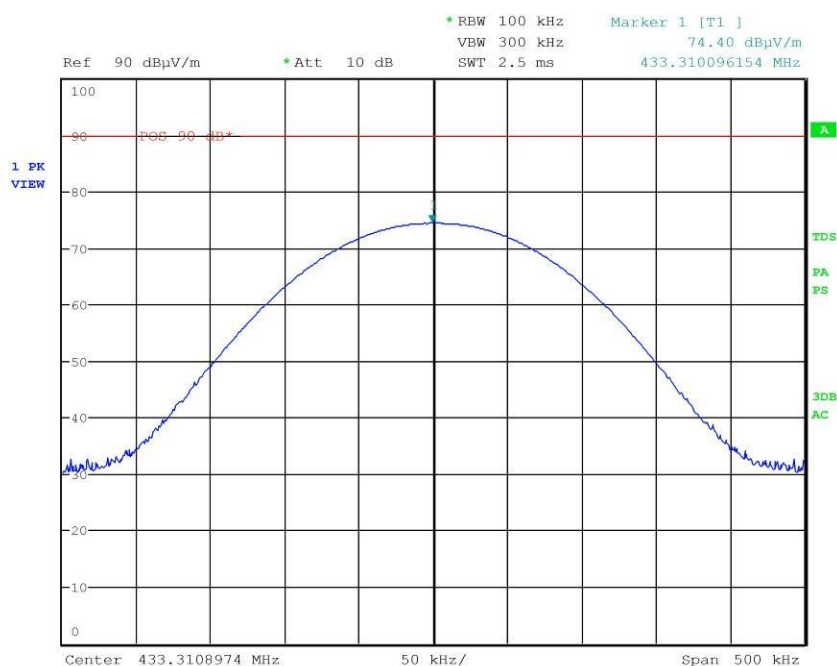



G15131106

Meas Type Emission  
Equipment under Test  
Manufacturer  
OP Condition  
Operator Bertezolo 15131106  
Test Spec

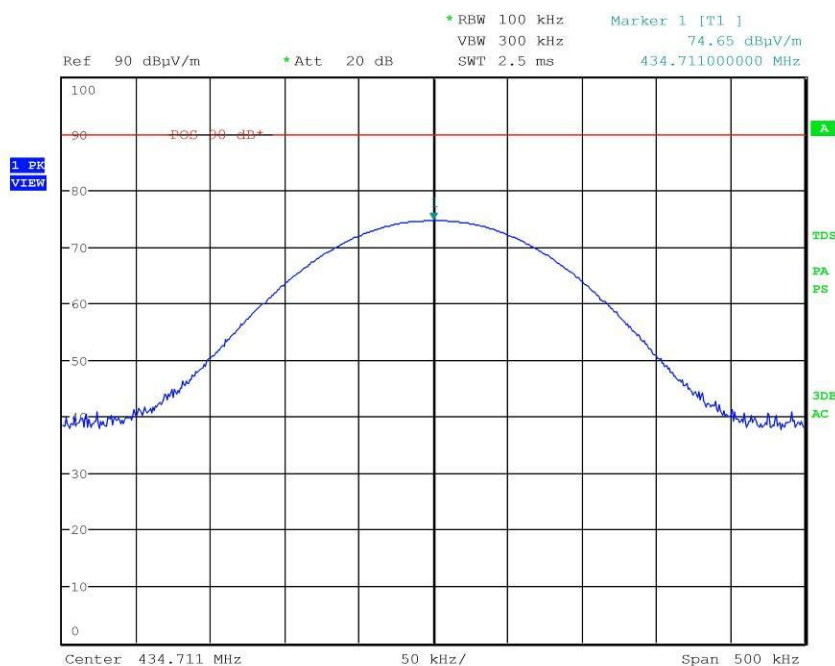

**Result:** The requirements are met



## 11.4 Spurious Emission (> 1 GHz)

### Test set-up and execution

- FCC Rules and Regulation; Titles 47 Part 15.209 and Part 15.231
- Internal procedure PM001
- See clause 4 of this test report

### Test configuration and test method

Test site:  
Semi-anechoic chamber

Auxiliary equipment:  
See clause 4 of this test report

### EUT exercising

See clause 4 of this test report

### Test equipment used

CMC S108, CMC S164  
Measurement uncertainty: See clause 7 of this test report

### Test specification

Port: Enclosure  
Antenna polarization: Horizontal (H) – Vertical (V)  
EUT – Antenna distance: 3 m  
Detector AV + Peak

### Environmental conditions


| Temperature<br>(°C) | Atmospheric pressure<br>(kPa) | Relative humidity<br>(%) |
|---------------------|-------------------------------|--------------------------|
| 22                  | 101                           | 45                       |

### Acceptance limits

| Frequency<br>(MHz) | AV limits<br>[dB(μV/m)] | Peak limits<br>[dB(μV/m)] |
|--------------------|-------------------------|---------------------------|
| > 1000             | 54                      | 74                        |



## Setup

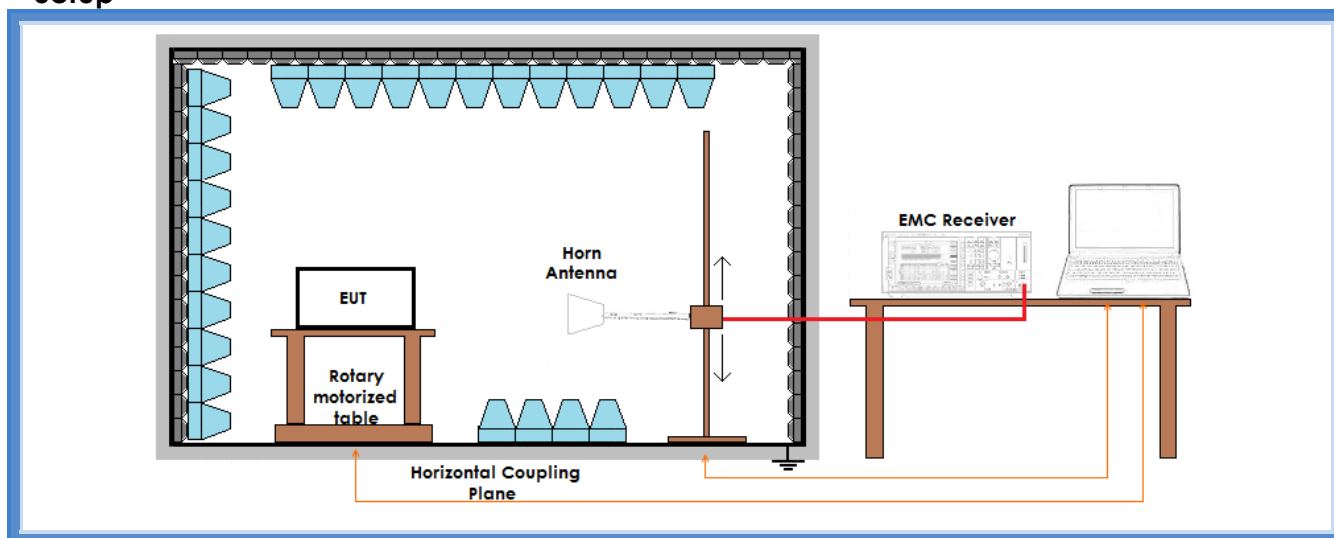

## Result – AV detector

| Channel CH 1 (lowest channel)                                                                            |                          |                             |          |
|----------------------------------------------------------------------------------------------------------|--------------------------|-----------------------------|----------|
| Harmonic                                                                                                 | Limits<br>(dB $\mu$ V/m) | Level<br>(dB $\mu$ V/m)     | Results  |
| III                                                                                                      | 54                       | 51,9                        | Complies |
| IV                                                                                                       | 54                       | More than 20 dB below limit | Complies |
| V                                                                                                        | 54                       | More than 20 dB below limit | Complies |
| VI                                                                                                       | 54                       | More than 20 dB below limit | Complies |
| VII                                                                                                      | 54                       | More than 20 dB below limit | Complies |
| VIII                                                                                                     | 54                       | More than 20 dB below limit | Complies |
| IX                                                                                                       | 54                       | More than 20 dB below limit | Complies |
| X                                                                                                        | 54                       | More than 20 dB below limit | Complies |
| <b>Remarks:</b> EUT was tested in 3 orthogonal planes. The results in this table show the highest values |                          |                             |          |



| <b>Channel CH 8 (highest channel)</b>                                                                    |                          |                             |          |
|----------------------------------------------------------------------------------------------------------|--------------------------|-----------------------------|----------|
| Harmonic                                                                                                 | Limits<br>(dB $\mu$ V/m) | Level<br>(dB $\mu$ V/m)     | Results  |
| III                                                                                                      | 54                       | 53,2                        | Complies |
| IV                                                                                                       | 54                       | More than 20 dB below limit | Complies |
| V                                                                                                        | 54                       | More than 20 dB below limit | Complies |
| VI                                                                                                       | 54                       | More than 20 dB below limit | Complies |
| VII                                                                                                      | 54                       | More than 20 dB below limit | Complies |
| VIII                                                                                                     | 54                       | More than 20 dB below limit | Complies |
| IX                                                                                                       | 54                       | More than 20 dB below limit | Complies |
| X                                                                                                        | 54                       | More than 20 dB below limit | Complies |
| <b>Remarks:</b> EUT was tested in 3 orthogonal planes. The results in this table show the highest values |                          |                             |          |

#### Result – Peak detector

| <b>Channel CH 1 (lowest channel)</b>                                                                     |                          |                             |          |
|----------------------------------------------------------------------------------------------------------|--------------------------|-----------------------------|----------|
| Harmonic                                                                                                 | Limits<br>(dB $\mu$ V/m) | Level<br>(dB $\mu$ V/m)     | Results  |
| III                                                                                                      | 74                       | 55,2                        | Complies |
| IV                                                                                                       | 74                       | More than 20 dB below limit | Complies |
| V                                                                                                        | 74                       | More than 20 dB below limit | Complies |
| VI                                                                                                       | 74                       | More than 20 dB below limit | Complies |
| VII                                                                                                      | 74                       | More than 20 dB below limit | Complies |
| VIII                                                                                                     | 74                       | More than 20 dB below limit | Complies |
| IX                                                                                                       | 74                       | More than 20 dB below limit | Complies |
| X                                                                                                        | 74                       | More than 20 dB below limit | Complies |
| <b>Remarks:</b> EUT was tested in 3 orthogonal planes. The results in this table show the highest values |                          |                             |          |



| Channel CH 8 (highest channel)                                                                    |                          |                             |          |
|---------------------------------------------------------------------------------------------------|--------------------------|-----------------------------|----------|
| Harmonic                                                                                          | Limits<br>(dB $\mu$ V/m) | Level<br>(dB $\mu$ V/m)     | Results  |
| III                                                                                               | 74                       | 55,6                        | Complies |
| IV                                                                                                | 74                       | More than 20 dB below limit | Complies |
| V                                                                                                 | 74                       | More than 20 dB below limit | Complies |
| VI                                                                                                | 74                       | More than 20 dB below limit | Complies |
| VII                                                                                               | 74                       | More than 20 dB below limit | Complies |
| VIII                                                                                              | 74                       | More than 20 dB below limit | Complies |
| IX                                                                                                | 74                       | More than 20 dB below limit | Complies |
| X                                                                                                 | 74                       | More than 20 dB below limit | Complies |
| Remarks: EUT was tested in 3 orthogonal planes. The results in this table show the highest values |                          |                             |          |

**Result:** The requirements are met



## 11.5 Occupied channel bandwidth

### Test set-up and execution

- FCC Rules and Regulation; Titles 47 Part 15.231 (c)
- Internal procedure PM001
- See clause 4 of this test report

### Test configuration and test method

Test site:  
Laboratory

Auxiliary equipment:  
See clause 4 of this test report

### EUT exercising

See clause 4 of this test report

### Test equipment used

CMC S136, CMC S164  
Measurement uncertainty: See clause 7 of this test report

### Test specification

The bandwidth of the emission shall be no wider than 0,25% of the center frequency for devices operating above 70 MHz and below 900 MHz. For devices operating above 900 MHz, the emission shall be no wider than 0,5% of the center frequency. Bandwidth is determined at the points 20 dB down from the modulated carrier

### Environmental conditions


| Temperature<br>(°C) | Atmospheric pressure<br>(kPa) | Relative humidity<br>(%) |
|---------------------|-------------------------------|--------------------------|
| 23                  | 101                           | 55                       |

### Acceptance limits

| Limits                                              |                                    |
|-----------------------------------------------------|------------------------------------|
| Devices operating<br>above 70 MHz and below 900 MHz | Devices operating<br>above 900 MHz |
| 0,25% of the center frequency                       | 0,5% of the center frequency       |



## Setup

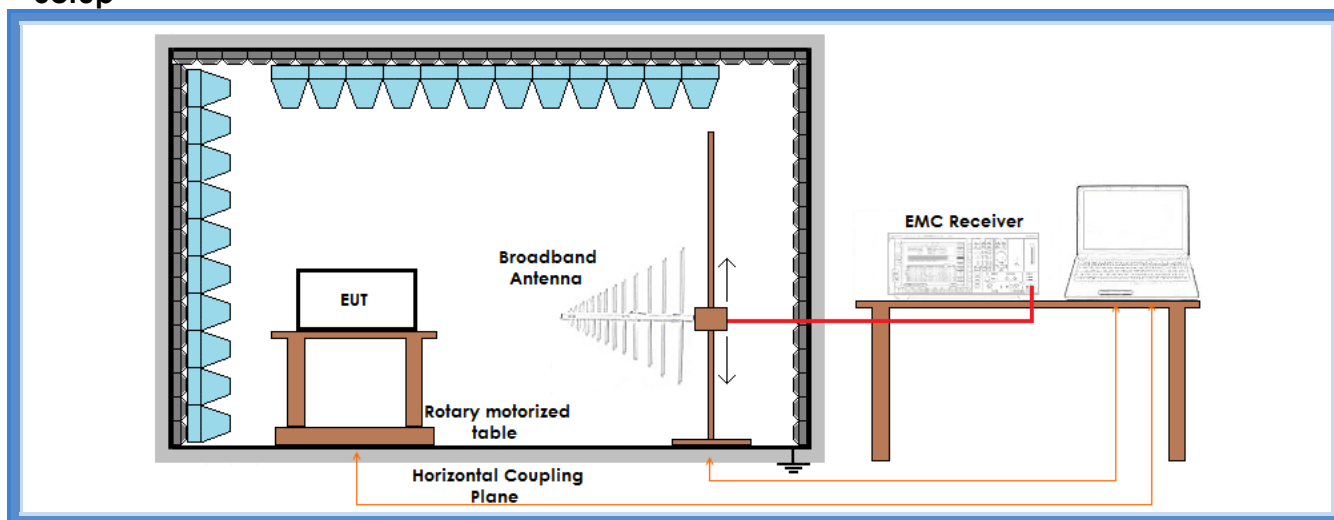

## Result


| Channel | $f$<br>(MHz) | Limit<br>(kHz) | 20 dB<br>bandwidth<br>(kHz) | Graphs    | Results  |
|---------|--------------|----------------|-----------------------------|-----------|----------|
| CH 1    | 433,31       | 1083,275       | 9,519                       | G15131102 | Complies |
| CH 8    | 434,71       | 1086,775       | 9,810                       | G15131107 | Complies |




## Graphs

G15131102


Meas Type Emission  
Equipment under Test  
Manufacturer  
OP Condition  
Operator Bertezzo 15131102  
Test Spec

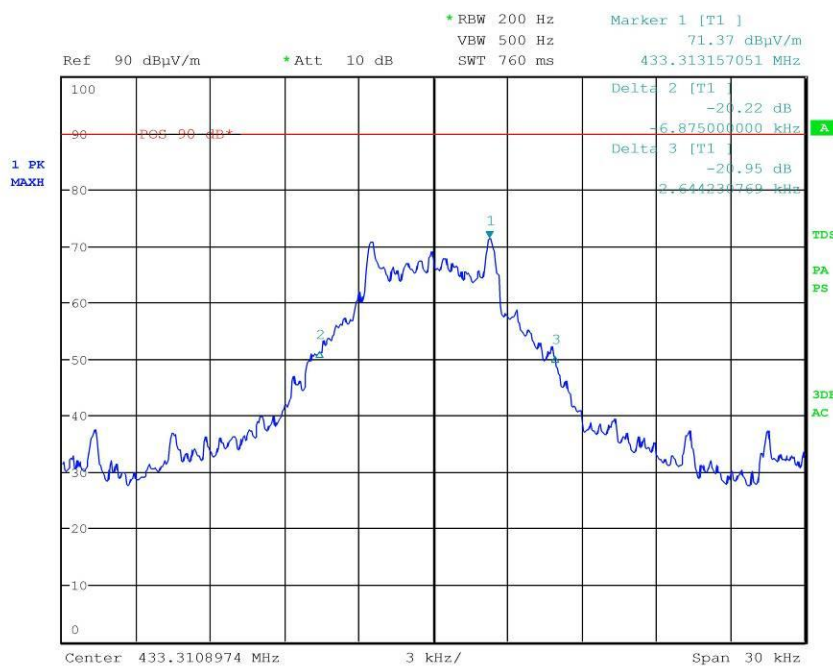

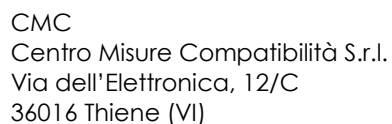

**LAB N° 0168**

|                      |                   |
|----------------------|-------------------|
| Meas Type            | Emission          |
| Equipment under Test |                   |
| Manufacturer         |                   |
| OP Condition         |                   |
| Operator             | Bertezzo 15131107 |
| Test Spec            |                   |

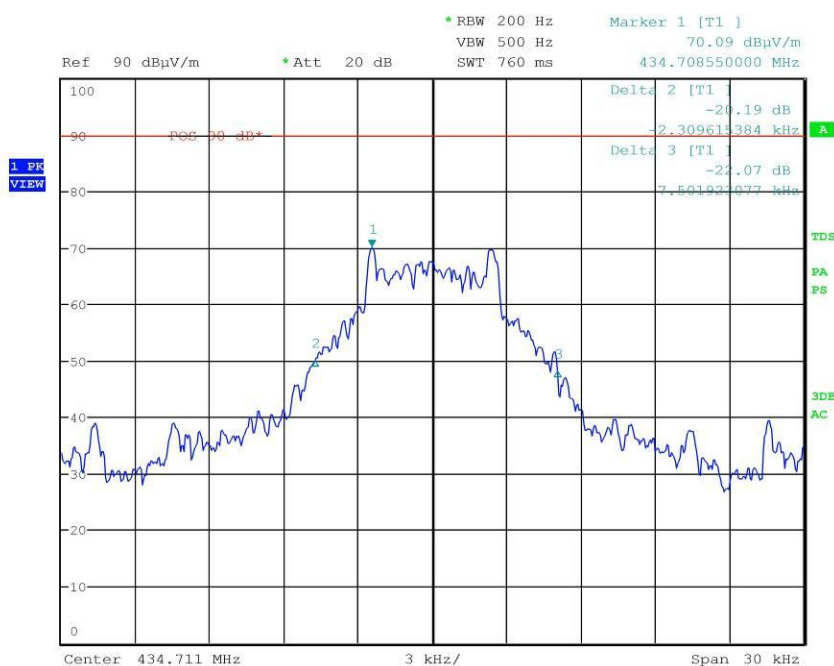

**Result:** The requirements are met



## 11.6 Periodic Operation Characteristics

### Test set-up and execution

- FCC Rules and Regulation; Titles 47 Part 15.231 (a)
- Internal procedure PM001
- See clause 4 of this test report

### Test configuration and test method

Test site:  
Laboratory

Auxiliary equipment:  
See clause 4 of this test report

### EUT exercising

See clause 4 of this test report

### Test equipment used

CMC S227  
Measurement uncertainty: See clause 7 of this test report

### Test specification

- ☒ Manually operated transmitter
- ☐ Transmitter activated automatically

The provisions of this section are restricted to periodic operation within the band 40,66–40,70 MHz and above 70 MHz. Except as shown in paragraph (e) of this section, the intentional radiator is restricted to the transmission of a control signal such as those used with alarm systems, door openers, remote switches, etc. Continuous transmissions, voice, video and the radio control of toys are not permitted. Data is permitted to be sent with a control signal. The following conditions shall be met to comply with the provisions for this periodic operation

### Environmental conditions

| Temperature<br>(°C) | Atmospheric pressure<br>(kPa) | Relative humidity<br>(%) |
|---------------------|-------------------------------|--------------------------|
| 23                  | 100                           | 45                       |



## Result

15.231 (a1) A manually operated transmitter shall employ a switch that will automatically deactivate the transmitter within not more than 5 seconds of being released

| Channel | Frequency (MHz) | Transmitter deactivation time | Graphs    |
|---------|-----------------|-------------------------------|-----------|
| CH 1    | 433,31          | 1,205 s                       | G15131116 |
| CH 8    | 434,71          | 1,205 s                       | G15131117 |

15.231 (a2) A transmitter activated automatically shall cease transmission within 5 seconds after activation

**Result:** N.A.

15.231 (a3) Periodic transmissions at regular predetermined intervals are not permitted. However, polling or supervision transmissions, including data, to determine system integrity of transmitters used in security or safety applications are allowed if the total duration of transmissions does not exceed more than two seconds per hour for each transmitter. There is no limit on the number of individual transmissions, provided the total transmission time does not exceed two seconds per hour

**Result:** The EUT does not employ periodic transmission.

15.231 (a4) Intentional radiators which are employed for radio control purposes during emergencies involving fire, security, and safety of life, when activated to signal an alarm, may operate during the pendency of the alarm condition.

**Result:** N.A.


15.231 (a5) Transmission of set-up information for security systems may exceed the transmission duration limits in paragraphs (a)(1) and (a)(2) of this section, provided such transmissions are under the control of a professional installer and do not exceed ten seconds after a manually operated switch is released or a transmitter is activated automatically. Such set-up information may include data

**Result:** N.A.



## Graphs


G15131116

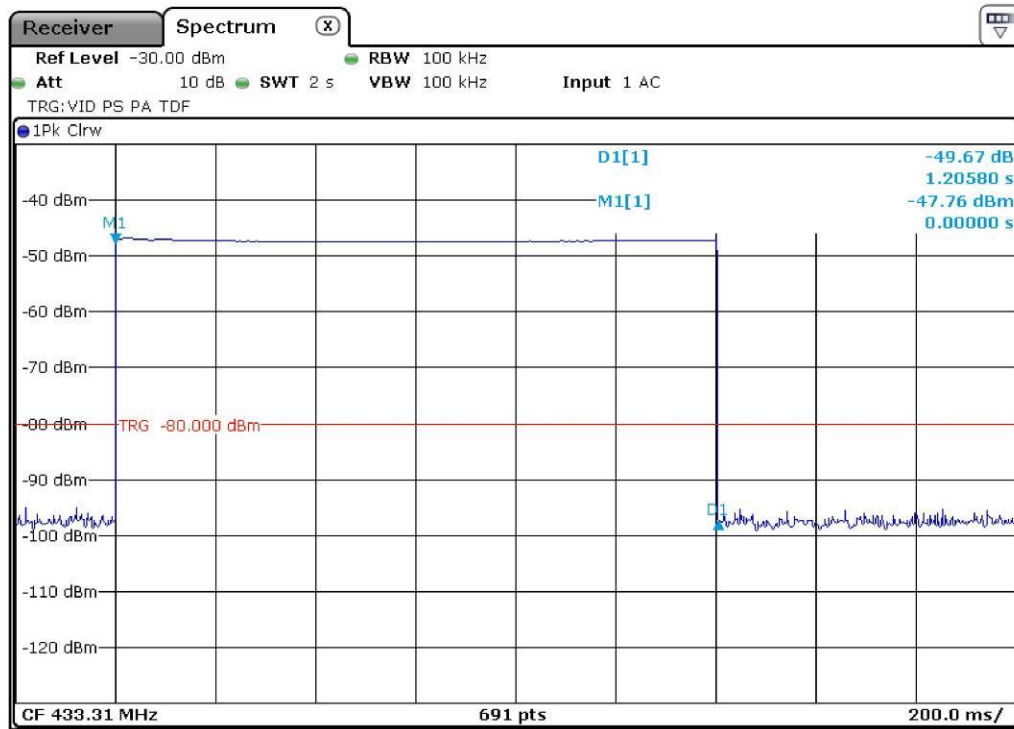

Bertezzo 15131116



G15131117

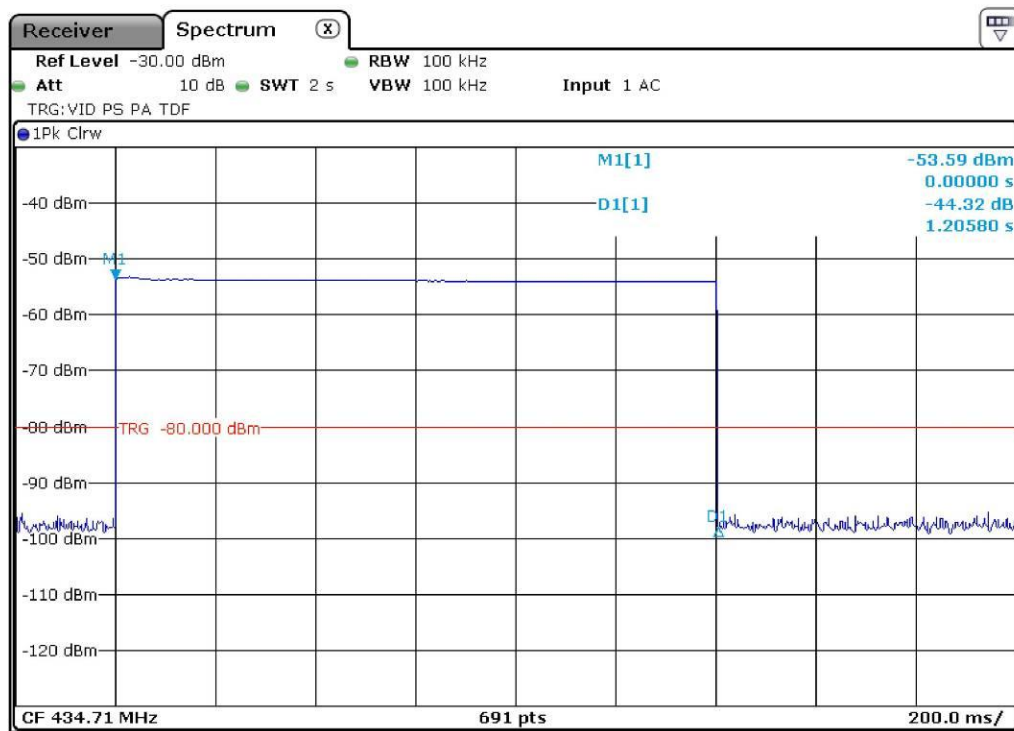

Bertezzo 15131117

**Result:** The requirements are met