

TEST REPORT

Product Name: True wireless earphones
Trade Mark: PHILIPS
Model No.: TAT8505
Add. Model No.: TAT8505xx/yy (xx=AA-ZZ or blank denoted different color; yy=00-99 denoted different country destination)
Report Number: 191203025RFC-1
Test Standards: FCC 47 CFR Part 15 Subpart C
RSS-247 Issue 2
RSS-Gen Issue 5
FCC ID: 2AR2STAT8505
IC: 24589-TAT8505
Test Result: PASS
Date of Issue: July 15, 2020


Prepared for:

MMD Hong Kong Holding Limited
Units 1006-1007, 10th Floor, C-Bons International Center, 108 Wai Yip Street, Kwun Tong, Kowloon, Hong Kong

Prepared by:

Shenzhen UnionTrust Quality and Technology Co., Ltd.
16/F, Block A, Building 6, Baoneng Science and Technology Park, Qingxiang Road No.1, Longhua New District, Shenzhen, China
TEL: +86-755-2823 0888
FAX: +86-755-2823 0886

Prepared by:



Eric Yu
Team Leader

Reviewed by:



Jim Long
Assistant Manager

Approved by:



Billy Li
Technical Director

Date:

July 15, 2020

Shenzhen UnionTrust Quality and Technology Co., Ltd.

Address: 16/F, Block A, Building 6, Baoneng Science and Technology Park, Qingxiang Road No.1, Longhua New District, Shenzhen, China

Tel: +86-755-28230888

Fax: +86-755-28230886

E-mail: info@utllab.com

<http://www.utllab.com>

UTTR-RF-RSS247-V1.0

Version

Version No.	Date	Description
V1.0	July 15, 2020	Original



Shenzhen UnionTrust Quality and Technology Co., Ltd.

Address: 16/F, Block A, Building 6, Baoneng Science and Technology Park, Qingxiang Road No.1, Longhua New District, Shenzhen, China

Tel: +86-755-28230888

Fax: +86-755-28230886

E-mail: info@uttlab.com

<http://www.uttlab.com>

UTTR-RF-RSS247-V1.0

CONTENTS

1. GENERAL INFORMATION	4
1.1 CLIENT INFORMATION	4
1.2 EUT INFORMATION	4
1.2.1 GENERAL DESCRIPTION OF EUT	4
1.2.2 DESCRIPTION OF ACCESSORIES	5
1.3 PRODUCT SPECIFICATION SUBJECTIVE TO THIS STANDARD	6
1.4 OTHER INFORMATION	6
1.5 DESCRIPTION OF SUPPORT UNITS	6
1.6 TEST LOCATION	7
1.7 TEST FACILITY	7
1.8 DEVIATION FROM STANDARDS	7
1.9 ABNORMALITIES FROM STANDARD CONDITIONS	7
1.10 OTHER INFORMATION REQUESTED BY THE CUSTOMER	7
1.11 MEASUREMENT UNCERTAINTY	8
2. TEST SUMMARY	9
3. EQUIPMENT LIST	10
4. TEST CONFIGURATION	11
4.1 ENVIRONMENTAL CONDITIONS FOR TESTING	11
4.1.1 NORMAL OR EXTREME TEST CONDITIONS	11
4.1.2 RECORD OF NORMAL ENVIRONMENT	11
4.2 TEST CHANNELS	11
4.3 EUT TEST STATUS	11
4.4 PRE-SCAN	12
4.4.1 PRE-SCAN UNDER ALL PACKETS AT MIDDLE CHANNEL	12
4.4.2 WORST-CASE DATA PACKETS	12
4.4.3 TESTED CHANNEL DETAIL	12
4.5 TEST SETUP	13
4.5.1 FOR RADIATED EMISSIONS TEST SETUP	13
4.5.2 FOR CONDUCTED EMISSIONS TEST SETUP	14
4.5.3 FOR CONDUCTED RF TEST SETUP	15
4.6 SYSTEM TEST CONFIGURATION	15
4.7 DUTY CYCLE	16
5. RADIO TECHNICAL REQUIREMENTS SPECIFICATION	17
5.1 REFERENCE DOCUMENTS FOR TESTING	17
5.2 ANTENNA REQUIREMENT	17
5.3 CONDUCTED PEAK OUTPUT POWER	18
5.4 20 dB BANDWIDTH & OCCUPIED BANDWIDTH	21
5.5 CARRIER FREQUENCIES SEPARATION	24
5.6 NUMBER OF HOPPING CHANNEL	26
5.7 DWELL TIME	30
5.8 CONDUCTED OUT OF BAND EMISSION	34
5.9 RADIATED SPURIOUS EMISSIONS	39
5.10 BAND EDGE MEASUREMENTS (RADIATED)	46
APPENDIX 1 PHOTOS OF TEST SETUP	51
APPENDIX 2 PHOTOS OF EUT CONSTRUCTIONAL DETAILS	51

1. GENERAL INFORMATION

1.1 CLIENT INFORMATION

Applicant:	MMD Hong Kong Holding Limited
Address of Applicant:	Units 1006-1007, 10th Floor, C-Bons International Center, 108 Wai Yip Street, Kwun Tong, Kowloon, Hong Kong
Manufacturer:	MMD Hong Kong Holding Limited
Address of Manufacturer:	Units 1006-1007, 10th Floor, C-Bons International Center, 108 Wai Yip Street, Kwun Tong, Kowloon, Hong Kong

1.2 EUT INFORMATION

1.2.1 General Description of EUT

Product Name:	True wireless earphones	
Model No. :	TAT8505	
Add. Model No. :	TAT8505xx/yy (xx=AA-ZZ or blank denoted different color; yy=00-99 denoted different country destination)	
Trade Mark:	PHILIPS	
DUT Stage:	Production Unit	
EUT Supports Function:	2.4 GHz ISM Band	Bluetooth 5.0
Software Version:	V2.1.1.1	
Hardware Version:	E	
Sample Received Date:	April 27, 2020	
Sample Tested Date:	May 5, 2020 to May 23, 2020	
Note: The additional model TAT8505xx/yy (xx=AA-ZZ or blank denoted different color; yy=00-99 denoted different country destination) is identical with the test model TAT8505 except the model number and trade mark for marketing purpose.		

1.2.2 Description of Accessories

Battery	
Model No.:	573230 for charging case; 1254 for earbuds
Battery Type:	Lithium-ion Polymer Rechargeable Battery
Rated Voltage:	3.7 Vdc
Rated Capacity:	560 mAh for charging case; 55mAh for earbuds

Cable	
Description:	USB Type-C Plug Cable
Cable Type:	Unshielded without ferrite

1.3 PRODUCT SPECIFICATION SUBJECTIVE TO THIS STANDARD

Frequency Band:	2400 MHz to 2483.5 MHz	
Frequency Range:	2402 MHz to 2480 MHz	
Bluetooth Version:	Bluetooth BR + EDR	
Modulation Technique:	Frequency Hopping Spread Spectrum(FHSS)	
Type of Modulation:	GFSK, $\pi/4$ DQPSK, 8DPSK	
Number of Channels:	79	
Channel Separation:	1 MHz	
Hopping Channel Type:	Adaptive Frequency Hopping Systems	
Antenna Type:	FPC Antenna	
Antenna Gain:	Right Earbud	-0.88 dBi
	Left Earbud	0.03 dBi
Maximum Peak Power:	8.28dBm	
Normal Test Voltage:	3.7 Vdc	

1.4 OTHER INFORMATION

Operation Frequency Each of Channel		
$f = 2402 + k \text{ MHz}, k = 0, \dots, 78$		
Note:		
f	is the operating frequency (MHz);	
k	is the operating channel.	

Modulation Configure			
Modulation	Packet	Packet Type	Packet Size
GFSK	1-DH1	4	27
	1-DH3	11	183
	1-DH5	15	339
$\pi/4$ DQPSK	2-DH1	20	54
	2-DH3	26	367
	2-DH5	30	679
8DPSK	3-DH1	24	83
	3-DH3	27	552
	3-DH5	31	1021

1.5 DESCRIPTION OF SUPPORT UNITS

The EUT has been tested with associated equipment below.

1) Support Equipment

Description	Manufacturer	Model No.	Serial Number	Supplied by
Notebook	Lenovo	E450	SL10G10780	UnionTrust

1.6 TEST LOCATION

Shenzhen UnionTrust Quality and Technology Co., Ltd.

Address: 16/F, Block A, Building 6, Baoneng Science and Technology Park, Qingxiang Road No.1, Longhua New District, Shenzhen, China 518109
Telephone: +86 (0) 755 2823 0888
Fax: +86 (0) 755 2823 0886

1.7 TEST FACILITY

The test facility is recognized, certified, or accredited by the following organizations:

CNAS-Lab Code: L9069

The measuring equipment utilized to perform the tests documented in this report has been calibrated once a year or in accordance with the manufacturer's recommendations, and is traceable under the ISO/IEC/EN 17025 to international or national standards. Equipment has been calibrated by accredited calibration laboratories.

A2LA-Lab Certificate No.: 4312.01

Shenzhen UnionTrust Quality and Technology Co., Ltd. has been accredited by A2LA for technical competence in the field of electrical testing, and proved to be in compliance with ISO/IEC 17025: 2005 General Requirements for the Competence of Testing and Calibration Laboratories and any additional program requirements in the identified field of testing.

ISED Wireless Device Testing Laboratories

CAB identifier: CN0032

FCC Accredited Lab.

Designation Number: CN1194

Test Firm Registration Number: 259480

1.8 DEVIATION FROM STANDARDS

None.

1.9 ABNORMALITIES FROM STANDARD CONDITIONS

None.

1.10 OTHER INFORMATION REQUESTED BY THE CUSTOMER

None.

1.11 MEASUREMENT UNCERTAINTY

Where relevant, the following measurement uncertainty levels have been estimated for tests performed on the Product as specified in CISPR 16-4-2. This uncertainty represents an expanded uncertainty expressed at approximately the 95% confidence level using a coverage factor of $k=2$.

No.	Item	Measurement Uncertainty
1	Conducted emission 9KHz-150KHz	± 3.2 dB
2	Conducted emission 150KHz-30MHz	± 2.7 dB
3	Radiated emission 9KHz-30MHz	± 4.7 dB
4	Radiated emission 30MHz-1GHz	± 4.6 dB
5	Radiated emission 1GHz-18GHz	± 4.4 dB
6	Radiated emission 18GHz-26GHz	± 4.6 dB
7	Radiated emission 26GHz-40GHz	± 4.6 dB

2. TEST SUMMARY

FCC 47 CFR Part 15 Subpart C Test Cases			
Test Item	Test Requirement	Test Method	Result
Antenna Requirement	FCC 47 CFR Part 15 Subpart C Section 15.203/15.247 (c) RSS-Gen Issue 5, Section 6.8	N/A	PASS
AC Power Line Conducted Emission	FCC 47 CFR Part 15 Subpart C Section 15.207 RSS-Gen Issue 5, Section 8.8	ANSI C63.10-2013 Section 6.2	N/A ^(Note2)
Conducted Peak Output Power	FCC 47 CFR Part 15 Subpart C Section 15.247 (b)(1) RSS-247 Issue 2, Section 5.4(b)	ANSI C63.10-2013 Section 7.8.5	PASS
20 dB Bandwidth	FCC 47 CFR Part 15 Subpart C Section 15.247 (a)(1) RSS-247 Issue 2, Section 5.1(a)	ANSI C63.10-2013 Section 6.9.2	PASS
Occupied Bandwidth	RSS-Gen section 6.7	RSS-Gen section 6.7	PASS
Carrier Frequencies Separation	FCC 47 CFR Part 15 Subpart C Section 15.247 (a)(1) RSS-247 Issue 2, Section 5.1(b)	ANSI C63.10-2013 Section 7.8.2	PASS
Number of Hopping Channel	FCC 47 CFR Part 15 Subpart C Section 15.247 (b)(1) RSS-247 Issue 2, Section 5.1(d)	ANSI C63.10-2013 Section 7.8.3	PASS
Dwell Time	FCC 47 CFR Part 15 Subpart C Section 15.247 (a)(1) RSS-247 Issue 2, Section 5.1(d)	ANSI C63.10-2013 Section 7.8.4	PASS
Conducted Out of Band Emission	FCC 47 CFR Part 15 Subpart C Section 15.247(d) RSS-247 Issue 2, Section 5.5	ANSI C63.10-2013 Section 6.10.4 & Section 7.8.8	PASS
Radiated Emissions	FCC 47 CFR Part 15 Subpart C Section 15.205/15.209 RSS-Gen Issue 5, Section 6.13/8.9/8.10	ANSI C63.10-2013 Section 6.3 & 6.5 & 6.6	PASS
Band Edge Measurement	FCC 47 CFR Part 15 Subpart C Section 15.205/15.209 RSS-247 Issue 2, Section 5.5	ANSI C63.10-2013 Section 6.10.5	PASS
Note: 1) N/A: In this whole report not applicable. 2) This EUT is charged by AC adapter to the battery. This EUT is powered by batteries, it need remove the battery from the EUT when charging, It doesn't transmitting while charging.			

3. EQUIPMENT LIST

Radiated Emission Test Equipment List						
Used	Equipment	Manufacturer	Model No.	Serial Number	Cal. date (mm dd, yyyy)	Cal. Due date (mm dd, yyyy)
<input checked="" type="checkbox"/>	3M Chamber & Accessory Equipment	ETS-LINDGREN	3M	N/A	Dec. 03, 2018	Dec. 03, 2021
<input checked="" type="checkbox"/>	Receiver	R&S	ESIB26	100114	Nov. 24, 2019	Nov. 23, 2020
<input checked="" type="checkbox"/>	Loop Antenna	ETS-LINDGREN	6502	00202525	Nov. 16, 2019	Nov. 15, 2020
<input checked="" type="checkbox"/>	Broadband Antenna	ETS-LINDGREN	3142E	00201566	Nov. 16, 2019	Nov. 15, 2020
<input checked="" type="checkbox"/>	6dB Attenuator	Talent	RA6A5-N-18	18103001	Nov. 16, 2019	Nov. 15, 2020
<input checked="" type="checkbox"/>	Preamplifier	HP	8447F	2805A02960	Nov. 24, 2019	Nov. 23, 2020
<input type="checkbox"/>	Broadband Antenna (Pre-amplifier)	ETS-LINDGREN	3142E-PA	00201891	Nov. 24, 2019	Nov. 23, 2020
<input type="checkbox"/>	6dB Attenuator	Talent	RA6A5-N-18	18103002	Nov. 24, 2019	Nov. 23, 2020
<input type="checkbox"/>	Horn Antenna	ETS-LINDGREN	3117	00164202	Nov. 16, 2019	Nov. 15, 2020
<input checked="" type="checkbox"/>	Horn Antenna (Pre-amplifier)	ETS-LINDGREN	3117-PA	00201874	May 18, 2019	May 18, 2020
<input type="checkbox"/>	Horn Antenna	ETS-LINDGREN	3116C	00200180	Jun. 23, 2019	Jun. 23, 2020
<input checked="" type="checkbox"/>	Horn Antenna (Pre-amplifier)	ETS-LINDGREN	3116C-PA	00202652	Nov. 16, 2019	Nov. 15, 2020
<input checked="" type="checkbox"/>	Multi device Controller	ETS-LINDGREN	7006-001	00160105	N/A	N/A
<input type="checkbox"/>	Wideband Radio Communication Tester	R&S	CMW500	120932	Jul. 19, 2019	Jul. 19, 2020
<input checked="" type="checkbox"/>	Test Software	Audix	e3	Software Version: 9.160323		

Conducted Emission Test Equipment List						
Used	Equipment	Manufacturer	Model No.	Serial Number	Cal. date (mm dd, yyyy)	Cal. Due date (mm dd, yyyy)
<input checked="" type="checkbox"/>	Receiver	R&S	ESR7	1316.3003K07-101181-K3	Nov. 24, 2019	Nov. 23, 2020
<input checked="" type="checkbox"/>	Pulse Limiter	R&S	ESH3-Z2	0357.8810.54	Nov. 24, 2019	Nov. 23, 2020
<input checked="" type="checkbox"/>	LISN	R&S	ESH2-Z5	860014/024	Nov. 24, 2019	Nov. 23, 2020
<input type="checkbox"/>	LISN	ETS-Lindgren	3816/2SH	00201088	Nov. 24, 2019	Nov. 23, 2020
<input checked="" type="checkbox"/>	Test Software	Audix	e3	Software Version: 9.160323		

Conducted RF test Equipment List						
Used	Equipment	Manufacturer	Model No.	Serial Number	Cal. date (mm dd, yyyy)	Cal. Due date (mm dd, yyyy)
<input checked="" type="checkbox"/>	EXA Spectrum Analyzer	KEYSIGHT	N9010A	MY51440197	Nov. 24, 2019	Nov. 23, 2020
<input checked="" type="checkbox"/>	USB Wideband Power Sensor	KEYSIGHT	U2021XA	MY55430035	Nov. 24, 2019	Nov. 23, 2020
<input type="checkbox"/>	USB Wideband Power Sensor	KEYSIGHT	U2021XA	MY55430023	Nov. 24, 2019	Nov. 23, 2020
<input type="checkbox"/>	Wideband Radio Communication Tester	R&S	CMW500	120932	Jul. 19, 2019	Jul. 19, 2020

Shenzhen UnionTrust Quality and Technology Co., Ltd.

Address: 16/F, Block A, Building 6, Baoneng Science and Technology Park, Qingxiang Road No.1, Longhua New District, Shenzhen, China

Tel: +86-755-28230888

Fax: +86-755-28230886

E-mail: info@uttlab.com

<http://www.uttlab.com>

UTTR-RF-RSS247-V1.0

4. TEST CONFIGURATION

4.1 ENVIRONMENTAL CONDITIONS FOR TESTING

4.1.1 Normal or Extreme Test Conditions

Environment Parameter	Selected Values During Tests		
Test Condition	Ambient		
	Temperature (°C)	Voltage (V)	Relative Humidity (%)
NT/NV	+15 to +35	3.7	20 to 75
Remark: 1) NV: Normal Voltage; NT: Normal Temperature			

4.1.2 Record of Normal Environment

Test Item	Temperature (°C)	Relative Humidity (%)	Pressure (kPa)	Tested by
Conducted Peak Output Power	25.0	36.0	100.15	Swift Liu
20 dB Bandwidth & Occupied Bandwidth				
Carrier Frequencies Separation				
Number of Hopping Channel				
Dwell Time				
Conducted Out of Band Emission	26.8	55.0	100.40	Asia Yan
Radiated Emissions				
Band Edge Measurement				

4.2 TEST CHANNELS

Mode	Tx/Rx Frequency	Test RF Channel Lists		
		Lowest(L)	Middle(M)	Highest(H)
GFSK (DH1, DH3, DH5)	2402 MHz to 2480 MHz	Channel 0	Channel 39	Channel 78
		2402 MHz	2441 MHz	2480 MHz
π /4DQPSK (DH1, DH3, DH5)	2402 MHz to 2480 MHz	Channel 0	Channel 39	Channel 78
		2402 MHz	2441 MHz	2480 MHz
8DPSK (DH1, DH3, DH5)	2402 MHz to 2480 MHz	Channel 0	Channel 39	Channel 78
		2402 MHz	2441 MHz	2480 MHz

4.3 EUT TEST STATUS

Type of Modulation	Tx Function	Description
GFSK/ π /4DQPSK/ 8DPSK	1Tx	1. Keep the EUT in continuously transmitting with Modulation test single 2. Keep the EUT in continuously transmitting with Modulation test Hopping Frequency.

Power Setting
Power Level Code: not applicable, test used software default power level.

Test Software
Test software name: Airoha.Too

Shenzhen UnionTrust Quality and Technology Co., Ltd.

Address: 16/F, Block A, Building 6, Baoneng Science and Technology Park, Qingxiang Road No.1, Longhua New District, Shenzhen, China

Tel: +86-755-28230888

Fax: +86-755-28230886

E-mail: info@uttlab.com

<http://www.uttlab.com>

UTTR-RF-RSS247-V1.0

4.4 PRE-SCAN

4.4.1 Pre-scan under all packets at middle channel

Conducted Average Power (dBm) for packets									
Type of Modulation	GFSK			$\pi/4$ DQPSK			8DPSK		
Packets	1-DH1	1-DH3	1-DH5	2-DH1	2-DH3	2-DH5	3-DH1	3-DH3	3-DH5
Power (dBm)	2.79	6.21	6.96	0.67	3.60	4.31	0.69	3.62	4.29

4.4.2 Worst-case data packets

Type of Modulation	Worst-case data rates
GFSK	1-DH5
$\pi/4$ DQPSK	2-DH5
8DPSK	3-DH5



4.4.3 Tested channel detail


Pre-Scan has been conducted to determine the worst-case mode from all possible combinations between available modulations, data packets and antenna ports (if EUT with antenna diversity architecture). Following channel(s) was (were) selected for the final test as listed below.

Type of Modulation	GFSK			$\pi/4$ DQPSK			8DPSK		
Data Packets	1-DH1	1-DH3	1-DH5	2-DH1	2-DH3	2-DH5	3-DH1	3-DH3	3-DH5
Available Channel	0 to 78								
Test Item	Test channel and choose of data packets								
AC Power Line Conducted Emission	Frequency Hopping Channel 0 to 78								
	Link								
Conducted Peak Output Power	Channel 0 & 39 & 78								
	<input type="checkbox"/>	<input type="checkbox"/>	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input checked="" type="checkbox"/>
20 dB Bandwidth	Channel 0 & 39 & 78								
	<input type="checkbox"/>	<input type="checkbox"/>	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input checked="" type="checkbox"/>
Carrier Frequencies Separation	Frequency Hopping Channel 0 to 78								
	<input type="checkbox"/>	<input type="checkbox"/>	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input checked="" type="checkbox"/>
Number of Hopping Channel	Frequency Hopping Channel 0 to 78								
	<input type="checkbox"/>	<input type="checkbox"/>	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input checked="" type="checkbox"/>
Dwell Time	Channel 39								
	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>
Conducted Out of Band Emission	Channel 0 & 39 & 78								
	<input type="checkbox"/>	<input type="checkbox"/>	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input checked="" type="checkbox"/>
Radiated Emissions	Channel 0 & 39 & 78								
	<input type="checkbox"/>	<input type="checkbox"/>	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>
Band Edge Measurements (Radiated)	Channel 0 & 78								
	<input type="checkbox"/>	<input type="checkbox"/>	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>
Remark:									
1. The mark "☑" means is chosen for testing;									
2. The mark "☐" means is not chosen for testing.									


4.5 TEST SETUP

4.5.1 For Radiated Emissions test setup

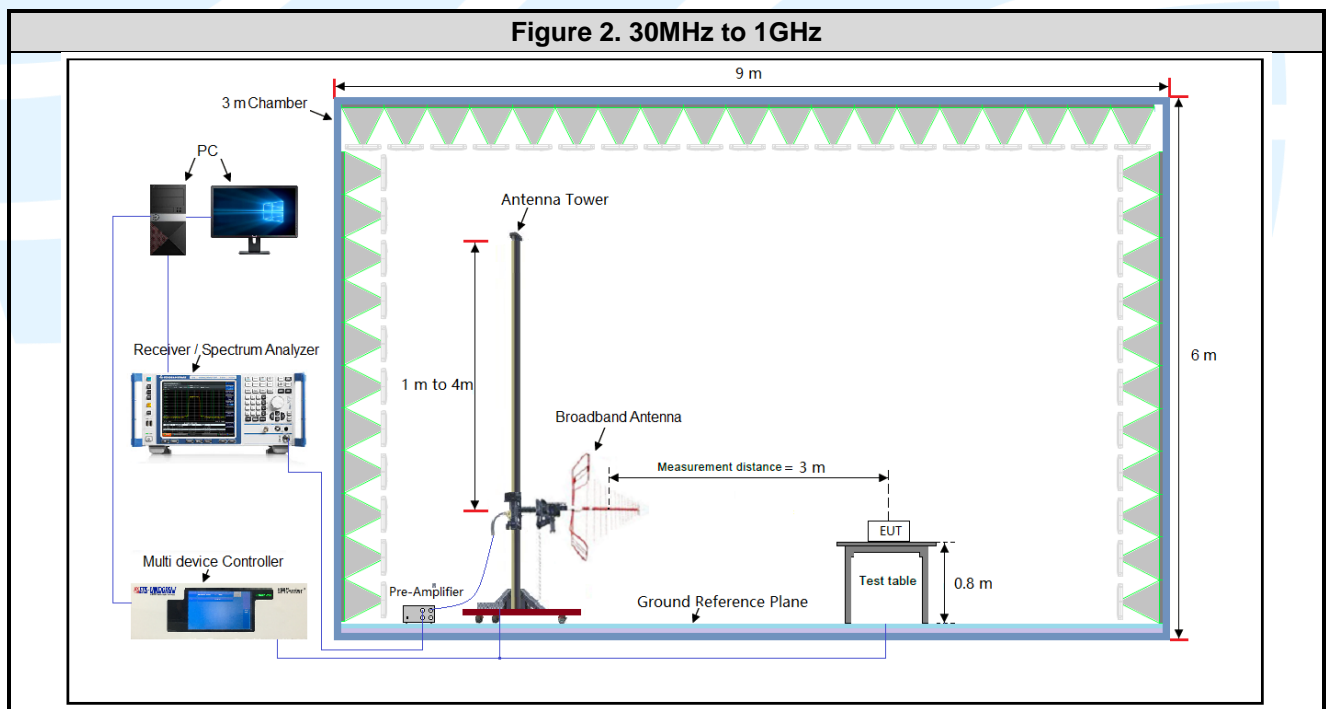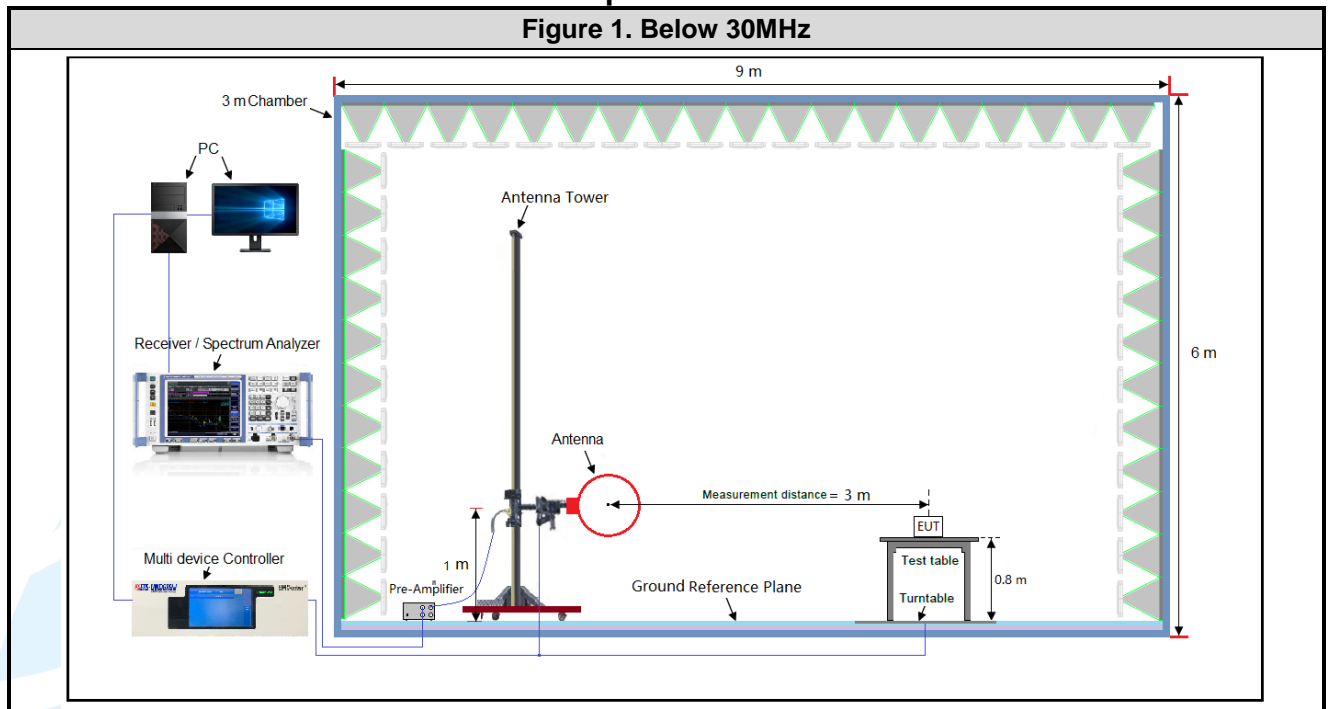


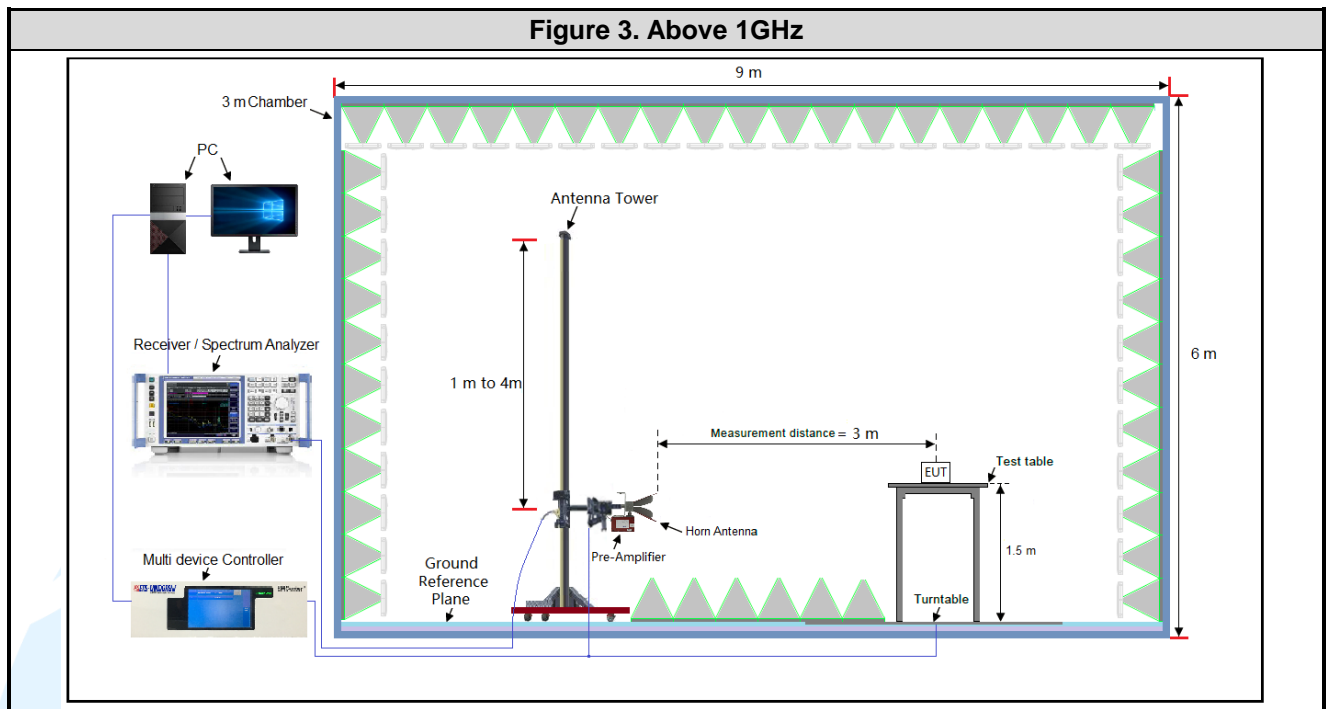

4.5.2 For Conducted Emissions test setup

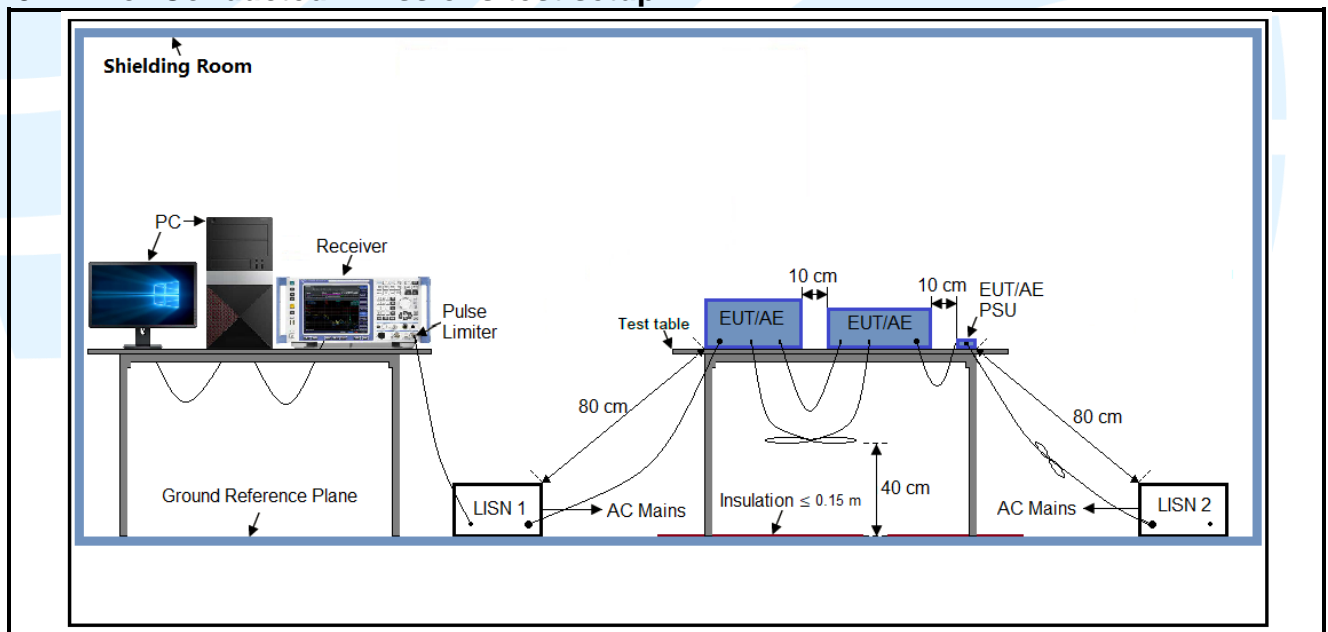

4.5.3 For Conducted RF test setup

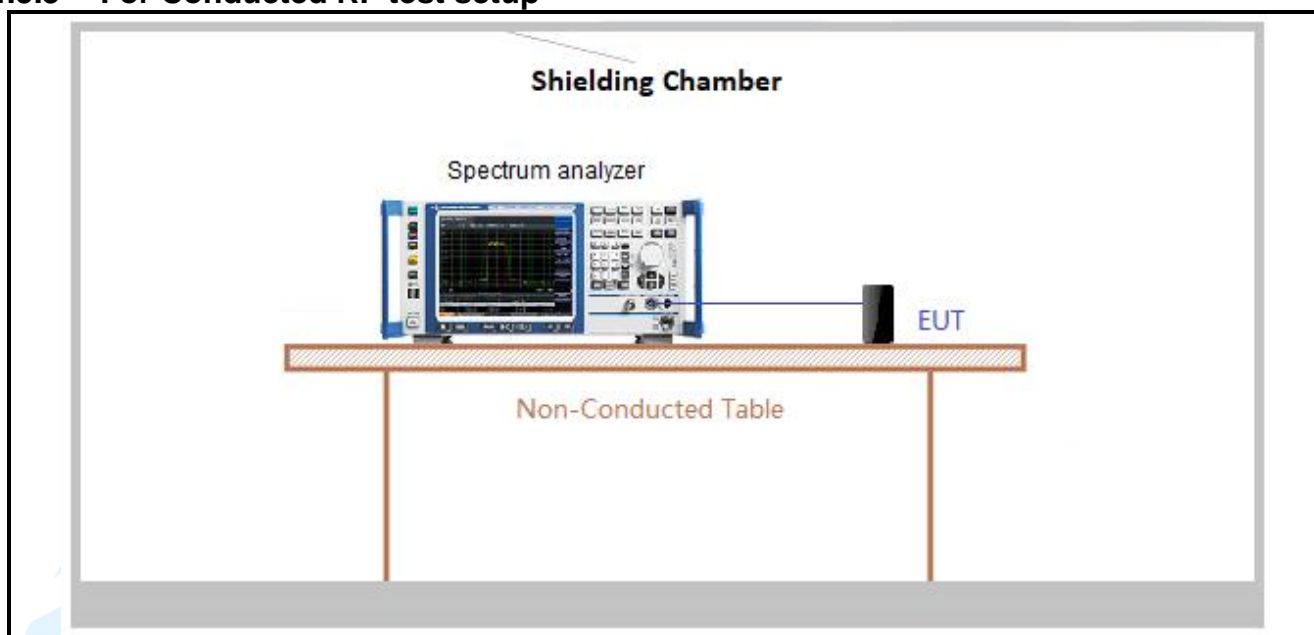

4.6 SYSTEM TEST CONFIGURATION

For emissions testing, the equipment under test (EUT) setup to transmit continuously to simplify the measurement methodology. Care was taken to ensure proper power supply voltages during testing. During testing, radiated emission were performed with the EUT set to transmit at the channel with highest output power as worst-case scenario. It was powered by a 3.8V battery. Only the worst case data were recorded in this test report.

The signal is maximized through rotation and placement in the three orthogonal axes. The antenna height and polarization are varied during the search for maximum signal level. The antenna height is varied from 1 to 4 meters. Radiated emissions are taken at three meters unless the signal level is too low for measurement at that distance. If necessary, a pre-amplifier is used and/or the test is conducted at a closer distance. Therefore, all final radiated testing was performed with the EUT in (see table below) orientation.

Frequency	Mode	Antenna Port	Worst-case axis positioning
Above 1GHz	1TX	Chain 0	Y axis

All readings are extrapolated back to the equivalent three meter reading using inverse scaling with distance. Analyzer resolution is 100 kHz or greater for frequencies below 1000 MHz. The resolution is 1 MHz or greater for frequencies above 1000 MHz. The spurious emissions more than 20 dB below the permissible value are not reported.

Radiated emission measurement were performed from the lowest radio frequency signal generated in the device which is greater than 9 kHz to the tenth harmonic of the highest fundamental frequency or to 40 GHz, whichever is lower.

4.7 DUTY CYCLE

Test Procedure: ANSI C63.10-2013 Clause 11.6.


Test Results

Type of Modulation	Packets	On Time (msec)	Period (msec)	Duty Cycle (linear)	Duty Cycle (%)	Duty Cycle Factor (dB)	1/ T Minimum VBW (kHz)	Average Factor (dB)
GFSK	1-DH5	2.8500	3.7500	0.76	76.00	1.19	0.35	-2.38

Remark:

- 1) Duty cycle= On Time/ Period;
- 2) Duty Cycle factor = $10 * \log(1/ \text{Duty cycle})$;
- 3) Average factor = $20 \log_{10} \text{Duty Cycle}$.

The test plot as follows

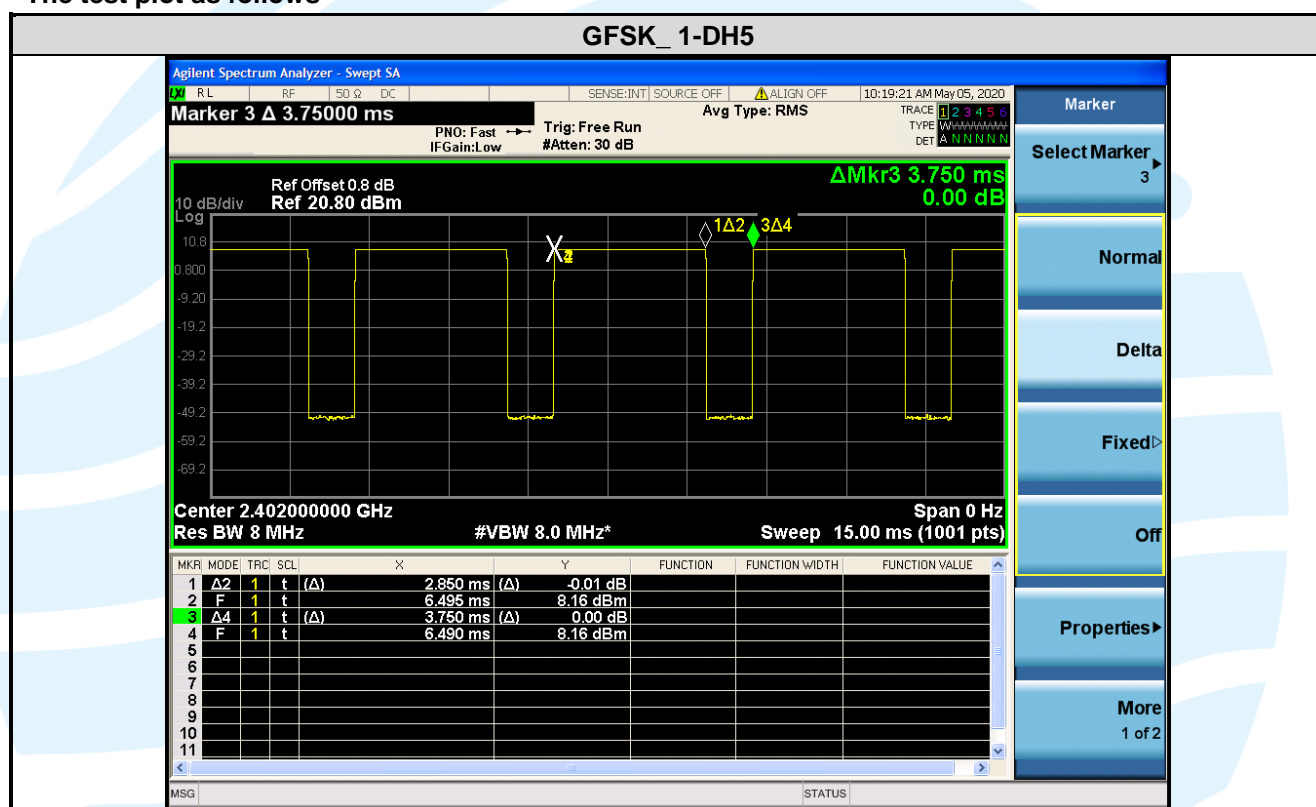

5. RADIO TECHNICAL REQUIREMENTS SPECIFICATION

5.1 REFERENCE DOCUMENTS FOR TESTING

No.	Identity	Document Title
1	FCC 47 CFR Part 2	Frequency allocations and radio treaty matters; general rules and regulations
2	FCC 47 CFR Part 15	Radio Frequency Devices
3	RSS-247 Issue 2	Digital Transmission Systems (DTSS), Frequency Hopping Systems (FHSs) and Licence-Exempt Local Area Network (LE-LAN) Devices
4	RSS-Gen Issue 5	General Requirements for Compliance of Radio Apparatus
5	ANSI C63.10-2013	American National Standard for Testing Unlicensed Wireless Devices
6	KDB 558074 D01 15.247 Meas Guidance v05r02	Guidance for compliance measurements on Digital Transmission Systems, Frequency Hopping Spread Spectrum system, and Hybrid system devices operating under Section 15.247 of the FCC rules

5.2 ANTENNA REQUIREMENT

Standard Requirement
<p>15.203 requirement: An intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator, the manufacturer may design the unit so that a broken antenna can be replaced by the user, but the use of a standard antenna jack or electrical connector is prohibited.</p> <p>15.247(b) (4) requirement: The conducted output power limit specified in paragraph (b) of this section is based on the use of antennas with directional gains that do not exceed 6 dBi. Except as shown in paragraph (c) of this section, if transmitting antennas of directional gain greater than 6 dBi are used, the conducted output power from the intentional radiator shall be reduced below the stated values in paragraphs (b)(1), (b)(2), and (b)(3) of this section, as appropriate, by the amount in dB that the directional gain of the antenna exceeds 6 dBi.</p> <p>RSS-Gen Issue 5, Section 6.8 requirement: According to RSS-Gen Issue 5, section 6.8, a transmitter can only be sold or operated with antennas with which it was certified. A transmitter may be certified with multiple antenna types. An antenna type comprises antennas having similar in-band and out-of-band radiation patterns.</p> <p>EUT Antenna: Antenna in the interior of the equipment and no consideration of replacement. The gain of the antenna is 0.03 dBi.</p>


5.3 CONDUCTED PEAK OUTPUT POWER


Test Requirement:	FCC 47 CFR Part 15 Subpart C Section 15.247 (b)(1) RSS-247 Issue 2, Section 5.4(b)
Test Method:	ANSI C63.10-2013 Section 7.8.5
Limit:	For FHSs operating in the band 2400-2483.5 MHz, the maximum peak conducted output power shall not exceed 1.0 W if the hopset uses 75 or more hopping channels; the maximum peak conducted output power shall not exceed 0.125 W if the hopset uses less than 75 hopping channels. The e.i.r.p. shall not exceed 4 W, except as provided in section 5.4(e). FHSs shall have hopping channel carrier frequencies separated by a minimum of 25 kHz or the 20 dB bandwidth of the hopping channel, whichever is greater. Alternatively, FHSs operating in the band 2400-2483.5 MHz may have hopping channel carrier frequencies that are separated by 25 kHz or two thirds of the 20 dB bandwidth of the hopping channel, whichever is greater, provided that the systems operate with an output power no greater than 0.125 W.
Test Procedure:	Remove the antenna from the EUT and then connect a low loss RF cable from the antenna port to the spectrum analyzer. a) Use the following spectrum analyzer settings: 1) Span: Approximately 5 x 20 dB bandwidth, centered on a hopping channel. 2) RBW > 20 dB bandwidth of the emission being measured. 3) VBW ≥ RBW. 4) Sweep: Auto. 5) Detector function: Peak. 6) Trace: Max hold. b) Allow trace to stabilize. c) Use the marker-to-peak function to set the marker to the peak of the emission. d) The indicated level is the peak output power, after any corrections for external attenuators and cables. e) A plot of the test results and setup description shall be included in the test report.
Test Setup:	Refer to section 4.5.3 for details.
Instruments Used:	Refer to section 3 for details
Test Results:	Pass

Type of Modulation	Peak Output Power (dBm)			Peak Output Power (mW)		
	Channel 0	Channel 39	Channel 78	Channel 0	Channel 39	Channel 78
GFSK	8.27	8.28	7.96	6.71	6.73	6.25
π/4 DQPSK	7.81	7.76	7.39	6.04	5.97	5.48
8DPSK	8.08	8.03	7.67	6.42	6.35	5.84

Note: The antenna gain of 0.03 dBi less than 6dBi maximum permission antenna gain value based on 125 mW peak output power limit.

The test plots as follows:

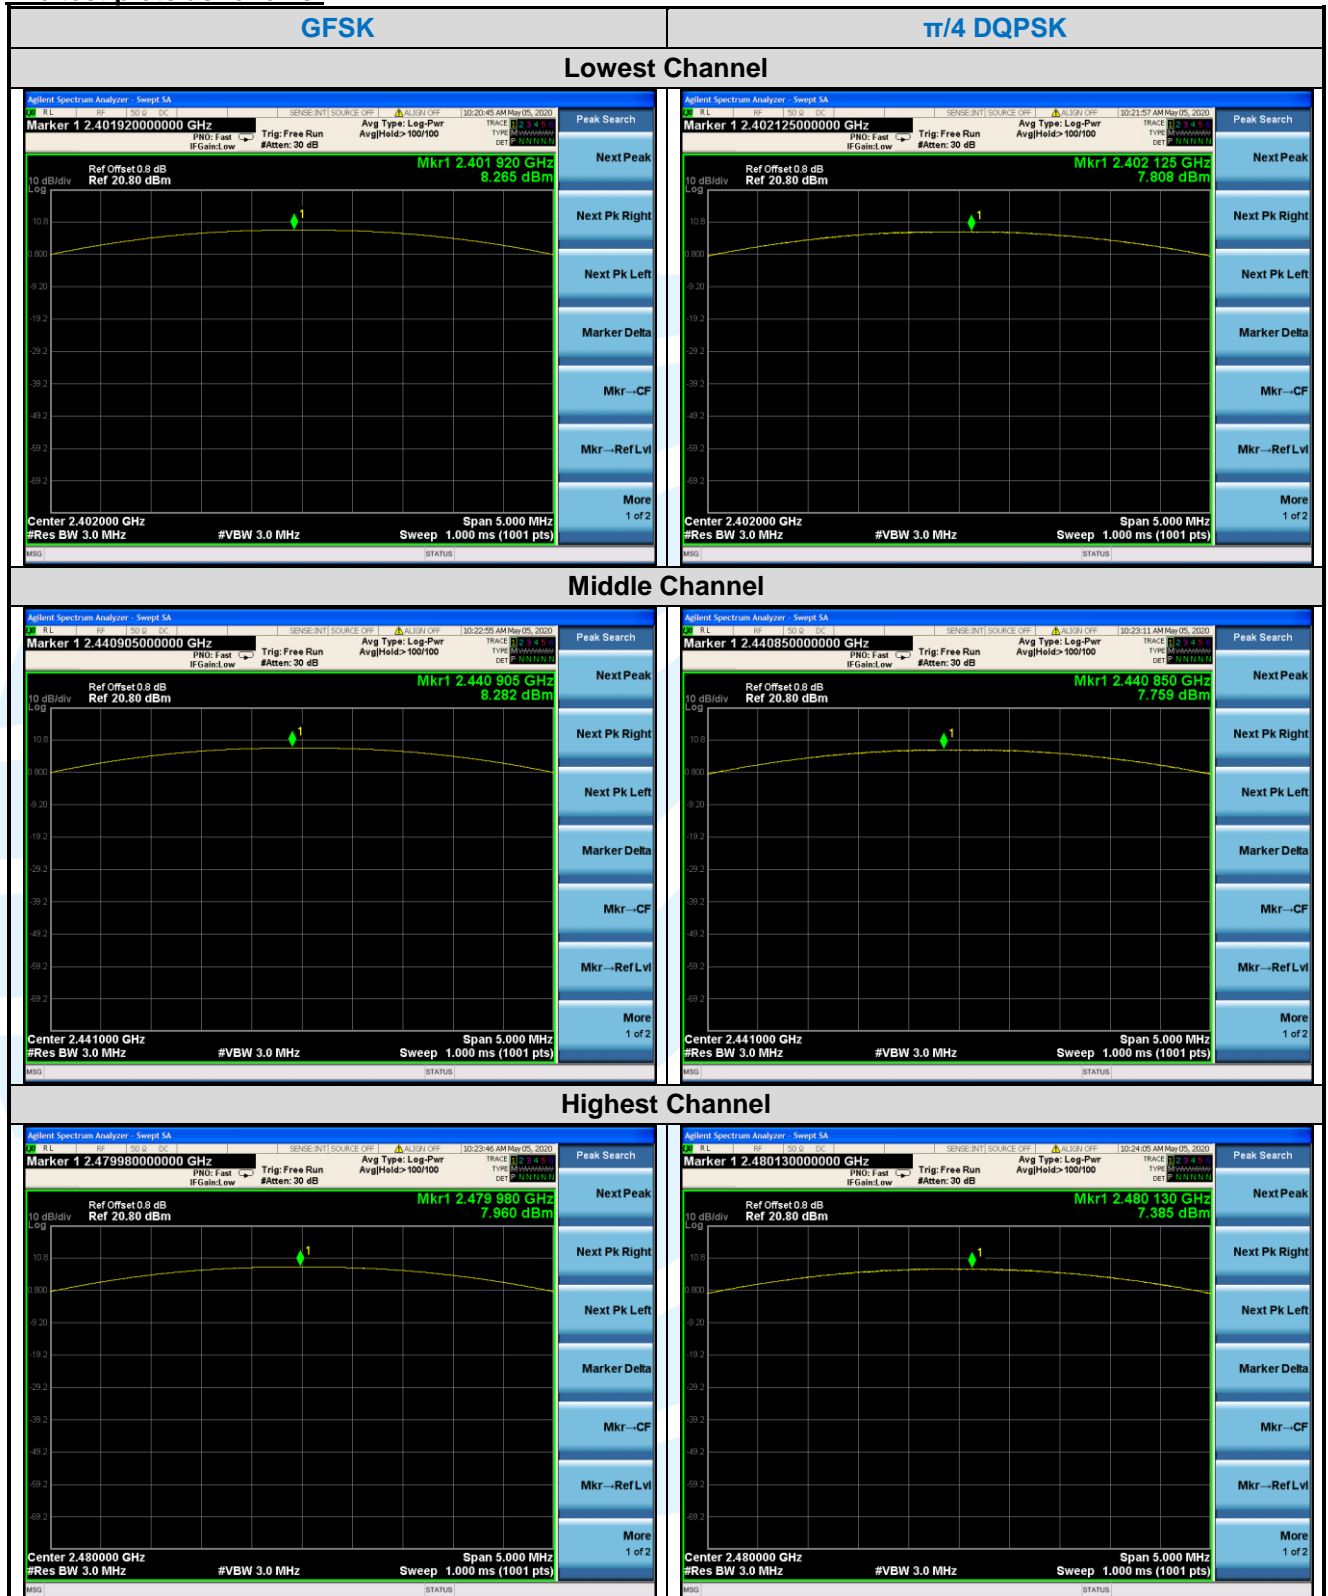

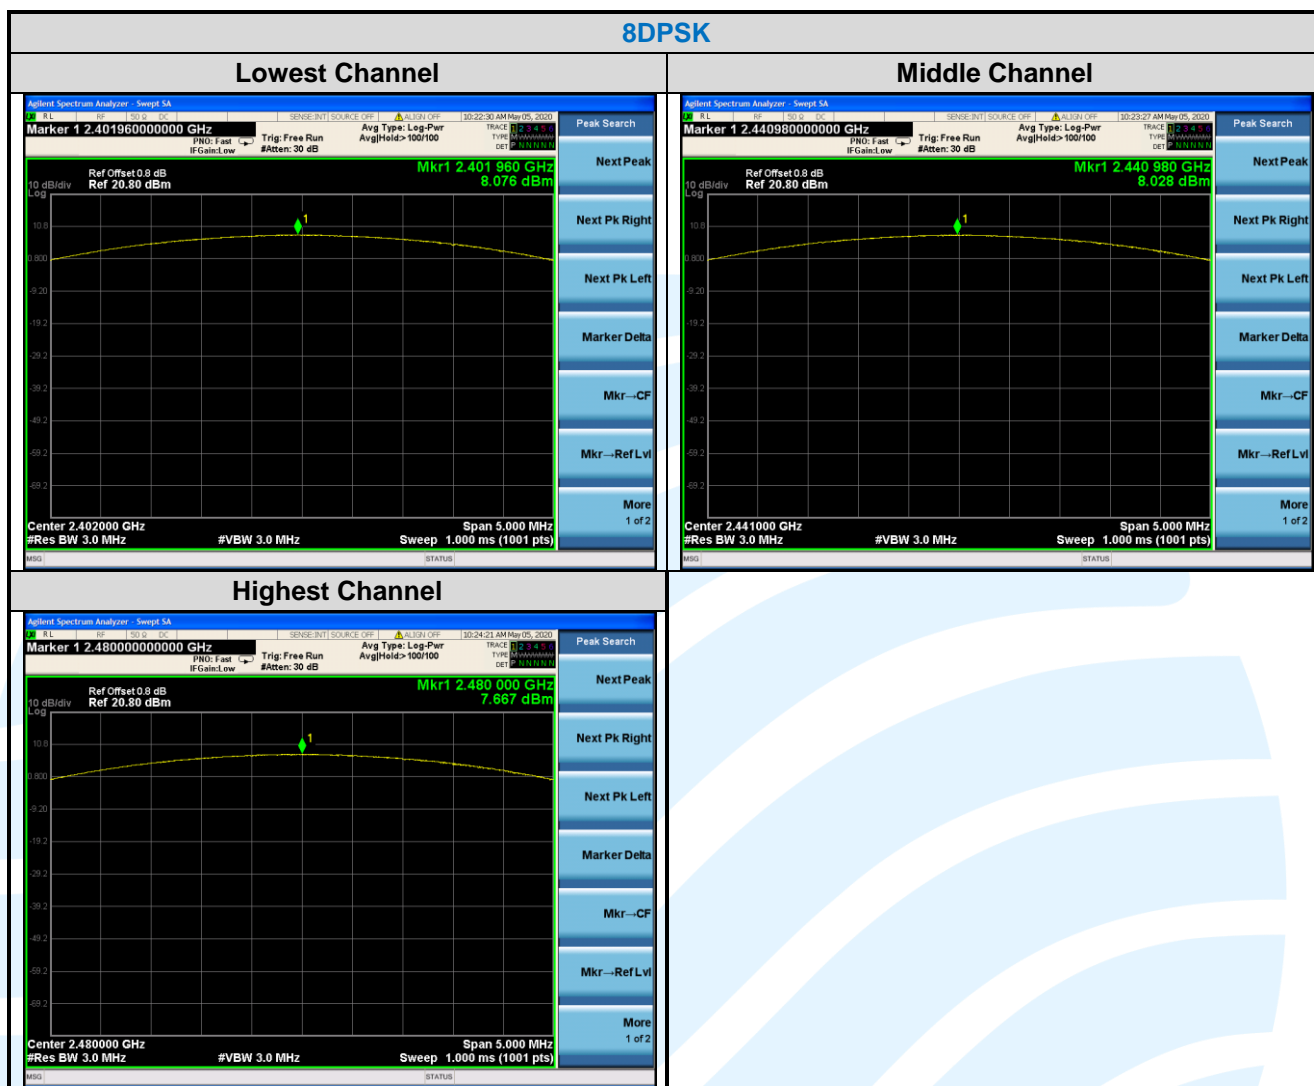

5.420 DB BANDWIDTH & OCCUPIED BANDWIDTH

FCC 47 CFR Part 15 Subpart C Section 15.247 (a)(1)

Test Requirement: RSS-247 Issue 2, Section 5.1(a)

RSS-Gen section 6.7

Test Method: ANSI C63.10-2013 Section 6.9.2

RSS-Gen section 6.7

Limit: None; for reporting purposes only.

Test Procedure: Remove the antenna from the EUT and then connect a low loss RF cable from the antenna port to the spectrum analyzer.

Use the following spectrum analyzer settings:

- Span = approximately 2 to 5 times the OBW, centered on a hopping channel.
- RBW = 1% to 5% of the OBW.
- VBW $\geq 3 \times$ RBW
- Sweep = auto;
- Detector function = peak
- Trace = max hold
- All the trace to stabilize, use the marker-to-peak function to set the marker to the peak of the emission, use the marker-delta function to measure and record the 20dB down bandwidth of the emission.

Note: The cable loss and attenuator loss were offset into measure device as an amplitude offset.


Test Setup: Refer to section 4.5.3 for details.

Instruments Used: Refer to section 3 for details

Test Results: Pass

Type of Modulation	20 dB Bandwidth (MHz)			Occupied Bandwidth (MHz)		
	Channel 0	Channel 39	Channel 78	Channel 0	Channel 39	Channel 78
GFSK	0.965	1.025	0.964	0.884	0.891	0.881
$\pi/4$ DQPSK	1.286	1.287	1.287	1.169	1.171	1.170
8DPSK	1.291	1.292	1.301	1.178	1.178	1.177

The test plots as follows:

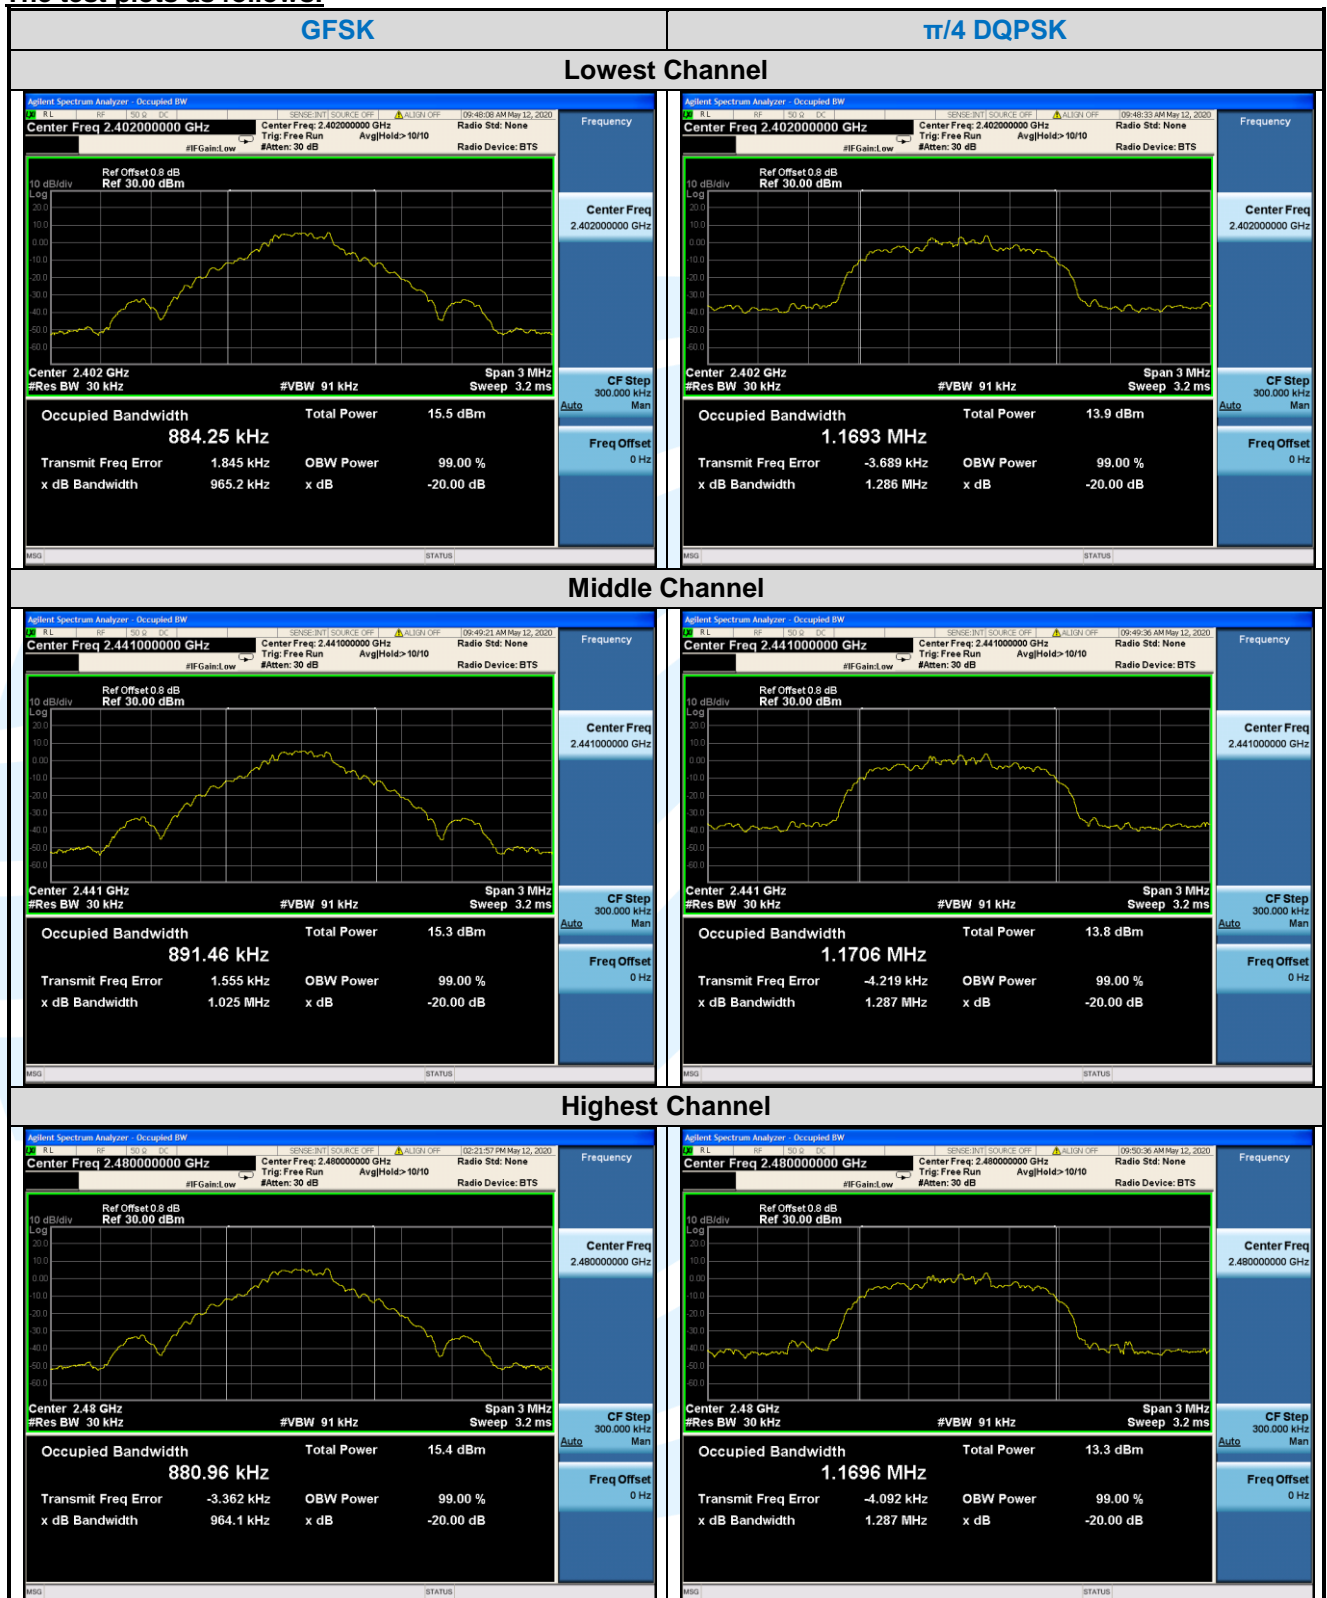

Shenzhen UnionTrust Quality and Technology Co., Ltd.

Address: 16/F, Block A, Building 6, Baoneng Science and Technology Park, Qingxiang Road No.1, Longhua New District, Shenzhen, China

Tel: +86-755-28230888

Fax: +86-755-28230886

E-mail: info@uttlab.com

<http://www.uttlab.com>

UTTR-RF-RSS247-V1.0



5.5 CARRIER FREQUENCIES SEPARATION

Test Requirement:	FCC 47 CFR Part 15 Subpart C Section 15.247 (a)(1) RSS-247 Issue 2, Section 5.1(b)
Test Method:	ANSI C63.10-2013 Section 7.8.2
Limit:	Frequency hopping systems operating in the 2400-2483.5 MHz band may have hopping channel carrier frequencies that are separated by 25 kHz or two-thirds of the 20 dB bandwidth of the hopping channel, whichever is greater. Alternatively, frequency hopping systems operating in the 2400-2483.5 MHz band may have hopping channel carrier frequencies that are separated by 25 kHz or two-thirds of the 20 dB bandwidth of the hopping channel, whichever is greater, provided the systems operate with an output power no greater than 125 mW.
Test Procedure:	Remove the antenna from the EUT and then connect a low loss RF cable from the antenna port to the spectrum analyzer. Use the following spectrum analyzer settings: <ul style="list-style-type: none"> a) Span: Wide enough to capture the peaks of two adjacent channels. b) RBW: Start with the RBW set to approximately 30% of the channel spacing; adjust as necessary to best identify the center of each individual channel. c) Video (or average) bandwidth (VBW) \geq RBW. d) Sweep: Auto. e) Detector function: Peak. f) Trace: Max hold. g) Allow the trace to stabilize. h) Use the marker-delta function to determine the separation between the peaks of the adjacent channels. <p>Note: The cable loss and attenuator loss were offset into measure device as an amplitude offset.</p>
Test Setup:	Refer to section 4.5.3 for details.
Instruments Used:	Refer to section 3 for details
Test Results:	Pass

Type of Modulation	Adjacent Channel Separation (MHz)	Minimum Limit (MHz)
	Channel 39	Channel 39
GFSK	1	0.683
$\pi/4$ DQPSK	1	0.858
8DPSK	1	0.867
Note: The minimum limit is two-third 20 dB bandwidth.		

The test plots as follows:



Shenzhen UnionTrust Quality and Technology Co., Ltd.

Address: 16/F, Block A, Building 6, Baoneng Science and Technology Park, Qingxiang Road No.1, Longhua New District, Shenzhen, China

Tel: +86-755-28230888

Fax: +86-755-28230886

E-mail: info@uttlab.com

<http://www.uttlab.com>

UTTR-RF-RSS247-V1.0