




Antenna information

Antenna Dimensions

Applications

1. Bluetooth
2. Wireless LAN
3. ISM band 2.4GHz wireless applications

Dimensions (Unit: mm)



(Top View)



(Bottom View)

Number	Terminal Name
①	INPUT
②	NC



(Side View)

Symbols	L	W	T	A
Dimensions	1.60 ± 0.20	0.80 ± 0.20	0.5 ± 0.20	0.30 ± 0.10



Shenzhen Yingfeng antenna technology Co., LTD

Network debugging antenna S parameter

Debug waveform









Efficiency and gain of antenna on simulated human head

LabSOCS			
Freq(MHz)	Gain(dBi)	Efficiency(dB)	Efficiency(%)
2400	3.526178935	-4.799684393	33.11551861
2410	3.58488467	-4.689804492	33.9640562
2420	3.656920246	-4.646133969	34.30730496
2430	3.776153058	-4.561718668	34.98067079
2440	3.750361741	-4.626823487	34.46018871
2450	3.655032387	-4.761320297	33.4093457
2460	3.499154149	-4.95480343	31.9535899
2470	3.292665906	-5.176824933	30.36110031
2480	3.088750927	-5.397653329	28.85590285
2490	2.761510054	-5.729737039	26.73168262
2500	2.509622706	-5.966118512	25.31559556
AVG	3.372839525	-5.028238413	31.5868142




Passive 3D directional map

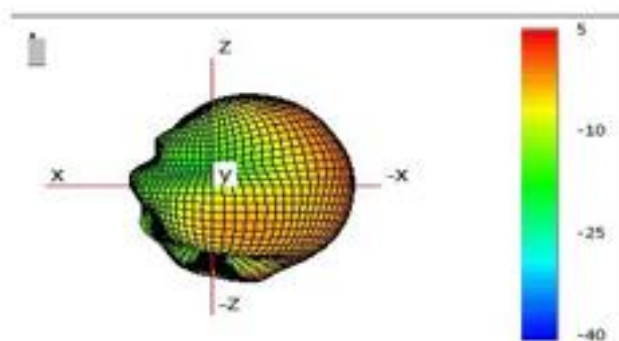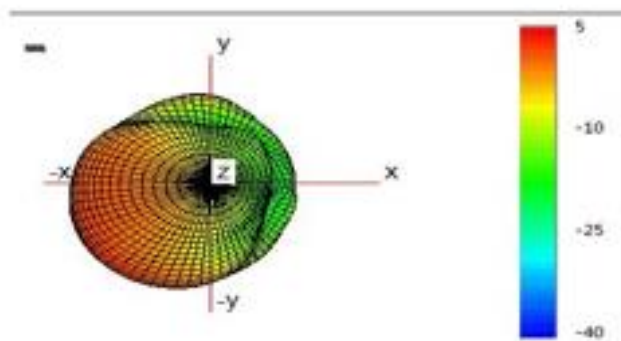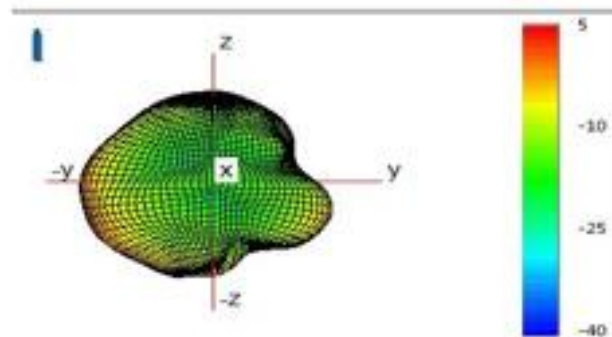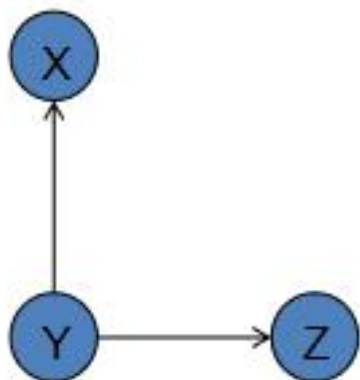



Shenzhen Yingfeng antenna technology Co., LTD

Sky Line passive 2D direction map

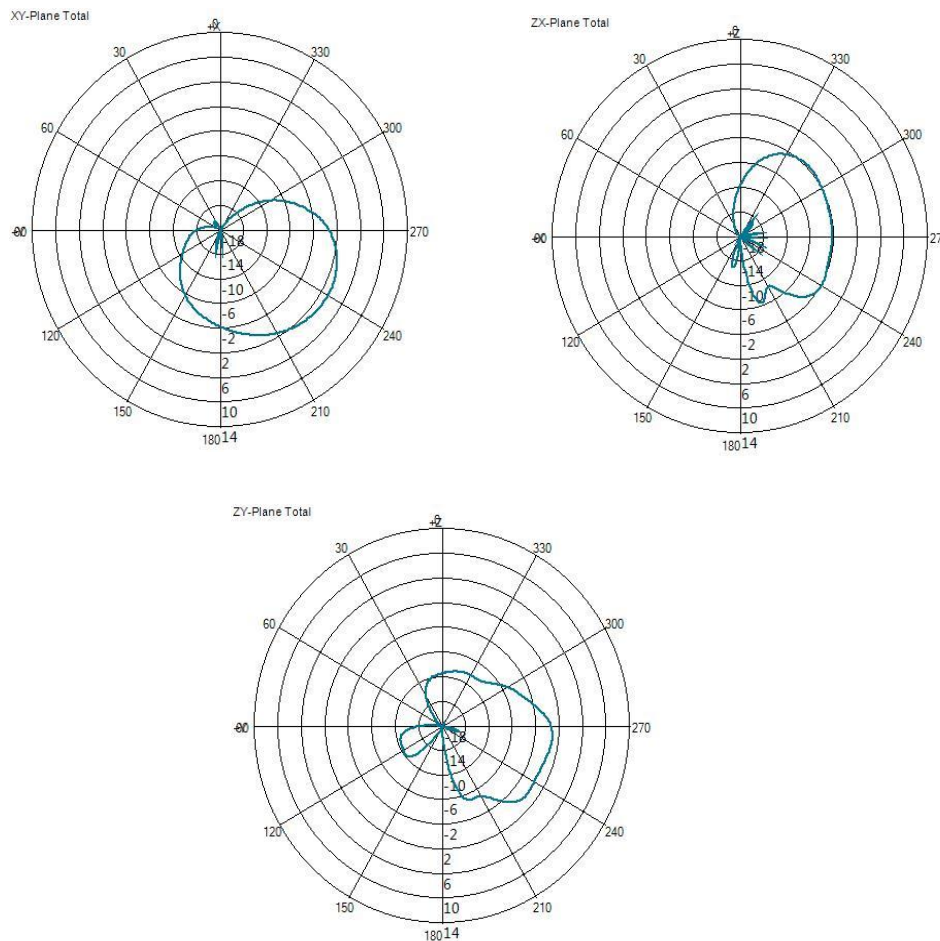




OTA active test data

Free space	Channel	TRP (dBm)	TIS (dBm)
A3012	CH 0	6.2	-89.7
	CH 39	6.7	-90.1
	CH 78	5.7	-88.6
Head ear mold	Channel	TRP (dBm)	TIS (dBm)
A3012	CH 0	5.1	-88.1
	CH 39	5.8	-88.3
	CH 78	4.1	-87.3




Shenzhen Yingfeng antenna technology Co., LTD

Darkroom test environment of the whole machine

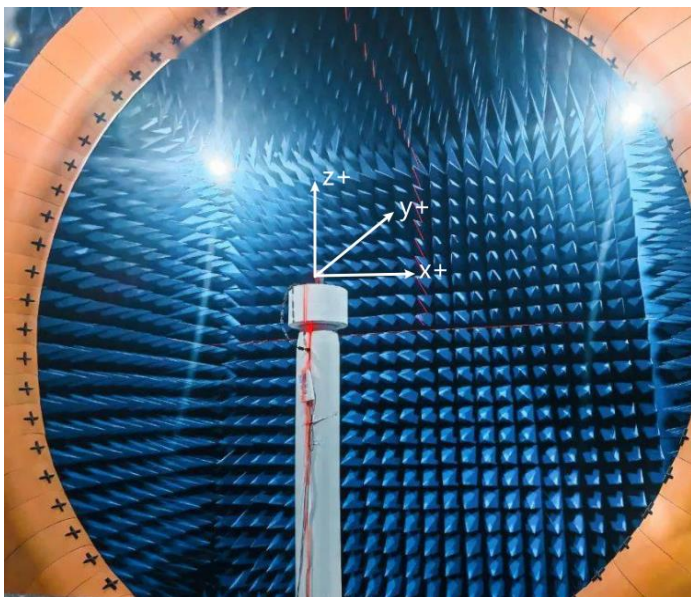

Darkroom test coordinate diagram (free)

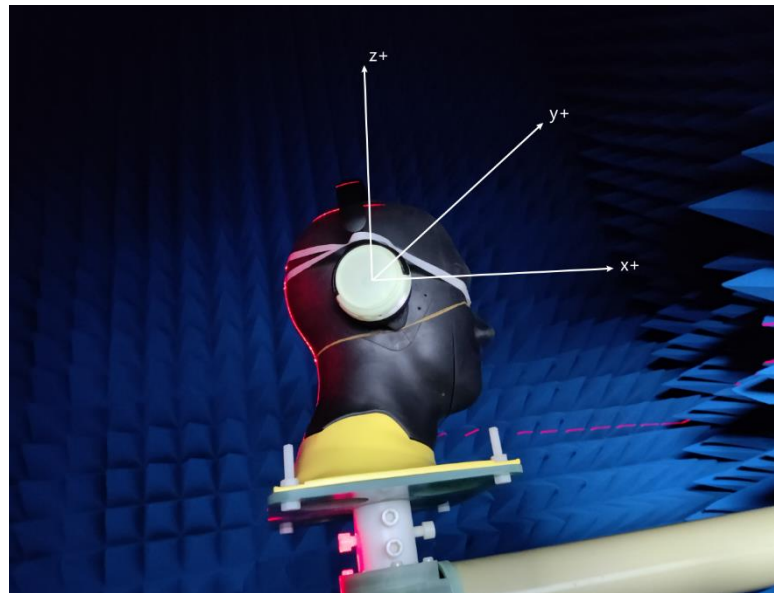

Darkroom test coordinate diagram (head model)