



# FCC PART 15C TEST REPORT

No. 25T04Z100220-013

for

**TCL Communication Ltd.**

**GSM/UMTS/LTE mobile phone**

**Model Name: T517A**

**FCC ID: 2ACCJB236**

with

**Hardware Version: 05**

**Software Version: 3A4G**

**Issued Date: 2025-3-24**

**Note:**

The test results in this test report relate only to the devices specified in this report. This report shall not be reproduced except in full without the written approval of CTTL.

**Test Laboratory:**

**CTTL, Telecommunication Technology Labs, CAICT**

No.52, HuayuanNorth Road, Haidian District, Beijing, P. R. China 100191.

Tel:+86(0)10-62304633-2512,Fax:+86(0)10-62304633-2504

Email:[cttl\\_terminals@caict.ac.cn](mailto:cttl_terminals@caict.ac.cn), website: [www.chinattl.com](http://www.chinattl.com)



No. 25T04Z100220-013

## **REPORT HISTORY**

Report Number	Revision	Description	Issue Date
25T04Z100220-013	Rev.0	1 <sup>st</sup> edition	2025-3-24

Note: the latest revision of the test report supersedes all previous version.

## **CONTENTS**

<b>1. TEST LABORATORY .....</b>	<b>5</b>
1.1. INTRODUCTION & ACCREDITATION .....	5
1.2. TESTING LOCATION .....	5
1.3. TESTING ENVIRONMENT .....	6
1.4. PROJECT DATA .....	6
1.5. SIGNATURE .....	6
<b>2. CLIENT INFORMATION .....</b>	<b>7</b>
2.1. APPLICANT INFORMATION .....	7
2.2. MANUFACTURER INFORMATION .....	7
<b>3. EQUIPMENT UNDER TEST (EUT) AND ANCILLARY EQUIPMENT (AE) .....</b>	<b>8</b>
3.1. ABOUT EUT .....	8
3.2. INTERNAL IDENTIFICATION OF EUT .....	8
3.3. INTERNAL IDENTIFICATION OF AE .....	8
3.4. NORMAL ACCESSORY SETTING .....	8
3.5. GENERAL DESCRIPTION .....	8
<b>4. REFERENCE DOCUMENTS .....</b>	<b>9</b>
4.1. DOCUMENTS SUPPLIED BY APPLICANT .....	9
4.2. REFERENCE DOCUMENTS FOR TESTING .....	9
<b>5. TEST RESULTS .....</b>	<b>10</b>
5.1. SUMMARY OF TEST RESULTS .....	10
5.2. STATEMENTS .....	10
<b>6. TEST FACILITIES UTILIZED .....</b>	<b>11</b>
<b>7. MEASUREMENT UNCERTAINTY .....</b>	<b>12</b>
7.1. PEAK OUTPUT POWER - CONDUCTED .....	12
7.2. FREQUENCY BAND EDGES - CONDUCTED .....	12
7.3. TRANSMITTER SPURIOUS EMISSION - CONDUCTED .....	12
7.4. TRANSMITTER SPURIOUS EMISSION - RADIATED .....	12
7.5. TIME OF OCCUPANCY (DWELL TIME) .....	12
7.6. 20DB BANDWIDTH .....	12
7.7. CARRIER FREQUENCY SEPARATION .....	13
7.8. AC POWERLINE CONDUCTED EMISSION .....	13
<b>ANNEX A: EUT PARAMETERS .....</b>	<b>14</b>
<b>ANNEX B: DETAILED TEST RESULTS .....</b>	<b>15</b>
B.1. MEASUREMENT METHOD .....	15
B.2. PEAK OUTPUT POWER .....	16
B.3. FREQUENCY BAND EDGES - CONDUCTED .....	18



No. 25T04Z100220-013

B.4. TRANSMITTER SPURIOUS EMISSION - CONDUCTED .....	25
B.5. RADIATED UNWANTED EMISSION .....	50
B.6. TIME OF OCCUPANCY (DWEIL TIME).....	61
B.7. 20dB BANDWIDTH.....	72
B.8. CARRIER FREQUENCY SEPARATION .....	78
B.9. NUMBER OF HOPPING CHANNELS .....	81
B.10. AC POWERLINE CONDUCTED EMISSION .....	85
B.11. ANTENNA REQUIREMENT .....	89
<b>ANNEX C: ACCREDITATION CERTIFICATE .....</b>	<b>90</b>



No. 25T04Z100220-013

## **1. Test Laboratory**

### **1.1. Introduction & Accreditation**

**Telecommunication Technology Labs, CAICT** is an ISO/IEC 17025:2017 accredited test laboratory under American Association for Laboratory Accreditation (A2LA) with lab code 7049.01, and is also an FCC accredited test laboratory (CN1349), and ISED accredited test laboratory (CAB identifier:CN0066). The detail accreditation scope can be found on A2LA website

### **1.2. Testing Location**

Conducted testing Location: CTTL(huayuan North Road)

Address: No. 52, Huayuan North Road, Haidian District, Beijing,  
P. R. China100191

Radiated testing Location: CTTL(huayuan North Road)

Address: No. 52, Huayuan North Road, Haidian District, Beijing,  
P. R. China100191

### 1.3. Testing Environment

Normal Temperature: 20-27℃  
Relative Humidity: 20-50%

### 1.4. Project data

Testing Start Date: 2025-2-10  
Testing End Date: 2025-3-21

### 1.5. Signature



---

Wu Le  
(Prepared this test report)



---

Sun Zhenyu  
(Reviewed this test report)



---

Hu Xiaoyu  
(Approved this test report)

## **2. Client Information**

### **2.1. Applicant Information**

Company Name: TCL Communication Ltd.  
Address /Post: 5/F, Building 22E, 22 Science Park East Avenue, Hong Kong Science  
Park, Shatin, NT, Hong Kong  
Contact: Ting Wang  
Email: ting.wang.hz@tcl.com  
Telephone: +86 752 2639091  
Fax: +86 755 36612000-81722

### **2.2. Manufacturer Information**

Company Name: TCL Communication Ltd.  
Address /Post: 5/F, Building 22E, 22 Science Park East Avenue, Hong Kong Science  
Park, Shatin, NT, Hong Kong  
Contact: Ting Wang  
Email: ting.wang.hz@tcl.com  
Telephone: +86 752 2639091  
Fax: +86 755 36612000-81722

### 3. Equipment Under Test (EUT) and Ancillary Equipment (AE)

#### 3.1. About EUT

Description	GSM/UMTS/LTE mobile phone
Model Name	T517A
FCC ID	2ACCJB236
Frequency Band	ISM 2400MHz~2483.5MHz
Type of Modulation	GFSK/ $\pi/4$ DQPSK/8DPSK
Number of Channels	79
Power Supply	3.91V DC by Battery
Antenna gain	-0.3dBi

#### 3.2. Internal Identification of EUT

EUT ID*	SN or IMEI	HW Version	SW Version	Date of receipt
UT12a	351434670000351/ 351434670000369	05	3A4G	2025-3-10
UT02a	351434670000039/ 351434670000047	05	3A4G	2025-2-10

\*EUT ID: is used to identify the test sample in the lab internally.

#### 3.3. Internal Identification of AE

AE ID*	Description	Model	Manufacturer
AE1	Battery1	TLp050C7	Dongguan Veken Battery Co., Ltd.
AE2	Battery2	TLp050CB	Shenzhen Aerospace Electronic Co., Ltd.
AE3	Charger1	QC13US-N	ShenZhen BajunDa Electronics Co.,Ltd
AE4	USB Cable1	JWUB1686-M01R	Huizhou Juwei Electronics Co.,Ltd
AE5	USB Cable2	FKY-23-367	Qiyang Fukangyuan Electronic Technology Co., Ltd.

\*AE ID: is used to identify the test sample in the lab internally.

#### 3.4. Normal Accessory setting

Fully charged battery should be used during the test.

#### 3.5. General Description

The Equipment Under Test (EUT) is a model of GSM/UMTS/LTE mobile phone with integrated antenna. It consists of normal options: lithium battery, charger. Manual and specifications of the EUT were provided to fulfill the test. Samples undergoing test were selected by the Client.



## 4. Reference Documents

### 4.1. Documents supplied by applicant

EUT parameters, referring to Annex A for detailed information, is supplied by the client or manufacturer, which is the basis of testing.

### 4.2. Reference Documents for testing

The following documents listed in this section are referred for testing.

Reference	Title	Version
FCC Part15	FCC CFR 47, Part 15, Subpart C:	2024
	15.205 Restricted bands of operation;	
	15.209 Radiated emission limits, general requirements;	
ANSI C63.10	15.247 Operation within the bands 902–928MHz, 2400–2483.5 MHz, and 5725–5850 MHz.	June,2013
	American National Standard of Procedures for Compliance Testing of Unlicensed Wireless Devices	

## 5. Test Results

### 5.1. Summary of Test Results

Abbreviations used in this clause:

**P** Pass, The EUT complies with the essential requirements in the standard.

**F** Fail, The EUT does not comply with the essential requirements in the standard

**NA** Not Applicable, The test was not applicable

**NP** Not Performed, The test was not performed by CTTL

SUMMARY OF MEASUREMENT RESULTS	Sub-clause	Verdict
Peak Output Power	15.247 (b)(1)	<b>P</b>
Frequency Band Edges- Conducted	15.247 (d)	<b>P</b>
Transmitter Spurious Emission - Conducted	15.247 (d)	<b>P</b>
Radiated Unwanted Emission	15.247, 15.205, 15.209	<b>P</b>
Time of Occupancy (Dwell Time)	15.247 (a) (1)(iii)	<b>P</b>
20dB Bandwidth	15.247 (a)(1)	<b>NA</b>
Carrier Frequency Separation	15.247 (a)(1)	<b>P</b>
Number of hopping channels	15.247 (a)(iii)	<b>P</b>
AC Powerline Conducted Emission	15.107, 15.207	<b>P</b>
Antenna Requirement	15.203	<b>P</b>

Please refer to **ANNEX A** for detail.

The measurement is made according to ANSI C63.10.

### 5.2. Statements

CTTL has evaluated the test cases requested by the applicant /manufacturer as listed in section 5.1 of this report for the EUT specified in section 3 according to the standards or reference documents listed in section 4.2

## 6. Test Facilities Utilized

### Conducted test system

No.	Equipment	Model	Serial Number	Manufacturer	Calibration Period	Calibration Due date
1	Vector Signal Analyzer	FSQ26	100024	R&S	1 year	2026-03-09
2	Bluetooth Tester	CBT	100315	R&S	1 year	2026-03-08
3	Test Receiver	ESCI	100344	R&S	1 year	2025-04-01
4	LISN	ENV216	101200	R&S	1 year	2025-05-16
5	Shielding Room	S81	/	ETS-Lindgren	/	/

### Radiated emission test system

No.	Equipment	Model	Serial Number	Manufacturer	Calibration Period	Calibration Due date
1	Test Receiver	ESW44	103023	Rohde & Schwarz	1 year	2025-06-06
2	EMI Antenna	VULB9163	01222	Schwarzbeck	1 year	2025-09-11
3	EMI Antenna	3115	00167250	ETS-Lindgren	1 year	2025-04-11
4	EMI Antenna	3116	2663	ETS-Lindgren	1 year	2025-03-21

## 7. Measurement Uncertainty

### 7.1. Peak Output Power - Conducted

Measurement Uncertainty:

Measurement Uncertainty (k=2)	0.66dB
-------------------------------	--------

### 7.2. Frequency Band Edges - Conducted

Measurement Uncertainty:

Measurement Uncertainty (k=2)	0.66dB
-------------------------------	--------

### 7.3. Transmitter Spurious Emission - Conducted

Measurement Uncertainty:

Frequency Range	Uncertainty (k=2)
30 MHz ~ 8 GHz	1.22dB
8 GHz ~ 12.75 GHz	1.51dB
12.7GHz ~ 26 GHz	1.51dB

### 7.4. Transmitter Spurious Emission - Radiated

Measurement Uncertainty:

Frequency Range	Uncertainty(dBm) (k=2)
9kHz-30MHz	/
$30\text{MHz} \leq f \leq 1\text{GHz}$	4.72
$1\text{GHz} \leq f \leq 18\text{GHz}$	4.84
$18\text{GHz} \leq f \leq 40\text{GHz}$	5.12

### 7.5. Time of Occupancy (Dwell Time)

Measurement Uncertainty:

Measurement Uncertainty (k=2)	0.88ms
-------------------------------	--------

### 7.6. 20dB Bandwidth

Measurement Uncertainty:

Measurement Uncertainty (k=2)	61.936Hz
-------------------------------	----------

### 7.7. Carrier Frequency Separation

#### Measurement Uncertainty:

Measurement Uncertainty (k=2)	61.936Hz
-------------------------------	----------

### 7.8. AC Powerline Conducted Emission

#### Measurement Uncertainty:

Measurement Uncertainty (k=2)	3.08dB
-------------------------------	--------



No. 25T04Z100220-013

## **ANNEX A: EUT parameters**

Disclaimer: The antenna gain provided by the client may affect the validity of the measurement results in this report, and the client shall bear the impact and consequences arising therefrom.


## **ANNEX B: Detailed Test Results**

### **B.1. Measurement Method**

#### **B.1.1. Conducted Measurements**

The measurement is made according to ANSI C63.10.

- 1). Connect the EUT to the test system correctly.
- 2). Set the EUT to the required work mode (Transmitter, receiver or transmitter & receiver).
- 3). Set the EUT to the required channel.
- 4). Set the EUT hopping mode (hopping or hopping off).
- 5). Set the spectrum analyzer to start measurement.
- 6). Record the values. Vector Signal Analyzer

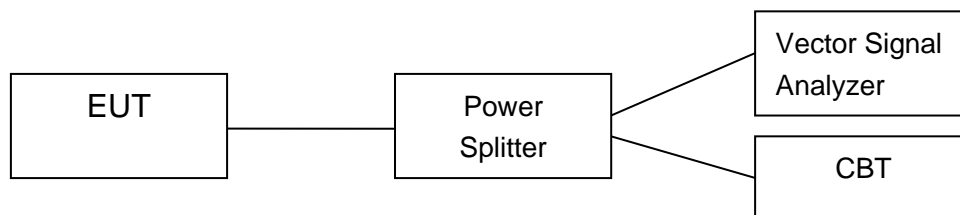

#### **B.1.2. Radiated Emission Measurements**

The measurement is made according to ANSI C63.10

The radiated emission test is performed in semi-anechoic chamber. The EUT was placed on a non-conductive table with 80cm above the ground plane for measurement below 1GHz and 1.5m above the ground plane for measurement above 1GHz. The measurement antenna was placed at a distance of 3 meters from the EUT. The test is carried out on both vertical and horizontal polarization and only maximization result of both polarizations is kept. During the test, the turntable is rotated from 0° to 360° and the measurement antenna is moved from 1m to 4m to get the maximization result. The maximization process was repeated with the EUT positioned in each of its three orthogonal orientations.

## B.2. Peak Output Power

### B.2.1. Peak Output Power – Conducted

**Method of Measurement: See ANSI C63.10-clause 7.8.5**

a) Use the following spectrum analyzer settings:

- Span: 6MHz
- RBW: 3MHz
- VBW: 3MHz
- Sweep time: 2.5ms
- Detector function: peak
- Trace: max hold

b) Allow trace to stabilize.

c) Use the marker-to-peak function to set the marker to the peak of the emission.

d) The indicated level is the peak output power.

#### Measurement Limit:

Standard	Limits	
FCC Part 15.247 (b)(1)	Bandwidth $\leq$ 1MHz	30dBm (1W)
	Bandwidth $>$ 1MHz	21dBm (125mW)

#### Measurement Results:

##### For GFSK

Channel	Ch 0 2402 MHz	Ch 39 2441 MHz	Ch 78 2480 MHz	Conclusion
Peak Conducted Output Power (dBm)	10.21	9.87	10.13	P

##### For $\pi/4$ DQPSK

Channel	Ch 0 2402 MHz	Ch 39 2441 MHz	Ch 78 2480 MHz	Conclusion
Peak Conducted Output Power (dBm)	9.25	9.65	9.88	P

##### For 8DPSK

Channel	Ch 0 2402 MHz	Ch 39 2441 MHz	Ch 78 2480 MHz	Conclusion
Peak Conducted Output Power (dBm)	9.19	9.66	9.89	P

**Conclusion: PASS**



**B.2.2. E.I.R.P.**

The radiated E.I.R.P. is listed below:

Antenna gain = -0.3dBi

**For GFSK**

Channel	Ch 0 2402 MHz	Ch 39 2441 MHz	Ch 78 2480 MHz	Conclusion
E.I.R.P (dBm)	9.91	9.57	9.83	P

**For  $\pi/4$  DQPSK**

Channel	Ch 0 2402 MHz	Ch 39 2441 MHz	Ch 78 2480 MHz	Conclusion
E.I.R.P (dBm)	8.95	9.35	9.58	P

**For 8DPSK**

Channel	Ch 0 2402 MHz	Ch 39 2441 MHz	Ch 78 2480 MHz	Conclusion
E.I.R.P (dBm)	8.89	9.36	9.59	P

Note: E.I.R.P. are calculated with the antenna gain.

**Conclusion: PASS**

### B.3. Frequency Band Edges – Conducted

#### Method of Measurement: See ANSI C63.10-clause 7.8.6

Connect the spectrum analyzer to the EUT using an appropriate RF cable connected to the EUT output. Configure the spectrum analyzer settings as described below (be sure to enter all losses between the unlicensed wireless device output and the spectrum analyzer).

- Span: 10 MHz
- Resolution Bandwidth: 100 kHz
- Video Bandwidth: 300 kHz
- Sweep Time: Auto
- Detector: Peak
- Trace: max hold

Place a marker at the end of the restricted band closest to the transmit frequency to show compliance. Also measure any emissions in the restricted bands. Save the spectrum analyzer plot. Repeat for each power and modulation for lowest and highest channel.

Observe the stored trace and measure the amplitude delta between the peak of the fundamental and the peak of the band-edge emission. This is not an absolute field strength measurement; it is only a relative measurement to determine the amount by which the emission drops at the band edge relative to the highest fundamental emission level.

#### Measurement Limit:

Standard	Limit (dBc)
FCC 47 CFR Part 15.247 (d)	< -20

#### Measurement Result:

##### For GFSK

Channel	Hopping	Band Edge Power ( dBc)		Conclusion
0	Hopping OFF	Fig.1	-62.64	P
	Hopping ON	Fig.2	-62.40	P
78	Hopping OFF	Fig.3	-66.07	P
	Hopping ON	Fig.4	-67.53	P

##### For $\pi/4$ DQPSK

Channel	Hopping	Band Edge Power ( dBc)		Conclusion
0	Hopping OFF	Fig.5	-57.23	P
	Hopping ON	Fig.6	-64.80	P
78	Hopping OFF	Fig.7	-66.21	P
	Hopping ON	Fig.8	-67.77	P

##### For 8DPSK

Channel	Hopping	Band Edge Power ( dBc)		Conclusion
0	Hopping OFF	Fig.9	-58.66	P
	Hopping ON	Fig.10	-60.07	P

78	Hopping OFF	Fig.11	-65.11	P
	Hopping ON	Fig.12	-64.88	P

**Conclusion: PASS**

**Test graphs as below**

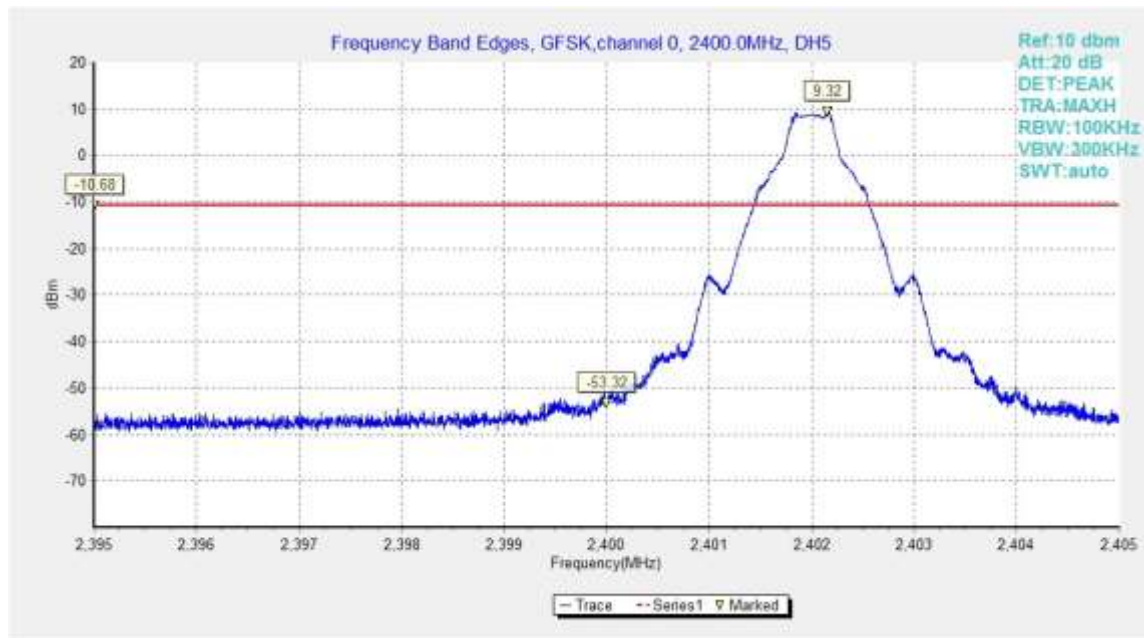


Fig.1. Frequency Band Edges: GFSK, Channel 0, Hopping Off

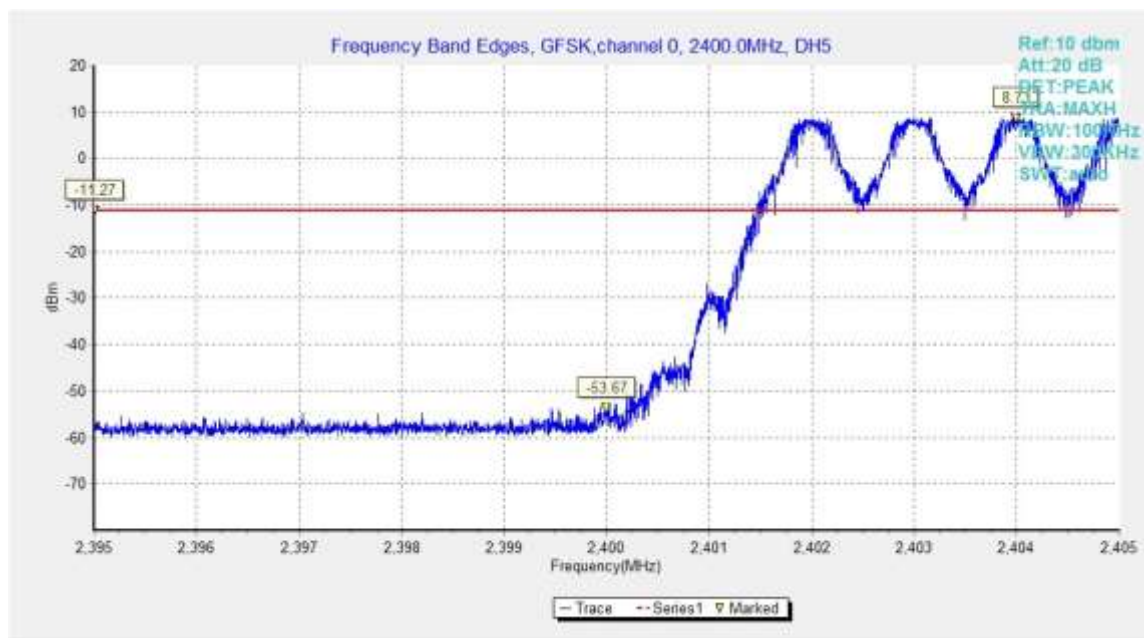


Fig.2. Frequency Band Edges: GFSK, Channel 0, Hopping On

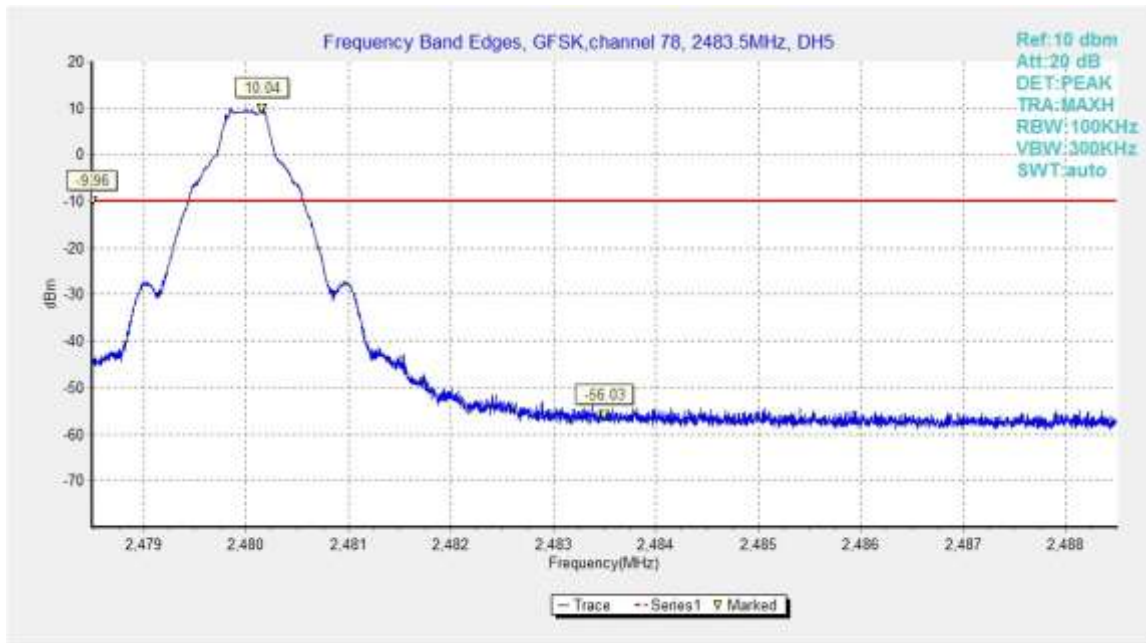


Fig.3. Frequency Band Edges: GFSK, Channel 78, Hopping Off

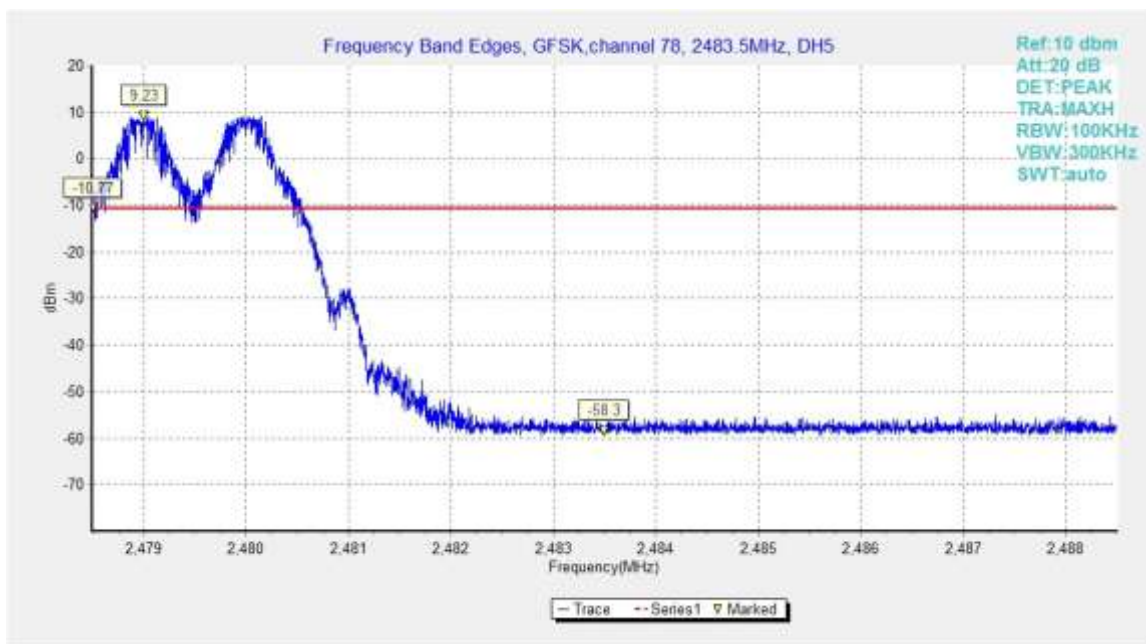


Fig.4. Frequency Band Edges: GFSK, Channel 78, Hopping On

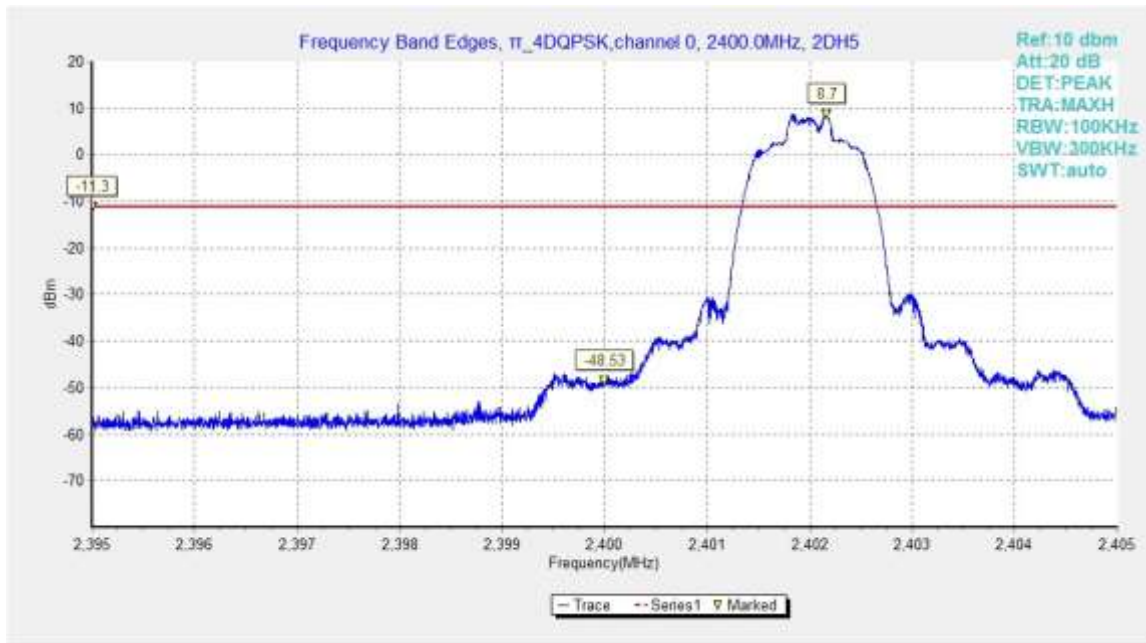


Fig.5. Frequency Band Edges:  $\pi/4$  DQPSK, Channel 0, Hopping Off

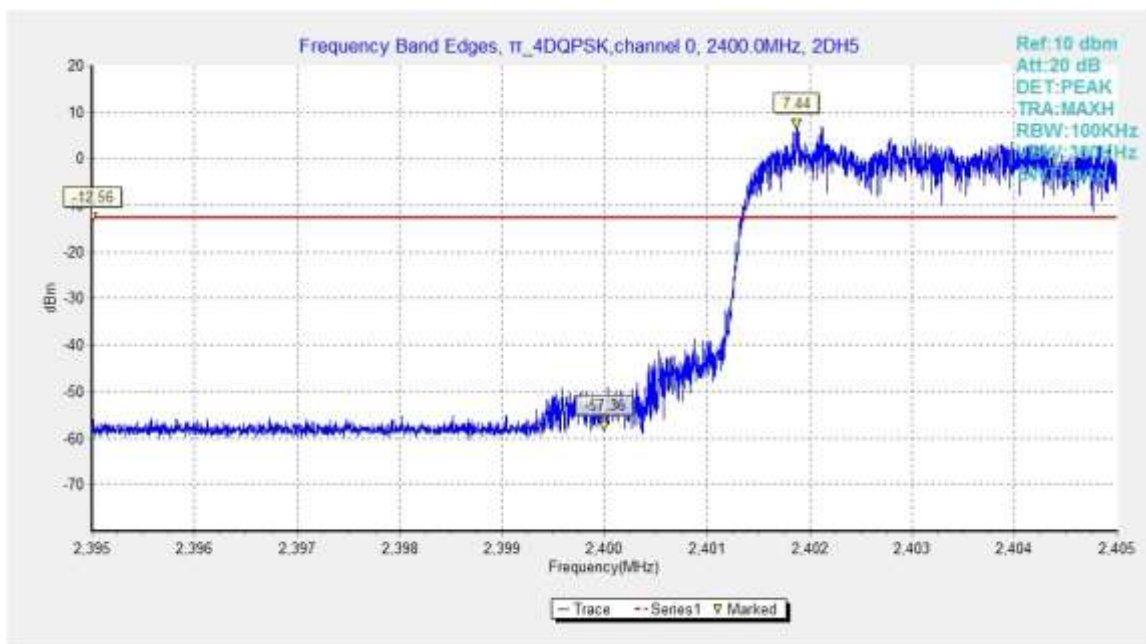


Fig.6. Frequency Band Edges:  $\pi/4$  DQPSK, Channel 0, Hopping On



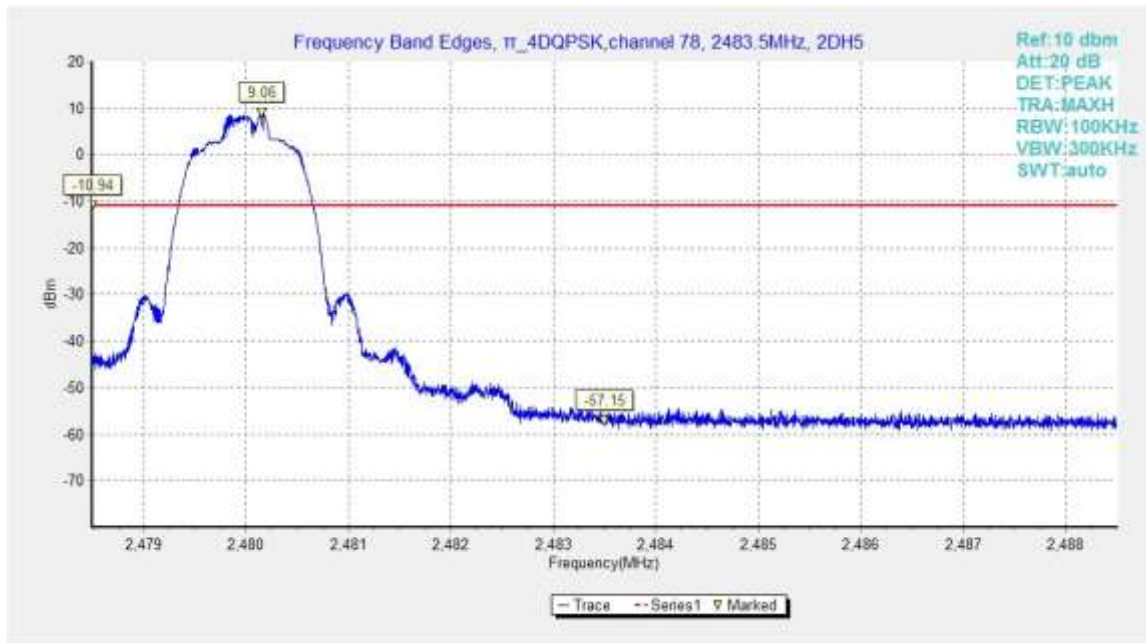


Fig.7. Frequency Band Edges:  $\pi/4$  DQPSK, Channel 78, Hopping Off

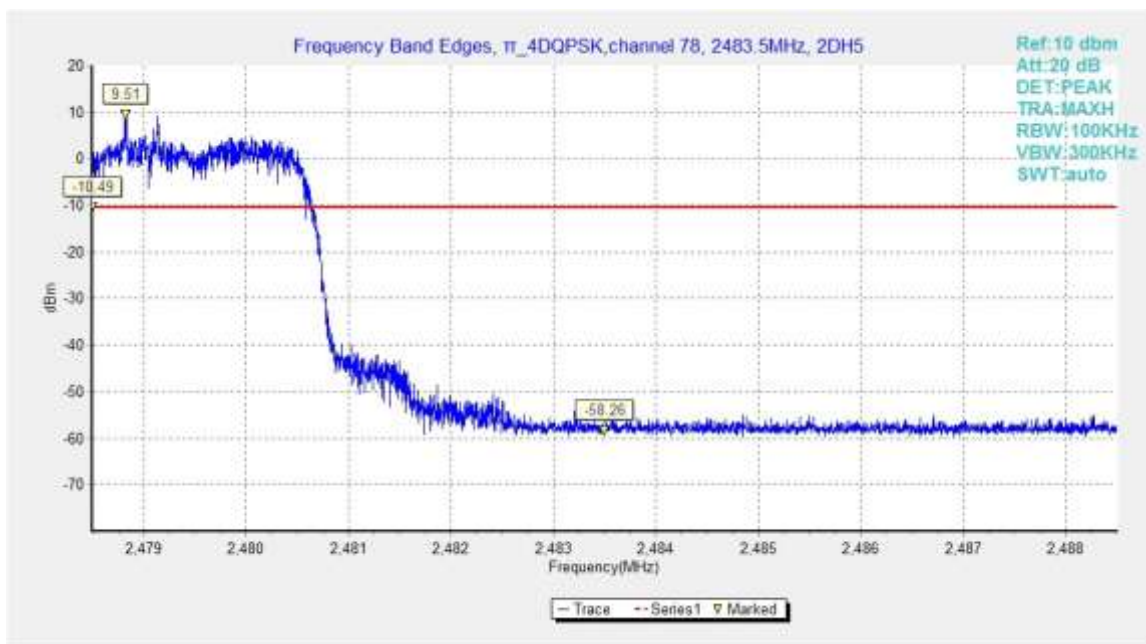


Fig.8. Frequency Band Edges:  $\pi/4$  DQPSK, Channel 78, Hopping On

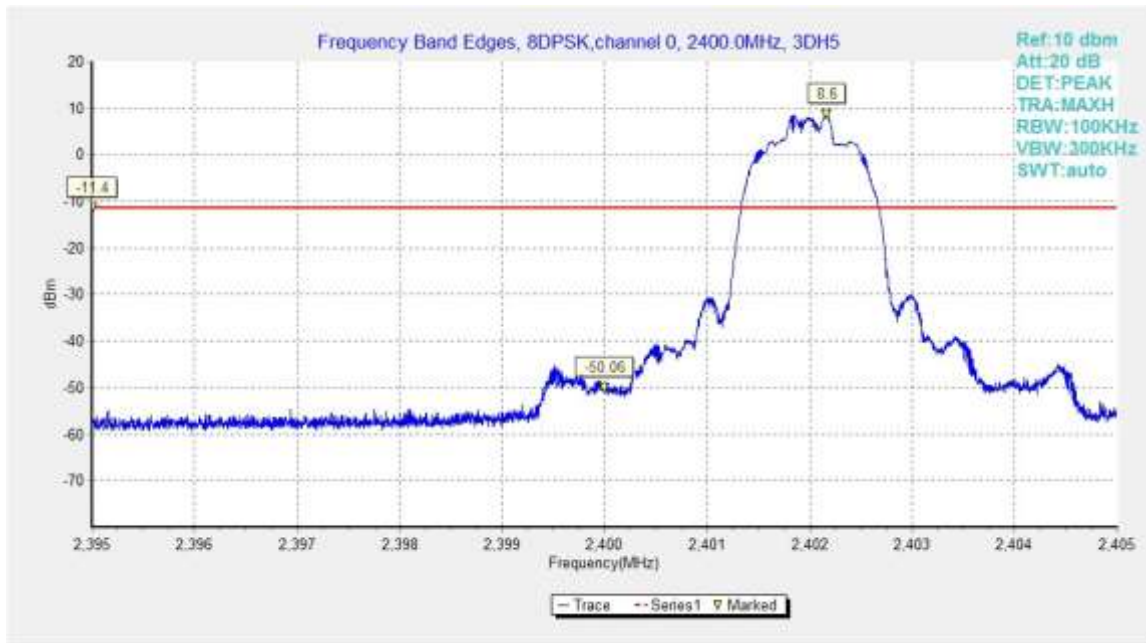


Fig.9. Frequency Band Edges: 8DPSK, Channel 0, Hopping Off

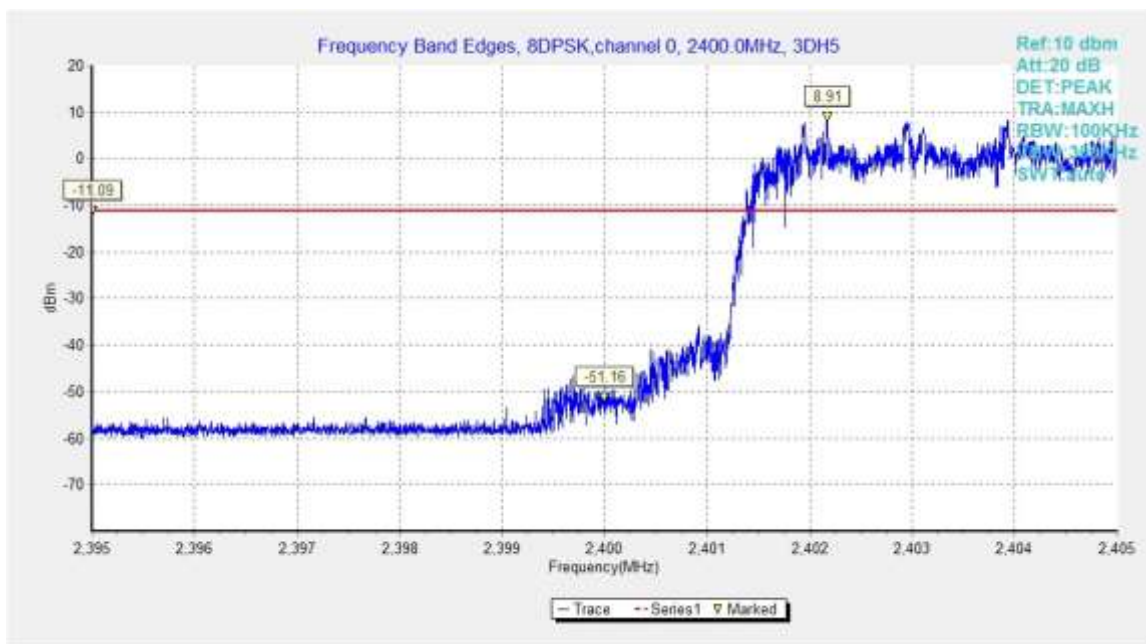


Fig.10. Frequency Band Edges: 8DPSK, Channel 0, Hopping On

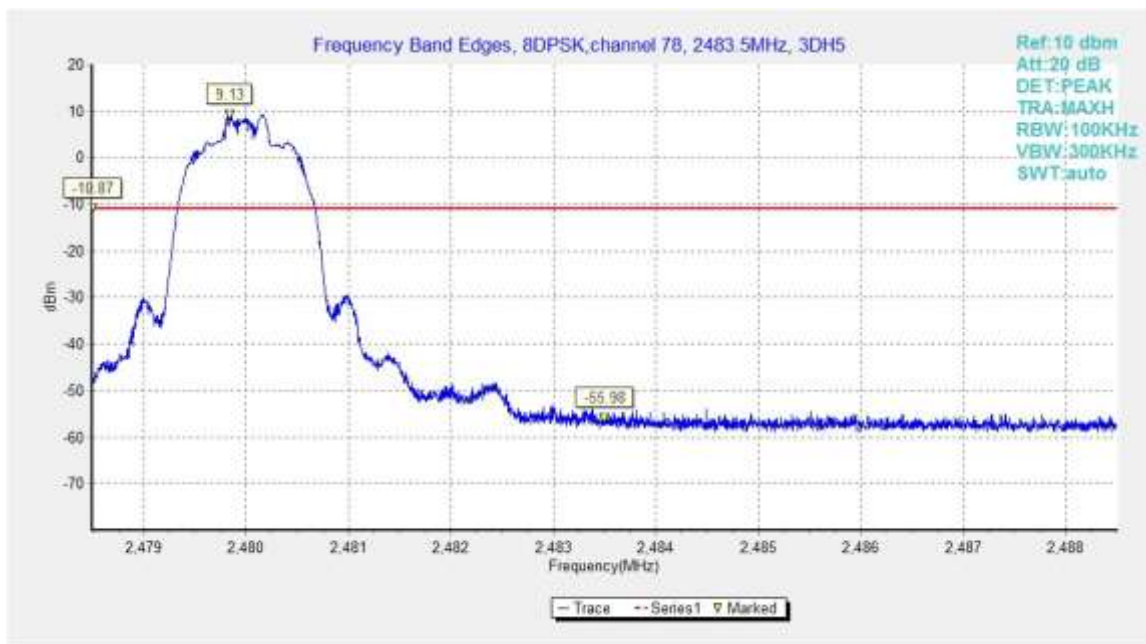


Fig.11. Frequency Band Edges: 8DPSK, Channel 78, Hopping Off

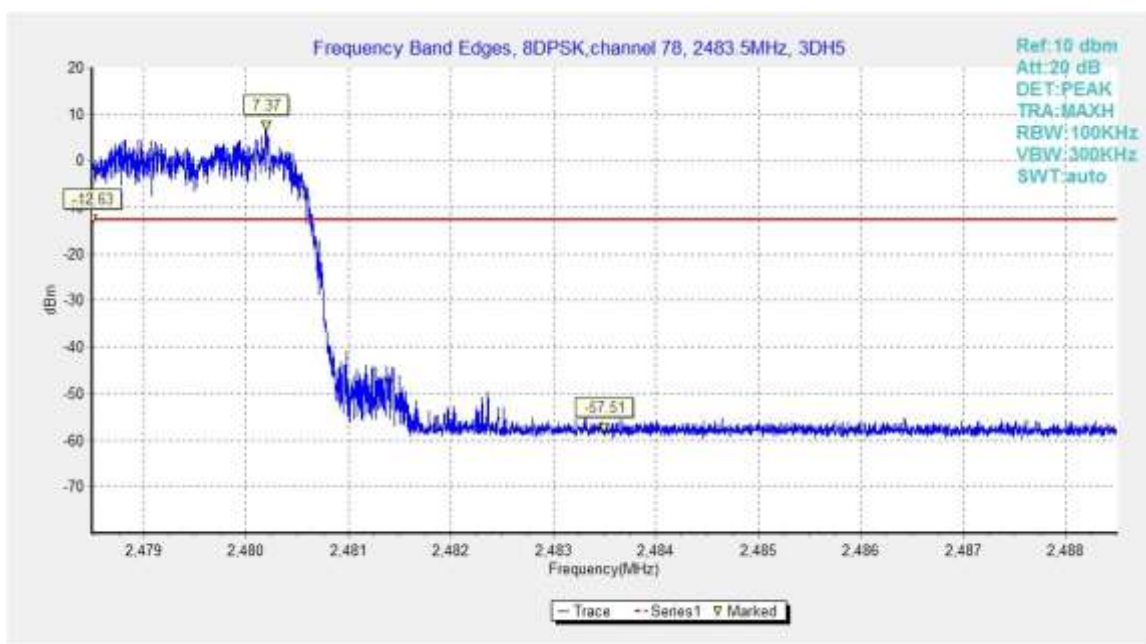


Fig.12. Frequency Band Edges: 8DPSK, Channel 78, Hopping On



#### B.4. Transmitter Spurious Emission - Conducted

**Method of Measurement: See ANSI C63.10-clause 7.8.8**

Measurement Procedure – Reference Level

1. Set the RBW = 100 kHz.
2. Set the VBW = 300 kHz.
3. Set the span to 5-30 % greater than the EBW.
4. Detector = peak.
5. Sweep time = auto couple.
6. Trace mode = max hold.
7. Allow trace to fully stabilize.
8. Use the peak marker function to determine the maximum power level in any 100 kHz band segment within the fundamental EBW. Next, determine the power in 100 kHz band segments outside of the authorized frequency band using the following measurement:

Measurement Procedure - Unwanted Emissions

1. Set RBW = 100 kHz.
2. Set VBW = 300 kHz.
3. Set span to encompass the spectrum to be examined.
4. Detector = peak.
5. Trace Mode = max hold.
6. Sweep = auto couple.
7. Allow the trace to stabilize (this may take some time, depending on the extent of the span).

Ensure that the amplitude of all unwanted emissions outside of the authorized frequency band (excluding restricted frequency bands) is attenuated by at least the minimum requirements specified above.

**Measurement Limit:**

Standard	Limit
FCC 47 CFR Part 15.247 (d)	20dB below peak output power in 100 kHz bandwidth

**Measurement Results:**

**For GFSK**

Channel	Frequency Range	Test Results	Conclusion
Ch 0	Center Frequency	Fig.13	P

2402 MHz	30 MHz ~ 1 GHz	Fig.14	P
	1 GHz ~ 3 GHz	Fig.15	P
	3 GHz ~ 10 GHz	Fig.16	P
	10 GHz ~ 26 GHz	Fig.17	P
Ch 39 2441 MHz	Center Frequency	Fig.18	P
	30 MHz ~ 1 GHz	Fig.19	P
	1 GHz ~ 3 GHz	Fig.20	P
	3 GHz ~ 10 GHz	Fig.21	P
	10 GHz ~ 26 GHz	Fig.22	P
Ch 78 2480 MHz	Center Frequency	Fig.23	P
	30 MHz ~ 1 GHz	Fig.24	P
	1 GHz ~ 3 GHz	Fig.25	P
	3 GHz ~ 10 GHz	Fig.26	P
	10 GHz ~ 26 GHz	Fig.27	P

#### For $\pi/4$ DQPSK

Channel	Frequency Range	Test Results	Conclusion
Ch 0 2402 MHz	Center Frequency	Fig.28	P
	30 MHz ~ 1 GHz	Fig.29	P
	1 GHz ~ 3 GHz	Fig.30	P
	3 GHz ~ 10 GHz	Fig.31	P
	10 GHz ~ 26 GHz	Fig.32	P
Ch 39 2441 MHz	Center Frequency	Fig.33	P
	30 MHz ~ 1 GHz	Fig.34	P
	1 GHz ~ 3 GHz	Fig.35	P
	3 GHz ~ 10 GHz	Fig.36	P
	10 GHz ~ 26 GHz	Fig.37	P
Ch 78 2480 MHz	Center Frequency	Fig.38	P
	30 MHz ~ 1 GHz	Fig.39	P
	1 GHz ~ 3 GHz	Fig.40	P
	3 GHz ~ 10 GHz	Fig.41	P
	10 GHz ~ 26 GHz	Fig.42	P

#### For 8DPSK

Channel	Frequency Range	Test Results	Conclusion
Ch 0 2402 MHz	Center Frequency	Fig.43	P
	30 MHz ~ 1 GHz	Fig.44	P
	1 GHz ~ 3 GHz	Fig.45	P
	3 GHz ~ 10 GHz	Fig.46	P
	10 GHz ~ 26 GHz	Fig.47	P

Ch 39 2441 MHz	Center Frequency	Fig.48	P
	30 MHz ~ 1 GHz	Fig.49	P
	1 GHz ~ 3 GHz	Fig.50	P
	3 GHz ~ 10 GHz	Fig.51	P
	10 GHz ~ 26 GHz	Fig.52	P
Ch 78 2480 MHz	Center Frequency	Fig.53	P
	30 MHz ~ 1 GHz	Fig.54	P
	1 GHz ~ 3 GHz	Fig.55	P
	3 GHz ~ 10 GHz	Fig.56	P
	10 GHz ~ 26 GHz	Fig.57	P

**Conclusion: PASS**

**Test graphs as below**

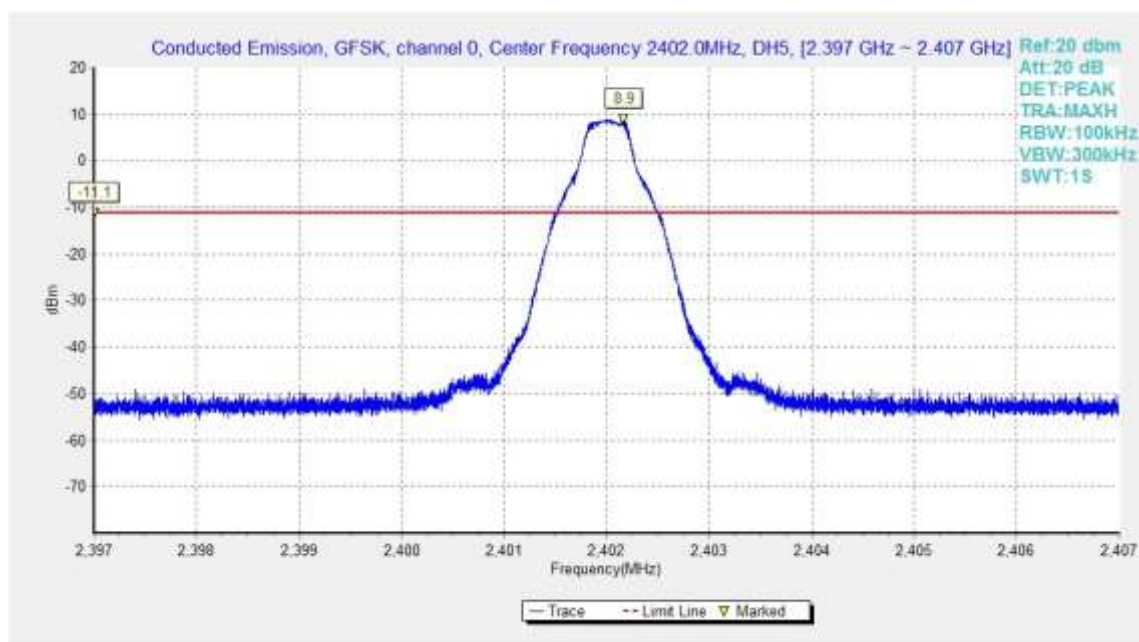


Fig.13. Conducted spurious emission: GFSK, Channel 0, 2402MHz

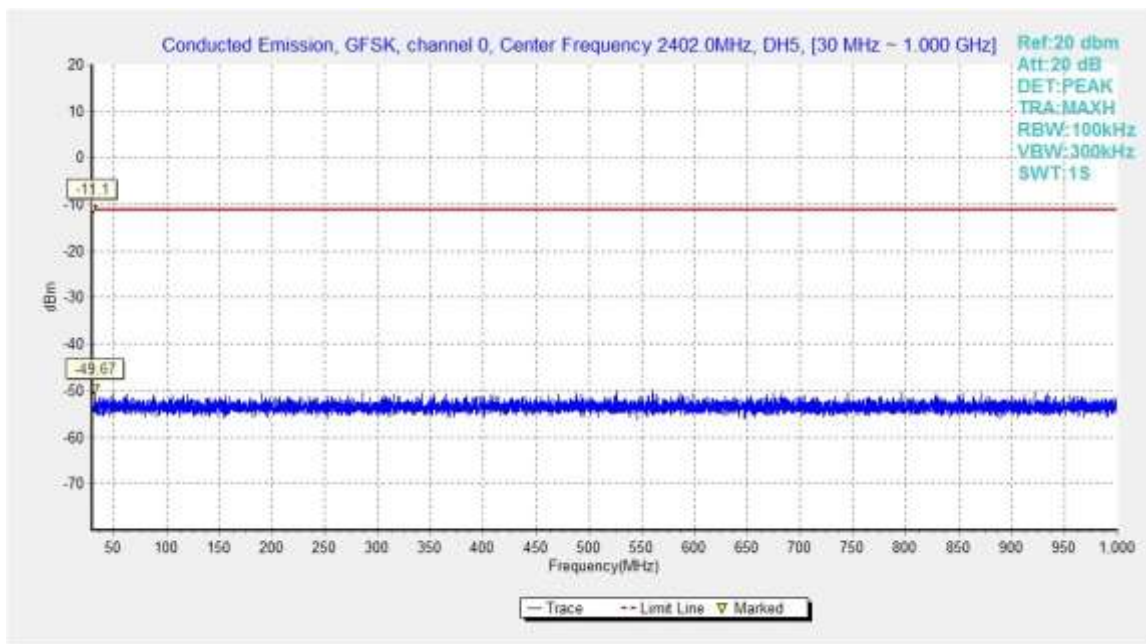


Fig.14. Conducted spurious emission: GFSK, Channel 0, 30MHz - 1GHz

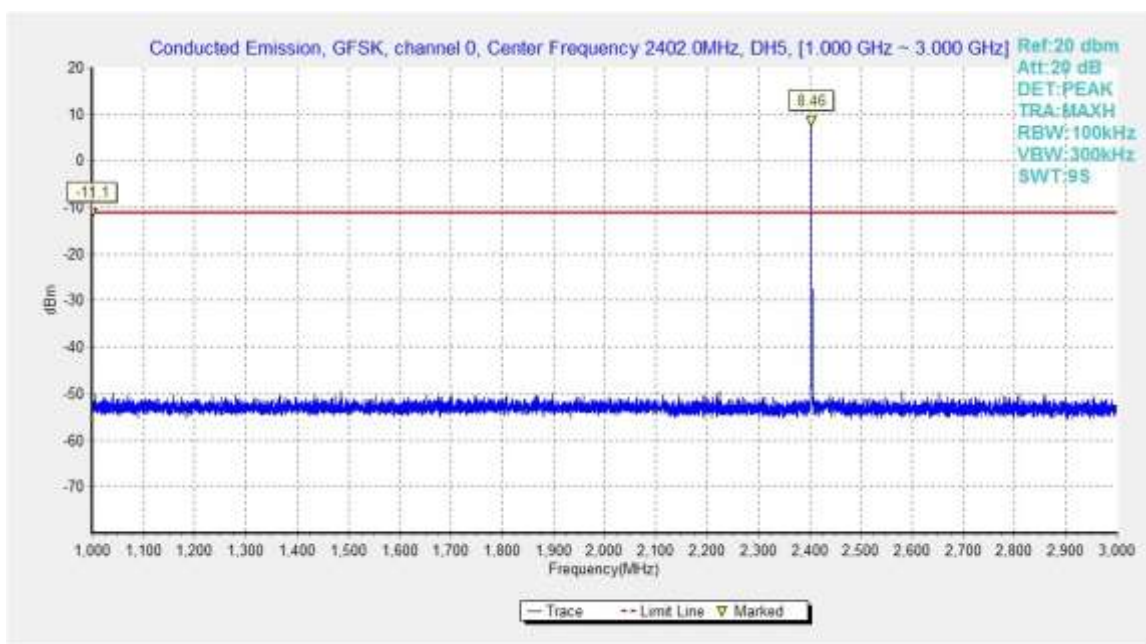


Fig.15. Conducted spurious emission: GFSK, Channel 0, 1GHz - 3GHz

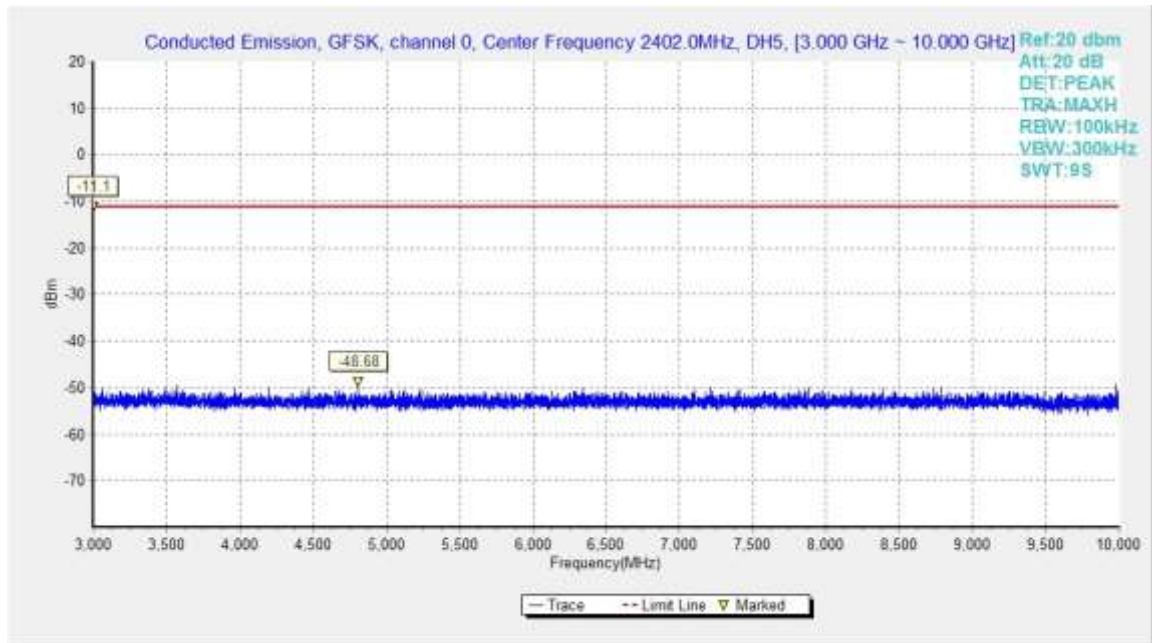


Fig.16. Conducted spurious emission: GFSK, Channel 0, 3GHz - 10GHz

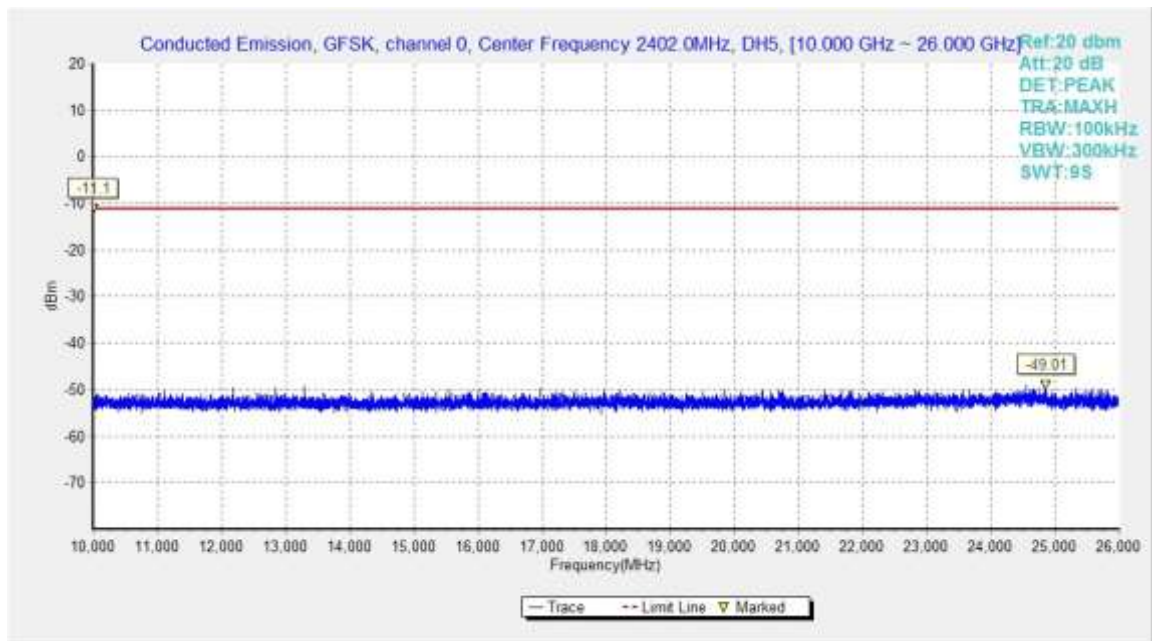


Fig.17. Conducted spurious emission: GFSK, Channel 0, 10GHz - 26GHz



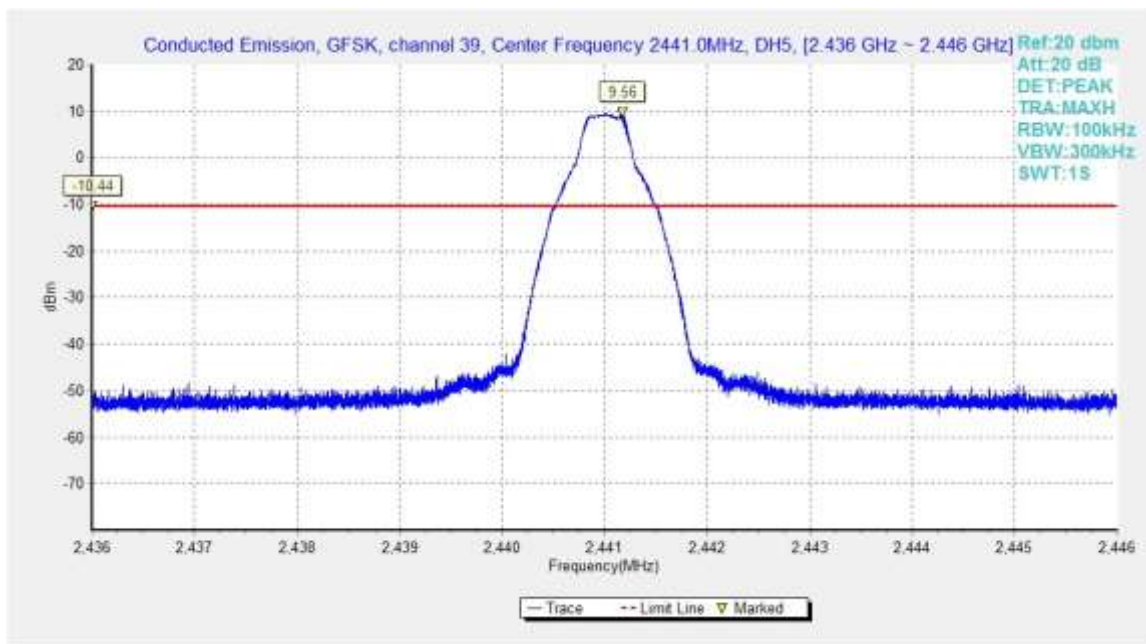


Fig.18. Conducted spurious emission: GFSK, Channel 39, 2441MHz

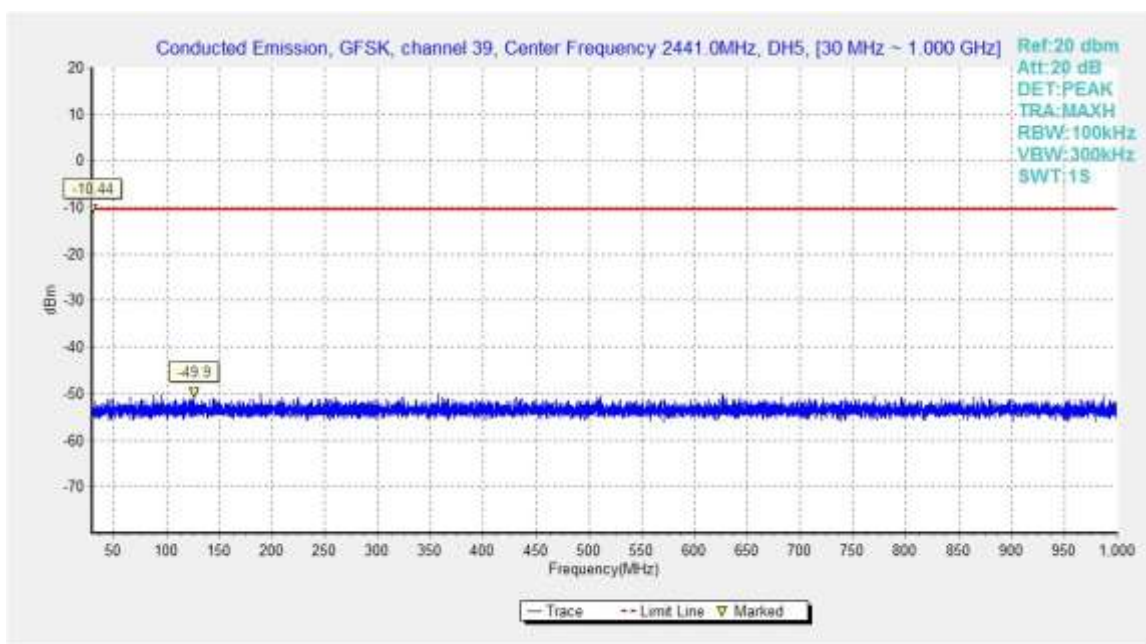


Fig.19. Conducted spurious emission: GFSK, Channel 39, 30MHz - 1GHz

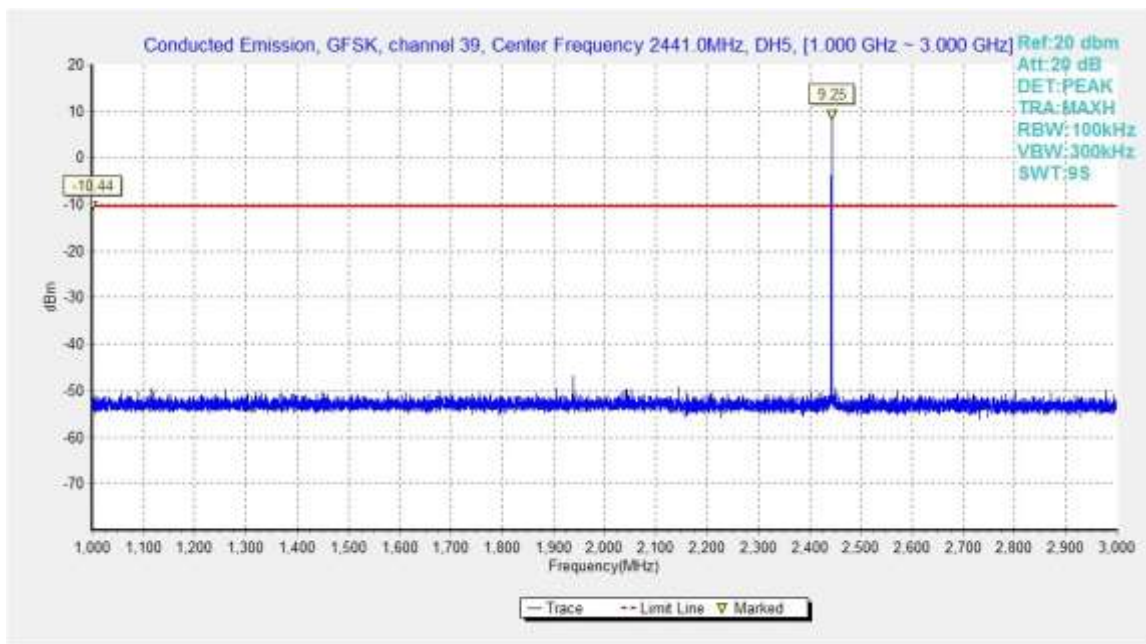


Fig.20. Conducted spurious emission: GFSK, Channel 39, 1GHz – 3GHz

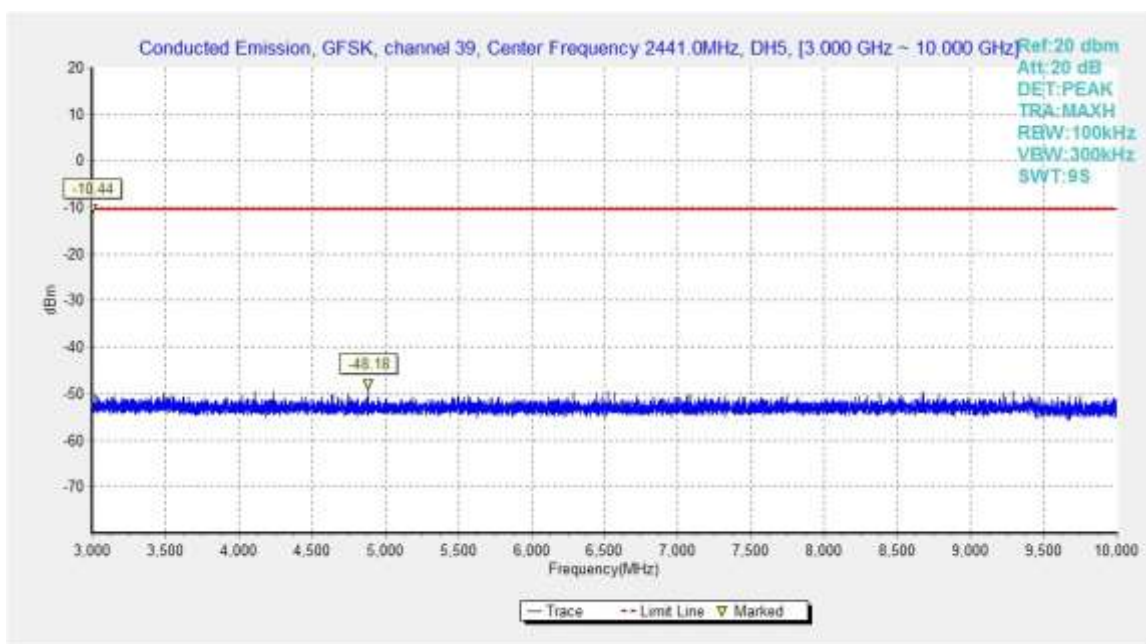


Fig.21. Conducted spurious emission: GFSK, Channel 39, 3GHz – 10GHz

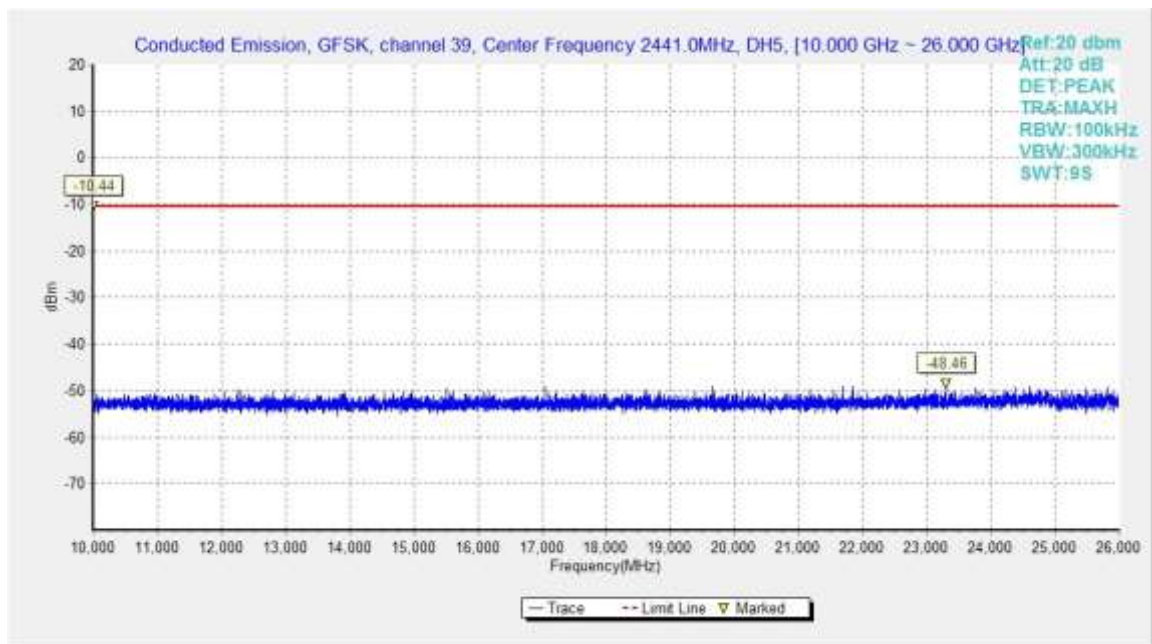


Fig.22. Conducted spurious emission: GFSK, Channel 39, 10GHz – 26GHz

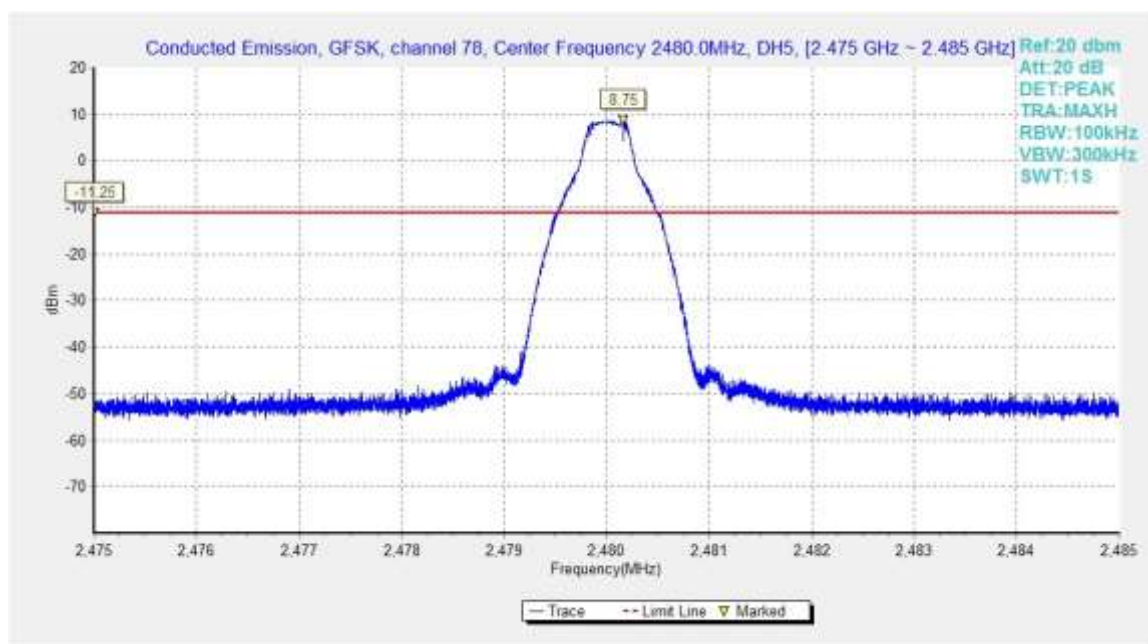


Fig.23. Conducted spurious emission: GFSK, Channel 78, 2480MHz



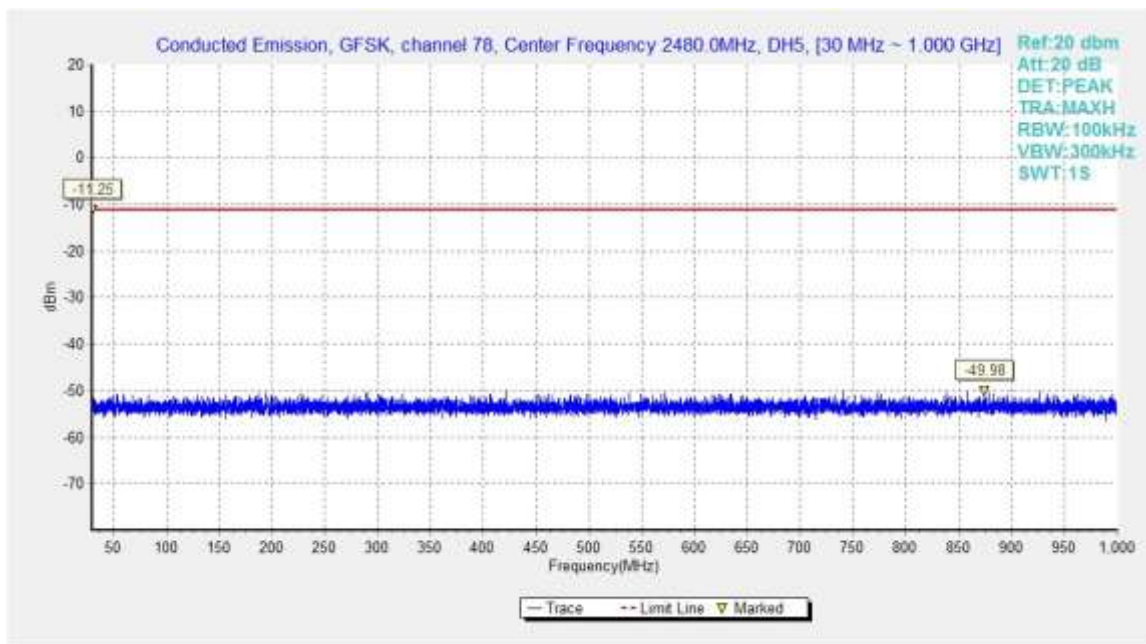


Fig.24. Conducted spurious emission: GFSK, Channel 78, 30MHz - 1GHz

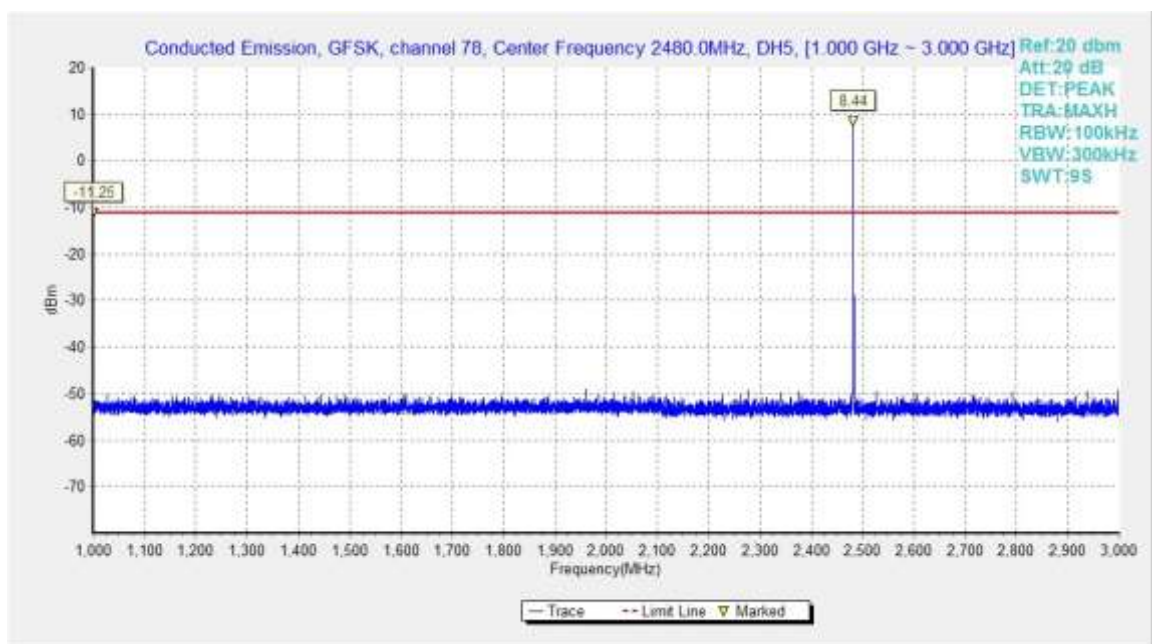


Fig.25. Conducted spurious emission: GFSK, Channel 78, 1GHz - 3GHz

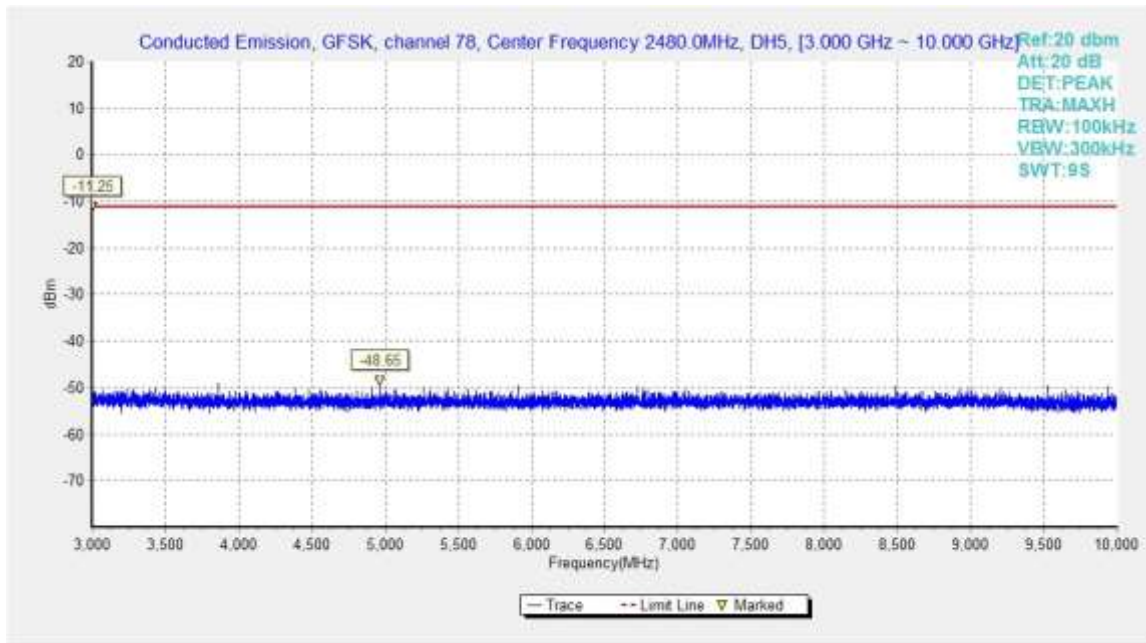


Fig.26. Conducted spurious emission: GFSK, Channel 78, 3GHz - 10GHz

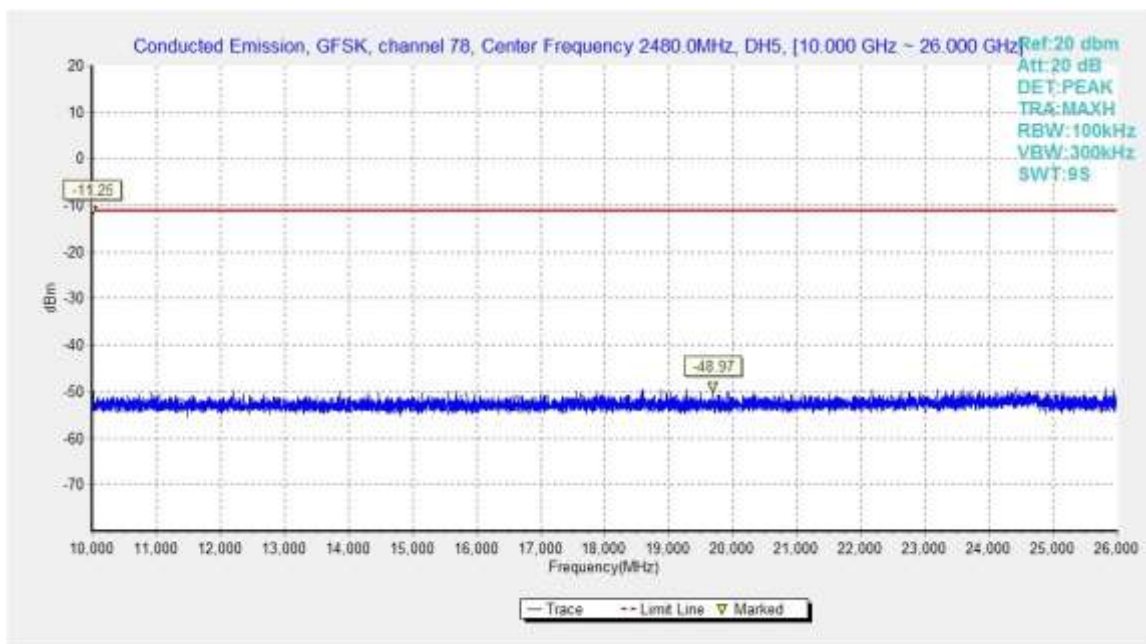


Fig.27. Conducted spurious emission: GFSK, Channel 78, 10GHz - 26GHz

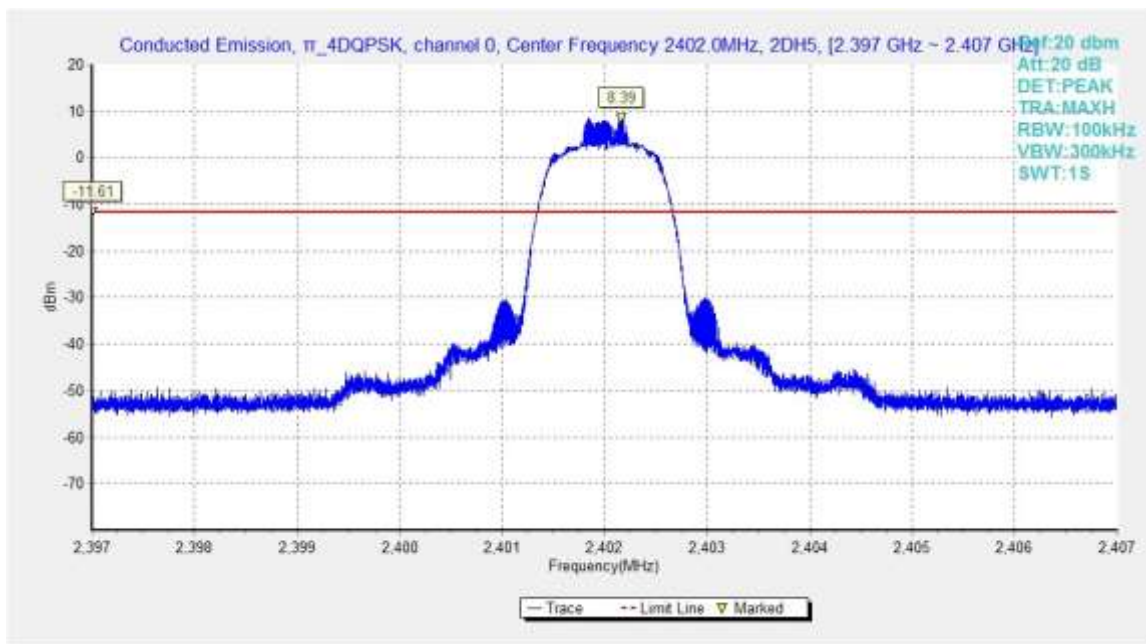


Fig.28. Conducted spurious emission:  $\pi/4$  DQPSK, Channel 0, 2402MHz

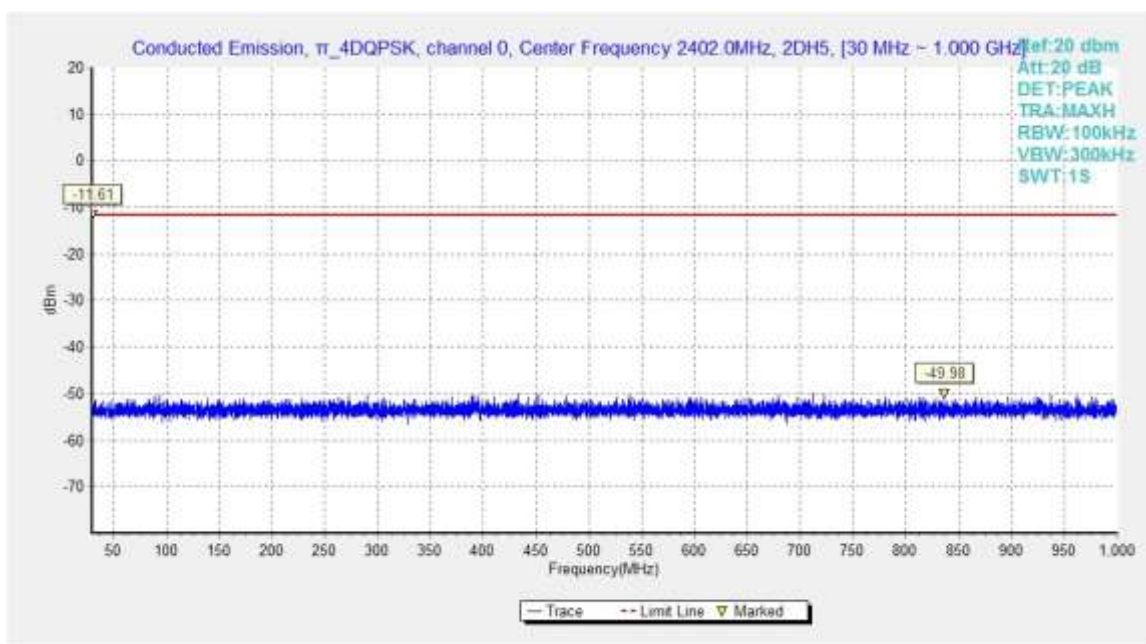
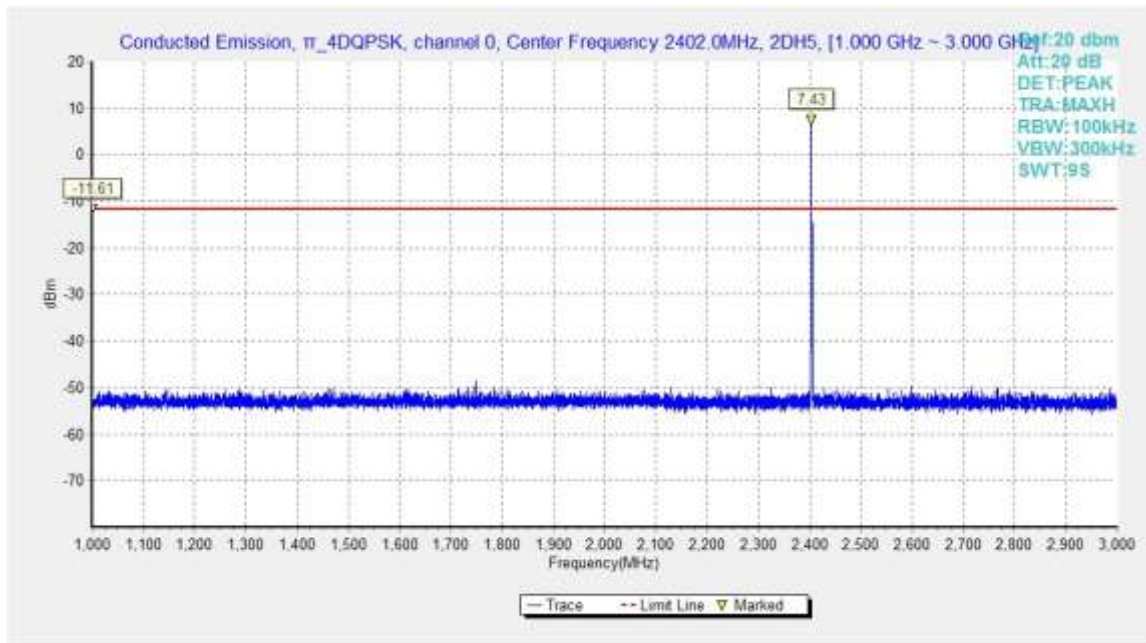
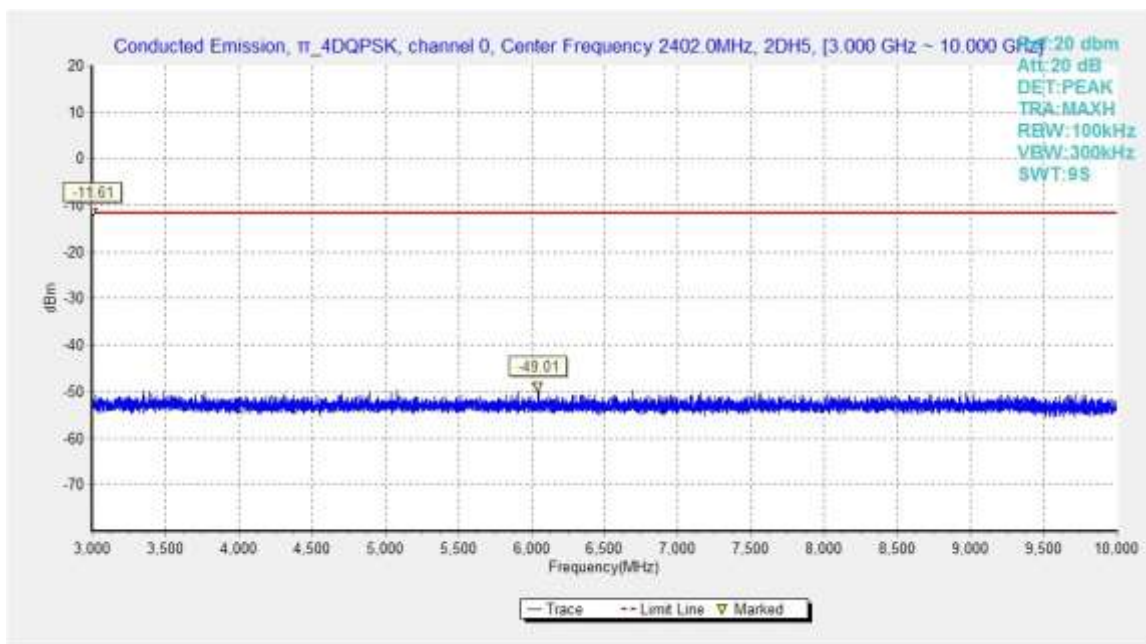
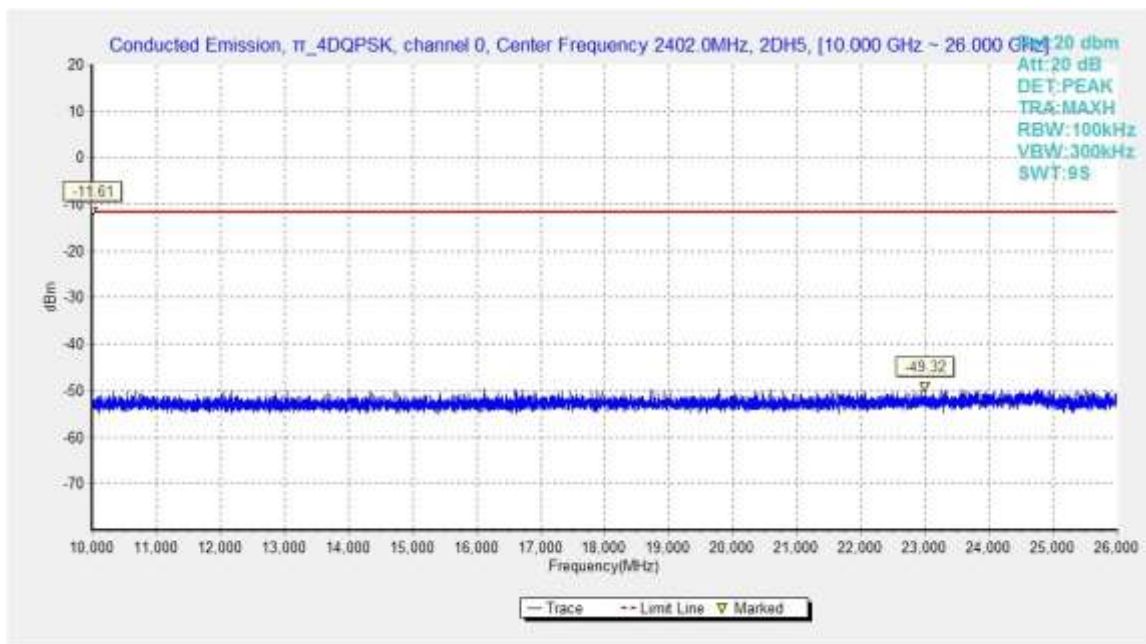
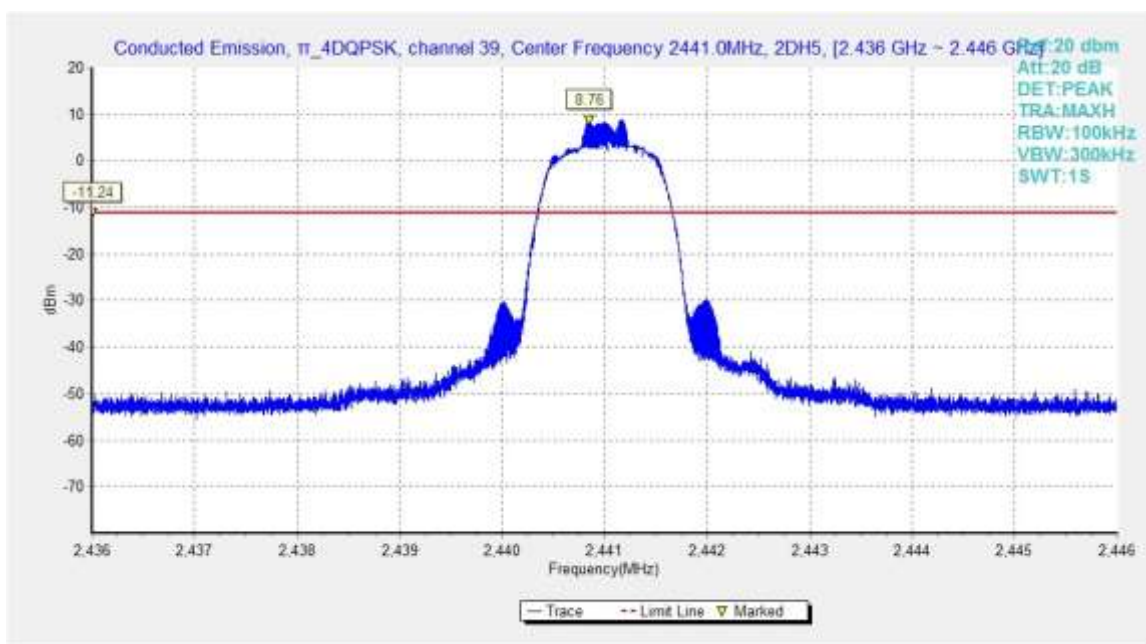


Fig.29. Conducted spurious emission:  $\pi/4$  DQPSK, Channel 0, 30MHz - 1GHz


Fig.30. Conducted spurious emission:  $\pi/4$  DQPSK, Channel 0, 1GHz - 3GHz

Fig.31. Conducted spurious emission:  $\pi/4$  DQPSK, Channel 0, 3GHz - 10GHz




Fig.32. Conducted spurious emission:  $\pi/4$  DQPSK, Channel 0, 10GHz - 26GHz

Fig.33. Conducted spurious emission:  $\pi/4$  DQPSK, Channel 39, 2441MHz

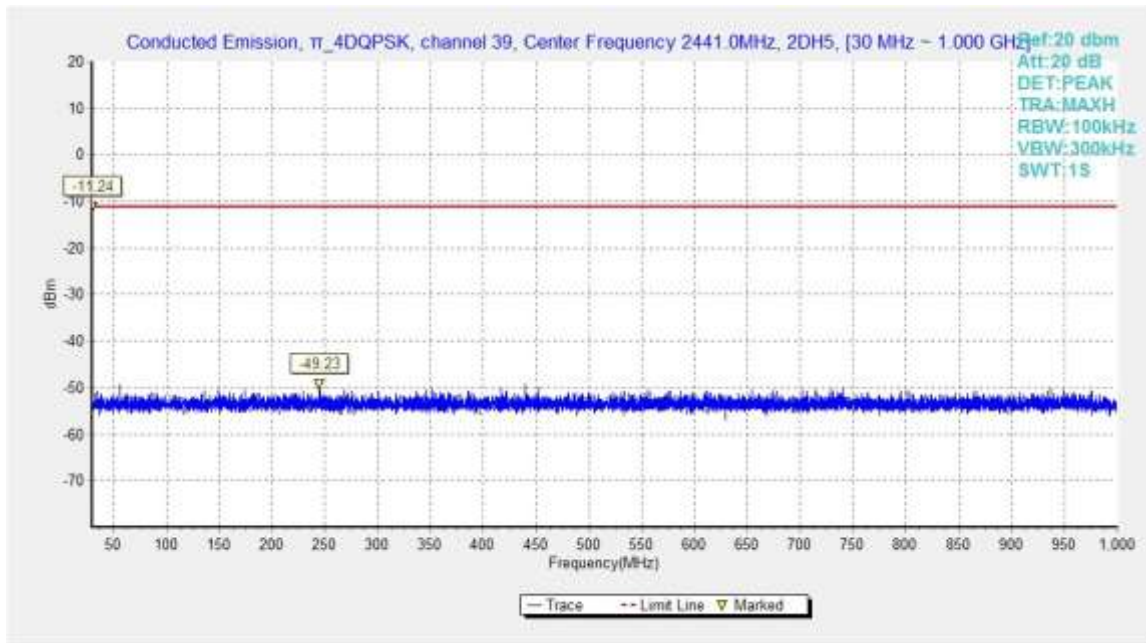


Fig.34. Conducted spurious emission:  $\pi/4$  DQPSK, Channel 39, 30MHz - 1GHz

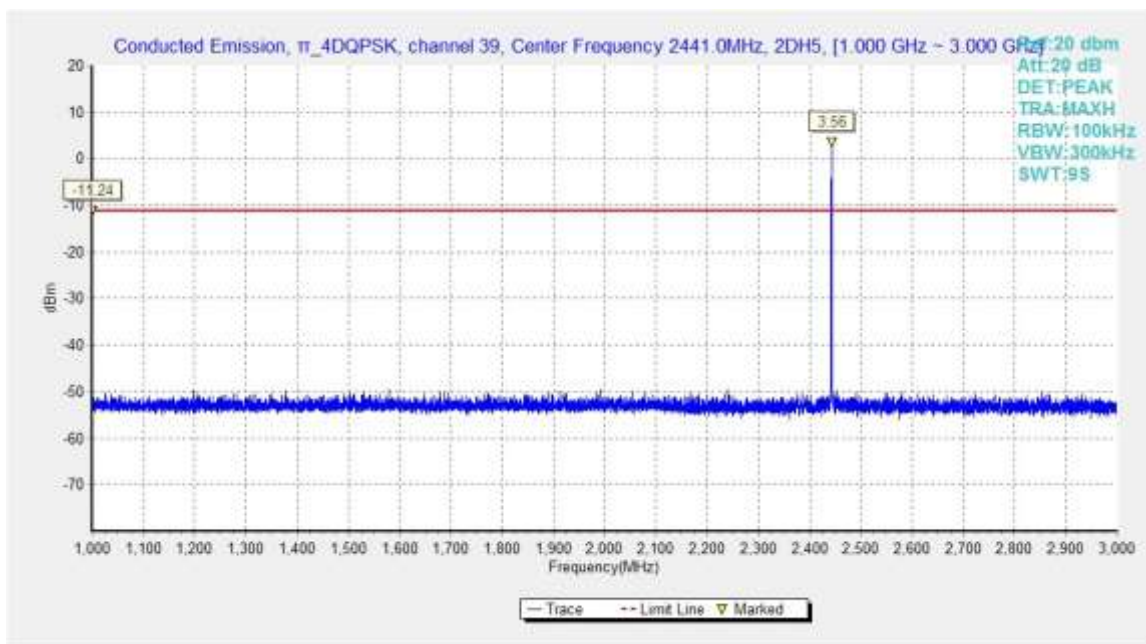
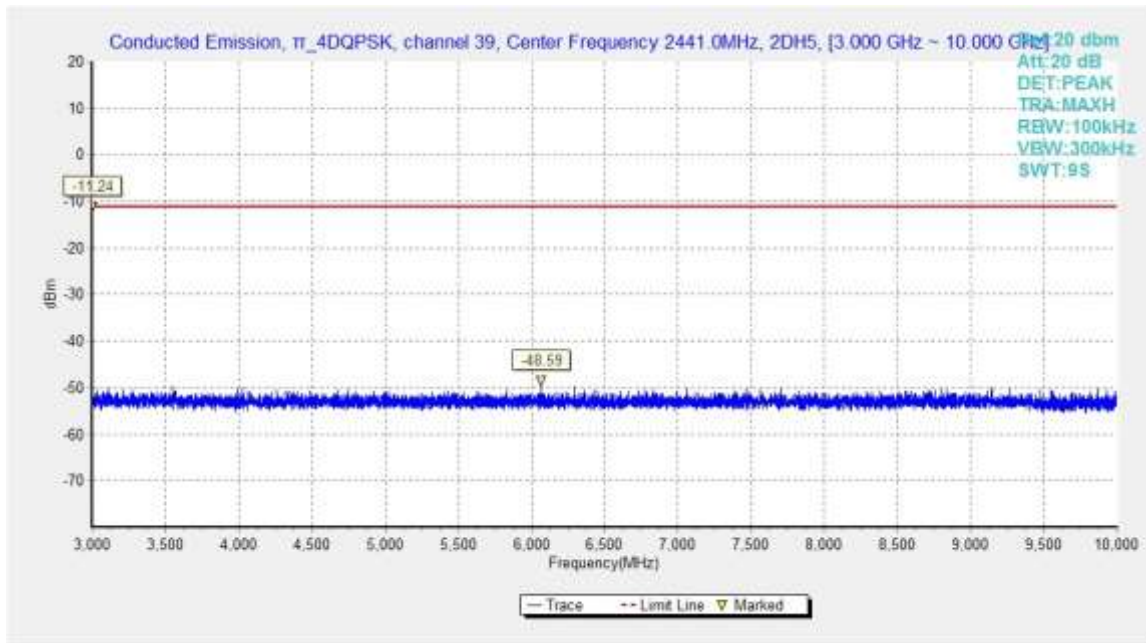
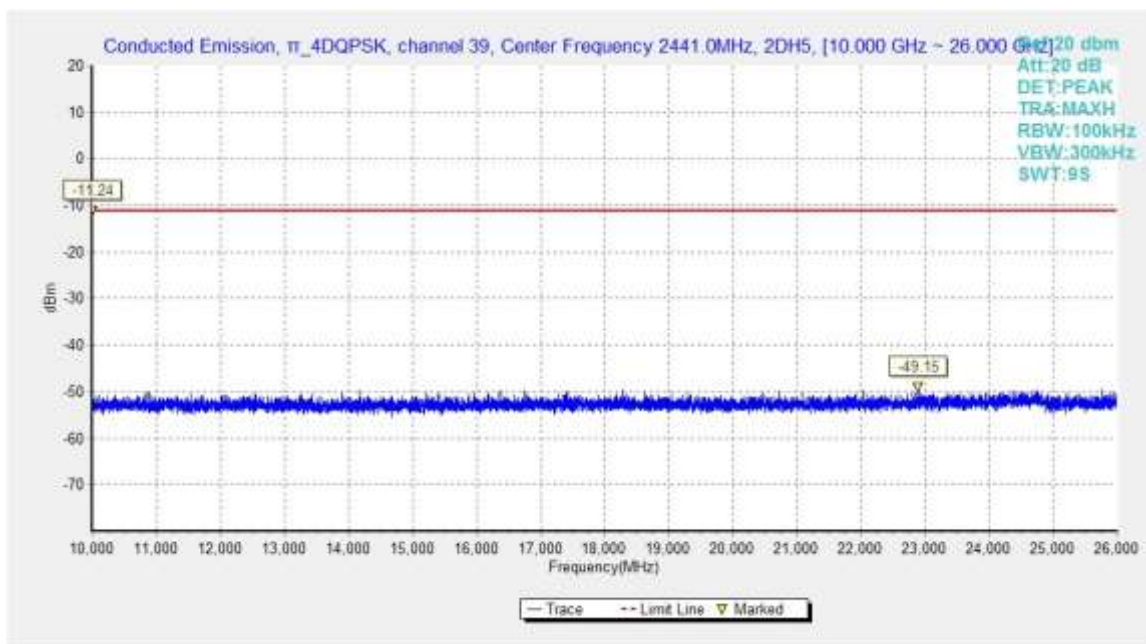


Fig.35. Conducted spurious emission:  $\pi/4$  DQPSK, Channel 39, 1GHz - 3GHz


Fig.36. Conducted spurious emission:  $\pi/4$  DQPSK, Channel 39, 3GHz - 10GHz

Fig.37. Conducted spurious emission:  $\pi/4$  DQPSK, Channel 39, 10GHz – 26GHz

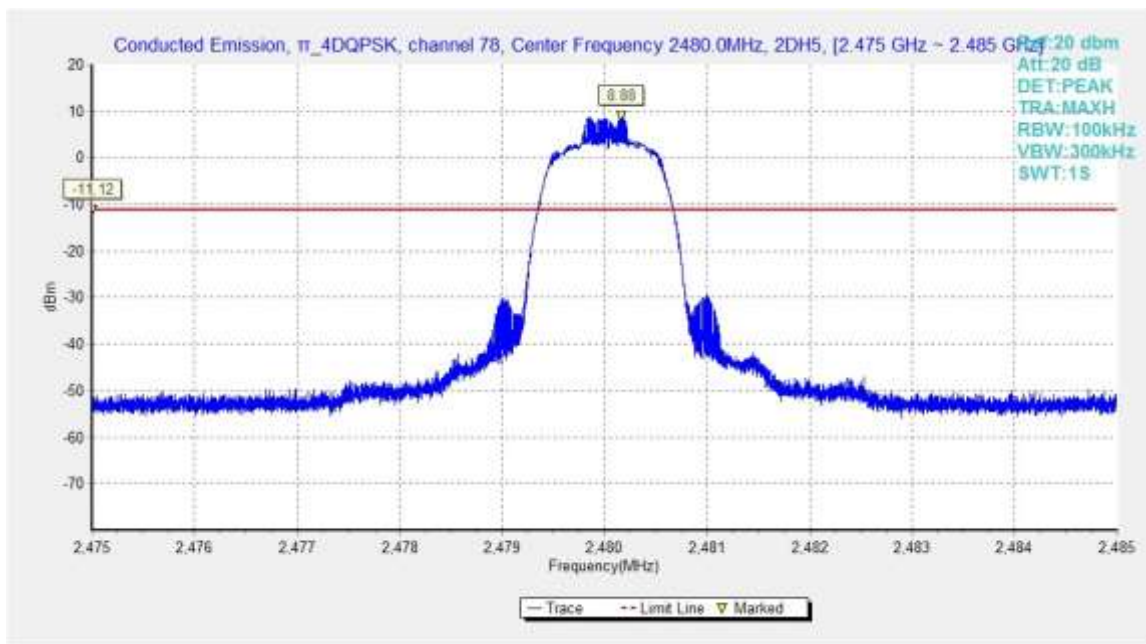


Fig.38. Conducted spurious emission:  $\pi/4$  DQPSK, Channel 78, 2480MHz

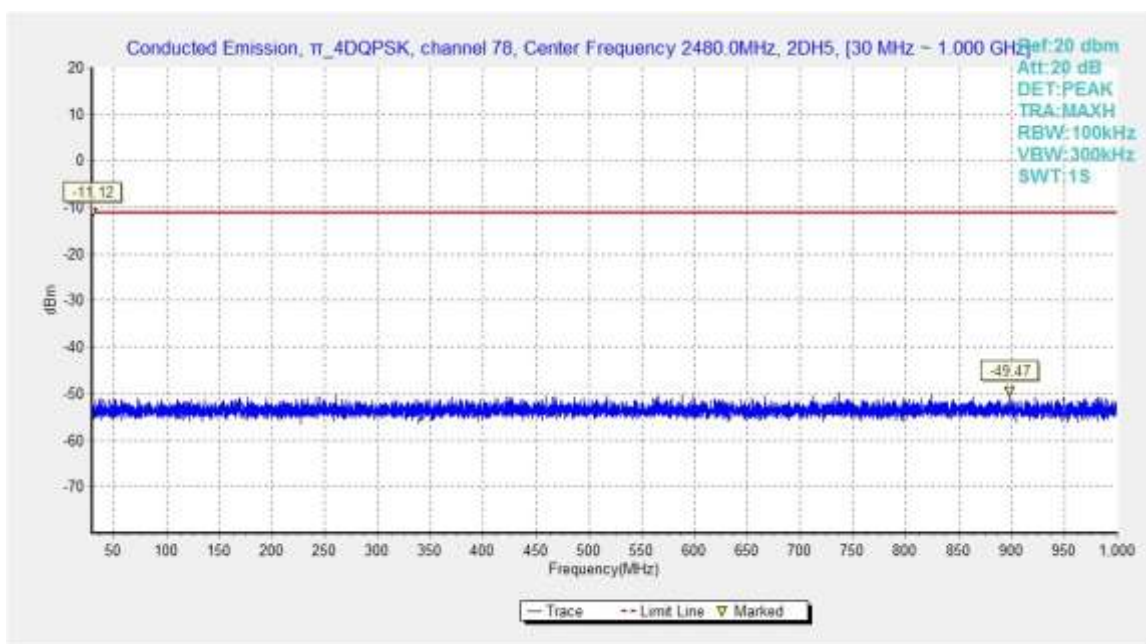


Fig.39. Conducted spurious emission:  $\pi/4$  DQPSK, Channel 78, 30MHz - 1GHz



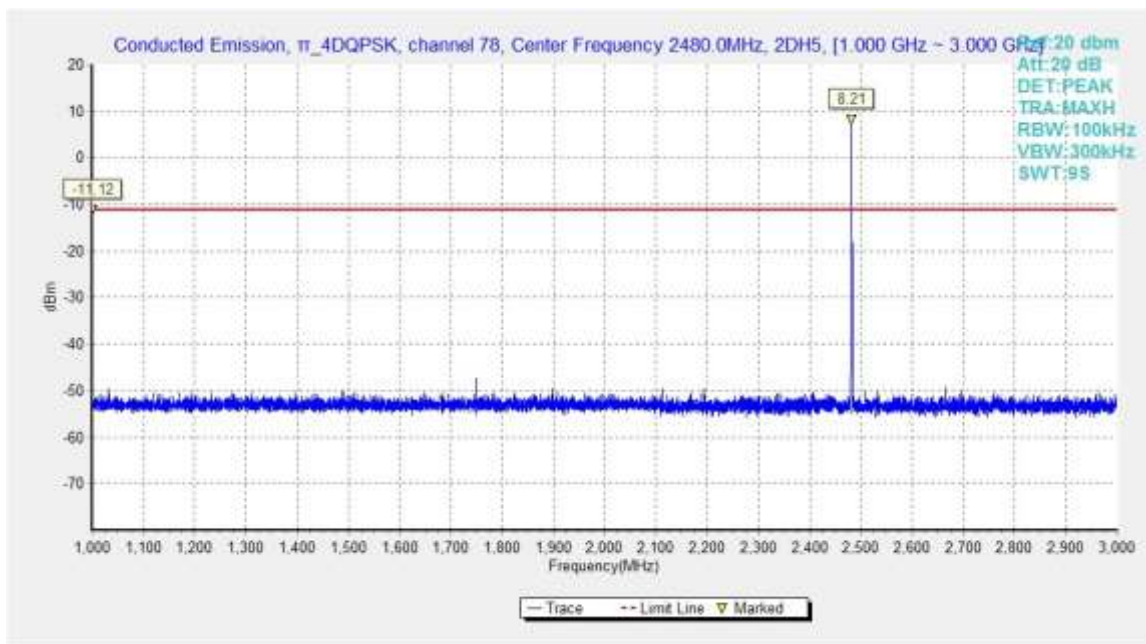


Fig.40. Conducted spurious emission:  $\pi/4$  DQPSK, Channel 78, 1GHz - 3GHz

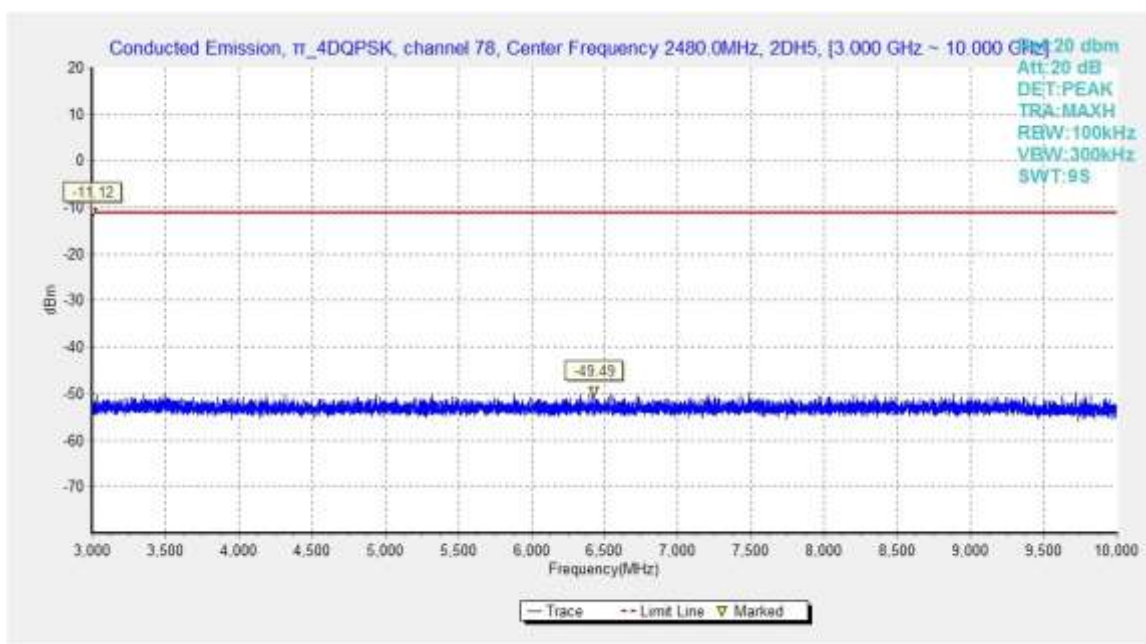


Fig.41. Conducted spurious emission:  $\pi/4$  DQPSK, Channel 78, 3GHz - 10GHz

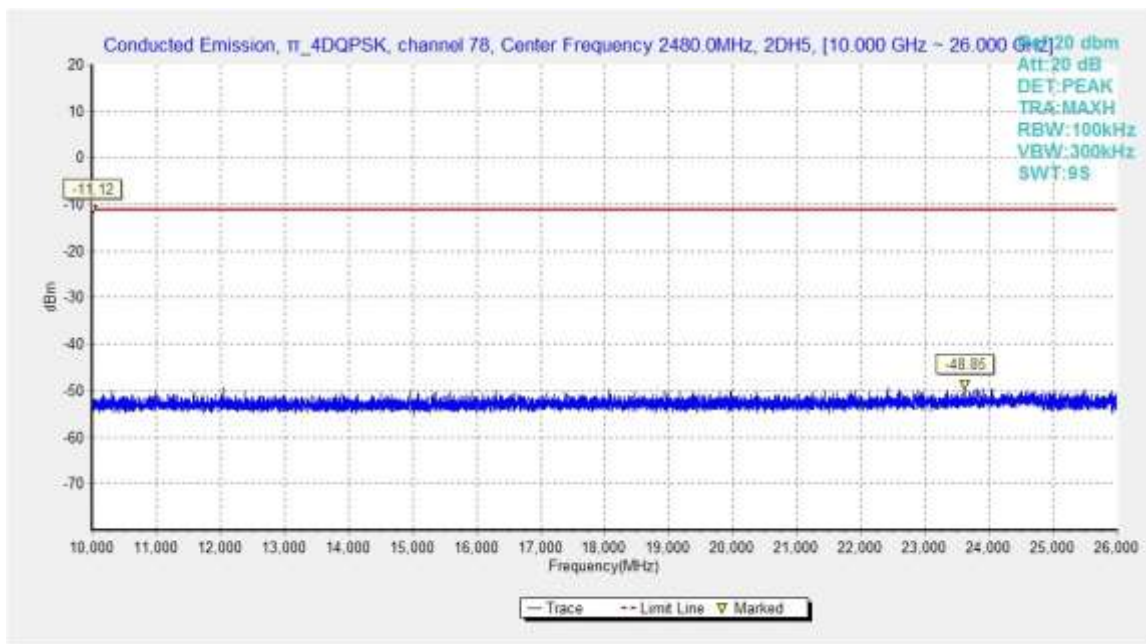


Fig.42. Conducted spurious emission:  $\pi/4$  DQPSK, Channel 78, 10GHz - 26GHz

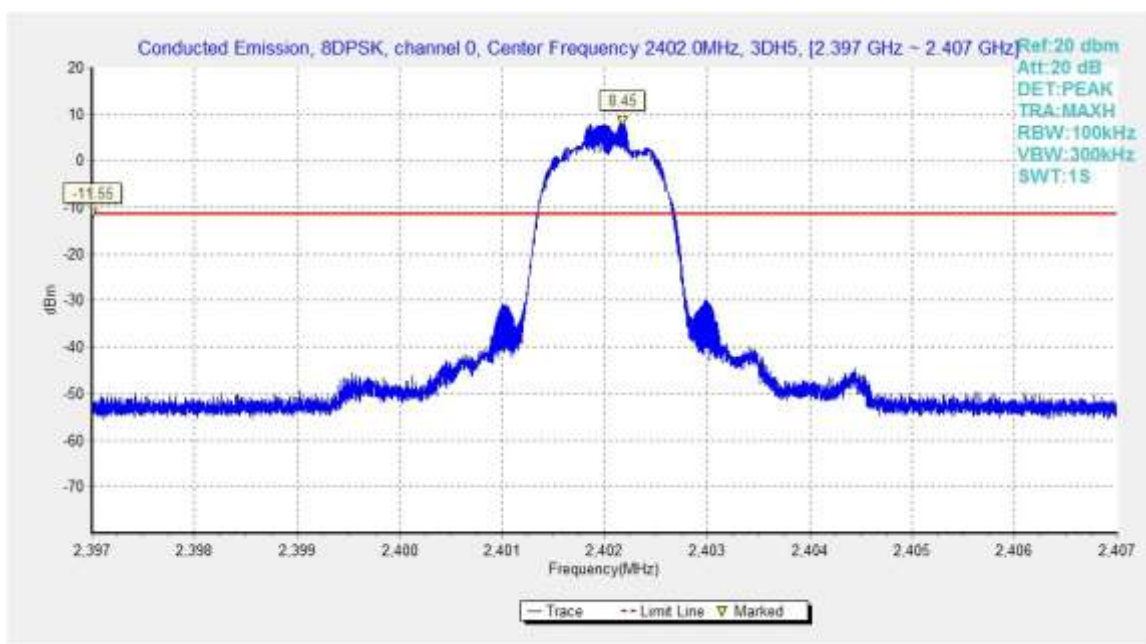


Fig.43. Conducted spurious emission: 8DPSK, Channel 0, 2402MHz

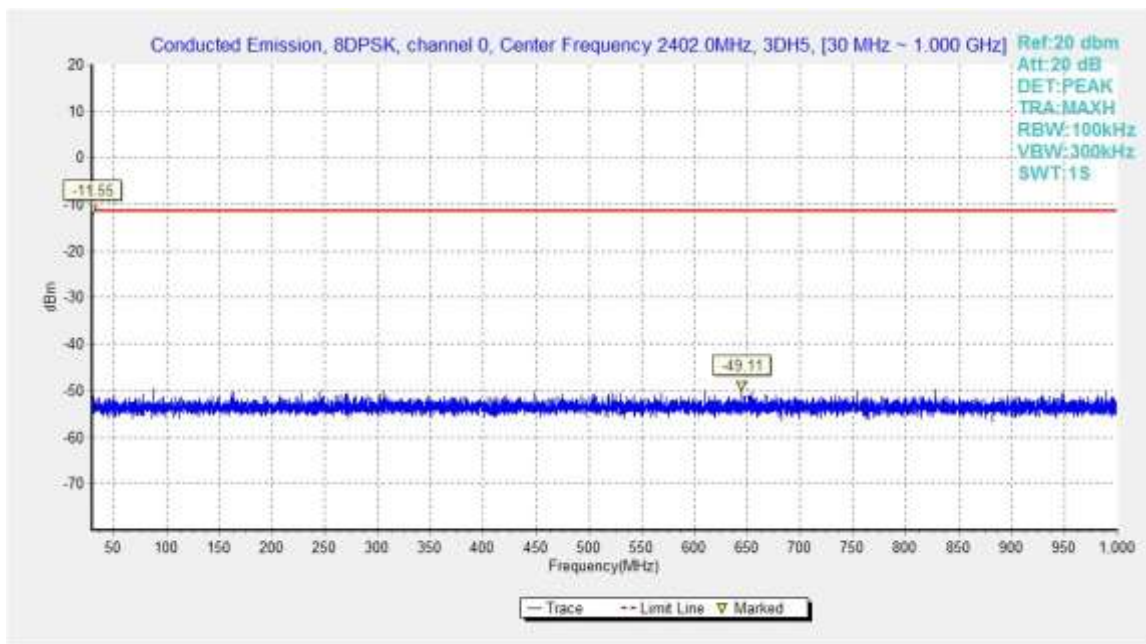


Fig.44. Conducted spurious emission: 8DPSK, Channel 0, 30MHz - 1GHz

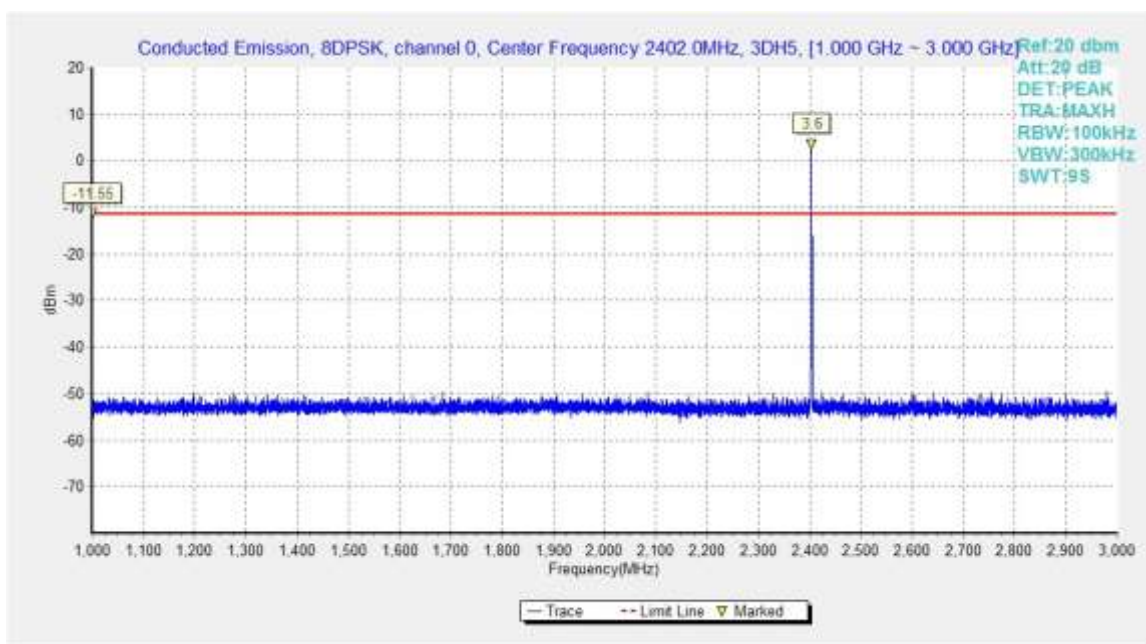


Fig.45. Conducted spurious emission: 8DPSK, Channel 0, 1GHz - 3GHz

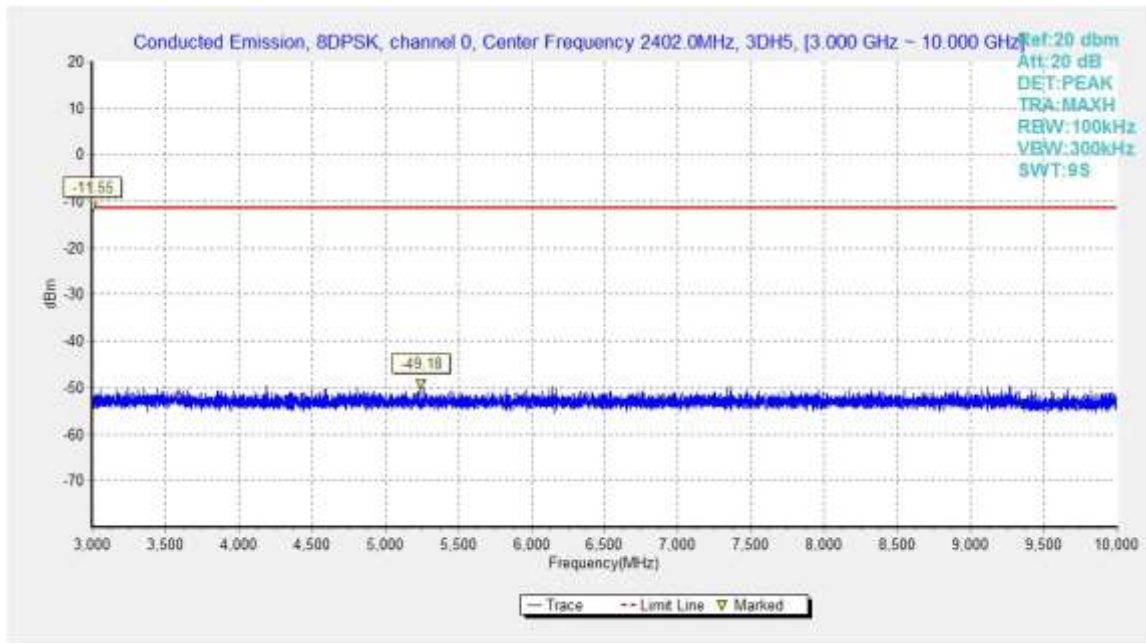


Fig.46. Conducted spurious emission: 8DPSK, Channel 0, 3GHz - 10GHz

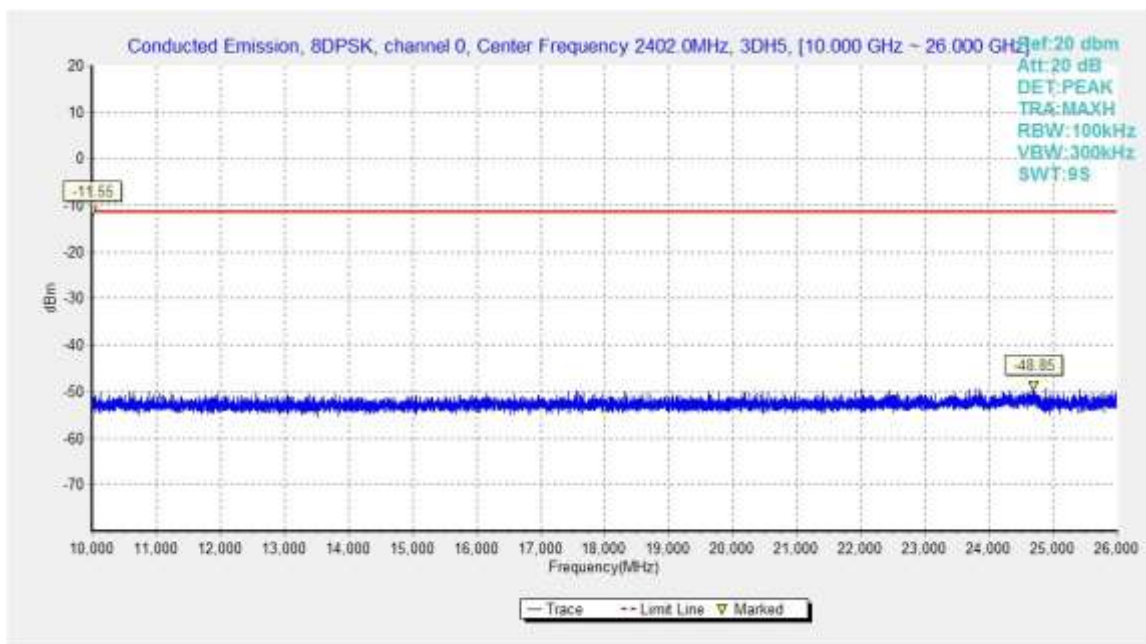


Fig.47. Conducted spurious emission: 8DPSK, Channel 0, 10GHz - 26GHz



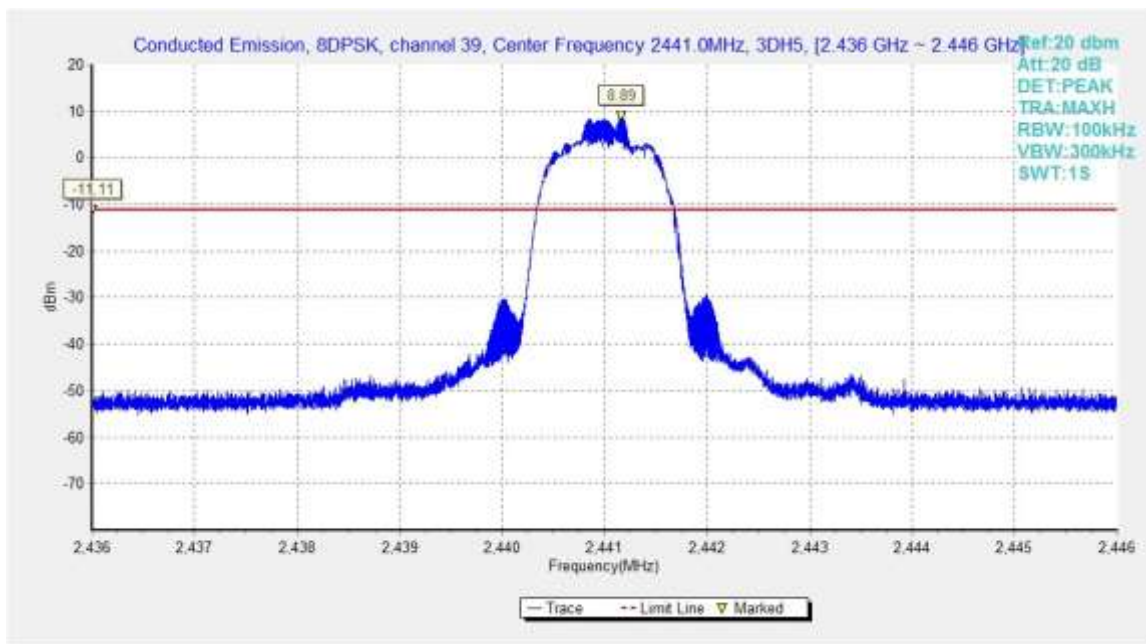


Fig.48. Conducted spurious emission: 8DPSK, Channel 39, 2441MHz

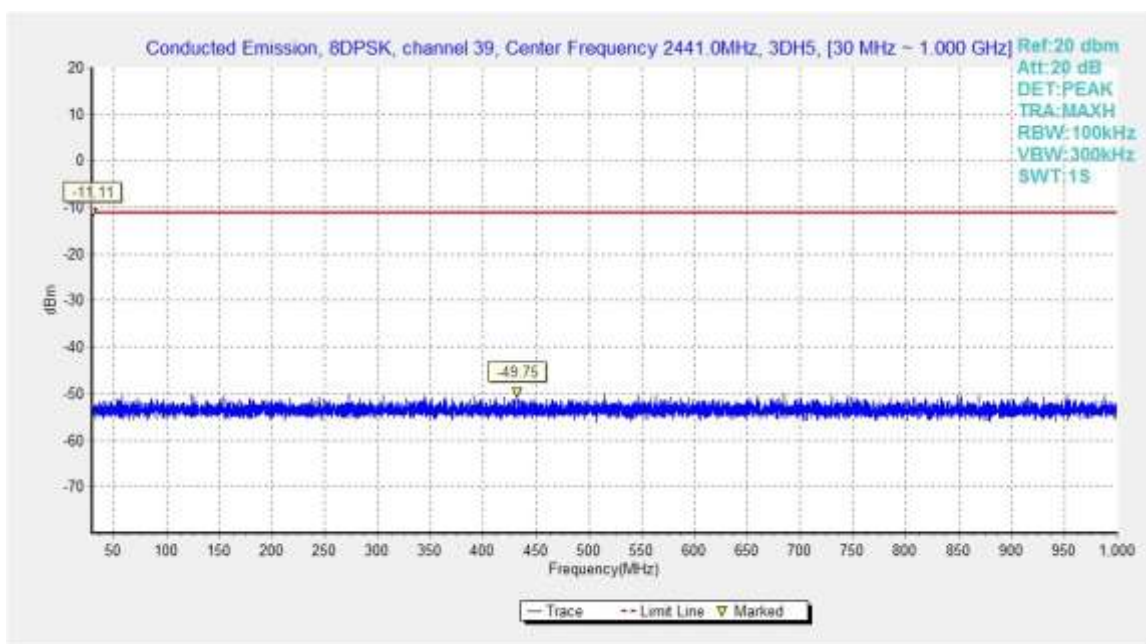


Fig.49. Conducted spurious emission: 8DPSK, Channel 39, 30MHz - 1GHz

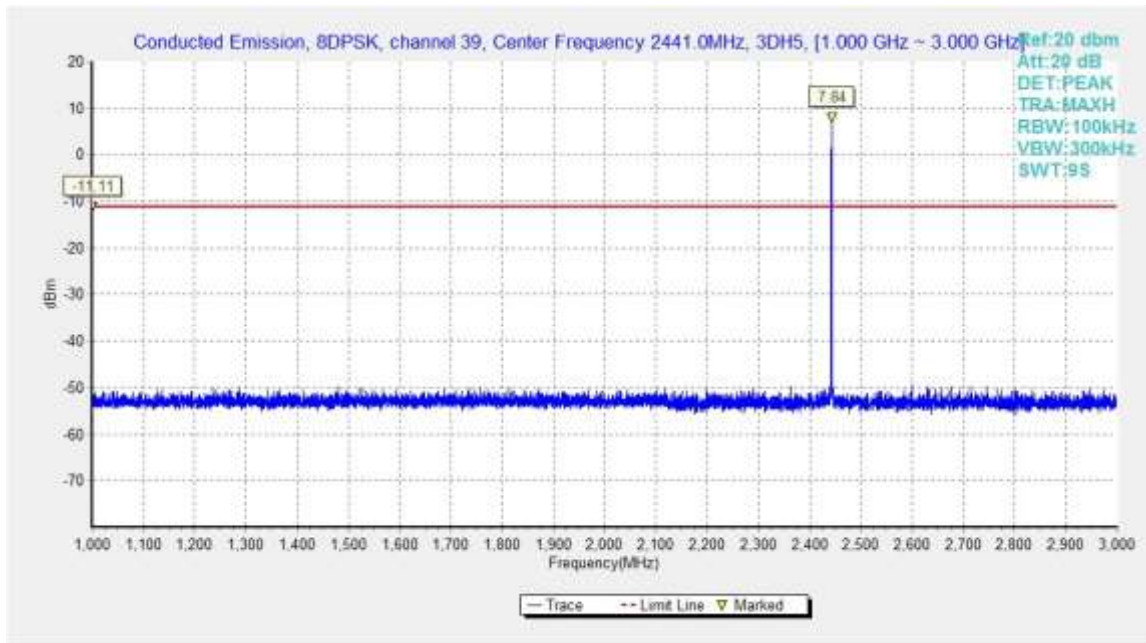


Fig.50. Conducted spurious emission: 8DPSK, Channel 39, 1GHz - 3GHz

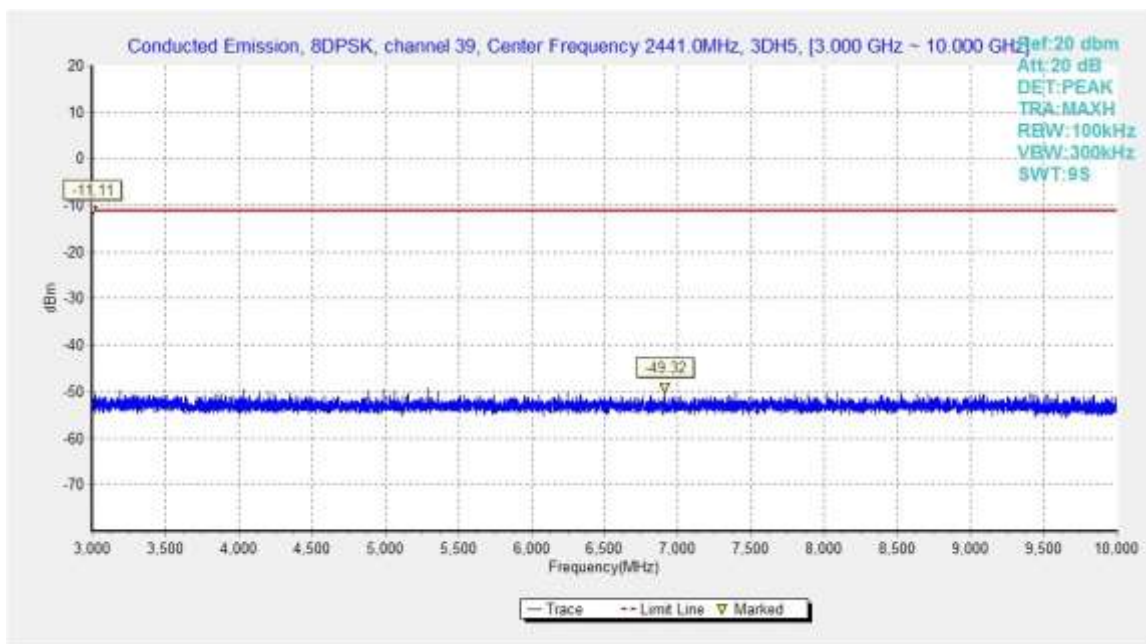


Fig.51. Conducted spurious emission: 8DPSK, Channel 39, 3GHz - 10GHz

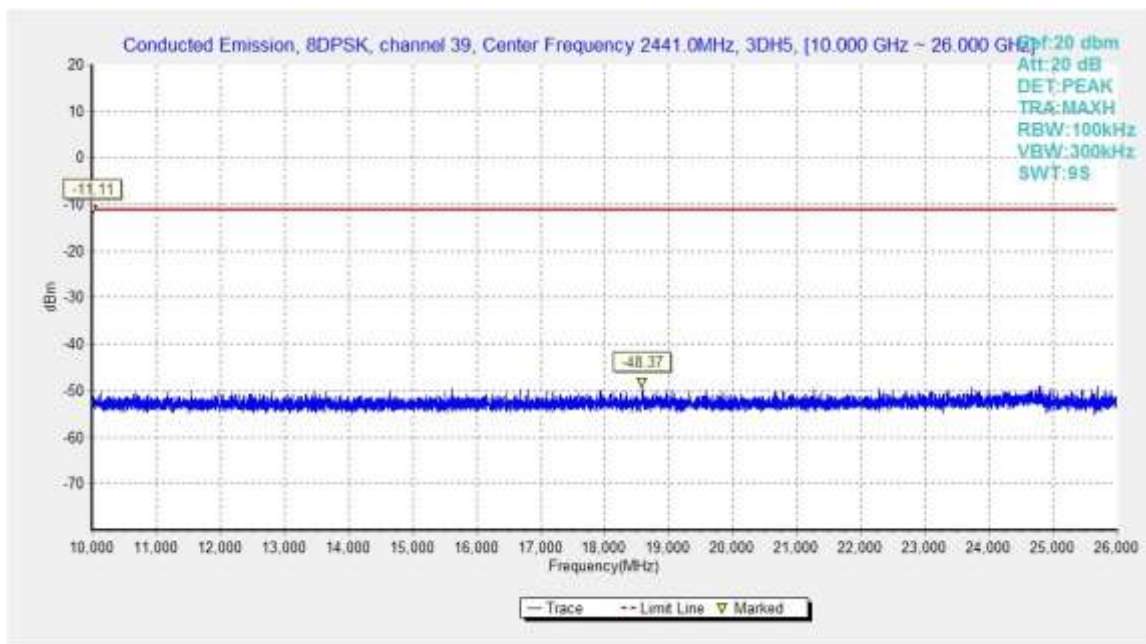


Fig.52. Conducted spurious emission: 8DPSK, Channel 39, 10GHz – 26GHz

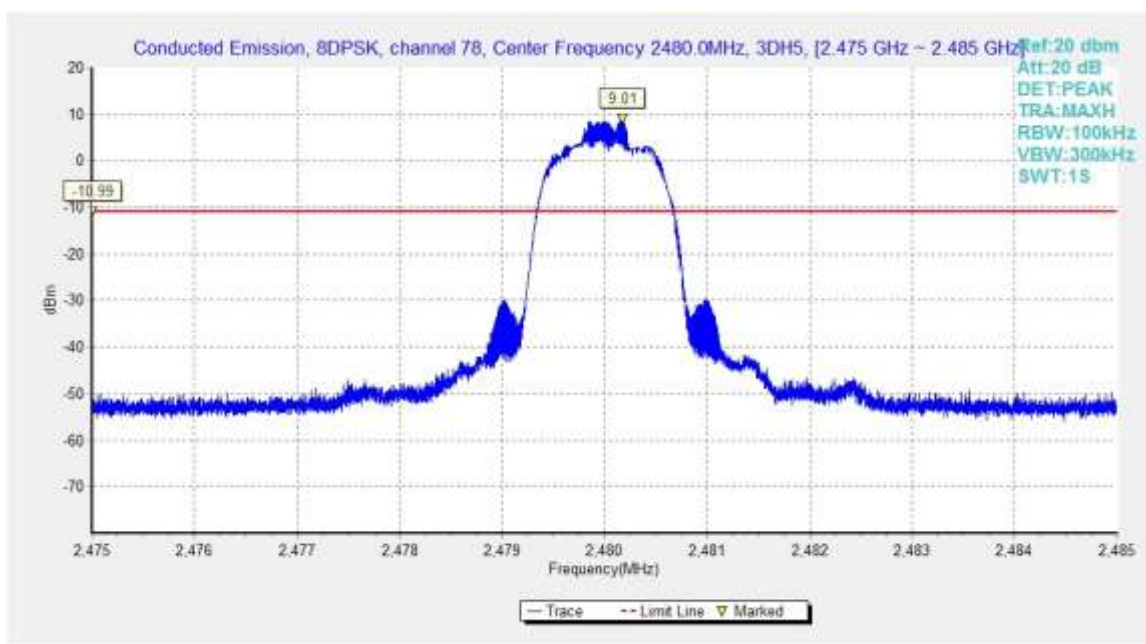


Fig.53. Conducted spurious emission: 8DPSK, Channel 78, 2480MHz

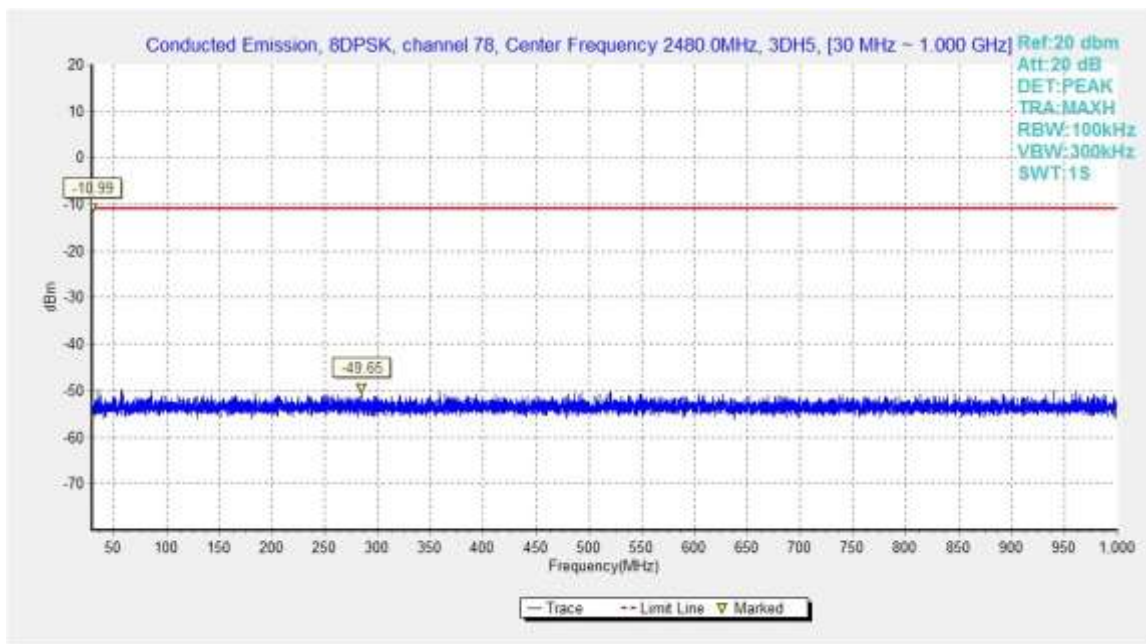


Fig.54. Conducted spurious emission: 8DPSK, Channel 78, 30MHz - 1GHz

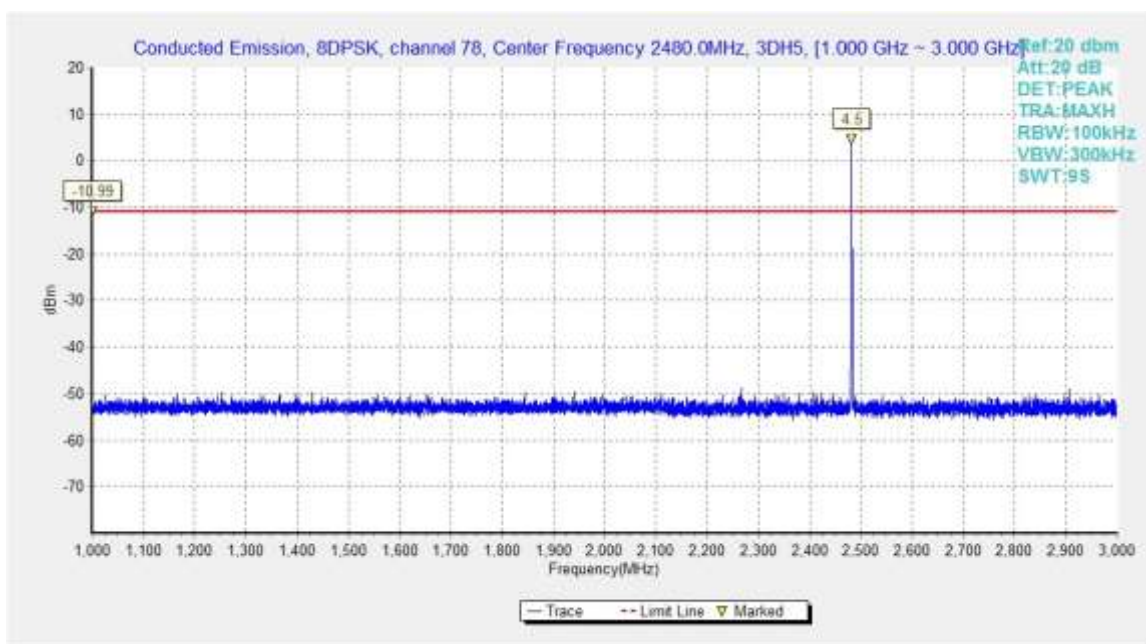


Fig.55. Conducted spurious emission: 8DPSK, Channel 78, 1GHz - 3GHz



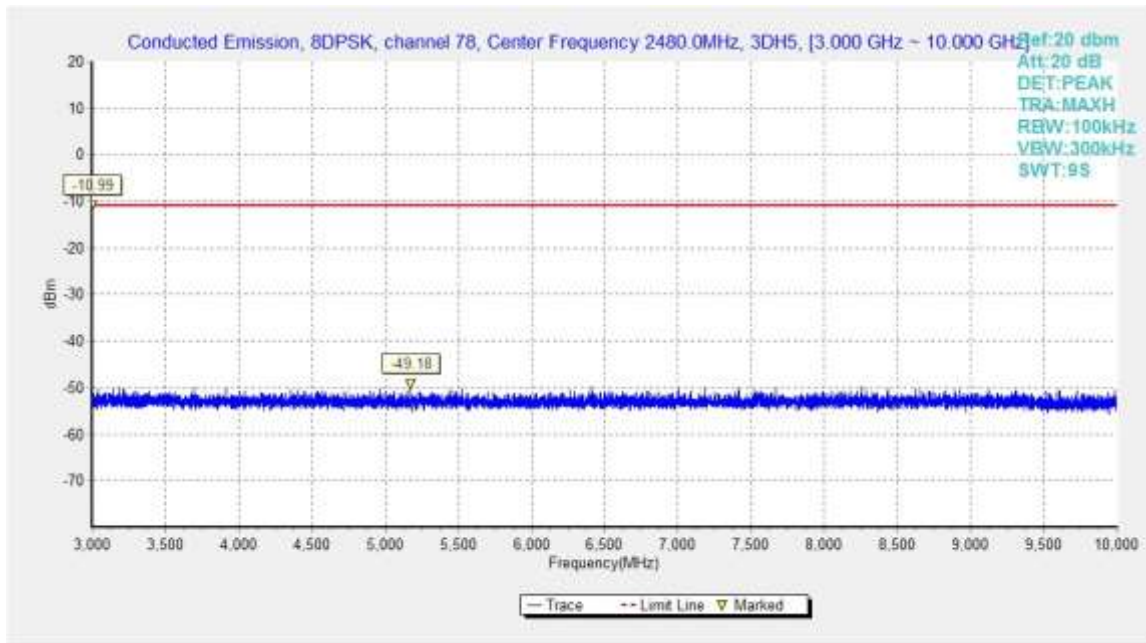


Fig.56. Conducted spurious emission: 8DPSK, Channel 78, 3GHz - 10GHz

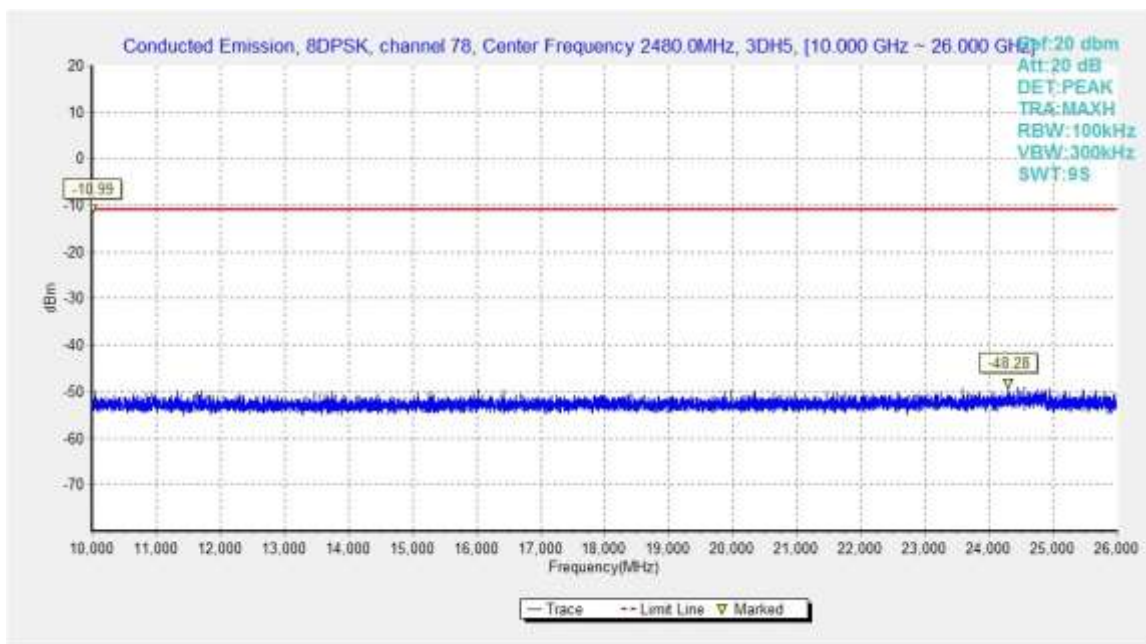


Fig.57. Conducted spurious emission: 8DPSK, Channel 78, 10GHz - 26GHz

## B.5. Radiated Unwanted Emission

### Limits

#### Measurement Limit

Standard	Limit
FCC 47 CFR Part 15.247, 15.205, 15.209	20dB below peak output power

In addition, radiated emissions which fall in the restricted bands, as defined in § 15.205(a), must also comply with the radiated emission limits specified in § 15.209(a) (see § 15.205(c)).

#### Limit in restricted band

Frequency (MHz)	Field strength( $\mu\text{V/m}$ )	Measurement distance (m)
0.009 - 0.490	$2400/F(\text{kHz})$	300
0.490 - 1.705	$24000/F(\text{kHz})$	30
1.705 – 30.0	30	30

Frequency of emission (MHz)	Field strength ( $\mu\text{V/m}$ )	Field strength (dB $\mu\text{V/m}$ )	Measurement distance (m)
30-88	100	40	3
88-216	150	43.5	3
216-960	200	46	3
Above 960	500	54	3

Note: When performing measurements at a distance other than that specified, the results shall be extrapolated to the specified distance using an extrapolation factor.

### Test setup



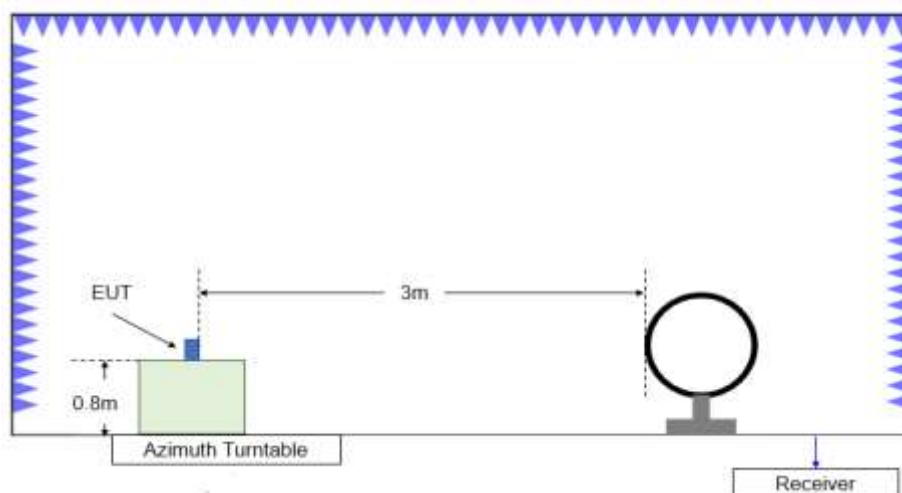


Figure B.5.1. Test Site Diagram (9kHz-30MHz)

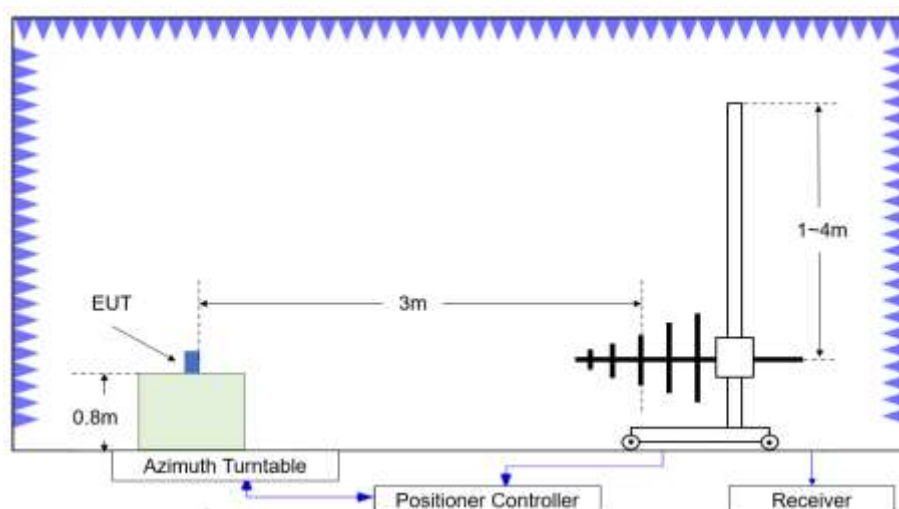

**Figure B.5.2. Test Site Diagram (30MHz-1GHz)**

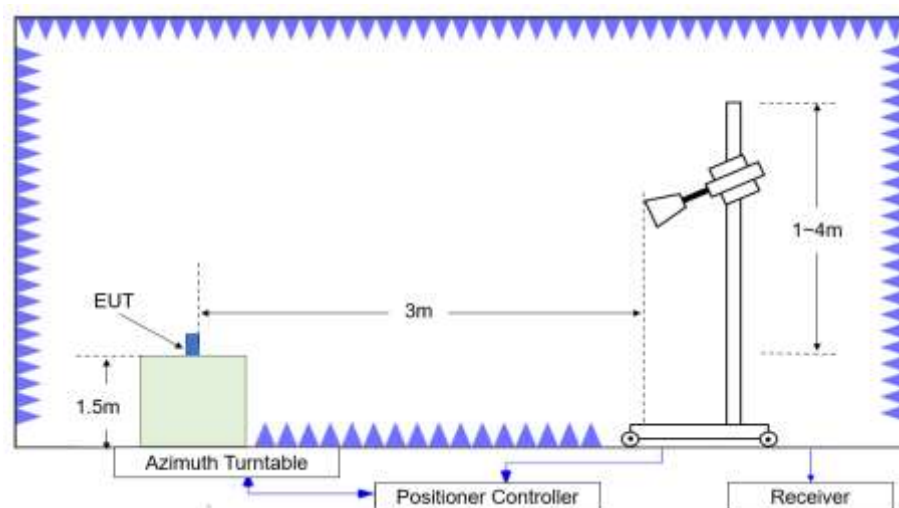

**Figure B.5.3. Test Site Diagram (1GHz-40GHz)**

### **Test Procedures**

Radiated unwanted emissions from the EUT were measured according to ANSI C63.10-2013 (ANSI C63.10-2020).

Test setting

Frequency of emission (MHz)	RBW/VBW	Sweep Time(s)
30-1000	100kHz/300kHz	5
1000-3000	1MHz/3MHz	15
3000-18000	1MHz/3MHz	40
18000-26500	1MHz/3MHz	20

### **Sample Calculation**

A "reference path loss" is established and the  $A_{Rpl}$  is the attenuation of "reference path loss", and including the gain of receive antenna, the gain of the preamplifier, the cable loss.

$P_{Mea}$  is the field strength recorded from the instrument.

The measurement results are obtained as described below:

Result= $P_{Mea}+A_{Rpl}= P_{Mea}+Cable\ Loss+Antenna\ Factor$

### Test note

1. Investigation has been done on all modes and modulations/data rates. Only the radiated emissions of the configuration that produced the worst case emissions are reported in this section.
2. Spurious emissions for all channels were investigated and almost the same below 1GHz. According to FCC 47 CFR §15.31, emission levels are not report much lower than the limit by over 20dB
3. Measurement frequencies were performed from 9 kHz to the 10<sup>th</sup> harmonic of highest fundamental frequency or 40GHz, whichever is lower.

### Test Result

EUT ID: UT12a

### Radiated Spurious Emission

#### GFSK Ch 0

Frequency (MHz)	Measurement Result (dBuV/m)	Cable Loss (dB)	Antenna Factor (dB/m)	Receiver Reading (dBuV)	Limit (dBuV/m)	Margin (dB)	Antenna Pol. (H/V)
17276.500	63.57	-26.20	42.00	47.77	74.00	10.43	H
13747.500	51.35	-29.10	40.70	39.75	74.00	22.65	V
12309.000	49.31	-30.10	38.80	40.61	74.00	24.69	V
9679.500	47.57	-33.00	37.80	42.77	74.00	26.43	H
4803.500	47.36	-37.10	32.60	51.86	74.00	26.64	H
2348.400	55.75	-19.20	27.30	47.65	74.00	18.25	V

#### GFSK Ch 39

Frequency (MHz)	Measurement Result (dBuV/m)	Cable Loss (dB)	Antenna Factor (dB/m)	Receiver Reading (dBuV)	Limit (dBuV/m)	Margin (dB)	Antenna Pol. (H/V)
17919.000	56.55	-25.40	42.30	39.65	74.00	17.45	H
13756.500	52.35	-29.10	40.70	40.75	74.00	21.65	V
12994.000	49.41	-29.80	39.80	39.41	74.00	24.59	V
9569.500	47.39	-33.20	37.90	42.69	74.00	26.61	H
4881.500	46.33	-36.90	32.80	50.43	74.00	27.67	H
7525.000	45.69	-34.60	37.40	42.89	74.00	28.31	H

#### GFSK Ch 78

Frequency (MHz)	Measurement Result (dBuV/m)	Cable Loss (dB)	Antenna Factor (dB/m)	Receiver Reading (dBuV)	Limit (dBuV/m)	Margin (dB)	Antenna Pol. (H/V)
17917.000	56.69	-25.40	42.30	39.79	74.00	17.31	V
14084.500	51.86	-28.70	40.50	40.06	74.00	22.14	H
12717.000	49.34	-30.40	39.40	40.34	74.00	24.66	H

8591.000	47.59	-33.60	37.60	43.59	74.00	26.41	H
4959.500	47.37	-36.70	32.90	51.17	74.00	26.63	H
2485.300	55.83	-19.00	27.90	46.93	74.00	18.17	H

#### $\pi/4$ DQPSK Ch 0

Frequency (MHz)	Measurement Result (dBuV/m)	Cable Loss (dB)	Antenna Factor (dB/m)	Receiver Reading (dBuV)	Limit (dBuV/m)	Margin (dB)	Antenna Pol. (H/V)
17932.500	56.55	-25.40	42.30	39.65	74.00	17.45	H
13764.500	51.44	-29.10	40.90	39.64	74.00	22.56	H
12827.000	49.63	-30.60	39.60	40.63	74.00	24.37	V
9598.000	47.92	-33.20	37.90	43.22	74.00	26.08	V
7504.500	46.84	-34.60	37.50	43.94	74.00	27.16	H
2389.400	55.69	-19.20	27.50	47.39	74.00	18.31	H

#### $\pi/4$ DQPSK Ch 39

Frequency (MHz)	Measurement Result (dBuV/m)	Cable Loss (dB)	Antenna Factor (dB/m)	Receiver Reading (dBuV)	Limit (dBuV/m)	Margin (dB)	Antenna Pol. (H/V)
17841.000	56.40	-25.40	42.30	39.50	74.00	17.60	V
13593.000	51.65	-29.90	40.60	40.95	74.00	22.35	H
12863.000	48.89	-30.60	39.60	39.89	74.00	25.11	V
9995.000	47.22	-33.20	38.30	42.12	74.00	26.78	V
7511.000	46.51	-34.60	37.50	43.61	74.00	27.49	H
4882.000	43.53	-36.90	32.80	47.63	74.00	30.47	H

#### $\pi/4$ DQPSK Ch 78

Frequency (MHz)	Measurement Result (dBuV/m)	Cable Loss (dB)	Antenna Factor (dB/m)	Receiver Reading (dBuV)	Limit (dBuV/m)	Margin (dB)	Antenna Pol. (H/V)
17944.000	57.01	-25.40	42.30	40.11	74.00	16.99	H
13726.000	51.86	-29.10	40.70	40.26	74.00	22.14	H
11817.000	49.19	-31.30	38.90	41.59	74.00	24.81	H
8474.000	46.91	-33.80	37.50	43.21	74.00	27.09	H
7603.000	45.57	-34.80	37.40	42.97	74.00	28.43	H
2491.300	56.28	-19.00	27.90	47.38	74.00	17.72	H

### 8DPSK Ch 0

Frequency (MHz)	Measurement Result (dBuV/m)	Cable Loss (dB)	Antenna Factor (dB/m)	Receiver Reading (dBuV)	Limit (dBuV/m)	Margin (dB)	Antenna Pol. (H/V)
17825.000	55.85	-25.40	42.30	38.95	74.00	18.15	H
13736.000	52.23	-29.10	40.70	40.63	74.00	21.77	V
12863.500	49.29	-30.60	39.60	40.29	74.00	24.71	H
4803.500	47.32	-37.10	32.60	51.82	74.00	26.68	H
9997.000	47.24	-33.20	38.30	42.14	74.00	26.76	V
2378.200	55.63	-19.20	27.50	47.33	74.00	18.37	H

### 8DPSK Ch 39

Frequency (MHz)	Measurement Result (dBuV/m)	Cable Loss (dB)	Antenna Factor (dB/m)	Receiver Reading (dBuV)	Limit (dBuV/m)	Margin (dB)	Antenna Pol. (H/V)
17922.000	56.28	-25.40	42.30	39.38	74.00	17.72	V
13992.000	51.71	-28.90	40.70	39.91	74.00	22.29	H
12387.500	49.45	-30.10	38.80	40.75	74.00	24.55	H
8796.000	46.81	-33.80	37.70	42.91	74.00	27.19	H
7236.000	46.37	-34.50	37.40	43.47	74.00	27.63	H
4881.500	43.79	-36.90	32.80	47.89	74.00	30.21	H

### 8DPSK Ch 78

Frequency (MHz)	Measurement Result (dBuV/m)	Cable Loss (dB)	Antenna Factor (dB/m)	Receiver Reading (dBuV)	Limit (dBuV/m)	Margin (dB)	Antenna Pol. (H/V)
17883.000	56.37	-25.40	42.30	39.47	74.00	17.63	H
14097.500	51.97	-28.70	40.50	40.17	74.00	22.03	H
12964.500	49.35	-29.80	39.70	39.45	74.00	24.65	H
9679.500	47.43	-33.00	37.80	42.63	74.00	26.57	H
7242.000	46.27	-34.50	37.40	43.37	74.00	27.73	V
2498.500	56.06	-19.00	27.90	47.16	74.00	17.94	V

## Average Measurement results

### GFSK Ch 0

Frequency (MHz)	Measurement Result (dBuV/m)	Cable Loss (dB)	Antenna Factor (dB/m)	Receiver Reading (dBuV)	Limit (dBuV/m)	Margin (dB)	Antenna Pol. (H/V)
17276.500	50.18	-26.20	42.00	34.38	54.00	3.82	H
4803.500	44.75	-37.10	32.60	49.25	54.00	9.25	H
13758.000	41.93	-29.10	40.70	30.33	54.00	12.07	H
12983.000	40.18	-29.80	39.80	30.18	54.00	13.82	H
8591.000	37.66	-33.60	37.60	33.66	54.00	16.34	H
2383.600	43.94	-19.20	27.50	35.64	54.00	10.06	H

### GFSK Ch 39

Frequency (MHz)	Measurement Result (dBuV/m)	Cable Loss (dB)	Antenna Factor (dB/m)	Receiver Reading (dBuV)	Limit (dBuV/m)	Margin (dB)	Antenna Pol. (H/V)
17965.000	46.77	-25.40	42.30	29.87	54.00	7.23	V
4881.500	44.59	-36.90	32.80	48.69	54.00	9.41	H
13767.000	42.07	-29.10	40.90	30.27	54.00	11.93	V
12862.500	39.71	-30.60	39.60	30.71	54.00	14.29	V
9797.000	37.38	-33.10	38.00	32.48	54.00	16.62	H
7236.500	36.19	-34.50	37.40	33.29	54.00	17.81	H

### GFSK Ch 78

Frequency (MHz)	Measurement Result (dBuV/m)	Cable Loss (dB)	Antenna Factor (dB/m)	Receiver Reading (dBuV)	Limit (dBuV/m)	Margin (dB)	Antenna Pol. (H/V)
17912.500	47.12	-25.40	42.30	30.22	54.00	6.88	H
4959.500	44.53	-36.70	32.90	48.33	54.00	9.47	H
13767.500	42.12	-29.10	40.90	30.32	54.00	11.88	H
12431.000	39.68	-30.10	38.80	30.98	54.00	14.32	V
9892.500	37.34	-33.10	38.10	32.34	54.00	16.66	H
2485.600	44.45	-19.00	27.90	35.55	54.00	9.55	H



### $\pi/4$ DQPSK Ch 0

Frequency (MHz)	Measurement Result (dBuV/m)	Cable Loss (dB)	Antenna Factor (dB/m)	Receiver Reading (dBuV)	Limit (dBuV/m)	Margin (dB)	Antenna Pol. (H/V)
17925.500	46.70	-25.40	42.30	29.80	54.00	7.30	V
13779.500	42.13	-29.10	40.90	30.33	54.00	11.87	H
4804.000	40.91	-37.10	32.60	45.41	54.00	13.09	H
12398.500	39.98	-30.10	38.80	31.28	54.00	14.02	H
9563.500	37.35	-33.20	37.90	32.65	54.00	16.65	H
2383.600	44.05	-19.20	27.50	35.75	54.00	9.95	H

### $\pi/4$ DQPSK Ch 39

Frequency (MHz)	Measurement Result (dBuV/m)	Cable Loss (dB)	Antenna Factor (dB/m)	Receiver Reading (dBuV)	Limit (dBuV/m)	Margin (dB)	Antenna Pol. (H/V)
17973.500	46.99	-25.40	42.30	30.09	54.00	7.01	H
14123.000	41.93	-29.40	40.50	30.83	54.00	12.07	V
12789.500	40.00	-30.40	39.60	30.80	54.00	14.00	H
4882.000	39.45	-36.90	32.80	43.55	54.00	14.55	H
9692.000	37.28	-33.00	37.80	32.48	54.00	16.72	H
7603.000	36.42	-34.80	37.40	33.82	54.00	17.58	V

### $\pi/4$ DQPSK Ch 78

Frequency (MHz)	Measurement Result (dBuV/m)	Cable Loss (dB)	Antenna Factor (dB/m)	Receiver Reading (dBuV)	Limit (dBuV/m)	Margin (dB)	Antenna Pol. (H/V)
17918.500	46.74	-25.40	42.30	29.84	54.00	7.26	H
14111.000	42.68	-29.40	40.50	31.58	54.00	11.32	H
4960.000	40.25	-36.70	32.90	44.05	54.00	13.75	H
12990.500	39.51	-29.80	39.80	29.51	54.00	14.49	H
9991.500	37.23	-33.20	38.30	32.13	54.00	16.77	V
2499.800	44.43	-19.00	27.90	35.53	54.00	9.57	V

### 8DPSK Ch 0

Frequency (MHz)	Measurement Result (dBuV/m)	Cable Loss (dB)	Antenna Factor (dB/m)	Receiver Reading (dBuV)	Limit (dBuV/m)	Margin (dB)	Antenna Pol. (H/V)
17948.000	46.46	-25.40	42.30	29.56	54.00	7.54	V
4803.500	42.20	-37.10	32.60	46.70	54.00	11.80	H
14107.000	42.18	-28.70	40.50	30.38	54.00	11.82	H
12965.500	40.10	-29.80	39.70	30.20	54.00	13.90	H
9127.000	37.39	-33.70	37.80	33.29	54.00	16.61	V
2336.700	43.83	-19.20	27.30	35.73	54.00	10.17	H

### 8DPSK Ch 39

Frequency (MHz)	Measurement Result (dBuV/m)	Cable Loss (dB)	Antenna Factor (dB/m)	Receiver Reading (dBuV)	Limit (dBuV/m)	Margin (dB)	Antenna Pol. (H/V)
17946.500	46.59	-25.40	42.30	29.69	54.00	7.41	H
13770.000	42.26	-29.10	40.90	30.46	54.00	11.74	V
4882.000	40.20	-36.90	32.80	44.30	54.00	13.80	H
12407.000	39.31	-30.10	38.80	30.61	54.00	14.69	V
9696.500	37.64	-33.00	37.80	32.84	54.00	16.36	V
7236.000	36.40	-34.50	37.40	33.50	54.00	17.60	V

### 8DPSK Ch 78

Frequency (MHz)	Measurement Result (dBuV/m)	Cable Loss (dB)	Antenna Factor (dB/m)	Receiver Reading (dBuV)	Limit (dBuV/m)	Margin (dB)	Antenna Pol. (H/V)
17854.000	46.58	-25.40	42.30	29.68	54.00	7.42	H
13833.000	42.25	-29.10	40.90	30.45	54.00	11.75	H
4960.000	41.43	-36.70	32.90	45.23	54.00	12.57	H
12825.500	39.75	-30.60	39.60	30.75	54.00	14.25	H
9792.500	37.37	-33.10	38.00	32.47	54.00	16.63	V
2496.500	44.65	-19.00	27.90	35.75	54.00	9.35	H

### Conclusion: Pass

Note: the spurious emission above 18G is noise only and did not show on the report.

### Band edge compliance

Mode	Channel	Frequency Range	Test Results	Conclusion
GFSK	0	2.31GHz ~2.43GHz	Fig.58	P
	78	2.45GHz ~2.5GHz	Fig.59	P

Mode	Channel	Frequency Range	Test Results	Conclusion
$\pi/4$ DQPSK	0	2.31GHz ~2.43GHz	Fig.60	P
	78	2.45GHz ~2.5GHz	Fig.61	P

Mode	Channel	Frequency Range	Test Results	Conclusion
8DPSK	0	2.31GHz ~2.43GHz	Fig.62	P
	78	2.45GHz ~2.5GHz	Fig.63	P

Conclusion: PASS

Test graphs as below

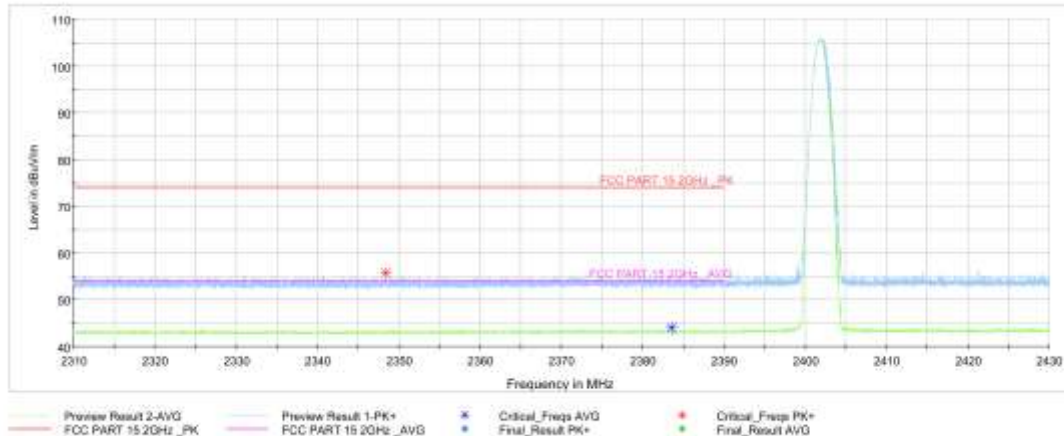


Fig.58. Frequency Band Edges: GFSK, Channel 0, Hopping Off, 2.31 GHz – 2.45GHz



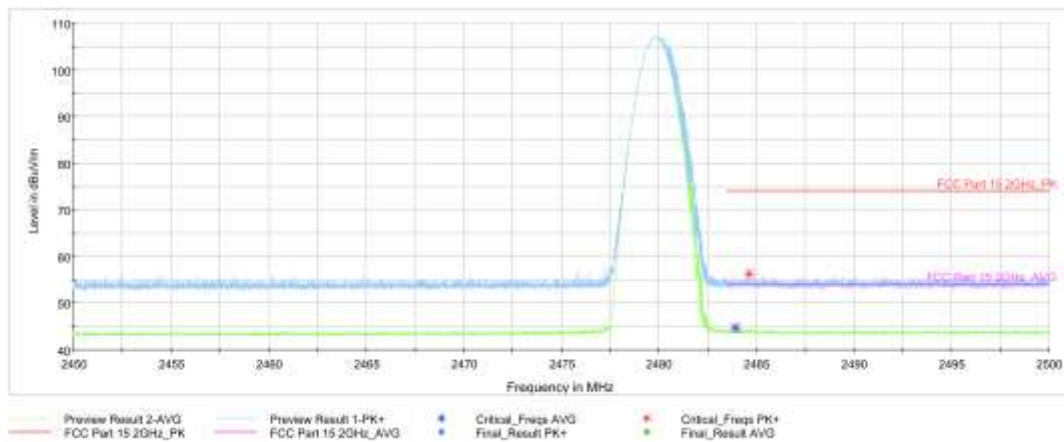



Fig.59. Frequency Band Edges: GFSK, Channel 78, Hopping Off, ch11, 2.45 GHz - 2.50GHz

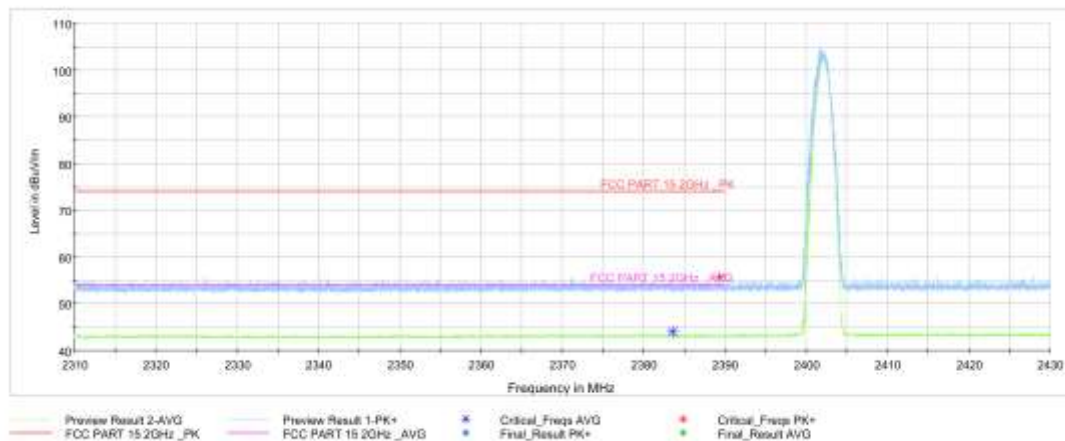


**Fig.60. Frequency Band Edges:  $\pi/4$  DQPSK, Channel 0, Hopping Off, 2.31 GHz - 2.45GHz**

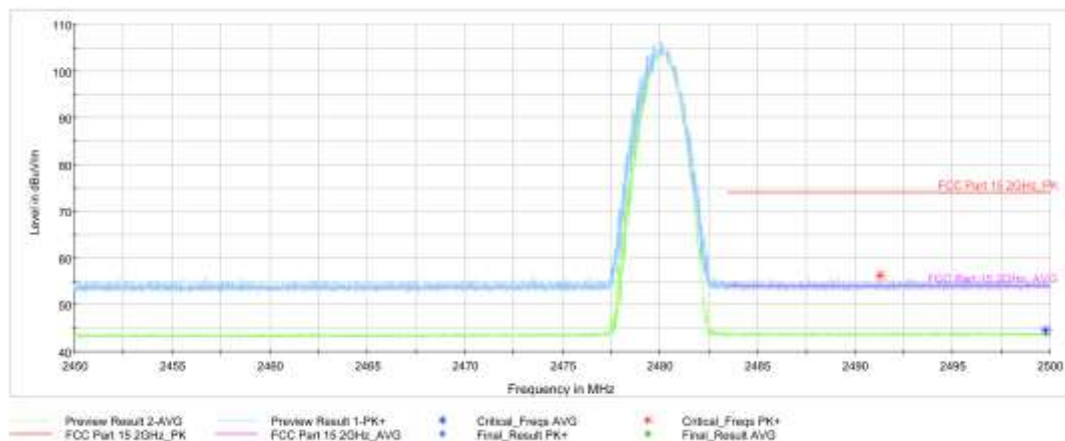

**Fig.61. Frequency Band Edges:  $\pi/4$  DQPSK, Channel 78, Hopping Off, 2.45 GHz - 2.50GHz**

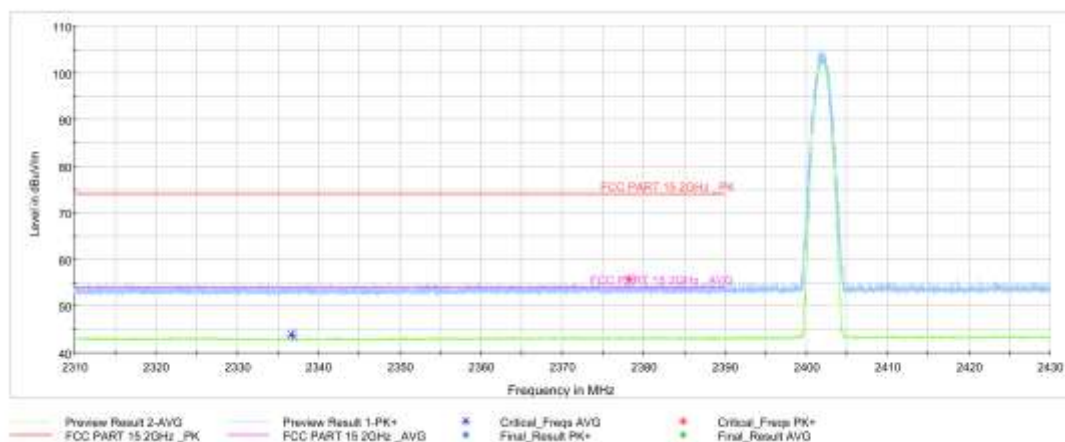

**Fig.62. Frequency Band Edges: 8DPSK, Channel 0, 2.31 GHz - 2.45GHz**

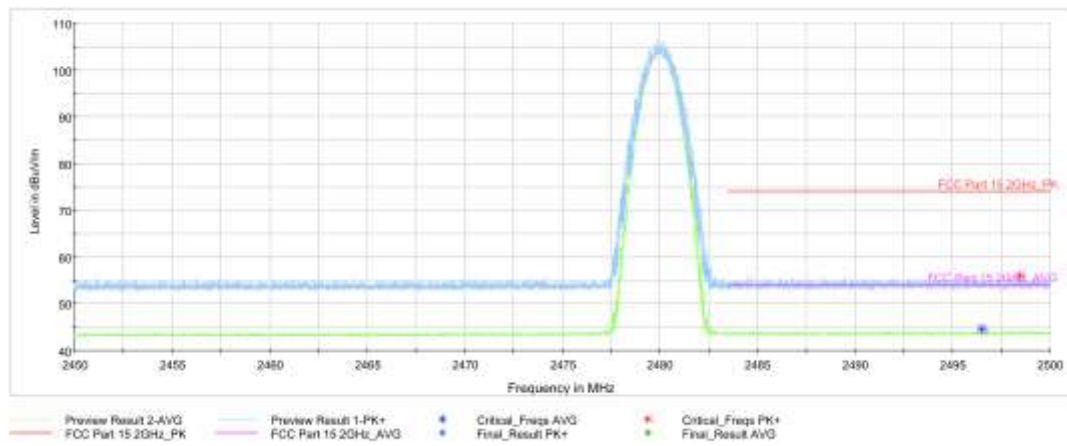

**Fig.63. Frequency Band Edges: 8DPSK, Channel 78, 2.45 GHz - 2.50GHz**

## B.6. Time of Occupancy (Dwell Time)

**Method of Measurement: See ANSI C63.10-clause 7.8.4**

The EUT must have its hopping function enabled. Use the following spectrum analyzer settings:

- Span = zero span, centered on a hopping channel
- RBW = 1 MHz
- VBW  $\geq$  RBW
- Sweep = as necessary to capture the entire dwell time per hopping channel
- Detector function = peak
- Trace = max hold

Measure a pulse time in time domain at middle frequency and then count the hopping number in 31.6s(which equals with 0.4 multiply 79) of middle frequency ,then multiply the pulse time and hopping number and record them.

### Measurement Limit:

Standard	Limit (ms)
FCC 47 CFR Part 15.247(a) (1)(iii)	< 400

### Measurement Result:

#### For GFSK

Channel	Packet	Pulse time (ms)		Number of Transmissions		Dwell Time (ms)	Conclusion
39	DH1	Fig.64	0.38	Fig.65	320	121.6	P
	DH3	Fig.66	1.63	Fig.67	116	189.08	P
	DH5	Fig.68	2.88	Fig.69	57	164.16	P

#### For $\pi/4$ DQPSK

Channel	Packet	Pulse time (ms)		Number of Transmissions		Dwell Time (ms)	Conclusion
39	2DH1	Fig.70	0.38	Fig.71	318	120.84	P
	2DH3	Fig.72	1.64	Fig.73	109	178.76	P
	2DH5	Fig.74	2.88	Fig.75	66	190.08	P

### For 8DPSK

Channel	Packet	Pulse time (ms)		Number of Transmissions		Dwell Time (ms)	Conclusion
39	3DH1	Fig.76	0.38	Fig.77	318	120.84	P
	3DH3	Fig.78	1.63	Fig.79	98	159.74	P
	3DH5	Fig.80	2.89	Fig.81	73	210.97	P

**Conclusion: PASS**

**Test graphs as below:**

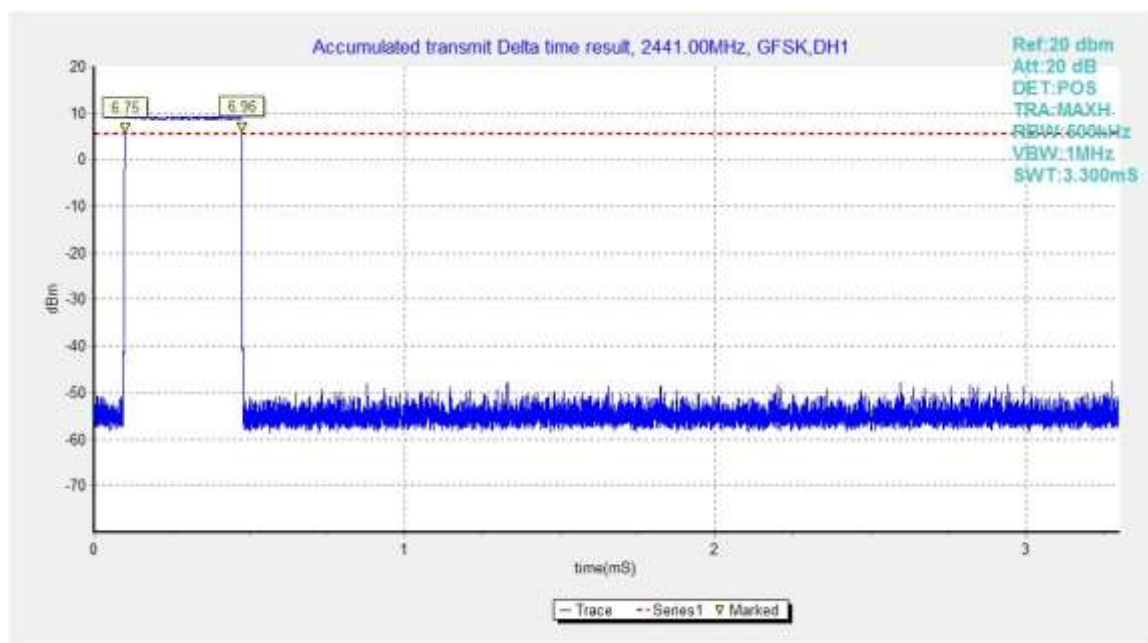


Fig.64. Time of occupancy (Dwell Time): Channel 39, Packet DH1



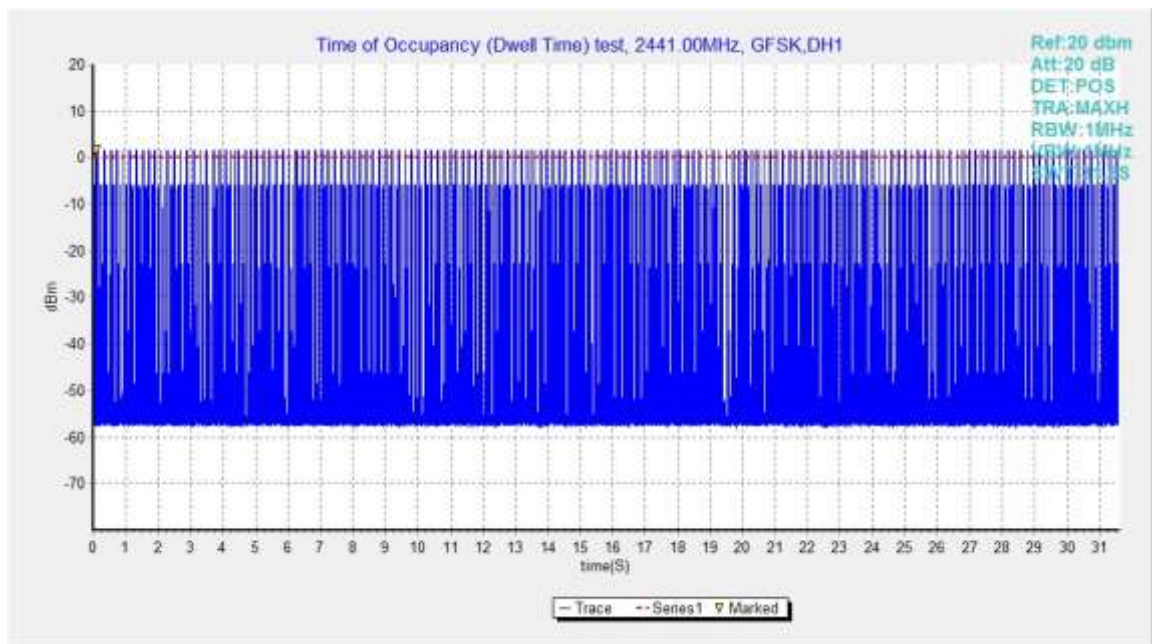


Fig.65. Number of Transmissions Measurement: Channel 39,Packet DH1

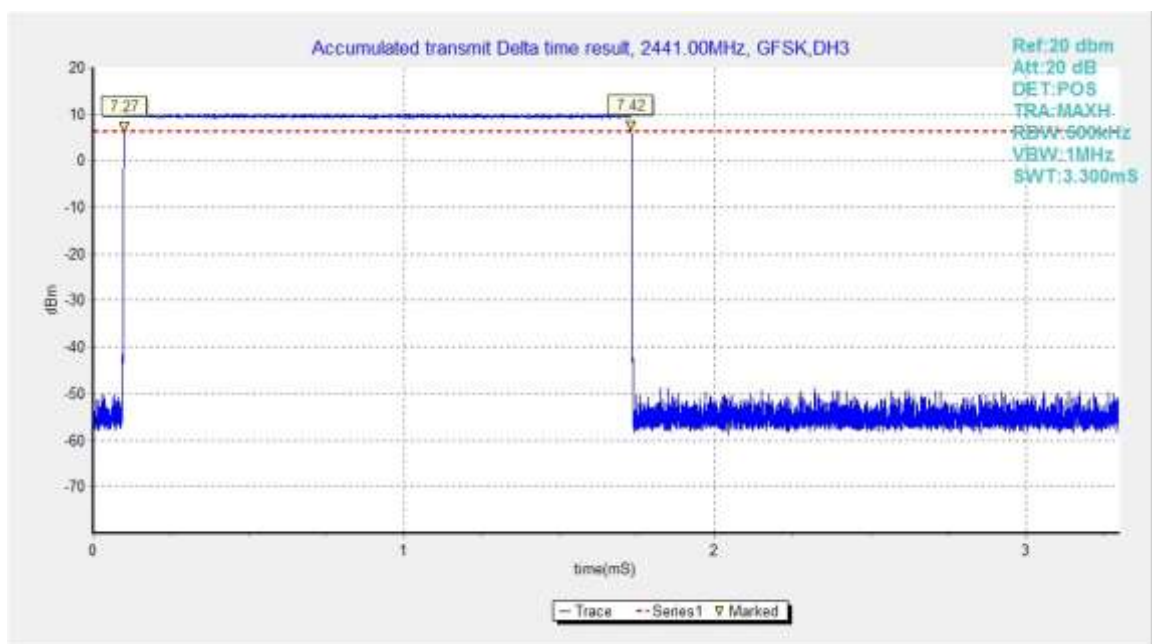


Fig.66. Time of occupancy (Dwell Time): Channel 39, Packet DH3

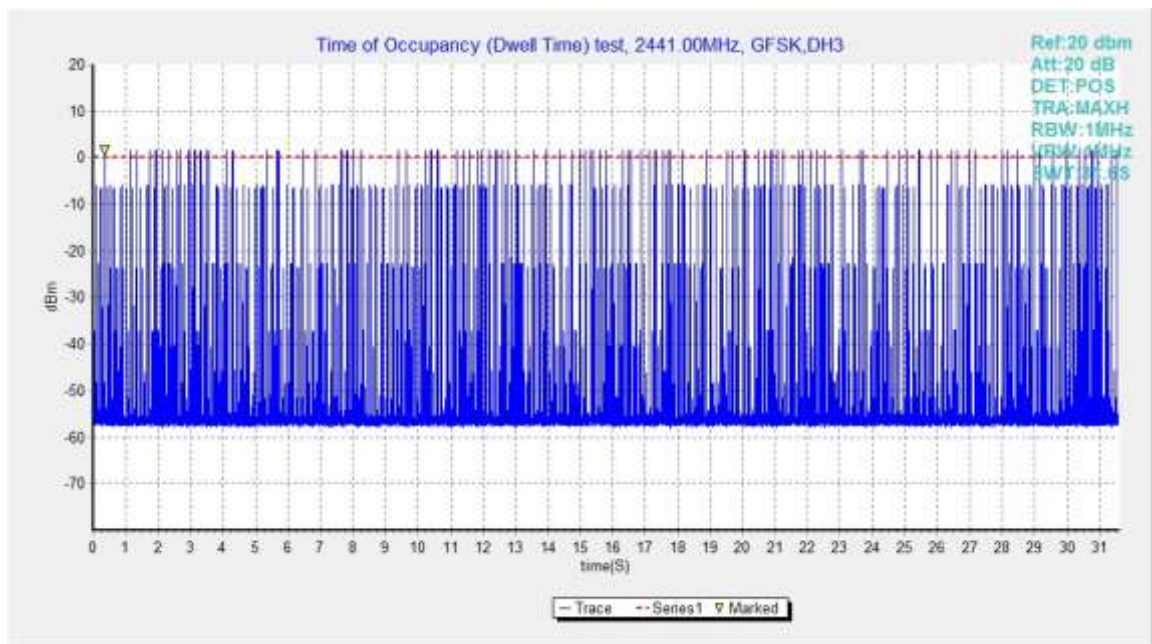


Fig.67. Number of Transmissions Measurement: Channel 39, Packet DH3

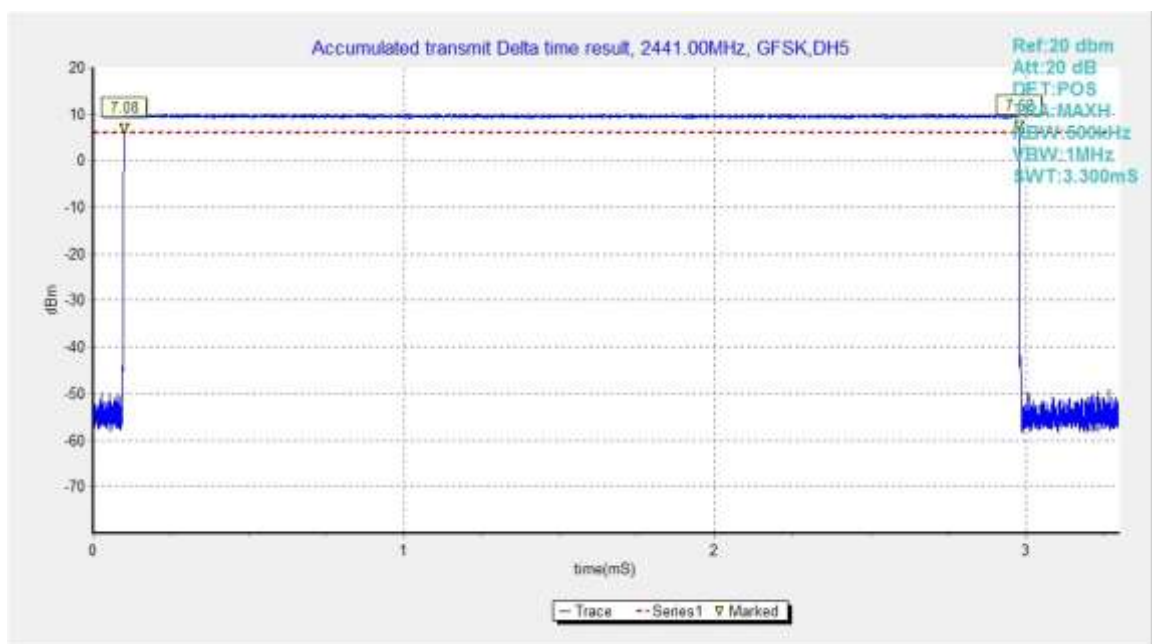


Fig.68. Time of occupancy (Dwell Time): Channel 39, Packet DH5

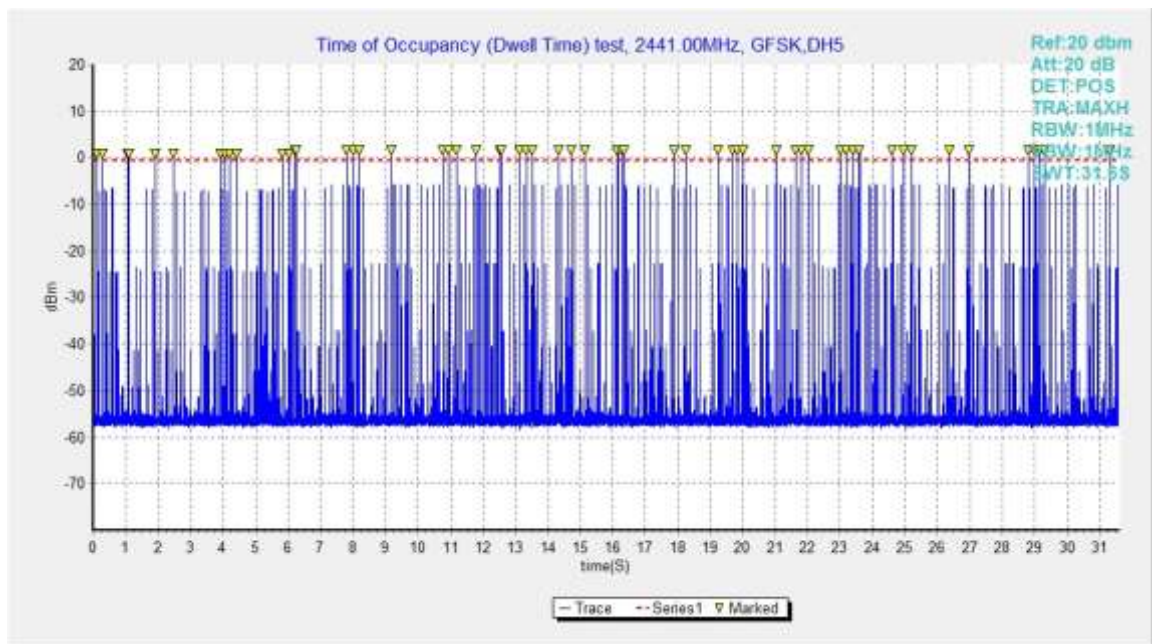


Fig.69. Number of Transmissions Measurement: Channel 39, Packet DH5

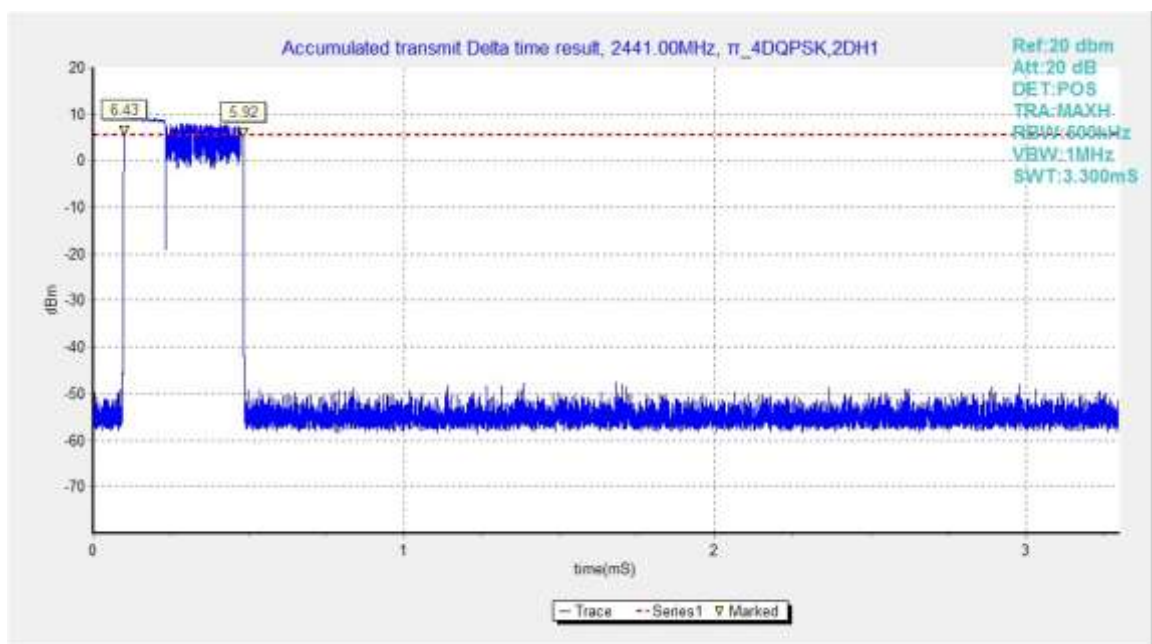


Fig.70. Time of occupancy (Dwell Time): Channel 39, Packet 2-DH1

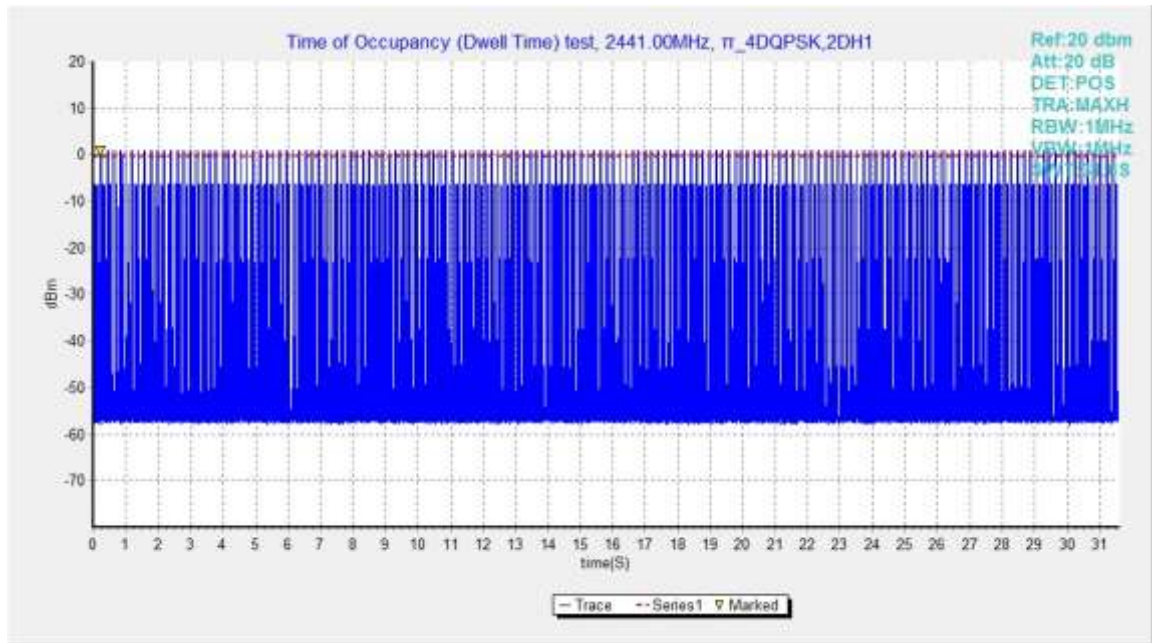


Fig.71. Number of Transmissions Measurement: Channel 39,Packet 2-DH1

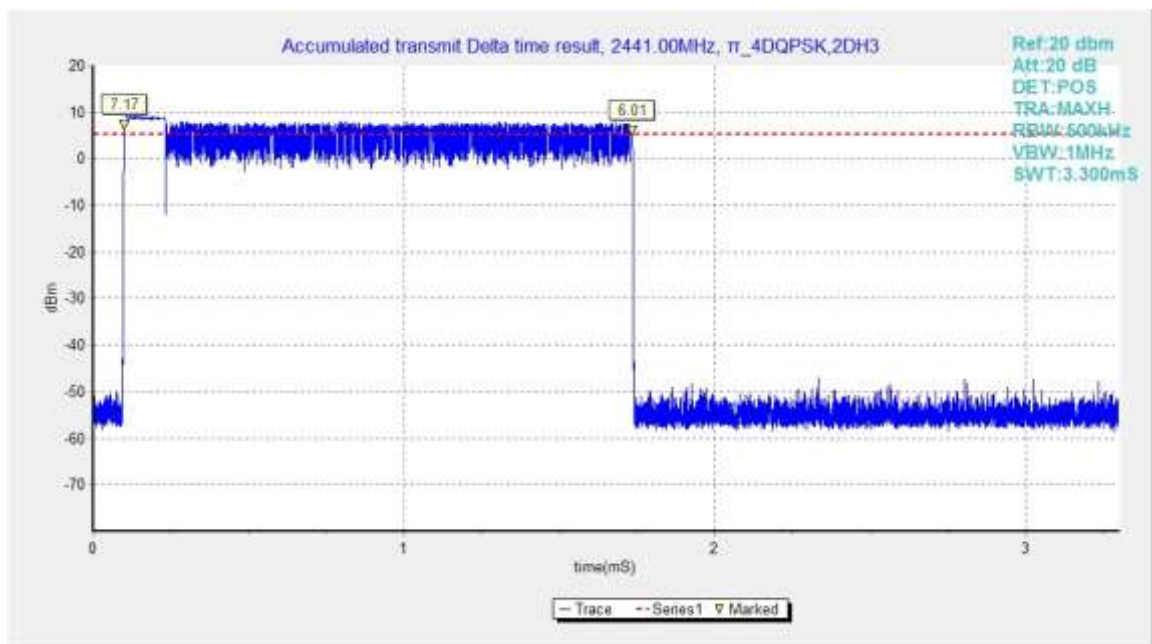


Fig.72. Time of occupancy (Dwell Time): Channel 39, Packet 2-DH3



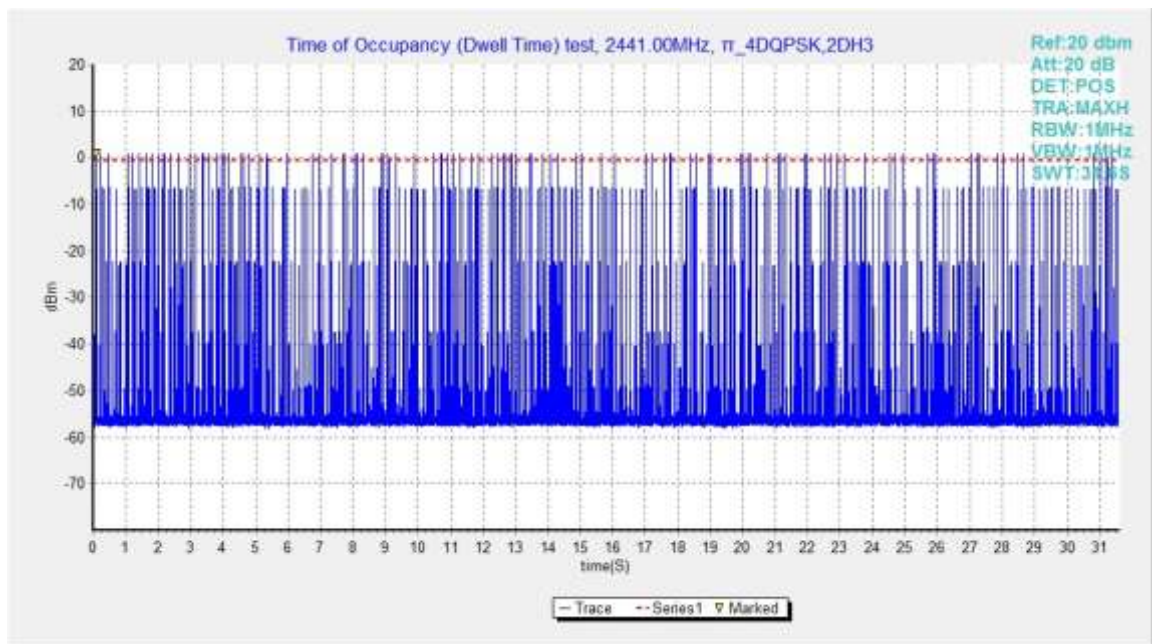


Fig.73. Number of Transmissions Measurement: Channel 39,Packet 2-DH3

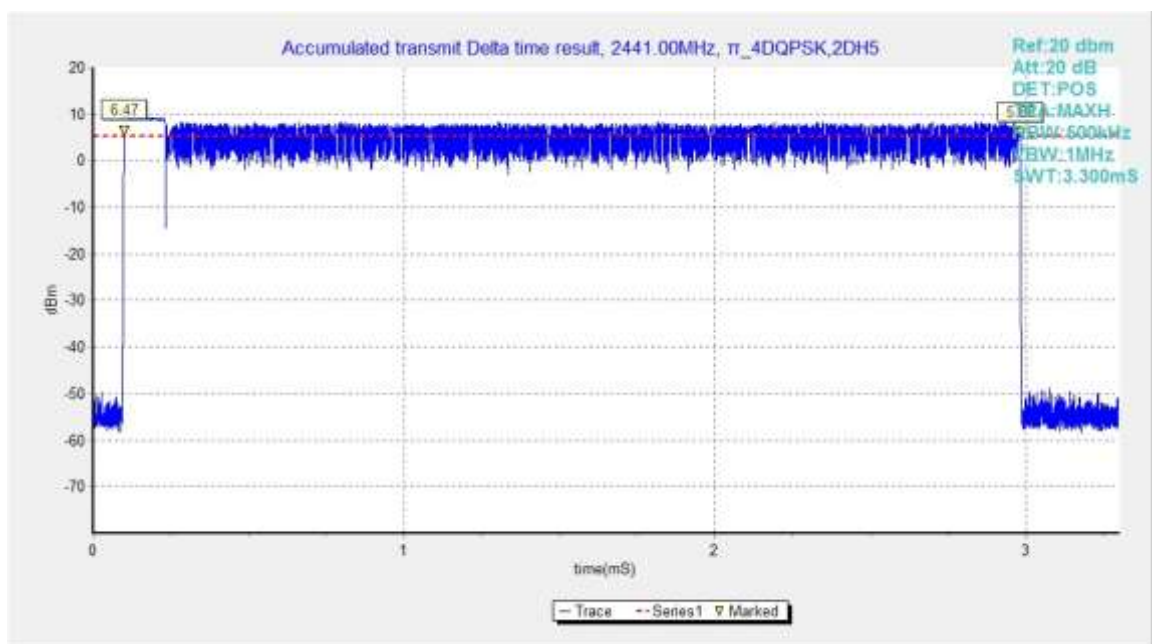


Fig.74. Time of occupancy (Dwell Time): Channel 39, Packet 2-DH5

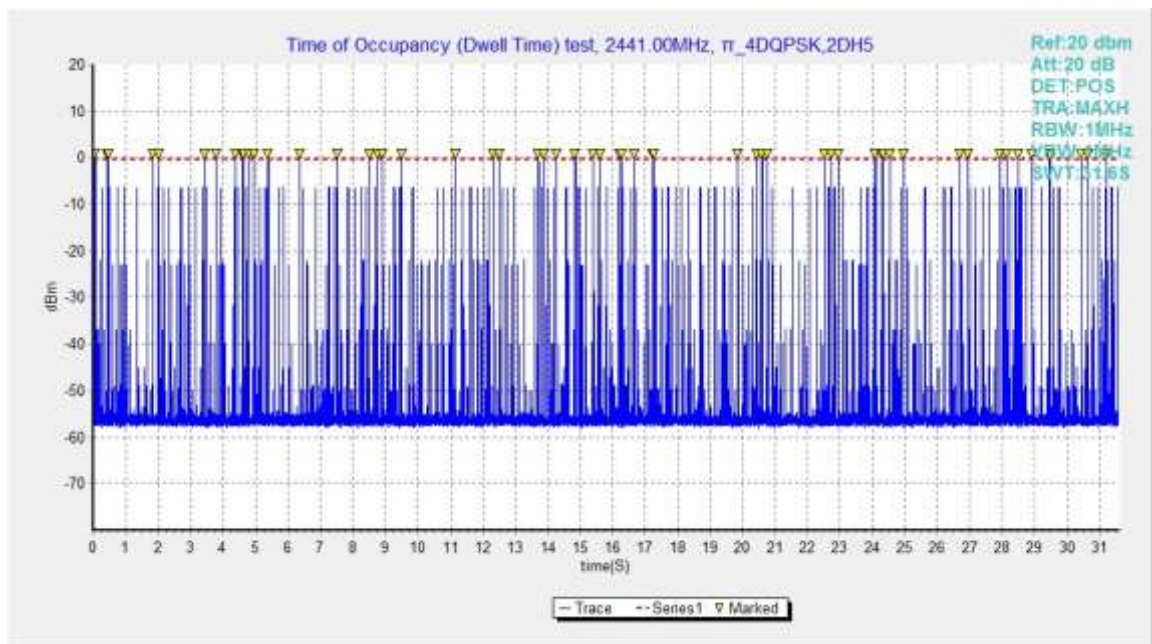


Fig.75. Number of Transmissions Measurement: Channel 39,Packet 2-DH5

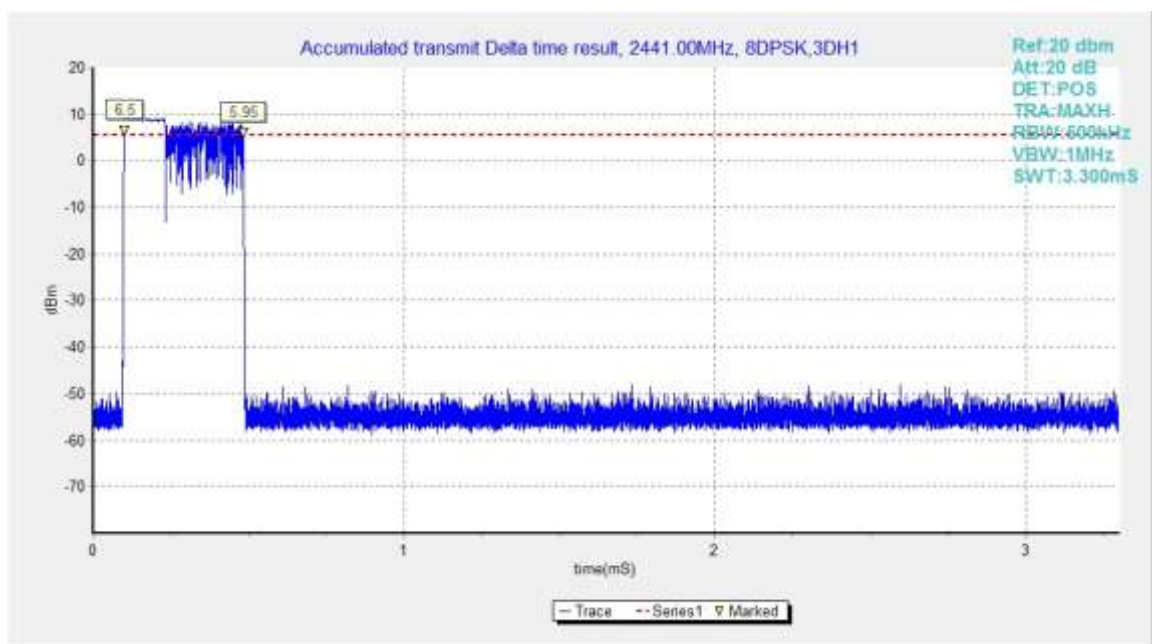


Fig.76. Time of occupancy (Dwell Time): Channel 39, Packet 3-DH1



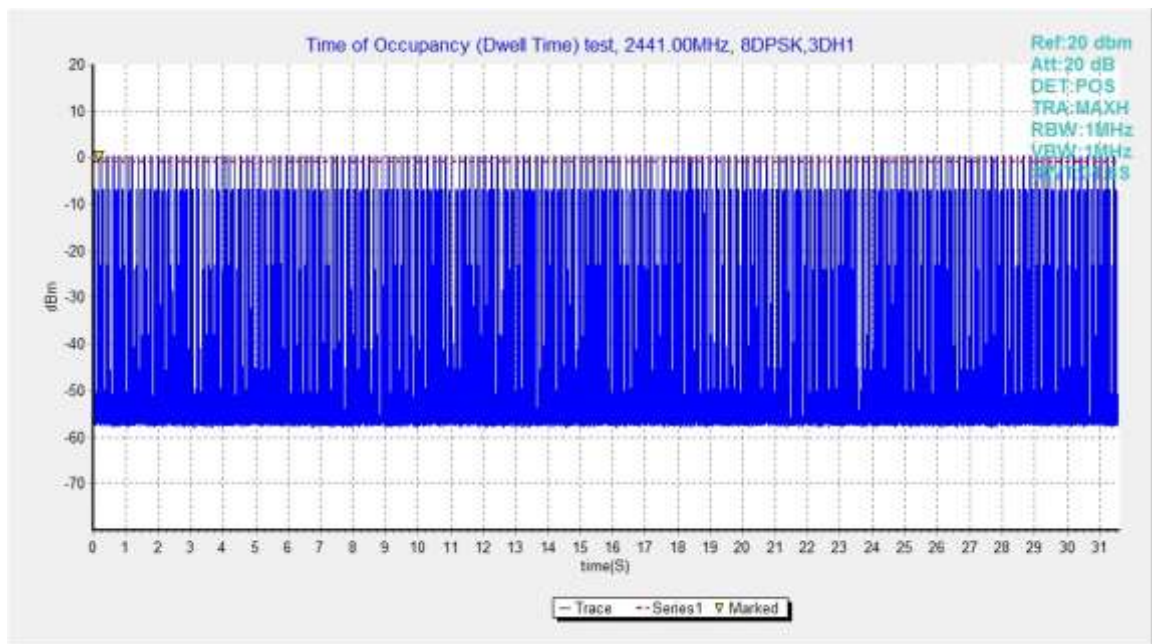


Fig.77. Number of Transmissions Measurement: Channel 39,Packet 3-DH1

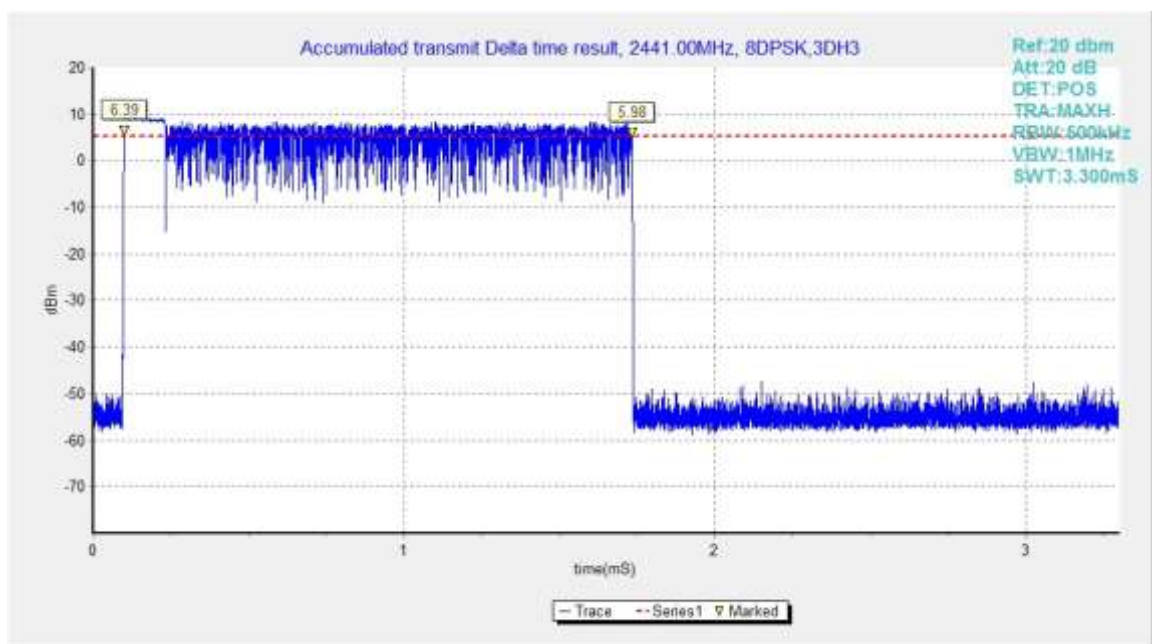


Fig.78. Time of occupancy (Dwell Time): Channel 39, Packet 3-DH3

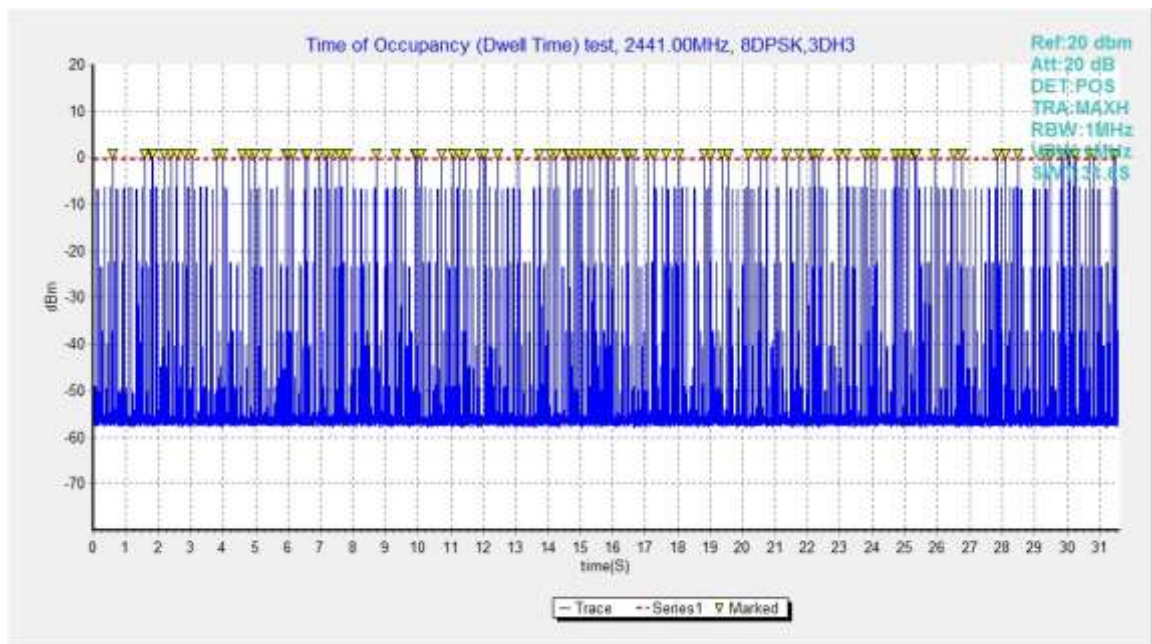


Fig.79. Number of Transmissions Measurement: Channel 39,Packet 3-DH3

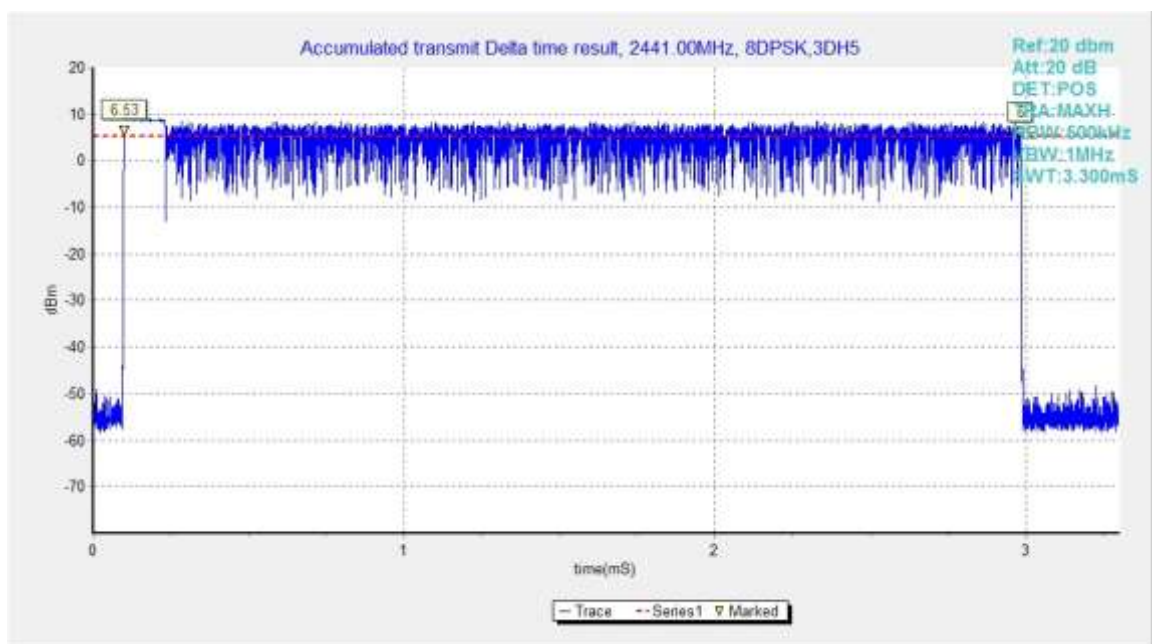


Fig.80. Time of occupancy (Dwell Time): Channel 39, Packet 3-DH5

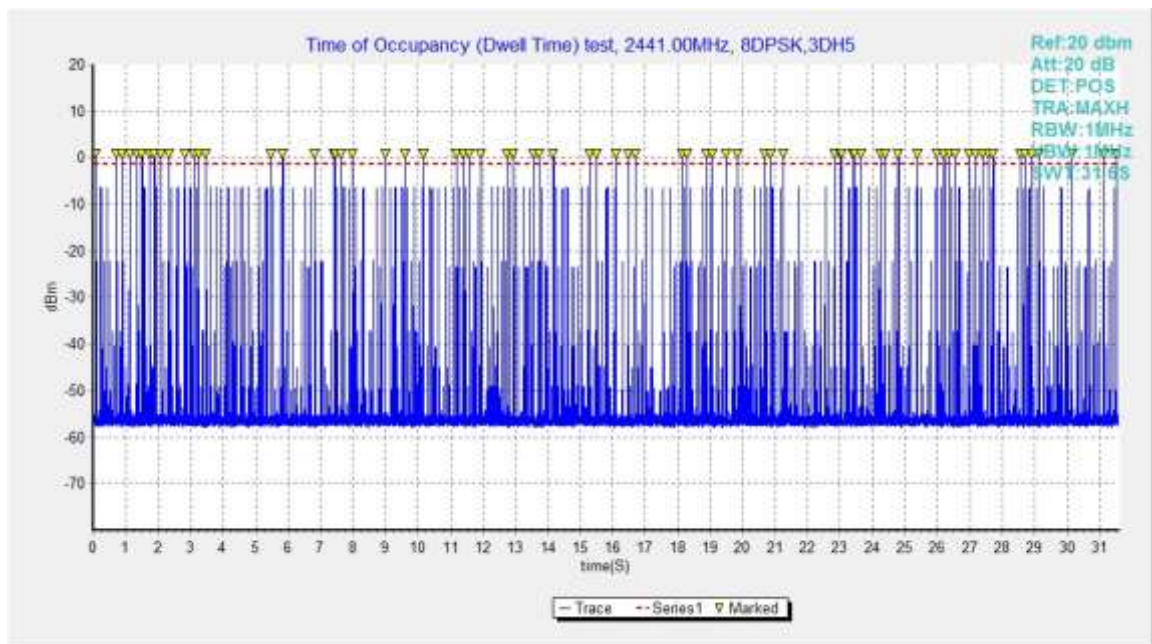


Fig.81. Number of Transmissions Measurement: Channel 39,Packet 3-DH5

## B.7. 20dB Bandwidth

**Method of Measurement: See ANSI C63.10-clause 6.9.2**

Measurement Procedure - Unwanted Emissions

1. Set RBW = 30kHz.
2. Set VBW = 100 kHz.
3. Set span to 3MHz
4. Detector = peak.
5. Trace Mode = max hold.
6. Sweep = auto couple.
7. Allow the trace to stabilize (this may take some time, depending on the extent of the span).

**Measurement Limit:**

Standard	Limit
FCC 47 CFR Part 15.247(a)(1)	NA *

Use NdB Down function of the SA to measure the 20dB Bandwidth

\* Comment: This test case is not required according to the latest FCC 47 CFR Part 15.247. But the test results are necessary for “carrier frequency separation” test case, in Annex A.8.

**Measurement Results:**

**For GFSK**

Channel	20dB Bandwidth (kHz)		Conclusion
0	Fig.82	944.25	NA
39	Fig.83	960.75	NA
78	Fig.84	942.75	NA

**For  $\pi/4$  DQPSK**

Channel	20dB Bandwidth (kHz)		Conclusion
0	Fig.85	1227.00	NA
39	Fig.86	1256.25	NA
78	Fig.87	1259.25	NA

**For 8DPSK**

Channel	20dB Bandwidth (kHz)		Conclusion
0	Fig.88	1261.50	NA
39	Fig.89	1204.50	NA
78	Fig.90	1262.25	NA

**Conclusion: NA**

**Test graphs as below:**

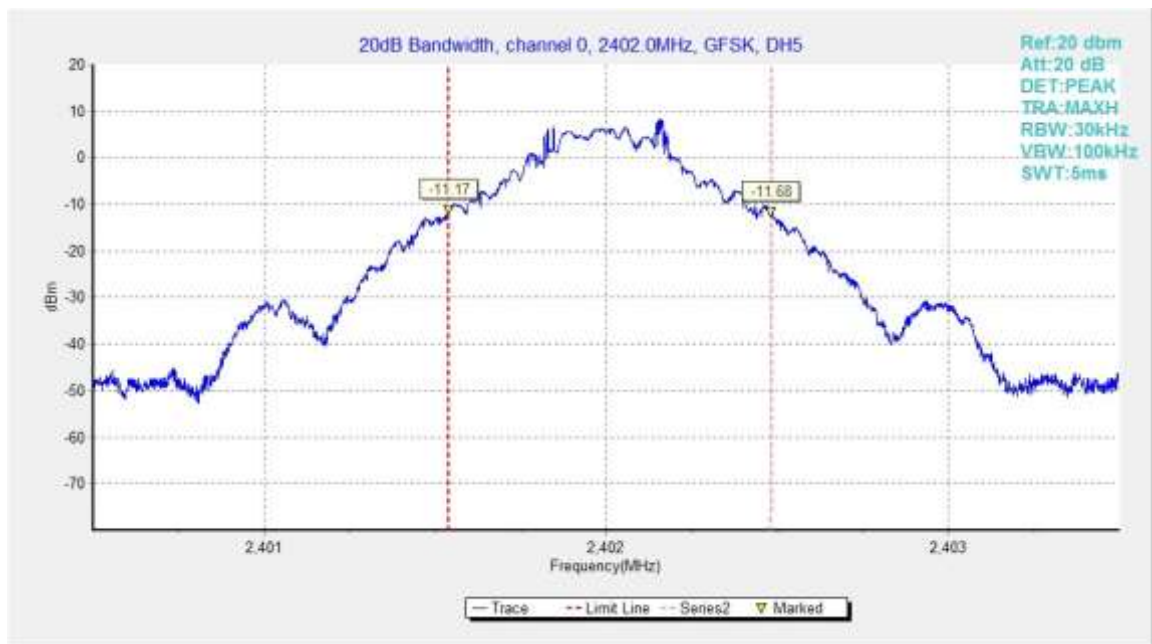


Fig.82. 20dB Bandwidth: GFSK, Channel 0

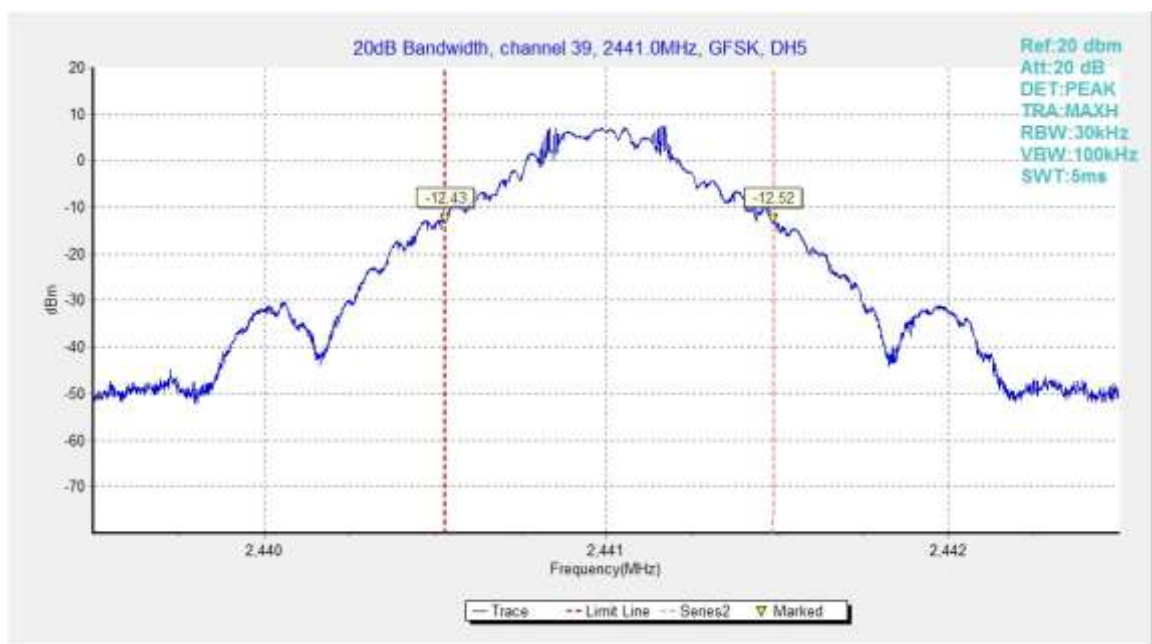


Fig.83. 20dB Bandwidth: GFSK, Channel 39



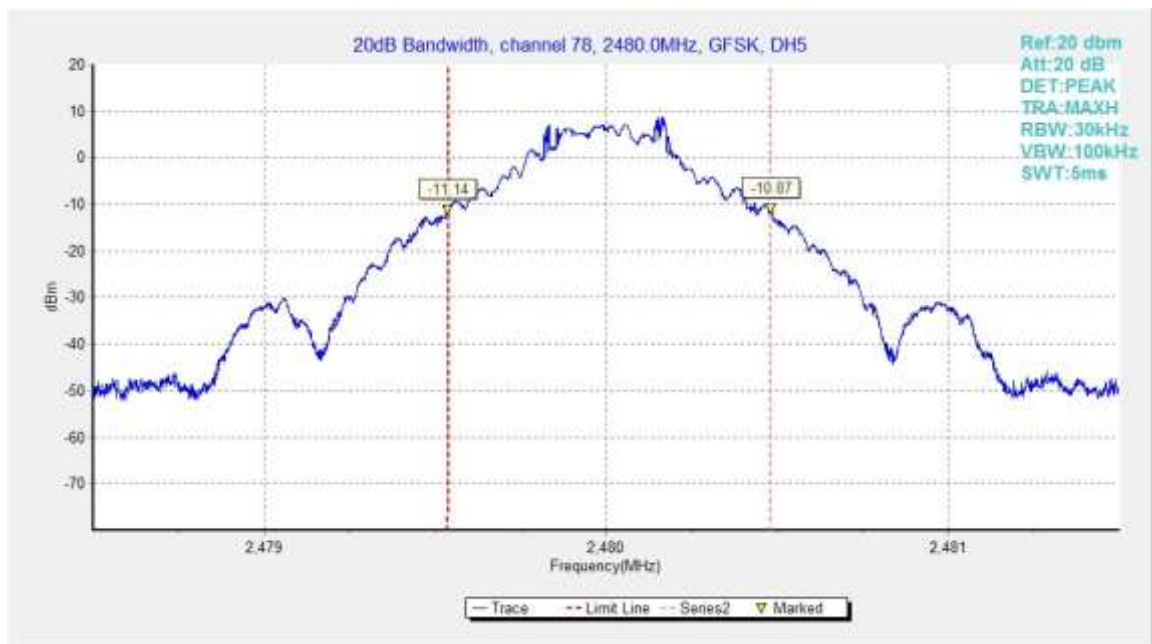
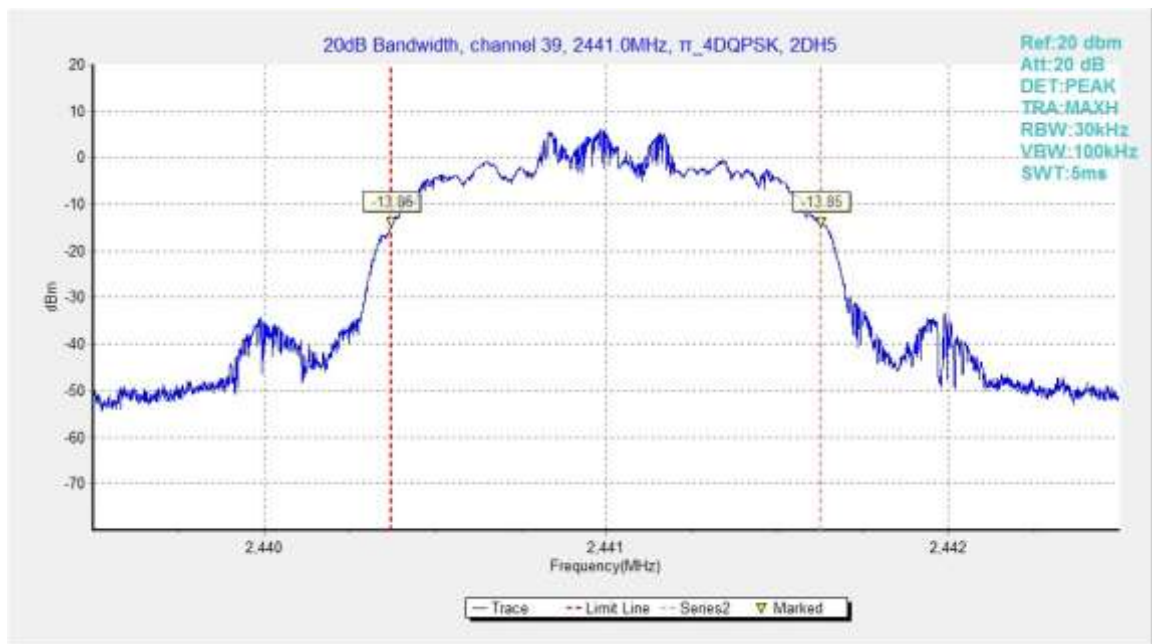
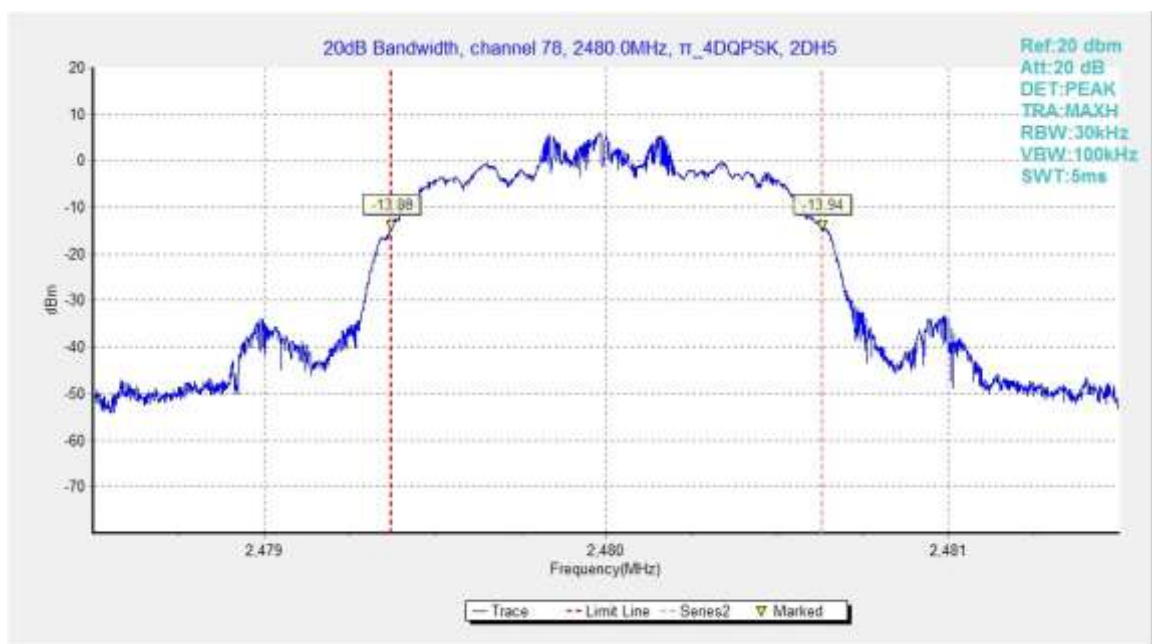


Fig.84. 20dB Bandwidth: GFSK, Channel 78


Fig.85. 20dB Bandwidth:  $\pi/4$  DQPSK, Channel 0




Fig.86. 20dB Bandwidth:  $\pi/4$  DQPSK, Channel 39

Fig.87. 20dB Bandwidth:  $\pi/4$  DQPSK, Channel 78

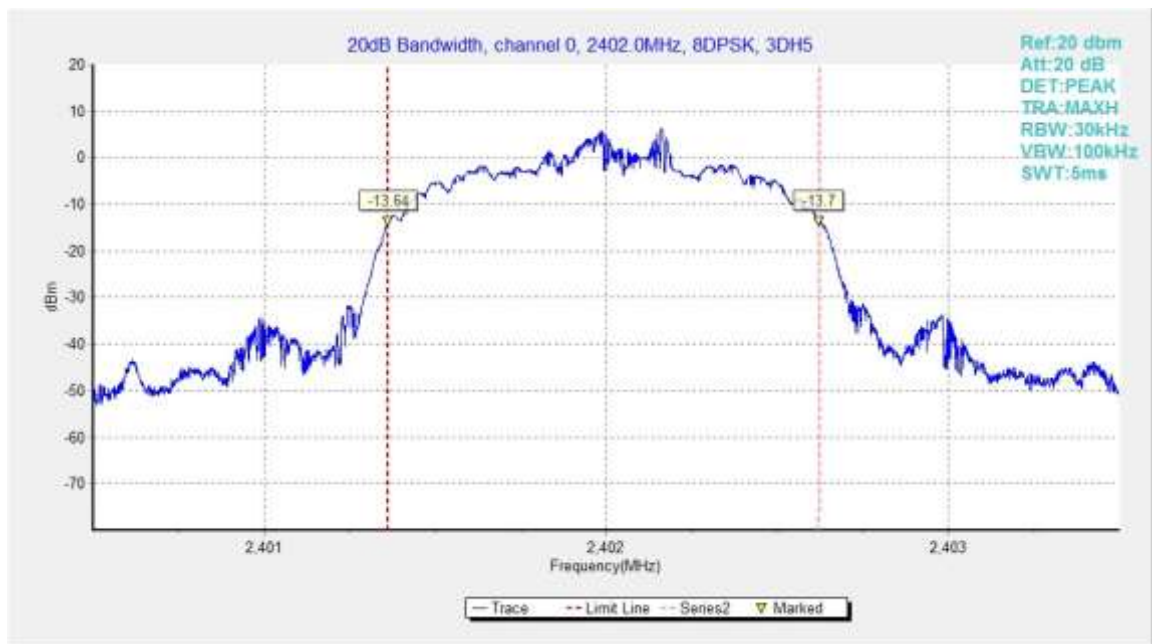


Fig.88. 20dB Bandwidth: 8DPSK, Channel 0

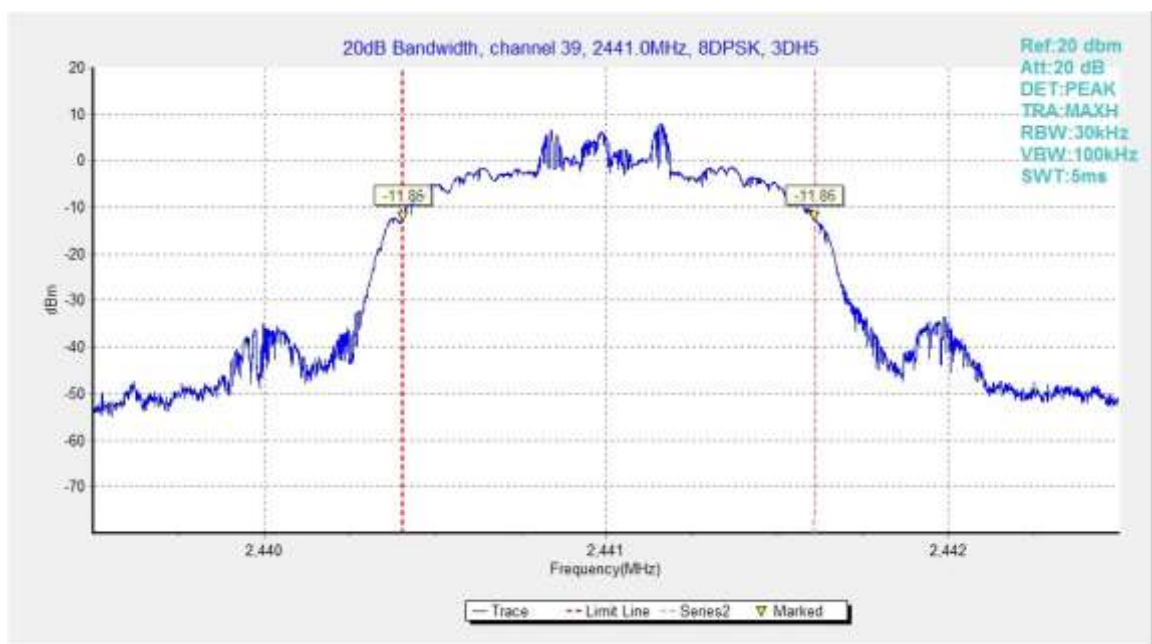


Fig.89. 20dB Bandwidth: 8DPSK, Channel 39

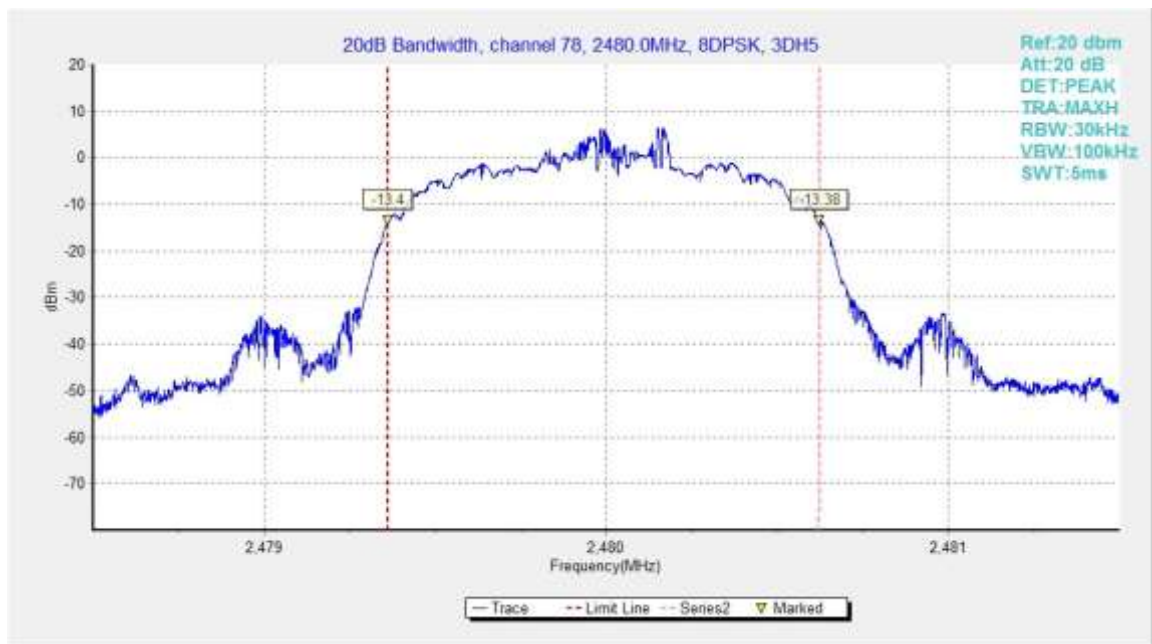


Fig.90. 20dB Bandwidth: 8DPSK, Channel 78

## B.8. Carrier Frequency Separation

**Method of Measurement:** See ANSI C63.10-clause 7.8.2

The EUT must have its hopping function enabled. Use the following spectrum analyzer settings:

- Span = 3MHz
- RBW=300kHz
- VBW=300kHz
- Sweep = auto
- Detector function = peak
- Trace = max hold
- Allow the trace to stabilize

Search the peak marks of the middle frequency and adjacent channel, then record the separation between them.

\* Comment: This limit should be over 25 kHz or  $(2/3) * 20\text{dB}$  bandwidth, whichever is greater.

### Measurement Limit:

Standard	Limit(kHz)
FCC 47 CFR Part 15.247(a)(1)	over 25 kHz or $(2/3) * 20\text{dB}$ bandwidth

### Measurement Result:

#### For GFSK

Channel	Carrier frequency separation (kHz)		Conclusion
39	Fig.91	1019.25	P

#### For $\pi/4$ DQPSK

Channel	Carrier frequency separation (kHz)		Conclusion
39	Fig.92	1148.25	P

#### For 8DPSK

Channel	Carrier frequency separation (kHz)		Conclusion
39	Fig.93	1007.25	P

**Conclusion: PASS**

**Test graphs as below:**

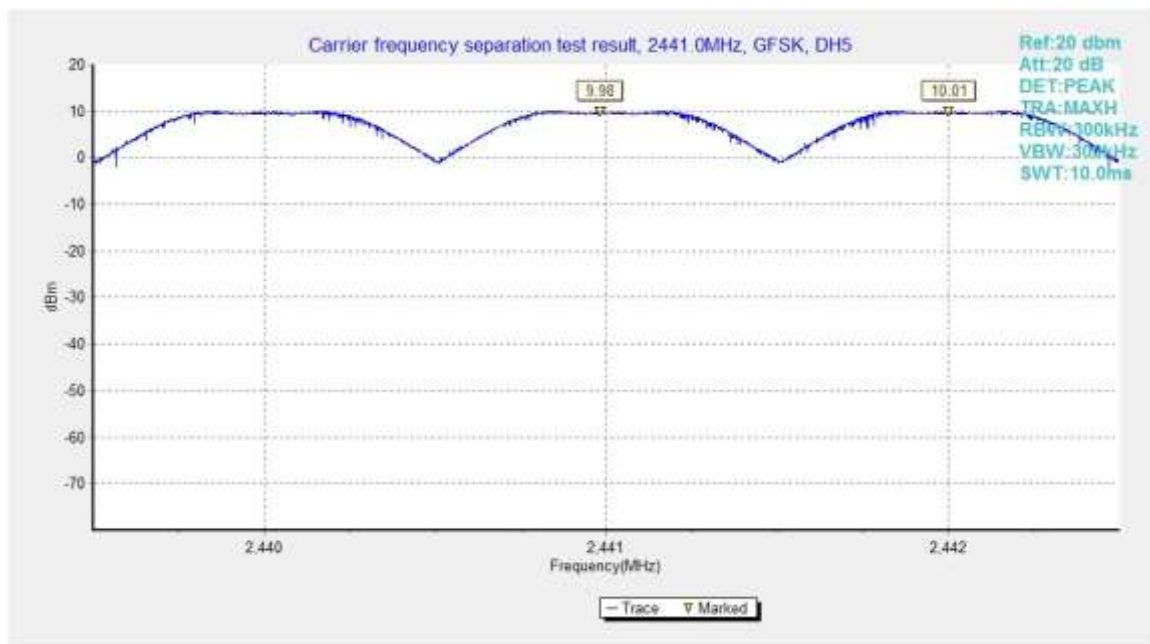


Fig.91. Carrier frequency separation measurement: GFSK, Channel 39

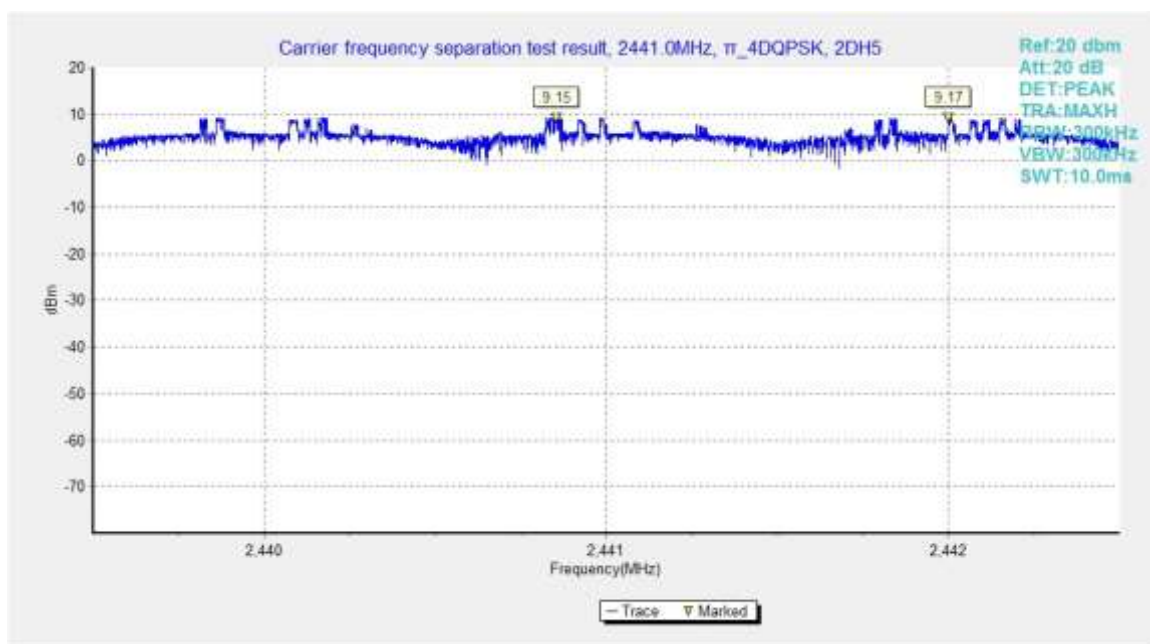


Fig.92. Carrier frequency separation measurement:  $\pi/4$  DQPSK, Channel 39

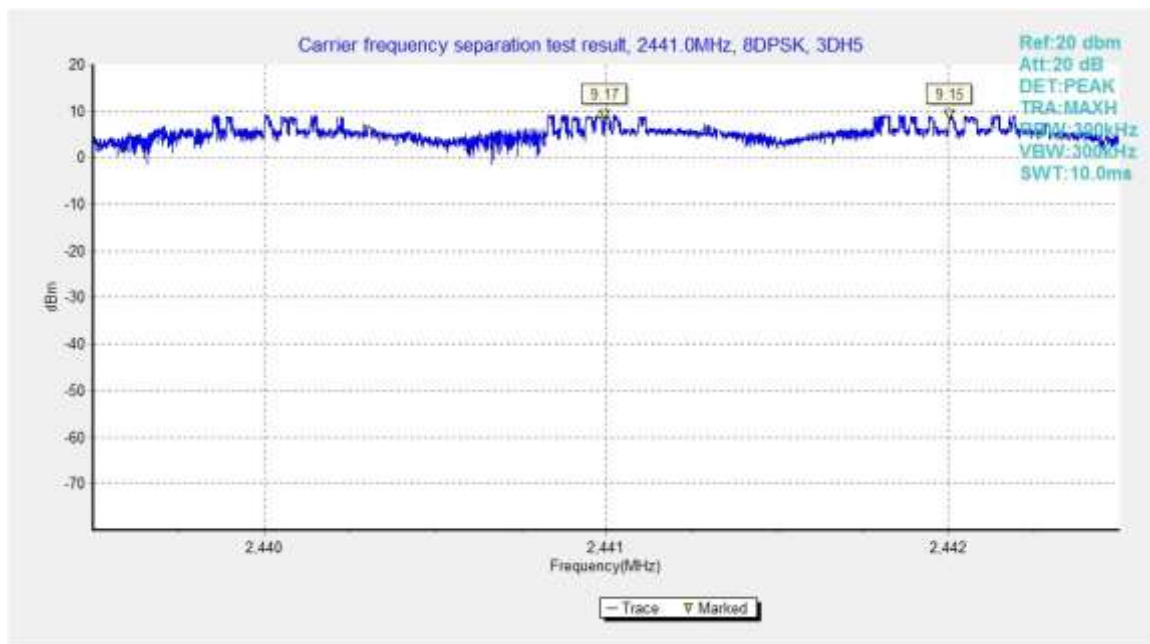


Fig.93. Carrier frequency separation measurement: 8DPSK, Channel 39



## B.9. Number of Hopping Channels

**Method of Measurement:** See ANSI C63.10-clause 7.8.3

The EUT must have its hopping function enabled. Use the following spectrum analyzer settings:

- Span = the frequency band of operation
- RBW = 500kHz
- VBW = 500kHz
- Sweep = auto
- Detector function = peak
- Trace = max hold
- Allow the trace to stabilize

It might prove necessary to break the span up into subranges to show clearly all of the hopping frequencies. Compliance of an EUT with the appropriate regulatory limit shall be determined for the number of hopping channels. A plot of the data shall be included in the test report.

### Measurement Limit:

Standard	Limit
FCC 47 CFR Part 15.247(a) (1)(iii)	At least 15 non-overlapping channels

### Measurement Result:

#### For GFSK

Channel	Number of hopping channels		Conclusion
0~39	Fig.94	79	P
40~78	Fig.95		

#### For $\pi/4$ DQPSK

Channel	Number of hopping channels		Conclusion
0~39	Fig.96	79	P
40~78	Fig.97		

#### For 8DPSK

Channel	Number of hopping channels		Conclusion
0~39	Fig.98	79	P
40~78	Fig.99		

**Conclusion: PASS**

**Test graphs as below:**

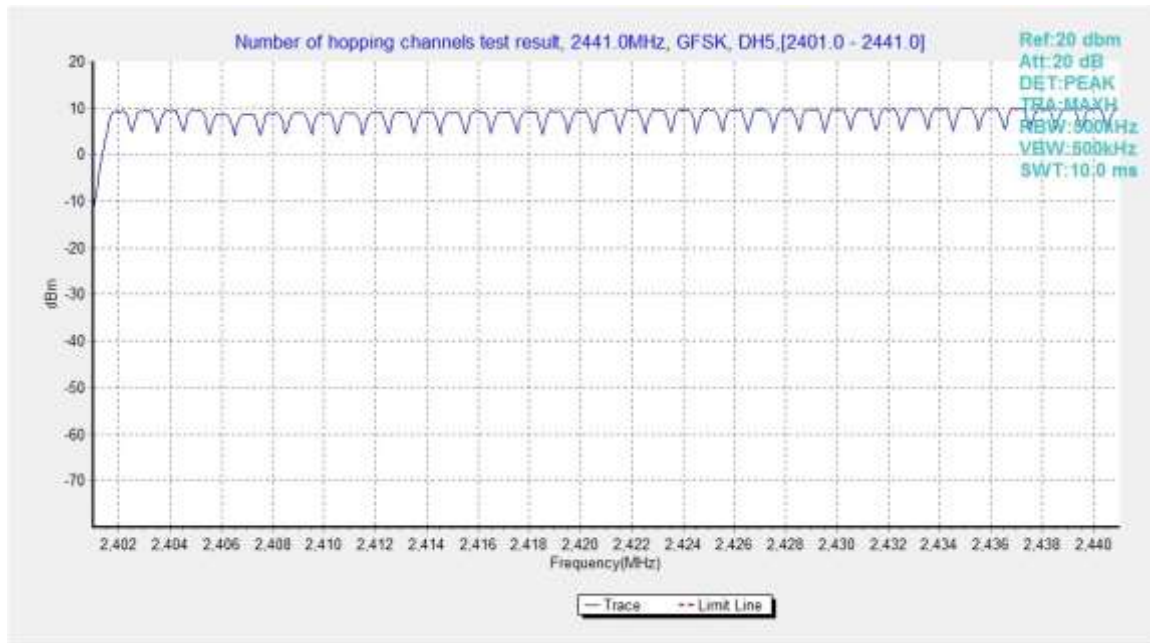


Fig.94. Number of hopping frequencies: GFSK, Channel 0 - 39

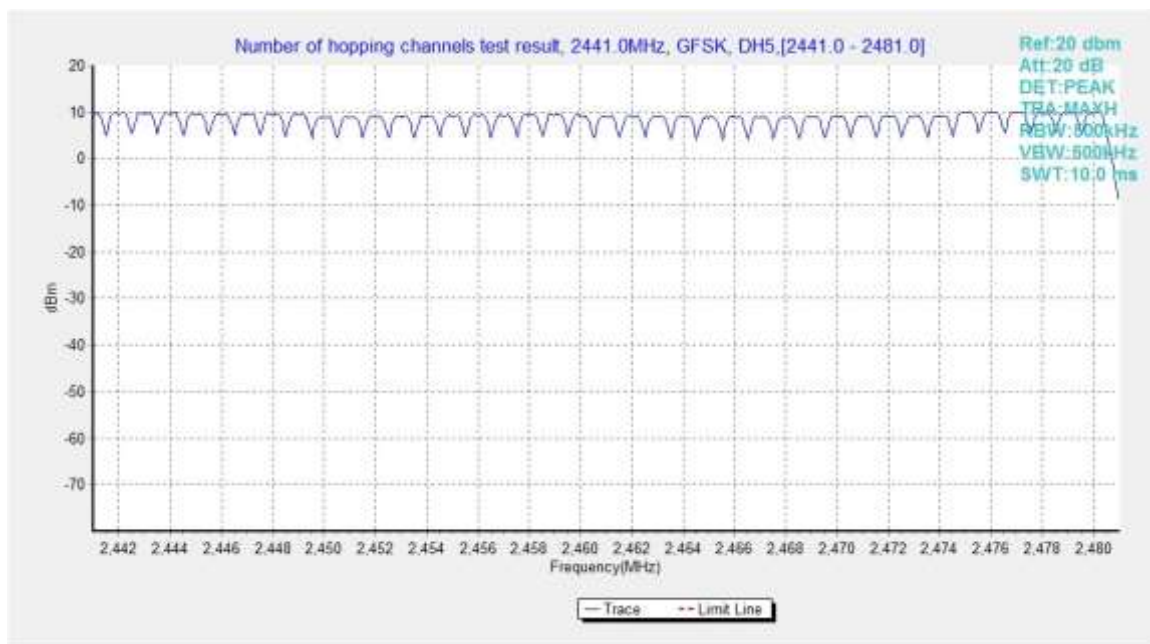


Fig.95. Number of hopping frequencies: GFSK, Channel 40 - 78

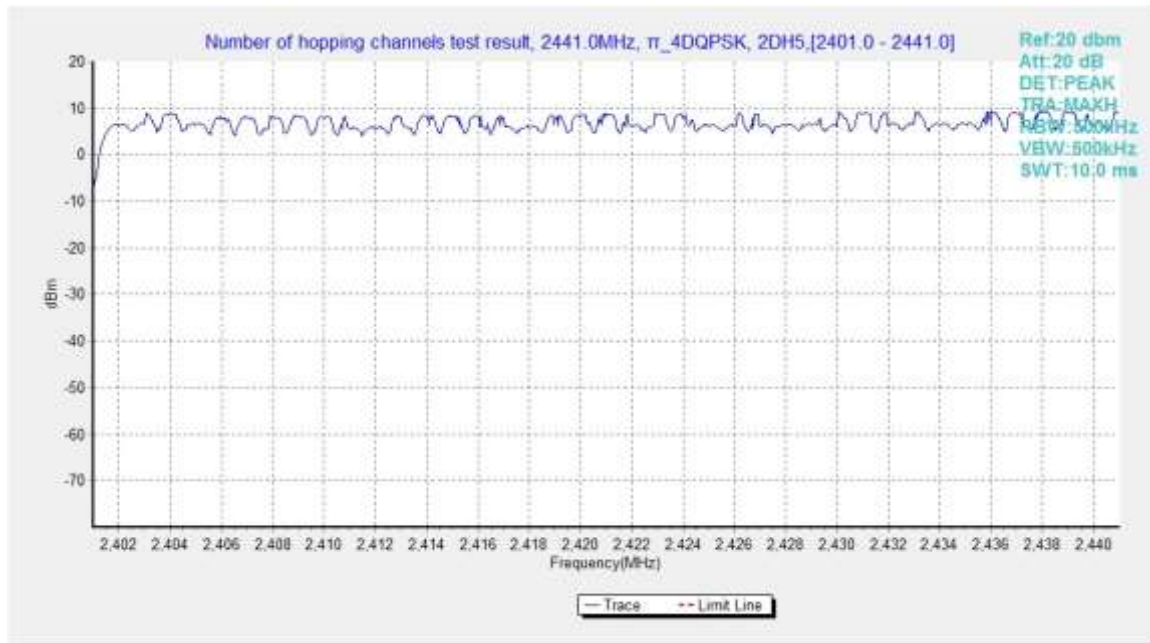


Fig.96. Number of hopping frequencies:  $\pi/4$  DQPSK, Channel 0 - 39

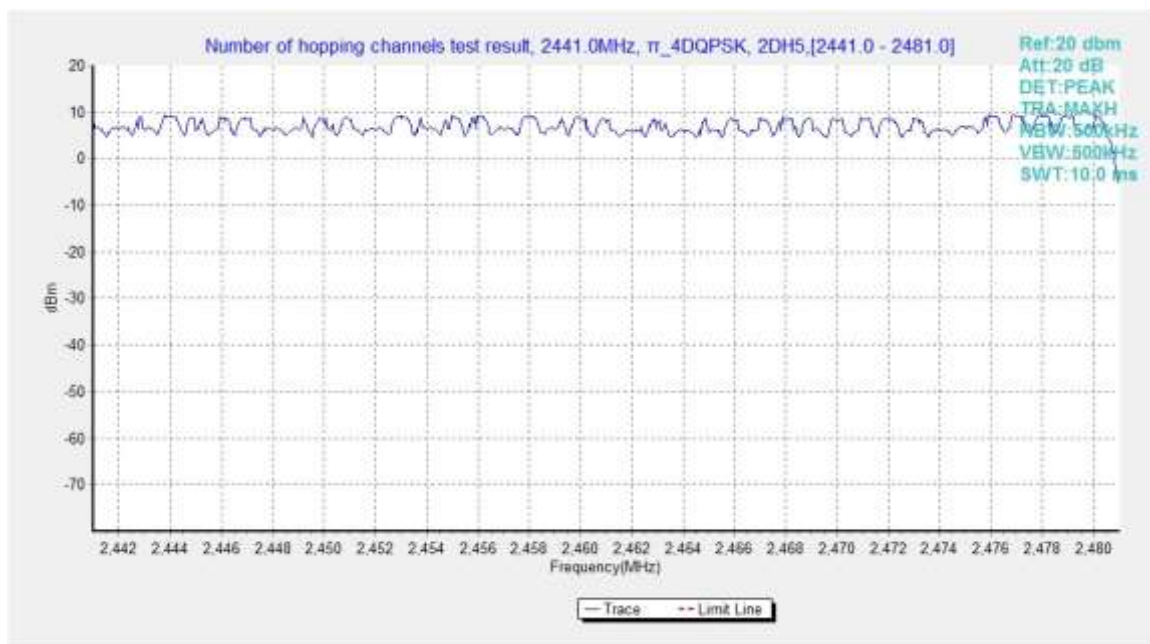


Fig.97. Number of hopping frequencies:  $\pi/4$  DQPSK, Channel 40 - 78

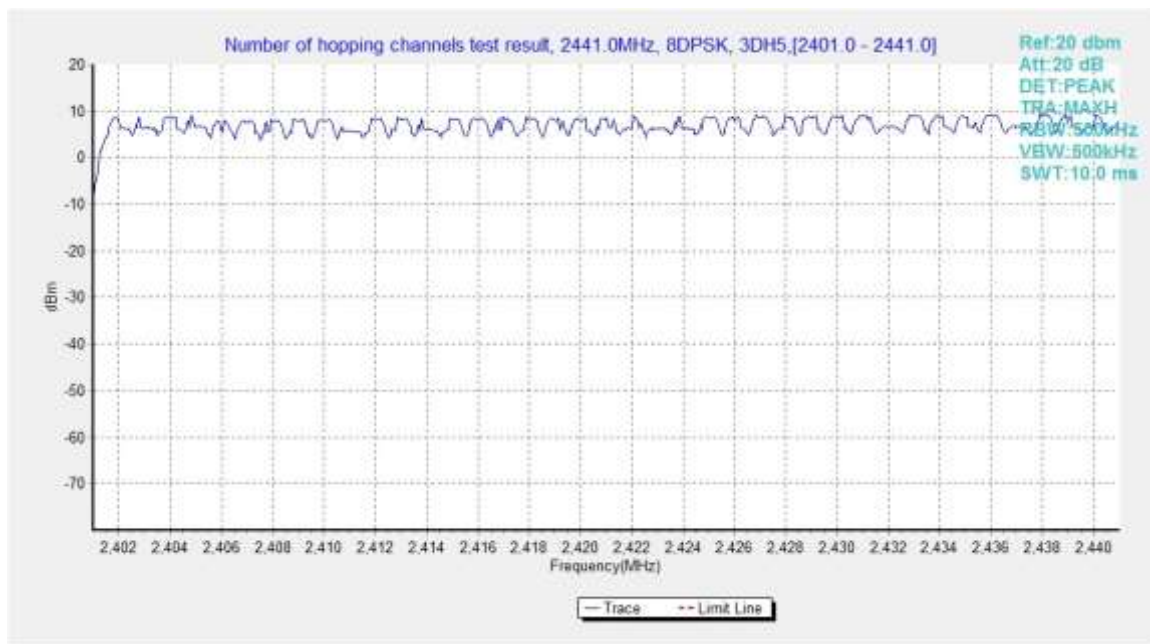


Fig.98. Number of hopping frequencies: 8DPSK, Channel 0 - 39

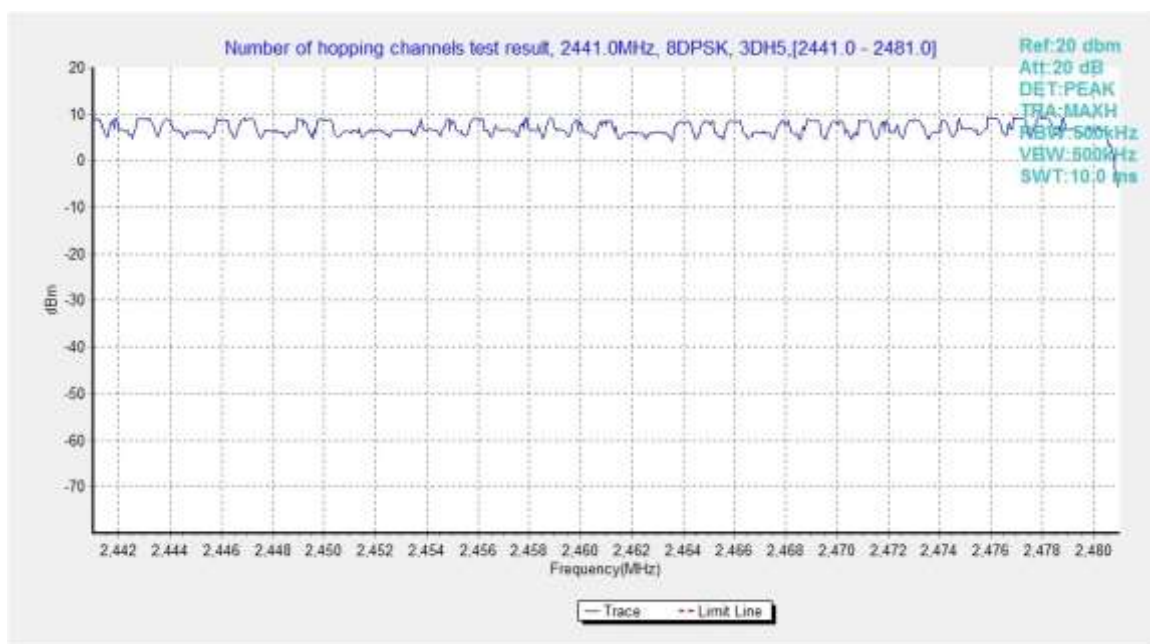


Fig.99. Number of hopping frequencies: 8DPSK, Channel 40 - 78

## B.10. AC Powerline Conducted Emission

## Summary

All AC line conducted spurious emissions are measured with a receiver connected to a grounded LISN while the EUT is operating at its maximum duty cycle, at maximum power, and at the appropriate frequencies. All data rates and modes were investigated for conducted spurious emissions. Only the conducted emissions of the configuration that produced the worst case emissions are reported in this section

### Method of Measurement:

See Clause 6.2 of ANSI C63.10 specifically.

See Clause 4 and Clause 5 of ANSI C63.10 generally.

The conducted emissions from the AC port of the EUT are measured in a shielding room. The EUT is connected to a Line Impedance Stabilization Network (LISN). An overview sweep with peak detection was performed. The measurements were performed with a quasi-peak detector and if required, an average detector.

The conducted emission measurements were made with the following detector of the test receiver:  
Quasi-Peak / Average Detector.


The measurement bandwidth is:

Frequency of Emission (MHz)	RBW/IF bandwidth
0.15-30	9kHz

### Test Condition:

Voltage (V)	Frequency (Hz)
120	60

## Test setup

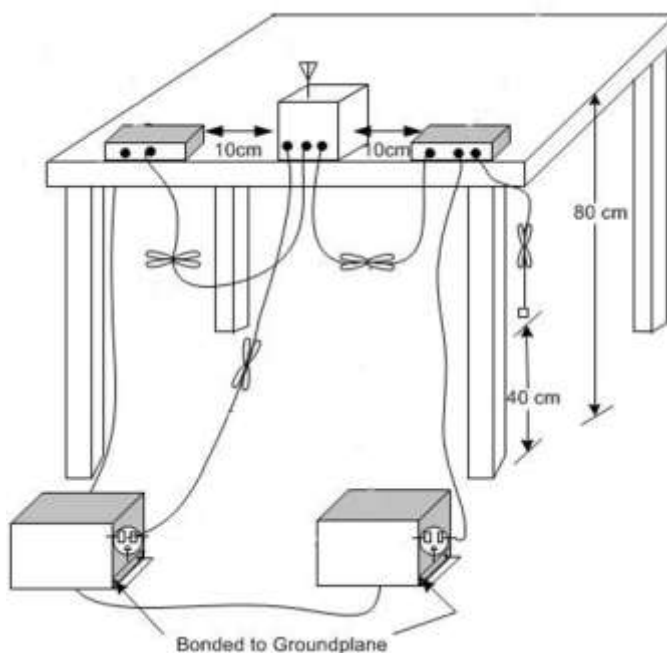

**Measurement Result and limit:**
**Bluetooth (Quasi-peak Limit)**


Frequency range (MHz)	Quasi-peak Limit (dBμV)	Result (dBμV)		Conclusion
		With charger		
		bluetooth	Idle	
0.15 to 0.5	66 to 56	Fig.B.10.1	Fig. B.10.2	P
0.5 to 5	56			
5 to 30	60			
NOTE: The limit decreases linearly with the logarithm of the frequency in the range 0.15 MHz to 0.5 MHz.				

**Bluetooth (Average Limit)**

Frequency range (MHz)	Average Limit (dBμV)	Result (dBμV)		Conclusion
		With charger		
		bluetooth	Idle	
0.15 to 0.5	56 to 46	Fig.B.10.1	Fig. B.10.2	<b>P</b>
0.5 to 5	46			
5 to 30	50			
NOTE: The limit decreases linearly with the logarithm of the frequency in the range 0.15 MHz to 0.5 MHz.				

**Conclusion: Pass**
**Test graphs as below:**



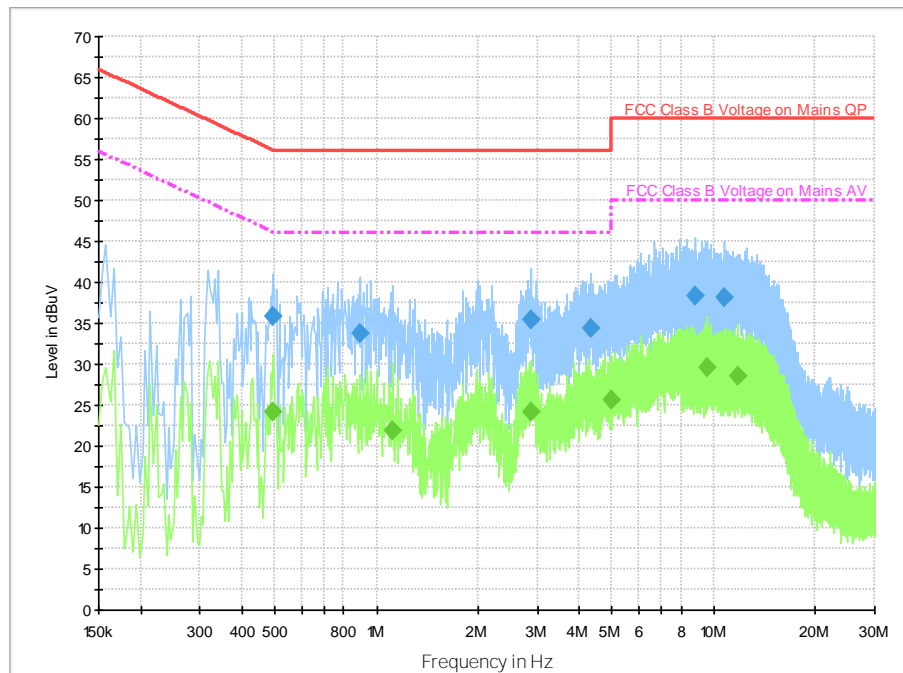

**Fig.B.10.1 AC Powerline Conducted Emission- bluetooth**


Note: The graphic result above is the maximum of the measurements for both phase line and neutral line.

#### Final Result 1

Frequency (MHz)	QuasiPeak (dBμV)	Meas. Time	Bandwidth (kHz)	Filter	Line	Corr. (dB)	Margin (dB)	Limit (dBμV)	Comment
0.494000	35.9	2000.0	9.000	On	L1	20.0	20.2	56.1	
0.894000	33.7	2000.0	9.000	On	L1	19.9	22.3	56.0	
2.870000	35.4	2000.0	9.000	On	L1	19.8	20.6	56.0	
4.326000	34.3	2000.0	9.000	On	L1	19.8	21.7	56.0	
8.774000	38.4	2000.0	9.000	On	L1	19.9	21.6	60.0	
10.710000	38.1	2000.0	9.000	On	L1	19.9	21.9	60.0	

#### Final Result 2

Frequency (MHz)	CAverage (dBμV)	Meas. Time	Bandwidth (kHz)	Filter	Line	Corr. (dB)	Margin (dB)	Limit (dBμV)	Comment
0.494000	24.1	2000.0	9.000	On	L1	20.0	22.0	46.1	
1.118000	21.8	2000.0	9.000	On	L1	19.9	24.2	46.0	
2.870000	24.2	2000.0	9.000	On	L1	19.8	21.8	46.0	
4.994000	25.6	2000.0	9.000	On	L1	19.8	20.4	46.0	
9.610000	29.7	2000.0	9.000	On	L1	19.9	20.3	50.0	
11.746000	28.6	2000.0	9.000	On	L1	20.0	21.4	50.0	

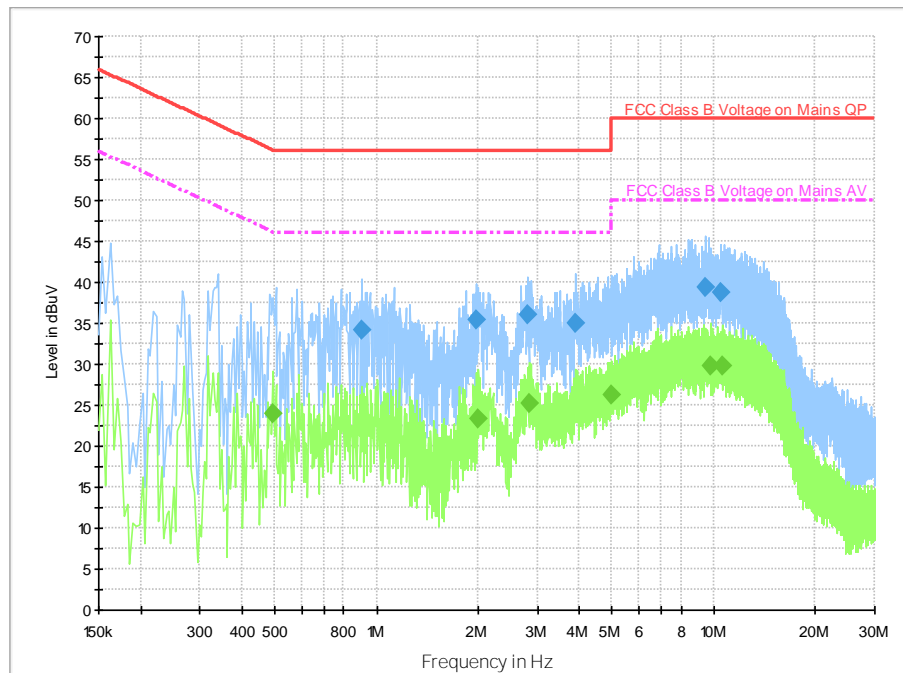

**Fig.B.10.2 AC Powerline Conducted Emission-Idle**

Note: The graphic result above is the maximum of the measurements for both phase line and neutral line.

#### Final Result 1

Frequency (MHz)	QuasiPeak (dBμV)	Meas. Time	Bandwidth (kHz)	Filter	Line	Corr. (dB)	Margin (dB)	Limit (dBμV)	Comment
0.902000	34.1	2000.0	9.000	On	L1	19.9	21.9	56.0	
1.974000	35.4	2000.0	9.000	On	L1	19.8	20.6	56.0	
2.818000	36.1	2000.0	9.000	On	L1	19.8	19.9	56.0	
3.882000	35.1	2000.0	9.000	On	L1	19.8	20.9	56.0	
9.462000	39.4	2000.0	9.000	On	L1	19.9	20.6	60.0	
10.518000	38.8	2000.0	9.000	On	L1	19.9	21.2	60.0	

#### Final Result 2

Frequency (MHz)	CAverage (dBμV)	Meas. Time	Bandwidth (kHz)	Filter	Line	Corr. (dB)	Margin (dB)	Limit (dBμV)	Comment
0.494000	24.0	2000.0	9.000	On	L1	20.0	22.1	46.1	
2.010000	23.4	2000.0	9.000	On	L1	19.8	22.6	46.0	
2.838000	25.2	2000.0	9.000	On	L1	19.8	20.8	46.0	
4.998000	26.2	2000.0	9.000	On	L1	19.8	19.8	46.0	
9.786000	29.8	2000.0	9.000	On	L1	19.9	20.2	50.0	
10.558000	29.9	2000.0	9.000	On	L1	19.9	20.1	50.0	



## **B.11. Antenna Requirement**

The antenna of the device is permanently attached. There are no provisions for connection to an external antenna.

The unit complies with the requirement of FCC Part 15.203.

## ANNEX C: Accreditation Certificate



\*\*\*END OF REPORT\*\*\*