



FCC TEST REPORT

REPORT NO.: F90020609

MODEL NO.: 5141UX

RECEIVED: Feb. 06, 2001

TESTED: Feb. 07, 2001

APPLICANT: BEHAVIOR TECH COMPUTER CORP.

ADDRESS: 2F, 51, TUNG HSING RD., TAIPEI,
TAIWAN, R.O.C.

ISSUED BY: Advance Data Technology Corporation

LAB LOCATION: 47 14th Lin, Chiapau Tsun, Linko, Taipei,
Taiwan, R.O.C.

This test report consists of 17 pages in total. It may be duplicated completely for legal use with the approval of the applicant. It should not be reproduced except in full, without the written approval of our laboratory. The client should not use it to claim product endorsement by NVLAP or any U.S. government agencies. The test results in the report only apply to the tested sample.



Accredited Laboratory

Table of Contents

1	CERTIFICATION.....	3
2	SUMMARY OF TEST RESULTS.....	4
3	GENERAL INFORMATION	5
3.1	GENERAL DESCRIPTION OF EUT	5
3.2	DESCRIPTION OF SUPPORT UNITS.....	6
4	EMISSION TEST	7
4.1	CONDUCTED EMISSION MEASUREMENT	7
4.1.1	LIMITS OF CONDUCTED EMISSION MEASUREMENT	7
4.1.2	TEST INSTRUMENTS	7
4.1.3	TEST PROCEDURE	8
4.1.4	TEST SETUP	8
4.1.5	EUT OPERATING CONDITIONS.....	9
4.1.6	TEST RESULTS.....	10
4.2	RADIATED EMISSION MEASUREMENT	12
4.2.1	LIMITS OF RADIATED EMISSION MEASUREMENT FOR	12
	FREQUENCY BELOW 1000 MHZ	12
4.2.2	TEST INSTRUMENTS	12
4.2.3	TEST PROCEDURE	13
4.2.4	TEST SETUP	13
4.2.5	EUT OPERATING CONDITIONS.....	13
4.2.6	TEST RESULTS.....	14
5	PHOTOGRAPHS OF THE TEST CONFIGURATION	15
6	APPENDIX - INFORMATION ON THE TESTING LABORATORIES.....	17



1 CERTIFICATION

PRODUCT: USB KEYBOARD
BRAND NAME: BTC
MODEL NO: 5141UX
APPLICANT: BEHAVIOR TECH COMPUTER CORP.
STANDARDS: FCC Part 15, Subpart B, Class B
CISPR 22: 1997, Class B
ANSI C63.4-1992

We, **Advance Data Technology Corporation**, hereby certify that one sample of the designation has been tested in our facility on Feb. 07, 2001. The test record, data evaluation and Equipment Under Test (EUT) configurations represented herein are true and accurate accounts of the measurements of the sample's EMC characteristics under the conditions herein specified.

CHECKED BY: Kathy Tseng, **DATE:** 2/8/2001
(Kathy Tseng)

APPROVED BY: Mike Su, **DATE:** 2/8/2001
(Mike Su)

2 SUMMARY OF TEST RESULTS

The EUT has been tested according to the following specifications:

Standard	Test Type	Result	Remarks
CISPR 22: 1997, Class B	Conducted Test	PASS	Meets Class B Limit Minimum passing margin is -5.91 dB at 0.207 MHz
	Radiated Test	PASS	Meets Class B Limit Minimum passing margin is -7.5 dB at 720.02 MHz

3 GENERAL INFORMATION

3.1 GENERAL DESCRIPTION OF EUT

PRODUCT	USB KEYBOARD
MODEL NO.	5141UX
POWER SUPPLY	DC 5V (from PC)
DATA CABLE	Shielded 1.6m

NOTE: The EUT is a USB KEYBOARD. For a more detailed features description, please refer to the manufacturer's specifications or the User's Manual.



3.2 DESCRIPTION OF SUPPORT UNITS

The EUT has been tested as an independent unit together with other necessary accessories or support units. The following support units or accessories were used to form a representative test configuration during the tests.

NO.	PRODUCT	BRAND	MODEL NO.	SERIAL NO.	FCC ID
1	PERSONAL COMPUTER	IBM	2187-12W	1S218714ABN A0002	FCC DoC APPROVED
2	21" COLOR MONITOR	HP	D2846A	JP90512318	FCC DoC APPROVED
3	PRINTER	HP	2225C	2931S53817	DSI6XU2225
4	MODEM	ACEEX	1414	980020521	IFAXDM1414
5	PS/2 MOUSE	LOGITECH	M-S43	LZE93502548	DZL211106

NO.	SIGNAL CABLE DESCRIPTION OF THE ABOVE SUPPORT UNITS
1	N/A
2	1.2 m braid shielded wire, terminated with DB25 and DB9 connector via metallic frame, w/o core.
3	1.8 m braid shielded wire, terminated with VGA connector via metallic frame, w/o core.
4	1.2m braid shielded wire, terminated with DB25 and Centronics connector via metallic frame, w/o core.
5	1.2 m braid shielded wire, terminated with DB25 and DB9 connector via metallic frame, w/o core.

NOTE: All power cords of the above support units are non shielded (1.8m).

4 EMISSION TEST

4.1 CONDUCTED EMISSION MEASUREMENT

4.1.1 LIMITS OF CONDUCTED EMISSION MEASUREMENT

FREQUENCY (MHz)	Class A (dBuV)		Class B (dBuV)	
	Quasi-peak	Average	Quasi-peak	Average
0.15 - 0.5	79	66	66 - 56	56 - 46
0.50 - 5.0	73	60	56	46
5.0 - 30.0	73	60	60	50

- NOTE:**
- (1) The lower limit shall apply at the transition frequencies.
 - (2) The limit decreases in line with the logarithm of the frequency in the range of 0.15 to 0.50 MHz.
 - (3) All emanations from a class A/B digital device or system, including any network of conductors and apparatus connected thereto, shall not exceed the level of field strengths specified above.

4.1.2 TEST INSTRUMENTS


DESCRIPTION & MANUFACTURER	MODEL NO.	SERIAL NO.	CALIBRATED UNTIL
ROHDE & SCHWARZ Test Receiver	ESHS30	828109/007	July 6, 2001
ROHDE & SCHWARZ Artificial Mains Network	ESH3-Z5	839135/006	July 9, 2001
ROHDE & SCHWARZ 4-wire ISN	ENY41	835154/007	Apr. 26, 2001
EMCO-L.I.S.N.	3825/2	9204-1964	July 9, 2001
Shielded Room	Site 2	ADT-C02	NA

- NOTE:**
1. The measurement uncertainty is less than +/- 2.6dB, which is calculated as per the NAMAS document NIS81.
 2. The calibration interval of the above test instruments is 12 months and the calibrations are traceable to NML/ROC and NIST/USA.

4.1.3 TEST PROCEDURE

- a. The EUT was placed 0.4 meters from the conducting wall of the shielded room with EUT being connected to the power mains through a line impedance stabilization network (LISN). Other support units were connected to the power mains through another LISN. The two LISNs provide 50 Ohm/ 50uH of coupling impedance for the measuring instrument.
- b. Both lines of the power mains connected to the EUT were checked for maximum conducted interference.
- c. The frequency range from 150 kHz to 30 MHz was searched. Emission levels over 10dB under the prescribed limits could not be reported.

4.1.4 TEST SETUP

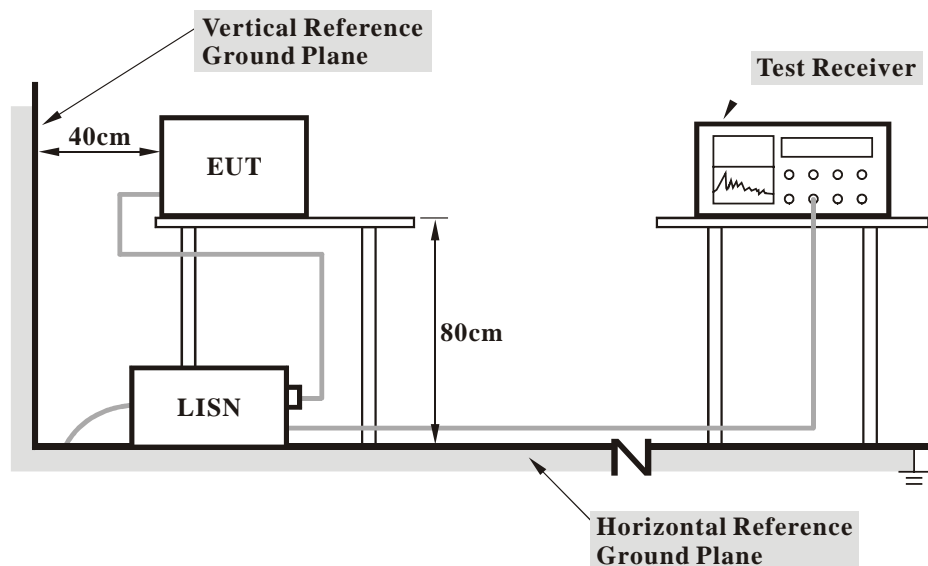

- Note:**
1. Support units were connected to second LISN.
 2. Both of LISNs (AMN) are 80 cm from EUT and at least 80 cm from other units and other metal planes support units.

For the actual test configuration, please refer to the related Item – Photographs of the Test Configuration.



4.1.5 EUT OPERATING CONDITIONS

- a. Turn on the power of all equipment.
- b. PC runs a test program to enable all functions.
- c. PC reads and writes messages from FDD and HDD.
- d. EUT sends "H" character to PC.
- e. PC sends "H" messages to monitor and monitor displays "H" patterns on screen.
- f. PC sends "H" messages to modem.
- g. PC sends "H" messages to printer.
- h. Repeat steps c-h.


4.1.6 TEST RESULTS

EUT	USB KEYBOARD	MODEL	5141UX
		6dB BANDWIDTH	10 kHz
INPUT POWER	120Vac, 60 Hz	PHASE	Line (L)
ENVIRONMENTAL CONDITIONS	20 deg. C, 78 % RH, 1050 mHg	TESTED BY: <i>William Kao</i>	

No	Freq.	Corr.	Reading Value		Emission Level		Limit		Margin	
		Factor	[dB (uV)]		[dB (uV)]		[dB (uV)]		(dB)	
	[MHz]	(dB)	Q.P.	AV.	Q.P.	AV.	Q.P.	AV.	Q.P.	AV.
1	0.205	0.20	51.60	-	51.80	-	63.41	53.41	-11.61	-
2	0.411	0.20	47.19	-	47.39	-	57.63	47.63	-10.24	-
3	0.515	0.20	43.43	-	43.63	-	56.00	46.00	-12.37	-
4	0.616	0.20	38.87	-	39.07	-	56.00	46.00	-16.93	-
5	13.301	0.90	26.43	-	27.33	-	60.00	50.00	-32.67	-
6	22.570	1.25	32.62	-	33.87	-	60.00	50.00	-26.13	-

REMARKS:

1. Q.P. and AV. are abbreviations of quasi-peak and average individually.
2. "-": The Quasi-peak reading value also meets average limit and measurement with the average detector is unnecessary.
3. The emission levels of other frequencies were very low against the limit.
4. Margin value = Emission level - Limit value
5. Emission Level = Correction Factor + Reading Value.

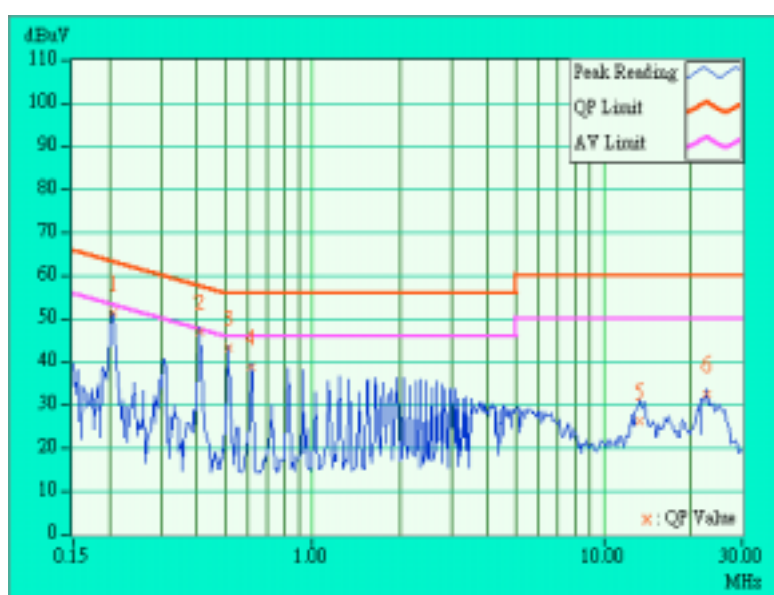


EUT	USB KEYBOARD	MODEL	5141UX
		6dB BANDWIDTH	10 kHz
INPUT POWER	120Vac, 60 Hz	PHASE	Neutral (N)
ENVIRONMENTAL CONDITIONS	20 deg. C, 78 % RH, 1050 mHg	TESTED BY: <i>William Kao</i>	

No	Freq. [MHz]	Corr. Factor (dB)	Reading Value		Emission Level		Limit		Margin	
			[dB (uV)]		[dB (uV)]		[dB (uV)]		(dB)	
			Q.P.	AV.	Q.P.	AV.	Q.P.	AV.	Q.P.	AV.
1	0.207	0.20	54.86	47.23	55.06	47.43	63.34	53.34	-8.28	-5.91
2	0.411	0.20	44.10	-	44.30	-	57.63	47.63	-13.33	-
3	0.513	0.20	41.91	-	42.11	-	56.00	46.00	-13.89	-
4	0.617	0.20	38.99	-	39.19	-	56.00	46.00	-16.81	-
5	13.499	0.81	27.17	-	27.98	-	60.00	50.00	-32.02	-
6	22.570	1.15	32.90	-	34.05	-	60.00	50.00	-25.95	-

REMARKS:

1. Q.P. and AV. are abbreviations of quasi-peak and average individually.
2. "-": The Quasi-peak reading value also meets average limit and measurement with the average detector is unnecessary.
3. The emission levels of other frequencies were very low against the limit.
4. Margin value = Emission level - Limit value
5. Emission Level = Correction Factor + Reading Value.

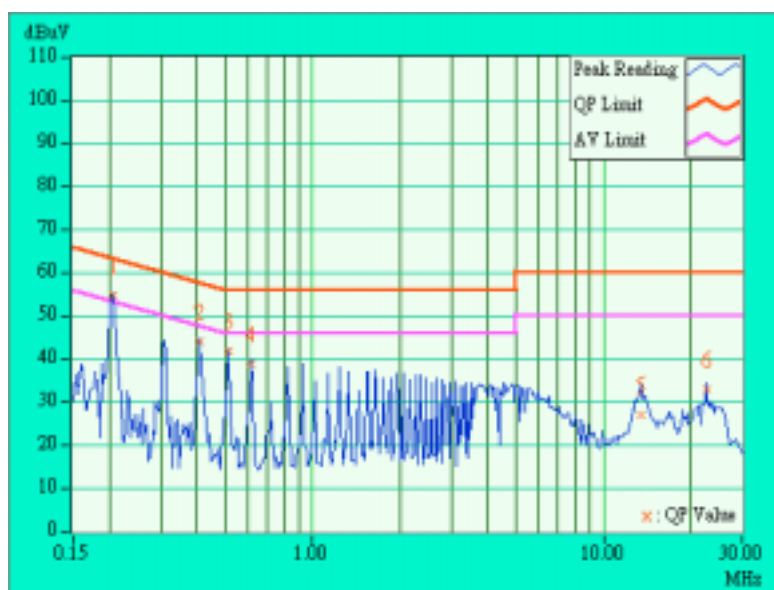

4.2 RADIATED EMISSION MEASUREMENT

4.2.1 LIMITS OF RADIATED EMISSION MEASUREMENT FOR

FREQUENCY BELOW 1000 MHZ

FREQUENCY (MHz)	Class A (at 10m)	Class B (at 10m)
	dBuV/m	dBuV/m
30 – 230	40	30
230 - 1000	47	37

LIMIT OF RADIATED EMISSION OF FCC PART 15, SUBPART B FOR FREQUENCY ABOVE 1000 MHZ

FREQUENCY (MHz)	Class A (dBuV/m) (at 3m)		Class B (dBuV/m) (at 3m)	
	PEAK	AVERAGE	PEAK	AVERAGE
Above 1000	80.0	60.0	74.0	54.0

NOTE: (1) The lower limit shall apply at the transition frequencies.
 (2) Emission level (dBuV/m) = 20 log Emission level (uV/m).
 (3) All emanation from a class A/B digital device or system, including any network of conductors and apparatus connected thereto, shall not exceed the level of field strengths specified above.

4.2.2 TEST INSTRUMENTS


DESCRIPTION & MANUFACTURER	MODEL NO.	SERIAL NO.	CALIBRATED UNTIL
HP Spectrum Analyzer	8593 E	3926A04191	Mar. 24, 2001
HP Preamplifier	8447F	3113A05767	April 3, 2001
HP Preamplifier	8449B	3008A01201	Dec. 13, 2001
ROHDE & SCHWARZ TEST RECEIVER	ESCS 30	845552/004	Apr. 21, 2001
SCHWARZBECK Tunable Dipole Antenna	VHA 9103 UHA 9105	E101051 E101055	Nov. 23, 2001
CHASE BILOG Antenna	CBL6112A	2331	Nov. 02, 2001
EMCO Double Ridged Guide Antenna	3115	9312-4192	March 29, 2001
Sunol Turn Table & Tower Controller	SC98V	112497-1	NA
Open Field Test Site	Site 8	ADT-R08	Nov. 03, 2001

NOTE: 1. The measurement uncertainty is less than +/-3.0dB, which is calculated as per the NAMAS document NIS81.
 2. The calibration interval of the above test instruments is 12 months. And the calibrations are traceable to NML/ROC and NIST/USA.

4.2.3 TEST PROCEDURE

- The EUT was placed on the top of a ratable table 0.8 meters above the ground at a 10-meter open field site. The table was rotated 360 degrees to determine the position of the highest radiation.
- The EUT was set 10 meters away from the interference-receiving antenna, which was mounted on the top of a variable-height antenna tower.
- The antenna is a broadband antenna, and its height is varied from one meter to four meters above the ground to determine the maximum value of the field strength. Both horizontal and vertical polarizations of the antenna are set to make the measurement.
- For each suspected emission, the EUT was arranged to its worst case and then the antenna was tuned to heights from 1 meter to 4 meters and the turn table was turned from 0 degrees to 360 degrees to find the maximum reading.
- The test-receiver system was set to Peak Detect Function and Specified Bandwidth with Maximum Hold Mode.
- If the emission level of the EUT in peak mode was 10 dB lower than the limit specified, then testing could be stopped and the peak values of the EUT would be reported. Otherwise the emissions that did not have 10 dB margin would be re-tested one by one using the quasi- peak method or average method as specified and then reported In Data sheet peak mode and QP mode.
- For measurement of frequency above 1000 MHz, the EUT was set 3 meters away from the interference antenna and the detect function was set to Peak or Average.

4.2.4 TEST SETUP

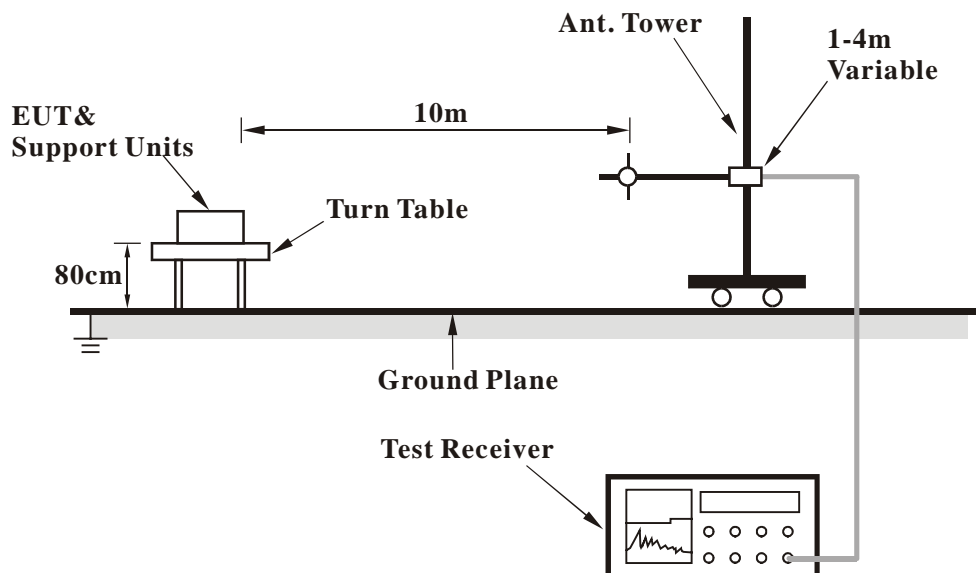

For the actual test configuration, please refer to the related Item – Photographs of the Test Configuration.

4.2.5 EUT OPERATING CONDITIONS

Same as 4.1.5

4.2.6 TEST RESULTS

EUT	USB KEYBOARD	MODEL	5141UX
		FREQUENCY RANGE	30-1000 MHz
INPUT POWER	120Vac, 60 Hz	DETECTOR FUNCTION & BANDWIDTH	Quasi-Peak, 120kHz
ENVIRONMENTAL CONDITIONS	20 deg. C, 78 % RH, 1050 mHg	TESTED BY: <i>William Kao</i>	

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 10 M

No.	Freq. (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Antenna Factor (dB)	Cable Factor (dB)	Pre-Amp. Factor (dB)	Correction Factor (dB)
1	120.00	15.6 QP	30.00	-14.40	4.00H	117	3.24	11.49	0.82	0.00	-12.31
2	144.25	14.2 QP	30.00	-15.80	4.00H	320	2.79	10.45	0.94	0.00	-11.38
3	180.57	16.3 QP	30.00	-13.70	4.00H	250	6.83	8.40	1.09	0.00	-9.49
4	315.99	21.3 QP	37.00	-15.70	2.38H	254	6.78	13.01	1.48	0.00	-14.49
5	541.66	27.4 QP	37.00	-9.60	1.99H	275	6.70	18.71	2.04	0.00	-20.75
6	696.68	28.5 QP	37.00	-8.50	1.44H	113	7.12	18.92	2.46	0.00	-21.38
7	720.00	26.9 QP	37.00	-10.10	1.31H	122	5.21	19.26	2.49	0.00	-21.74
8	815.92	26.3 QP	37.00	-10.70	1.01H	348	3.96	19.66	2.72	0.00	-22.37

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 10 M

No.	Freq. (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Antenna Factor (dB)	Cable Factor (dB)	Pre-Amp. Factor (dB)	Correction Factor (dB)
1	119.69	17.4 QP	30.00	-12.60	1.00V	280	5.09	11.49	0.82	0.00	-12.31
2	144.04	18.9 QP	30.00	-11.10	1.00V	5	7.52	10.45	0.94	0.00	-11.38
3	180.56	16.8 QP	30.00	-13.20	1.00V	123	7.31	8.40	1.09	0.00	-9.49
4	315.98	21.0 QP	37.00	-16.00	1.00V	337	6.52	13.01	1.48	0.00	-14.49
5	541.66	29.1 QP	37.00	-7.90	3.57V	319	8.36	18.71	2.04	0.00	-20.75
6	696.80	28.6 QP	37.00	-8.40	2.77V	60	7.28	18.92	2.46	0.00	-21.37
7	720.02	29.5 QP	37.00	-7.50	2.01V	342	7.76	19.26	2.49	0.00	-21.75
8	815.98	28.0 QP	37.00	-9.00	1.62V	24	5.67	19.66	2.72	0.00	-22.37

- REMARKS:**
1. Emission level(dBuV/m)=Raw Value(dBuV) – Correction Factor(dB)
 2. Correction Factor(dB) = Pre-Amplifier Factor (dB) - Antenna Factor (dB) - Cable Factor (dB)
 3. Pre-Amplifier Factor (dB) = 0, when the test receiver is used to read the value and because it did not use the Pre-Amplifier.
 4. The other emission levels were very low against the limit.
 5. Margin value = Emission level – Limit value.

5 PHOTOGRAPHS OF THE TEST CONFIGURATION

CONDUCTED EMISSION TEST



RADIATED EMISSION TEST





6 APPENDIX - INFORMATION ON THE TESTING LABORATORIES

We, ADT Corp., were founded in 1988 to provide our best service in EMC and Safety consultation. Our laboratories are accredited by the following approval agencies according to ISO/IEC 17025, Guide 25 or EN 45001:

USA	FCC, NVLAP
Germany	TUV Rheinland
Japan	VCCI
New Zealand	MoC
Norway	NEMKO, DNV
U.K.	INCHCAPE
R.O.C.	BSMI

Copies of accreditation certificates of our laboratories obtained from approval agencies can be downloaded from our web site: www.adt.com.tw/index.5/phtml. If you have any comments, please feel free to contact us at the following:

Lin Kou EMC Lab:

Tel: 886-2-26052180

Fax: 886-2-26052943

Hsin Chu EMC Lab:

Tel: 886-35-935343

Fax: 886-35-935342

Lin Kou Safety Lab:

Tel: 886-2-26093195

Fax: 886-2-26093184

Design Center:

Tel: 886-2-26093195

Fax: 886-2-26093184

Email: service@mail.adt.com.tw

Web Site: www.adt.com.tw

The address and road map of all our labs can be found in our web site also.